

FCC Test Report

Report No.: RFBHYD-WTW-P21051101A

FCC ID: I881WSM20

Test Model: WSM20

Received Date: 2021/12/7

Test Date: 2021/12/16 ~ 2021/12/23

Issued Date: 2022/2/23

Applicant: Zyxel Communications Corporation

Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards and References	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Conditions.....	37
4.2.7 Test Results	38
4.3 6dB Bandwidth Measurement	40
4.3.1 Limits of 6dB Bandwidth Measurement	40
4.3.2 Test Setup.....	40
4.3.3 Test Instruments	40
4.3.4 Test Procedure	40
4.3.5 Deviation from Test Standard	40
4.3.6 EUT Operating Conditions.....	40
4.3.7 Test Result	41
4.4 Conducted Output Power Measurement.....	43
4.4.1 Limits of Conducted Output Power Measurement	43
4.4.2 Test Setup.....	43
4.4.3 Test Instruments	43
4.4.4 Test Procedures.....	43
4.4.5 Deviation from Test Standard	43
4.4.6 EUT Operating Conditions.....	43
4.4.7 Test Results	44
4.5 Power Spectral Density Measurement.....	48
4.5.1 Limits of Power Spectral Density Measurement	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments	48
4.5.4 Test Procedure	48
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Condition	48

4.5.7 Test Results	49
4.6 Conducted Out of Band Emission Measurement.....	51
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	51
4.6.2 Test Setup.....	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	51
5 Pictures of Test Arrangements.....	68
Annex A - Band-Edge Measurement.....	69
Appendix – Information of the Testing Laboratories	73

Release Control Record

Issue No.	Description	Date Issued
RFBHYD-WTW-P21051101A	Original release.	2022/2/23

1 Certificate of Conformity

Product: AX1800 Dual-Band WiFi 6 System

Brand: ZYXEL

Test Model: WSM20

Sample Status: Engineering sample

Applicant: Zyxel Communications Corporation

Test Date: 2021/12/16 ~ 2021/12/23

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Evy Chen, **Date:** 2022/2/23

Evy Chen / Specialist

Approved by : Clark Lin, **Date:** 2022/2/23

Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -12.38 dB at 0.45066 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.6 dB at 2383.70, 2487.30 and 2483.50 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex (MHF) not a standard connector.

Note:

1. For 2.4 GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX1800 Dual-Band WiFi 6 System
Brand	ZYXEL
Test Model	WSM20
RF CPU Model No.	MT7621AT
RF Chip Model No.	MT7975DN
FW Version	V1.00(ABZF.0)B6
Status of EUT	Engineering sample
Power Supply Rating	12 Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT (20/40) mode 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 300 Mbps VHT: up to 400 Mbps 802.11ax: up to 573.5 Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7
Output Power	CDD Mode: 828.054 mW Beamforming Mode: 825.486 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory	- AC Adapter - Ethernet Cable (Unshielded, 1.5m)

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter and following below table:

Brand	Model No.	Spec.
APD	WB-18Q12FU	AC Input: 100-240V, 50-60Hz, 0.6A Max. DC Output: 12.0V, 1.5A 18.0W DC Cable: Unshielded, 2.0m

3. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
2	2.4G_Chain 0	WHAYU	56-001-000044Z	2.5	2.4~2.4835GHz	Dipole	i-pex(MHF)	115
	5G_Chain 0			3.4	5.15~5.85GHz			
3	2.4G_Chain 1	WHAYU	56-001-000045Z	2.4	2.4~2.4835GHz	PIFA	i-pex(MHF)	115
	5G_Chain 1			3.4	5.15~5.85GHz			

4. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report.

5. The power setting are list as below:

CDD Mode											
802.11b		802.11g		VHT20		VHT40		802.11ax (HE20)		802.11ax (HE40)	
Fre. (MHz)	Power Setting	Fre. (MHz)	Power Setting	Fre. (MHz)	Power Setting						
2412	19.5	2412	19	2412	17.5	2422	16	2412	17.5	2422	16
2437	21.5	2437	23	2437	23.5	2437	18.5	2437	23.5	2437	18.5
2462	19	2462	19	2462	17.5	2452	16.5	2462	17.5	2452	16.5

Beamforming Mode							
VHT20		VHT40		802.11ax (HE20)		802.11ax (HE40)	
Fre. (MHz)	Power Setting	Fre. (MHz)	Power Setting	Fre. (MHz)	Power Setting	Fre. (MHz)	Power Setting
2412	17.5	2422	16	2412	17.5	2422	16
2437	23.5	2437	18.5	2437	23.5	2437	18.5
2462	17.5	2452	16.5	2462	17.5	2452	16.5

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

7. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	8	2447
4	2427	9	2452
5	2432		
6	2437		
7	2442		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE≥1G: Radiated Emission above 1GHz &
 Bandedge Measurement
 PLC: Power Line Conducted Emission

 RE<1G: Radiated Emission below 1GHz
 APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11b	1 to 11	6	DSSS	DBPSK	MCS0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11b	1 to 11	6	DSSS	DBPSK	MCS0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Beamforming Mode (output power only)					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	22deg. C, 70%RH	120Vac, 60Hz	Ryan Du
RE<1G	22deg. C, 70%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Ryan Du
APCM	25deg. C, 60%RH	120Vac, 60Hz	Eric Peng

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = $8.415 \text{ ms} / 8.478 \text{ ms} = 0.993$

802.11g: Duty cycle = $2.982 \text{ ms} / 3.03 \text{ ms} = 0.984$

802.11ax (HE20): Duty cycle = $5.44 \text{ ms} / 5.508 \text{ ms} = 0.988$

802.11ax (HE40): Duty cycle = $5.094 \text{ ms} / 5.155 \text{ ms} = 0.988$

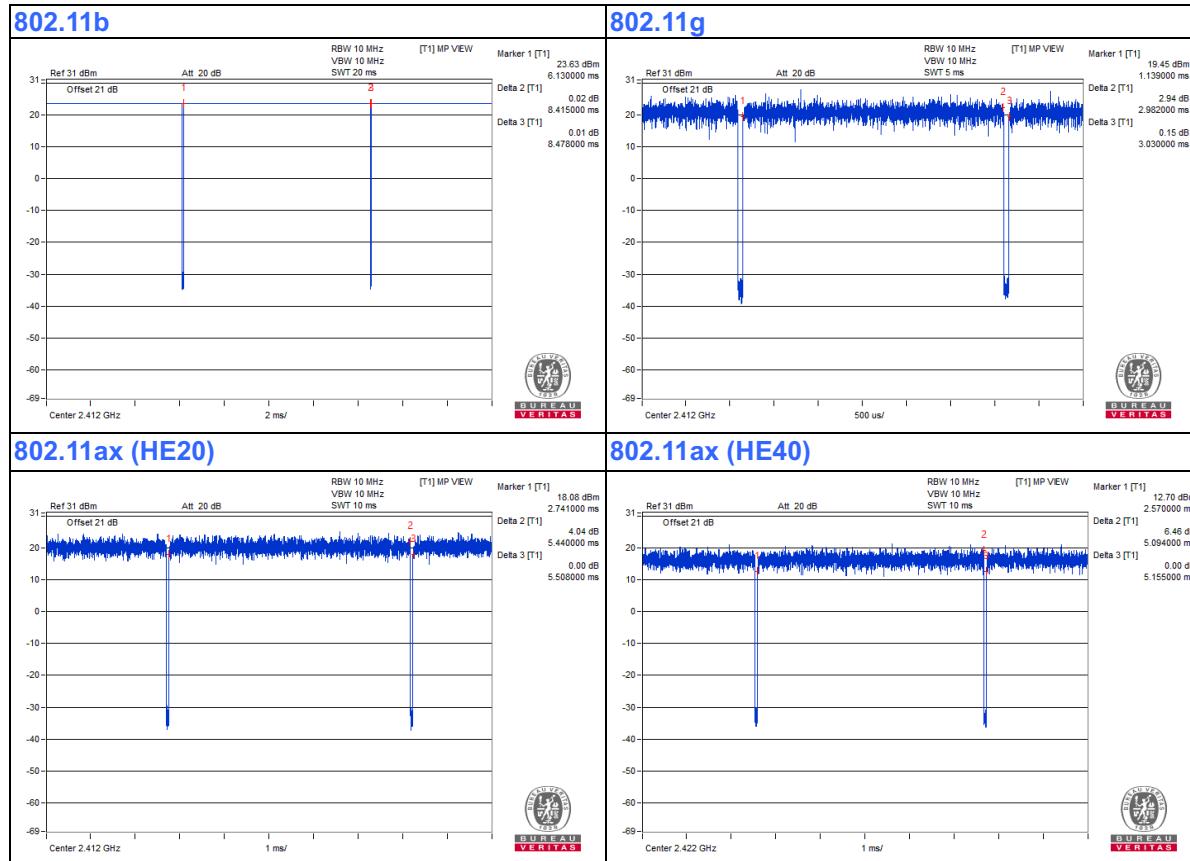

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	DoC	Provided by Lab
B.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab
C.	Laptop	DELL	E5430	HYV4VY1	DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	2	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	1	1.5	No	0	Supplied by client
5.	DC Cable	1	2	No	0	Supplied by client

3.4.1 Configuration of System under Test

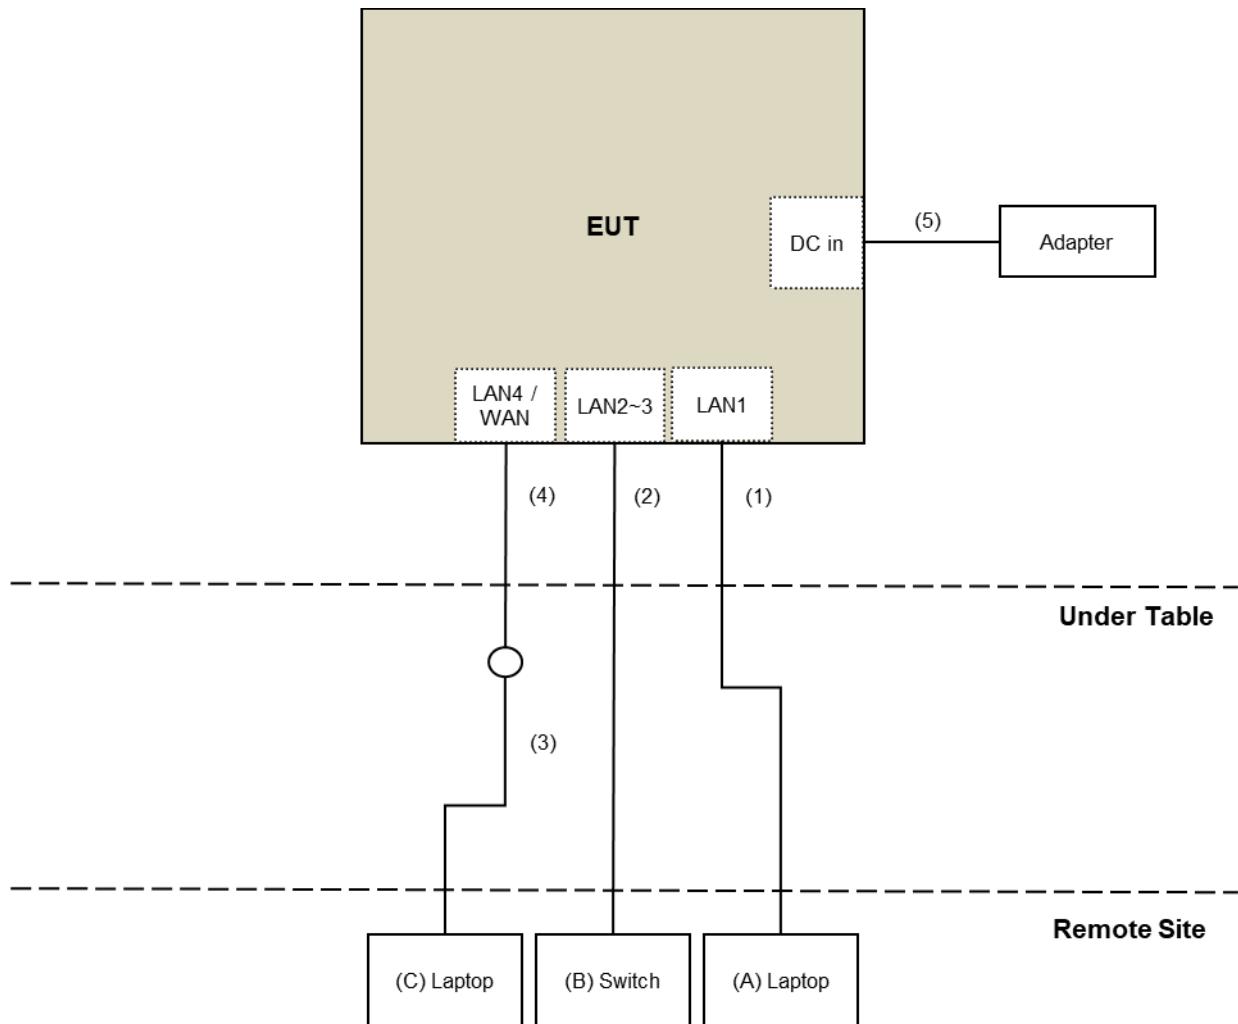

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{uV}/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission & Bandedge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver(20 Hz to 44 GHz) Keysight	N9038A	MY54450088	2021/7/6	2022/7/5
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Pre_Amplifier EMCI	EMC001340	980142	2021/5/24	2022/5/23
LOOP ANTENNA Electro-Metrics	EM-6879	264	2021/3/5	2022/3/4
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2021/1/7	2022/1/6
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2021/1/7	2022/1/6
Pre_Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	2021/10/19	2022/10/18
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-361	2021/10/26	2022/10/25
RF Coaxial Cable COMMATE/PEWC	8D	966-3-1	2021/3/16	2022/3/15
RF Coaxial Cable COMMATE/PEWC	8D	966-3-2	2021/3/16	2022/3/15
RF Coaxial Cable COMMATE/PEWC	8D	966-3-3	2021/3/16	2022/3/15
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	2021/9/23	2022/9/22
Horn Antenna Schwarzbeck	BBHA9120-D	9120D-406	2021/11/14	2022/11/13
Pre_Amplifier EMCI	EMC12630SE	980384	2021/1/11	2022/1/10
RF Coaxial Cable EMCI	EMC104-SM-SM-1500	180504	2021/4/26	2022/4/25
RF Coaxial Cable EMCI	EMC104-SM-SM-2000	180601	2021/6/8	2022/6/7
RF Coaxial Cable EMCI	EMC104-SM-SM-6000	210201	2021/5/13	2022/5/12
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	NA	NA
Spectrum Analyzer Keysight	N9030A	MY54490679	2021/7/9	2022/7/8
Pre_Amplifier EMCI	EMC184045SE	980387	2021/1/11	2022/1/10
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170519	2021/11/14	2022/11/13
RF Cable-Frequency range: 1-40GHz EMCI	EMC102-KM-KM-1200	160924	2021/1/11	2022/1/10

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: 2021/12/16 ~ 2021/12/23

For other test items test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	101516	2021/3/8	2022/3/7
Power Meter Anritsu	ML2495A	1529002	2021/6/21	2022/6/20
Pulse Power Sensor Anritsu	MA2411B	1339443	2021/5/31	2022/5/30
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2021/4/13	2022/4/12
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2021/12/23

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

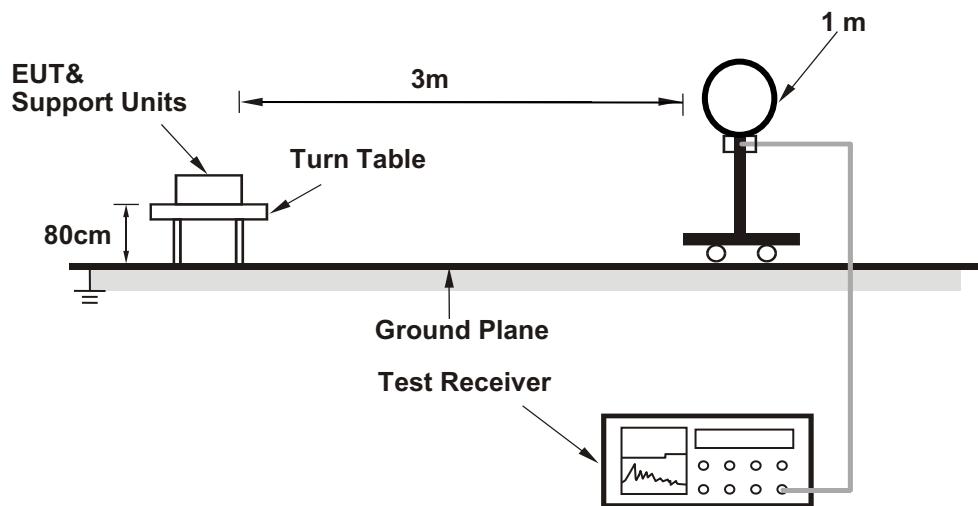

For Radiated emission 30MHz to 1GHz

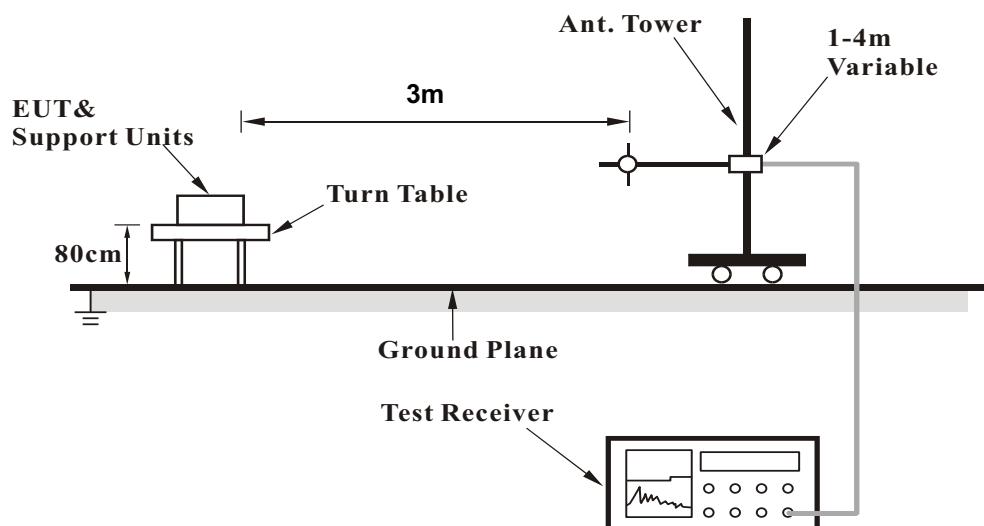

For Radiated emission above 1GHz

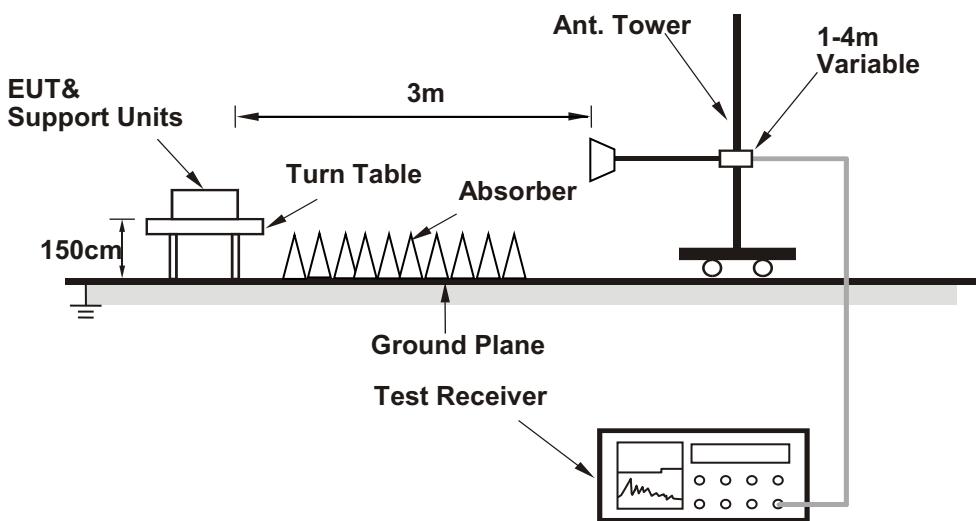

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop Computer which is placed on remote site.
- Controlling software (QA Tool 0.0.2.15) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2383.70	60.5 PK	74.0	-13.5	1.85 H	360	61.7	-1.2
2	2383.70	53.4 AV	54.0	-0.6	1.85 H	360	54.6	-1.2
3	*2412.00	112.3 PK			1.85 H	360	113.6	-1.3
4	*2412.00	109.8 AV			1.85 H	360	111.1	-1.3
5	4824.00	48.2 PK	74.0	-25.8	2.05 H	232	44.8	3.4
6	4824.00	46.2 AV	54.0	-7.8	2.05 H	232	42.8	3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.10	59.5 PK	74.0	-14.5	3.83 V	191	60.7	-1.2
2	2387.10	47.9 AV	54.0	-6.1	3.83 V	191	49.1	-1.2
3	2390.00	58.3 PK	74.0	-15.7	3.83 V	191	59.5	-1.2
4	2390.00	47.7 AV	54.0	-6.3	3.83 V	191	48.9	-1.2
5	*2412.00	106.6 PK			3.83 V	191	107.9	-1.3
6	*2412.00	104.4 AV			3.83 V	191	105.7	-1.3
7	4824.00	51.3 PK	74.0	-22.7	1.72 V	224	47.9	3.4
8	4824.00	49.9 AV	54.0	-4.1	1.72 V	224	46.5	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.20	57.7 PK	74.0	-16.3	1.54 H	360	58.9	-1.2
2	2386.20	47.6 AV	54.0	-6.4	1.54 H	360	48.8	-1.2
3	2386.57	55.9 PK	74.0	-18.1	1.54 H	360	57.1	-1.2
4	2386.57	43.9 AV	54.0	-10.1	1.54 H	360	45.1	-1.2
5	*2437.00	113.6 PK			1.54 H	360	114.9	-1.3
6	*2437.00	111.0 AV			1.54 H	360	112.3	-1.3
7	2487.30	58.6 PK	74.0	-15.4	1.54 H	360	60.0	-1.4
8	2487.30	47.7 AV	54.0	-6.3	1.54 H	360	49.1	-1.4
9	4874.00	49.7 PK	74.0	-24.3	2.04 H	231	46.3	3.4
10	4874.00	47.5 AV	54.0	-6.5	2.04 H	231	44.1	3.4
11	7311.00	49.4 PK	74.0	-24.6	1.81 H	326	39.9	9.5
12	7311.00	43.9 AV	54.0	-10.1	1.81 H	326	34.4	9.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.57	59.5 PK	74.0	-14.5	3.77 V	180	60.7	-1.2
2	2386.57	50.8 AV	54.0	-3.2	3.77 V	180	52.0	-1.2
3	*2437.00	110.9 PK			3.77 V	180	112.2	-1.3
4	*2437.00	108.4 AV			3.77 V	180	109.7	-1.3
5	2487.30	61.2 PK	74.0	-12.8	3.77 V	180	62.6	-1.4
6	2487.30	53.4 AV	54.0	-0.6	3.77 V	180	54.8	-1.4
7	4874.00	51.3 PK	74.0	-22.7	1.81 V	225	47.9	3.4
8	4874.00	50.1 AV	54.0	-3.9	1.81 V	225	46.7	3.4
9	7311.00	46.9 PK	74.0	-27.1	1.73 V	110	37.4	9.5
10	7311.00	39.6 AV	54.0	-14.4	1.73 V	110	30.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			2.04 H	119	113.0	-1.4
2	*2462.00	109.2 AV			2.04 H	119	110.6	-1.4
3	2483.50	62.1 PK	74.0	-11.9	2.04 H	119	63.5	-1.4
4	2483.50	53.3 AV	54.0	-0.7	2.04 H	119	54.7	-1.4
5	4924.00	47.9 PK	74.0	-26.1	2.06 H	233	44.4	3.5
6	4924.00	45.8 AV	54.0	-8.2	2.06 H	233	42.3	3.5
7	7386.00	45.1 PK	74.0	-28.9	1.81 H	325	35.5	9.6
8	7386.00	36.4 AV	54.0	-17.6	1.81 H	325	26.8	9.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.1 PK			3.61 V	191	109.5	-1.4
2	*2462.00	105.9 AV			3.61 V	191	107.3	-1.4
3	2483.50	59.1 PK	74.0	-14.9	3.61 V	191	60.5	-1.4
4	2483.50	50.7 AV	54.0	-3.3	3.61 V	191	52.1	-1.4
5	4924.00	48.4 PK	74.0	-25.6	1.70 V	226	44.9	3.5
6	4924.00	46.3 AV	54.0	-7.7	1.70 V	226	42.8	3.5
7	7386.00	42.7 PK	74.0	-31.3	1.78 V	112	33.1	9.6
8	7386.00	32.8 AV	54.0	-21.2	1.78 V	112	23.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.30	70.8 PK	74.0	-3.2	1.89 H	10	72.0	-1.2
2	2388.30	52.4 AV	54.0	-1.6	1.89 H	10	53.6	-1.2
3	2390.00	69.7 PK	74.0	-4.3	1.89 H	10	70.9	-1.2
4	2390.00	52.1 AV	54.0	-1.9	1.89 H	10	53.3	-1.2
5	*2412.00	113.8 PK			1.89 H	10	115.1	-1.3
6	*2412.00	102.4 AV			1.89 H	10	103.7	-1.3
7	4824.00	44.5 PK	74.0	-29.5	2.04 H	234	41.1	3.4
8	4824.00	31.2 AV	54.0	-22.8	2.04 H	234	27.8	3.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	2.78 V	175	72.5	-1.2
2	2390.00	50.4 AV	54.0	-3.6	2.78 V	175	51.6	-1.2
3	*2412.00	108.7 PK			2.78 V	175	110.0	-1.3
4	*2412.00	98.3 AV			2.78 V	175	99.6	-1.3
5	4824.00	45.0 PK	74.0	-29.0	1.72 V	224	41.6	3.4
6	4824.00	32.0 AV	54.0	-22.0	1.72 V	224	28.6	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.54 H	360	68.7	-1.2
2	2390.00	53.3 AV	54.0	-0.7	1.54 H	360	54.5	-1.2
3	*2437.00	118.3 PK			1.54 H	360	119.6	-1.3
4	*2437.00	109.2 AV			1.54 H	360	110.5	-1.3
5	2483.50	69.2 PK	74.0	-4.8	1.54 H	360	70.6	-1.4
6	2483.50	52.1 AV	54.0	-1.9	1.54 H	360	53.5	-1.4
7	4874.00	45.9 PK	74.0	-28.1	2.06 H	232	42.5	3.4
8	4874.00	32.8 AV	54.0	-21.2	2.06 H	232	29.4	3.4
9	7311.00	44.9 PK	74.0	-29.1	1.84 H	326	35.4	9.5
10	7311.00	33.2 AV	54.0	-20.8	1.84 H	326	23.7	9.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	3.67 V	162	70.3	-1.2
2	2390.00	51.2 AV	54.0	-2.8	3.67 V	162	52.4	-1.2
3	*2437.00	115.6 PK			3.67 V	162	116.9	-1.3
4	*2437.00	104.5 AV			3.67 V	162	105.8	-1.3
5	2483.50	71.9 PK	74.0	-2.1	3.67 V	162	73.3	-1.4
6	2483.50	53.4 AV	54.0	-0.6	3.67 V	162	54.8	-1.4
7	4874.00	45.6 PK	74.0	-28.4	1.64 V	224	42.2	3.4
8	4874.00	33.4 AV	54.0	-20.6	1.64 V	224	30.0	3.4
9	7311.00	44.7 PK	74.0	-29.3	1.77 V	112	35.2	9.5
10	7311.00	32.9 AV	54.0	-21.1	1.77 V	112	23.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.7 PK			1.50 H	360	114.1	-1.4
2	*2462.00	101.9 AV			1.50 H	360	103.3	-1.4
3	2483.50	72.1 PK	74.0	-1.9	1.50 H	360	73.5	-1.4
4	2483.50	52.5 AV	54.0	-1.5	1.50 H	360	53.9	-1.4
5	4924.00	42.1 PK	74.0	-31.9	2.05 H	233	38.6	3.5
6	4924.00	31.1 AV	54.0	-22.9	2.05 H	233	27.6	3.5
7	7386.00	42.0 PK	74.0	-32.0	1.83 H	324	32.4	9.6
8	7386.00	31.2 AV	54.0	-22.8	1.83 H	324	21.6	9.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.4 PK			2.16 V	80	109.8	-1.4
2	*2462.00	96.6 AV			2.16 V	80	98.0	-1.4
3	2483.50	66.4 PK	74.0	-7.6	2.16 V	80	67.8	-1.4
4	2483.50	47.6 AV	54.0	-6.4	2.16 V	80	49.0	-1.4
5	4924.00	42.9 PK	74.0	-31.1	1.70 V	227	39.4	3.5
6	4924.00	30.1 AV	54.0	-23.9	1.70 V	227	26.6	3.5
7	7386.00	42.9 PK	74.0	-31.1	1.77 V	112	33.3	9.6
8	7386.00	30.7 AV	54.0	-23.3	1.77 V	112	21.1	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.50	72.7 PK	74.0	-1.3	1.51 H	13	73.9	-1.2
2	2388.50	52.9 AV	54.0	-1.1	1.51 H	13	54.1	-1.2
3	2390.00	72.8 PK	74.0	-1.2	1.51 H	13	74.0	-1.2
4	2390.00	52.4 AV	54.0	-1.6	1.51 H	13	53.6	-1.2
5	*2412.00	113.2 PK			1.51 H	13	114.5	-1.3
6	*2412.00	100.3 AV			1.51 H	13	101.6	-1.3
7	4824.00	41.7 PK	74.0	-32.3	2.05 H	232	38.3	3.4
8	4824.00	30.8 AV	54.0	-23.2	2.05 H	232	27.4	3.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.6 PK	74.0	-1.4	2.79 V	174	73.8	-1.2
2	2390.00	50.4 AV	54.0	-3.6	2.79 V	174	51.6	-1.2
3	*2412.00	109.6 PK			2.79 V	174	110.9	-1.3
4	*2412.00	97.5 AV			2.79 V	174	98.8	-1.3
5	4824.00	42.7 PK	74.0	-31.3	1.72 V	230	39.3	3.4
6	4824.00	30.3 AV	54.0	-23.7	1.72 V	230	26.9	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	1.54 H	360	66.9	-1.2
2	2390.00	51.7 AV	54.0	-2.3	1.54 H	360	52.9	-1.2
3	*2437.00	118.4 PK			1.54 H	360	119.7	-1.3
4	*2437.00	105.4 AV			1.54 H	360	106.7	-1.3
5	2483.50	66.8 PK	74.0	-7.2	1.54 H	360	68.2	-1.4
6	2483.50	51.1 AV	54.0	-2.9	1.54 H	360	52.5	-1.4
7	4874.00	46.5 PK	74.0	-27.5	2.05 H	233	43.1	3.4
8	4874.00	33.4 AV	54.0	-20.6	2.05 H	233	30.0	3.4
9	7311.00	45.3 PK	74.0	-28.7	1.84 H	324	35.8	9.5
10	7311.00	33.6 AV	54.0	-20.4	1.84 H	324	24.1	9.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	3.68 V	161	69.3	-1.2
2	2390.00	52.5 AV	54.0	-1.5	3.68 V	161	53.7	-1.2
3	*2437.00	117.1 PK			3.68 V	161	118.4	-1.3
4	*2437.00	104.0 AV			3.68 V	161	105.3	-1.3
5	2483.50	71.6 PK	74.0	-2.4	3.68 V	161	73.0	-1.4
6	2483.50	53.4 AV	54.0	-0.6	3.68 V	161	54.8	-1.4
7	4874.00	45.2 PK	74.0	-28.8	1.73 V	232	41.8	3.4
8	4874.00	33.5 AV	54.0	-20.5	1.73 V	232	30.1	3.4
9	7311.00	45.5 PK	74.0	-28.5	1.72 V	112	36.0	9.5
10	7311.00	33.6 AV	54.0	-20.4	1.72 V	112	24.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.8 PK			1.49 H	360	114.2	-1.4
2	*2462.00	99.6 AV			1.49 H	360	101.0	-1.4
3	2483.50	67.9 PK	74.0	-6.1	1.49 H	360	69.3	-1.4
4	2483.50	50.1 AV	54.0	-3.9	1.49 H	360	51.5	-1.4
5	2486.60	70.5 PK	74.0	-3.5	1.49 H	360	71.9	-1.4
6	2486.60	52.4 AV	54.0	-1.6	1.49 H	360	53.8	-1.4
7	4924.00	42.6 PK	74.0	-31.4	2.06 H	235	39.1	3.5
8	4924.00	30.5 AV	54.0	-23.5	2.06 H	235	27.0	3.5
9	7386.00	44.2 PK	74.0	-29.8	1.85 H	325	34.6	9.6
10	7386.00	30.6 AV	54.0	-23.4	1.85 H	325	21.0	9.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.6 PK			2.67 V	80	110.0	-1.4
2	*2462.00	94.8 AV			2.67 V	80	96.2	-1.4
3	2483.50	68.9 PK	74.0	-5.1	2.67 V	80	70.3	-1.4
4	2483.50	49.0 AV	54.0	-5.0	2.67 V	80	50.4	-1.4
5	4924.00	42.1 PK	74.0	-31.9	1.70 V	226	38.6	3.5
6	4924.00	30.3 AV	54.0	-23.7	1.70 V	226	26.8	3.5
7	7386.00	43.3 PK	74.0	-30.7	1.73 V	113	33.7	9.6
8	7386.00	30.4 AV	54.0	-23.6	1.73 V	113	20.8	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.50	71.3 PK	74.0	-2.7	1.82 H	360	72.5	-1.2
2	2388.50	52.5 AV	54.0	-1.5	1.82 H	360	53.7	-1.2
3	2390.00	69.6 PK	74.0	-4.4	1.82 H	360	70.8	-1.2
4	2390.00	50.6 AV	54.0	-3.4	1.82 H	360	51.8	-1.2
5	*2422.00	109.2 PK			1.82 H	360	110.5	-1.3
6	*2422.00	96.2 AV			1.82 H	360	97.5	-1.3
7	4844.00	40.5 PK	74.0	-33.5	2.05 H	234	37.1	3.4
8	4844.00	30.1 AV	54.0	-23.9	2.05 H	234	26.7	3.4
9	7266.00	43.2 PK	74.0	-30.8	1.86 H	322	33.8	9.4
10	7266.00	31.2 AV	54.0	-22.8	1.86 H	322	21.8	9.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	3.85 V	171	66.8	-1.2
2	2390.00	48.9 AV	54.0	-5.1	3.85 V	171	50.1	-1.2
3	*2422.00	105.4 PK			3.85 V	171	106.7	-1.3
4	*2422.00	92.2 AV			3.85 V	171	93.5	-1.3
5	4844.00	39.6 PK	74.0	-34.4	1.71 V	227	36.2	3.4
6	4844.00	29.2 AV	54.0	-24.8	1.71 V	227	25.8	3.4
7	7266.00	42.2 PK	74.0	-31.8	1.73 V	112	32.8	9.4
8	7266.00	30.4 AV	54.0	-23.6	1.73 V	112	21.0	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.54 H	360	72.6	-1.2
2	2390.00	52.6 AV	54.0	-1.4	1.54 H	360	53.8	-1.2
3	*2437.00	111.2 PK			1.54 H	360	112.5	-1.3
4	*2437.00	98.1 AV			1.54 H	360	99.4	-1.3
5	2483.50	64.4 PK	74.0	-9.6	1.54 H	360	65.8	-1.4
6	2483.50	48.3 AV	54.0	-5.7	1.54 H	360	49.7	-1.4
7	4874.00	42.6 PK	74.0	-31.4	2.06 H	235	39.2	3.4
8	4874.00	30.5 AV	54.0	-23.5	2.06 H	235	27.1	3.4
9	7311.00	43.9 PK	74.0	-30.1	1.85 H	324	34.4	9.5
10	7311.00	31.5 AV	54.0	-22.5	1.85 H	324	22.0	9.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	3.67 V	164	70.4	-1.2
2	2390.00	50.3 AV	54.0	-3.7	3.67 V	164	51.5	-1.2
3	*2437.00	109.8 PK			3.67 V	164	111.1	-1.3
4	*2437.00	96.7 AV			3.67 V	164	98.0	-1.3
5	2483.50	71.9 PK	74.0	-2.1	3.67 V	164	73.3	-1.4
6	2483.50	52.5 AV	54.0	-1.5	3.67 V	164	53.9	-1.4
7	4874.00	42.7 PK	74.0	-31.3	1.73 V	226	39.3	3.4
8	4874.00	30.2 AV	54.0	-23.8	1.73 V	226	26.8	3.4
9	7311.00	43.6 PK	74.0	-30.4	1.72 V	115	34.1	9.5
10	7311.00	30.6 AV	54.0	-23.4	1.72 V	115	21.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.3 PK			1.50 H	360	110.7	-1.4
2	*2452.00	95.6 AV			1.50 H	360	97.0	-1.4
3	2483.50	65.6 PK	74.0	-8.4	1.50 H	360	67.0	-1.4
4	2483.50	49.3 AV	54.0	-4.7	1.50 H	360	50.7	-1.4
5	2484.80	70.0 PK	74.0	-4.0	1.50 H	360	71.4	-1.4
6	2484.80	52.9 AV	54.0	-1.1	1.50 H	360	54.3	-1.4
7	2487.30	73.2 PK	74.0	-0.8	1.50 H	360	74.6	-1.4
8	2487.30	51.6 AV	54.0	-2.4	1.50 H	360	53.0	-1.4
9	4904.00	40.6 PK	74.0	-33.4	2.05 H	235	37.2	3.4
10	4904.00	30.2 AV	54.0	-23.8	2.05 H	235	26.8	3.4
11	7356.00	43.5 PK	74.0	-30.5	1.83 H	325	34.0	9.5
12	7356.00	31.4 AV	54.0	-22.6	1.83 H	325	21.9	9.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	104.6 PK			2.73 V	82	106.0	-1.4
2	*2452.00	91.1 AV			2.73 V	82	92.5	-1.4
3	2483.50	63.2 PK	74.0	-10.8	2.73 V	82	64.6	-1.4
4	2483.50	48.1 AV	54.0	-5.9	2.73 V	82	49.5	-1.4
5	4904.00	42.0 PK	74.0	-32.0	1.74 V	224	38.6	3.4
6	4904.00	30.2 AV	54.0	-23.8	1.74 V	224	26.8	3.4
7	7356.00	43.2 PK	74.0	-30.8	1.74 V	114	33.7	9.5
8	7356.00	30.4 AV	54.0	-23.6	1.74 V	114	20.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.71	23.5 QP	40.0	-16.5	2.50 H	274	31.5	-8.0
2	84.26	19.7 QP	40.0	-20.3	2.00 H	226	33.3	-13.6
3	162.07	26.6 QP	43.5	-16.9	1.50 H	243	34.5	-7.9
4	207.86	22.3 QP	43.5	-21.2	1.00 H	314	32.8	-10.5
5	322.29	27.0 QP	46.0	-19.0	1.00 H	201	32.6	-5.6
6	471.91	29.6 QP	46.0	-16.4	2.00 H	249	31.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

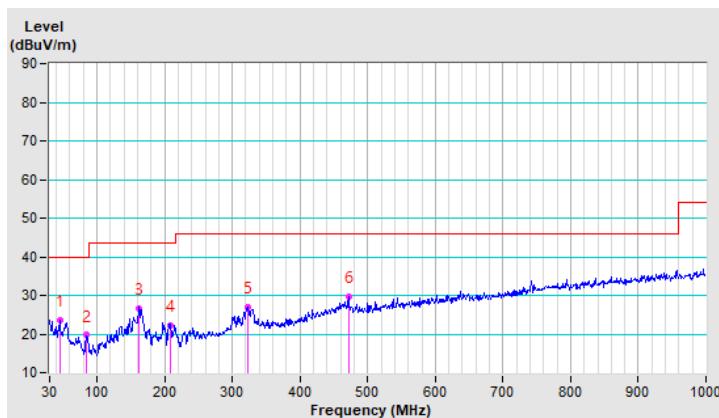


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.71	23.8 QP	40.0	-16.2	2.50 V	341	33.0	-9.2
2	45.97	33.0 QP	40.0	-7.0	2.50 V	357	41.1	-8.1
3	88.38	29.7 QP	43.5	-13.8	2.00 V	287	43.5	-13.8
4	214.53	24.8 QP	43.5	-18.7	1.00 V	89	35.2	-10.4
5	302.04	25.2 QP	46.0	-20.8	1.50 V	328	31.7	-6.5
6	468.97	29.7 QP	46.0	-16.3	1.00 V	29	31.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

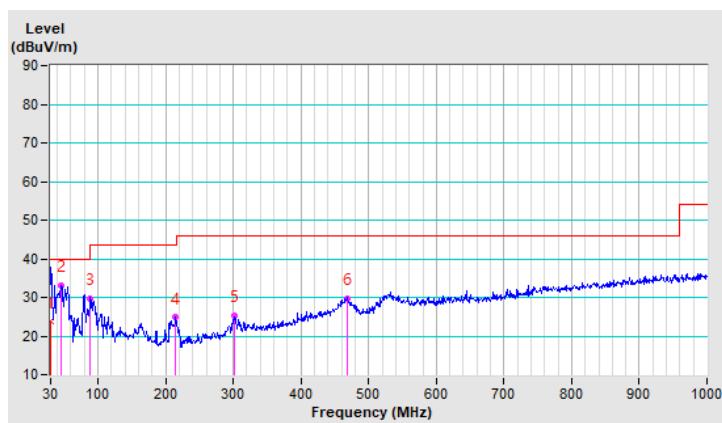

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	2021/10/13	2022/10/12
LISN R&S	ESH3-Z5	848773/004	2021/10/29	2022/10/28
LISN R & S	ESH3-Z5	835239/001	2021/3/26	2022/3/25
50 ohms Terminator	50	3	2021/10/27	2022/10/26
RF Coaxial Cable JYEO	5D-FB	COCCAB-001	2021/9/25	2022/9/24
Fixed attenuator STI	STI02-2200-10	005	2021/8/27	2022/8/26
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: 2021/12/23

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

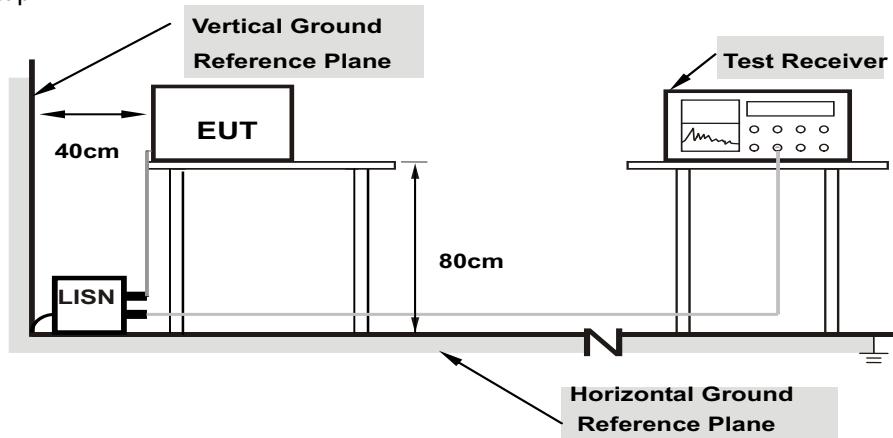

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16157	10.07	31.74	17.12	41.81	27.19	65.38	55.38	-23.57	-28.19
2	0.26314	10.09	23.71	9.96	33.80	20.05	61.33	51.33	-27.53	-31.28
3	0.45066	10.11	30.86	24.37	40.97	34.48	56.86	46.86	-15.89	-12.38
4	0.74331	10.13	18.24	9.51	28.37	19.64	56.00	46.00	-27.63	-26.36
5	1.92553	10.21	11.72	-1.59	21.93	8.62	56.00	46.00	-34.07	-37.38
6	3.34745	10.30	13.67	1.99	23.97	12.29	56.00	46.00	-32.03	-33.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16542	10.06	31.72	16.86	41.78	26.92	65.19	55.19	-23.41	-28.27
2	0.22827	10.08	24.99	8.26	35.07	18.34	62.51	52.51	-27.44	-34.17
3	0.38061	10.10	19.74	5.45	29.84	15.55	58.27	48.27	-28.43	-32.72
4	0.90385	10.13	10.37	-2.51	20.50	7.62	56.00	46.00	-35.50	-38.38
5	2.75376	10.26	9.54	-1.28	19.80	8.98	56.00	46.00	-36.20	-37.02
6	3.89441	10.32	11.82	4.91	22.14	15.23	56.00	46.00	-33.86	-30.77

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

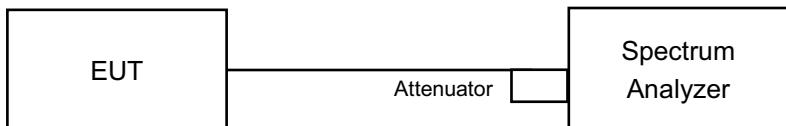

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.08	8.09	0.5	Pass
6	2437	8.09	8.09	0.5	Pass
11	2462	8.08	8.1	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.18	15.19	0.5	Pass
6	2437	15.17	15.51	0.5	Pass
11	2462	15.15	15.19	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.63	18.29	0.5	Pass
6	2437	18.8	18.78	0.5	Pass
11	2462	18.61	18.49	0.5	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	37.69	36.91	0.5	Pass
6	2437	37.49	36.53	0.5	Pass
9	2452	37.47	36.59	0.5	Pass

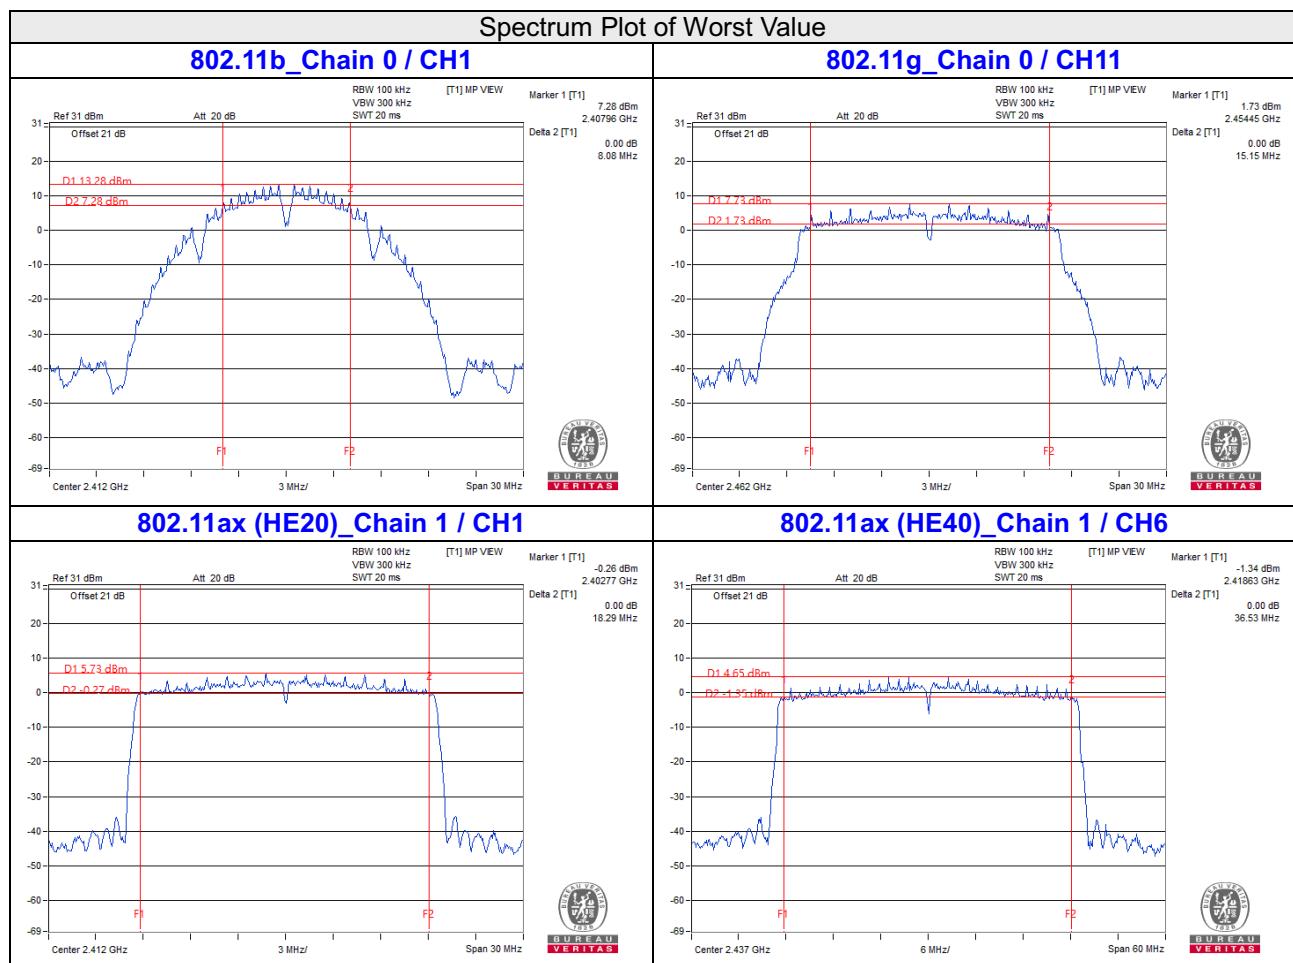

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup

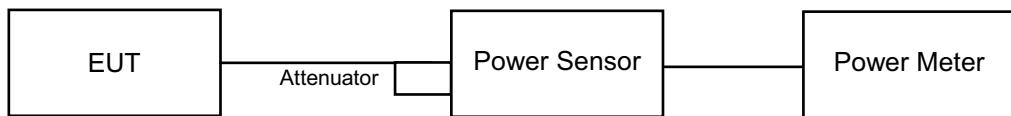

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

CDD Mode:

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.71	23.49	458.321	26.61	30	Pass
6	2437	25.09	25.05	642.739	28.08	30	Pass
11	2462	22.94	22.78	386.459	25.87	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	25.65	25.78	745.725	28.73	30	Pass
6	2437	26.12	26.22	828.054	29.18	30	Pass
11	2462	25.41	25.61	711.451	28.52	30	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.98	25.12	639.862	28.06	30	Pass
6	2437	25.89	26.15	800.248	29.03	30	Pass
11	2462	24.91	25.23	643.168	28.08	30	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	23.51	24.01	476.156	26.78	30	Pass
6	2437	25.12	25.42	673.425	28.28	30	Pass
9	2452	23.97	24.04	502.972	27.02	30	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	25.11	25.26	660.077	28.20	30	Pass
6	2437	26.03	26.28	825.486	29.17	30	Pass
11	2462	25.02	25.38	662.831	28.21	30	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	23.67	24.14	492.227	26.92	30	Pass
6	2437	25.27	25.54	694.608	28.42	30	Pass
9	2452	24.11	24.14	517.05	27.14	30	Pass

Beamforming Mode:
VHT20

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.98	25.12	639.862	28.06	30	Pass
6	2437	25.89	26.15	800.248	29.03	30	Pass
11	2462	24.91	25.23	643.168	28.08	30	Pass

Note: 1. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
 2. The directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT40

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	23.51	24.01	476.156	26.78	30	Pass
6	2437	25.12	25.42	673.425	28.28	30	Pass
9	2452	23.97	24.04	502.972	27.02	30	Pass

Note: 1. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
 2. The directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	25.11	25.26	660.077	28.20	30	Pass
6	2437	26.03	26.28	825.486	29.17	30	Pass
11	2462	25.02	25.38	662.831	28.21	30	Pass

Note: 1. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
 2. The directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	23.67	24.14	492.227	26.92	30	Pass
6	2437	25.27	25.54	694.608	28.42	30	Pass
9	2452	24.11	24.14	517.05	27.14	30	Pass

Note: 1. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
 2. The directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.

FOR AVERAGE POWER
CDD Mode:
802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	21.36	21.15	267.09	24.27
6	2437	23.46	23.13	427.409	26.31
11	2462	20.49	20.37	220.837	23.44

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	18.65	18.73	147.927	21.70
6	2437	22.74	22.53	366.992	25.65
11	2462	18.66	18.57	145.396	21.63

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	16.82	17.21	100.686	20.03
6	2437	22.71	22.74	374.57	25.74
11	2462	16.84	17.01	98.54	19.94

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	15.31	15.67	70.86	18.50
6	2437	17.97	18.03	126.194	21.01
9	2452	15.86	15.94	77.812	18.91

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	17.07	17.44	106.396	20.27
6	2437	22.94	22.96	394.486	25.96
11	2462	17.08	17.22	103.773	20.16

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	15.52	15.89	74.46	18.72
6	2437	18.21	18.27	133.365	21.25
9	2452	16.12	16.17	82.326	19.16

Beamforming Mode:

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	16.82	17.21	100.686	20.03
6	2437	22.71	22.74	374.57	25.74
11	2462	16.84	17.01	98.54	19.94

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	15.31	15.67	70.86	18.50
6	2437	17.97	18.03	126.194	21.01
9	2452	15.86	15.94	77.812	18.91

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	17.07	17.44	106.396	20.27
6	2437	22.94	22.96	394.486	25.96
11	2462	17.08	17.22	103.773	20.16

802.11ax (HE40)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	15.52	15.89	74.46	18.72
6	2437	18.21	18.27	133.365	21.25
9	2452	16.12	16.17	82.326	19.16

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup

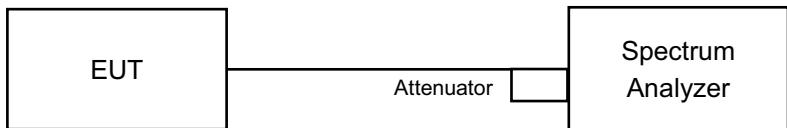

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	0.04	-1.16	2.49	8.00	Pass
6	2437	1.51	0.61	4.09	8.00	Pass
11	2462	-1.07	-1.56	1.70	8.00	Pass

Note:

3. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
4. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
5. The directional gain is 5.46 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-5.72	-4.09	-1.82	8.00	Pass
6	2437	-2.15	-1.72	1.08	8.00	Pass
11	2462	-6.59	-5.24	-2.85	8.00	Pass

Note:

1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
3. The directional gain is 5.46 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-8.72	-8.55	-5.62	8.00	Pass
6	2437	-2.61	-1.08	1.23	8.00	Pass
11	2462	-8.63	-8.54	-5.58	8.00	Pass

Note:


1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
3. The directional gain is 5.46 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
3	2422	-11.42	-13.39	-9.28	8.00	Pass
6	2437	-10.59	-10.56	-7.56	8.00	Pass
9	2452	-12.89	-11.46	-9.11	8.00	Pass

Note:

1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
3. The directional gain is 5.46 dBi < 6 dBi, so the power density limit shall not be reduced.

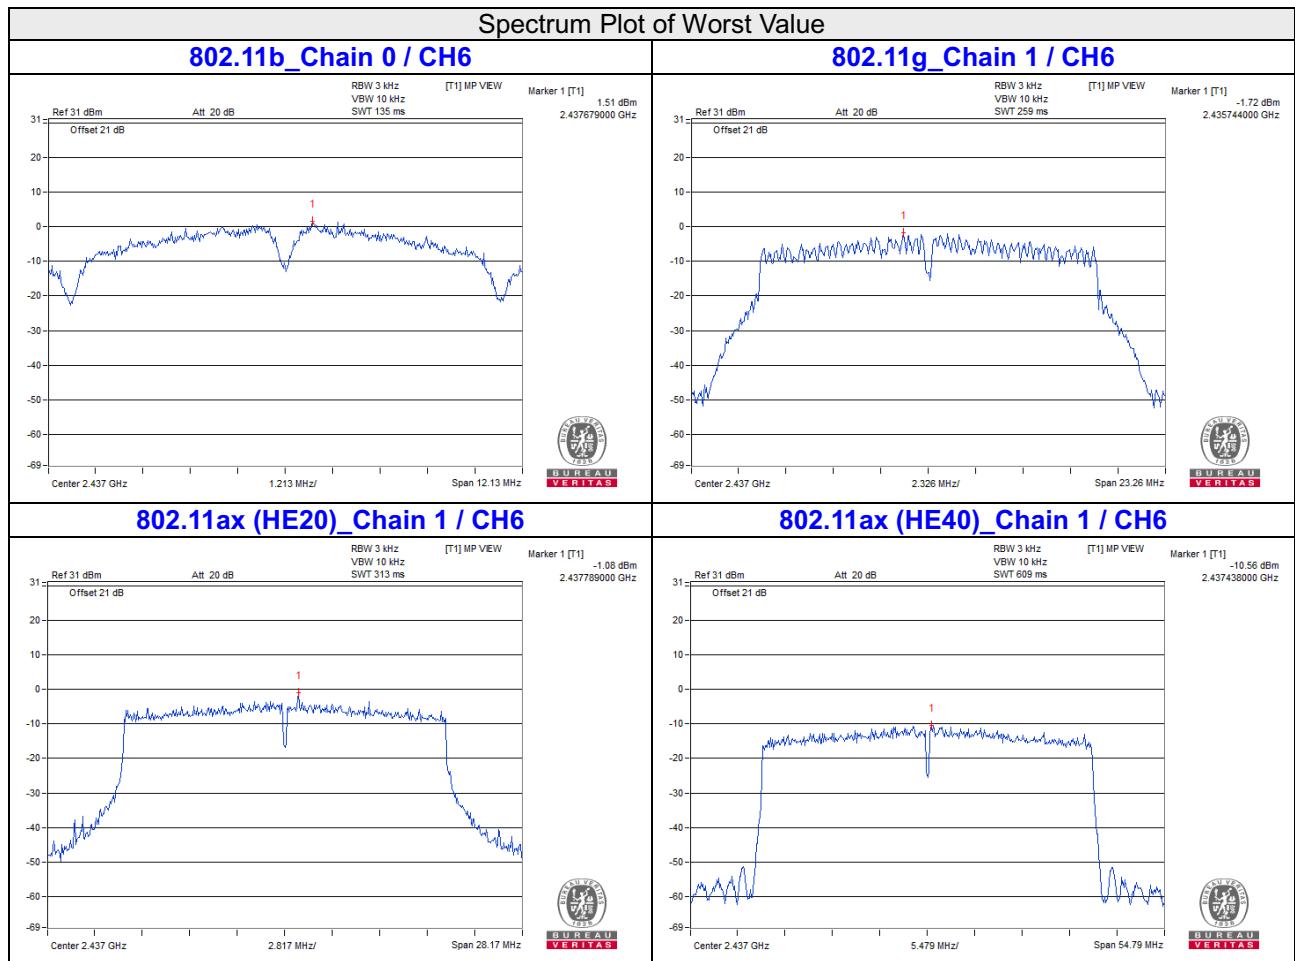


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

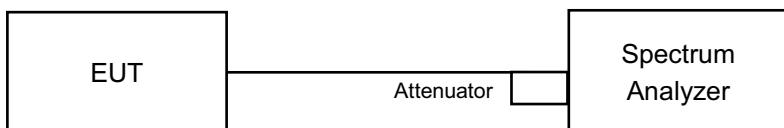

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.


CDD Mode
802.11b

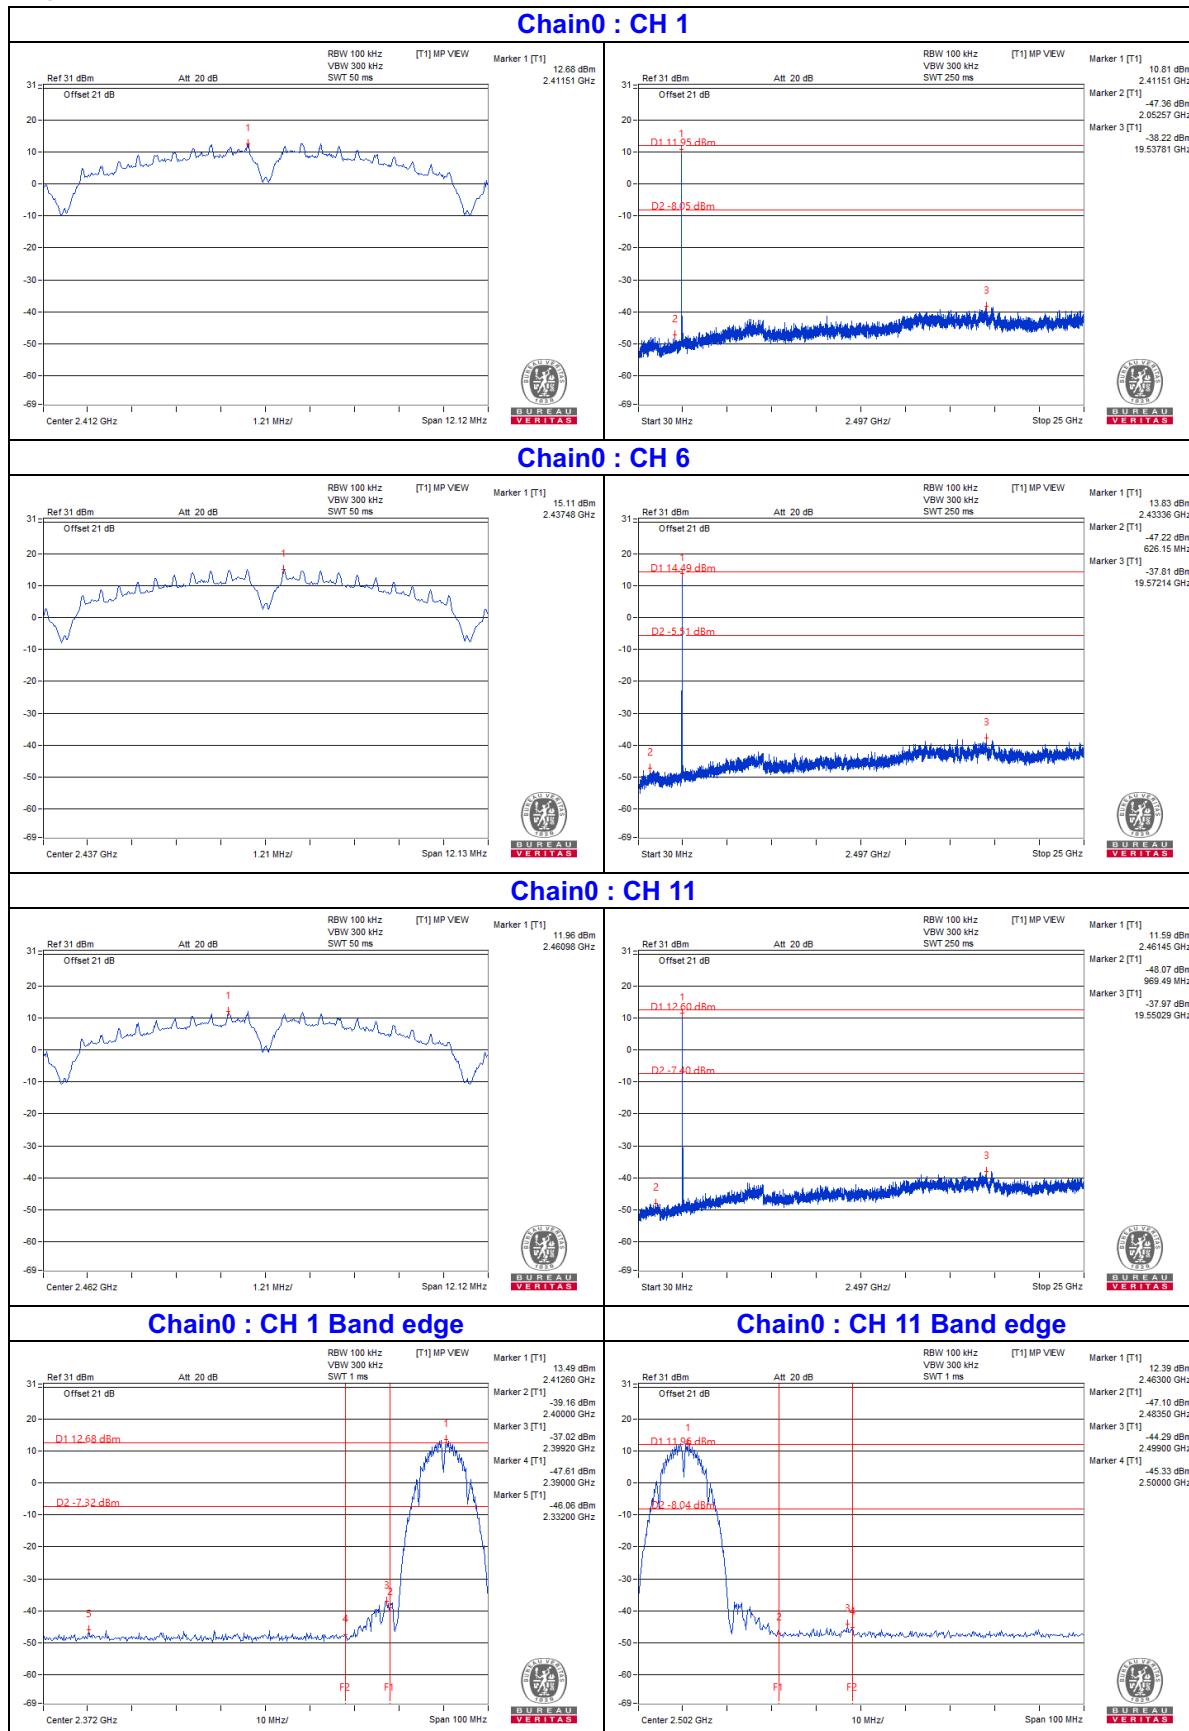


Chain1 : CH 1

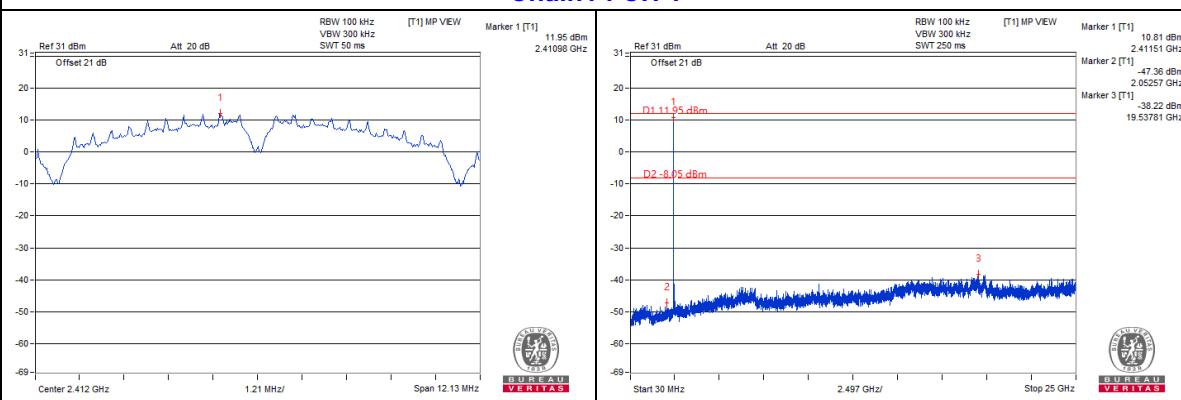


Chain1 : CH 6

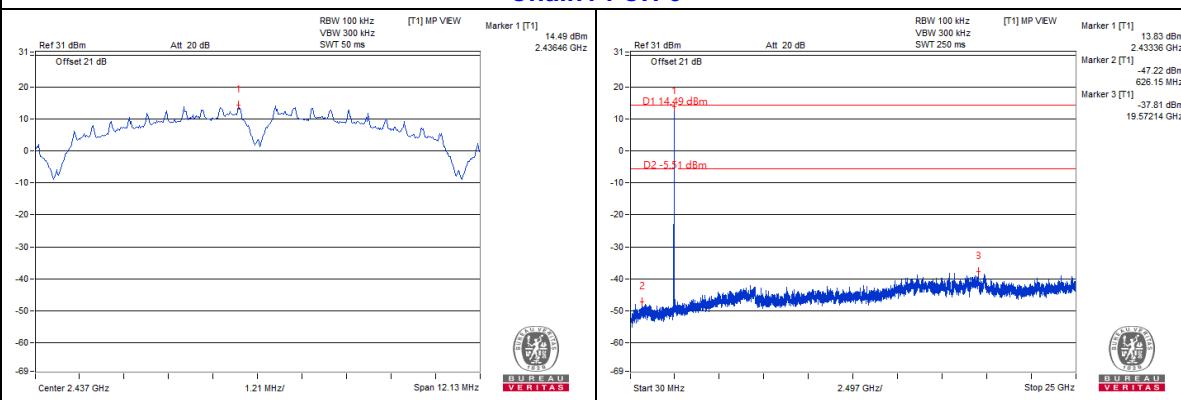


Chain1 : CH 11

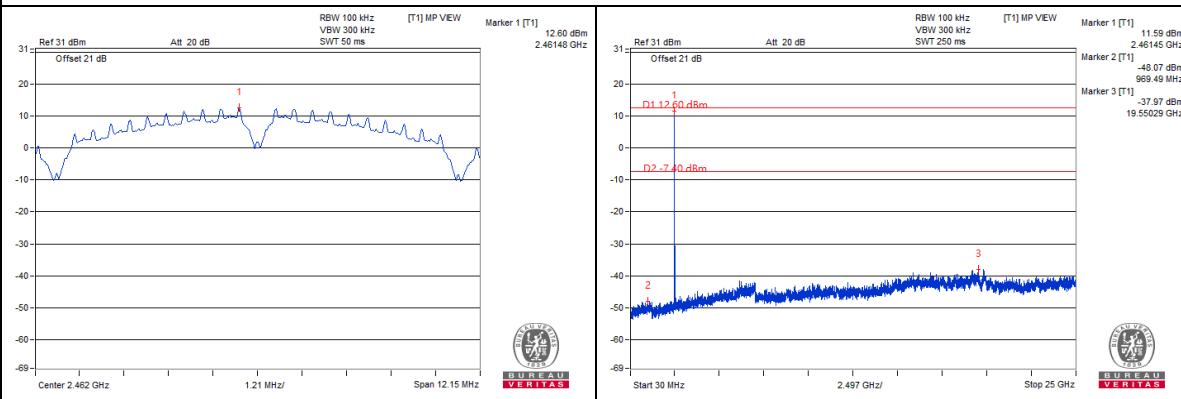


Chain1 : CH 1 Band edge

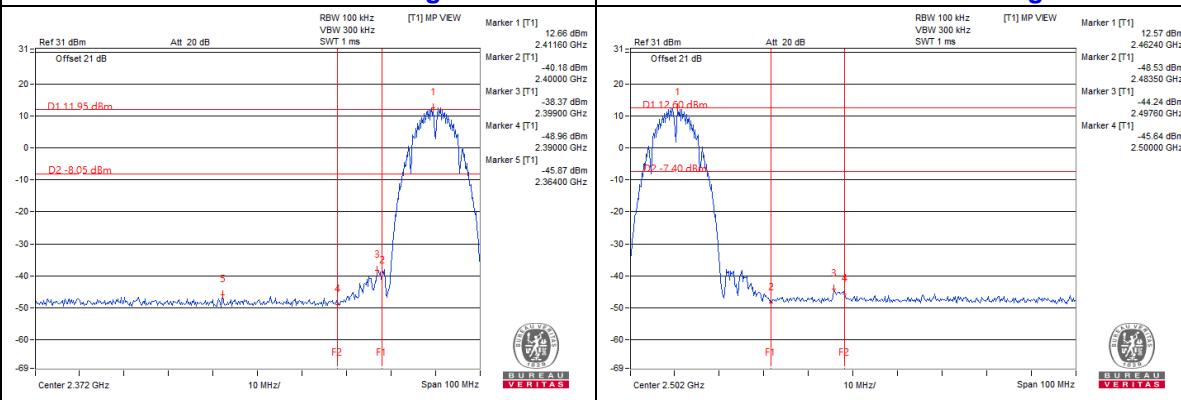


802.11g

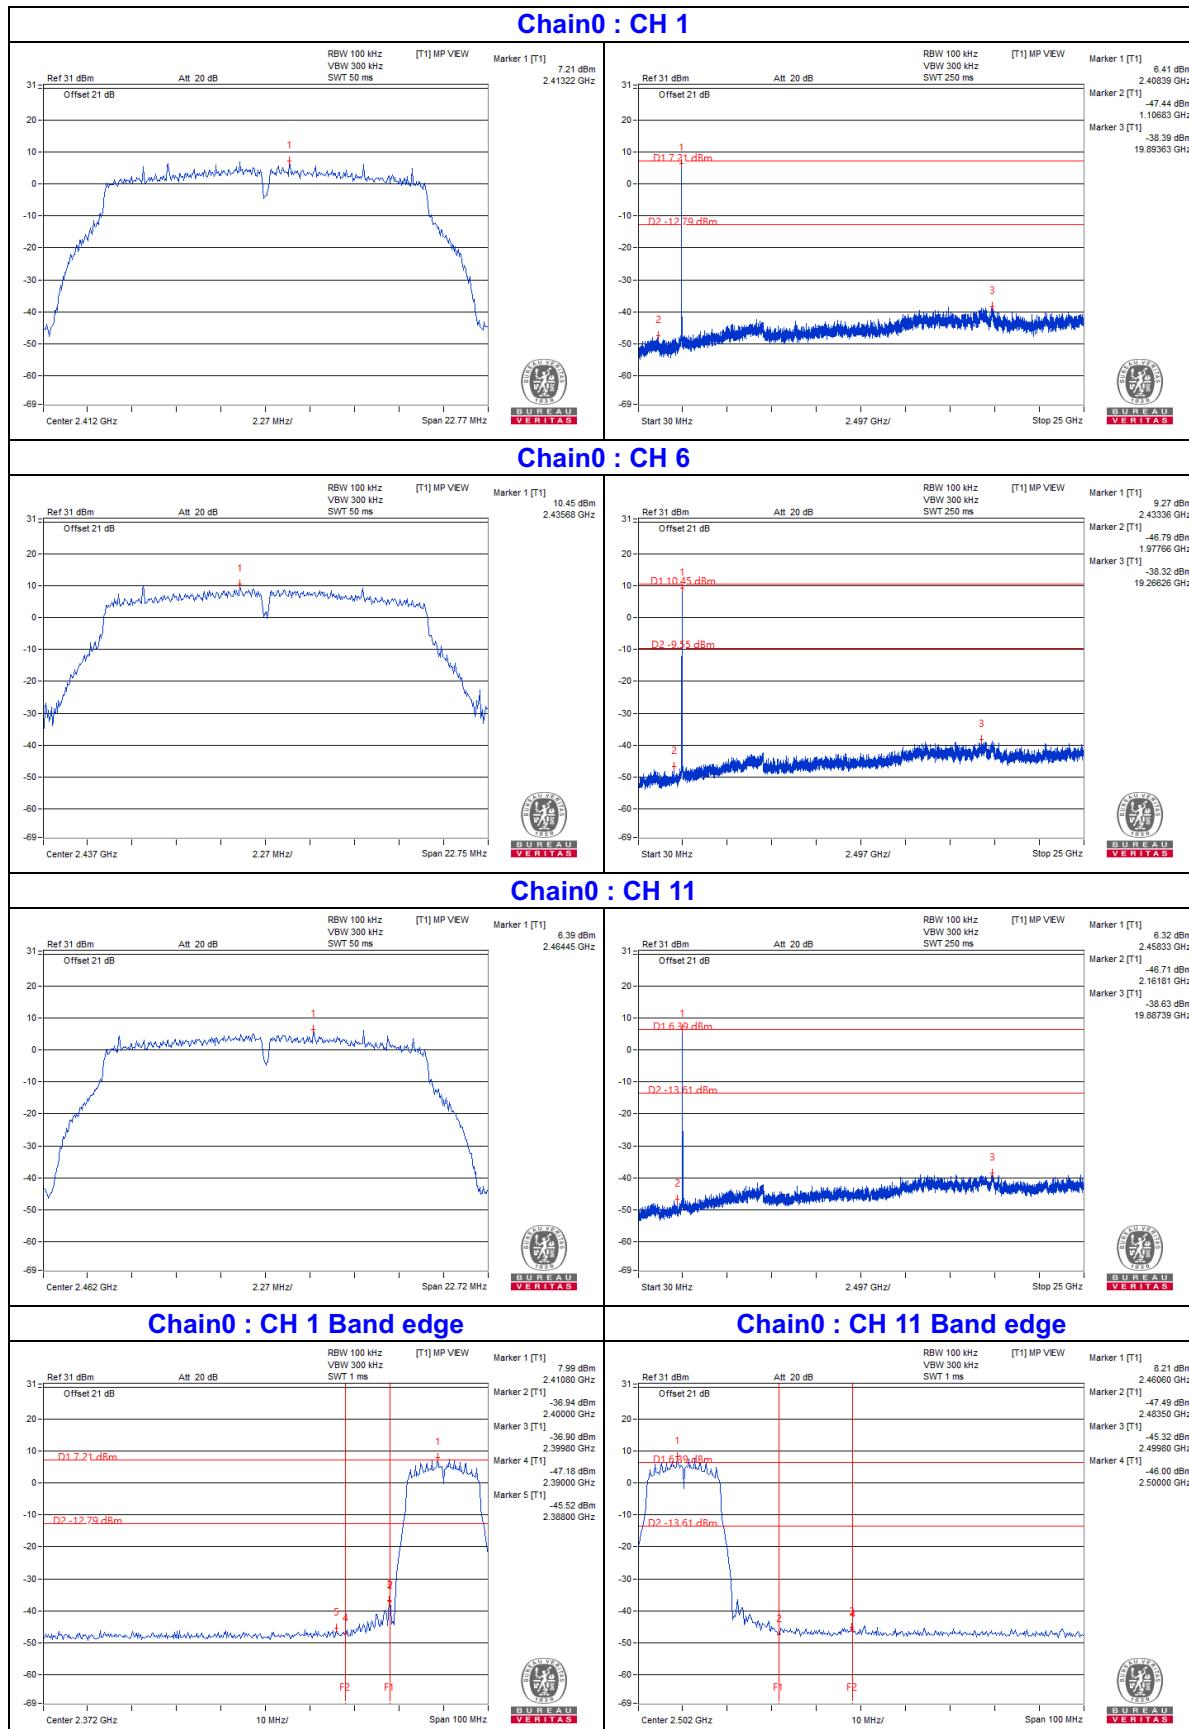


Chain1 : CH 1

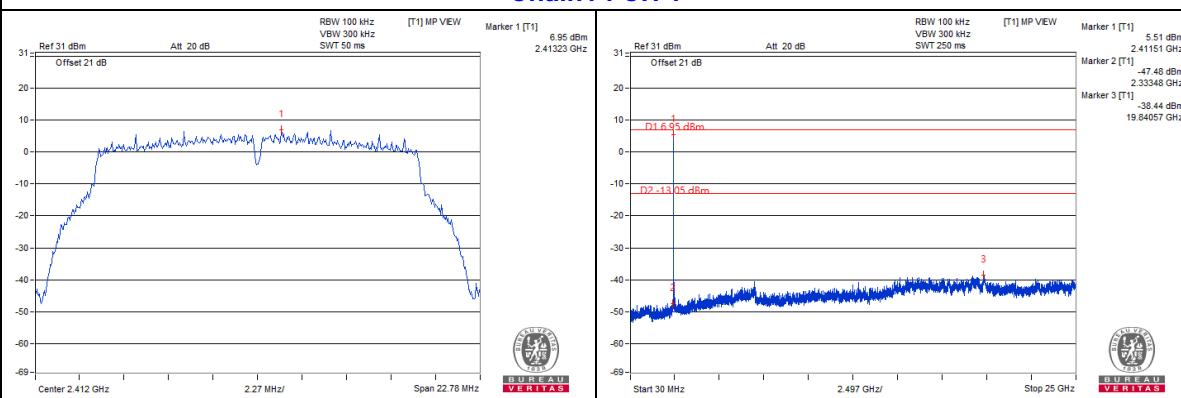


Chain1 : CH 6

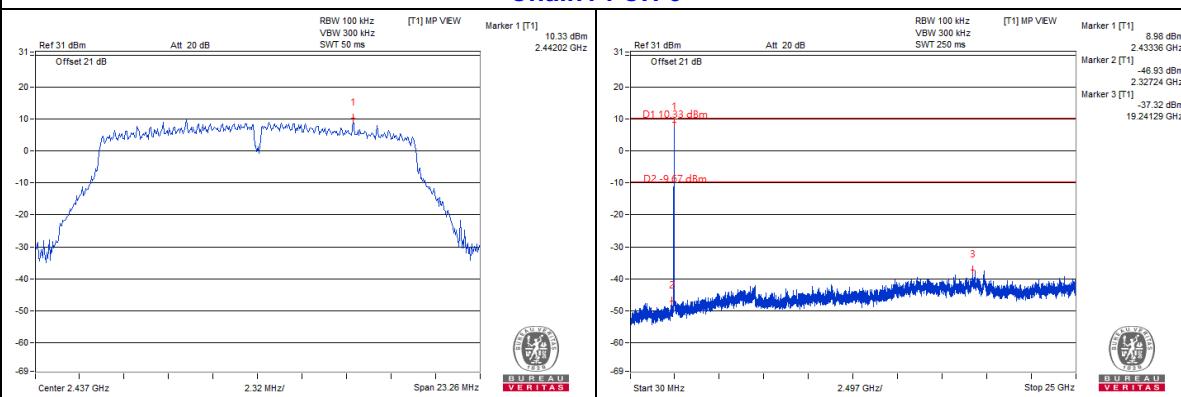


Chain1 : CH 11

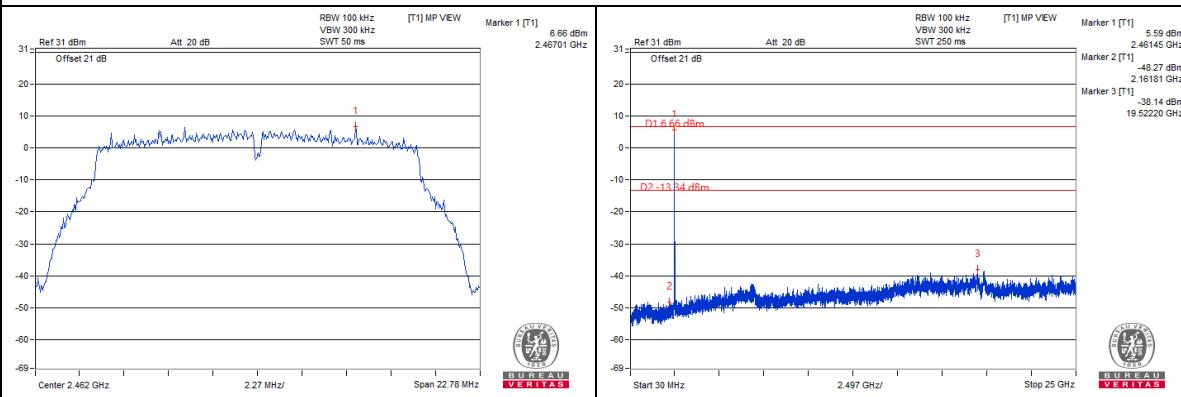


Chain1 : CH 1 Band edge

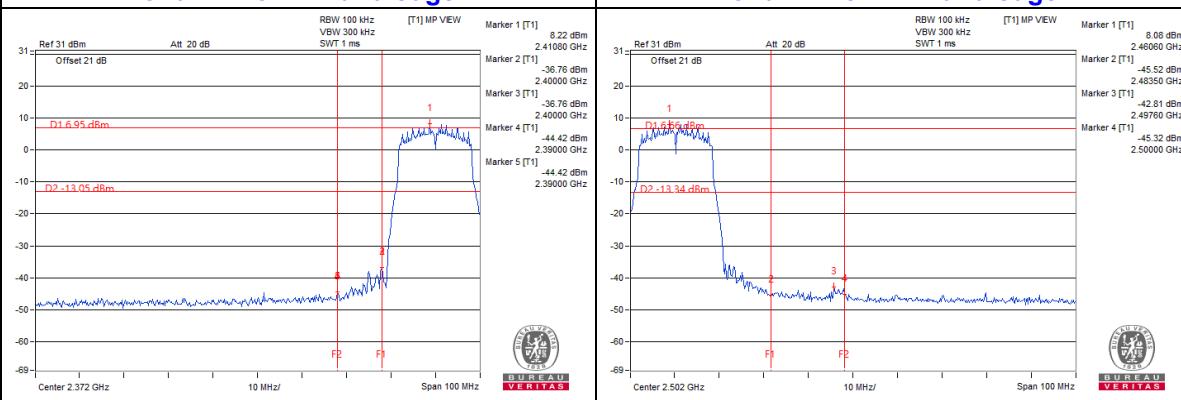


802.11ax (HE20)

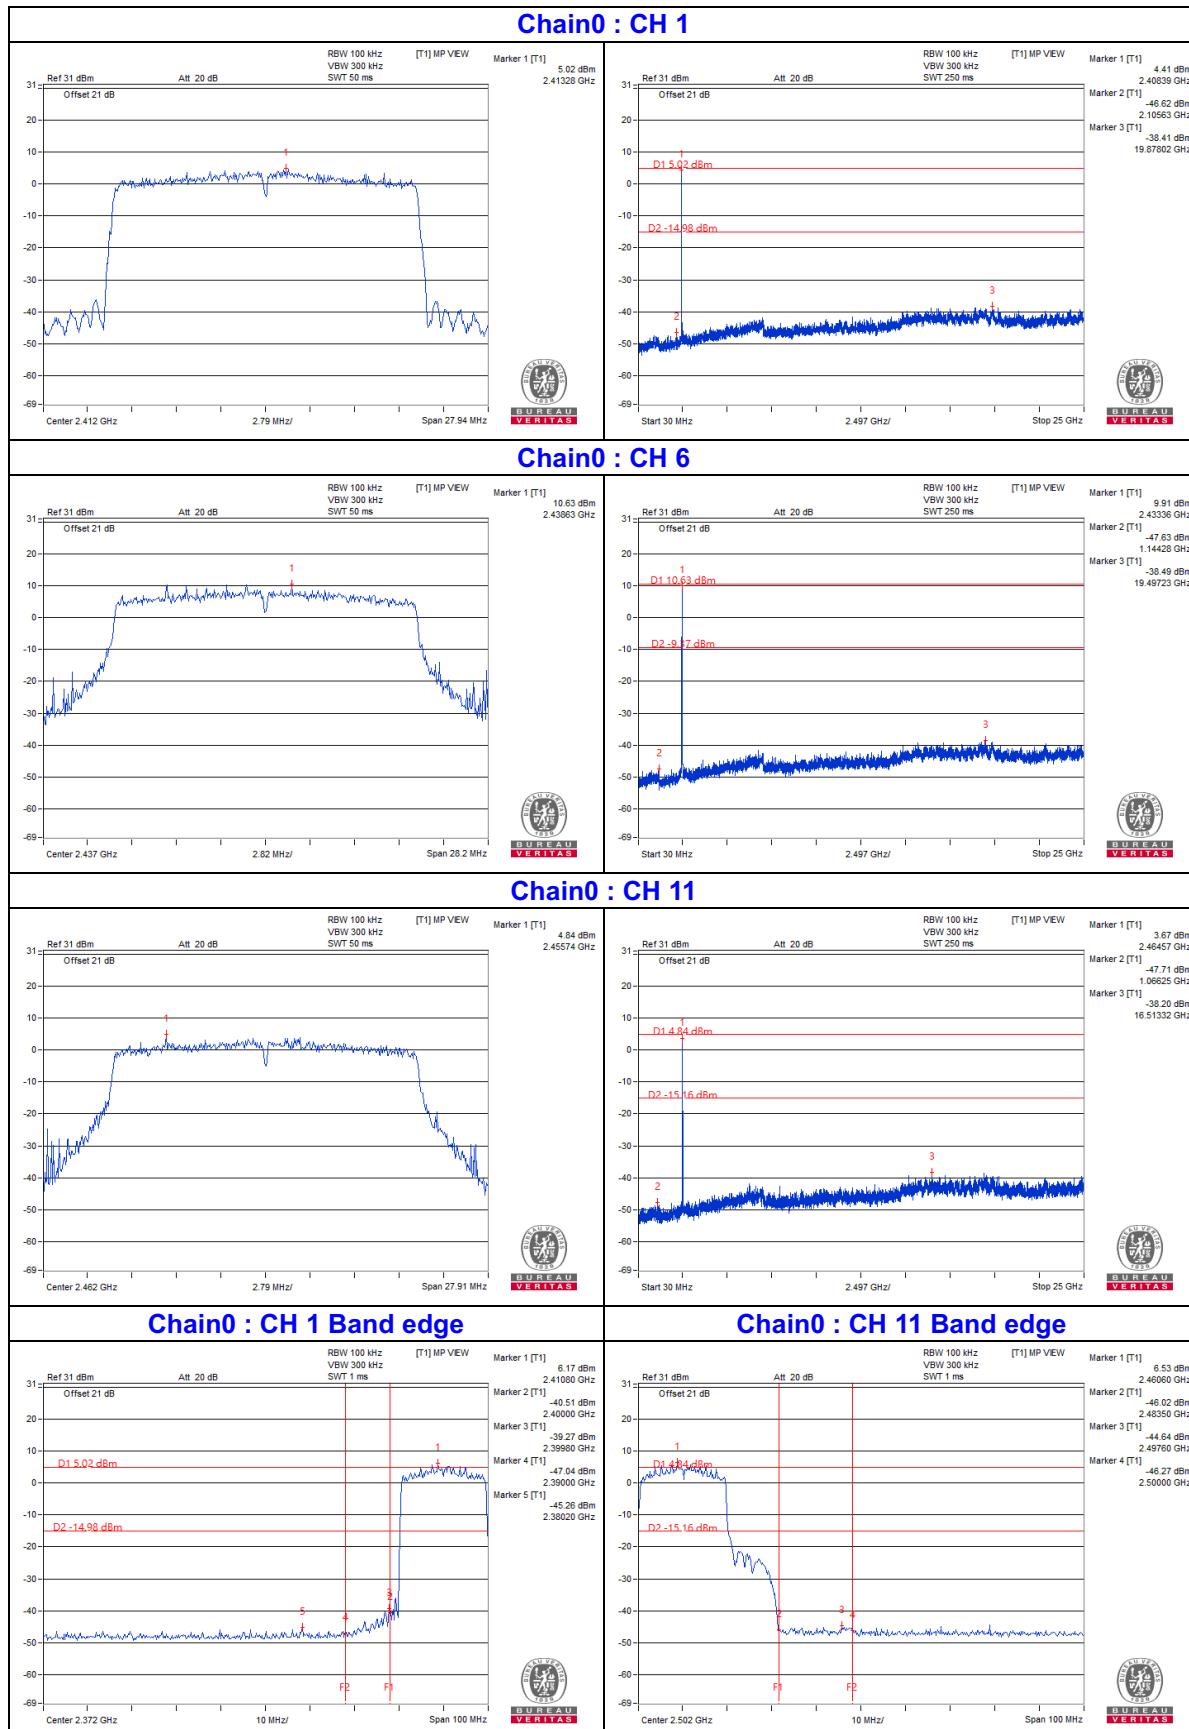


Chain1 : CH 1

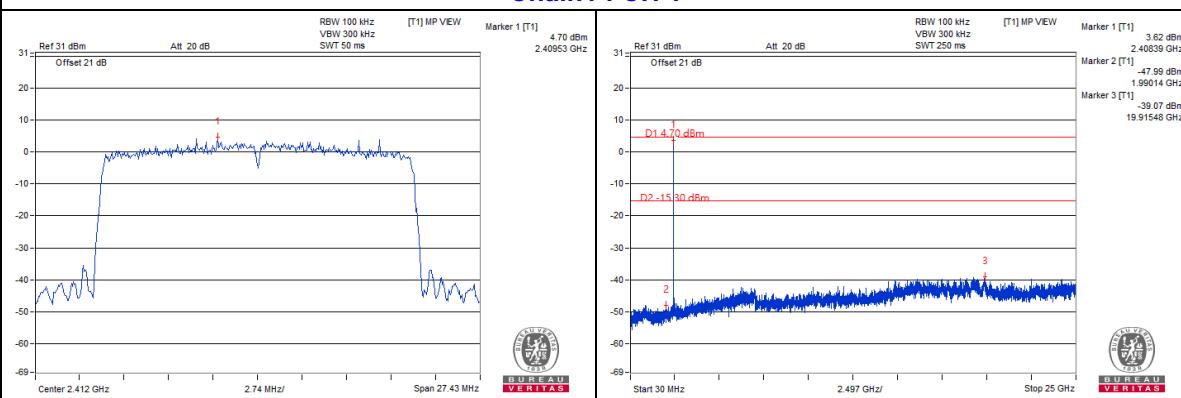


Chain1 : CH 6

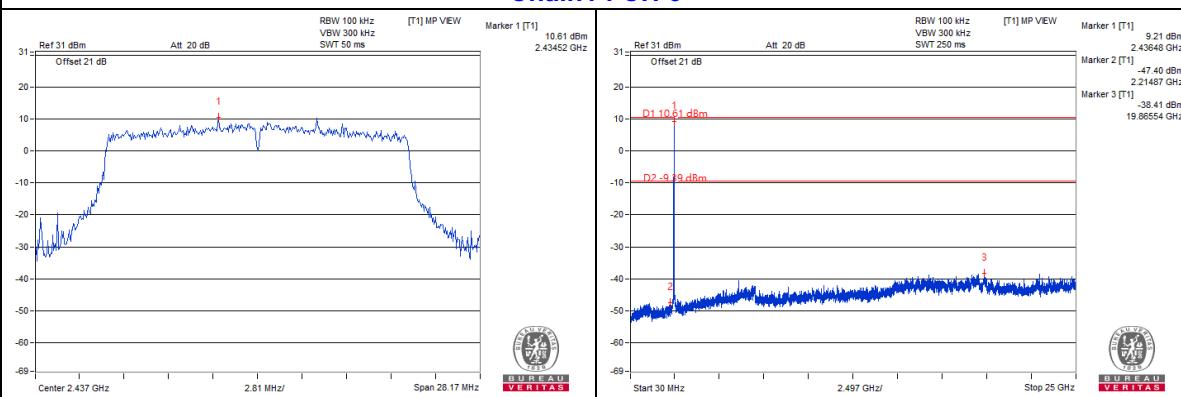


Chain1 : CH 11

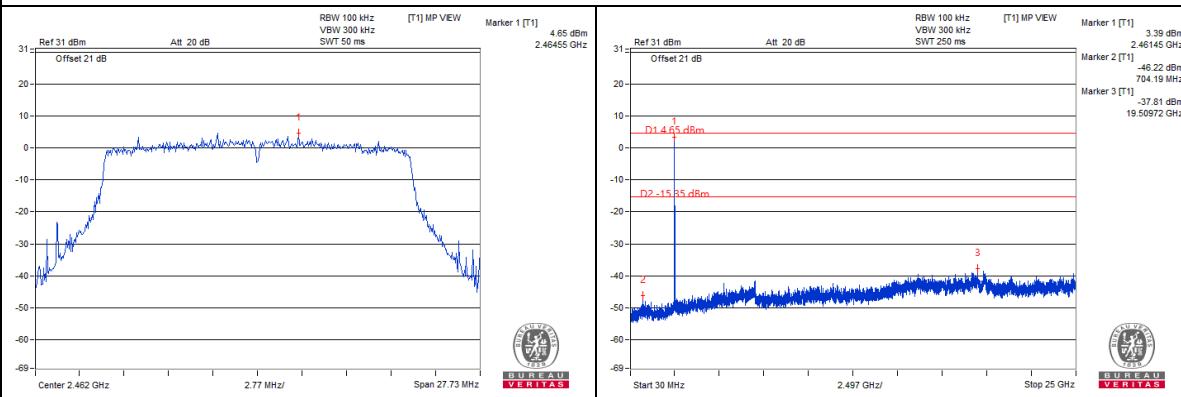


Chain1 : CH 1 Band edge

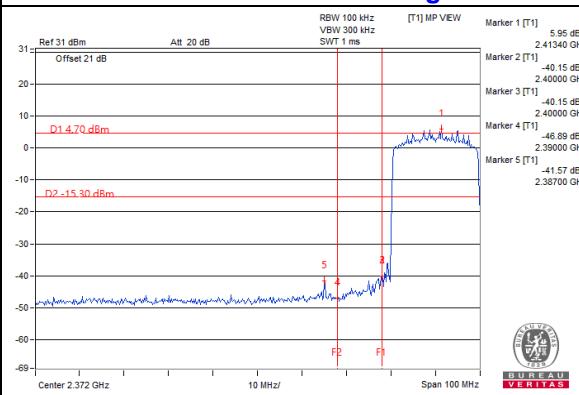


Chain1 : CH 11 Band edge

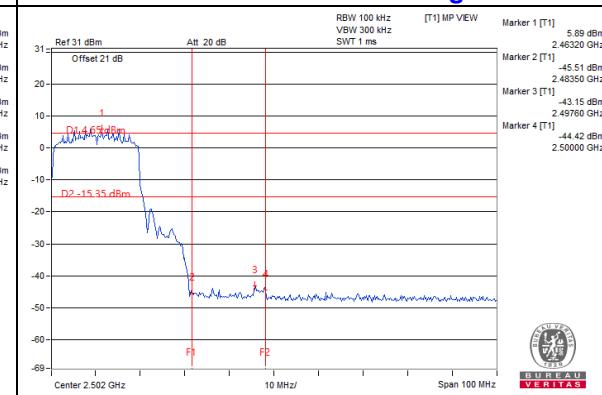


802.11ax (HE40)

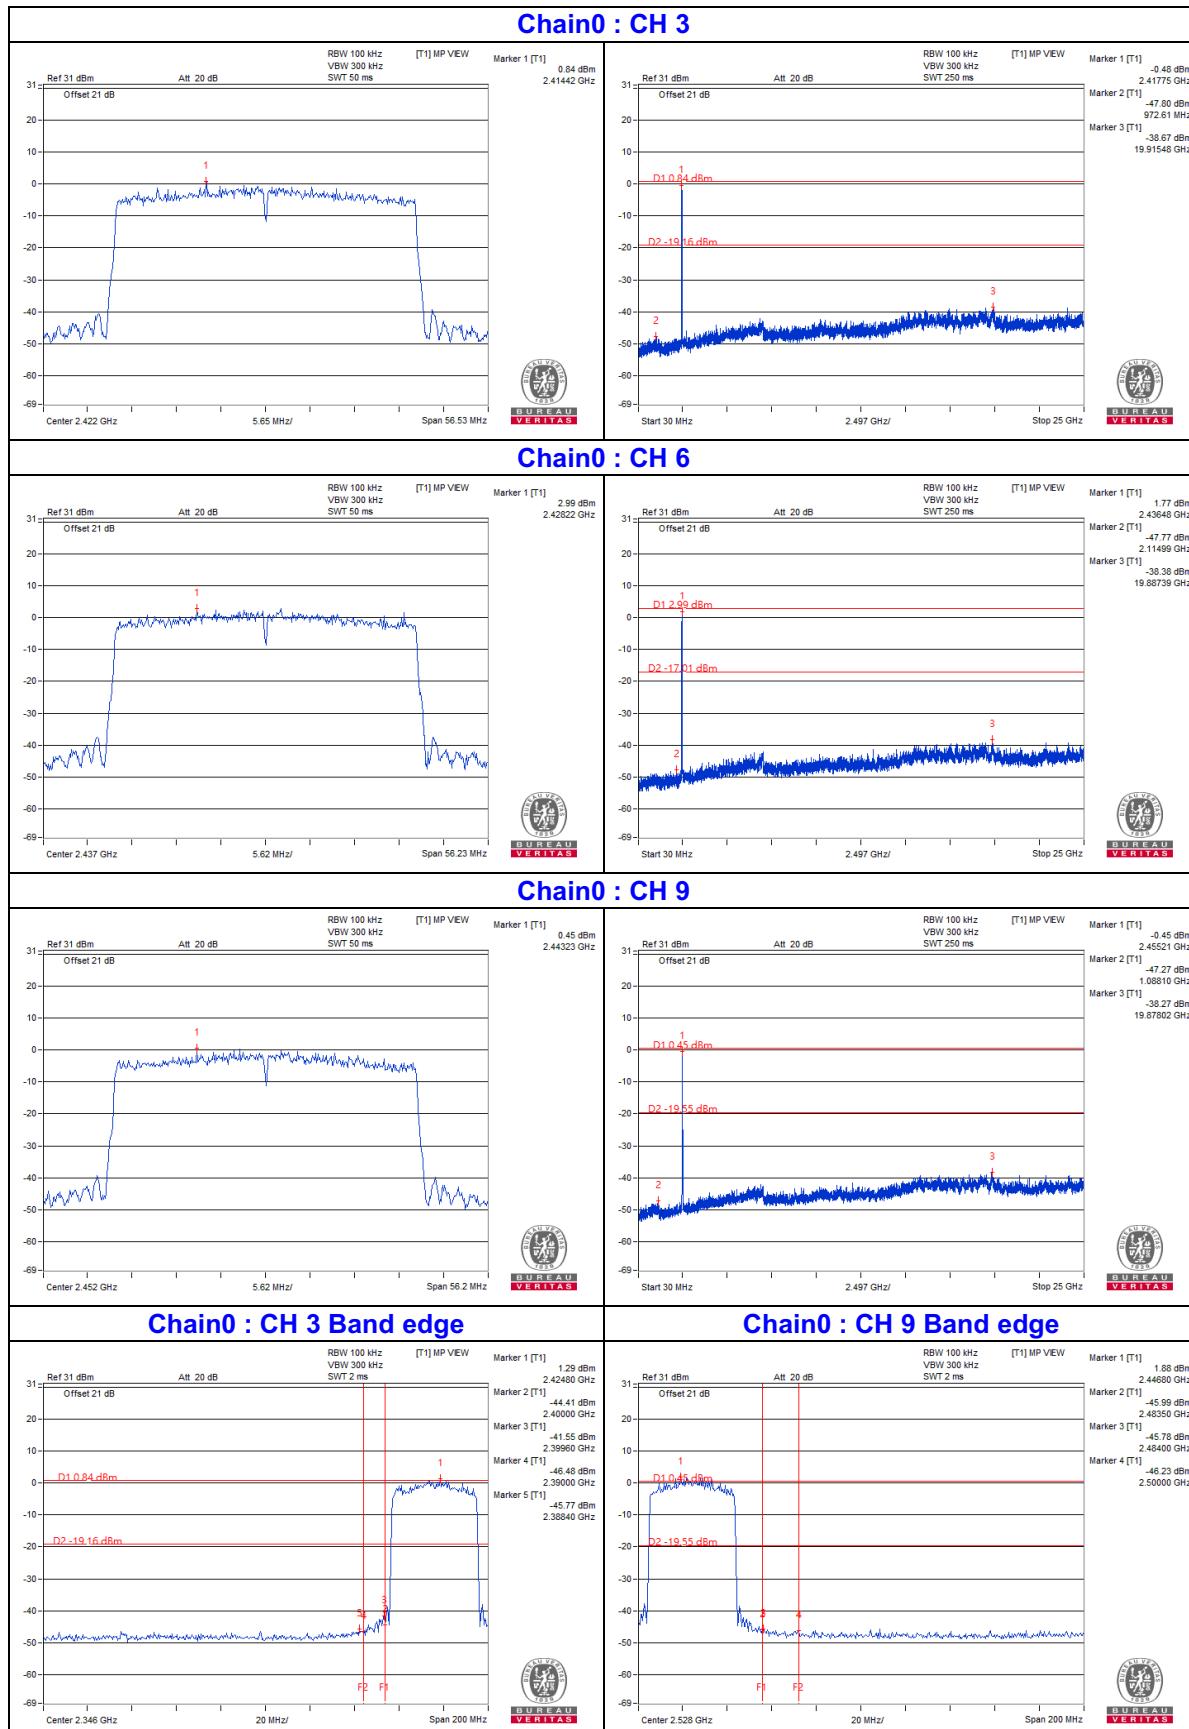


Chain1 : CH 3

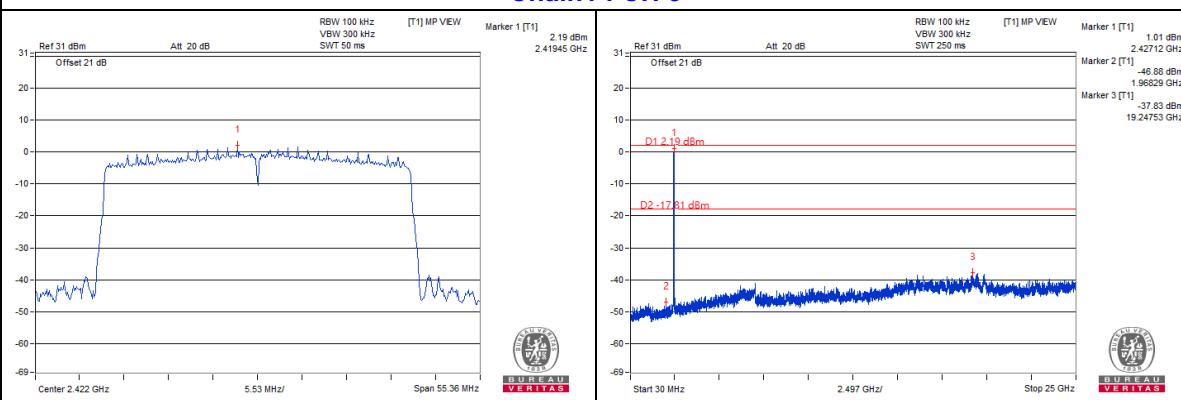


Chain1 : CH 6

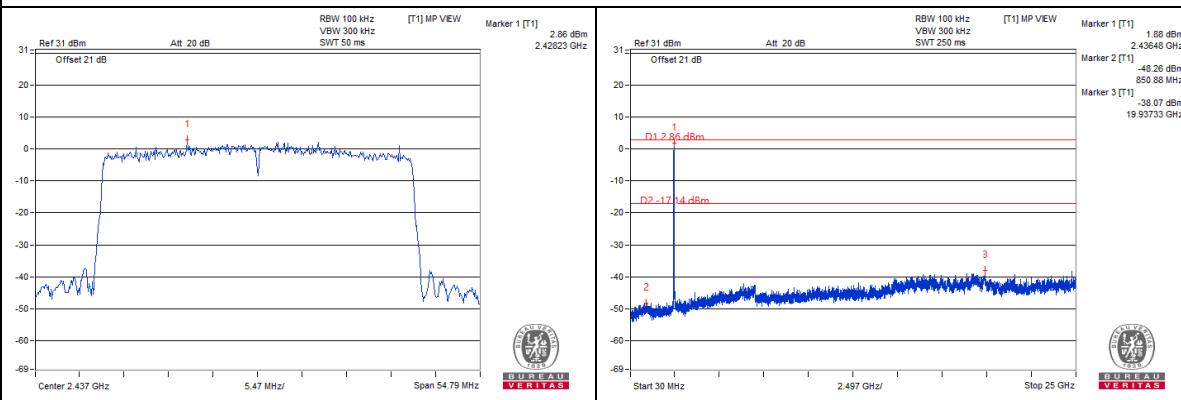

Chain1 : CH 9

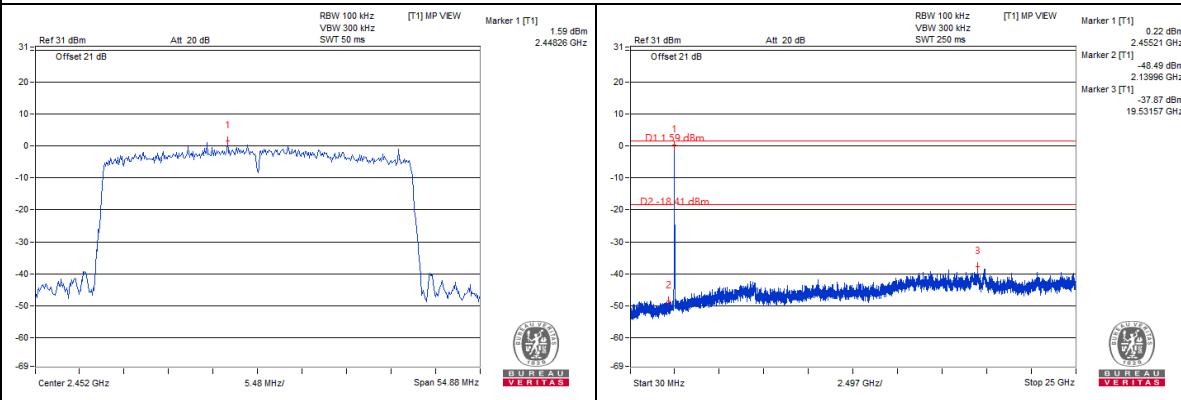



Chain1 : CH 3 Band edge

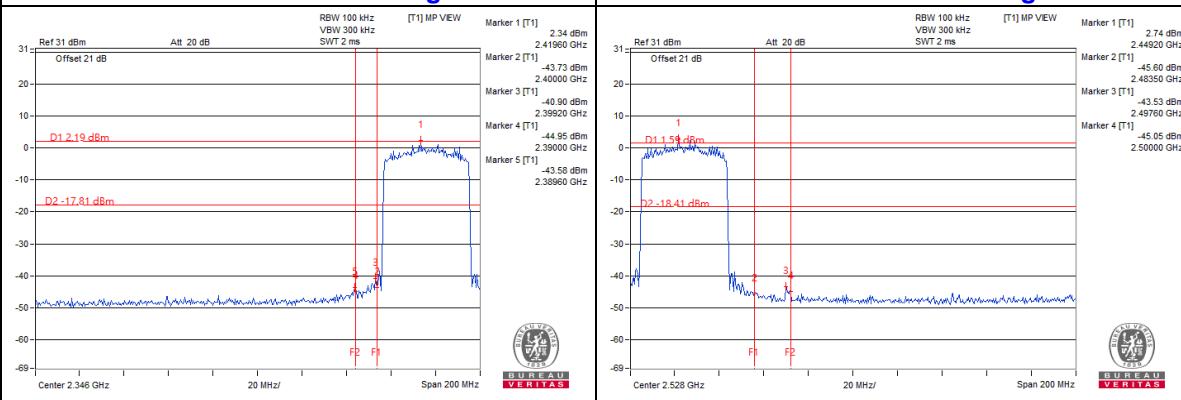

Beamforming Mode


VHT20

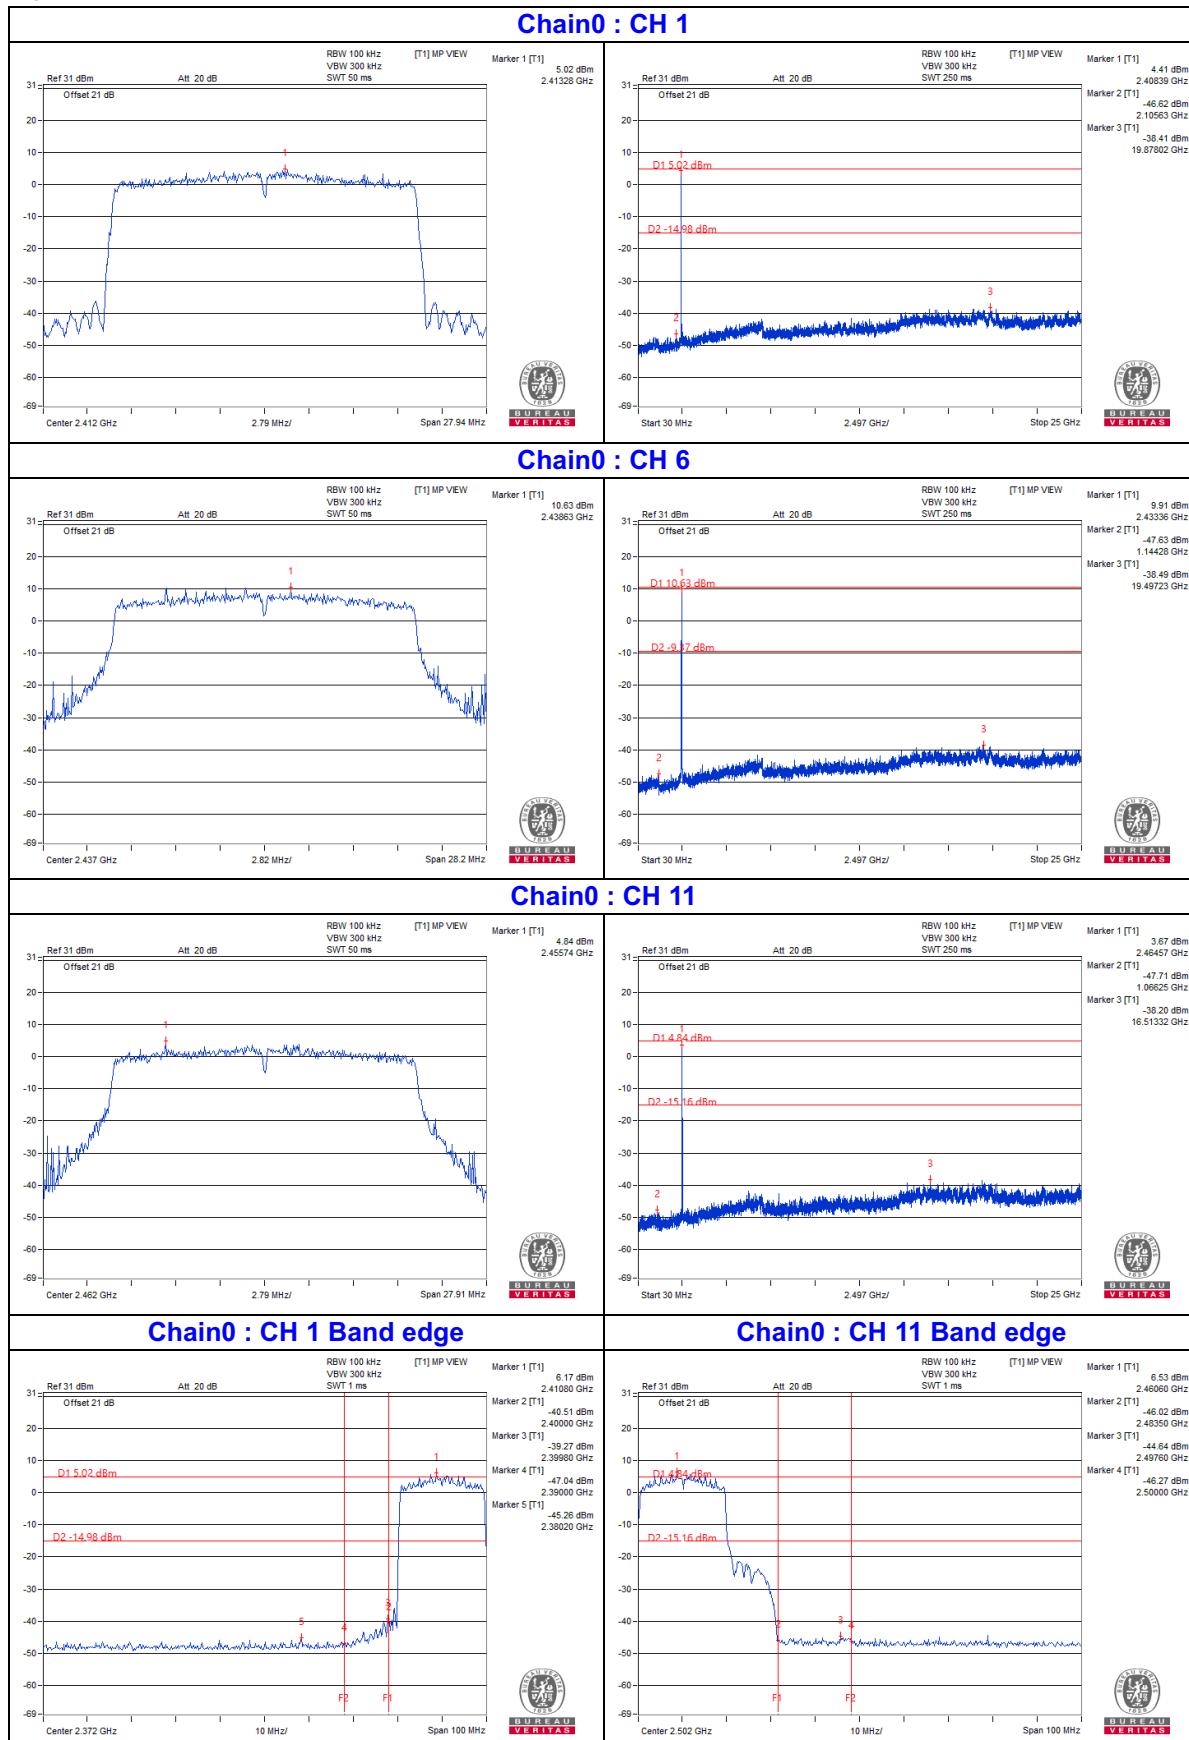

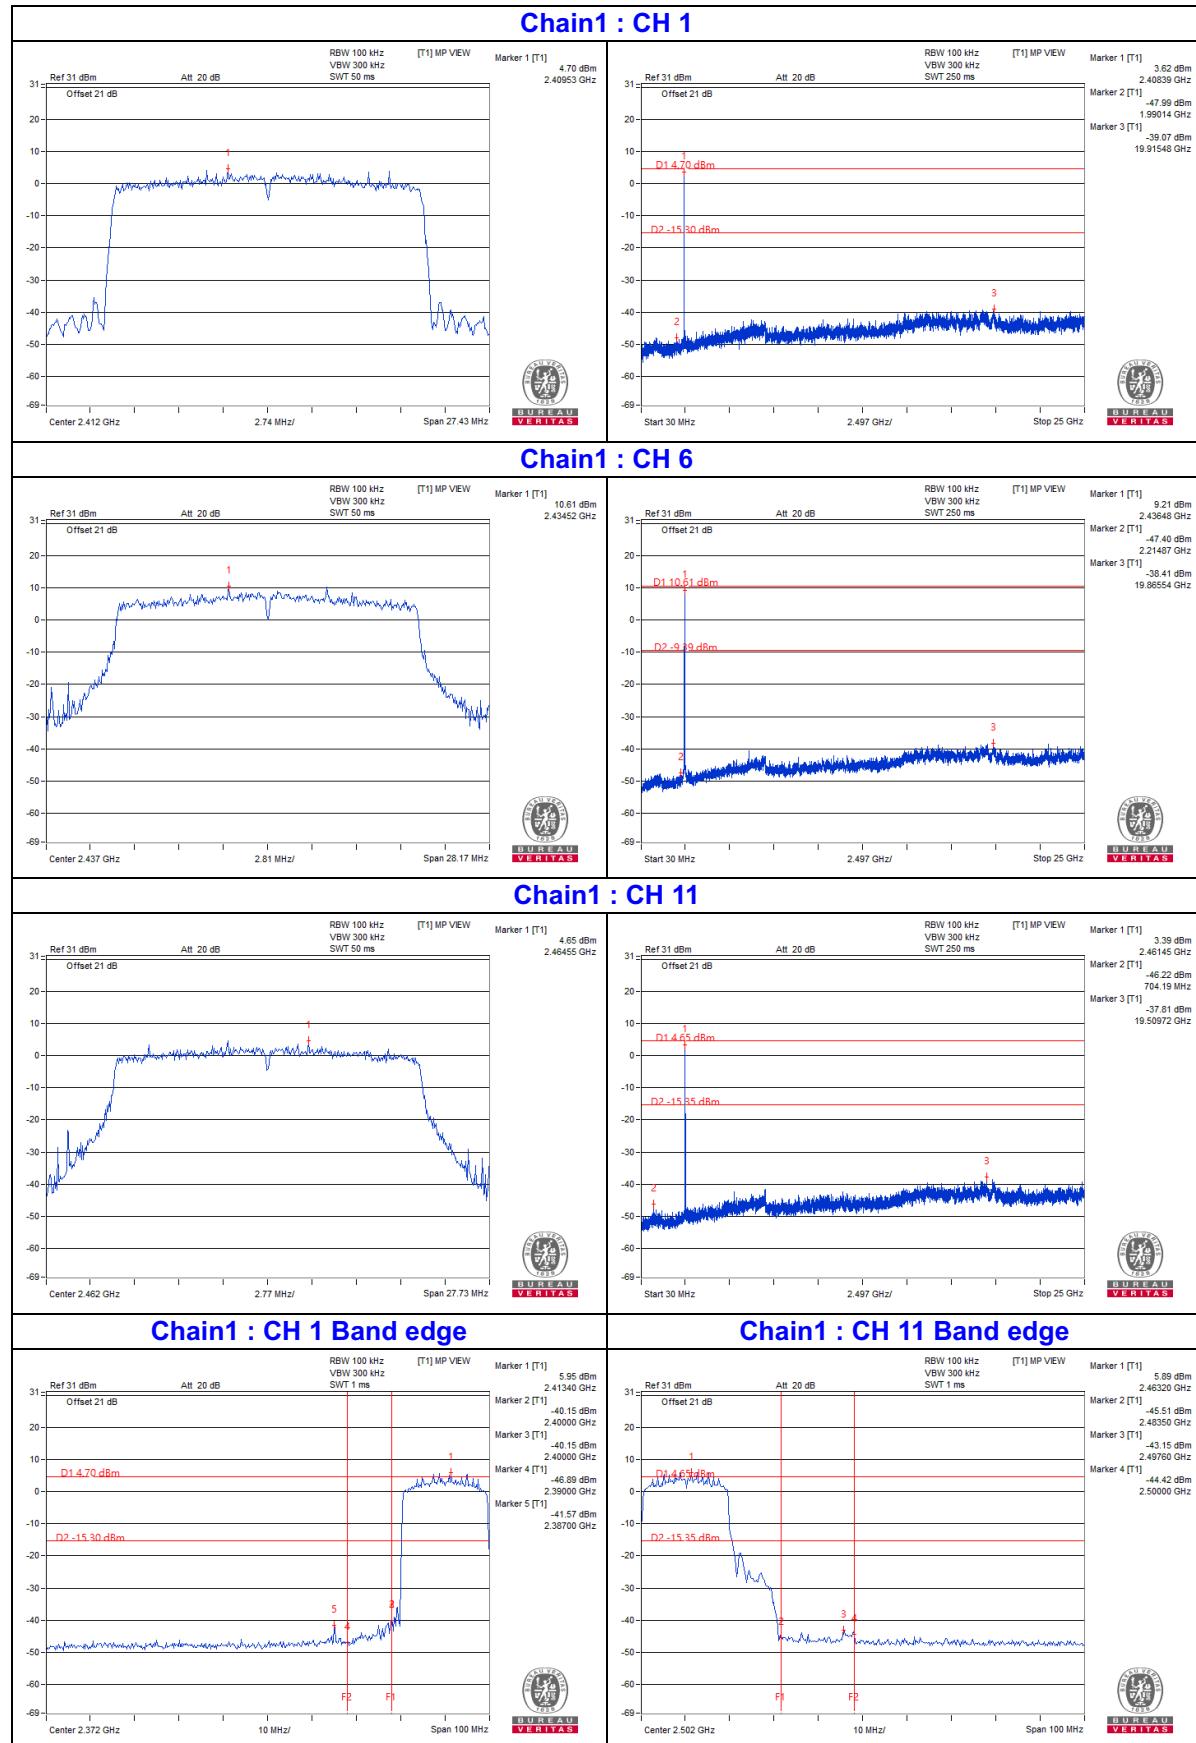


VHT40


Chain0 : CH 3

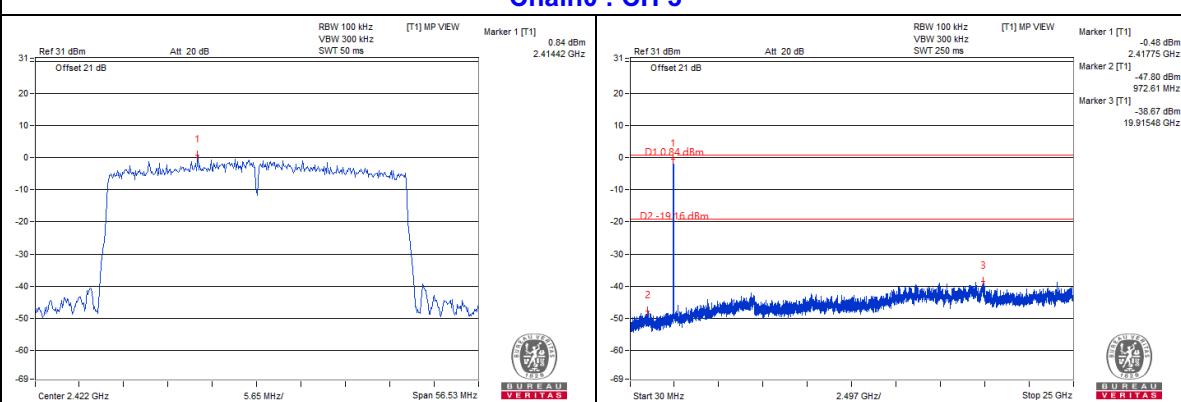


Chain0 : CH 6

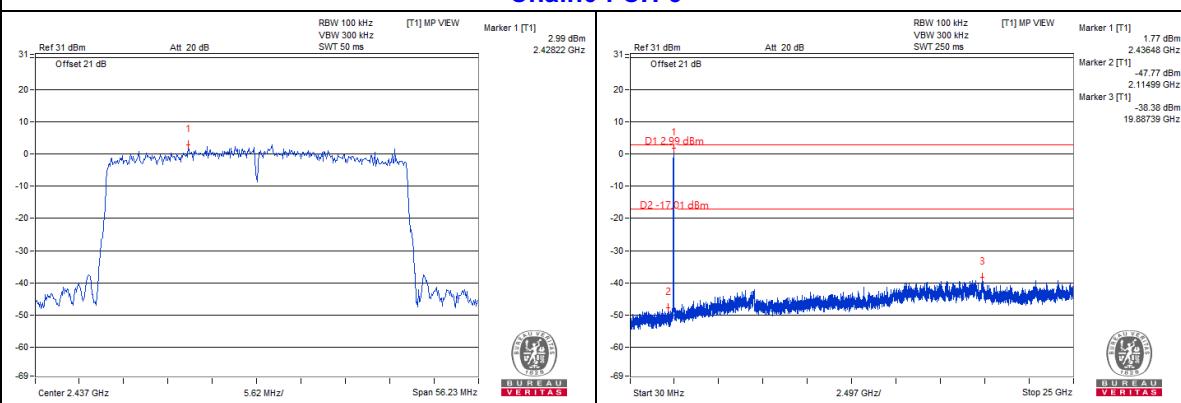


Chain0 : CH 9

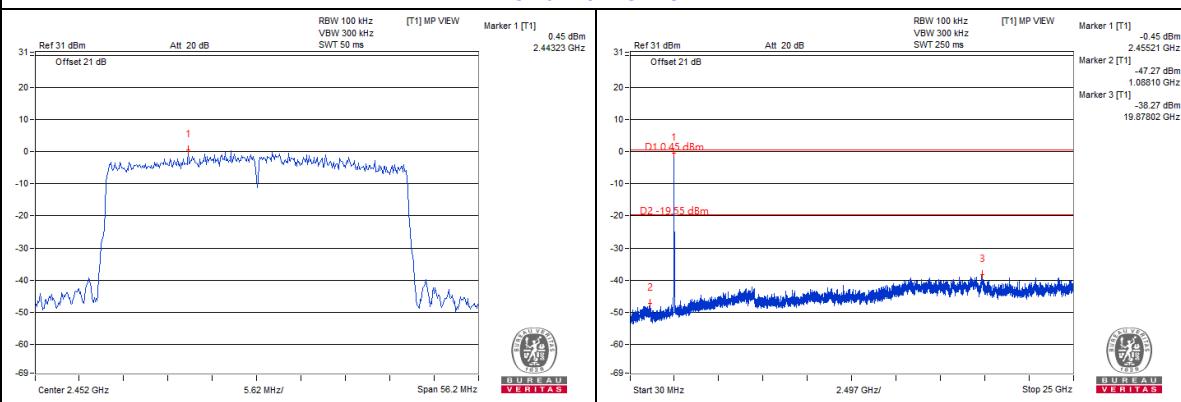


Chain0 : CH 3 Band edge

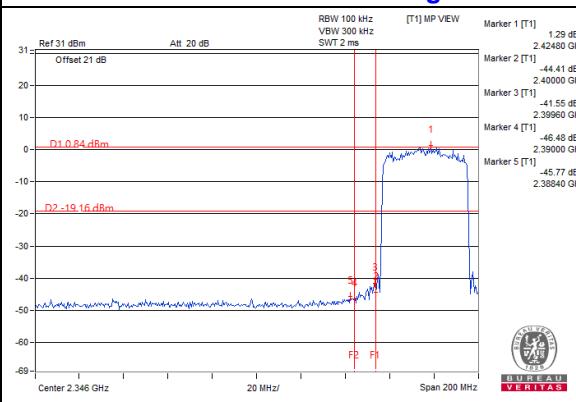


Chain0 : CH 9 Band edge

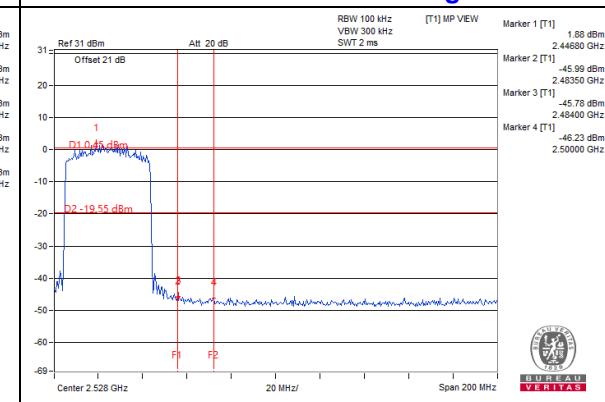

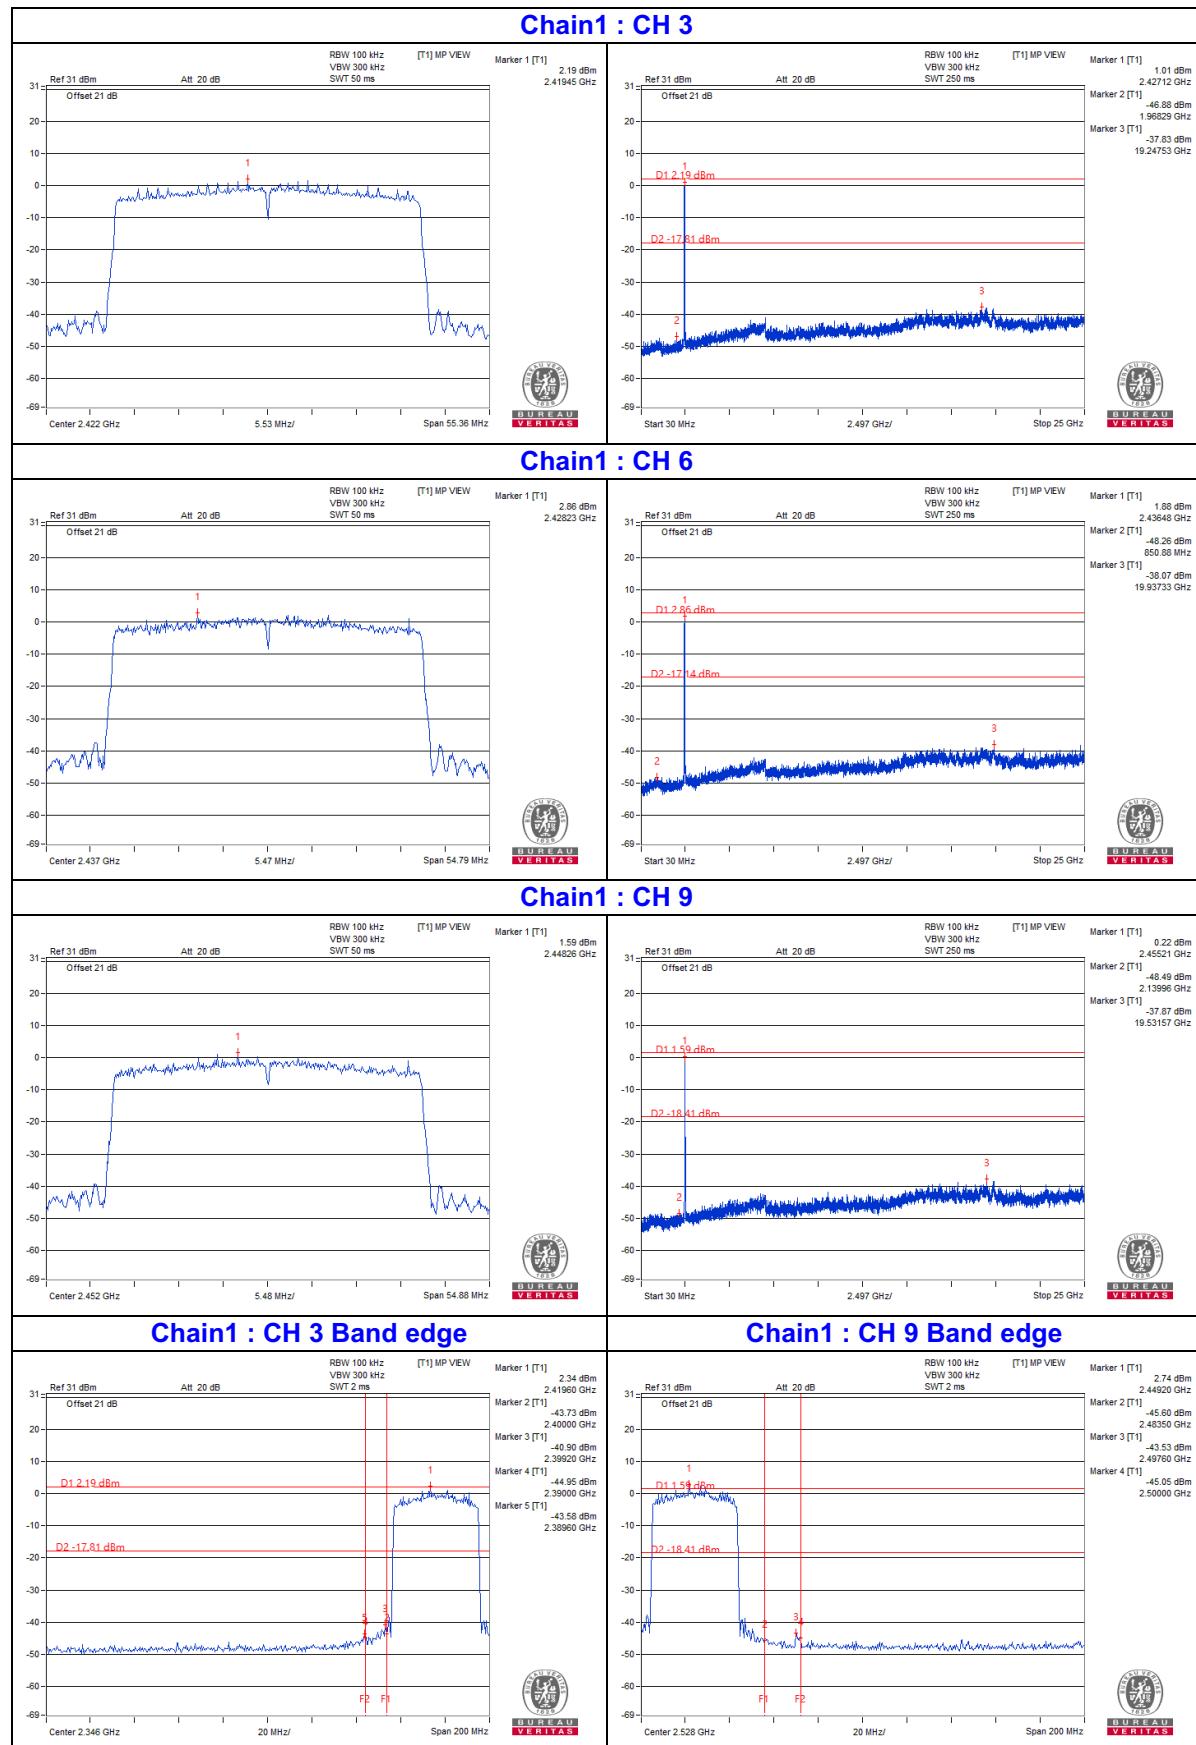


802.11ax (HE20)


Chain0 : CH 1

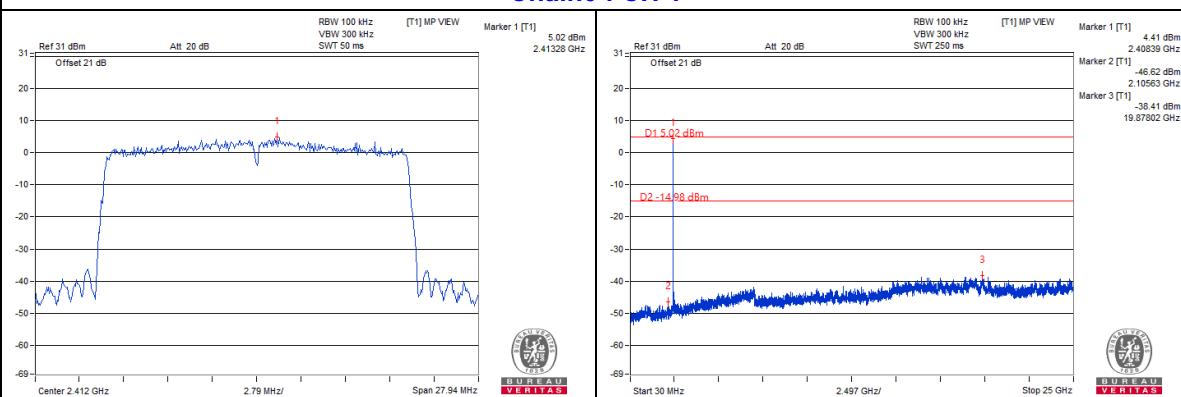


Chain0 : CH 6

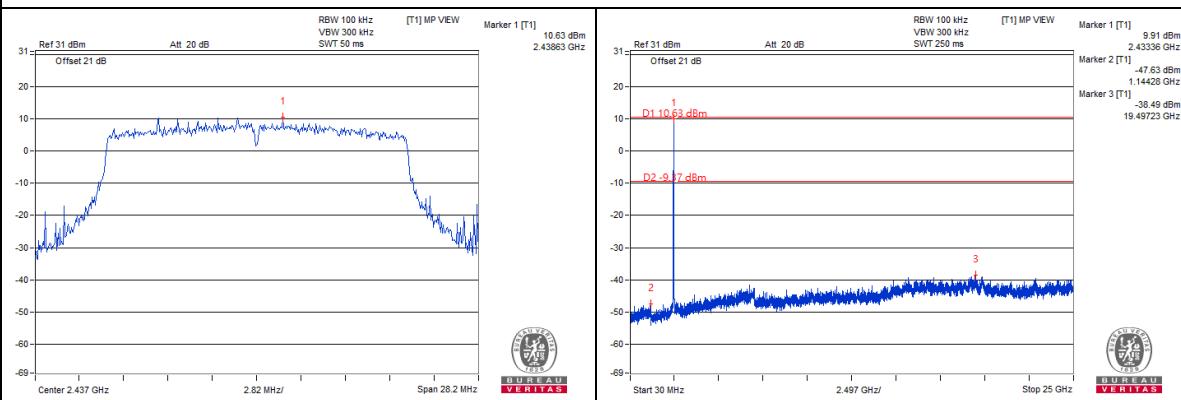


Chain0 : CH 11

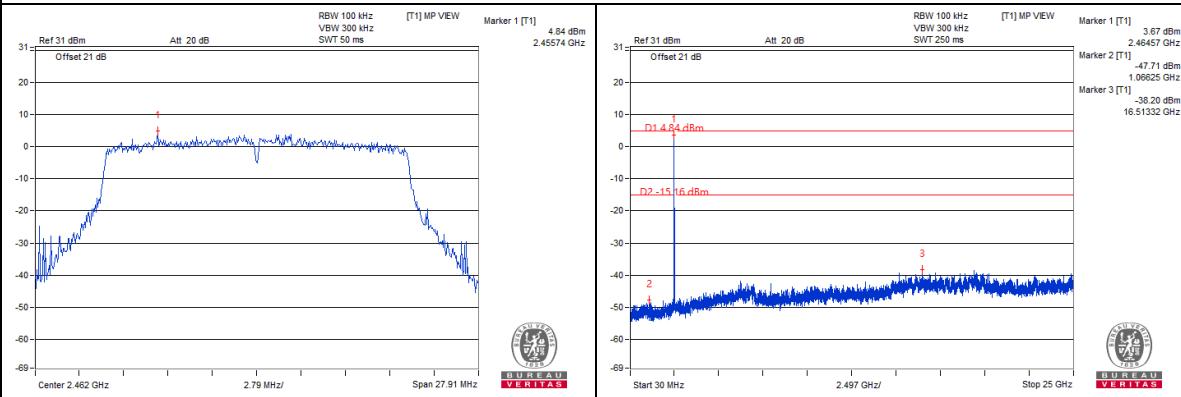


Chain0 : CH 1 Band edge

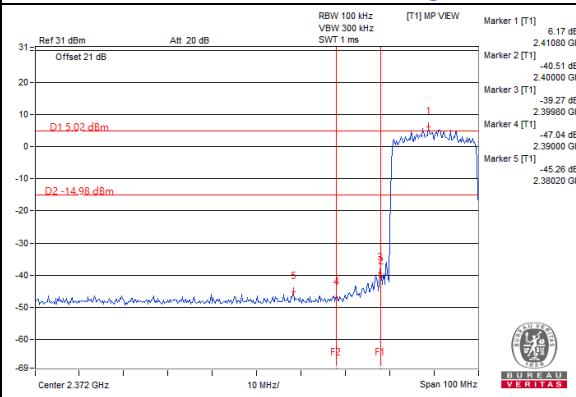


Chain0 : CH 11 Band edge

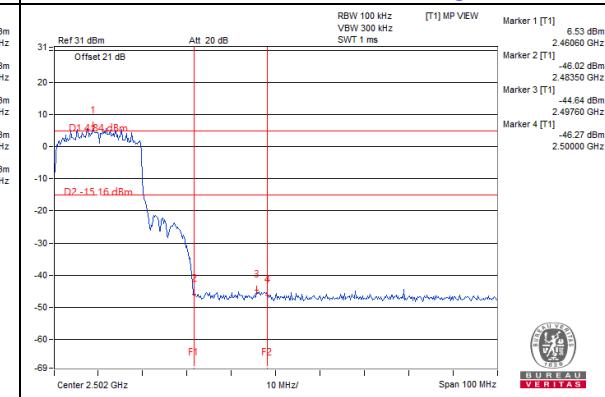


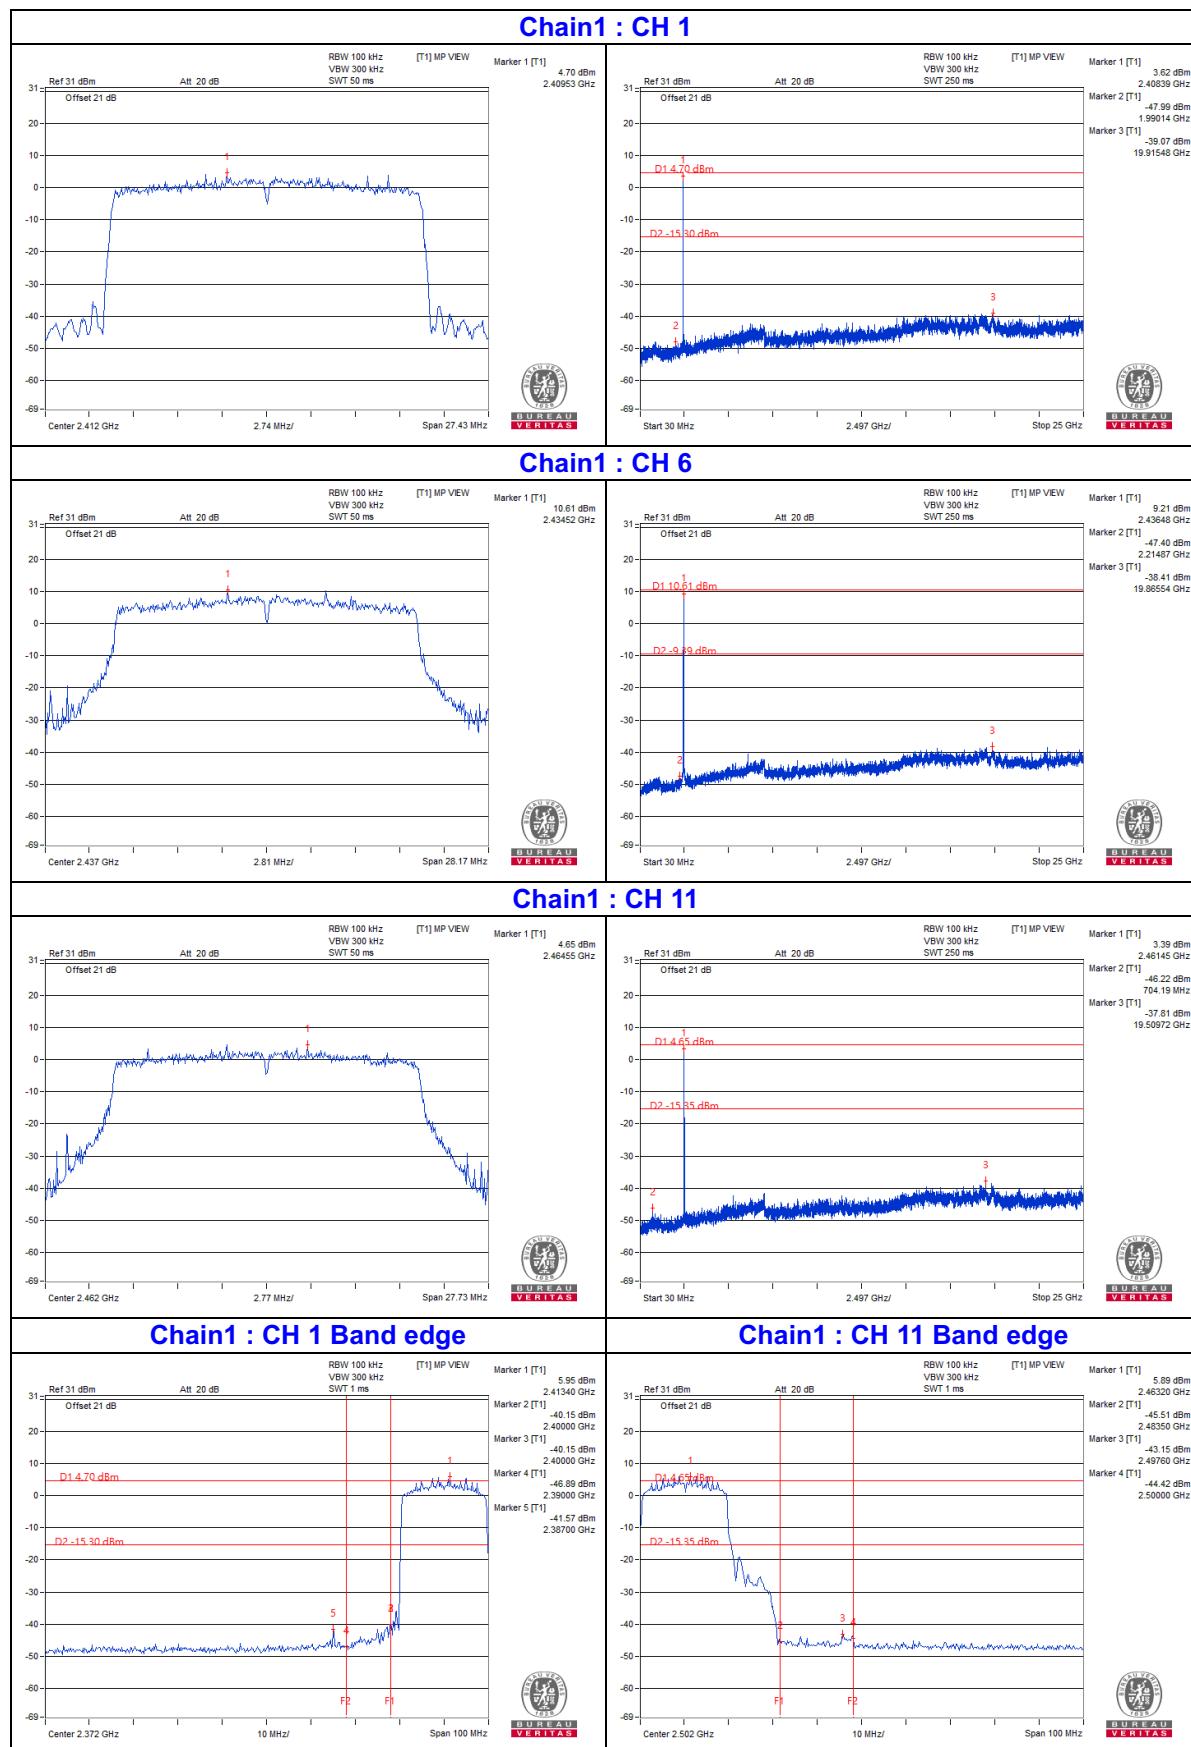


802.11ax (HE40)

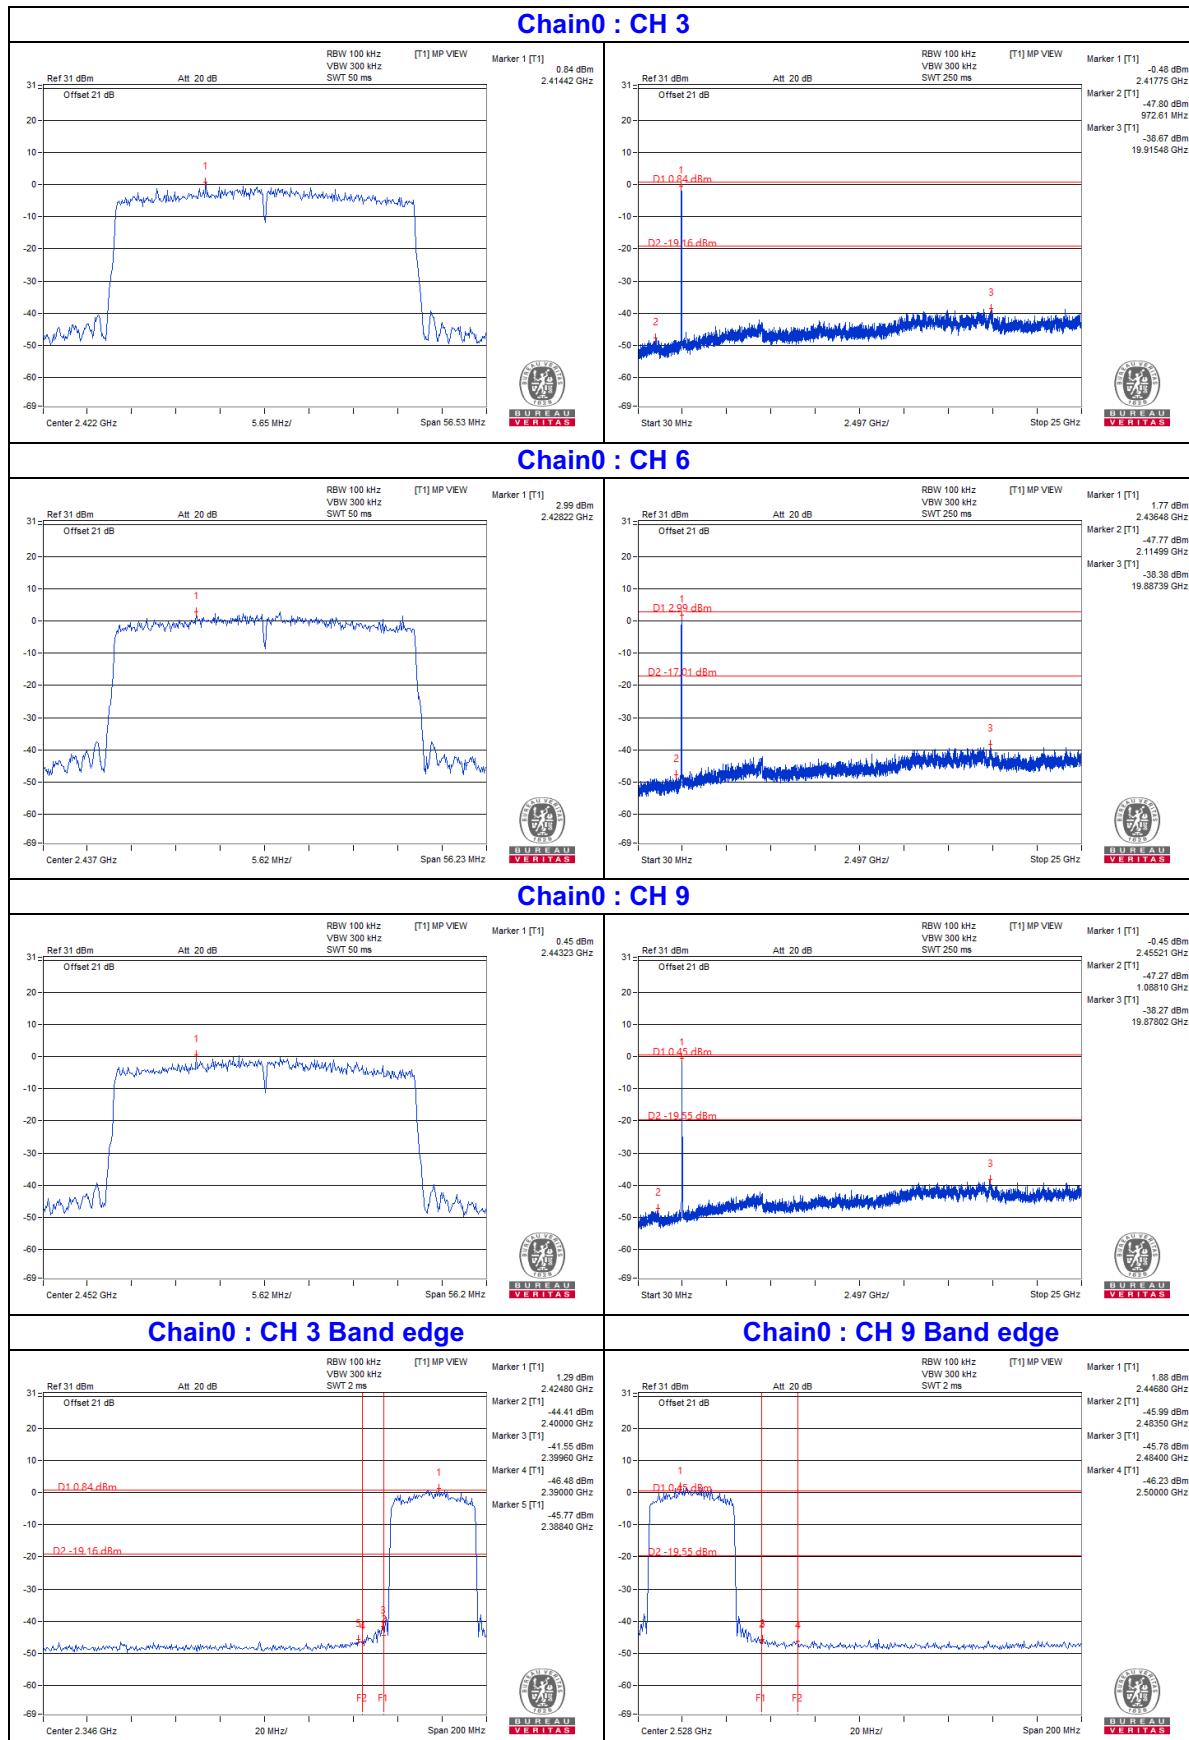


Chain1 : CH 3

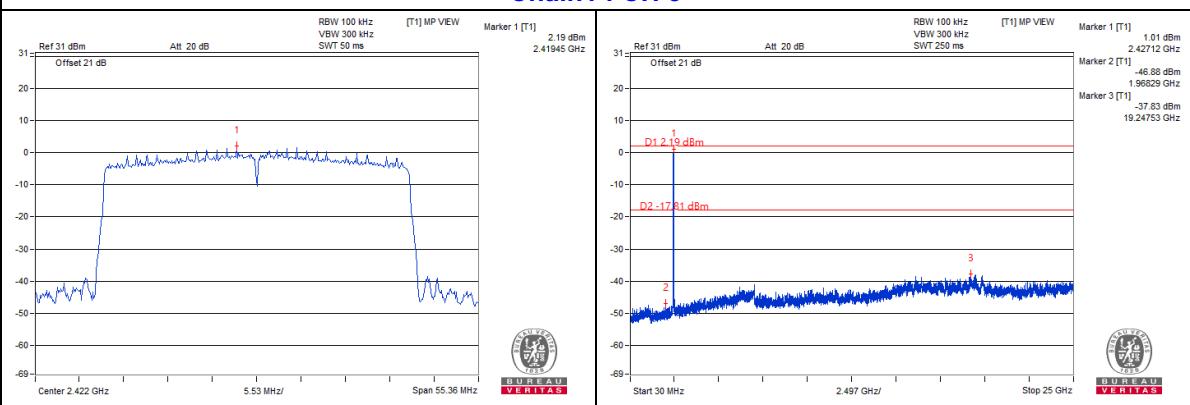


Chain1 : CH 6

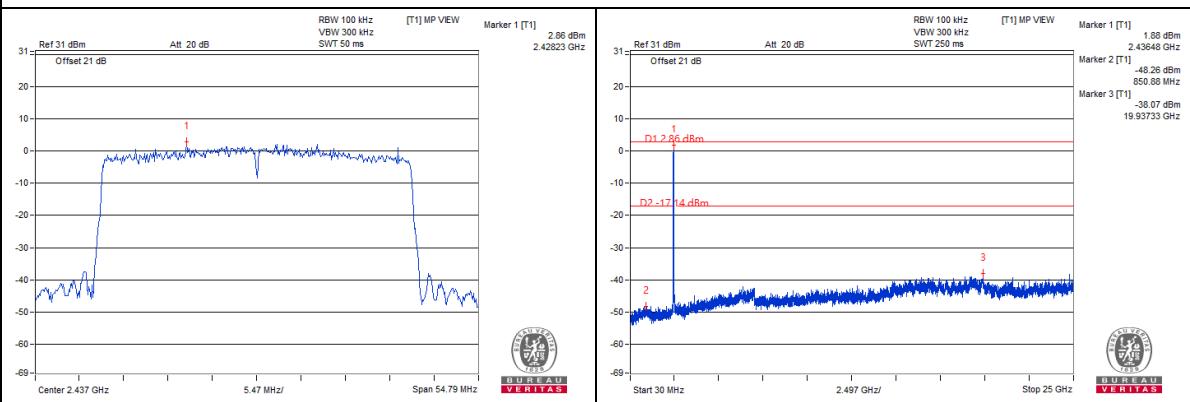

Chain1 : CH 9

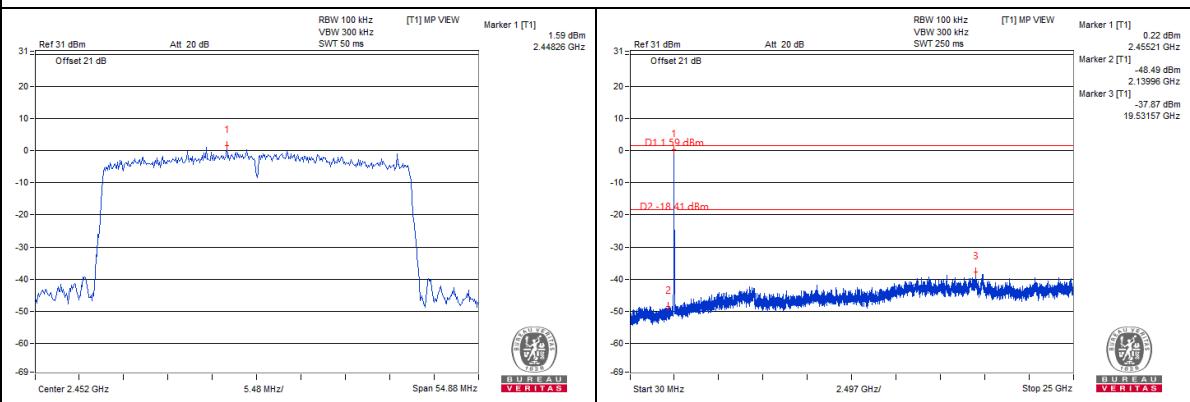


Chain1 : CH 3 Band edge

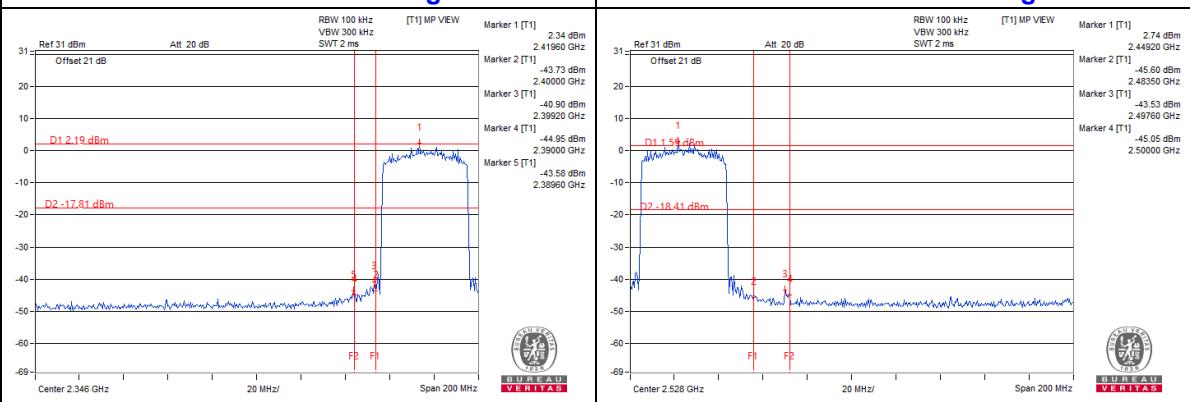



5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

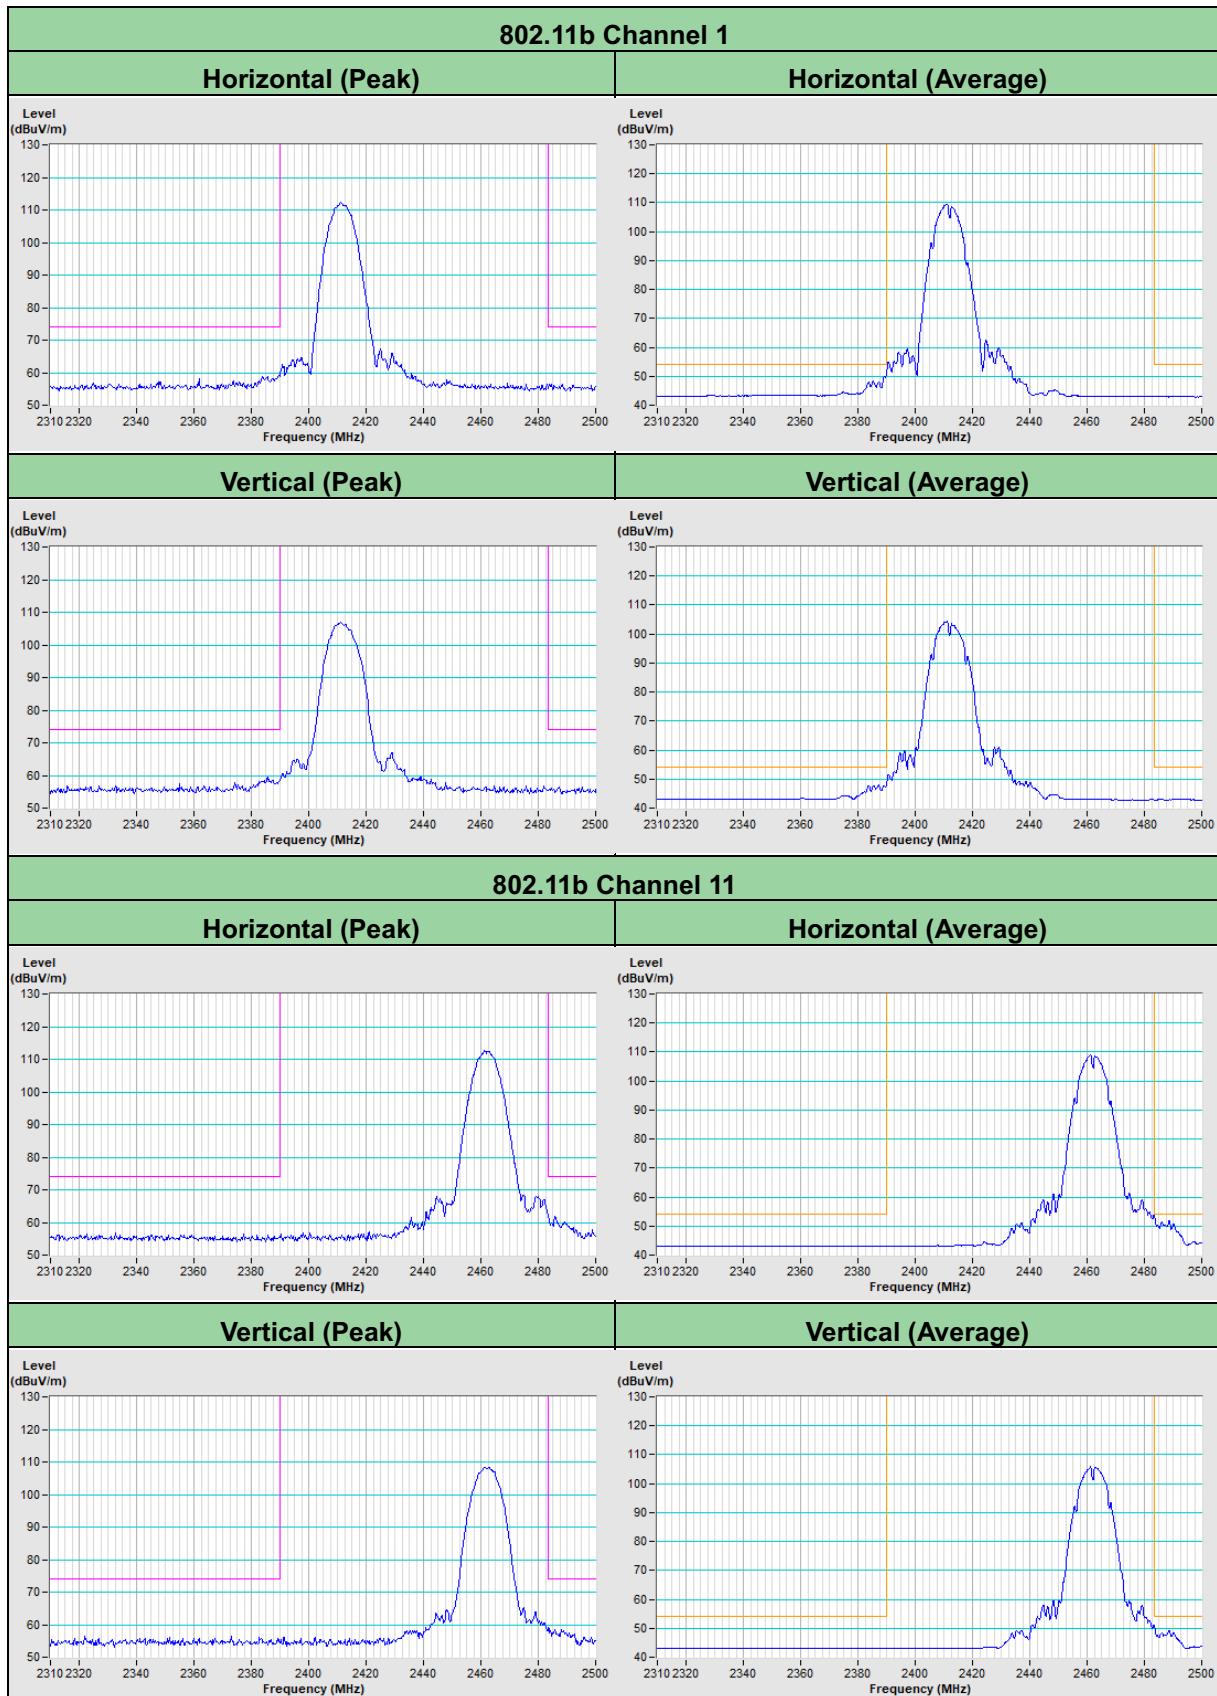

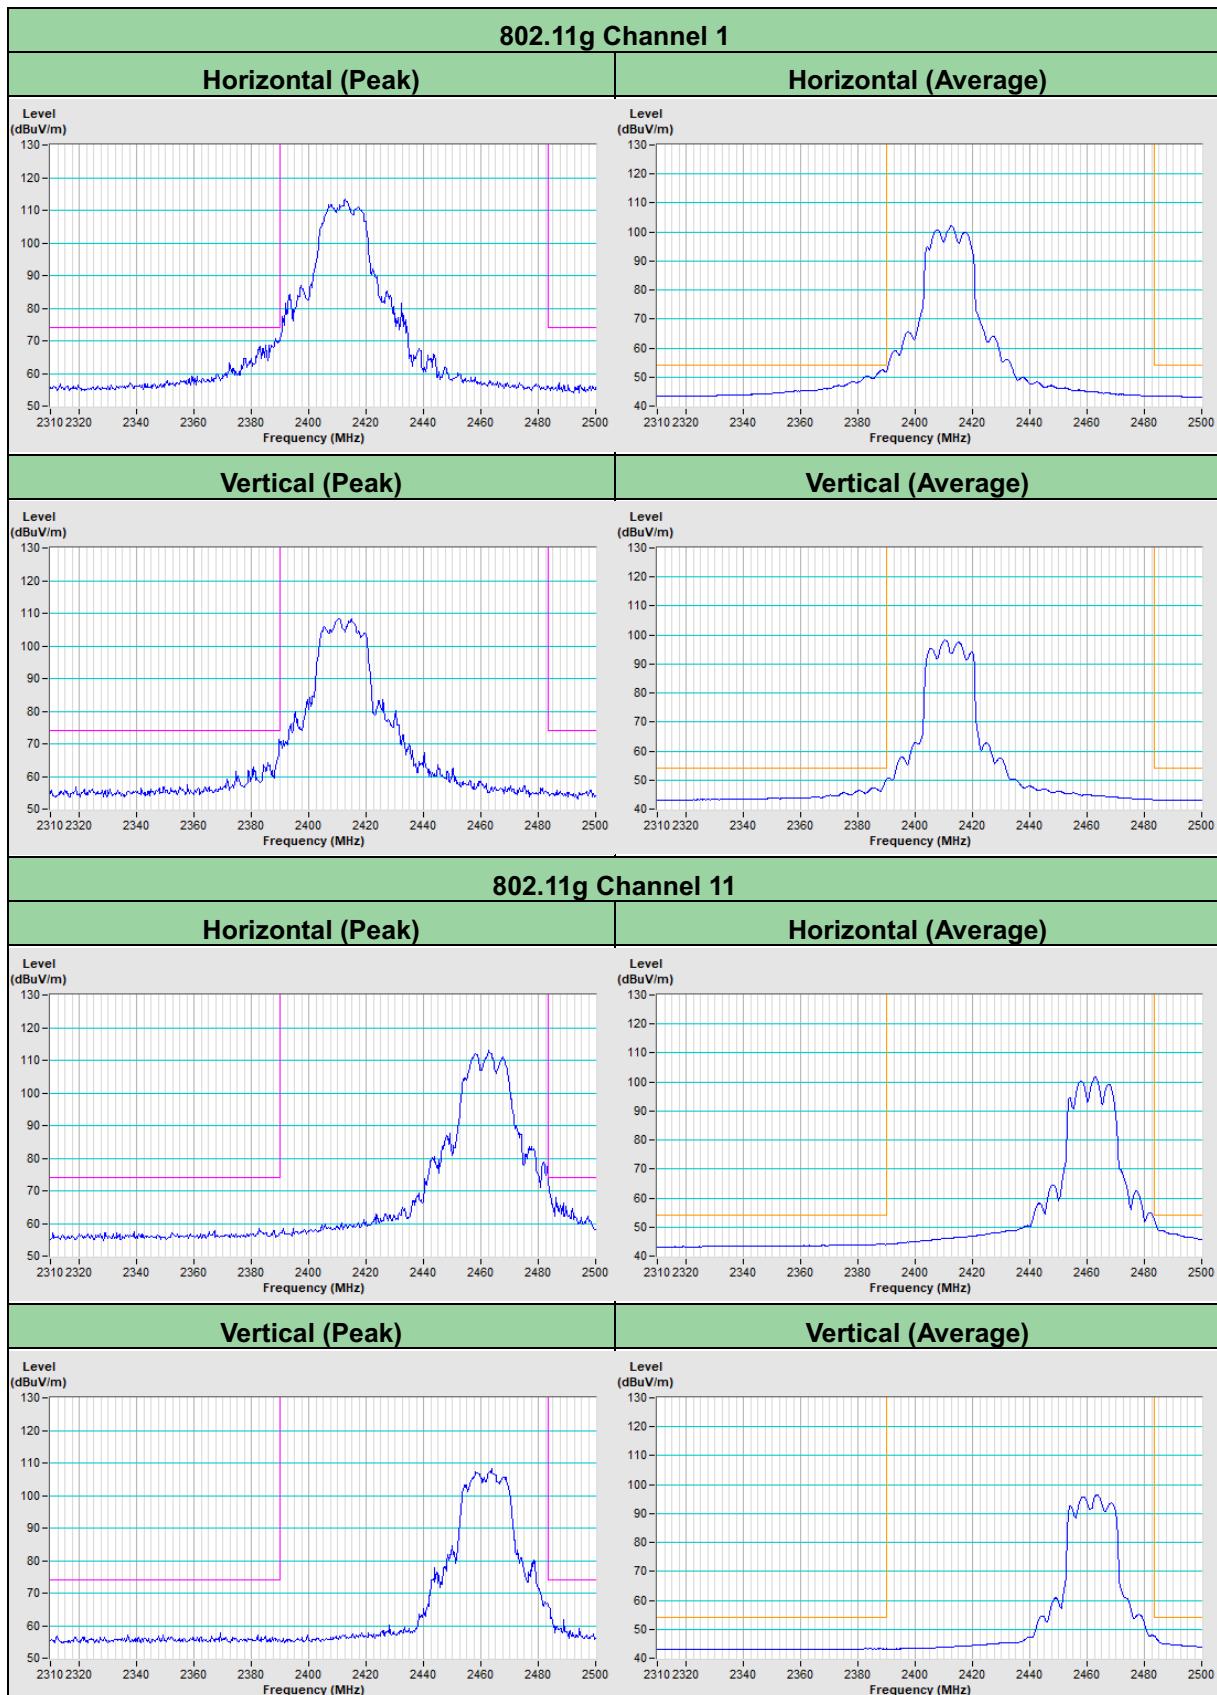

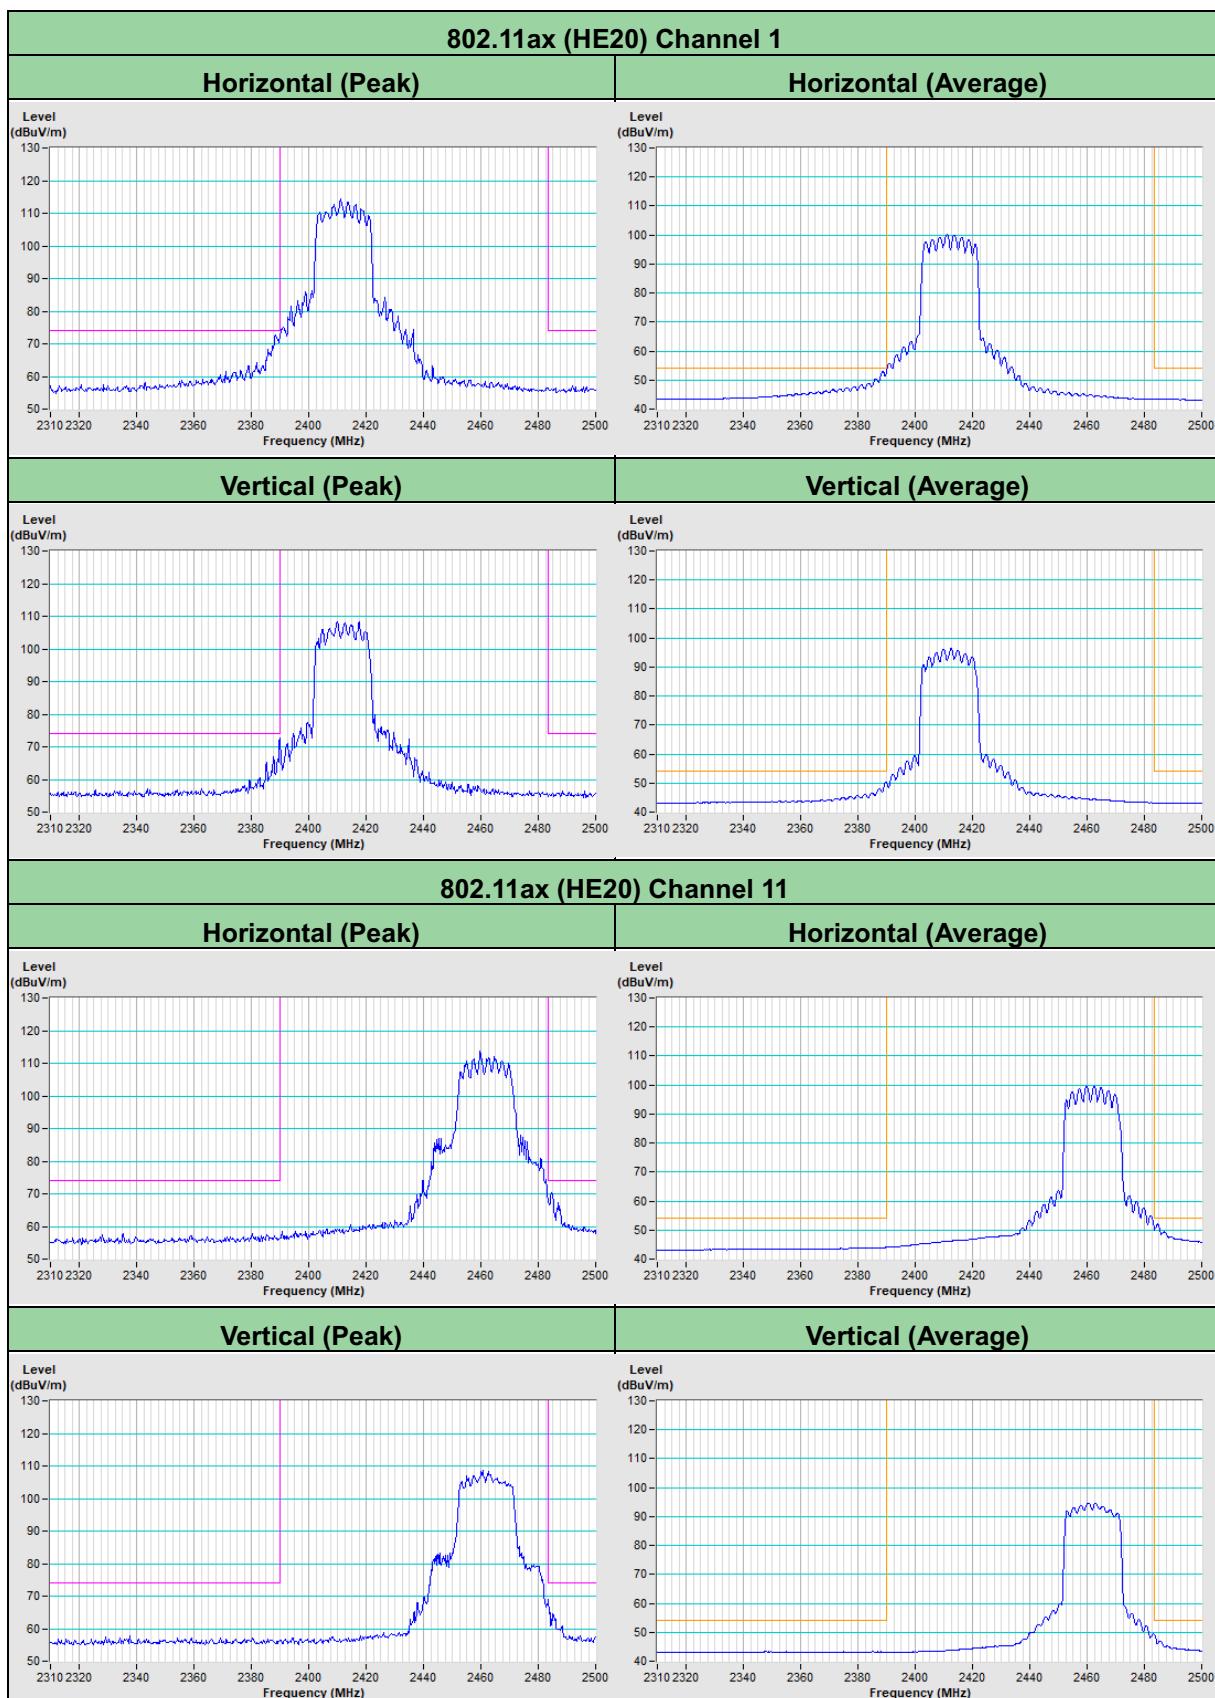

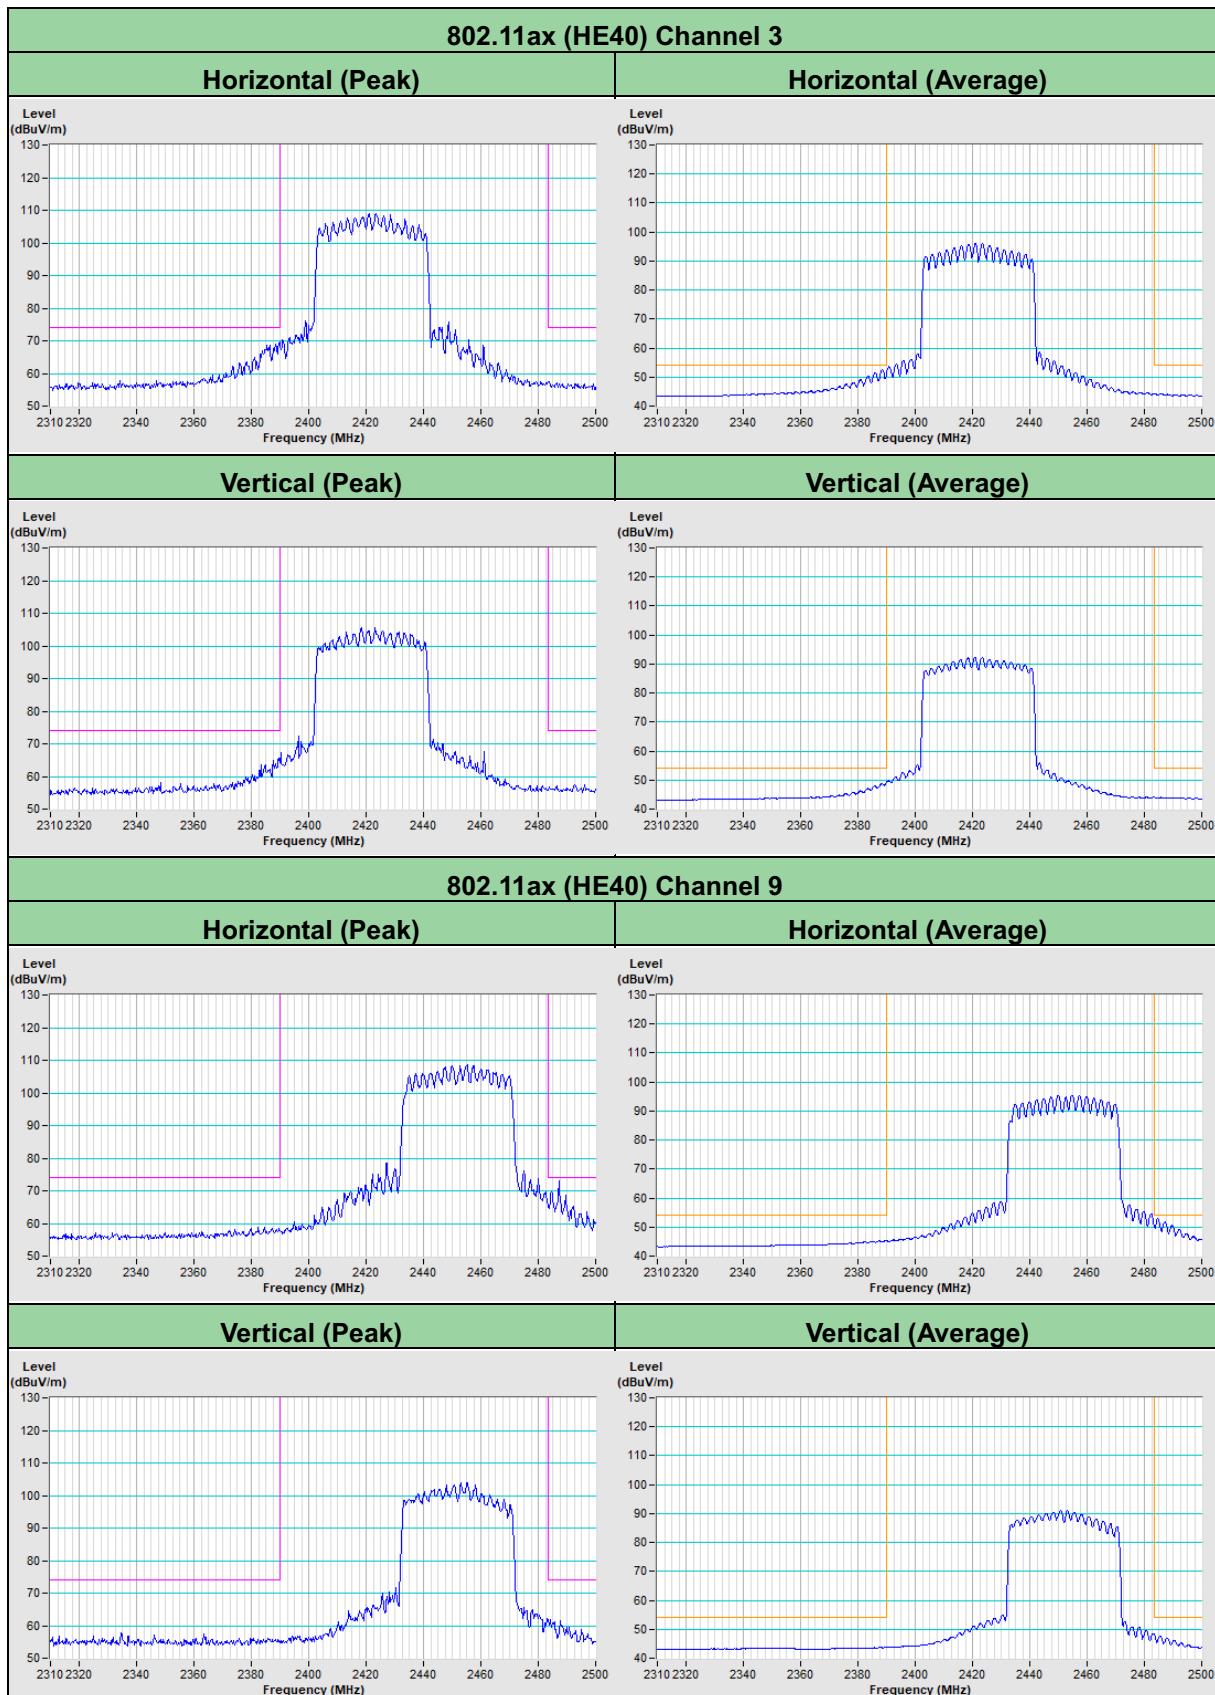

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---