


| REV | ECN. NO. | APPD. |
|-----|-------------|-------|
| X1 | BS-10-52089 | TIM |
| X2 | BS-10-61528 | TIM |

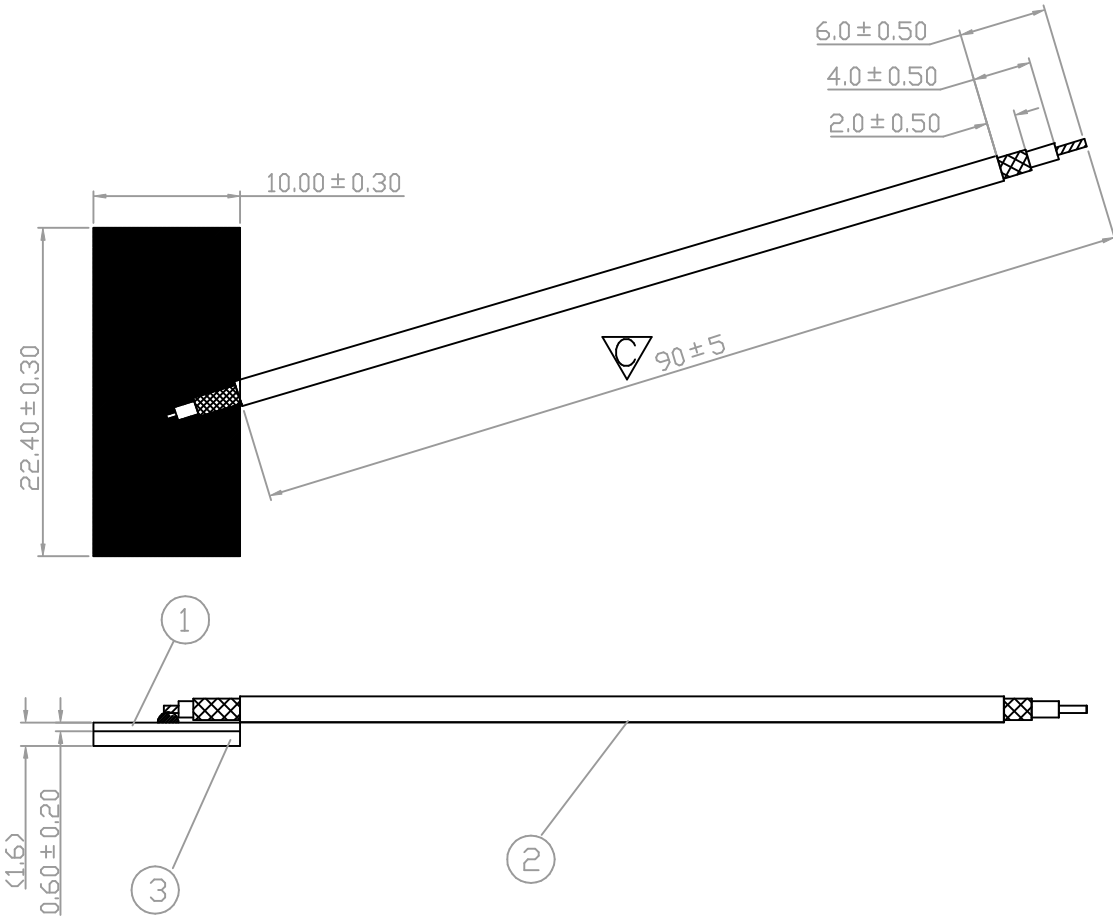

NOTES:

- 1) DIMENSION MARKED ∇ SHOULD BE CHECKED.
- 2) HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC. NO. "EPI12".
- 3) CABLE: COAXIAL CABLE, ϕ 1.37mm, JACKET COLOR: GRAY.
- 4) CABLE BRAID MUST BE GROUNDED TO CONNECTOR, OVER 360 DEGREE AT BOTH END.
- 5) TEST SPEC.: FREQUENCY RANG: 2.4GHZ TO 2.5GHZ
 VSWR: 2.4~2.5GHz < 2.0
 IMPEDANCE: 50 Ohms
 GAIN: < 2 dBi
- 6). SOLDER TEMPERATURE : 380 ± 20 °C , SOLDER TIME : 3~5 S

| 3 | EVA FOAM | 090-0001-4253 | EVA FOAM, L22.0xW9.5xT1.0mm | 1 PC |
|------|-----------|-----------------|---------------------------------------|------|
| 2 | CABLE | 703-3000-513 | ϕ 1.37mm , Black, E124936 | 96mm |
| 1 | PCB | 010148N00-574-G | FR4, L22.4xW10xT0.6mm, E201362/E93938 | 1 PC |
| ITEM | PART NAME | FOXCONN P/N | DESCRIPTION | Q'TY |

| | | | | |
|--|---------|----------|-----------------------------|--|
| X. ± 1.0 | X° ± | UNITS mm | NAME <INTENDED USE> | FOXCONN HON HAI PRECISION IND. CO., LTD. TAIPEI, TAIWAN, R.O.C. |
| .X ± 0.25 | .X° ± | MAT'L | CUSTOMER | |
| .XX ± 0.12 | .XX° ± | FINISH | PART NO. <INTENDED USE> | TITLE: |
| .XXX ± | .XXX° ± | | FX01Z46-AH-EF | ANTENNA, INTERNAL, 2.4G , 90mm |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD. | | | APPD: Tim Lin 07/13'10 | DWG NO.: 389-0000-317 |
| | | | CHKD: Edward Tseng 07/13'10 | SCALE SHEET REV. 1:1 1/1 X2 |
| | | | DR: Stanley.Zhang 07/13'10 | |