


# FCC Co-Location Test Report

**FCC ID** : I88WAC6103D-IA  
**Equipment** : 802.11 ac Unified Pro Access Point  
(Please refer to section 1.1.1 for more details)  
**Model No.** : WAC6103D-I  
(Please refer to section 1.1.1 for more details)  
**Brand Name** : ZYXEL  
**Applicant** : Zyxel Communications Corporation  
**Address** : No.2 Industry East RD. IX, Hsinchu Science  
Park, Hsinchu 30075, Taiwan, R.O.C  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Jul. 04, 2019  
**Tested Date** : Nov. 27, 2019 ~ Mar. 20, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	8
1.3	Test Standards .....	10
1.4	Deviation from Test Standard and Measurement Procedure.....	10
1.5	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>10</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>12</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	12
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>26</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR563002-11CO	Rev. 01	Initial issue	Jun. 08, 2020

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 3348.00MHz 53.02 (Margin -0.98dB) - AV	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
ZYXEL	WAC6103D-I	802.11 ac Unified Pro Access Point	For marketing purpose
	NAP203	802.11ac Dual-Radio Nebula Cloud Managed Access Point	
	NWA1123-AC PRO	802.11ac Dual-Radio Dual-Mount PoE Access Point	

### 1.1.2 Specification

<b>Operating Frequency</b>	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz, 5745 MHz ~ 5825 MHz
<b>Modulaton Type</b>	DSSS (DBPSK / DQPSK / CCK) OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

### 1.1.3 Antenna Details

Brand / Model	Ant. No.	Type	Connector	Frequencies (MHz) / Antenna Gain (dBi)			Remark
				2400~2483.5	5150~5250	5725~5850	
SINBON / 2.4G & 5G Metal & PCB Antenna	1	PIFA	UFL	3.28	---	---	Ceiling mounted: Antenna 1 / 2 / 3
	2	PIFA	UFL	3.37	---	---	
	3	PIFA	UFL	3.15	---	---	
	4	Dipole	UFL	4.33	---	---	Wall mounted: Antenna 1 / 2 / 4
	5	LOOP	UFL	---	4.38	4.23	Ceiling mounted: Antenna 5 / 6 / 7
	6	LOOP	UFL	---	4.31	4.22	
	7	LOOP	UFL	---	4.38	4.36	Wall mounted: Antenna 5 / 6 / 8
	8	Dipole	UFL	---	5.12	5.20	

Note:

1. The device has a hardware control switch to change operating mode as Ceiling or Wall mounted mode. The difference between both operating modes is only transmission antennas combination.
2. The antenna set includes 8 antennas as above table.

#### 1.1.4 Accessories (For Model: NWA1123-AC PRO only)

Accessories		
No.	Equipment	Description
1	POE	Brand: SHENZHEN TOPOW ELECTRONICS CO., LTD. Model: TPT24S48A Power Rating: I/P: 100-240Vac, 50/60Hz, 0.5A MAX O/P: 48Vdc, 500mA Power line: AC power cord, 1.75m, non- shielded, w/o core
2	RJ45 cable	Brand: Nien-Yi Model: NYS2676 Power line: 1.45m, non-shielded, w/o core

The above POE and RJ45 cable are not bundled in market for model WAC6103D-I and NAP203

## 1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Nov. 27, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.



<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	Mar. 20, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

### 1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### 1.4 Deviation from Test Standard and Measurement Procedure

None

### 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Radiated emission $\leq$ 1GHz	$\pm 3.41$ dB
Radiated emission $>$ 1GHz	$\pm 4.59$ dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	24-25°C / 61-62%	Akun Chung Roger Lu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Radiated Emissions ≤1GHz	2.4G 11b + 5G 11ac VHT20	CH6 + CH157	1Mbps + MCS 0	1, 2, 3, 4
Radiated Emissions >1GHz	2.4G 11b + 5G 11ac VHT20	CH6 + CH157	1Mbps + MCS 0	1, 2

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** and **Z-plane** results were found as the worst case and were shown in this report as below test configuration.
2. The device was designed to be ceiling mounted or wall mounted with different group of antenna. Each group of antenna was selected to perform radiated emission test as below test configuration.
3. Test Configurations are listed as below:
  - 1) Configuration 1: Model WAC6103D-I, NAP203: Ceiling mounted, Z-plane.
  - 2) Configuration 2: Model WAC6103D-I, NAP203: Wall mounted, Y-plane
  - 3) Configuration 3: Model NWA1123-AC PRO: Ceiling mounted, Z-plane.
  - 4) Configuration 4: Model NWA1123-AC PRO: Wall mounted, Y-plane

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

##### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup

#### Radiated Emissions below 1 GHz

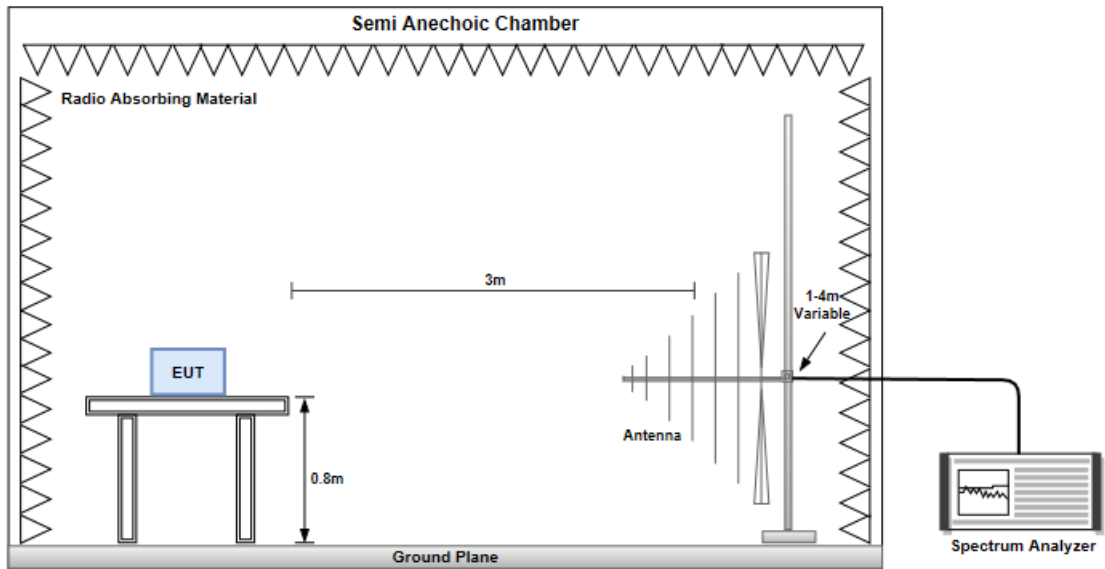


#### Radiated Emissions above 1 GHz

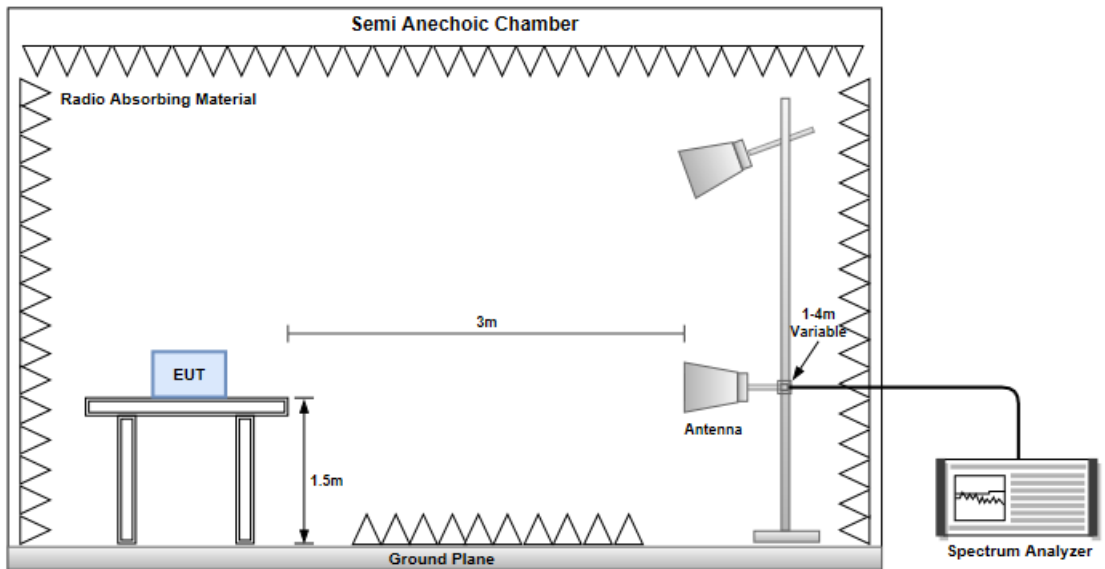

### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

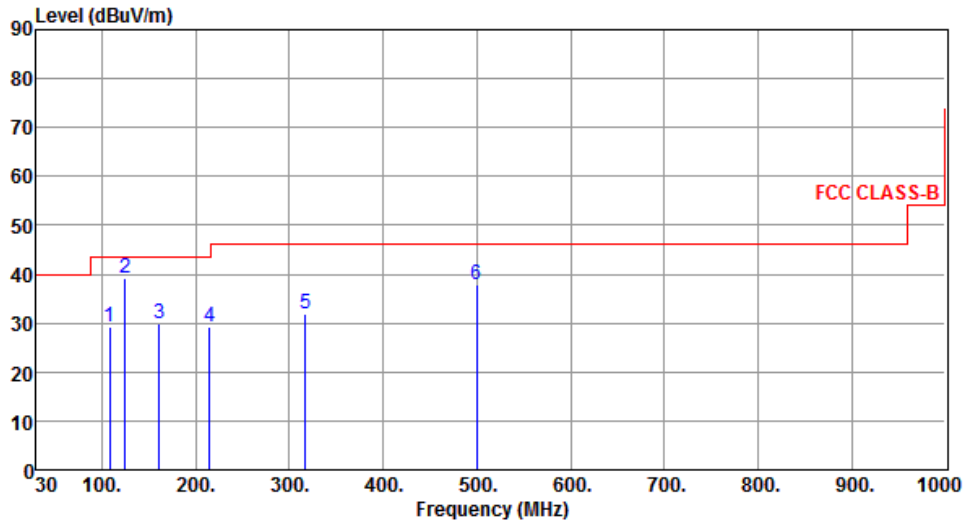

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	108.57	29.08	43.50	-14.42	40.77	-11.69	Peak	---	---
2	125.00	39.21	43.50	-4.29	49.39	-10.18	QP	157	109
3	160.95	29.93	43.50	-13.57	38.36	-8.43	Peak	---	---
4	215.27	29.36	43.50	-14.14	41.40	-12.04	Peak	---	---
5	317.12	32.00	46.00	-14.00	39.47	-7.47	Peak	---	---
6	499.48	37.75	46.00	-8.25	40.88	-3.13	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

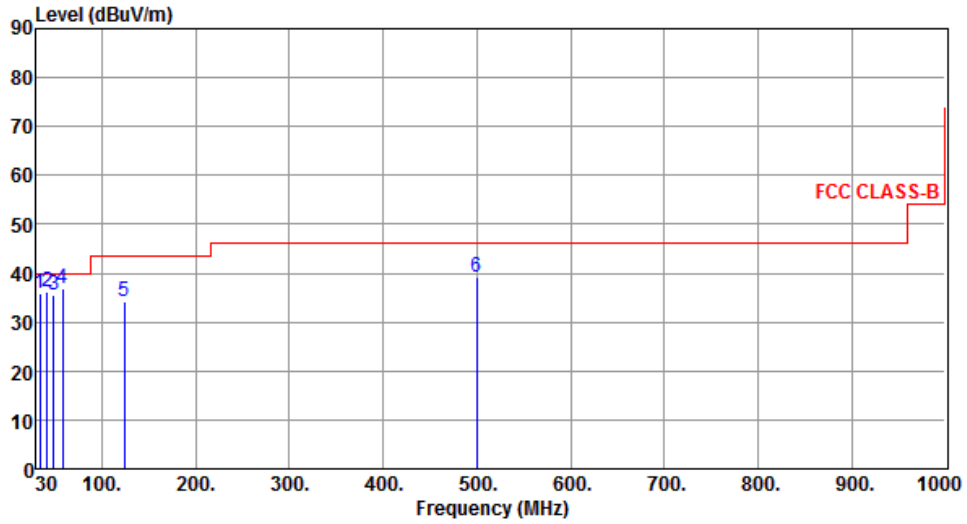

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	33.75	35.78	40.00	-4.22	45.30	-9.52	QP	100	162
2	41.70	36.25	40.00	-3.75	44.64	-8.39	QP	100	153
3	48.25	35.64	40.00	-4.36	44.02	-8.38	QP	100	282
4	58.13	36.98	40.00	-3.02	45.89	-8.91	Peak	---	---
5	124.09	34.23	43.50	-9.27	44.50	-10.27	Peak	---	---
6	499.48	39.20	46.00	-6.80	42.33	-3.13	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

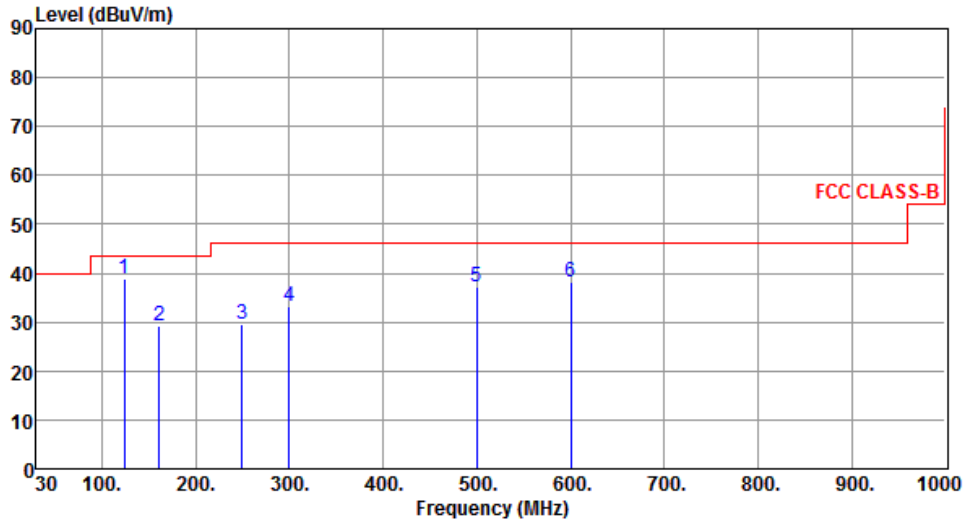

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	124.09	38.96	43.50	-4.54	49.23	-10.27	QP	150	120
2	160.95	29.07	43.50	-14.43	37.50	-8.43	Peak	---	---
3	249.22	29.55	46.00	-16.45	39.51	-9.96	Peak	---	---
4	299.66	33.20	46.00	-12.80	41.30	-8.10	Peak	---	---
5	499.48	37.04	46.00	-8.96	40.17	-3.13	Peak	---	---
6	600.36	38.19	46.00	-7.81	39.15	-0.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

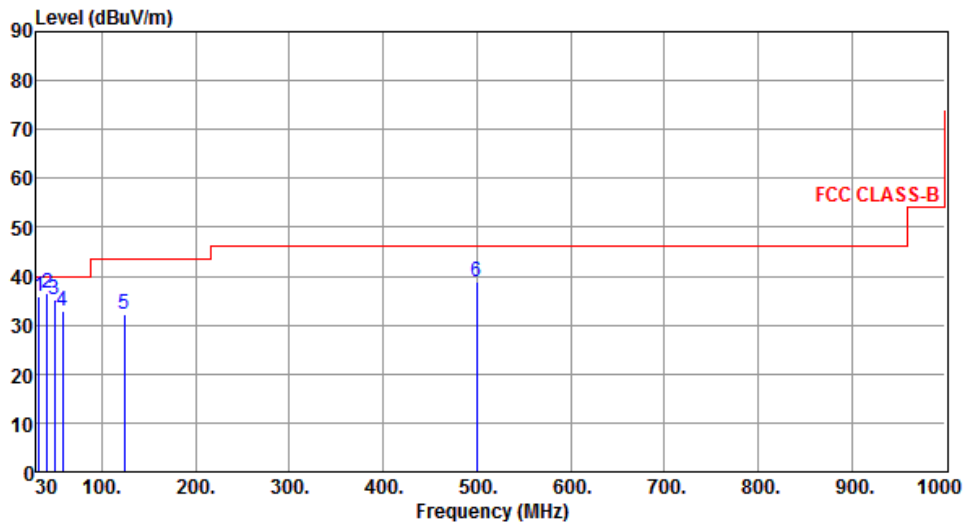

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	32.85	35.74	40.00	-4.26	45.17	-9.43	QP	100	175
2	41.55	36.38	40.00	-3.62	44.80	-8.42	QP	100	155
3	49.34	35.10	40.00	-4.90	43.42	-8.32	QP	100	274
4	58.13	33.03	40.00	-6.97	41.94	-8.91	Peak	---	---
5	124.09	32.36	43.50	-11.14	42.63	-10.27	Peak	---	---
6	499.48	38.92	46.00	-7.08	42.05	-3.13	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	3

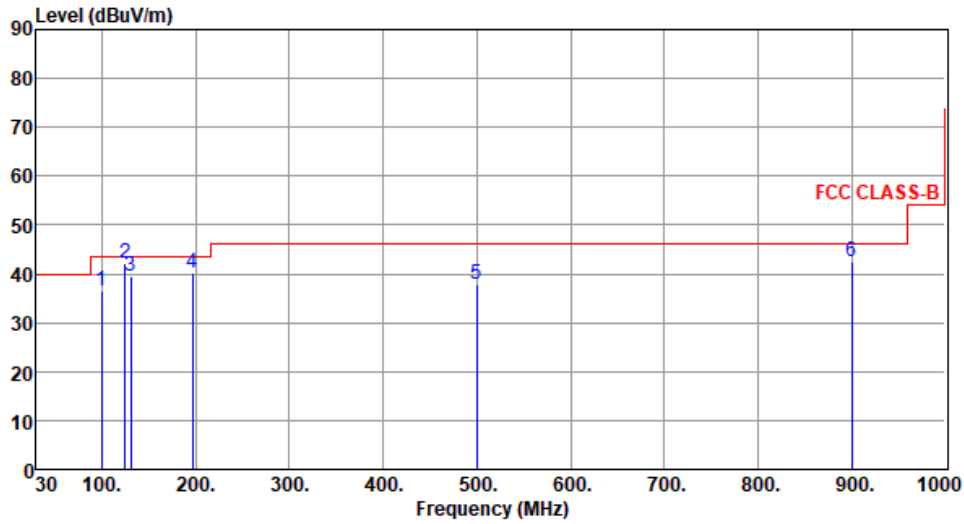

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	99.84	36.50	43.50	-7.00	49.55	-13.05	Peak	---	---
2	125.00	42.22	43.50	-1.28	52.40	-10.18	QP	131	102
3	130.88	39.43	43.50	-4.07	49.01	-9.58	Peak	---	---
4	196.84	40.11	43.50	-3.39	51.90	-11.79	QP	100	167
5	499.48	37.86	46.00	-8.14	40.99	-3.13	Peak	---	---
6	900.09	42.53	46.00	-3.47	38.45	4.08	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	3

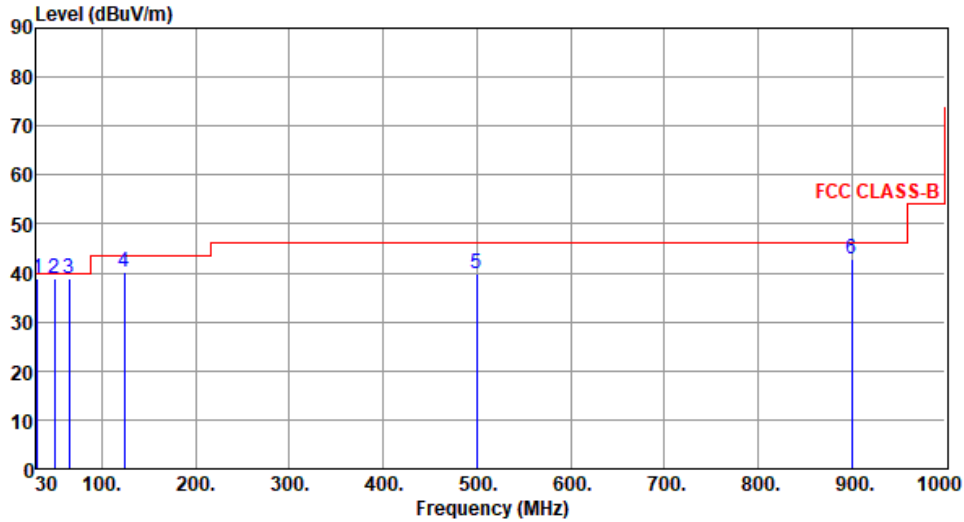

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.97	38.99	40.00	-1.01	48.59	-9.60	QP	100	164
2	49.40	38.85	40.00	-1.15	47.18	-8.33	QP	100	190
3	64.92	38.83	40.00	-1.17	48.39	-9.56	QP	100	199
4	124.09	40.27	43.50	-3.23	50.54	-10.27	Peak	---	---
5	499.48	39.78	46.00	-6.22	42.91	-3.13	Peak	---	---
6	900.09	42.96	46.00	-3.04	38.88	4.08	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	4

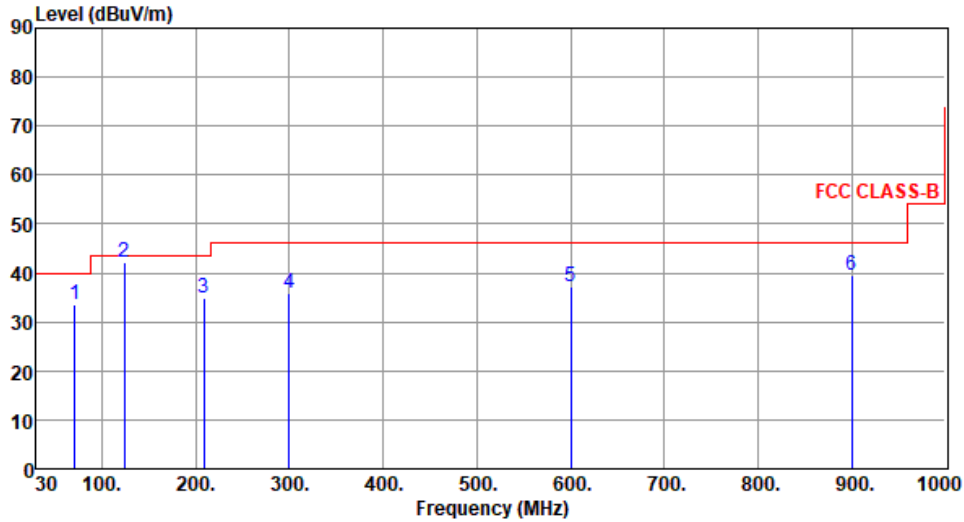

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	70.74	33.70	40.00	-6.30	44.42	-10.72	Peak	---	---
2	124.09	42.13	43.50	-1.37	52.40	-10.27	QP	151	134
3	208.48	34.82	43.50	-8.68	46.89	-12.07	Peak	---	---
4	299.66	35.73	46.00	-10.27	43.83	-8.10	Peak	---	---
5	600.36	37.34	46.00	-8.66	38.30	-0.96	Peak	---	---
6	900.09	39.54	46.00	-6.46	35.46	4.08	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	4

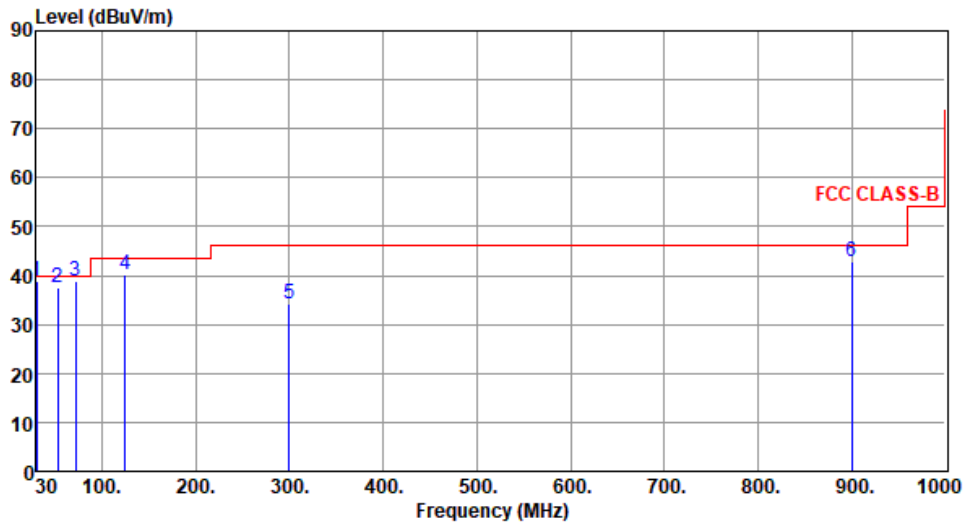

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.00	38.84	40.00	-1.16	48.55	-9.71	QP	100	168
2	53.09	37.40	40.00	-2.60	45.80	-8.40	QP	100	172
3	71.65	38.69	40.00	-1.31	49.50	-10.81	QP	100	146
4	125.00	40.32	43.50	-3.18	50.50	-10.18	QP	100	194
5	299.66	34.10	46.00	-11.90	42.20	-8.10	Peak	---	---
6	900.09	42.80	46.00	-3.20	38.72	4.08	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157	
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1	

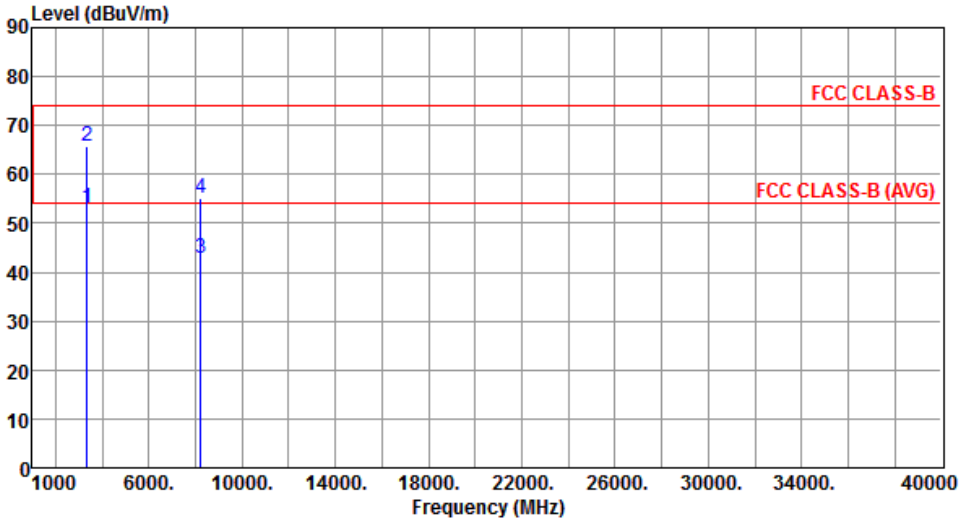


The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 40000). Two horizontal red lines represent FCC CLASS-B (at ~75 dBuV/m) and FCC CLASS-B (AVG) (at ~55 dBuV/m). Four vertical blue lines with markers indicate test results at 3348.00 MHz (points 1 and 2) and 8222.00 MHz (points 3 and 4). Point 1 is at ~53 dBuV/m, point 2 at ~66 dBuV/m, point 3 at ~43 dBuV/m, and point 4 at ~55 dBuV/m.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3348.00	53.02	54.00	-0.98	54.19	-1.17	Average	207	291
2	3348.00	65.78	74.00	-8.22	66.95	-1.17	Peak	207	291
3	8222.00	42.93	54.00	-11.07	33.35	9.58	Average	100	20
4	8222.00	55.23	74.00	-18.77	45.65	9.58	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

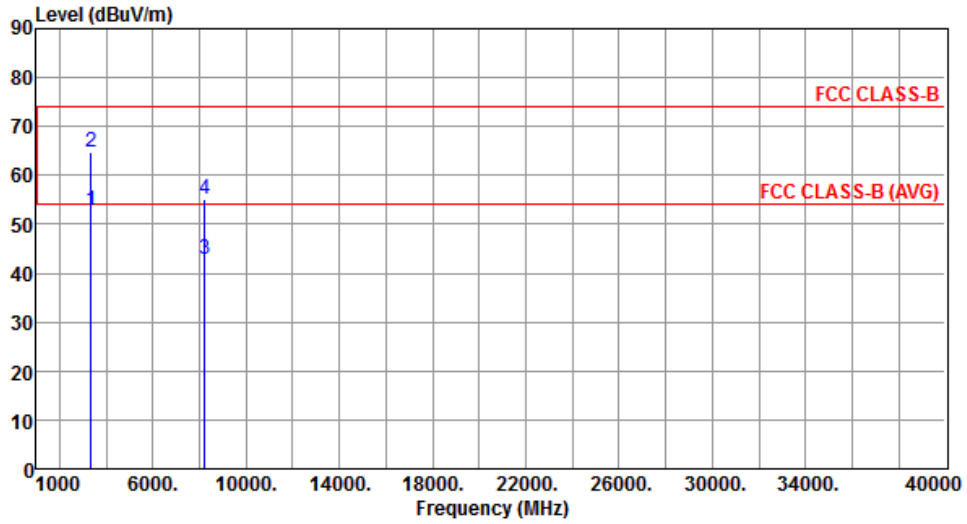


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3348.00	52.71	54.00	-1.29	53.88	-1.17	Average	217	358
2	3348.00	64.62	74.00	-9.38	65.79	-1.17	Peak	217	358
3	8222.00	42.77	54.00	-11.23	33.19	9.58	Average	100	100
4	8222.00	55.02	74.00	-18.98	45.44	9.58	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

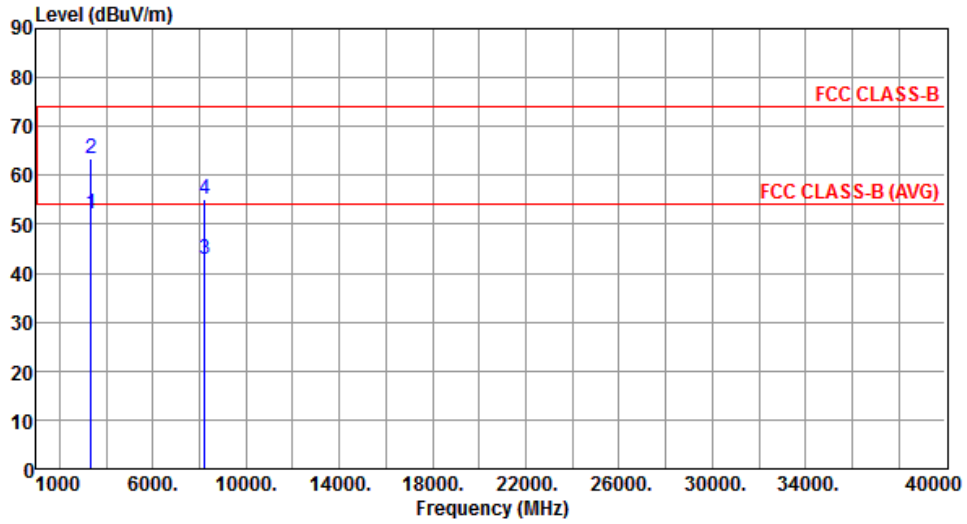

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3348.00	52.30	54.00	-1.70	53.47	-1.17	Average	211	307
2	3348.00	63.53	74.00	-10.47	64.70	-1.17	Peak	211	307
3	8222.00	42.70	54.00	-11.30	33.12	9.58	Average	100	60
4	8222.00	55.09	74.00	-18.91	45.51	9.58	Peak	100	60


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	2.4G 11b + 5G 11ac VHT20	<b>Test Freq. (MHz)</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

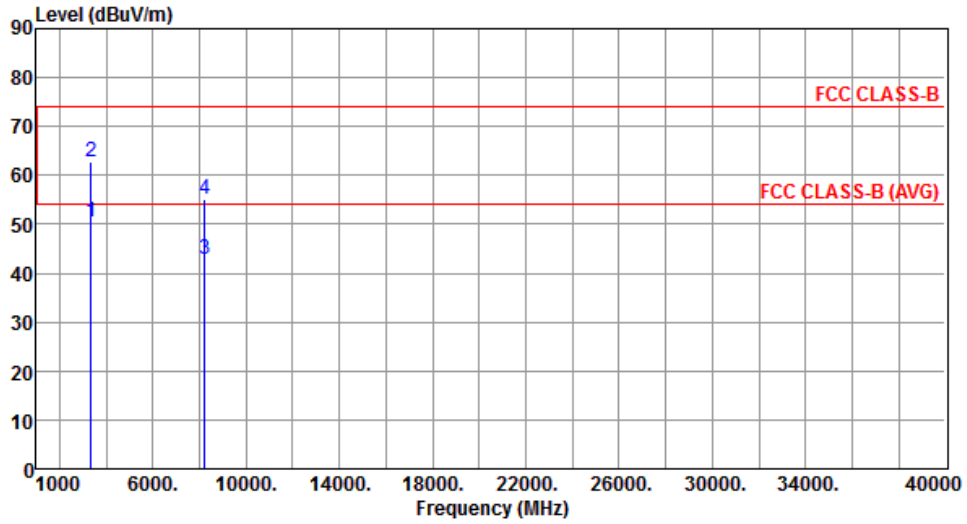

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3348.00	50.62	54.00	-3.38	51.79	-1.17	Average	123	334
2	3348.00	62.66	74.00	-11.34	63.83	-1.17	Peak	123	334
3	8222.00	42.72	54.00	-11.28	33.14	9.58	Average	100	40
4	8222.00	55.14	74.00	-18.86	45.56	9.58	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==