


FCC Test Report

FCC ID : I88WAC6553D-E
Equipment : 802.11 ac Unified Pro Access Point
Model No. : WAC6553D-E
Brand Name : ZyXEL
Applicant : ZyXEL Communications Corporation
Address : No. 2, Gongye E. 9th Road, Hsinchu Science
Park, Hsinchu, Taiwan.
Standard : 47 CFR FCC Part 15.407
Classification : Outdoor access point
Received Date : Feb. 11, 2015
Tested Date : Mar. 12 ~ Mar. 26, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

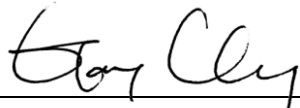

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth	18
3.3	RF Output Power	21
3.4	Peak Power Spectral Density	25
3.5	Transmitter Radiated and Band Edge Emissions	29
3.6	Frequency Stability.....	72
4	TEST LABORATORY INFORMATION	74

Release Record

Report No.	Version	Description	Issued Date
FR521102AN	Rev. 01	Initial issue	Apr. 15, 2015

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.295MHz 46.84 (Margin -3.55dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5150.00MHz 53.00 (Margin -1.00dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150-5250MHz: 18.26 5725-5850MHz: 28.38	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250	a	5180-5240	36-48 [4]	3	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	3	MCS 0-23
5150-5250	n (HT40)	5190-5230	38-46 [2]	3	MCS 0-23
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	3	MCS 0-9
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	3	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	3	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5725-5850	a	5745-5825	149-165 [5]	3	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	3	MCS 0-23
5725-5850	n (HT40)	5755-5795	151-159 [2]	3	MCS 0-23
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	3	MCS 0-9
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	3	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	3	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

1.1.2 Antenna Details

Ant. No.	Model	Type	Antenna Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	ZXL04-22008A	Dipole	N type	4.5	7	7

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	48Vdc from POE (support unit only)
--------------------------	------------------------------------

1.1.4 Accessories

N/A

1.1.5 Channel List

For Frequency band 5150-5250 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	VHT 80	
48	5240	42	5210

For Frequency band 5725~5850 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	VHT80	
161	5805	155	5775
165	5825	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, version 2.3		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11a	98.56%	0.06
	VHT20	98.47%	0.07
	VHT40	95.77%	0.19
	VHT80	87.94%	0.56

1.1.7 Power Setting

For Frequency band 5150-5250 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	13.5
11a	5200	13.5
11a	5240	13.5
HT20	5180	13.5
HT20	5200	13.5
HT20	5240	13.5
HT40	5190	13.5
HT40	5230	13.5
VHT20	5180	13.5
VHT20	5200	13.5
VHT20	5240	13.5
VHT40	5190	13.5
VHT40	5230	13.5
VHT80	5210	12


For Frequency band 5725~5850 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	20
11a	5785	27
11a	5825	23
HT20	5745	20
HT20	5785	27
HT20	5825	23
HT40	5755	15.5
HT40	5795	22
VHT20	5745	20
VHT20	5785	27
VHT20	5825	23
VHT40	5755	15.5
VHT40	5795	22
VHT80	5775	12

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	74GB4X1	RJ45, 10m non-shielded w/o core.
2	POE	ZyXEL	PoE12-HP	---	RJ45, 1m non-shielded w/o core.

Note: No.2 was supplied by applicant.

1.3 Test Setup Chart

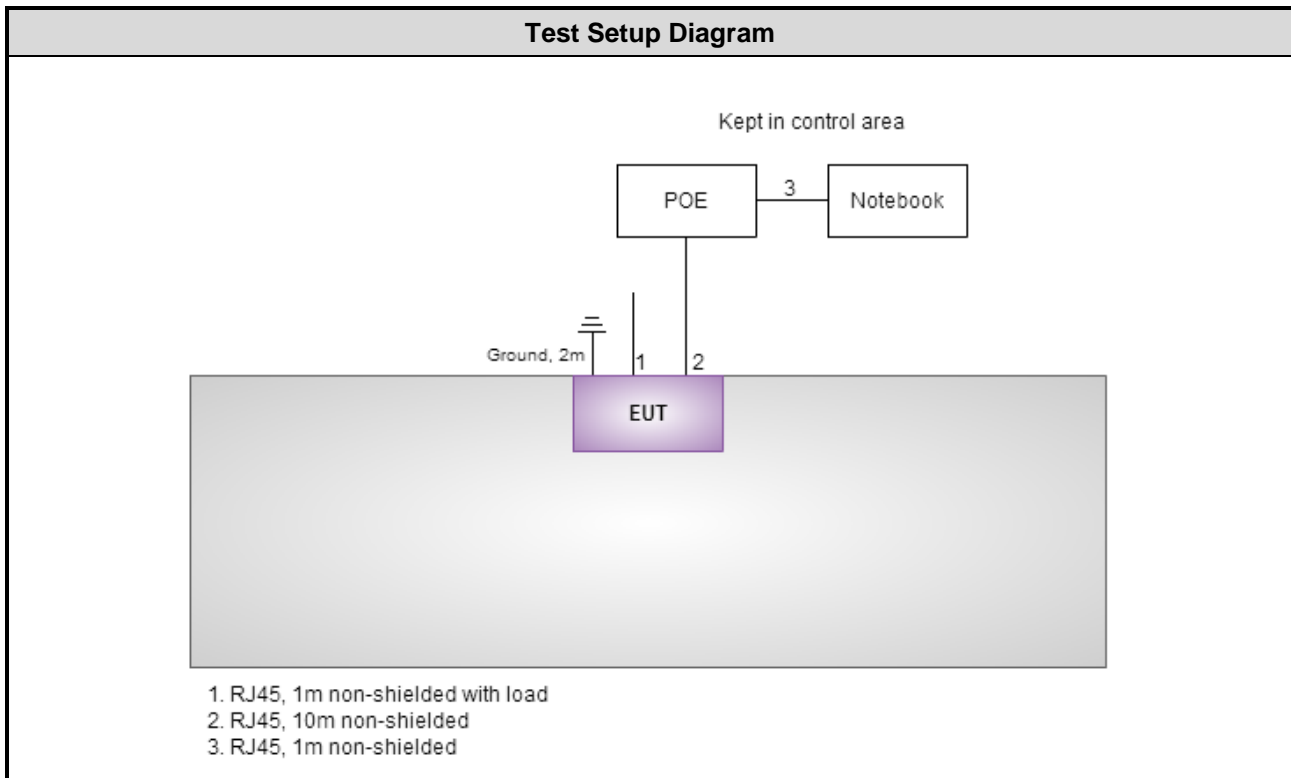

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 09, 2014	Dec. 08, 2015
Receiver	R&S	ESR3	101658	Nov. 10, 2014	Nov. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Sep. 05, 2014	Sep. 04, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2014	Dec. 10, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 09, 2014	Sep. 08, 2015
Preamplifier	Agilent	83017A	MY39501308	Oct. 09, 2014	Oct. 08, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 15, 2014	Dec. 14, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 15, 2014	Dec. 14, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 15, 2014	Dec. 14, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 03, 2014	Dec. 02, 2015
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor $k=2$)

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Frequency error	± 34.134 Hz
Power density	± 0.463 dB
Conducted emission	± 2.670 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.72 dB
Radiated emission > 1 GHz	± 5.65 dB
Time	$\pm 0.1\%$
Temperature	± 0.6 °C

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 75%	Peter Lin
Radiated Emissions	03CH01-WS	20-21°C / 64%	Aska Huang
RF Conducted	TH01-WS	22°C / 65%	Felix Sung

- FCC site registration No.: 657002
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5180	6 Mbps	---
Radiated Emissions ≤ 1 GHz	11a	5180	6 Mbps	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	---
	HT40	5190 / 5230	MCS 0	---
	VHT20	5180 / 5200 / 5240	MCS 0	---
	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	---
Radiated Emissions > 1 GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	---
	VHT20	5180 / 5200 / 5240	MCS 0	---
	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	---
Frequency Stability	Un-modulation	5200	---	---

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT20	5785	MCS 0	---
Radiated Emissions ≤ 1 GHz	VHT20	5785	MCS 0	---
RF Output Power	11a	5745 / 5785 / 5825	6 Mbps	---
	HT20	5745 / 5785 / 5825	MCS 0	
	HT40	5755 / 5795	MCS 0	
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions > 1 GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	11a	5745 / 5785 / 5825	6 Mbps	---
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation	11a	Test Freq. (MHz)	5180
Power Phase	Line		

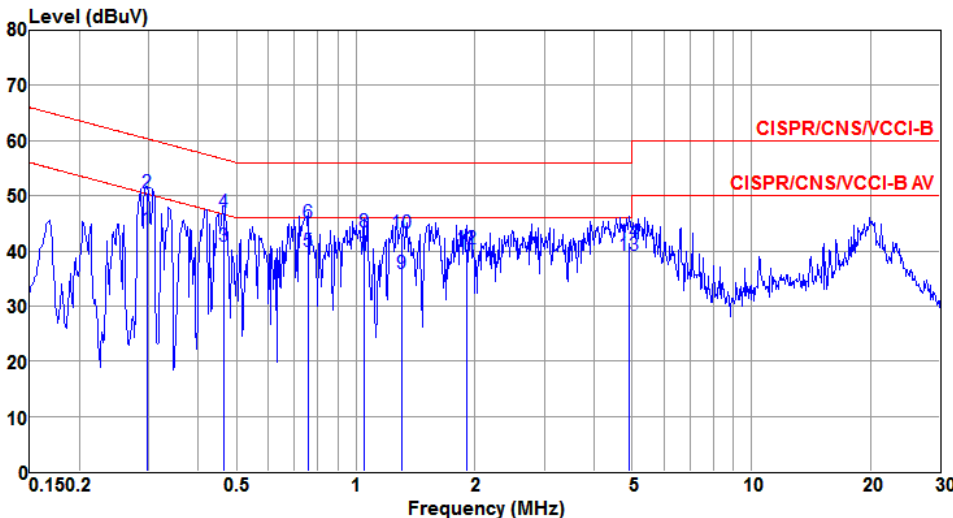

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.297	43.85	50.32	-6.47	34.09	9.66	0.10	Average
2	0.297	50.40	60.32	-9.92	40.64	9.66	0.10	QP
3*	0.464	40.92	46.63	-5.71	31.14	9.66	0.12	Average
4	0.464	46.89	56.63	-9.74	37.11	9.66	0.12	QP
5	0.759	39.82	46.00	-6.18	30.02	9.66	0.14	Average
6	0.759	45.05	56.00	-10.95	35.25	9.66	0.14	QP
7	1.049	39.21	46.00	-6.79	29.38	9.66	0.17	Average
8	1.049	43.44	56.00	-12.56	33.61	9.66	0.17	QP
9	1.303	35.87	46.00	-10.13	26.02	9.66	0.19	Average
10	1.303	43.14	56.00	-12.86	33.29	9.66	0.19	QP
11	1.908	39.39	46.00	-6.61	29.49	9.67	0.23	Average
12	1.908	40.41	56.00	-15.59	30.51	9.67	0.23	QP
13	4.900	39.26	46.00	-6.74	29.26	9.69	0.31	Average
14	4.900	41.49	56.00	-14.51	31.49	9.69	0.31	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation	11a	Test Freq. (MHz)	5180
Power Phase	Neutral		

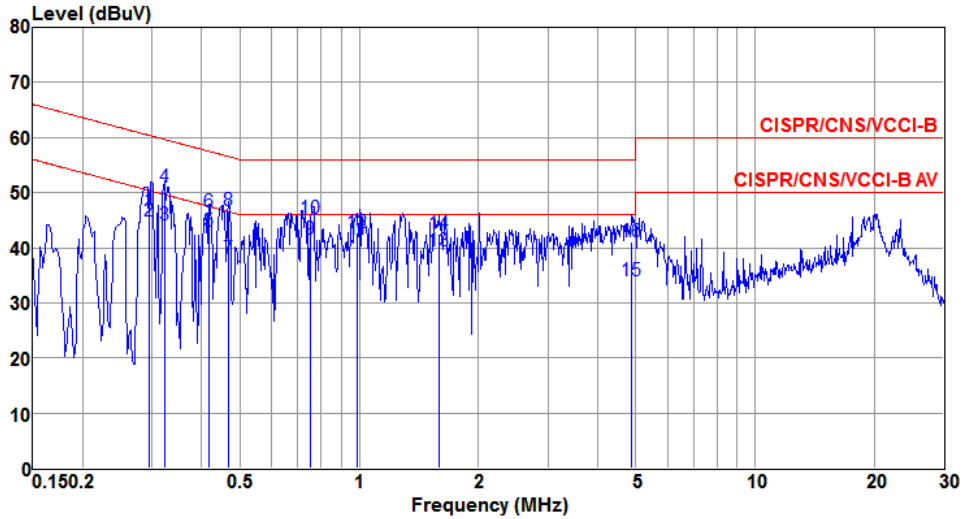

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.295	46.84	50.39	-3.55	37.08	9.66	0.10	Average
2	0.295	44.77	60.39	-15.62	35.01	9.66	0.10	QP
3	0.323	44.16	49.62	-5.46	34.40	9.66	0.10	Average
4	0.323	50.90	59.62	-8.72	41.14	9.66	0.10	QP
5	0.418	42.98	47.48	-4.50	33.21	9.66	0.11	Average
6	0.418	46.41	57.48	-11.07	36.64	9.66	0.11	QP
7	0.466	37.96	46.58	-8.62	28.18	9.66	0.12	Average
8	0.466	46.81	56.58	-9.77	37.03	9.66	0.12	QP
9	0.753	41.60	46.00	-4.40	31.80	9.66	0.14	Average
10	0.753	45.27	56.00	-10.73	35.47	9.66	0.14	QP
11	0.989	41.49	46.00	-4.51	31.67	9.66	0.16	Average
12	0.989	42.62	56.00	-13.38	32.80	9.66	0.16	QP
13	1.585	39.45	46.00	-6.55	29.57	9.67	0.21	Average
14	1.585	42.48	56.00	-13.52	32.60	9.67	0.21	QP
15	4.874	33.97	46.00	-12.03	23.97	9.69	0.31	Average
16	4.874	41.08	56.00	-14.92	31.08	9.69	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation	VHT20	Test Freq. (MHz)	5785
Power Phase	Line		

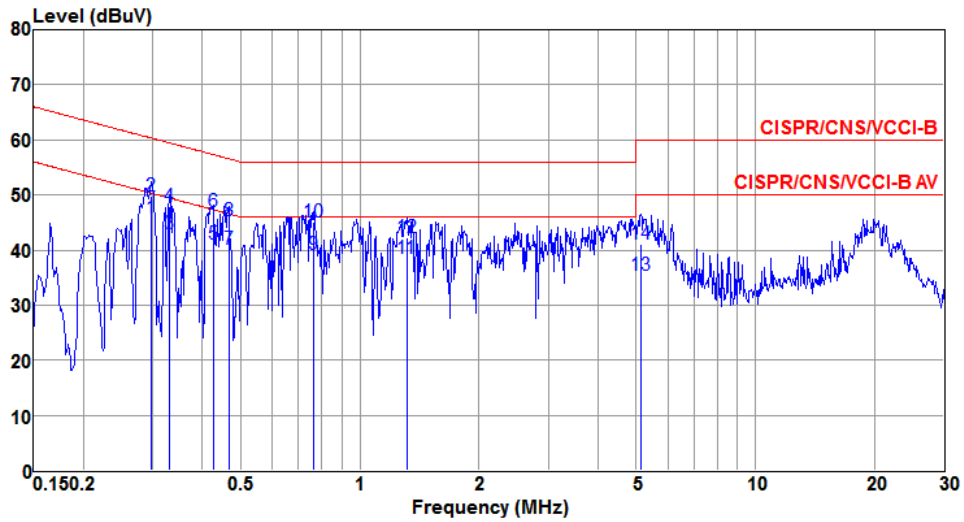

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.297	45.76	50.32	-4.56	36.00	9.66	0.10	Average
2	0.297	49.90	60.32	-10.42	40.14	9.66	0.10	QP
3	0.330	42.99	49.44	-6.45	33.23	9.66	0.10	Average
4	0.330	48.01	59.44	-11.43	38.25	9.66	0.10	QP
5	0.428	41.15	47.29	-6.14	31.38	9.66	0.11	Average
6	0.428	47.02	57.29	-10.27	37.25	9.66	0.11	QP
7	0.466	40.09	46.58	-6.49	30.31	9.66	0.12	Average
8	0.466	45.24	56.58	-11.34	35.46	9.66	0.12	QP
9	0.763	39.24	46.00	-6.76	29.44	9.66	0.14	Average
10	0.763	45.05	56.00	-10.95	35.25	9.66	0.14	QP
11	1.317	38.51	46.00	-7.49	28.66	9.66	0.19	Average
12	1.317	42.36	56.00	-13.64	32.51	9.66	0.19	QP
13	5.139	35.47	50.00	-14.53	25.47	9.69	0.31	Average
14	5.139	41.00	60.00	-19.00	31.00	9.69	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation	VHT20	Test Freq. (MHz)	5785
Power Phase	Neutral		

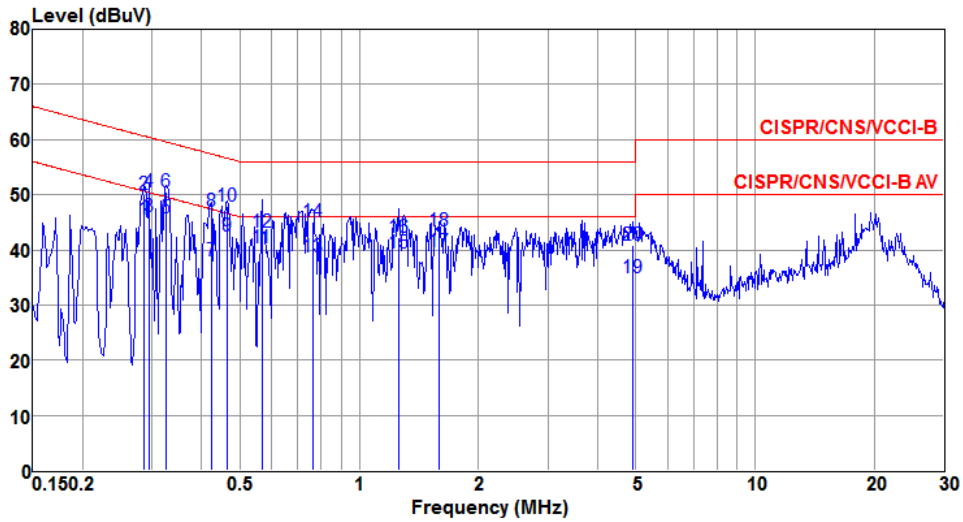

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.286	45.56	50.63	-5.07	35.80	9.66	0.10	Average
2	0.286	49.97	60.63	-10.66	40.21	9.66	0.10	QP
3	0.295	46.03	50.38	-4.35	36.27	9.66	0.10	Average
4	0.295	50.49	60.38	-9.89	40.73	9.66	0.10	QP
5*	0.325	45.76	49.57	-3.81	36.00	9.66	0.10	Average
6	0.325	50.39	59.57	-9.18	40.63	9.66	0.10	QP
7	0.422	38.00	47.41	-9.41	28.23	9.66	0.11	Average
8	0.422	46.94	57.41	-10.47	37.17	9.66	0.11	QP
9	0.464	42.47	46.63	-4.16	32.69	9.66	0.12	Average
10	0.464	47.92	56.63	-8.71	38.14	9.66	0.12	QP
11	0.567	40.44	46.00	-5.56	30.65	9.66	0.13	Average
12	0.567	43.23	56.00	-12.77	33.44	9.66	0.13	QP
13	0.763	38.70	46.00	-7.30	28.90	9.66	0.14	Average
14	0.763	45.17	56.00	-10.83	35.37	9.66	0.14	QP
15	1.255	39.39	46.00	-6.61	29.54	9.66	0.19	Average
16	1.255	42.32	56.00	-13.68	32.47	9.66	0.19	QP
17	1.593	39.58	46.00	-6.42	29.70	9.67	0.21	Average
18	1.593	43.37	56.00	-12.63	33.49	9.67	0.21	QP
19	4.926	34.83	46.00	-11.17	24.83	9.69	0.31	Average
20	4.926	40.74	56.00	-15.26	30.74	9.69	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Emission Bandwidth

3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.2.2 Test Procedures

26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission


Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW \geq 3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

6dB Bandwidth


1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.2.3 Test Setup

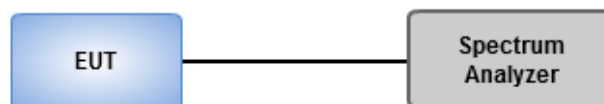


3.2.4 Test Result of Emission Bandwidth

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	3	5180	23.13	21.80	21.68	---	16.81	16.73	16.68	---
11a	3	5200	22.32	22.38	20.93	---	16.79	16.71	16.69	---
11a	3	5240	22.49	22.38	22.26	---	16.82	16.73	16.67	---
VHT20	3	5180	23.19	23.07	23.13	---	17.92	17.87	17.88	---
VHT20	3	5200	23.59	23.65	23.30	---	17.91	17.89	17.87	---
VHT20	3	5240	23.25	23.59	23.65	---	17.95	17.89	17.86	---
VHT40	3	5190	46.38	46.96	45.57	---	36.92	36.86	36.86	---
VHT40	3	5230	47.19	46.03	45.57	---	36.76	36.84	36.74	---
VHT80	3	5210	86.49	85.33	86.49	---	76.36	76.48	76.44	---

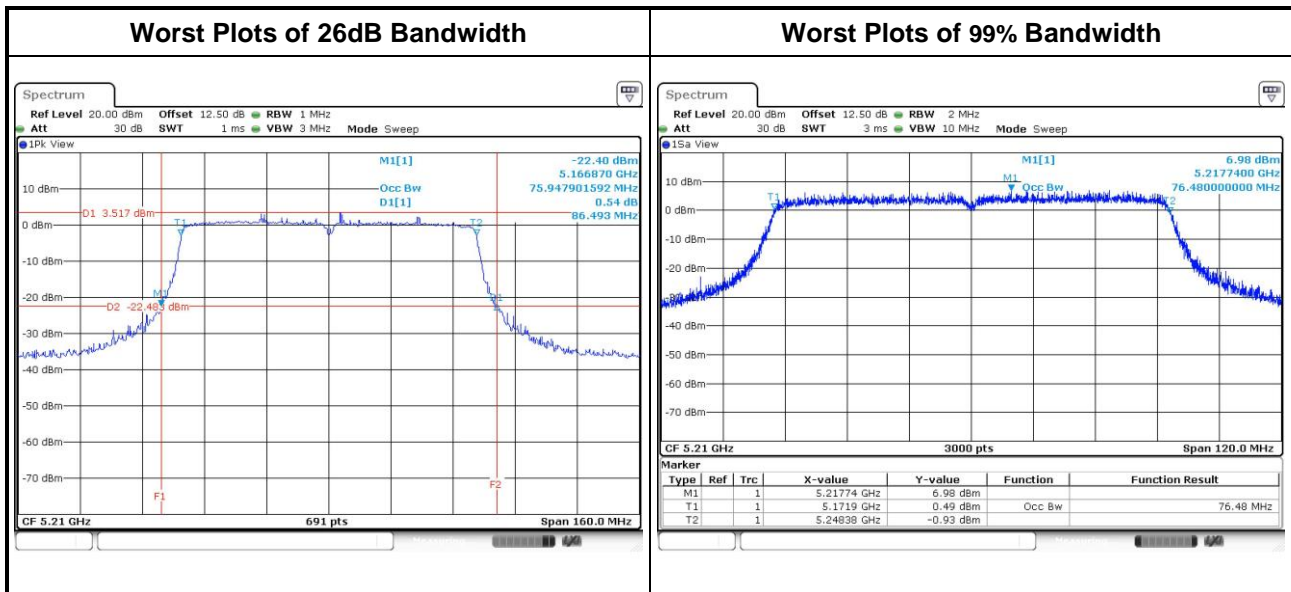

For Frequency band 5725-5850 MHz											
Emission Bandwidth											
Mode	N _{TX}	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	3	5745	16.79	16.78	16.72	---	16.29	16.29	16.35	---	0.5
11a	3	5785	17.75	17.56	17.17	---	16.29	16.29	16.29	---	0.5
11a	3	5825	16.85	16.83	16.73	---	16.35	16.35	16.35	---	0.5
VHT20	3	5745	17.91	17.91	17.86	---	17.57	17.57	17.57	---	0.5
VHT20	3	5785	19.63	18.85	18.58	---	17.57	17.57	17.57	---	0.5
VHT20	3	5825	17.99	18.01	18.00	---	17.57	17.57	17.57	---	0.5
VHT40	3	5755	37.08	37.16	36.82	---	36.41	36.29	35.83	---	0.5
VHT40	3	5795	37.00	37.00	36.94	---	36.41	36.06	35.83	---	0.5
VHT80	3	5775	76.56	76.56	76.28	---	76.06	75.83	75.83	---	0.5

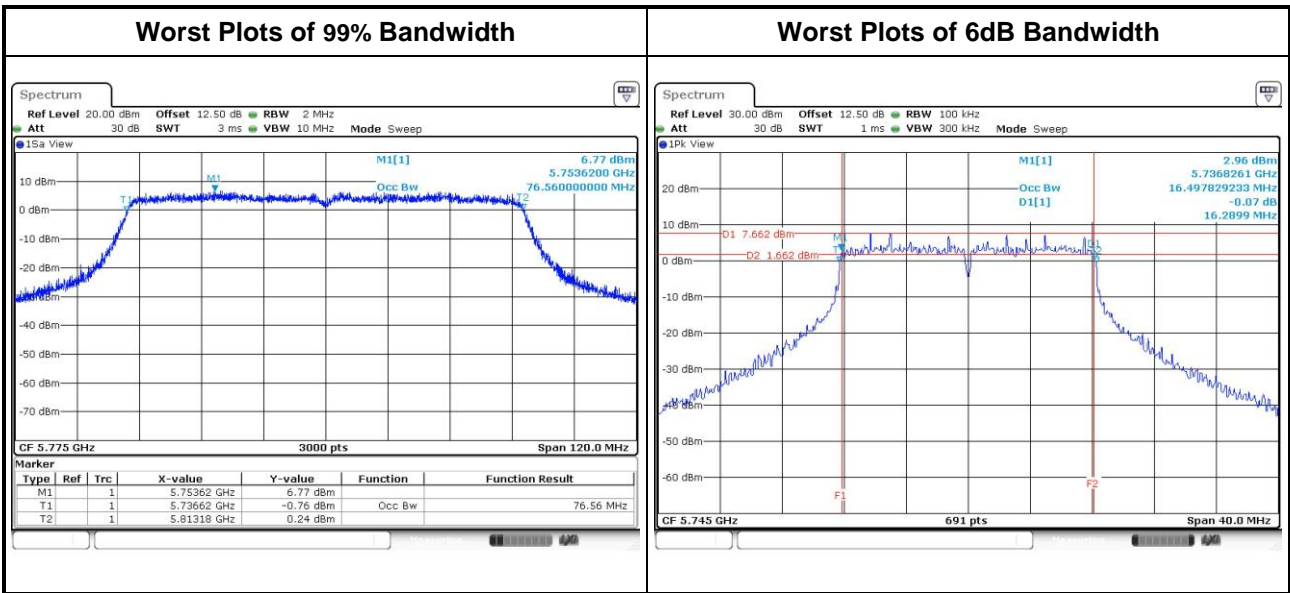

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz	
Operating Mode	Limit
<input checked="" type="checkbox"/> Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input type="checkbox"/> Indoor access point	Conducted Power: 1 W
<input type="checkbox"/> Fixed point-to-point access points	Conducted Power: 1 W
<input type="checkbox"/> Mobile and portable client devices	Conducted Power: 250 mW


Frequency Band (MHz)	Limit
<input type="checkbox"/> 5250 ~ 5350	250mW or 11dBm+10 log B
<input type="checkbox"/> 5470 ~ 5725	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- Method PM-G (Measurement using a gated RF average power meter)**
 - Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Conducted Output Power

For Frequency band 5150-5250 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	3	5180	13.78	13.65	12.99	---	66.959	18.26	29.00
11a	3	5200	13.96	13.42	12.66	---	65.317	18.15	29.00
11a	3	5240	13.66	13.38	12.76	---	63.884	18.05	29.00
HT20	3	5180	13.62	13.42	12.53	---	62.899	17.99	29.00
HT20	3	5200	13.72	13.28	12.79	---	63.843	18.05	29.00
HT20	3	5240	13.58	13.5	12.38	---	62.489	17.96	29.00
HT40	3	5190	13.61	13.26	12.34	---	61.285	17.87	29.00
HT40	3	5230	13.59	13.35	12.24	---	61.233	17.87	29.00
VHT20	3	5180	13.67	13.48	12.58	---	63.679	18.04	29.00
VHT20	3	5200	13.75	13.32	12.84	---	64.423	18.09	29.00
VHT20	3	5240	13.63	13.54	12.45	---	63.241	18.01	29.00
VHT40	3	5190	13.68	13.34	12.36	---	62.131	17.93	29.00
VHT40	3	5230	13.65	13.39	12.28	---	61.906	17.92	29.00
VHT80	3	5210	11.40	11.83	10.42	---	40.060	16.03	29.00

Note: Antenna gain is 7dBi > 6dBi , conducted power limit is reduced to 30 dBm – (7dBi – 6dBi) = 29 dBm

For Frequency band 5725-5850 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	3	5745	19.46	19.68	18.28	---	248.502	23.95	29.00
11a	3	5785	23.86	23.57	23.19	---	679.179	28.32	29.00
11a	3	5825	21.68	21.67	20.67	---	410.805	26.14	29.00
HT20	3	5745	17.39	19.58	18.39	---	214.634	23.32	29.00
HT20	3	5785	23.85	23.57	23.24	---	681.034	28.33	29.00
HT20	3	5825	21.53	21.43	20.66	---	397.641	25.99	29.00
HT40	3	5755	14.88	14.73	13.35	---	82.105	19.14	29.00
HT40	3	5795	20.72	20.92	19.99	---	341.397	25.33	29.00
VHT20	3	5745	17.45	19.63	18.43	---	217.086	23.37	29.00
VHT20	3	5785	23.91	23.61	23.29	---	688.956	28.38	29.00
VHT20	3	5825	21.57	21.47	20.72	---	401.862	26.04	29.00
VHT40	3	5755	14.92	14.79	13.43	---	83.205	19.20	29.00
VHT40	3	5795	20.79	20.96	20.05	---	345.846	25.39	29.00
VHT80	3	5775	11.56	11.63	10.55	---	40.227	16.05	29.00

Note: Antenna gain is 7dBi > 6dBi , conducted power limit is reduced to 30 dBm – (7dBi – 6dBi) = 29 dBm

3.3.5 Test Result of maximum e.i.r.p. at any elevation angle above 30 degrees

This item is for 5150 ~ 5250 MHz only.

Mode	N _{TX}	Freq. (MHz)	Conducted Power of each antenna port (dBm)		Maximum Gain above 30° (dBi)	E.I.R.P Power above 30° (dBm)	Total E.I.R.P above 30° (dBm)	E.I.R.P Limit (dBm)		
			Chain 0	Chain 1						
11a	3	5180	Chain 0	13.78	-3.3	10.48	20.59	21		
			Chain 1	13.65					6.02	19.67
			Chain 2	12.99					-2.72	10.27
	3	5200	Chain 0	13.96	-3.3	10.66	20.39	21		
			Chain 1	13.42					6.02	19.44
			Chain 2	12.66					-2.72	9.94
	3	5240	Chain 0	13.66	-3.3	10.36	20.34	21		
			Chain 1	13.38					6.02	19.4
			Chain 2	12.76					-2.72	10.04
HT20	3	5180	Chain 0	13.62	-3.3	10.32	20.34	21		
			Chain 1	13.42					6.02	19.44
			Chain 2	12.53					-2.72	9.81
	3	5200	Chain 0	13.72	-3.3	10.42	20.26	21		
			Chain 1	13.28					6.02	19.3
			Chain 2	12.79					-2.72	10.07
	3	5240	Chain 0	13.58	-3.3	10.28	20.39	21		
			Chain 1	13.5					6.02	19.52
			Chain 2	12.38					-2.72	9.66
HT40	3	5190	Chain 0	13.61	-3.3	10.31	20.20	21		
			Chain 1	13.26					6.02	19.28
			Chain 2	12.34					-2.72	9.62
	3	5230	Chain 0	13.59	-3.3	10.29	20.26	21		
			Chain 1	13.35					6.02	19.37
			Chain 2	12.24					-2.72	9.52
VHT20	3	5180	Chain 0	13.67	-3.3	10.37	20.40	21		
			Chain 1	13.48					6.02	19.5
			Chain 2	12.58					-2.72	9.86
	3	5200	Chain 0	13.75	-3.3	10.45	20.30	21		
			Chain 1	13.32					6.02	19.34
			Chain 2	12.84					-2.72	10.12
	3	5240	Chain 0	13.63	-3.3	10.33	20.44	21		
			Chain 1	13.54					6.02	19.56
			Chain 2	12.45					-2.72	9.73

Mode	N _{TX}	Freq. (MHz)	Measured value of each antenna port (dBm)		Gain above 30° (dB)	E.I.R.P Power above 30° (dBm)	Total E.I.R.P above 30° (dBm)	E.I.R.P Limit (dBm)		
			Chain 0	Chain 1						
VHT40	3	5190	Chain 0	13.68	-3.3	10.38	20.27	21		
			Chain 1	13.34					6.02	19.36
			Chain 2	12.36					-2.72	9.64
	3	5230	Chain 0	13.65	-3.3	10.35	20.30	21		
			Chain 1	13.39					6.02	19.41
			Chain 2	12.28					-2.72	9.56
VHT80	3	5210	Chain 0	11.40	-3.3	8.1	18.65	21		
			Chain 1	11.83					6.02	17.85
			Chain 2	10.42					-2.72	7.7

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
<input checked="" type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
<input type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input type="checkbox"/>	5470 ~ 5725	11 dBm / MHz
<input checked="" type="checkbox"/>	5725 ~ 5850	30 dBm / 500 kHz

3.4.2 Test Procedures


For 5150 ~ 5250 MHz

- Method SA-1 (11a / 11ac VHT20)
 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
 2. Trace average 100 traces.
 3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative (11ac VHT40 / VHT80)
 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
 2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
 3. Perform a single sweep.
 4. Use the peak marker function to determine the maximum amplitude level.
 5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725 ~ 5850 MHz

- Method SA-1 (11a / 11ac VHT20)
 1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
 2. Trace average 100 traces.
 3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative (11ac VHT40 / VHT80)
 1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
 2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
 3. Perform a single sweep.
 4. Use the peak marker function to determine the maximum amplitude level.
 5. Add $10 \log(1/x)$, where x is the duty cycle.

3.4.3 Test Setup




3.4.4 Test Result of Peak Power Spectral Density

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	3	5180	4.63	0.00	4.63	11.23
11a	3	5200	4.92	0.00	4.92	11.23
11a	3	5240	4.40	0.00	4.40	11.23
VHT20	3	5180	4.40	0.00	4.40	11.23
VHT20	3	5200	4.22	0.00	4.22	11.23
VHT20	3	5240	4.00	0.00	4.00	11.23
VHT40	3	5190	0.49	0.19	0.68	11.23
VHT40	3	5230	0.26	0.19	0.45	11.23
VHT80	3	5210	-5.44	0.56	-4.88	11.23

Note:


1. D.F is duty factor.
2. Test results are bin-by-bin summing measured value of each TX port.
3. Directional gain = $7 + 10 \cdot \log(3/1) = 11.77 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $17 \text{ dBm} - (11.77 \text{ dBi} - 6 \text{ dBi}) = 11.23 \text{ dBm}$.

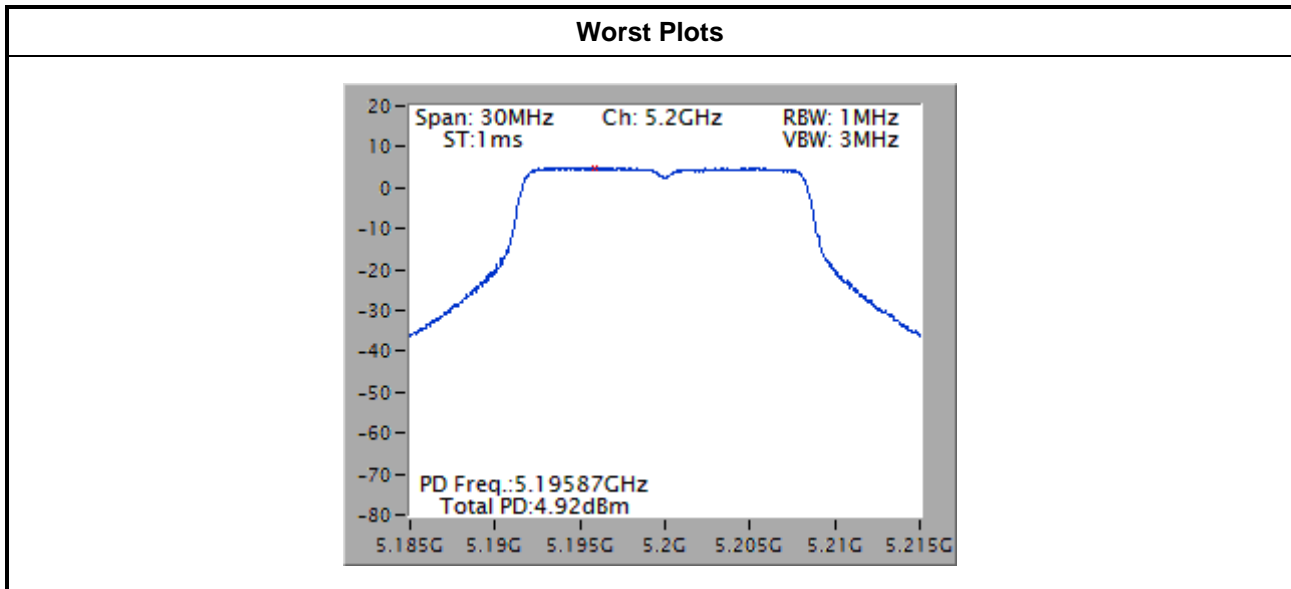

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
11a	3	5745	7.98	0.00	7.98	24.23
11a	3	5785	12.99	0.00	12.99	24.23
11a	3	5825	10.58	0.00	10.58	24.23
VHT20	3	5745	7.48	0.00	7.48	24.23
VHT20	3	5785	12.60	0.00	12.60	24.23
VHT20	3	5825	10.32	0.00	10.32	24.23
VHT40	3	5755	-0.21	0.19	-0.02	24.23
VHT40	3	5795	6.22	0.19	6.41	24.23
VHT80	3	5775	-6.88	0.56	-6.32	24.23

Note:

1. D.F is duty factor.
2. Test results are bin-by-bin summing measured value of each TX port.
3. Directional gain = $7 + 10 \cdot \log(3/1) = 11.77 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $30 \text{ dBm} - (11.77 \text{ dBi} - 6 \text{ dBi}) = 24.23 \text{ dBm}$.

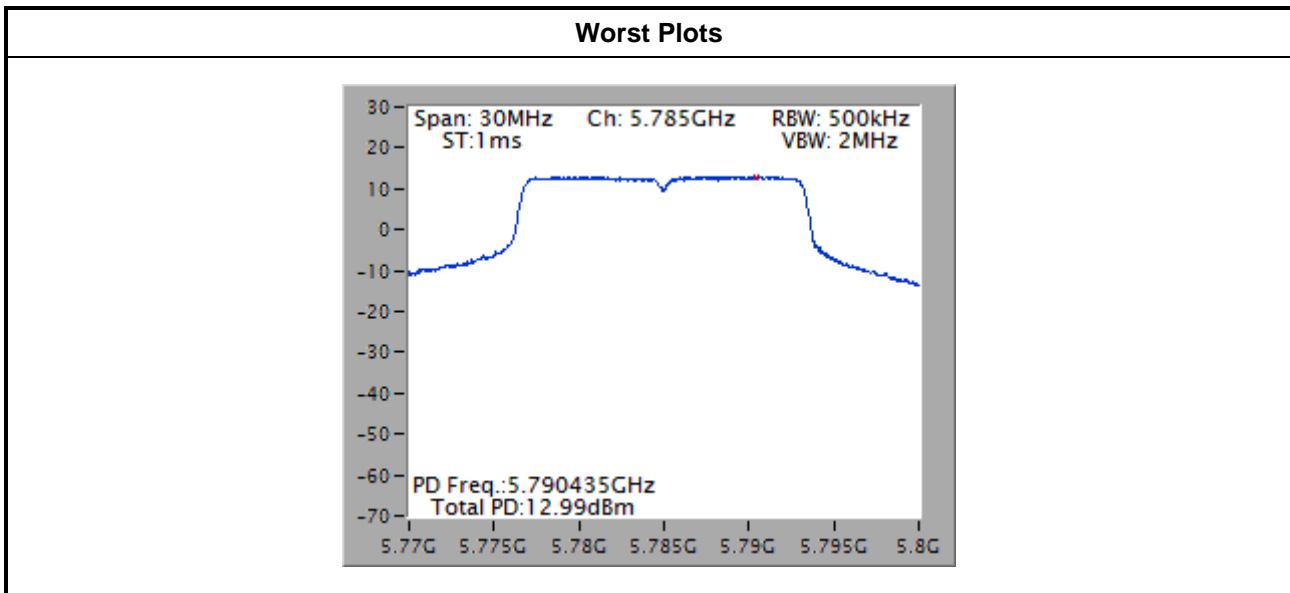

3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

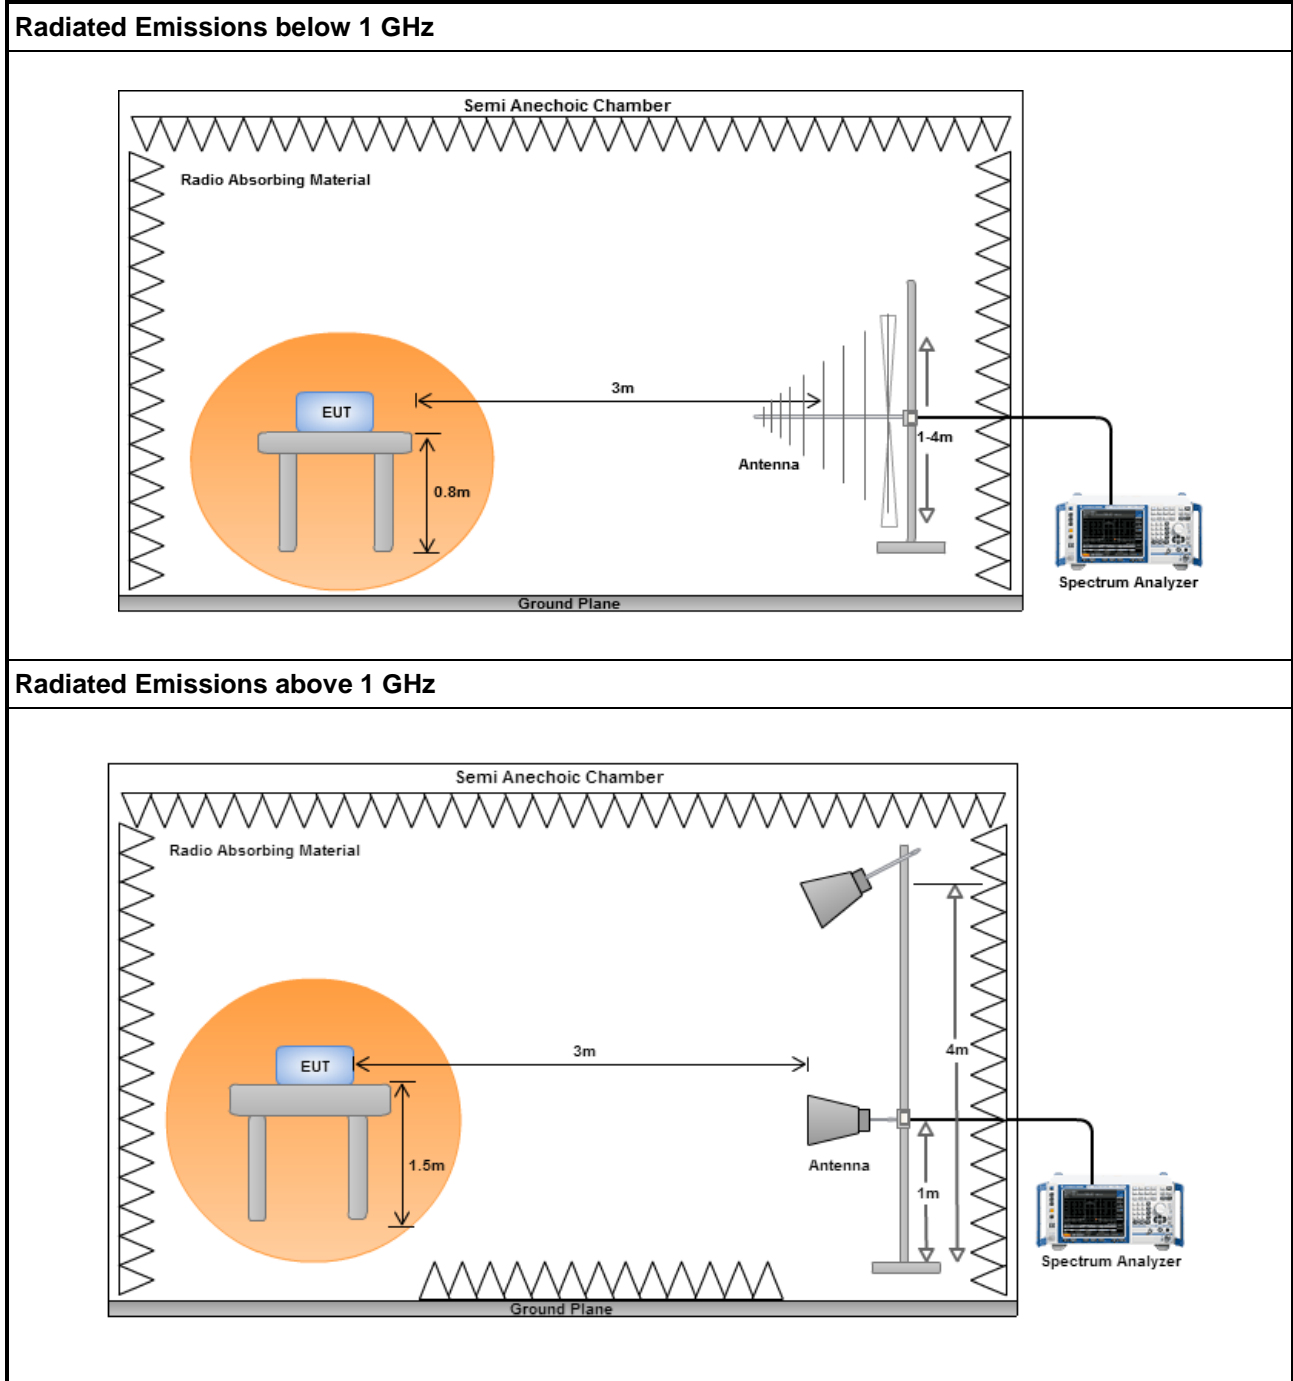

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

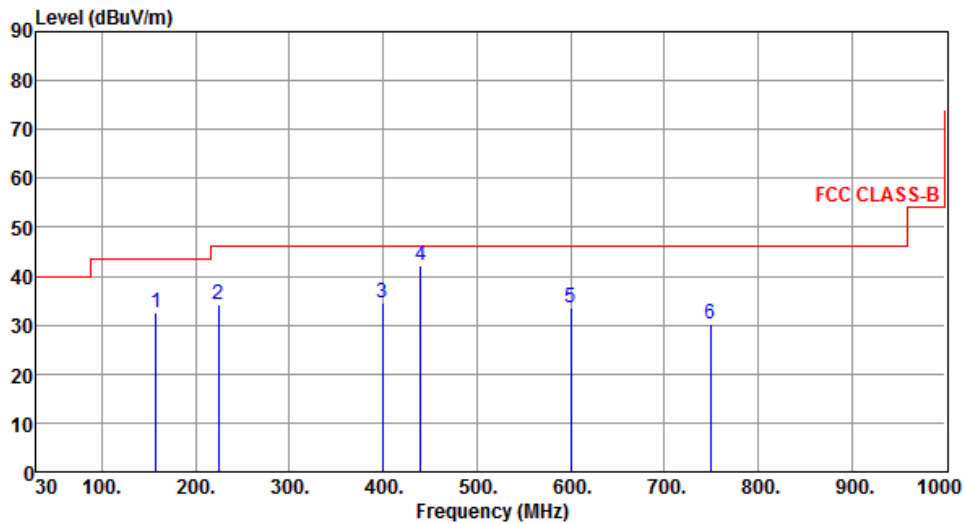

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	158.04	32.39	43.50	-11.11	49.10	-16.71	Peak	---	---
2	224.00	34.30	46.00	-11.70	52.92	-18.62	Peak	---	---
3	399.57	34.60	46.00	-11.40	48.16	-13.56	Peak	---	---
4	440.31	42.22	46.00	-3.78	54.86	-12.64	Peak	---	---
5	600.36	33.68	46.00	-12.32	43.24	-9.56	Peak	---	---
6	749.74	30.14	46.00	-15.86	37.24	-7.10	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

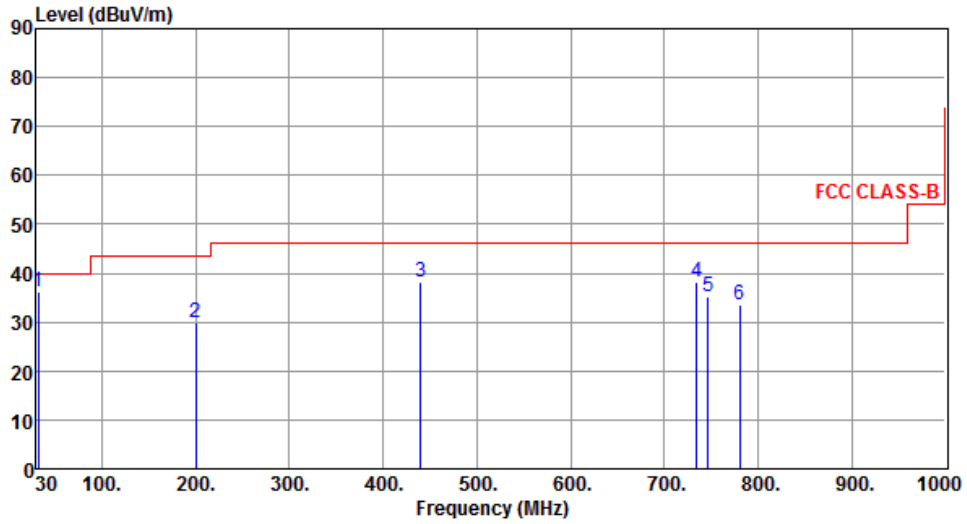

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	31.94	36.25	40.00	-3.75	53.59	-17.34	QP	---	---
2	199.75	29.86	43.50	-13.64	48.94	-19.08	Peak	---	---
3	440.31	38.12	46.00	-7.88	50.76	-12.64	Peak	---	---
4	734.22	38.22	46.00	-7.78	45.61	-7.39	Peak	---	---
5	746.83	35.24	46.00	-10.76	42.40	-7.16	Peak	---	---
6	780.78	33.70	46.00	-12.30	40.55	-6.85	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

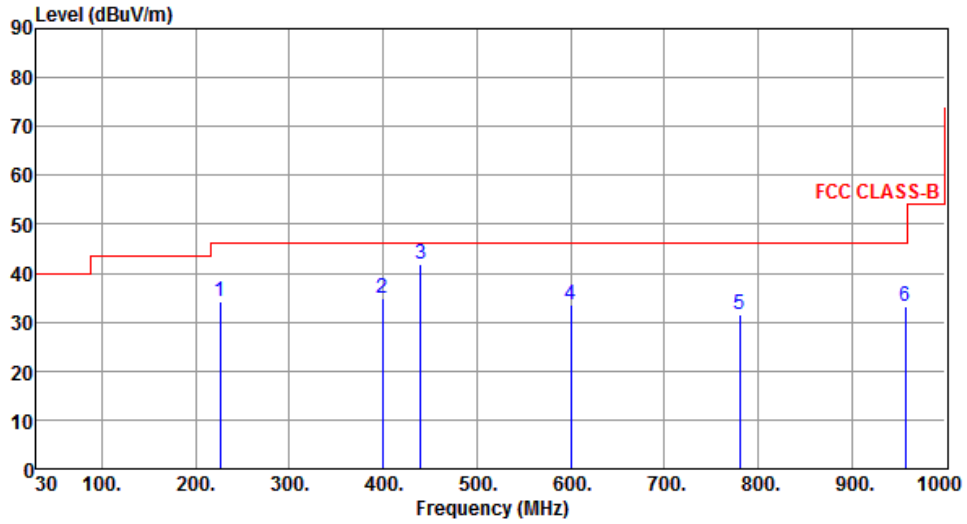

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	225.94	34.16	46.00	-11.84	52.58	-18.42	Peak	---	---
2	399.57	34.86	46.00	-11.14	48.42	-13.56	Peak	---	---
3	440.31	41.82	46.00	-4.18	54.46	-12.64	Peak	---	---
4	600.36	33.51	46.00	-12.49	43.07	-9.56	Peak	---	---
5	780.78	31.61	46.00	-14.39	38.46	-6.85	Peak	---	---
6	957.32	33.23	46.00	-12.77	37.93	-4.70	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

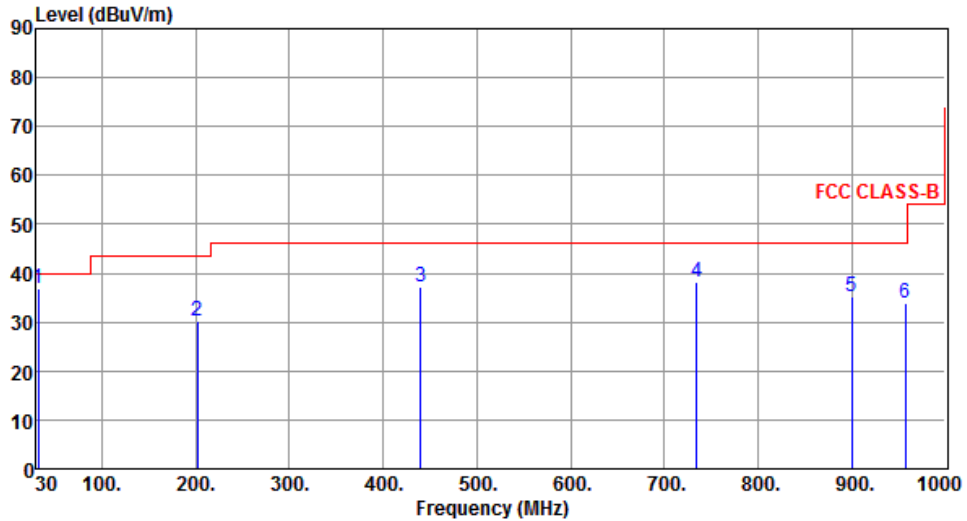

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	31.94	36.87	40.00	-3.13	54.21	-17.34	QP	---	---
2	201.69	30.34	43.50	-13.16	49.40	-19.06	Peak	---	---
3	440.31	37.26	46.00	-8.74	49.90	-12.64	Peak	---	---
4	734.22	38.10	46.00	-7.90	45.49	-7.39	Peak	---	---
5	900.09	35.09	46.00	-10.91	40.42	-5.33	Peak	---	---
6	957.32	33.85	46.00	-12.15	38.55	-4.70	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

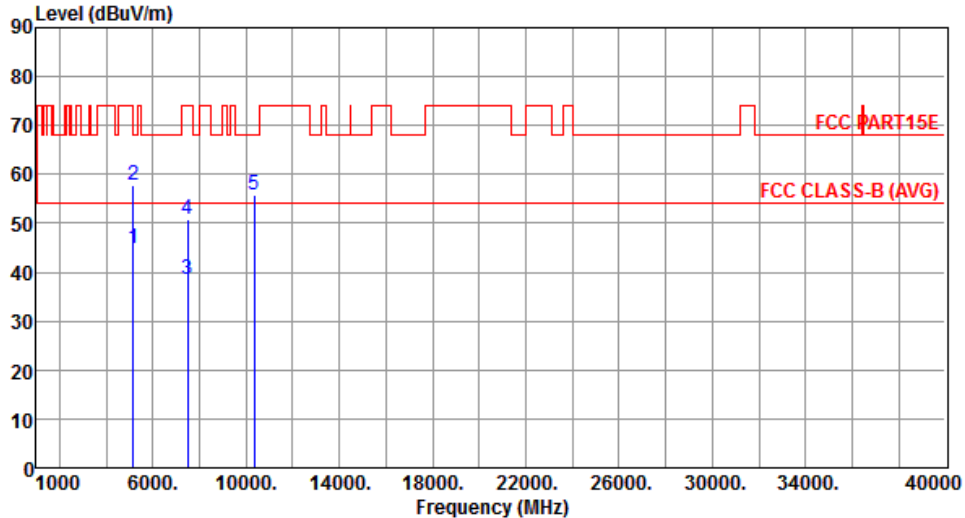Modulation	11a	Test Freq. (MHz)	5180						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.91	54.00	-9.09	39.45	5.46	Average	---	---
2	5150.00	57.93	74.00	-16.07	52.47	5.46	Peak	---	---
3	7500.00	38.40	54.00	-15.60	28.43	9.97	Average	---	---
4	7500.00	50.72	74.00	-23.28	40.75	9.97	Peak	---	---
5	10360.00	55.93	68.20	-12.27	40.52	15.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

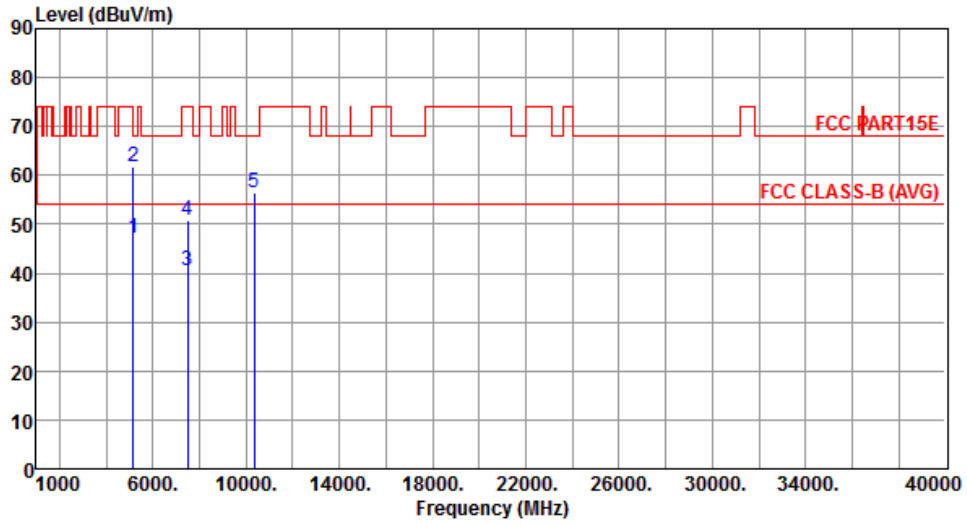


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.19	54.00	-6.81	41.73	5.46	Average	---	---
2	5150.00	61.87	74.00	-12.13	56.41	5.46	Peak	---	---
3	7500.00	40.37	54.00	-13.63	30.40	9.97	Average	---	---
4	7500.00	50.95	74.00	-23.05	40.98	9.97	Peak	---	---
5	10360.00	56.35	68.20	-11.85	40.94	15.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

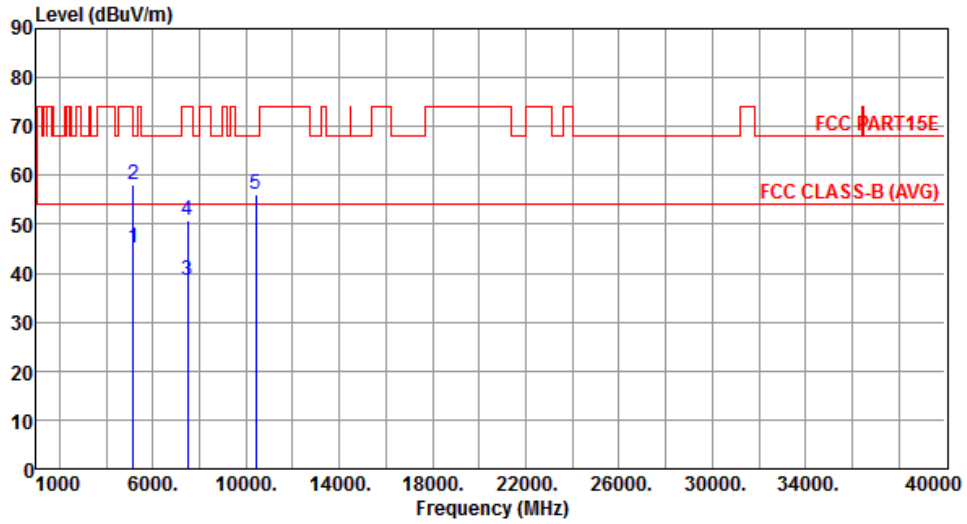


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.14	54.00	-8.86	39.68	5.46	Average	---	---
2	5150.00	57.99	74.00	-16.01	52.53	5.46	Peak	---	---
3	7500.00	38.58	54.00	-15.42	28.61	9.97	Average	---	---
4	7500.00	50.82	74.00	-23.18	40.85	9.97	Peak	---	---
5	10400.00	55.98	68.20	-12.22	40.43	15.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

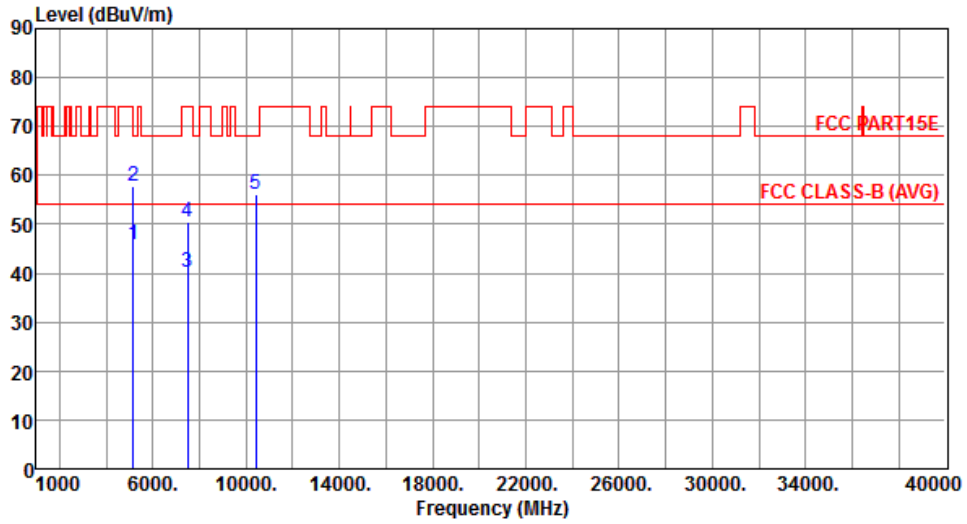


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.67	54.00	-8.33	40.21	5.46	Average	---	---
2	5150.00	57.67	74.00	-16.33	52.21	5.46	Peak	---	---
3	7500.00	40.25	54.00	-13.75	30.28	9.97	Average	---	---
4	7500.00	50.59	74.00	-23.41	40.62	9.97	Peak	---	---
5	10400.00	56.27	68.20	-11.93	40.72	15.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

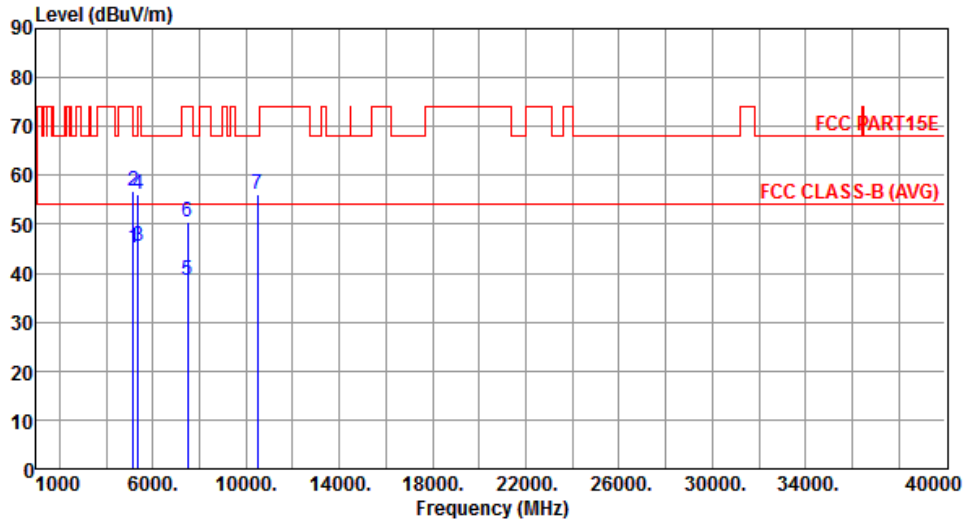


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.32	54.00	-8.68	39.86	5.46	Average	---	---
2	5150.00	56.92	74.00	-17.08	51.46	5.46	Peak	---	---
3	5350.00	45.43	54.00	-8.57	39.87	5.56	Average	---	---
4	5350.00	56.00	74.00	-18.00	50.44	5.56	Peak	---	---
5	7500.00	38.50	54.00	-15.50	28.53	9.97	Average	---	---
6	7500.00	50.46	74.00	-23.54	40.49	9.97	Peak	---	---
7	10480.00	56.16	68.20	-12.04	40.30	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

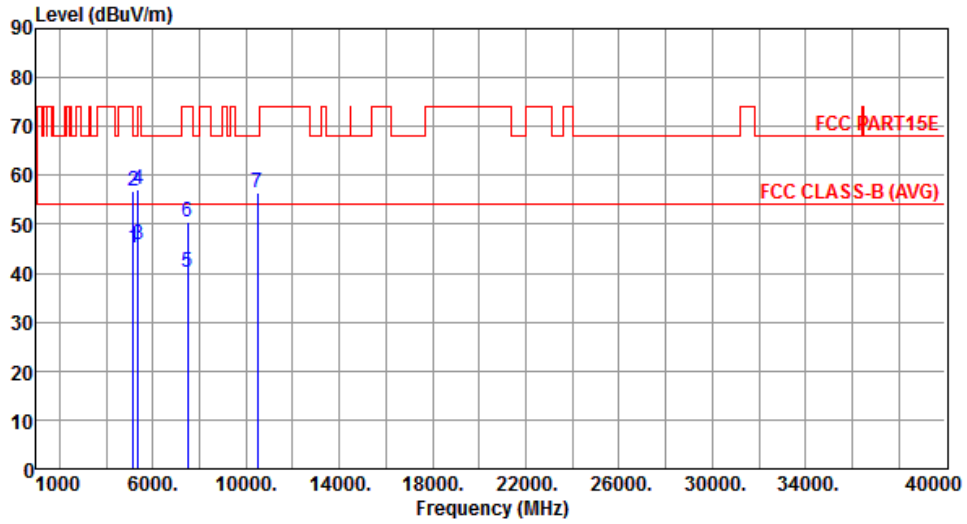


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.11	54.00	-8.89	39.65	5.46	Average	---	---
2	5150.00	56.88	74.00	-17.12	51.42	5.46	Peak	---	---
3	5350.00	45.99	54.00	-8.01	40.43	5.56	Average	---	---
4	5350.00	57.25	74.00	-16.75	51.69	5.56	Peak	---	---
5	7500.00	40.28	54.00	-13.72	30.31	9.97	Average	---	---
6	7500.00	50.53	74.00	-23.47	40.56	9.97	Peak	---	---
7	10480.00	56.53	68.20	-11.67	40.67	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

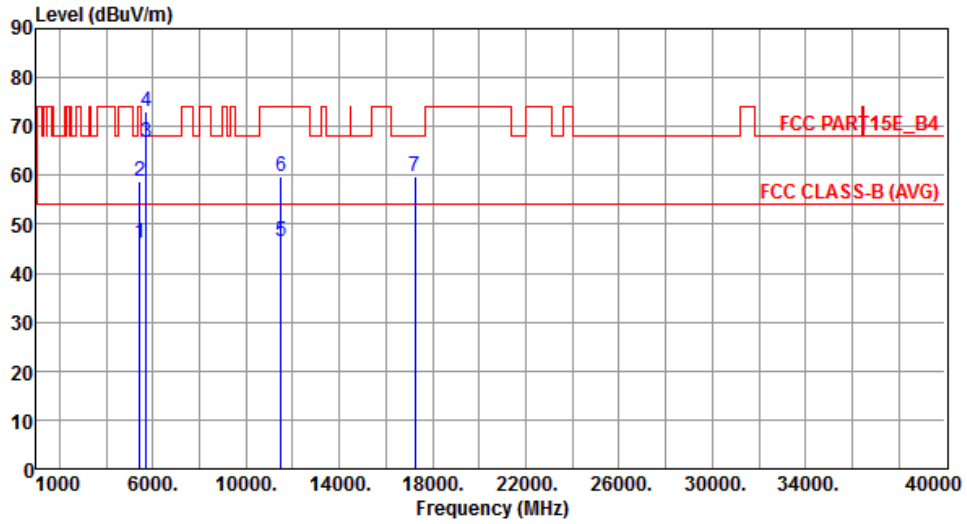


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	46.14	54.00	-7.86	40.55	5.59	Average	---	---
2	5430.00	58.64	74.00	-15.36	53.05	5.59	Peak	---	---
3	5715.00	66.84	68.20	-1.36	61.19	5.65	Peak	---	---
4	5725.00	73.20	78.20	-5.00	67.56	5.64	Peak	---	---
5	11490.00	46.48	54.00	-7.52	30.55	15.93	Average	---	---
6	11490.00	59.78	74.00	-14.22	43.85	15.93	Peak	---	---
7	17235.00	59.91	68.20	-8.29	40.86	19.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

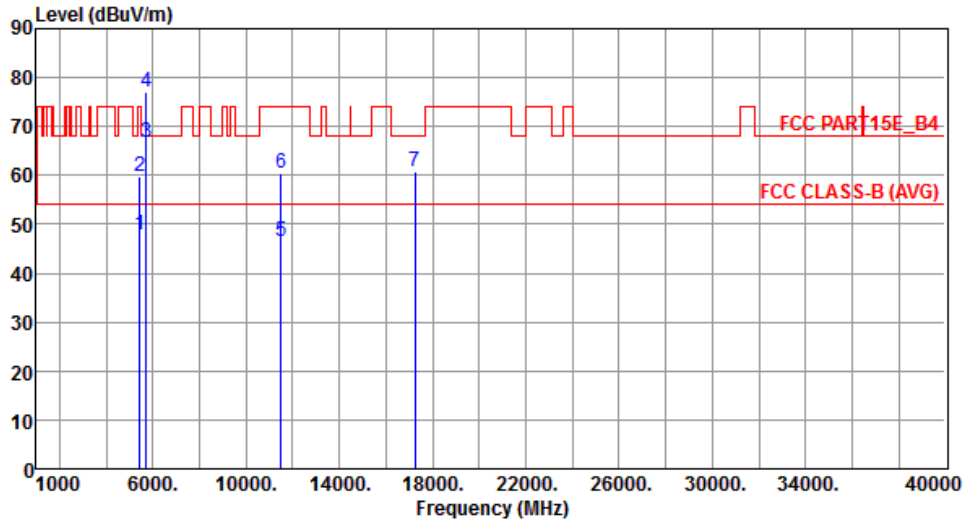


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	47.80	54.00	-6.20	42.21	5.59	Average	---	---
2	5430.00	59.77	74.00	-14.23	54.18	5.59	Peak	---	---
3	5715.00	66.90	68.20	-1.30	61.25	5.65	Peak	---	---
4	5725.00	77.16	78.20	-1.04	71.52	5.64	Peak	---	---
5	11490.00	46.61	54.00	-7.39	30.68	15.93	Average	---	---
6	11490.00	60.52	74.00	-13.48	44.59	15.93	Peak	---	---
7	17235.00	60.61	68.20	-7.59	41.56	19.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

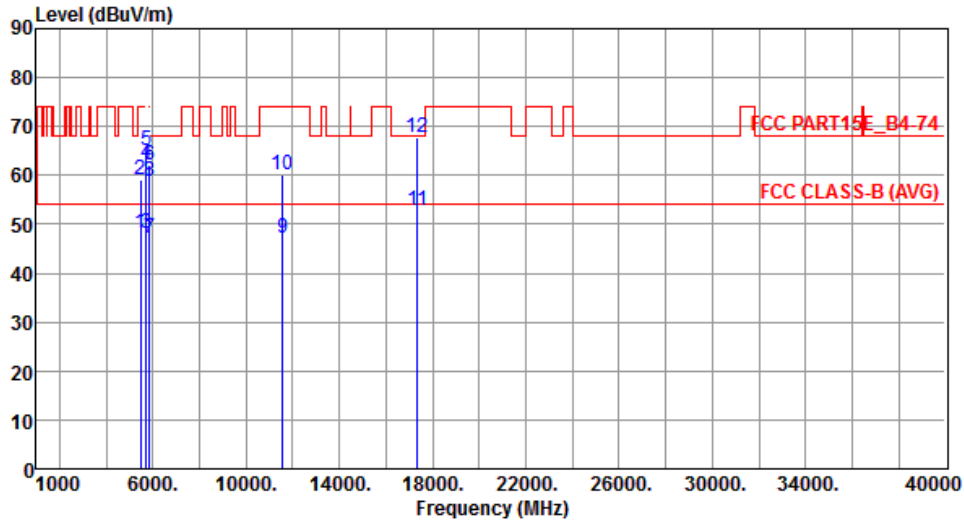


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.12	54.00	-5.88	42.52	5.60	Average	---	---
2	5460.00	59.16	74.00	-14.84	53.56	5.60	Peak	---	---
3	5715.00	48.19	54.00	-5.81	42.54	5.65	Average	---	---
4	5715.00	62.39	74.00	-11.61	56.74	5.65	Peak	---	---
5	5725.00	65.20	78.20	-13.00	59.56	5.64	Peak	---	---
6	5850.00	62.04	78.20	-16.16	56.29	5.75	Peak	---	---
7	5860.00	47.13	54.00	-6.87	41.37	5.76	Average	---	---
8	5860.00	58.85	74.00	-15.15	53.09	5.76	Peak	---	---
9	11570.00	47.15	54.00	-6.85	31.38	15.77	Average	---	---
10	11570.00	60.26	74.00	-13.74	44.49	15.77	Peak	---	---
11	17355.00	52.77	54.00	-1.23	33.04	19.73	Average	---	---
12	17355.00	67.84	74.00	-6.16	48.11	19.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

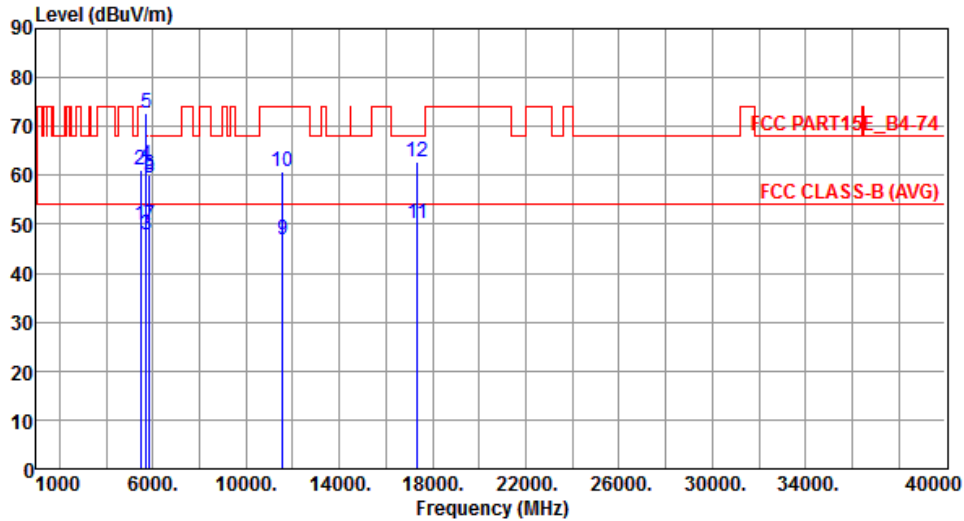


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.86	54.00	-4.14	44.26	5.60	Average	---	---
2	5460.00	61.17	74.00	-12.83	55.57	5.60	Peak	---	---
3	5715.00	47.75	54.00	-6.25	42.10	5.65	Average	---	---
4	5715.00	62.21	74.00	-11.79	56.56	5.65	Peak	---	---
5	5725.00	72.58	78.20	-5.62	66.94	5.64	Peak	---	---
6	5850.00	60.11	78.20	-18.09	54.36	5.75	Peak	---	---
7	5860.00	49.88	54.00	-4.12	44.12	5.76	Average	---	---
8	5860.00	59.58	74.00	-14.42	53.82	5.76	Peak	---	---
9	11570.00	46.79	54.00	-7.21	31.02	15.77	Average	---	---
10	11570.00	60.66	74.00	-13.34	44.89	15.77	Peak	---	---
11	17355.00	50.28	54.00	-3.72	30.55	19.73	Average	---	---
12	17355.00	62.85	74.00	-11.15	43.12	19.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

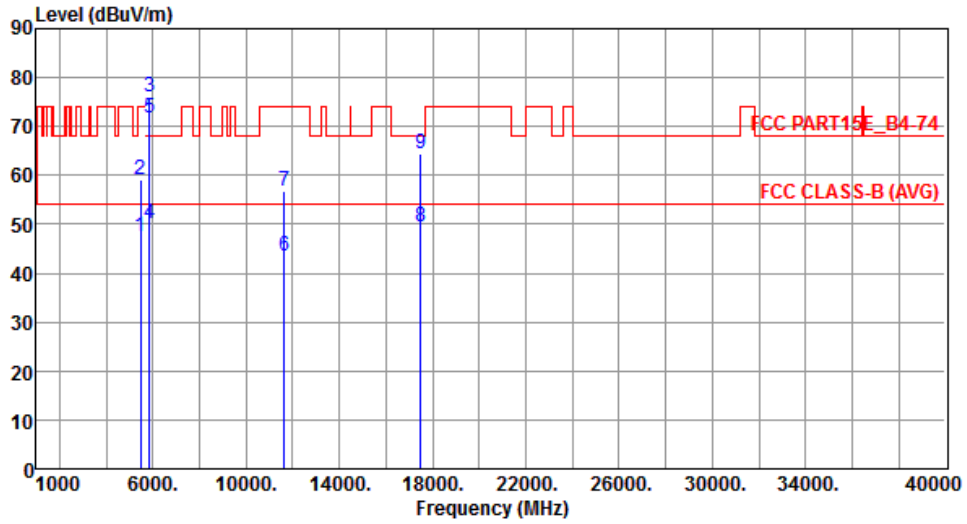


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.44	54.00	-6.56	41.84	5.60	Average	---	---
2	5460.00	58.99	74.00	-15.01	53.39	5.60	Peak	---	---
3	5850.00	76.21	78.20	-1.99	70.46	5.75	Peak	---	---
4	5860.00	50.31	54.00	-3.69	44.55	5.76	Average	---	---
5	5860.00	71.63	74.00	-2.37	65.87	5.76	Peak	---	---
6	11650.00	43.36	54.00	-10.64	27.80	15.56	Average	---	---
7	11650.00	56.67	74.00	-17.33	41.11	15.56	Peak	---	---
8	17475.00	49.60	54.00	-4.40	29.18	20.42	Average	---	---
9	17475.00	64.33	74.00	-9.67	43.91	20.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

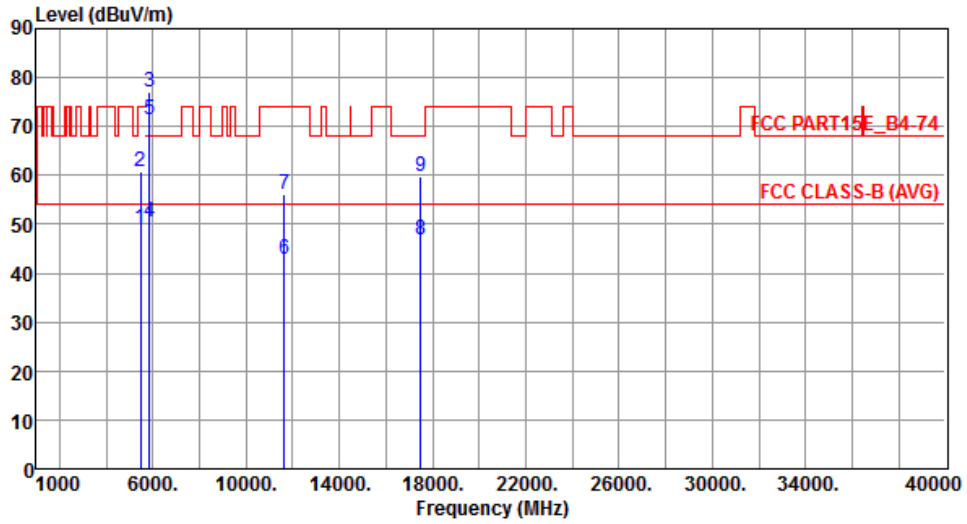


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.19	54.00	-4.81	43.59	5.60	Average	---	---
2	5460.00	60.84	74.00	-13.16	55.24	5.60	Peak	---	---
3	5850.00	76.96	78.20	-1.24	71.21	5.75	Peak	---	---
4	5860.00	50.52	54.00	-3.48	44.76	5.76	Average	---	---
5	5860.00	71.50	74.00	-2.50	65.74	5.76	Peak	---	---
6	11650.00	42.95	54.00	-11.05	27.39	15.56	Average	---	---
7	11650.00	55.99	74.00	-18.01	40.43	15.56	Peak	---	---
8	17475.00	46.71	54.00	-7.29	26.29	20.42	Average	---	---
9	17475.00	59.78	74.00	-14.22	39.36	20.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

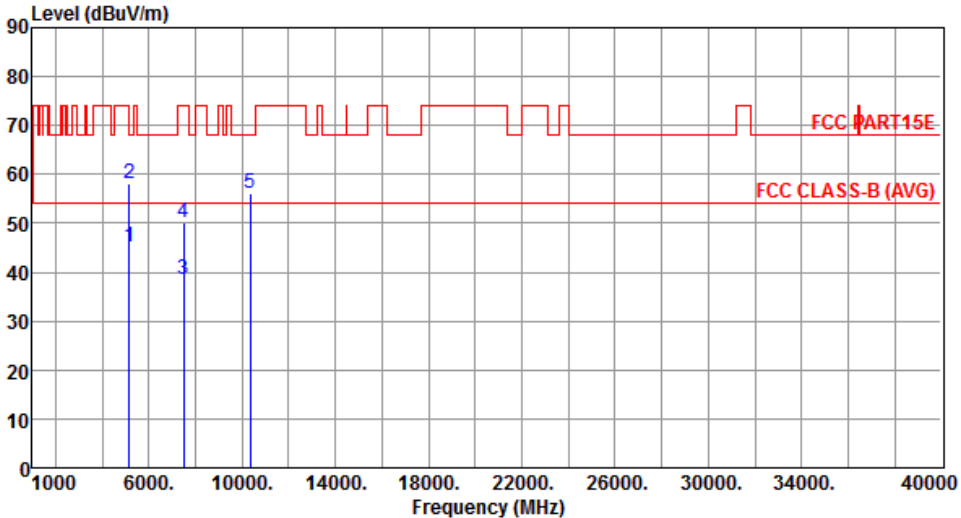Modulation	VHT20	Test Freq. (MHz)	5180						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	45.14	54.00	-8.86	39.68	5.46	Average	---	---
2	5150.00	57.98	74.00	-16.02	52.52	5.46	Peak	---	---
3	7500.00	38.51	54.00	-15.49	28.54	9.97	Average	---	---
4	7500.00	50.28	74.00	-23.72	40.31	9.97	Peak	---	---
5	10360.00	56.05	68.20	-12.15	40.64	15.41	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

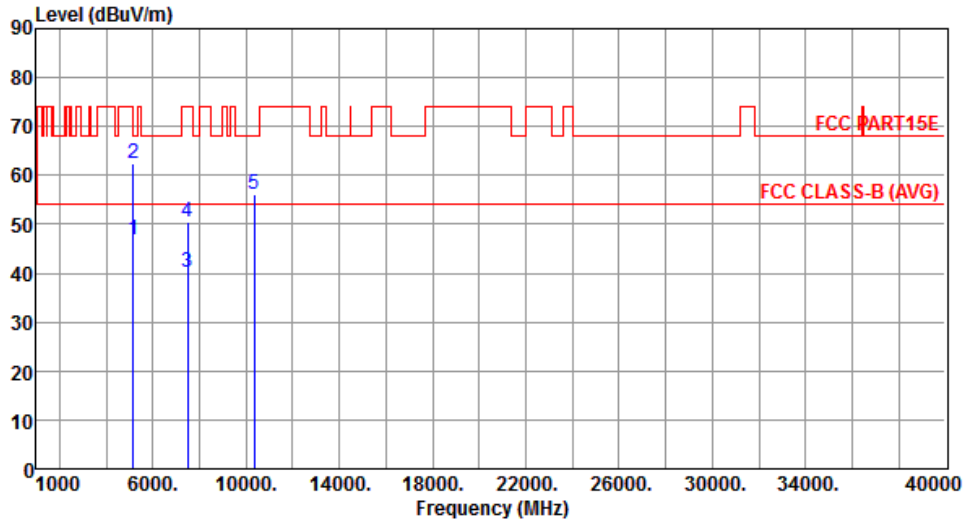


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.99	54.00	-7.01	41.53	5.46	Average	---	---
2	5150.00	62.41	74.00	-11.59	56.95	5.46	Peak	---	---
3	7500.00	40.18	54.00	-13.82	30.21	9.97	Average	---	---
4	7500.00	50.40	74.00	-23.60	40.43	9.97	Peak	---	---
5	10360.00	55.96	68.20	-12.24	40.55	15.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

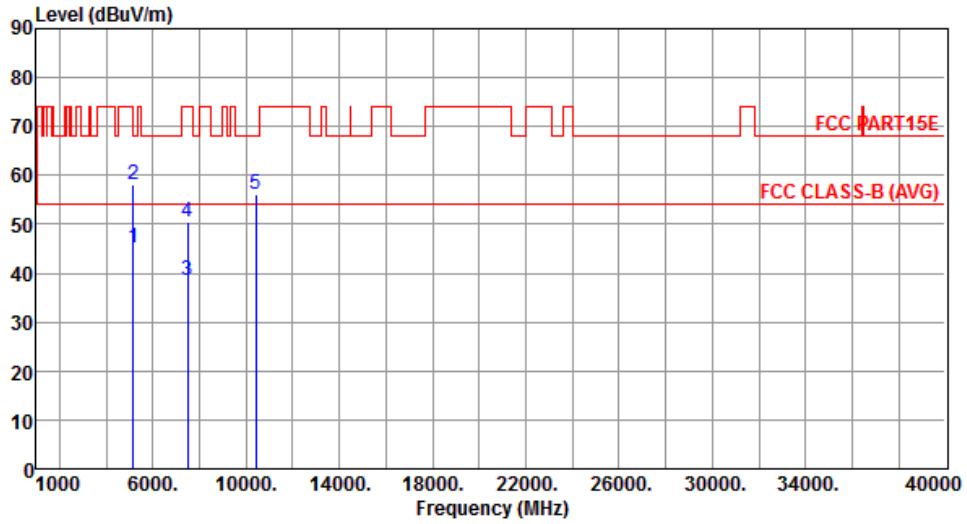


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.00	54.00	-9.00	39.54	5.46	Average	---	---
2	5150.00	58.07	74.00	-15.93	52.61	5.46	Peak	---	---
3	7500.00	38.42	54.00	-15.58	28.45	9.97	Average	---	---
4	7500.00	50.40	74.00	-23.60	40.43	9.97	Peak	---	---
5	10400.00	56.16	68.20	-12.04	40.61	15.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

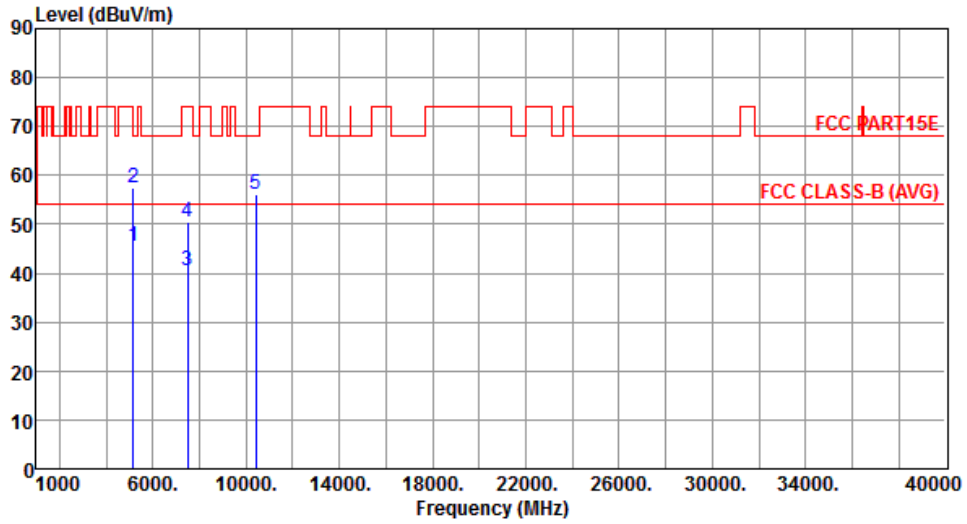


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.61	54.00	-8.39	40.15	5.46	Average	---	---
2	5150.00	57.61	74.00	-16.39	52.15	5.46	Peak	---	---
3	7500.00	40.39	54.00	-13.61	30.42	9.97	Average	---	---
4	7500.00	50.34	74.00	-23.66	40.37	9.97	Peak	---	---
5	10400.00	56.08	68.20	-12.12	40.53	15.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

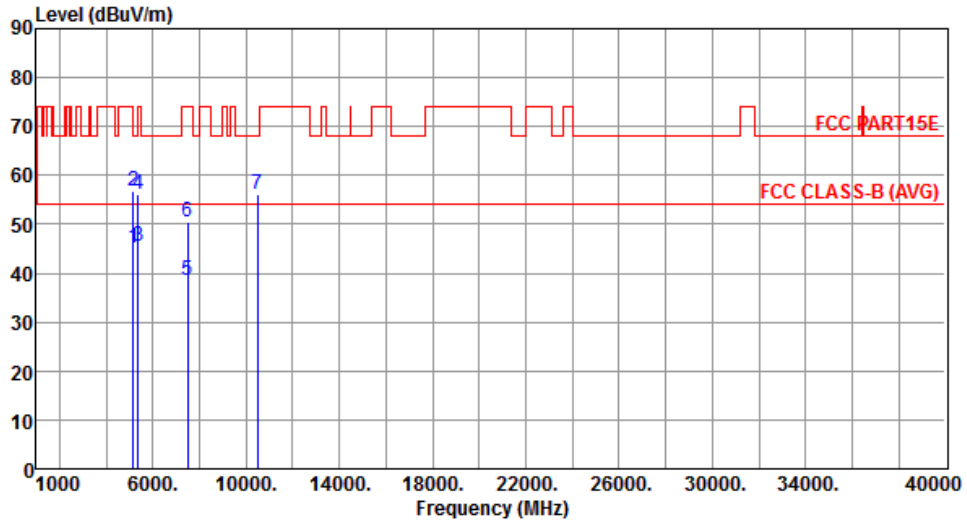


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.00	54.00	-9.00	39.54	5.46	Average	---	---
2	5150.00	56.74	74.00	-17.26	51.28	5.46	Peak	---	---
3	5350.00	45.39	54.00	-8.61	39.83	5.56	Average	---	---
4	5350.00	56.18	74.00	-17.82	50.62	5.56	Peak	---	---
5	7500.00	38.64	54.00	-15.36	28.67	9.97	Average	---	---
6	7500.00	50.32	74.00	-23.68	40.35	9.97	Peak	---	---
7	10480.00	56.27	68.20	-11.93	40.41	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

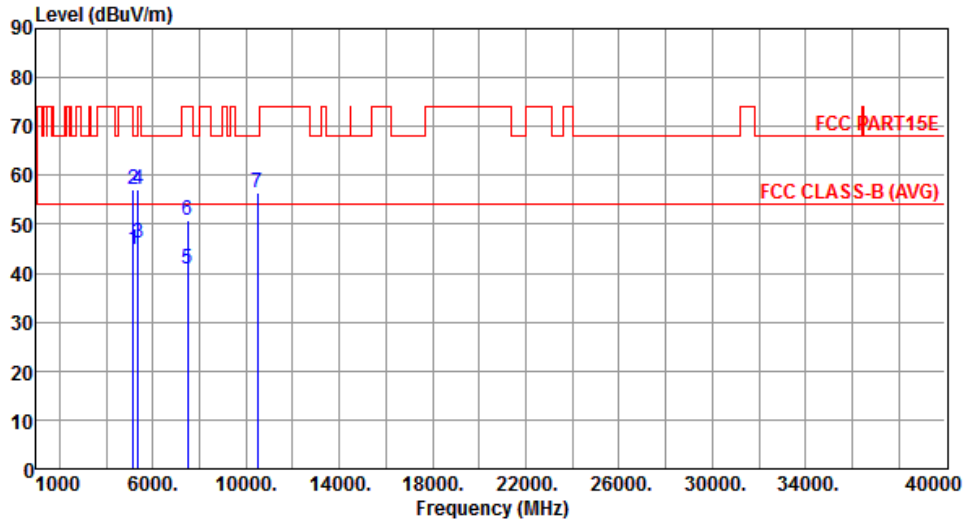


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.91	54.00	-9.09	39.45	5.46	Average	---	---
2	5150.00	56.99	74.00	-17.01	51.53	5.46	Peak	---	---
3	5350.00	46.10	54.00	-7.90	40.54	5.56	Average	---	---
4	5350.00	57.25	74.00	-16.75	51.69	5.56	Peak	---	---
5	7500.00	40.71	54.00	-13.29	30.74	9.97	Average	---	---
6	7500.00	50.82	74.00	-23.18	40.85	9.97	Peak	---	---
7	10480.00	56.31	68.20	-11.89	40.45	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

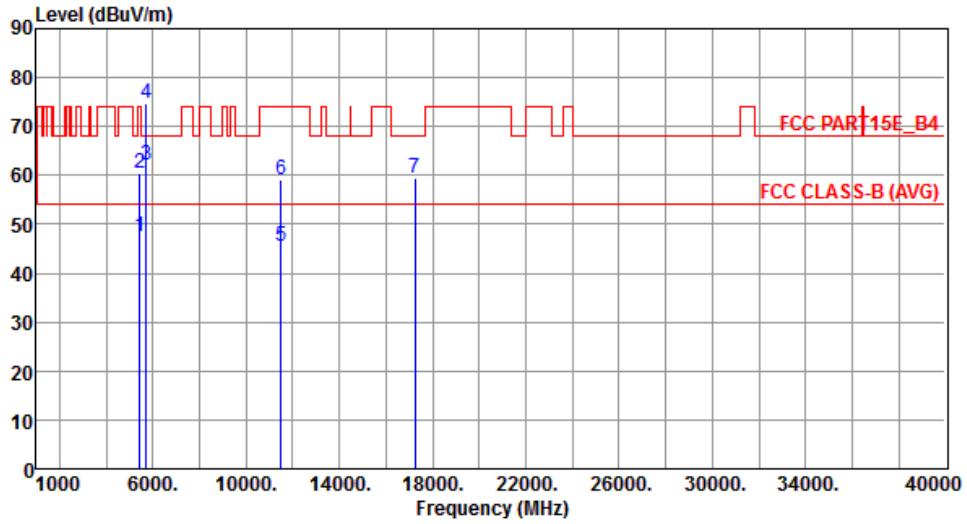


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	47.53	54.00	-6.47	41.94	5.59	Average	---	---
2	5430.00	60.29	74.00	-13.71	54.70	5.59	Peak	---	---
3	5715.00	62.02	68.20	-6.18	56.37	5.65	Peak	---	---
4	5725.00	74.79	78.20	-3.41	69.15	5.64	Peak	---	---
5	11490.00	45.36	54.00	-8.64	29.43	15.93	Average	---	---
6	11490.00	59.18	74.00	-14.82	43.25	15.93	Peak	---	---
7	17235.00	59.60	68.20	-8.60	40.55	19.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

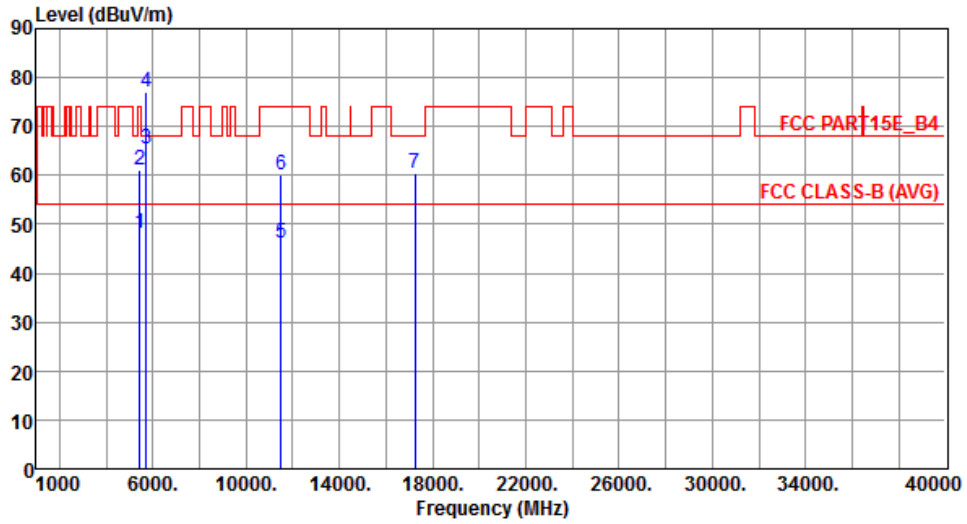


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	48.03	54.00	-5.97	42.44	5.59	Average	---	---
2	5430.00	61.01	74.00	-12.99	55.42	5.59	Peak	---	---
3	5715.00	65.50	68.20	-2.70	59.85	5.65	Peak	---	---
4	5725.00	77.18	78.20	-1.02	71.54	5.64	Peak	---	---
5	11490.00	46.17	54.00	-7.83	30.24	15.93	Average	---	---
6	11490.00	60.09	74.00	-13.91	44.16	15.93	Peak	---	---
7	17235.00	60.32	68.20	-7.88	41.27	19.05	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

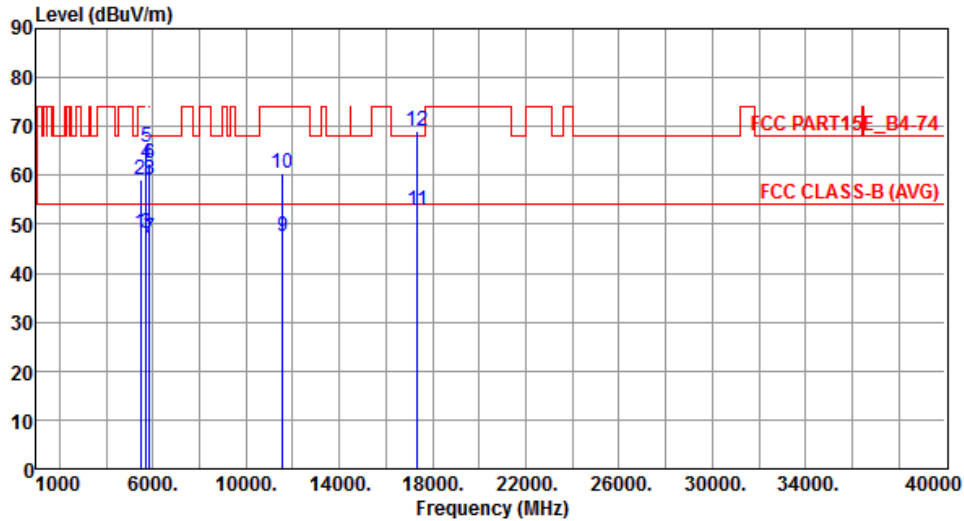


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.02	54.00	-5.98	42.42	5.60	Average	---	---
2	5460.00	59.04	74.00	-14.96	53.44	5.60	Peak	---	---
3	5715.00	48.07	54.00	-5.93	42.42	5.65	Average	---	---
4	5715.00	62.49	74.00	-11.51	56.84	5.65	Peak	---	---
5	5725.00	65.77	78.20	-12.43	60.13	5.64	Peak	---	---
6	5850.00	62.49	78.20	-15.71	56.74	5.75	Peak	---	---
7	5860.00	47.25	54.00	-6.75	41.49	5.76	Average	---	---
8	5860.00	59.22	74.00	-14.78	53.46	5.76	Peak	---	---
9	11570.00	47.38	54.00	-6.62	31.61	15.77	Average	---	---
10	11570.00	60.35	74.00	-13.65	44.58	15.77	Peak	---	---
11	17355.00	52.96	54.00	-1.04	33.23	19.73	Average	---	---
12	17355.00	68.98	74.00	-5.02	49.25	19.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

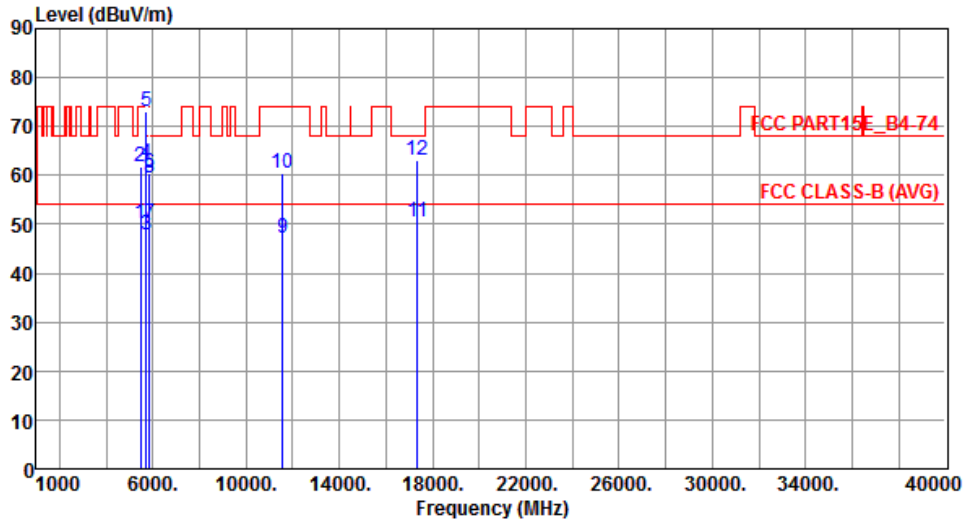


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	50.15	54.00	-3.85	44.55	5.60	Average	---	---
2	5460.00	61.71	74.00	-12.29	56.11	5.60	Peak	---	---
3	5715.00	47.95	54.00	-6.05	42.30	5.65	Average	---	---
4	5715.00	62.59	74.00	-11.41	56.94	5.65	Peak	---	---
5	5725.00	72.95	78.20	-5.25	67.31	5.64	Peak	---	---
6	5850.00	60.47	78.20	-17.73	54.72	5.75	Peak	---	---
7	5860.00	50.08	54.00	-3.92	44.32	5.76	Average	---	---
8	5860.00	59.39	74.00	-14.61	53.63	5.76	Peak	---	---
9	11570.00	47.00	54.00	-7.00	31.23	15.77	Average	---	---
10	11570.00	60.38	74.00	-13.62	44.61	15.77	Peak	---	---
11	17355.00	50.38	54.00	-3.62	30.65	19.73	Average	---	---
12	17355.00	62.94	74.00	-11.06	43.21	19.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

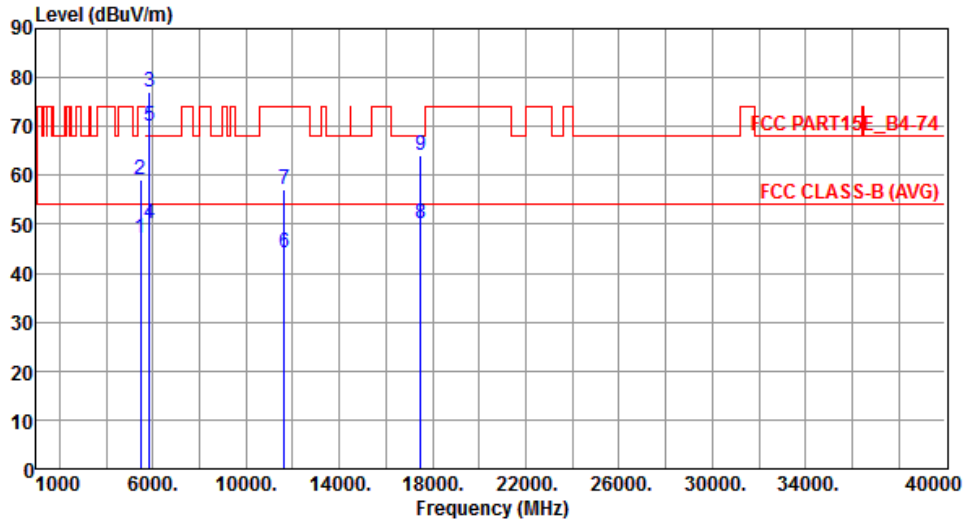


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.02	54.00	-6.98	41.42	5.60	Average	---	---
2	5460.00	59.27	74.00	-14.73	53.67	5.60	Peak	---	---
3	5850.00	76.97	78.20	-1.23	71.22	5.75	Peak	---	---
4	5860.00	50.30	54.00	-3.70	44.54	5.76	Average	---	---
5	5860.00	70.12	74.00	-3.88	64.36	5.76	Peak	---	---
6	11650.00	44.10	54.00	-9.90	28.54	15.56	Average	---	---
7	11650.00	57.18	74.00	-16.82	41.62	15.56	Peak	---	---
8	17475.00	50.08	54.00	-3.92	29.66	20.42	Average	---	---
9	17475.00	64.01	74.00	-9.99	43.59	20.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

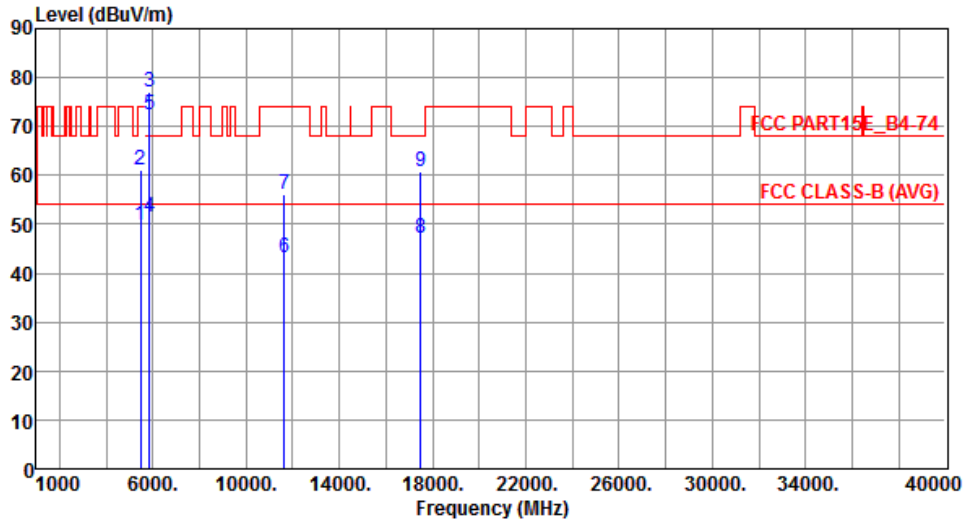


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.82	54.00	-4.18	44.22	5.60	Average	---	---
2	5460.00	61.06	74.00	-12.94	55.46	5.60	Peak	---	---
3	5850.00	77.18	78.20	-1.02	71.43	5.75	Peak	---	---
4	5860.00	51.32	54.00	-2.68	45.56	5.76	Average	---	---
5	5860.00	72.37	74.00	-1.63	66.61	5.76	Peak	---	---
6	11650.00	43.22	54.00	-10.78	27.66	15.56	Average	---	---
7	11650.00	56.17	74.00	-17.83	40.61	15.56	Peak	---	---
8	17475.00	47.01	54.00	-6.99	26.59	20.42	Average	---	---
9	17475.00	60.74	74.00	-13.26	40.32	20.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

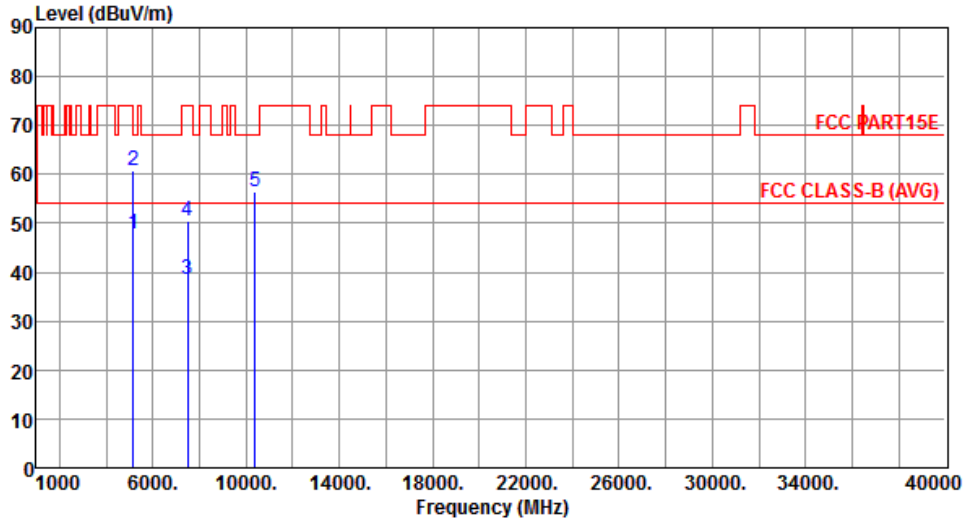Modulation	VHT40	Test Freq. (MHz)	5190						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.93	54.00	-6.07	42.47	5.46	Average	---	---
2	5150.00	60.80	74.00	-13.20	55.34	5.46	Peak	---	---
3	7500.00	38.48	54.00	-15.52	28.51	9.97	Average	---	---
4	7500.00	50.62	74.00	-23.38	40.65	9.97	Peak	---	---
5	10380.00	56.46	68.20	-11.74	40.98	15.48	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

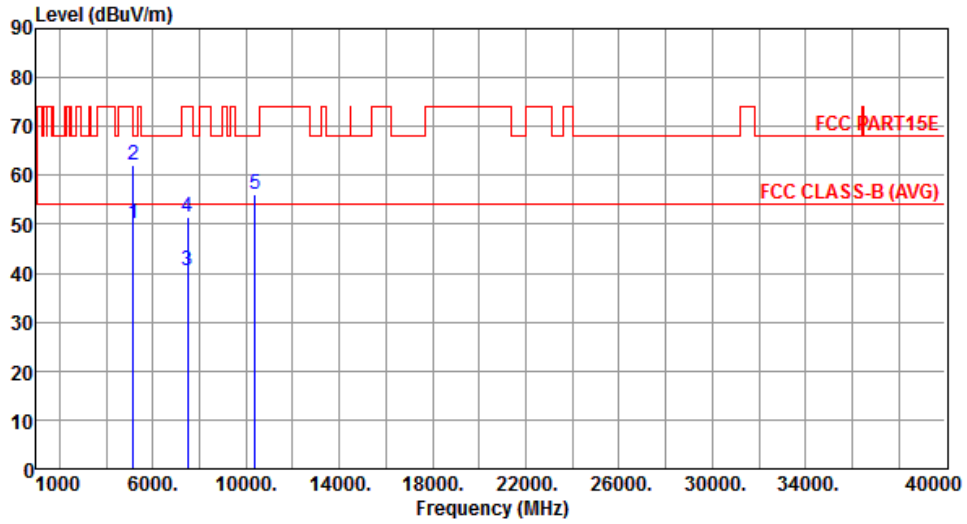


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.13	54.00	-3.87	44.67	5.46	Average	---	---
2	5150.00	62.02	74.00	-11.98	56.56	5.46	Peak	---	---
3	7500.00	40.39	54.00	-13.61	30.42	9.97	Average	---	---
4	7500.00	51.35	74.00	-22.65	41.38	9.97	Peak	---	---
5	10380.00	56.20	68.20	-12.00	40.72	15.48	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

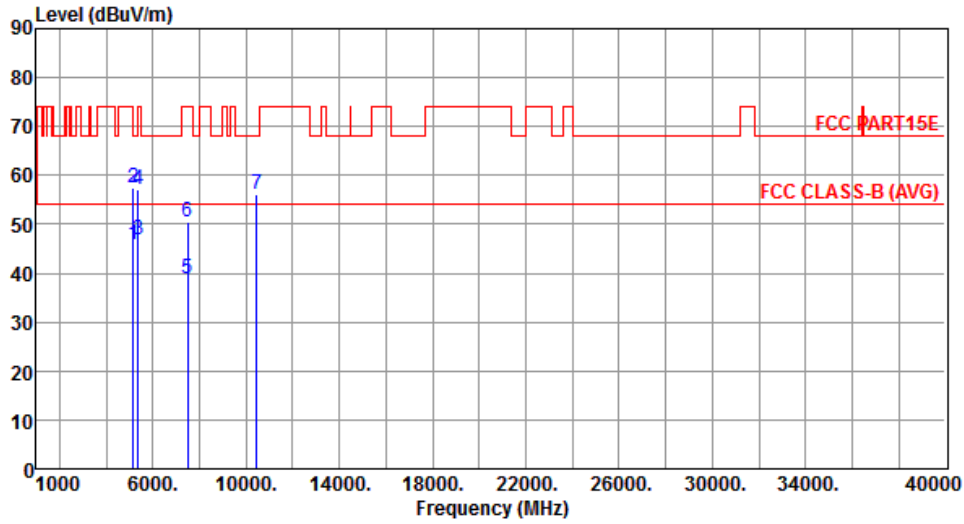


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.92	54.00	-8.08	40.46	5.46	Average	---	---
2	5150.00	57.31	74.00	-16.69	51.85	5.46	Peak	---	---
3	5350.00	46.88	54.00	-7.12	41.32	5.56	Average	---	---
4	5350.00	57.24	74.00	-16.76	51.68	5.56	Peak	---	---
5	7500.00	38.70	54.00	-15.30	28.73	9.97	Average	---	---
6	7500.00	50.53	74.00	-23.47	40.56	9.97	Peak	---	---
7	10460.00	56.26	68.20	-11.94	40.48	15.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

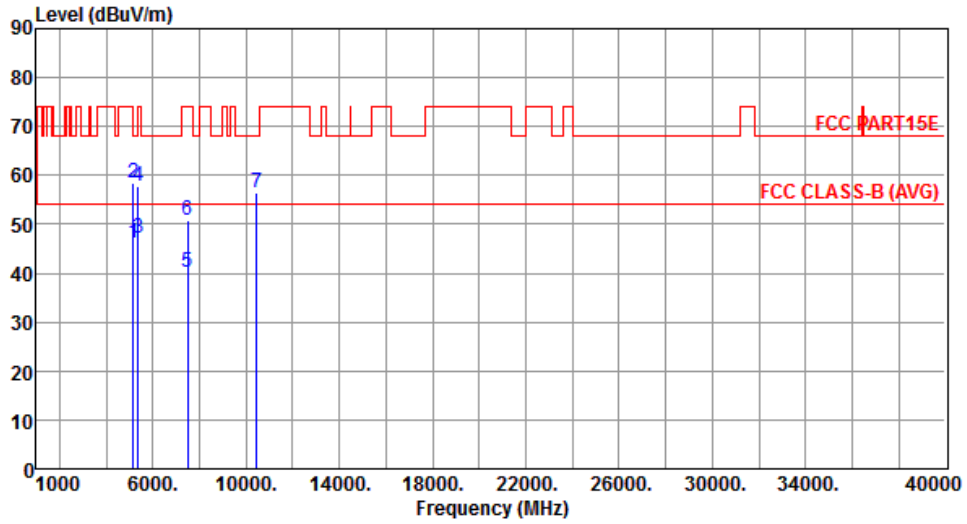


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.03	54.00	-7.97	40.57	5.46	Average	---	---
2	5150.00	58.61	74.00	-15.39	53.15	5.46	Peak	---	---
3	5350.00	47.22	54.00	-6.78	41.66	5.56	Average	---	---
4	5350.00	57.85	74.00	-16.15	52.29	5.56	Peak	---	---
5	7500.00	40.35	54.00	-13.65	30.38	9.97	Average	---	---
6	7500.00	50.68	74.00	-23.32	40.71	9.97	Peak	---	---
7	10460.00	56.33	68.20	-11.87	40.55	15.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

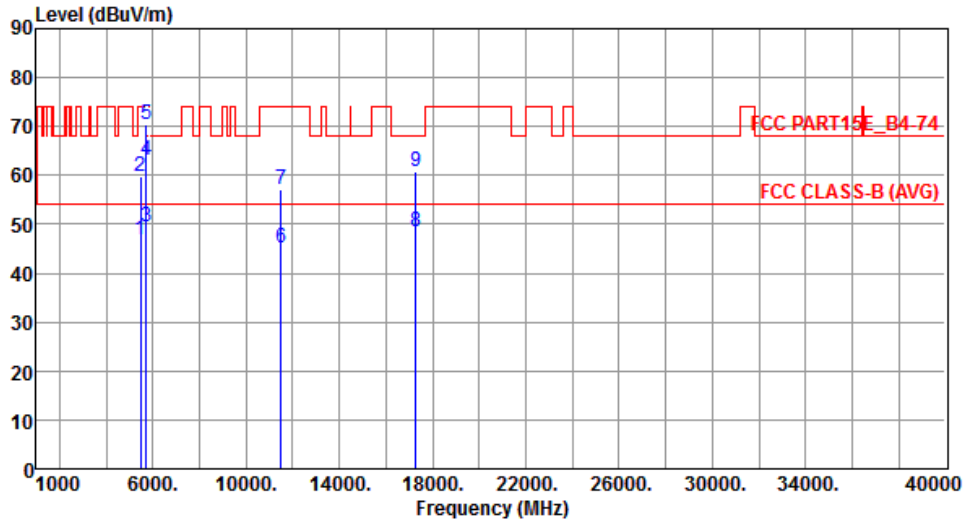


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.85	54.00	-7.15	41.25	5.60	Average	---	---
2	5460.00	59.91	74.00	-14.09	54.31	5.60	Peak	---	---
3	5715.00	49.63	54.00	-4.37	43.98	5.65	Average	---	---
4	5715.00	63.06	74.00	-10.94	57.41	5.65	Peak	---	---
5	5725.00	70.56	78.20	-7.64	64.92	5.64	Peak	---	---
6	11510.00	45.17	54.00	-8.83	29.25	15.92	Average	---	---
7	11510.00	56.99	74.00	-17.01	41.07	15.92	Peak	---	---
8	17265.00	48.46	54.00	-5.54	29.25	19.21	Average	---	---
9	17265.00	60.79	74.00	-13.21	41.58	19.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

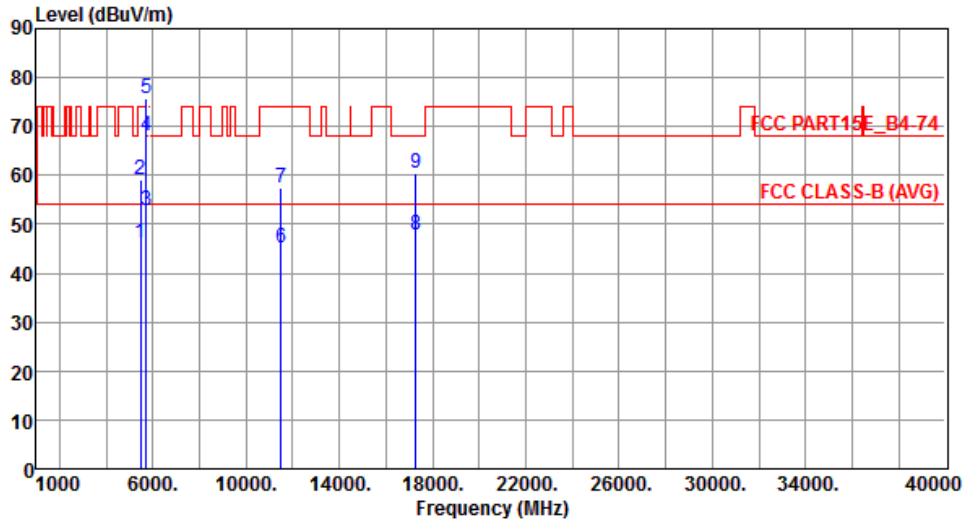


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.15	54.00	-7.85	40.55	5.60	Average	---	---
2	5460.00	59.13	74.00	-14.87	53.53	5.60	Peak	---	---
3	5715.00	52.84	54.00	-1.16	47.19	5.65	Average	---	---
4	5715.00	68.15	74.00	-5.85	62.50	5.65	Peak	---	---
5	5725.00	75.72	78.20	-2.48	70.08	5.64	Peak	---	---
6	11510.00	45.12	54.00	-8.88	29.20	15.92	Average	---	---
7	11510.00	57.57	74.00	-16.43	41.65	15.92	Peak	---	---
8	17265.00	47.83	54.00	-6.17	28.62	19.21	Average	---	---
9	17265.00	60.53	74.00	-13.47	41.32	19.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

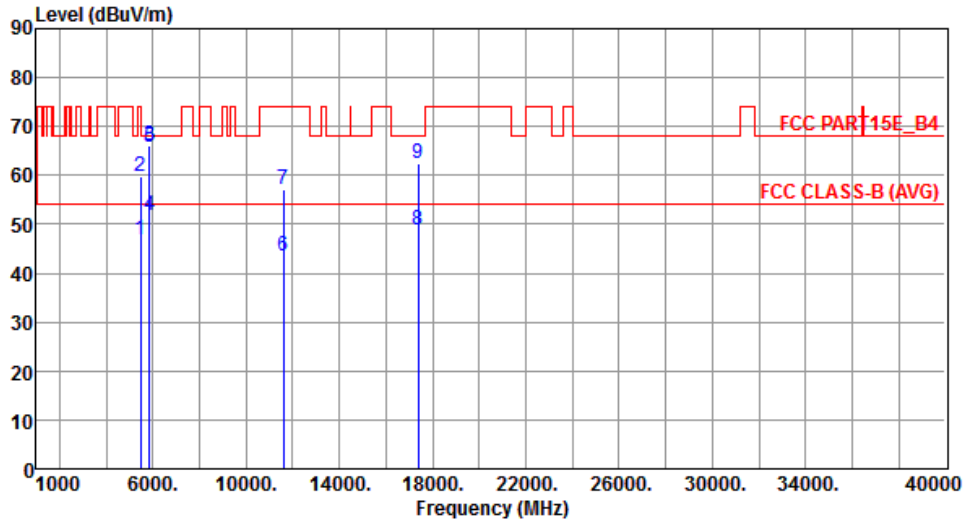


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.76	54.00	-7.24	41.16	5.60	Average	---	---
2	5460.00	59.79	74.00	-14.21	54.19	5.60	Peak	---	---
3	5850.00	65.96	78.20	-12.24	60.21	5.75	Peak	---	---
4	5860.00	51.75	54.00	-2.25	45.99	5.76	Average	---	---
5	5860.00	65.90	68.20	-2.30	60.14	5.76	Peak	---	---
6	11590.00	43.58	54.00	-10.42	27.87	15.71	Average	---	---
7	11590.00	57.25	74.00	-16.75	41.54	15.71	Peak	---	---
8	17385.00	48.87	54.00	-5.13	28.96	19.91	Average	---	---
9	17385.00	62.49	68.20	-5.71	42.58	19.91	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

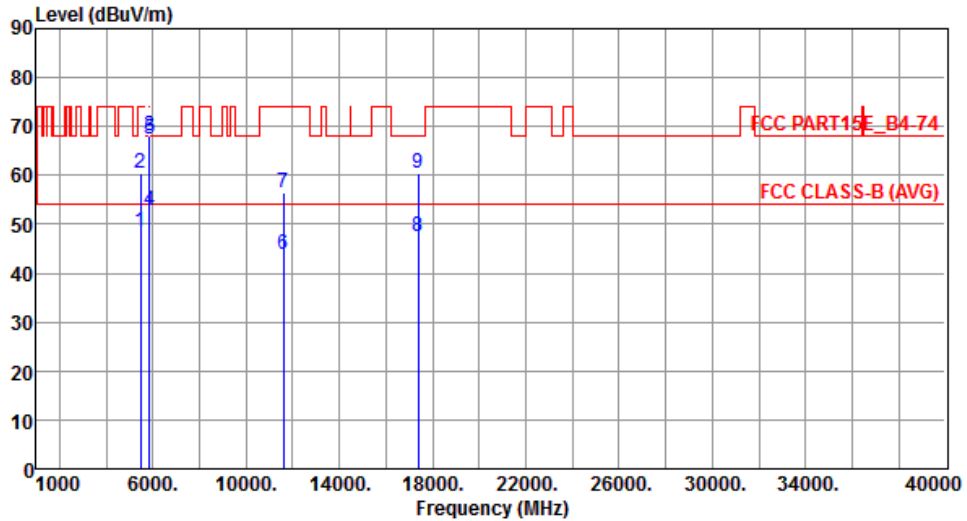

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.45	54.00	-5.55	42.85	5.60	Average	---	---
2	5460.00	60.60	74.00	-13.40	55.00	5.60	Peak	---	---
3	5850.00	68.21	78.20	-9.99	62.46	5.75	Peak	---	---
4	5860.00	52.67	54.00	-1.33	46.91	5.76	Average	---	---
5	5860.00	67.48	74.00	-6.52	61.72	5.76	Peak	---	---
6	11590.00	43.95	54.00	-10.05	28.24	15.71	Average	---	---
7	11590.00	56.31	74.00	-17.69	40.60	15.71	Peak	---	---
8	17385.00	47.34	54.00	-6.66	27.43	19.91	Average	---	---
9	17385.00	60.47	74.00	-13.53	40.56	19.91	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210																																																																																						
Polarization	Horizontal																																																																																								
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>47.91</td> <td>54.00</td> <td>-6.09</td> <td>42.45</td> <td>5.46</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>59.60</td> <td>74.00</td> <td>-14.40</td> <td>54.14</td> <td>5.46</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>5350.00</td> <td>47.06</td> <td>54.00</td> <td>-6.94</td> <td>41.50</td> <td>5.56</td> <td>Average</td> <td>---</td> </tr> <tr> <td>4</td> <td>5350.00</td> <td>58.76</td> <td>74.00</td> <td>-15.24</td> <td>53.20</td> <td>5.56</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>7500.00</td> <td>38.48</td> <td>54.00</td> <td>-15.52</td> <td>28.51</td> <td>9.97</td> <td>Average</td> <td>---</td> </tr> <tr> <td>6</td> <td>7500.00</td> <td>50.34</td> <td>74.00</td> <td>-23.66</td> <td>40.37</td> <td>9.97</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>7</td> <td>10420.00</td> <td>56.35</td> <td>68.20</td> <td>-11.85</td> <td>40.72</td> <td>15.63</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5150.00	47.91	54.00	-6.09	42.45	5.46	Average	---	2	5150.00	59.60	74.00	-14.40	54.14	5.46	Peak	---	3	5350.00	47.06	54.00	-6.94	41.50	5.56	Average	---	4	5350.00	58.76	74.00	-15.24	53.20	5.56	Peak	---	5	7500.00	38.48	54.00	-15.52	28.51	9.97	Average	---	6	7500.00	50.34	74.00	-23.66	40.37	9.97	Peak	---	7	10420.00	56.35	68.20	-11.85	40.72	15.63	Peak	---							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																																				
1	5150.00	47.91	54.00	-6.09	42.45	5.46	Average	---																																																																																	
2	5150.00	59.60	74.00	-14.40	54.14	5.46	Peak	---																																																																																	
3	5350.00	47.06	54.00	-6.94	41.50	5.56	Average	---																																																																																	
4	5350.00	58.76	74.00	-15.24	53.20	5.56	Peak	---																																																																																	
5	7500.00	38.48	54.00	-15.52	28.51	9.97	Average	---																																																																																	
6	7500.00	50.34	74.00	-23.66	40.37	9.97	Peak	---																																																																																	
7	10420.00	56.35	68.20	-11.85	40.72	15.63	Peak	---																																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																									

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

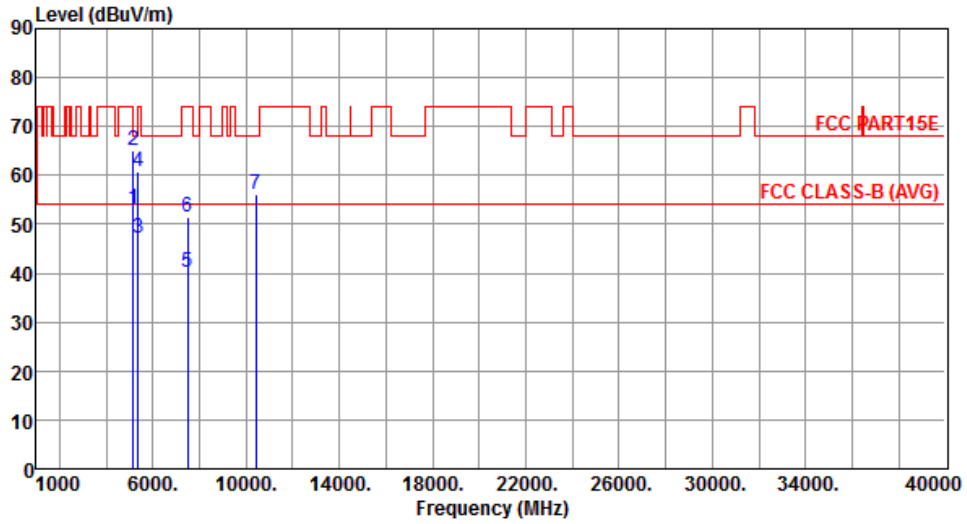


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	53.00	54.00	-1.00	47.54	5.46	Average	---	---
2	5150.00	65.00	74.00	-9.00	59.54	5.46	Peak	---	---
3	5350.00	47.32	54.00	-6.68	41.76	5.56	Average	---	---
4	5350.00	60.90	74.00	-13.10	55.34	5.56	Peak	---	---
5	7500.00	40.10	54.00	-13.90	30.13	9.97	Average	---	---
6	7500.00	51.53	74.00	-22.47	41.56	9.97	Peak	---	---
7	10420.00	56.16	68.20	-12.04	40.53	15.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

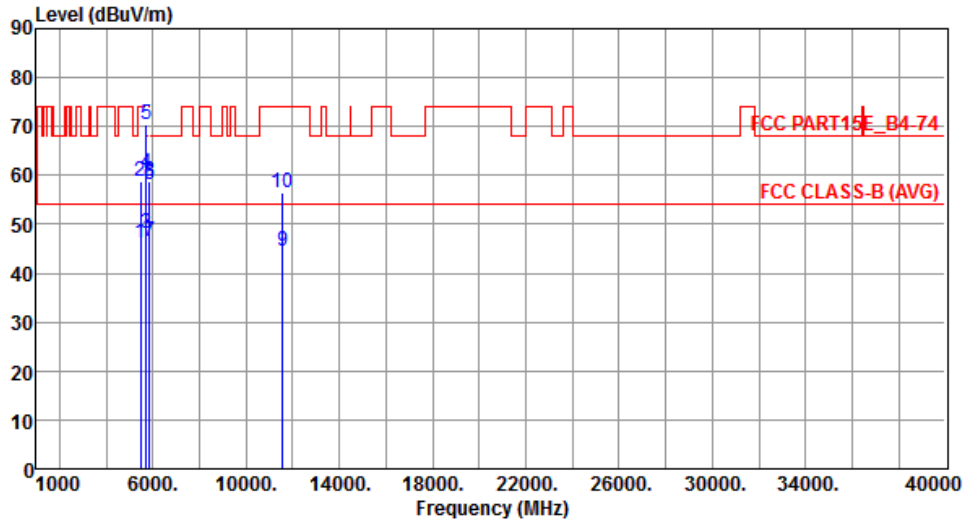


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.12	54.00	-7.88	40.52	5.60	Average	---	---
2	5460.00	58.91	74.00	-15.09	53.31	5.60	Peak	---	---
3	5715.00	48.17	54.00	-5.83	42.52	5.65	Average	---	---
4	5715.00	60.45	74.00	-13.55	54.80	5.65	Peak	---	---
5	5725.00	70.49	78.20	-7.71	64.85	5.64	Peak	---	---
6	5850.00	58.10	78.20	-20.10	52.35	5.75	Peak	---	---
7	5860.00	46.45	54.00	-7.55	40.69	5.76	Average	---	---
8	5860.00	58.63	74.00	-15.37	52.87	5.76	Peak	---	---
9	11550.00	44.35	54.00	-9.65	28.54	15.81	Average	---	---
10	11550.00	56.44	74.00	-17.56	40.63	15.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

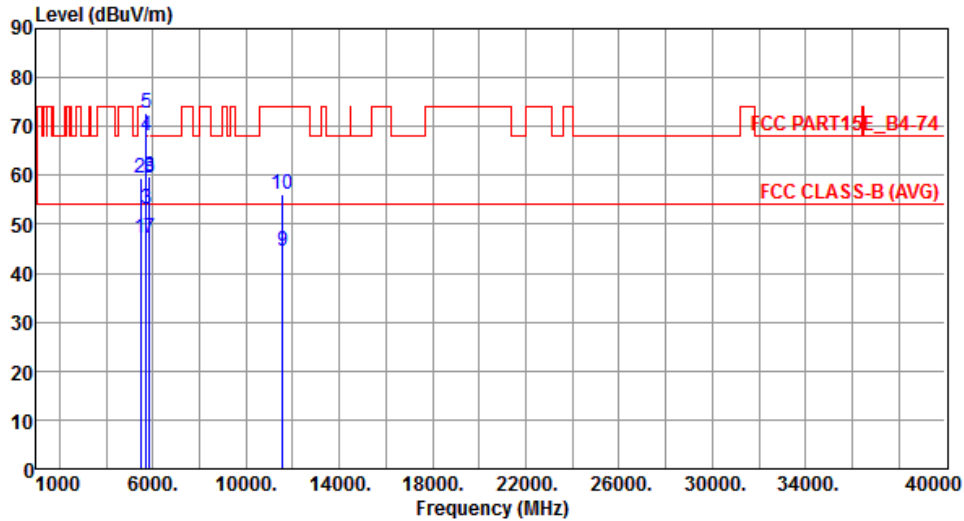

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.14	54.00	-6.86	41.54	5.60	Average	---	---
2	5460.00	59.37	74.00	-14.63	53.77	5.60	Peak	---	---
3	5715.00	52.97	54.00	-1.03	47.32	5.65	Average	---	---
4	5715.00	68.17	74.00	-5.83	62.52	5.65	Peak	---	---
5	5725.00	72.88	78.20	-5.32	67.24	5.64	Peak	---	---
6	5850.00	59.70	78.20	-18.50	53.95	5.75	Peak	---	---
7	5860.00	47.06	54.00	-6.94	41.30	5.76	Average	---	---
8	5860.00	59.58	74.00	-14.42	53.82	5.76	Peak	---	---
9	11550.00	44.43	54.00	-9.57	28.62	15.81	Average	---	---
10	11550.00	56.27	74.00	-17.73	40.46	15.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.6.3 Test Setup

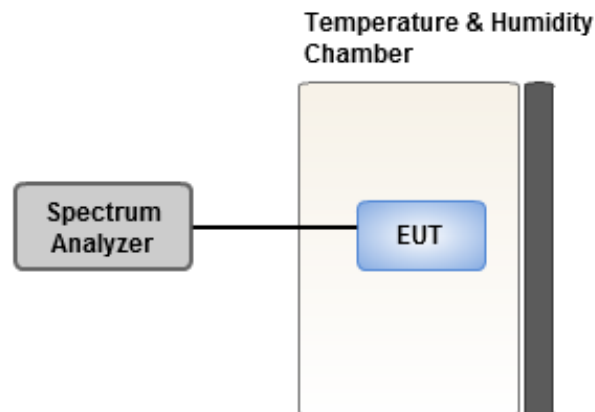

3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	5.59	5.00	4.80	5.53
T20°C Vmin	4.13	4.74	4.83	4.71
T50°C Vnom	4.06	4.35	3.76	3.93
T40°C Vnom	4.45	4.25	4.19	4.31
T30°C Vnom	2.35	2.84	3.25	2.39
T20°C Vnom	2.63	2.43	2.73	2.38
T10°C Vnom	1.87	2.31	2.07	2.05
T0°C Vnom	3.18	3.45	3.16	3.47
T-10°C Vnom	2.67	2.24	2.43	2.27
T-20°C Vnom	1.31	1.83	1.71	1.90
T-30°C Vnom	0.54	0.44	1.19	0.59
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	5.35	4.09	4.29	5.25
T20°C Vmin	3.74	4.53	4.27	4.09
T50°C Vnom	3.51	4.04	3.40	3.03
T40°C Vnom	3.76	3.48	3.62	3.85
T30°C Vnom	2.12	2.41	2.91	1.96
T20°C Vnom	2.06	2.20	2.58	1.78
T10°C Vnom	1.84	1.81	1.87	1.73
T0°C Vnom	3.02	2.91	2.72	3.22
T-10°C Vnom	2.35	2.19	2.05	1.87
T-20°C Vnom	1.05	1.44	1.67	1.80
T-30°C Vnom	0.53	0.20	1.21	0.45
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==