



TESTING LABORATORY
CERTIFICATE # 4297.01




FCC PART 95 MEASUREMENT AND TEST REPORT

For

Kiddesigns Inc

1299 Main Street, Rahway, New Jersey 07065-0901 United States

FCC ID: IAJ212C7B

Report Type: Original Report	Product Type: XX-202, 207, 210, 212, 216 WALKIE TALKIES
Report Number: <u>SZNS211102-56322E-RF-00A</u>	
Report Date: <u>2021-11-09</u>	
Reviewed By: <u>RF Engineer</u>	Candy Li 
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
§2.1093 - RF EXPOSURE INFORMATION	9
APPLICABLE STANDARD	9
FCC §95.587(b)(1)(2)(3) – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA DESCRIPTION.....	10
FCC §2.1046 & §95.567 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST DATA	12
FCC §2.1049 & §95.573 & §95.579 - AUTHOURIZED BANDWIDTH AND EMISSION MASK.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	18
FCC §2.1053 & §95.579- RADIATED SPURIOUS EMISSION	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC§2.1055 (d) & §95.565 - FREQUENCY STABILITY	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	23

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

Product	XX-202, 207, 210, 212, 216 WALKIE TALKIES
Tested Model	BM-212.EXv22
Multiple Models	M ₁ -202M ₂ M ₃ M ₄ M ₅ M ₆ M ₇ M ₈ M ₉ M ₁₀ ,M ₁ -207M ₂ M ₃ M ₄ M ₅ M ₆ M ₇ M ₈ M ₉ M ₁₀ ,M ₁ -210M ₂ M ₃ M ₄ M ₅ M ₆ M ₇ M ₈ M ₉ M ₁₀ ,M ₁ -212 M ₂ M ₃ M ₄ M ₅ M ₆ M ₇ M ₈ M ₉ M ₁₀ ,M ₁ -216M ₂ M ₃ M ₄ M ₅ M ₆ M ₇ M ₈ M ₉ M ₁₀ (M ₁ -M ₁₀ ,please refer to model no. table)
Model difference:	Refer to the DoS letter
Frequency Range	462.7125MHz
Transmit Power (ERP)	5.05dBm
Channel Spacing	12.5kHz
Modulation Technique	FM
Antenna Specification*	-4.0 dBi(It is provided by the applicant)
Voltage Range	DC 1.5V*3 AAA batteries
Sample serial number	SZNS211102-56322E-RF-S1 (Assigned by ATC)
Received date	2021-11-02
Sample/EUT Status	Good condition

Model: M₁-202M₂M₃M₄M₅M₆M₇M₈M₉M₁₀,M₁-207M₂M₃M₄M₅M₆M₇M₈M₉M₁₀,
M₁-210M₂M₃M₄M₅M₆M₇M₈M₉M₁₀,M₁-212 M₂M₃M₄M₅M₆M₇M₈M₉M₁₀,
M₁-216M₂M₃M₄M₅M₆M₇M₈M₉M₁₀(M₁-M₁₀,please refer to model no. table)

Model No. Table

Part of model #	M ₁	M ₂	M ₃	M ₄	M ₅	M ₆	M ₇	M ₈	M ₉	M ₁₀
Number of digit(s)	2 to 3	2	1	1	1 to 2	1	1 to 3	1 to 4	2	1
Description	2 to 3 digits alphabets combination by "a" – "Z" for brand	1 to 2 digits alphabets combination by "a" – "Z" special character version Or blank	“.” Or blank	“U” for Europe version Or blank	“E” for English content Or “F” for English & French Or “3” for 3 language version Or “5” for 5 languages version Or “11” for Europe version with 11 languages	“X” for no sound chip Or Blank Remark: equal to configuration of EUT	0”-“9” for year version Or “V0” – “V99” for year version	“M” for Movie version brand Or blank	“AK” for Walmart exclusive Or “AP” for Apple exclusive Or “KS” for Kohl’s exclusive Or “TG” for Target exclusive blank	“i” for inner carton required Or “z” for direct to consumer on-line packaging Or “OL” for Amazon packaging Or blank

Objective

This test report is in accordance with Part 2 and Part 95, Subpart A & Subpart B of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with Part 95 Subpart A, Subpart B of the Federal Communication Commissions rules with TIA-603-E, Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT only operate on 462.7125MHz.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

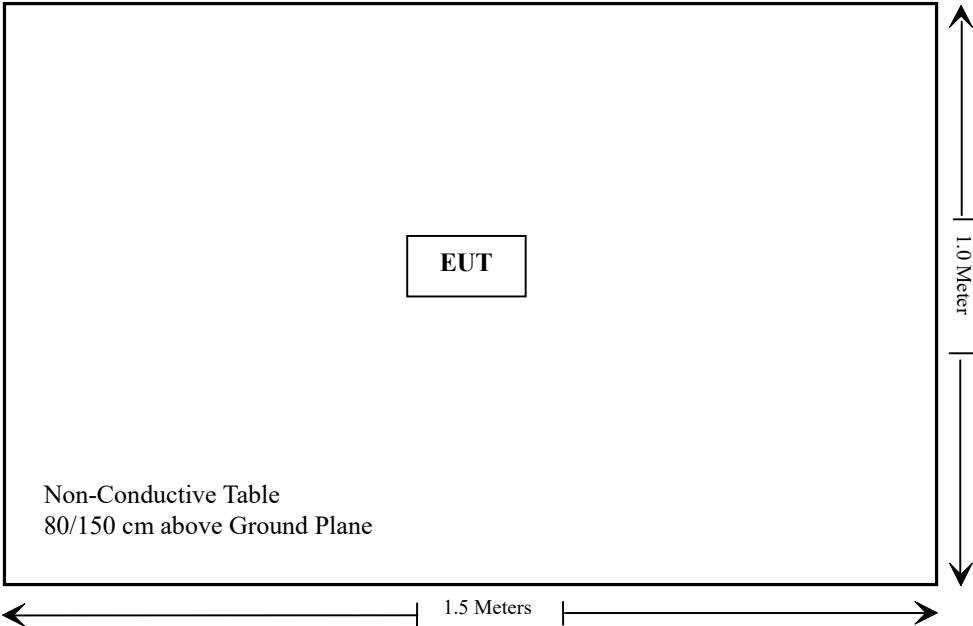

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1093	RF Exposure	Compliant
§95.587(b)(1)(2)(3)	Antenna Requirement	Compliant
§2.1046, §95.567	RF Output Power	Compliant
§2.1047, §95.575	Modulation Characteristic	Compliant
§2.1049, §95.573, §95.579	Authorized Bandwidth & Emission Mask	Compliant
§2.1053, §95.579	Radiated Spurious Emission	Compliant
§2.1055(d), §95.565	Frequency Stability	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
SCHWARZBECK	HORN ANTENNA	BBHA9120D	9120D-655	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Anritsu	Signal Generator	68369B	004114	2021/7/31	2022/7/30
RF Conducted Test					
SPECTRUM ANALYZER	Rohde & Schwarz	FSU26	200982	2021/07/06	2022/07/05
HP Agilent	RF Communication test set	8920B	3325U00859	2021/03/15	2022/03/15
WEINSCHL	10dB Attenuator	5324	AU 3842	2020/12/25	2021/12/24
Gongwen	Temperature & Humidity chamber	JB913R	GZ-WS004	2020/12/25	2021/12/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
462.7125	5.5	3.55	5	0.5	3.0	Yes

Result: No Standalone SAR test is required

FCC §95.587(b)(1)(2)(3) – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 95.587, (b) Antenna. The antenna of each FRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the FRS transmitter type.
- (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
- (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.

Antenna Description

The EUT has an integral vertically polarized antenna arrangement and the antenna gain is -4.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §2.1046 & §95.567 - RF OUTPUT POWER

Applicable Standard

Per FCC §2.1046, and §95.567, Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

Test Data

Environmental Conditions

Temperature:	28 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Amy Cao on 2021-11-03.

Test Mode: Transmitting

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
462.7125	-24.41	315	1	H	2.96	-21.45	33	54.45
462.7125	0.17	246	1.3	V	4.88	5.05	33	27.95

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain

Margin = Limit - Absolute Level

Test Result: Compliant.

FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC

Applicable Standard

Per FCC §2.1047 and §95.575: Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

Test Procedure

Test Method: TIA/EIA-603-E

Test Data

Environmental Conditions

Temperature:	28 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Amy Cao on 2021-11-03.


Please refer to the following tables and plots.

Test Mode: Transmitting

MODULATION LIMITING

Carrier Frequency: 462.7125MHz


Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	1.685	0.078	1.625	0.099	2.500
400	2.187	0.097	2.175	0.101	2.500
500	2.284	0.103	2.278	0.112	2.500
600	2.384	0.121	2.369	0.125	2.500
700	2.414	0.136	2.392	0.135	2.500
800	2.457	0.152	2.412	0.166	2.500
900	2.474	0.155	2.453	0.165	2.500
1000	2.452	0.173	2.445	0.184	2.500
1200	2.434	0.204	2.424	0.215	2.500
1400	2.391	0.229	2.378	0.238	2.500
1600	2.469	0.253	2.459	0.263	2.500
1800	2.378	0.287	2.366	0.294	2.500
2000	2.348	0.304	2.321	0.324	2.500
2100	2.367	0.313	2.357	0.325	2.500
2200	2.380	0.329	2.320	0.345	2.500
2300	2.463	0.346	2.432	0.361	2.500
2400	2.411	0.348	2.399	0.352	2.500
2500	2.294	0.343	2.271	0.345	2.500
2600	2.251	0.336	2.241	0.342	2.500
2700	2.261	0.335	2.235	0.338	2.500
2800	2.264	0.329	2.236	0.336	2.500
2900	2.282	0.309	2.232	0.312	2.500
3000	2.247	0.274	2.211	0.295	2.500

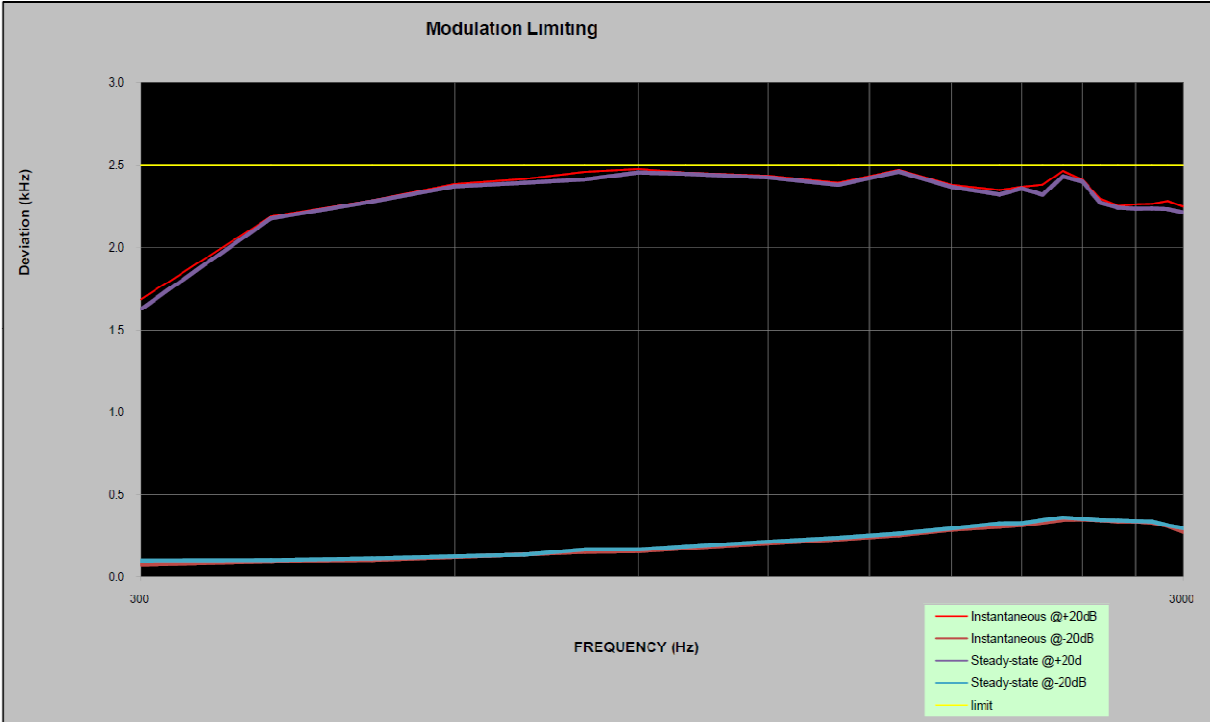

Audio Frequency Response

Carrier Frequency: 462.7125MHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-13.00
400	-8.31
500	-5.61
600	-3.90
700	-2.59
800	-1.66
900	-0.69
1000	0.00
1200	1.88
1400	2.90
1600	4.00
1800	5.16
2000	5.55
2100	5.86
2200	6.23
2300	6.67
2400	6.81
2500	6.67
2600	6.49
2700	6.38
2800	6.35
2900	6.44
3000	6.29

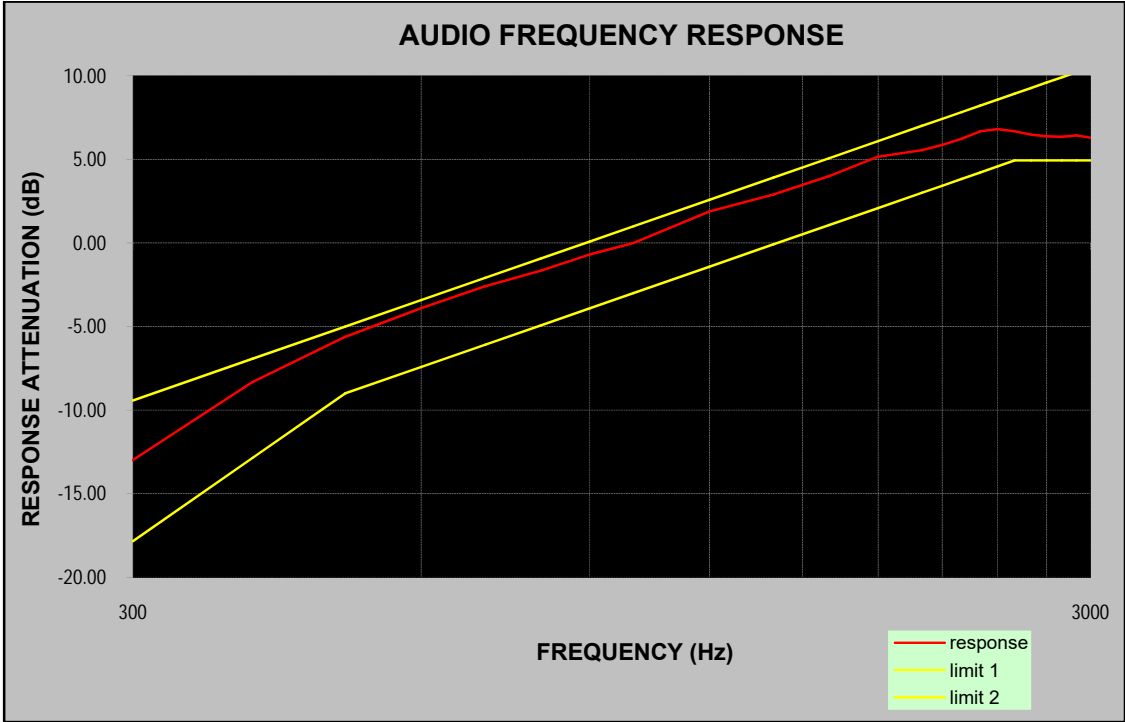

Audio frequency lows pass filter response

Carrier Frequency: 462.7125MHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-15.36	0.0
4.0	-73.53	-12.5
5.0	-84.78	-22.2
6.0	-85.69	-30.1
7.0	-85.21	-36.8
8.0	-86.86	-42.6
9.0	-86.60	-47.7
10.0	-84.37	-52.3
12.0	-88.85	-60.2
14.0	-88.57	-66.9
16.0	-89.6	-72.7
18.0	-89.9	-77.8
20.0	-87.5	-82.4

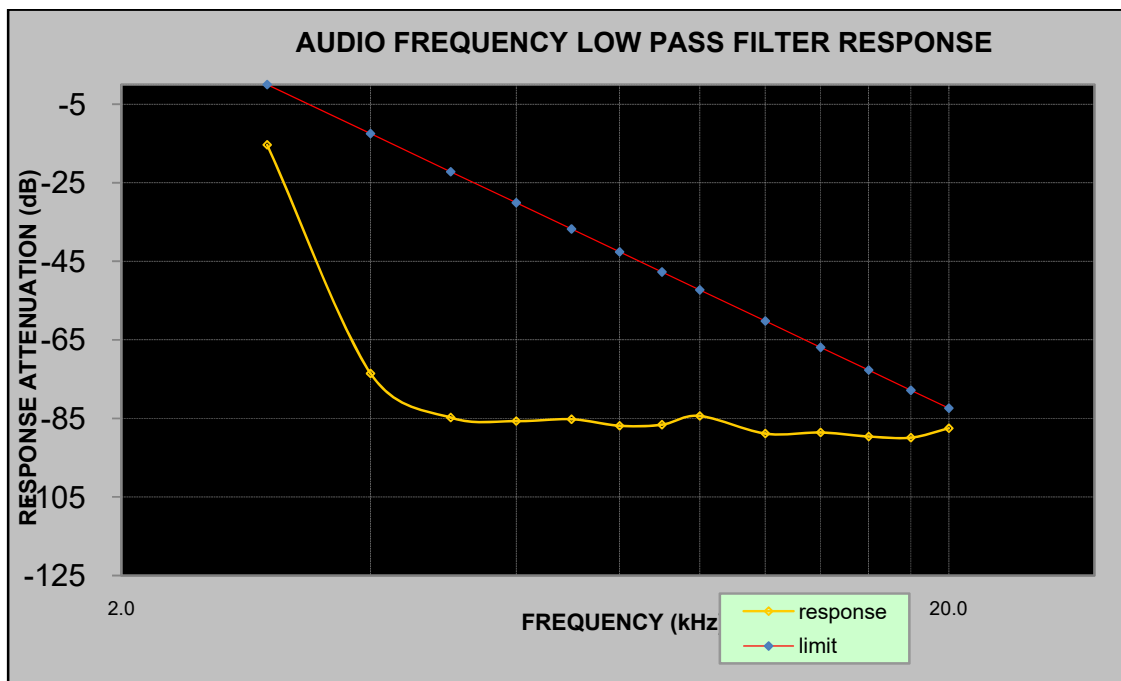

FCC §2.1049 & §95.573 & §95.579 - AUTHORIZED BANDWIDTH AND EMISSION MASK

Applicable Standard

According to §95.573. Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

(1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.

(2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.

(3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) Measurement bandwidths. The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

Test Procedure

TIA-603-E, section 2.2.11

Test Data

Environmental Conditions

Temperature:	28.6 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-11-05 and 2021-11-07.


Test Mode: Transmitting

Modulation	Channel Separation (kHz)	Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB Emissions Bandwidth (kHz)
Analog	12.5	462.7125	10.016	10.256

Emission Designator Per CFR 47 §2.201& §2.202&, Bn = 2M + 2D :


Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$
 F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

OBW, 462.7125 MHz

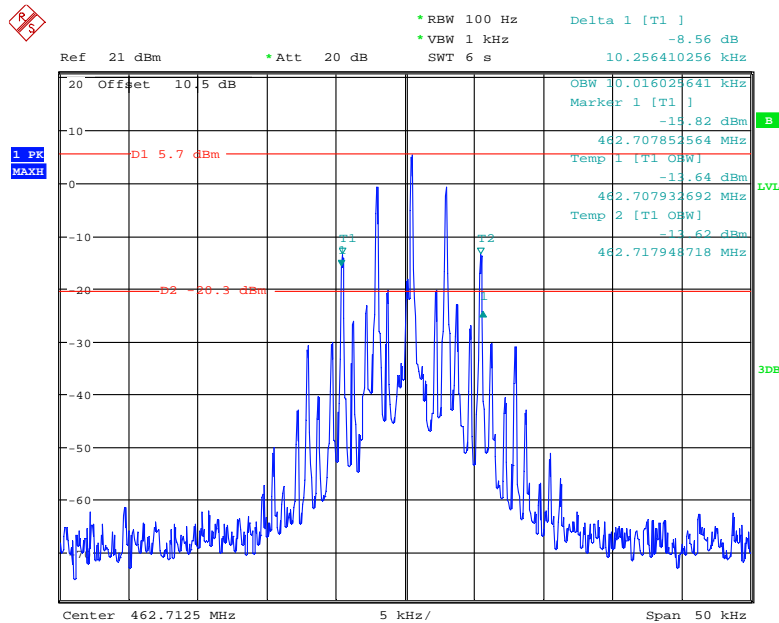

Date: 5.NOV.2021 21:56:39

Emission Mask, 462.7125 MHz

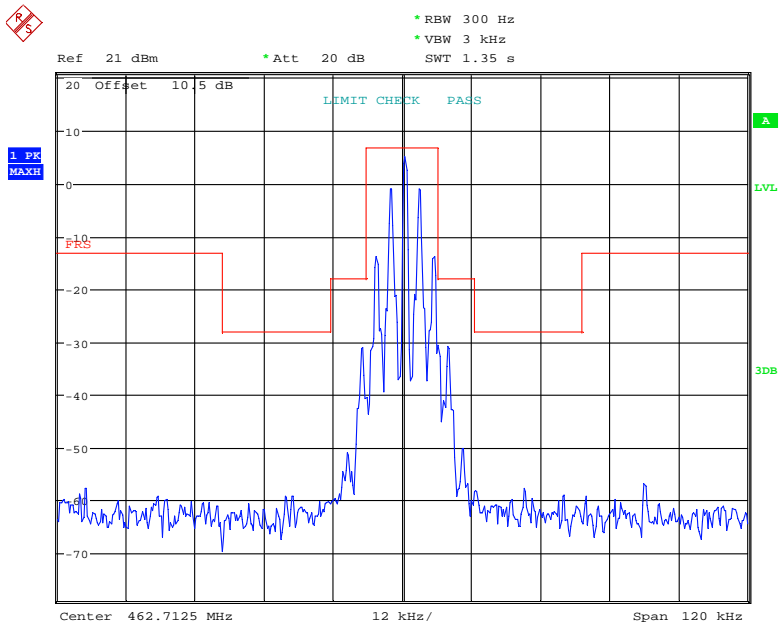

Date: 7.NOV.2021 13:28:07

FCC §2.1053 & §95.579- RADIATED SPURIOUS EMISSION

Applicable Standard

FCC §2.1053 and §95.579. Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) *Attenuation requirements.* The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log(P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) *Measurement bandwidths.* The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) *Measurement conditions.* The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

Test Procedure

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ - the absolute level
 Spurious attenuation limit in dB = $43 + 10 \lg_{10}(\text{power out in Watts})$

Test Data

Environmental Conditions

Temperature:	24.2~26.2 °C
Relative Humidity:	50~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Amy Cao on 2021-11-03 and 2021-11-06.

Test Mode: Transmitting

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
462.7125MHz								
925.425	-66.62	335	1.4	H	11.79	-54.83	-13	41.83
925.425	-69.61	15	2.1	V	12.48	-57.13	-13	44.13
1388.14	-41.17	147	1	H	-0.53	-41.7	-13	28.70
1388.14	-41.46	65	1	V	-0.74	-42.2	-13	29.20
1850.85	-45.33	171	1.3	H	-2.47	-47.8	-13	34.80
1850.85	-40.81	37	1	V	-2.49	-43.3	-13	30.30
2313.56	-39.32	336	1.3	H	1.32	-38	-13	25.00
2313.56	-41.06	276	1.6	V	1.36	-39.7	-13	26.70
2776.28	-50.89	129	1.6	H	2.79	-48.1	-13	35.10
2776.28	-50.83	83	1.1	V	2.93	-47.9	-13	34.90
3238.99	-35.59	42	1.5	H	2.79	-32.8	-13	19.80
3238.99	-33.83	306	2.1	V	2.93	-30.9	-13	17.90
3701.70	-46.24	49	1.6	H	3.54	-42.7	-13	29.70
3701.70	-46.17	349	1.6	V	3.47	-42.7	-13	29.70
4164.41	-41.49	242	1.8	H	6.39	-35.1	-13	22.10
4164.41	-39.18	117	1.7	V	6.28	-32.9	-13	19.90
4627.13	-51.79	270	1.7	H	8.69	-43.1	-13	30.10
4627.13	-50.27	137	1.7	V	8.27	-42	-13	29.00

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain

Margin = Limit - Absolute Level

FCC§2.1055 (d) & §95.565 - FREQUENCY STABILITY

Applicable Standard

According to FCC §2.1055(a) (1), the frequency stability shall be measured with variation of ambient temperature from $-30\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.565, Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage (item 1 or item 2 will be chosen according to different condition) :

1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	28.6 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-11-05 and 2021-11-07.

Test Mode: Transmitting

Reference Frequency: 462.7125MHz, Limit:2.5 ppm, 12.5kHz			
Environment Temperature (°C)	Power Supplied (V_{DC})	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	4.5	462.712623	0.27
40	4.5	462.712598	0.21
30	4.5	462.712519	0.04
20	4.5	462.712774	0.59
10	4.5	462.712618	0.26
0	4.5	462.712609	0.24
-10	4.5	462.712728	0.49
-20	4.5	462.712741	0.52
-30	4.5	462.712812	0.67
Frequency Stability versus Input Voltage			
20	3.8	462.712795	0.64
20	4.5	462.712832	0.72

******* END OF REPORT *******