



Report No.: SZ11090067W02

TEST REPORT

Issued to

CREATIVE Labs Inc

For

CREATIVE ZEN X-Fi3

Model Name: DVP-FL0019
Trade Name: CREATIVE LABS
Brand Name: ZEN
FCC ID: IBADVP-FL0019
IC ID: 2315A-DVPFL0019
Standard: 47 CFR Part 15 Subpart C
RSS-GEN and RSS-210
Test date: Sep 30, 2011 – Oct 12, 2011
Issue date: Oct 28, 2011



Shenzhen Morlab Communications Technology Co., Ltd.

Tested by Zhang Yan

Zhang Yan

Date 2011.10.28

Approved by Wu Xuewen

Wu Xuewen

Date 2011.10.28

Review by Peng Huarui

Peng Huarui

Date 2011.10.28

CTIA Authorized Test Lab
LAB CODE 20081223-00

IEEE 1725

OTA

OFTA
電訊管理局



GCF
Official Observer of
Global Certification Forum

Bluetooth
BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Shenzhen MORLAB Communication Technology Co., Ltd.

3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 61281201 Fax: +86 755 86130218

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions	6
2.	47 CFR PART 15C REQUIREMENTS	7
2.1	Number of Hopping Frequency	7
2.1.1	Requirement	7
2.1.2	Test Description	7
2.1.3	Test Result	7
2.2	Peak Output Power	10
2.2.1	Requirement	10
2.2.2	Test Description	10
2.2.3	Test Result	10
2.3	20dB Bandwidth	17
2.3.1	Definition	17
2.3.2	Test Description	17
2.3.3	Test Result	17
2.4	Carried Frequency Separation	24
2.4.1	Definition	24
2.4.2	Test Description	24
2.4.3	Test Result	24
2.5	Time of Occupancy (Dwell time)	26
2.5.1	Requirement	26
2.5.2	Test Description	26
2.5.3	Test Result	26
2.6	Conducted Spurious Emissions	33
2.6.1	Requirement	33
2.6.2	Test Description	33
2.6.3	Test Result	33

2.7	Band Edge	44
2.7.1	Requirement	44
2.7.2	Test Description	44
2.7.3	Test Result	45
2.8	Conducted Emission	53
2.8.1	Requirement	53
2.8.2	Test Description	53
2.8.3	Test Result	54
2.9	Radiated Emission (TX model)	56
2.9.1	Requirement	56
2.9.2	Test Description	56
2.9.3	Test Result	58
2.10	Radiated Emission (Receiver model).....	77
2.10.1	Requirement	77
2.10.2	Test Description	77
2.10.3	Test Verdict for Harmonics:	77

Change History		
Issue	Date	Reason for change
1.0	Oct 18, 2011	First edition
2.0	Oct 28, 2011	Corrected the test data of selection 2.9 and 2.10

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: CREATIVE ZEN X-Fi3
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: FM6765_V0.3
Software Version: V0.91.06
Applicant: CREATIVE Labs Inc
1901 McCarthy Blvd Milpitas, CA 95035, United States
Manufacturer: Foxda Technology Industrial(Shenzhen)Co.,LTD.
4/F, Fuxing Bldg, Binlang Road, Futian Free Trade Zone,
SHENZHEN, CHINA
Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at
intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Modulation Type.....: Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps),
8-DPSK(EDR 3Mbps)
Antenna: Chip Antenna, gain: 1dBi

Note 1: The EUT is a CREATIVE ZEN X-Fi3, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For the purposes of the present report, following the abbreviations are apply:

N.A Not Application

-- Not done this test

EUT Equipment under the test

Note 3: For the radiated emission test, according to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC/IC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices
2	RSS-210: Issue 7, June 2007	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC rules and results are as below:

No	Section in CFR 47	Section in RSS-GEN or RSS-210	Description	Result
1	15.247(a)	A8.1 (4)	Number of Hopping Frequency	PASS
2	15.247(b)	A8.4 (2)	Peak Output Power	PASS
3	15.247(a)	A8.1 (1)	20dB Bandwidth	PASS
4	15.247(a)	A8.1 (2)	Carrier Frequency Separation	PASS
5	15.247(a)	A8.1 (4)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	A8.5	Conducted Spurious Emission	PASS
7	15.247(c)	A8.5	Band Edge	PASS
8	15.207	7.2.2	Conducted Emission	PASS
9	15.209 15.247(c)	A8.5	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS


2.1 Number of Hopping Frequency

2.1.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

2.1.2 Test Description

A. Test Setup:

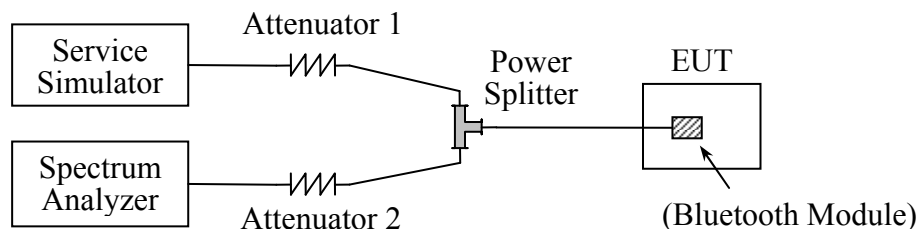

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Service Simulator	Agilent	E5515C	GB43130131	2011.05
Spectrum Analyzer	Agilent	E7405A	US44210471	2011.05
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)


2.1.3 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	75	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	75	Plot B	PASS
8-DPSK	2400 - 2483.5	79	75	Plot C	PASS

B. Test Plot:

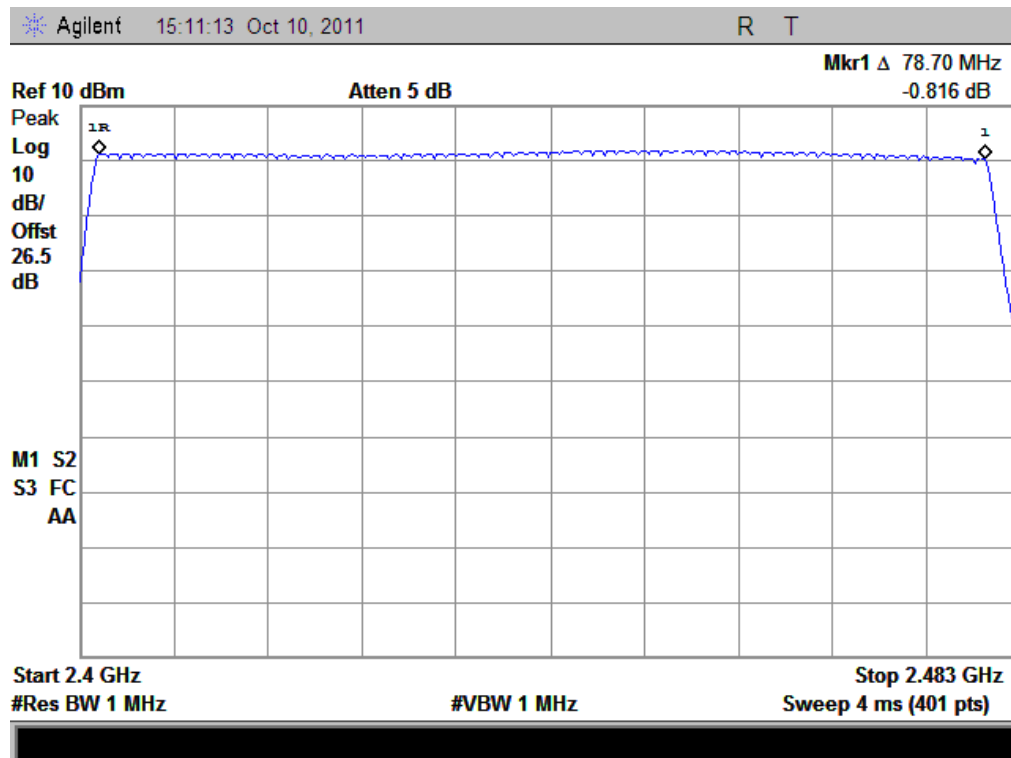

(Plot A: GFSK)

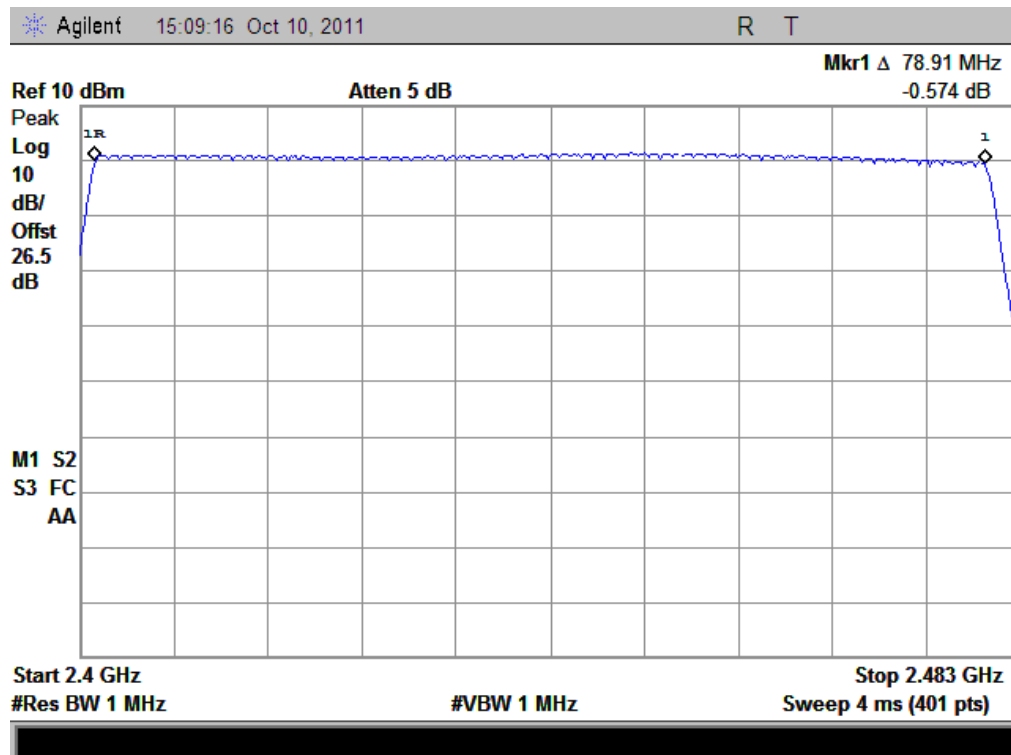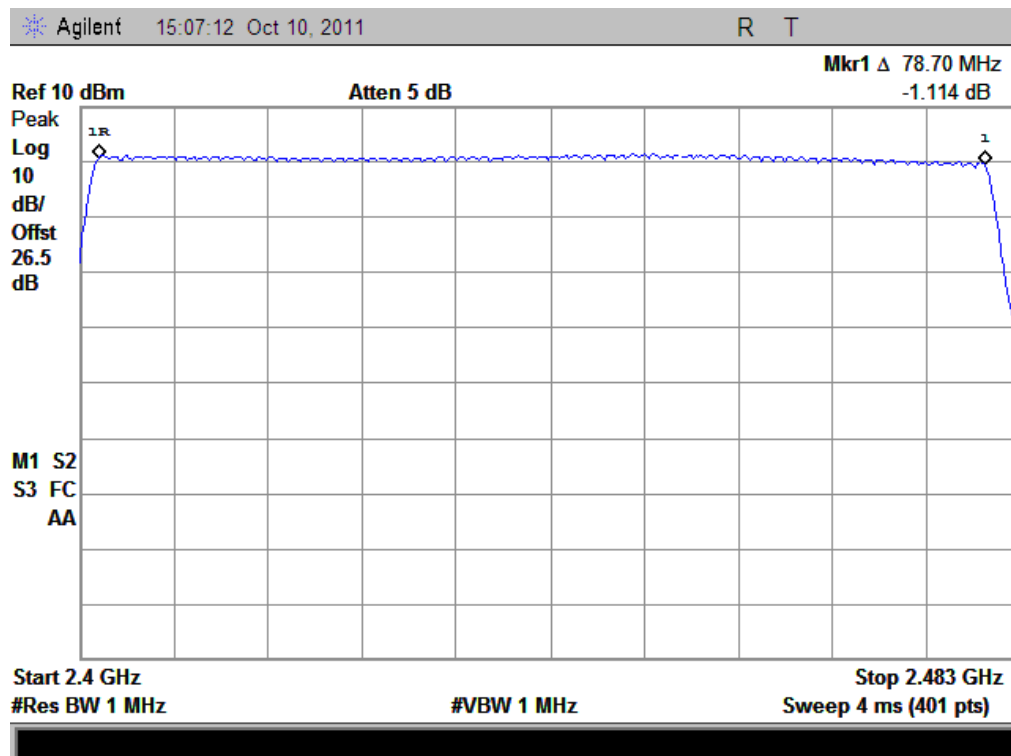
(Plot B: $\Pi/4$ -DQPSK)


(Plot C: 8- DPSK)

2.2 Peak Output Power

2.2.1 Requirement

According to FCC §15.247(b)(1) and RSS-210 A8.4 (2), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	1.347	0.001364	Plot A	30	1	PASS
39	2441	1.742	0.001493	Plot B			PASS
78	2480	0.603	0.001149	Plot C			PASS


B. Test Plot:

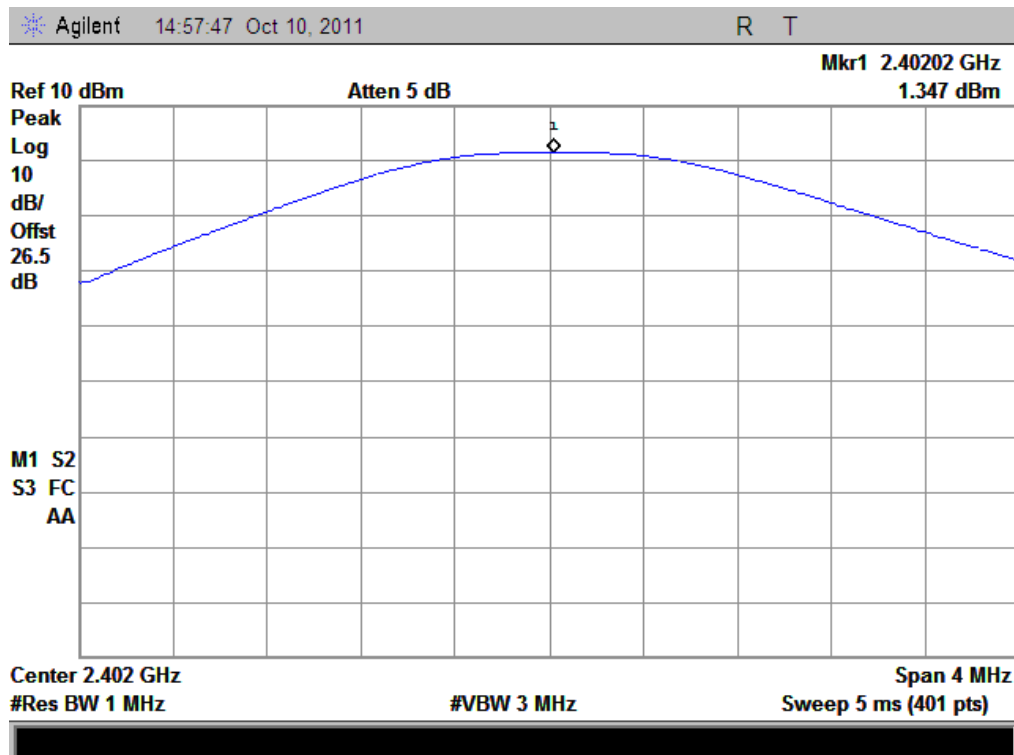

(Plot A: Channel = 2402)

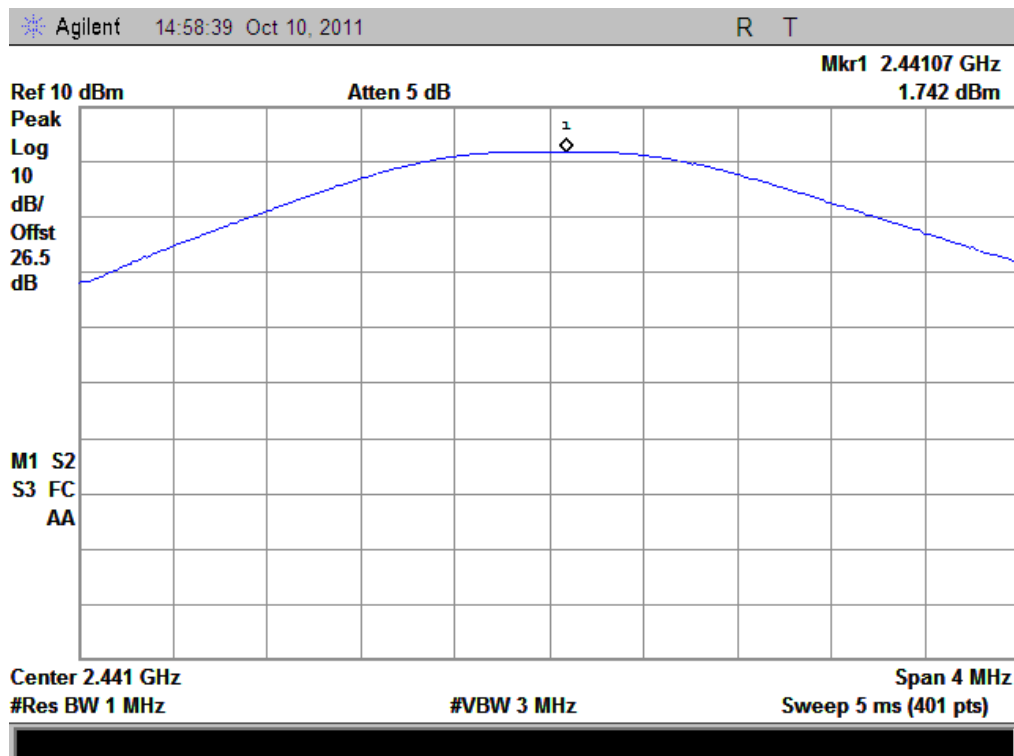

(Plot B: Channel = 2441)

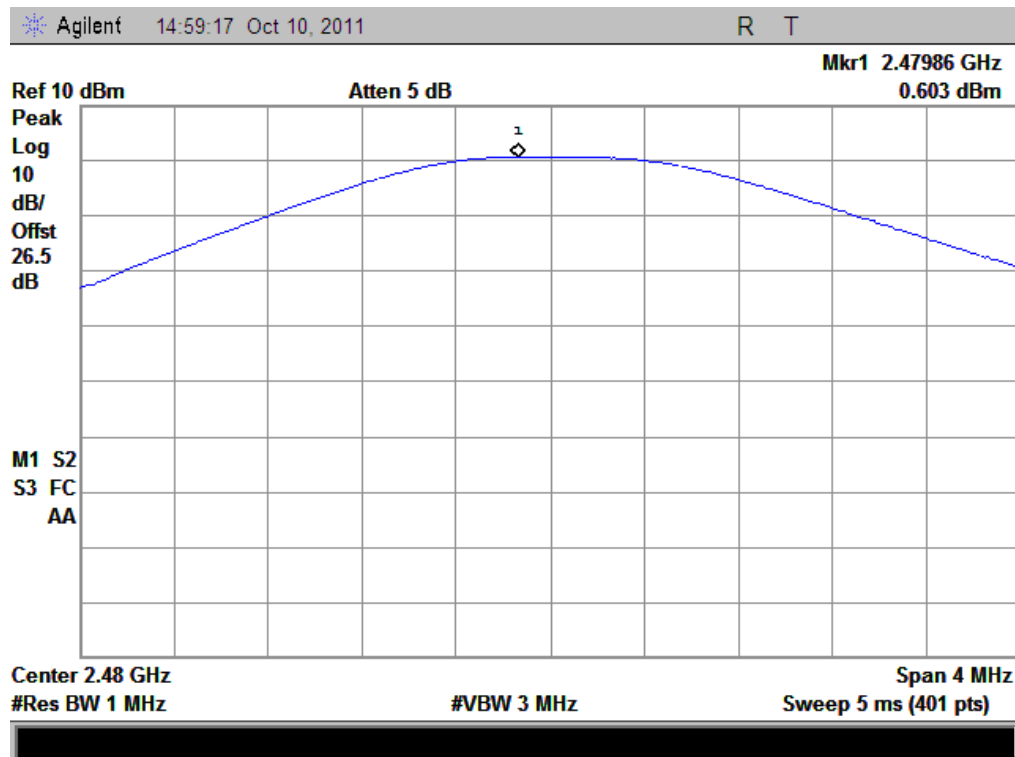


(Plot C: Channel = 2480)

C. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	1.313	0.001353	Plot D	30	1	PASS
39	2441	1.457	0.001399	Plot E			PASS
78	2480	0.056	0.001013	Plot F			PASS


D. Test Plot:

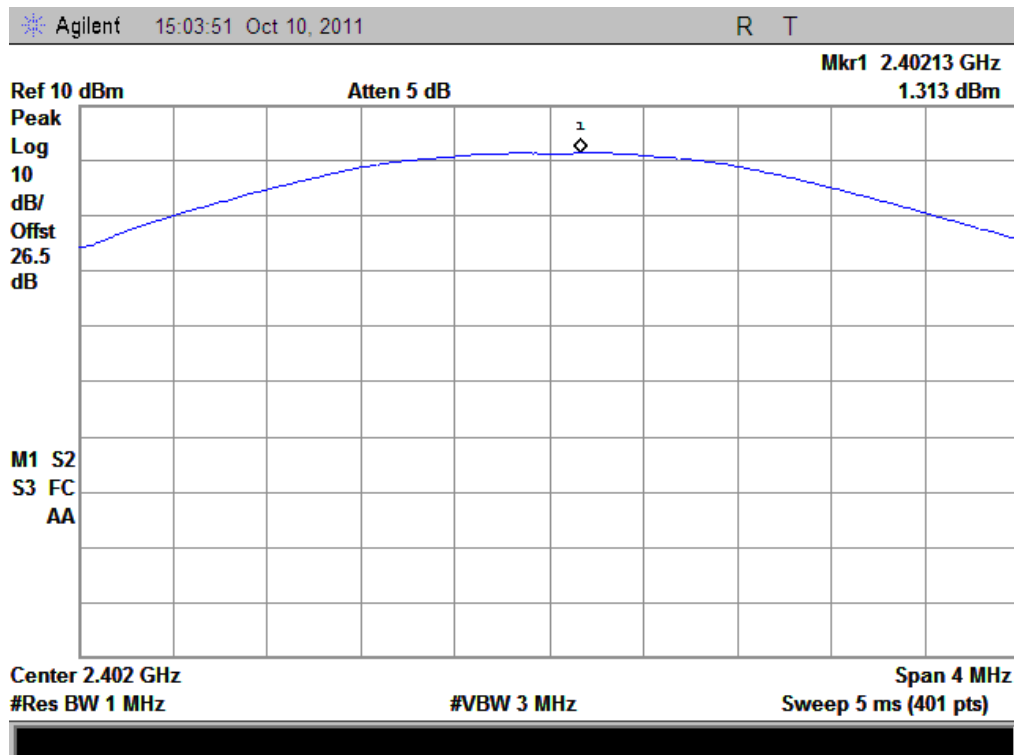

(Plot D: Channel = 2402)

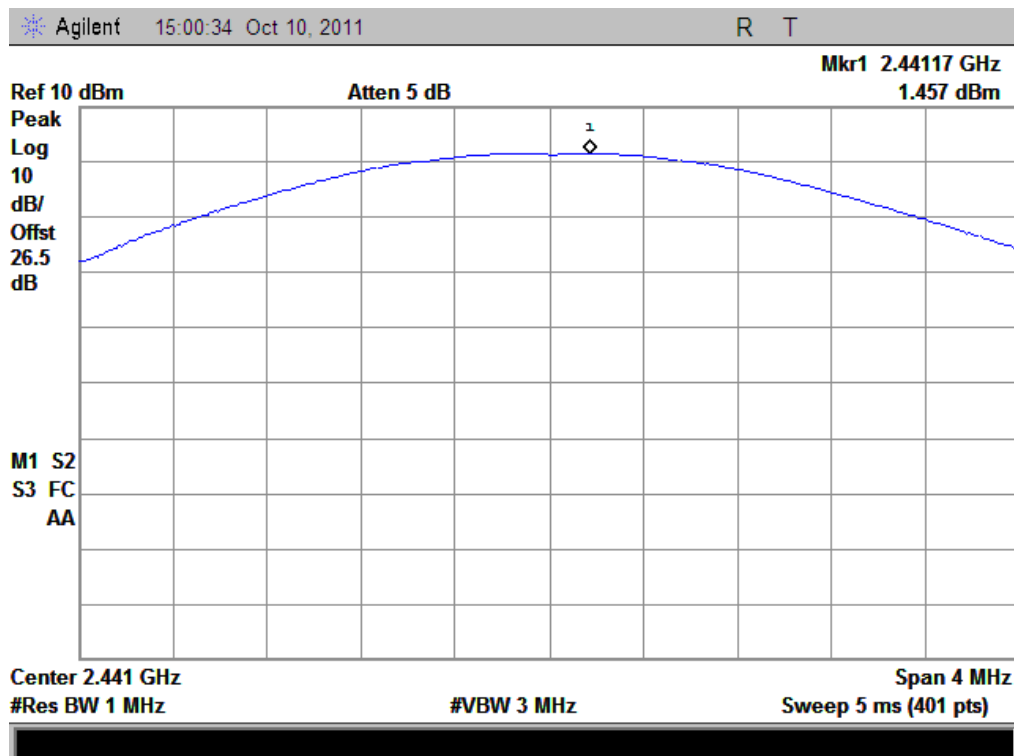

(Plot E: Channel = 2441)

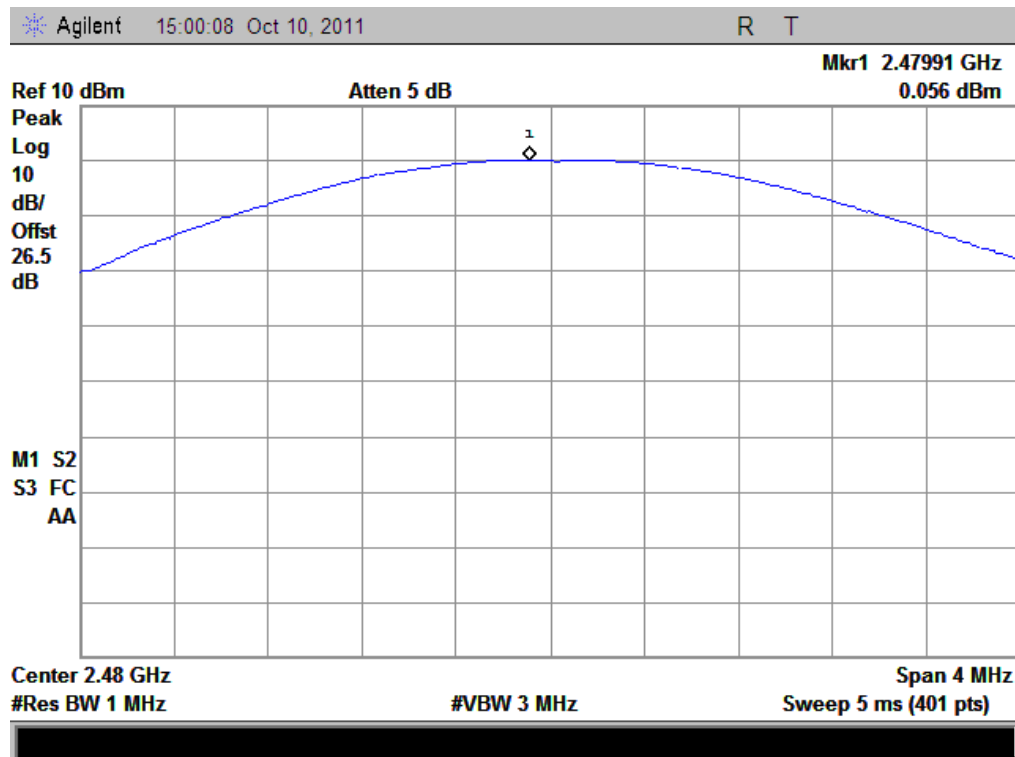


(Plot F: Channel = 2480)

E. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	1.343	0.001362	Plot G	30	1	PASS
39	2441	1.492	0.001410	Plot H			PASS
78	2480	0.217	0.001051	Plot I			PASS


F. Test Plot:

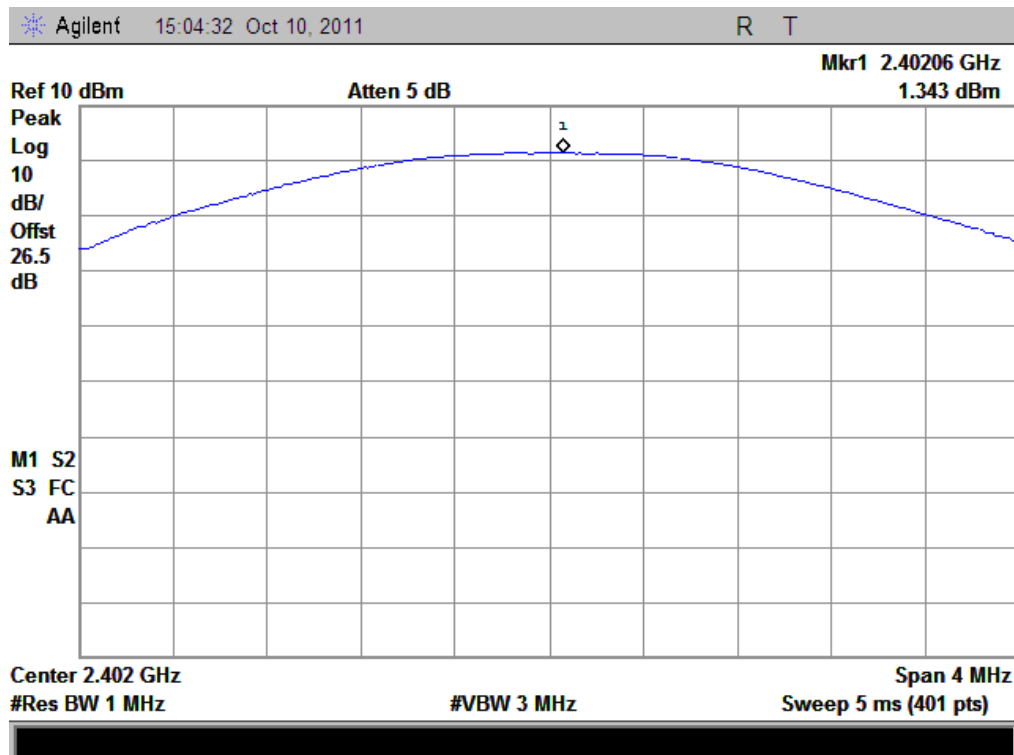

(Plot G: Channel = 2402)

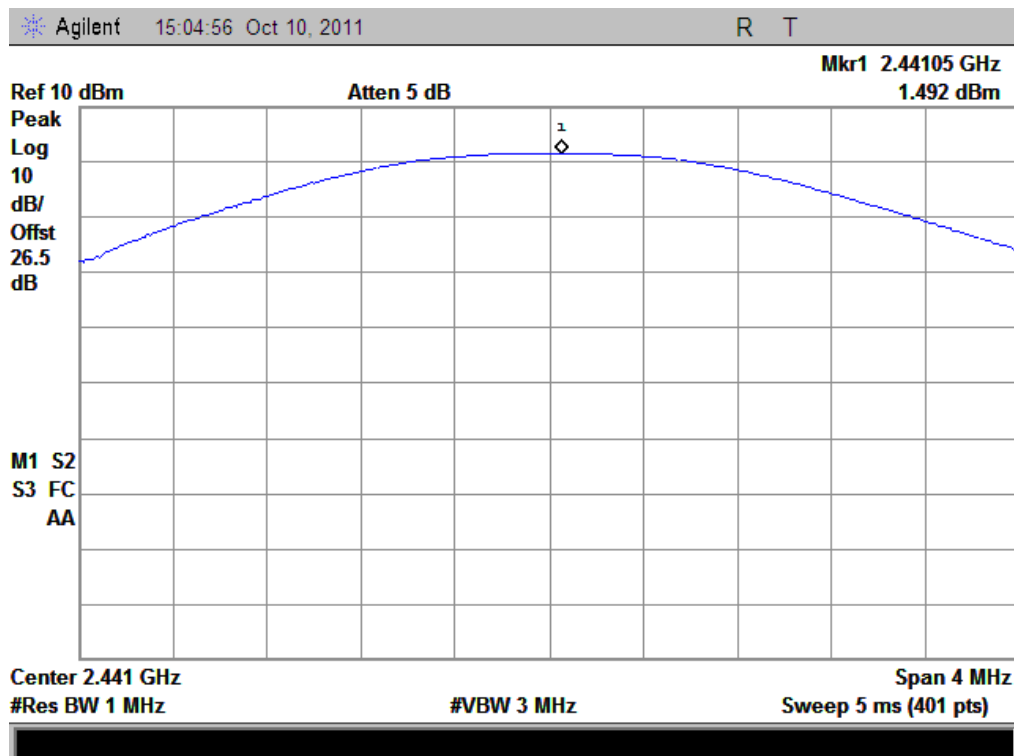

(Plot H: Channel = 2441)

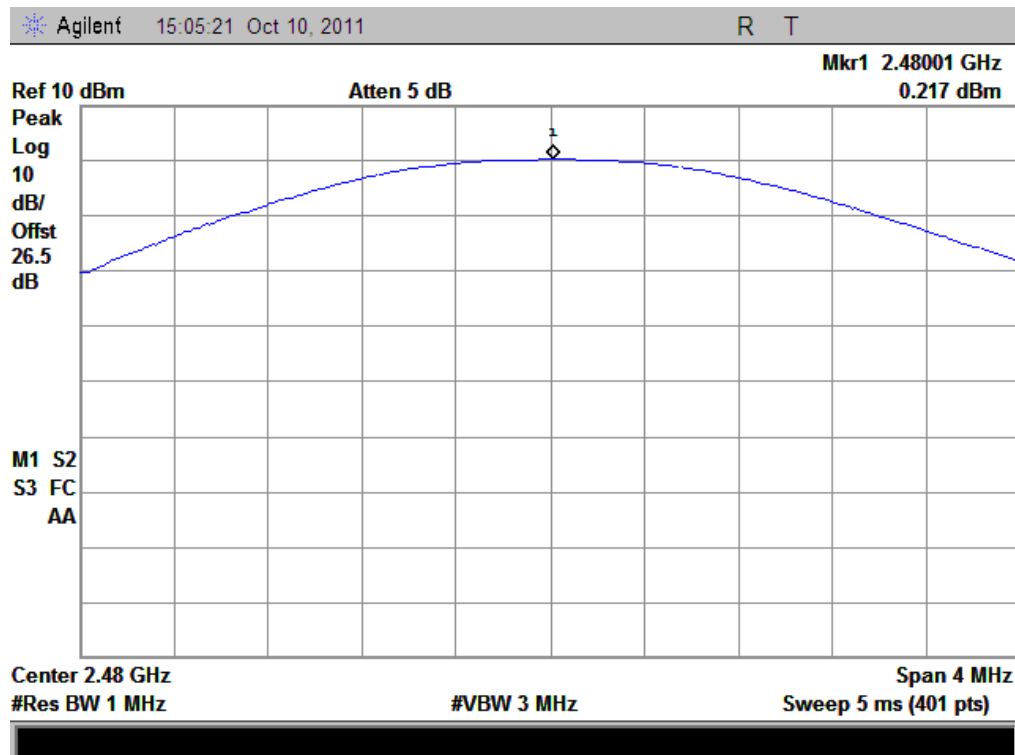

(Plot I: Channel = 2480)

2.3 20dB Bandwidth

2.3.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

GFSK Mode


The maximum 20dB bandwidth measured is 1.110MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.105	Plot A
39	2441	1.110	Plot B
78	2480	1.105	Plot C


B. Test Plot:

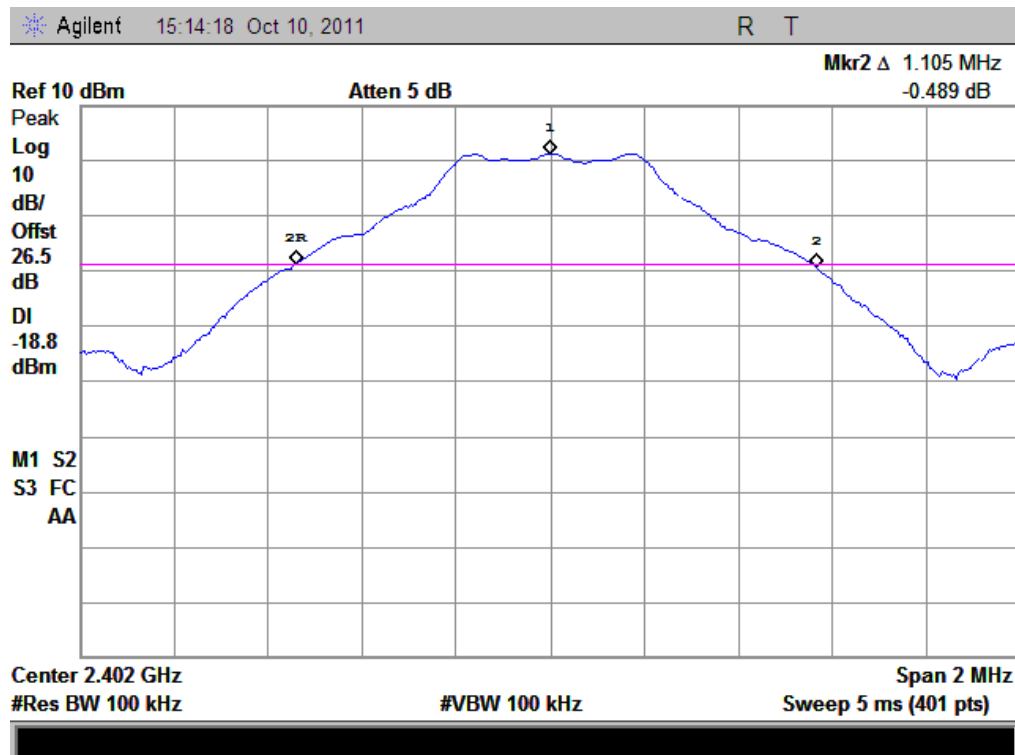

(Plot A: Channel = 2402)

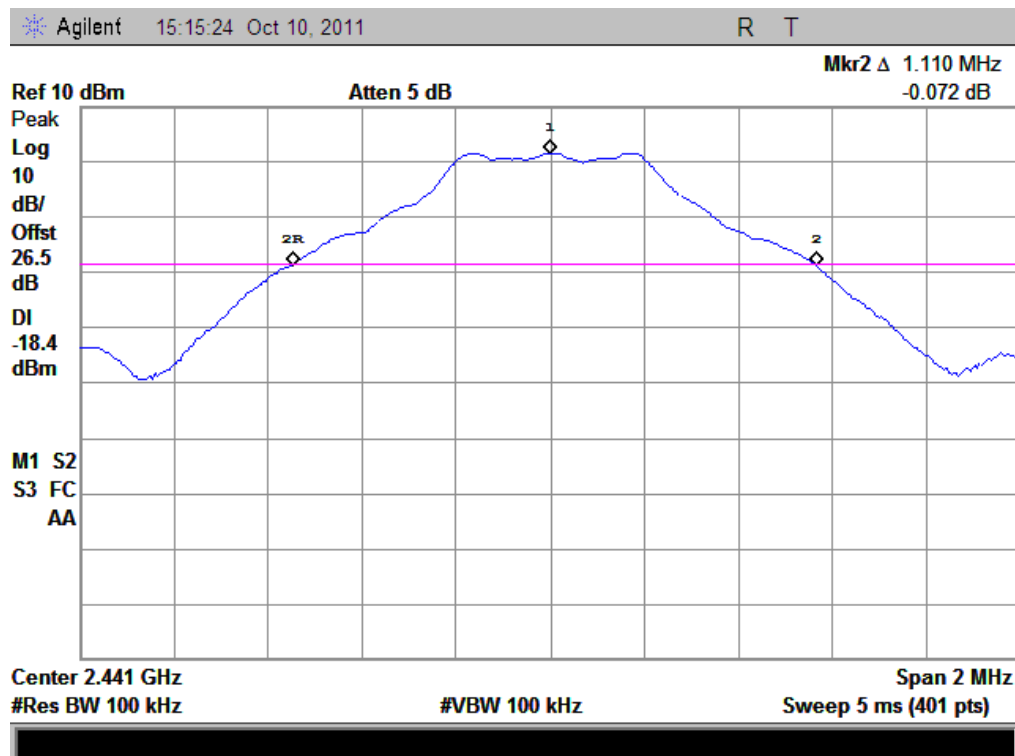

(Plot B: Channel = 2441)

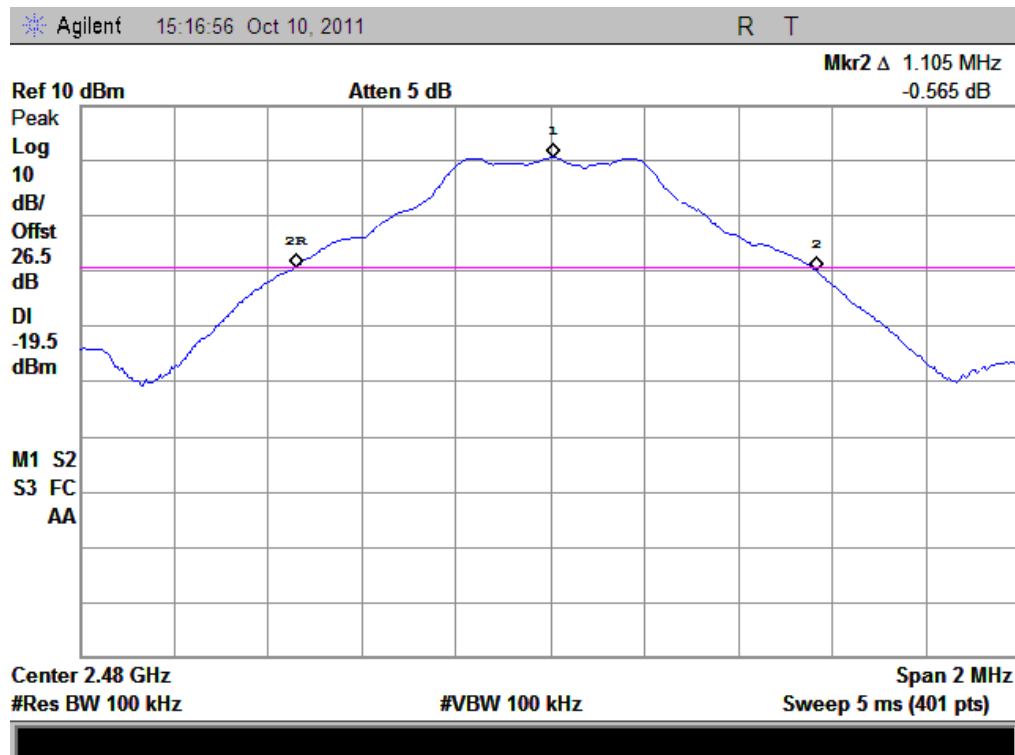

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


The maximum 20dB bandwidth measured is 1.440MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.440	Plot D
39	2441	1.430	Plot E
78	2480	1.415	Plot F


D. Test Plot:

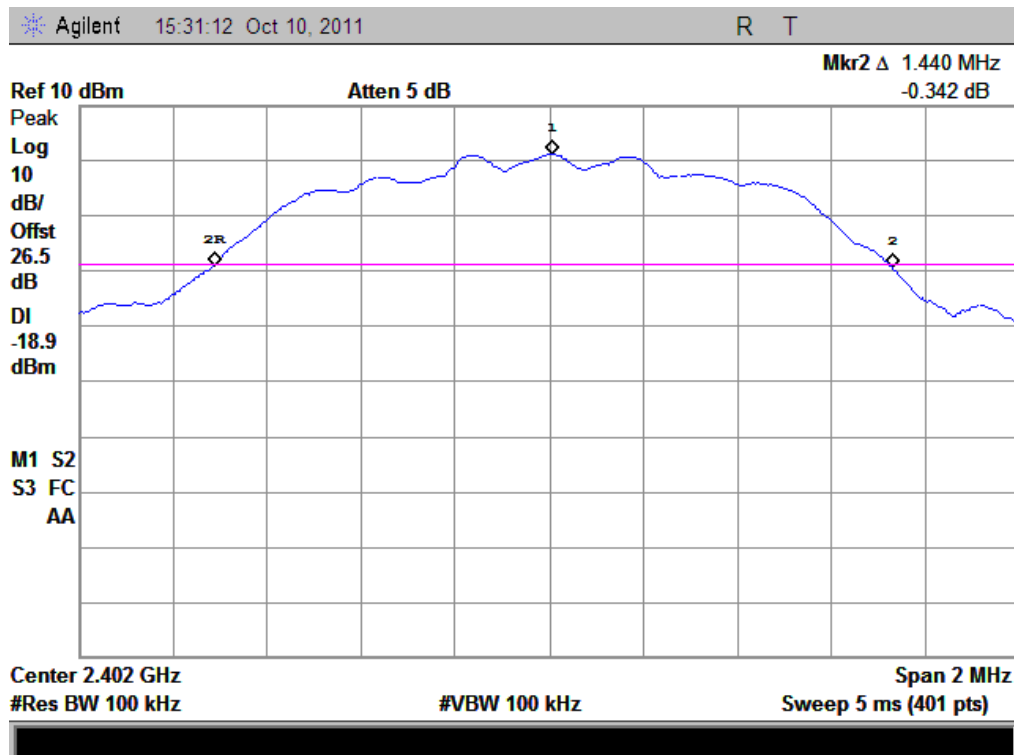

(Plot D: Channel = 2402)

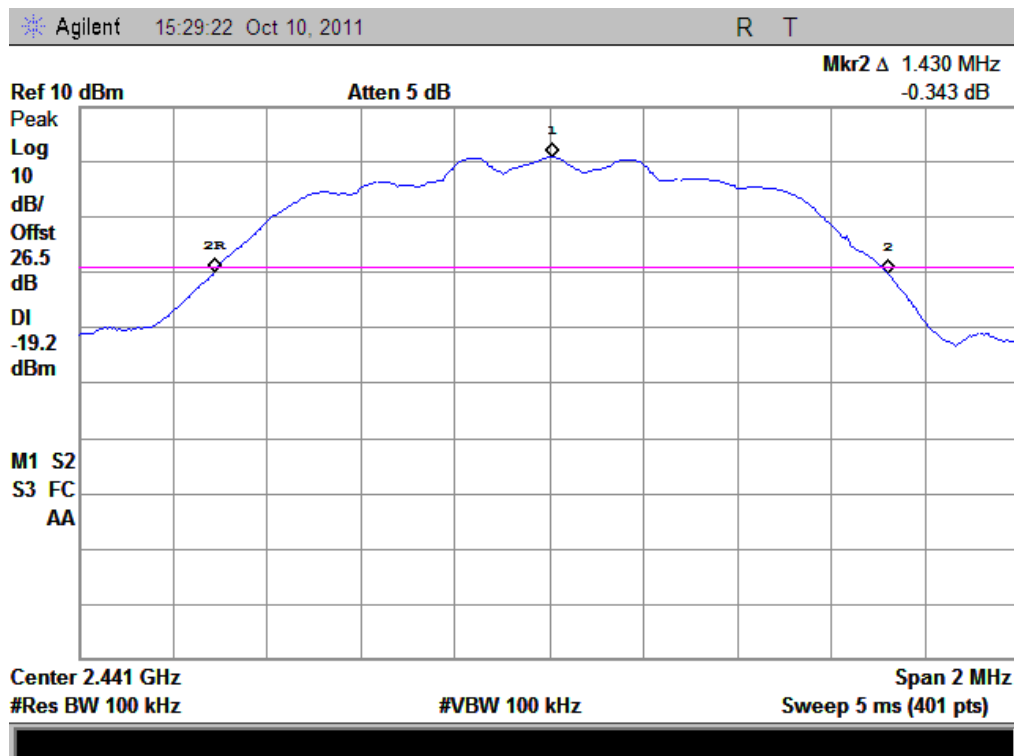

(Plot E: Channel = 2441)

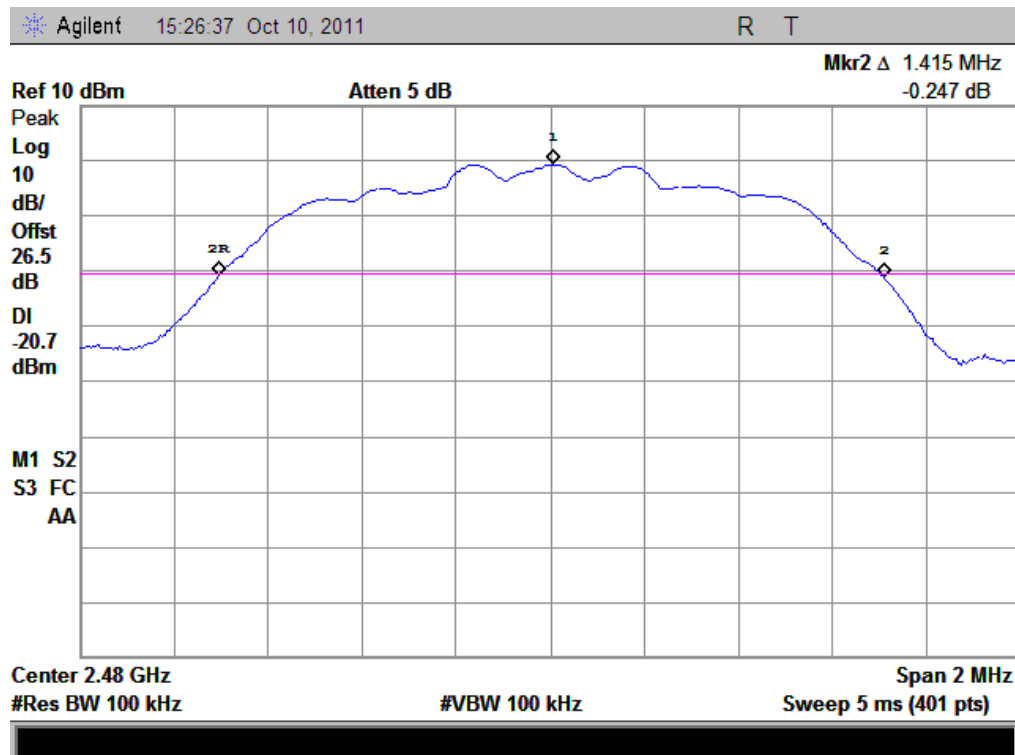

(Plot F: Channel = 2480)


E. Test Verdict:

8-DPSK Mode


The maximum 20dB bandwidth measured is 1.460MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.460	Plot G
39	2441	1.415	Plot H
78	2480	1.415	Plot I


F. Test Plot:

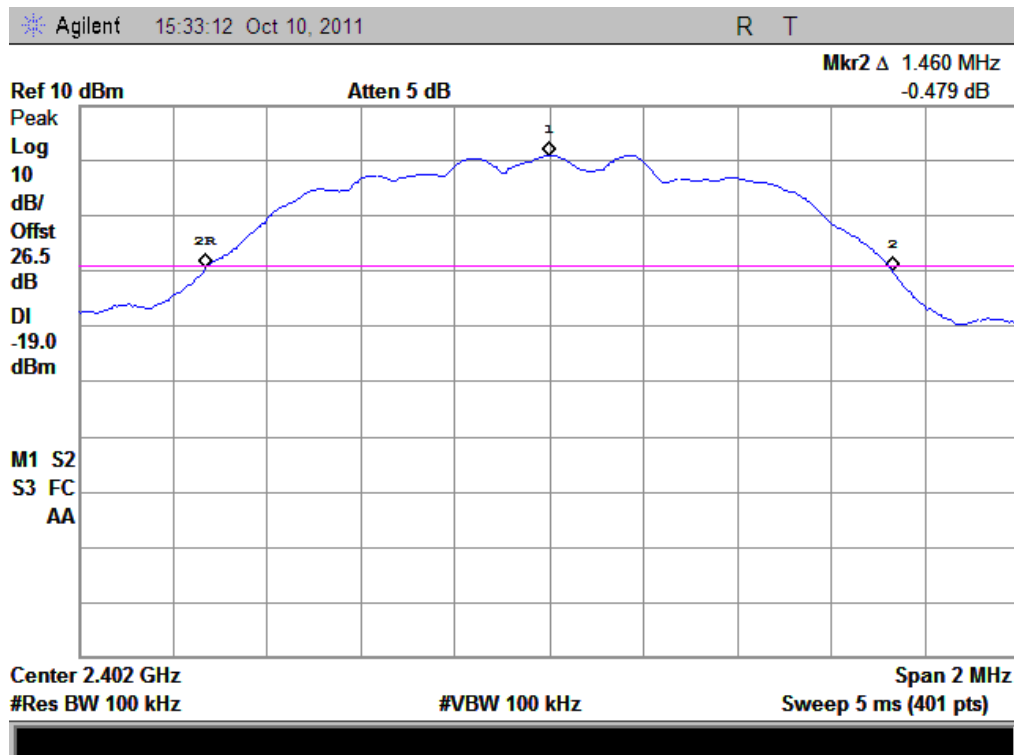

(Plot G: Channel = 2402)

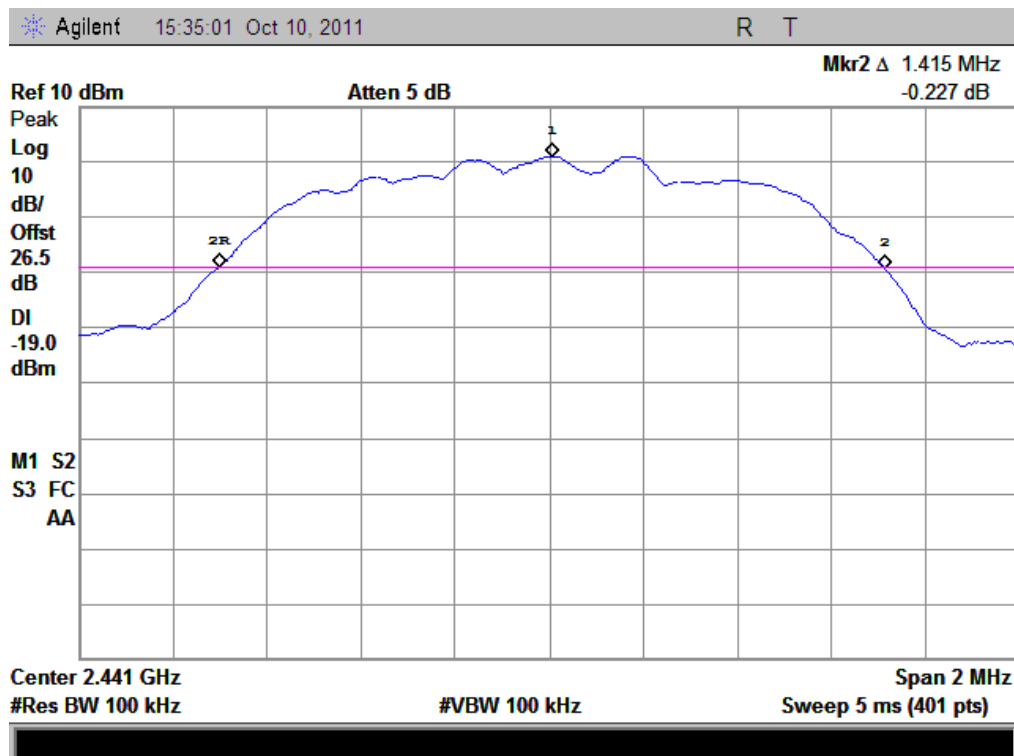

(Plot H: Channel = 2441)

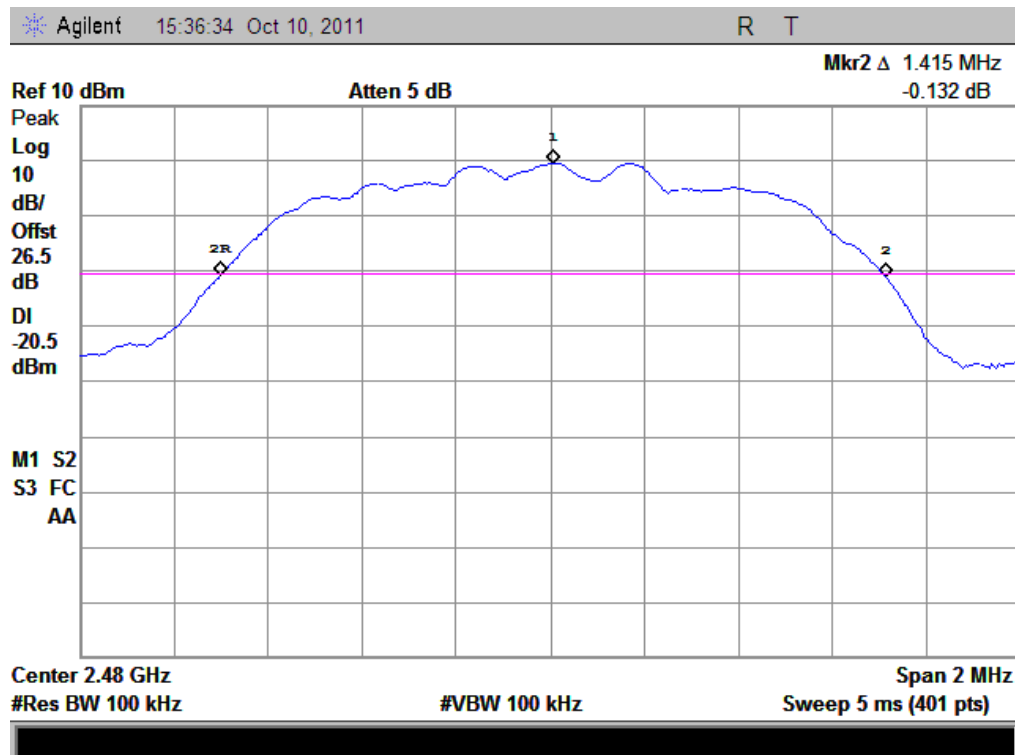

(Plot I: Channel = 2480)

2.4 Carried Frequency Separation

2.4.1 Definition

According to FCC §15.247(a)(1) RSS-210 A8.1 (2), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


2.4.2 Test Description

See section 2.1.2 of this report.



2.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (1.110MHz for GFSK mode, 1.440MHz for $\pi/4$ -DQPSK mode and 1.460MHz for 8-DPSK mode, refer to section 2.3.3), whichever is greater. So, the verdict is PASS.

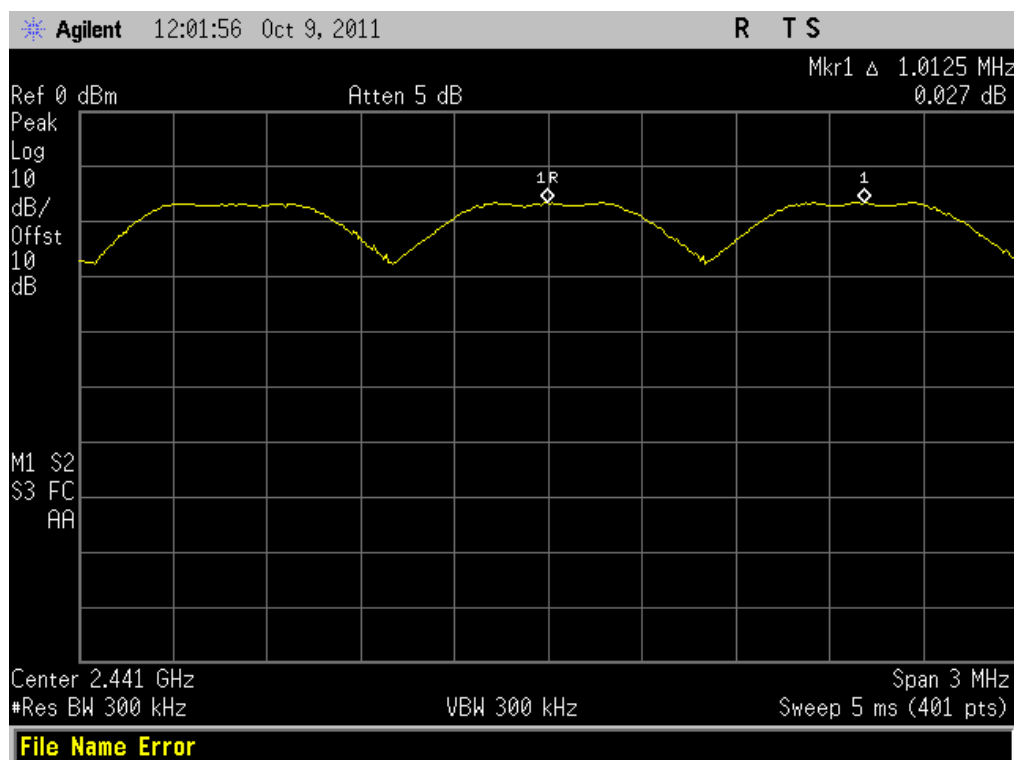

(Plot A: GFSK)

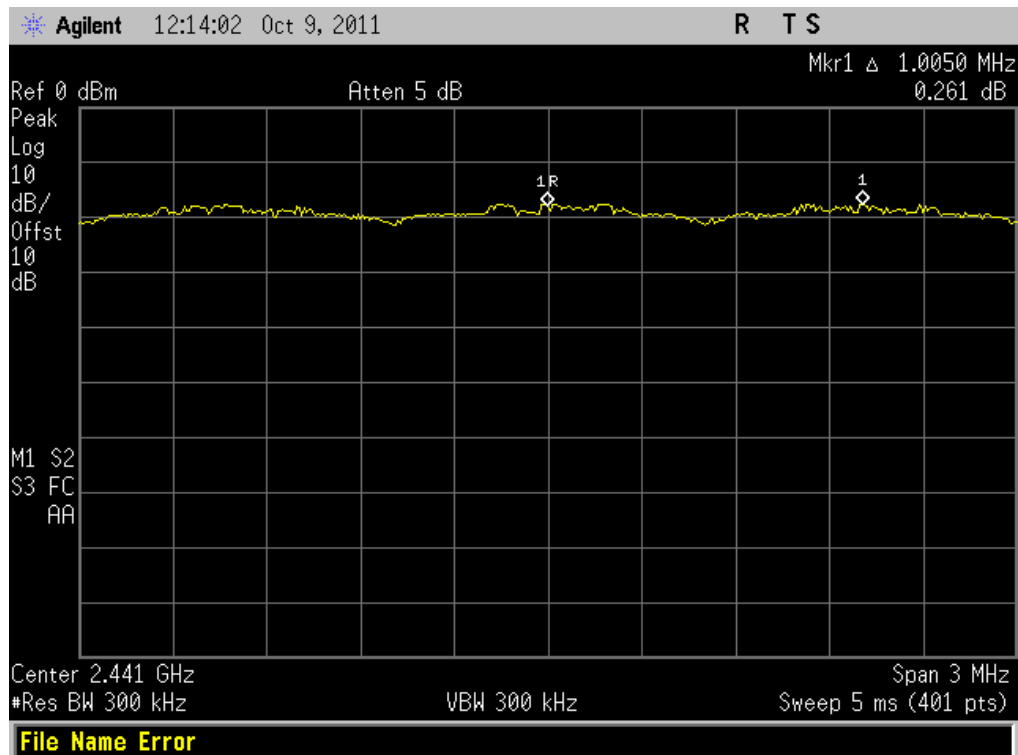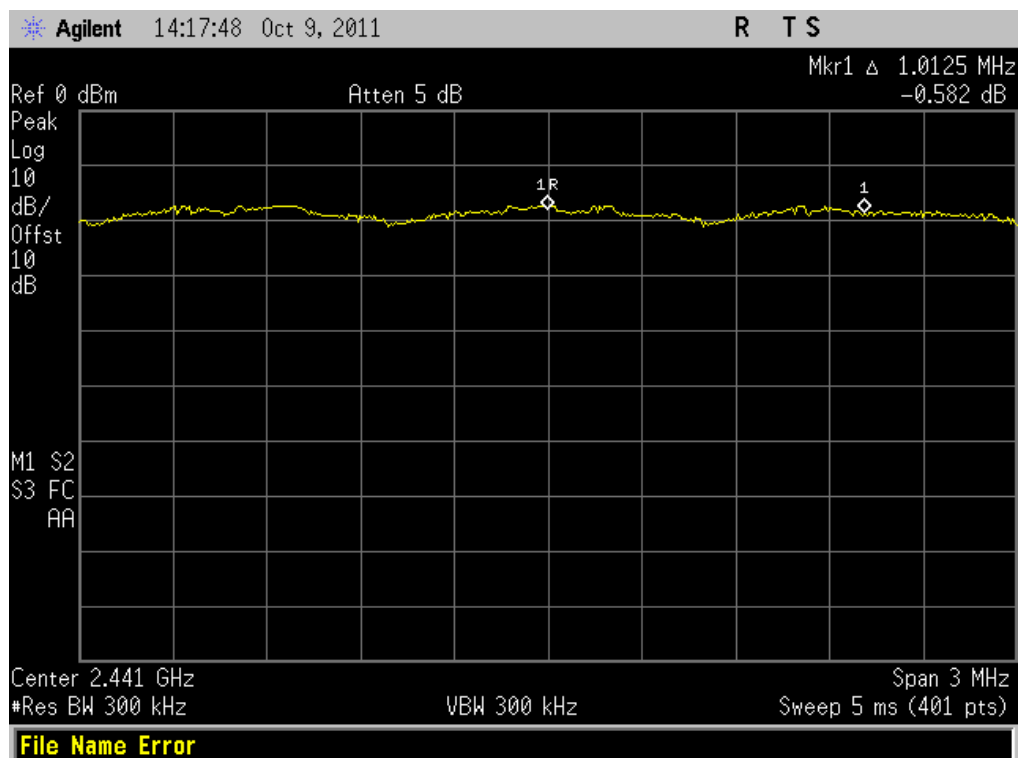
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

2.5 Time of Occupancy (Dwell time)

2.5.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	0.40	Plot A	42.667	400	PASS
39	2441	0.39	Plot B	41.600		PASS
78	2480	0.40	Plot C	42.667		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

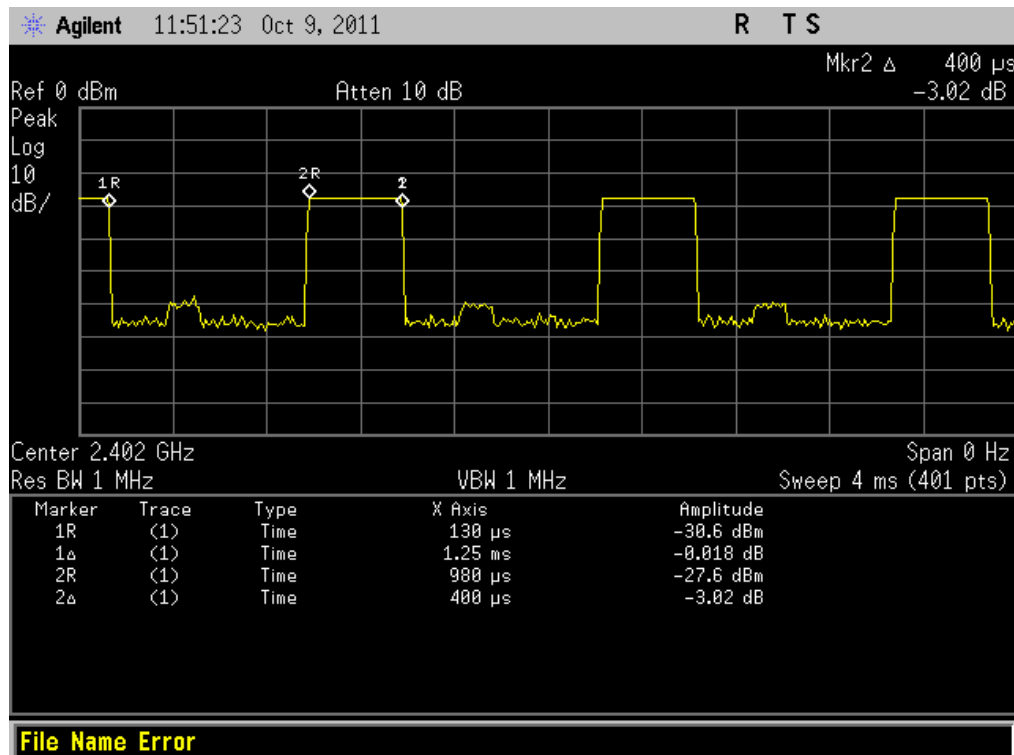

(Plot A: Channel = 2402)

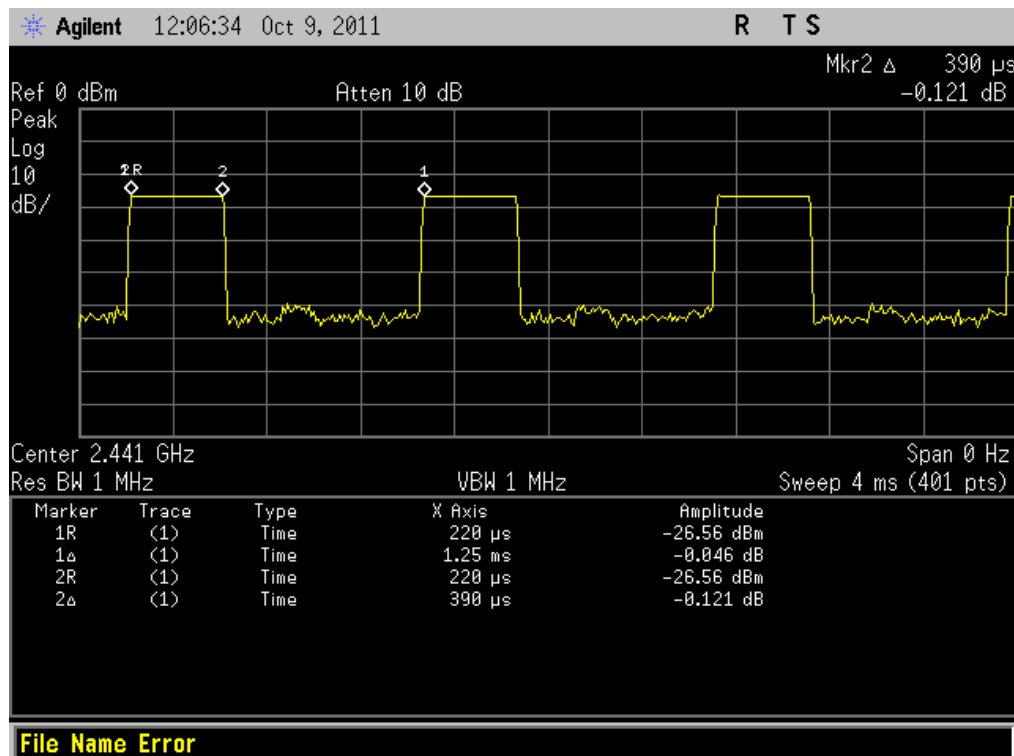

(Plot B: Channel = 2441)

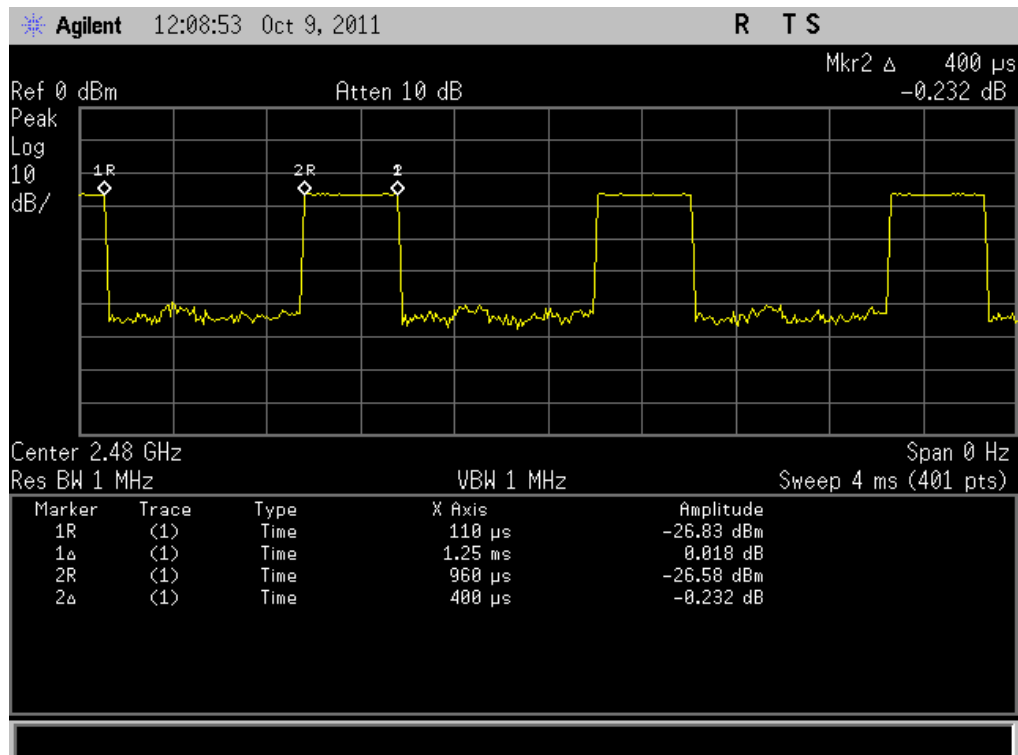

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.91	Plot D	310.400	400	PASS
39	2441	2.91	Plot E	310.400		PASS
78	2480	2.92	Plot F	311.467		PASS

D. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

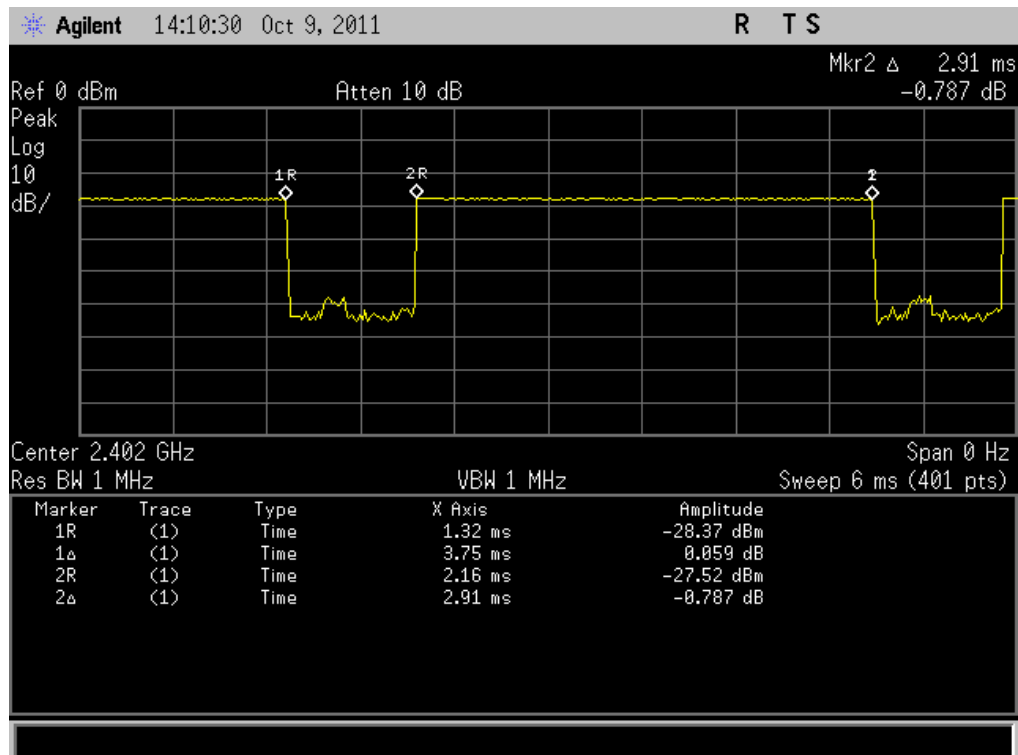

(Plot D: Channel = 2402)

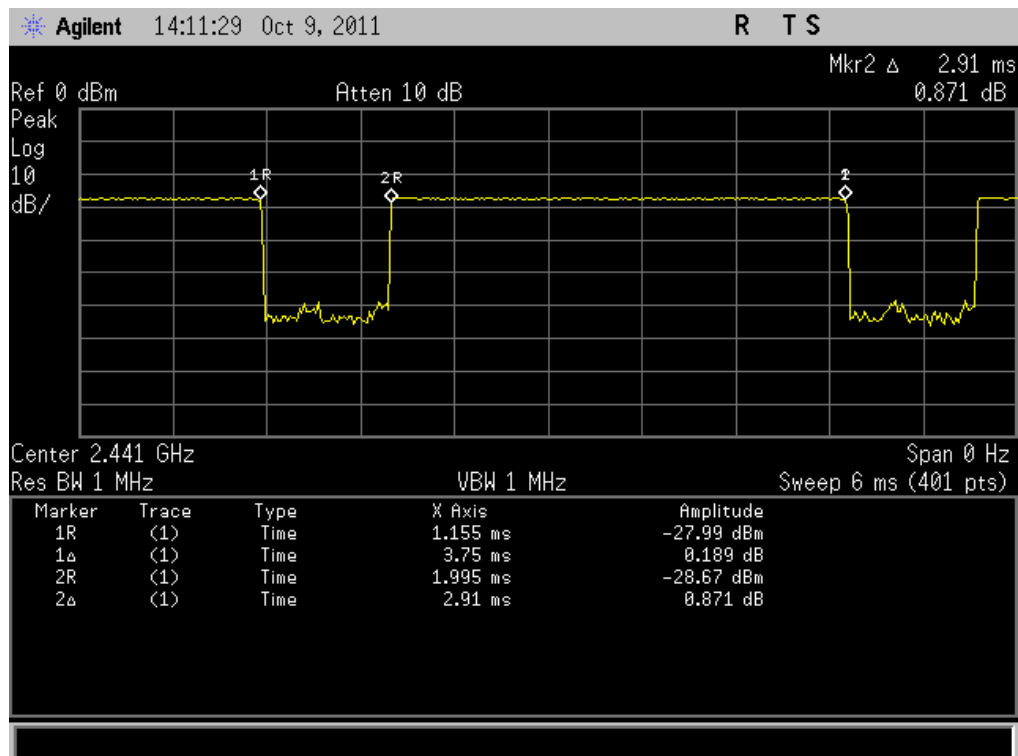

(Plot E: Channel = 2441)

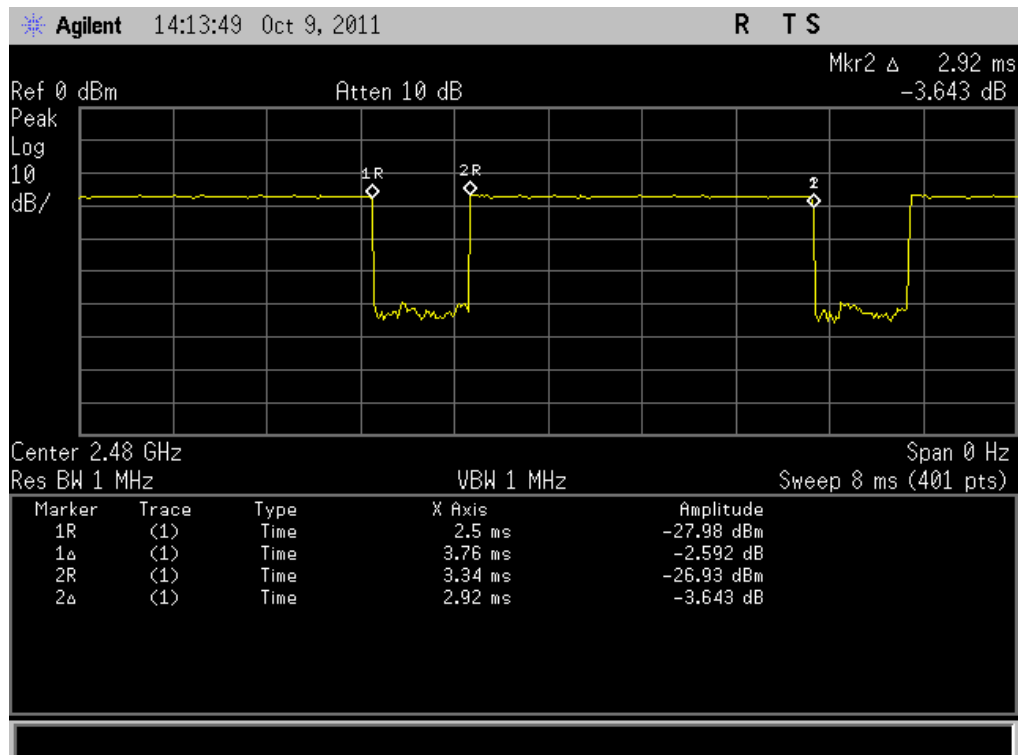

(Plot F: Channel = 2480)


E. Test Verdict (8-DPSK mode):

8-DPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.92	Plot G	311.467	400	PASS
39	2441	2.92	Plot H	311.467		PASS
78	2480	2.91	Plot I	310.400		PASS

F. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

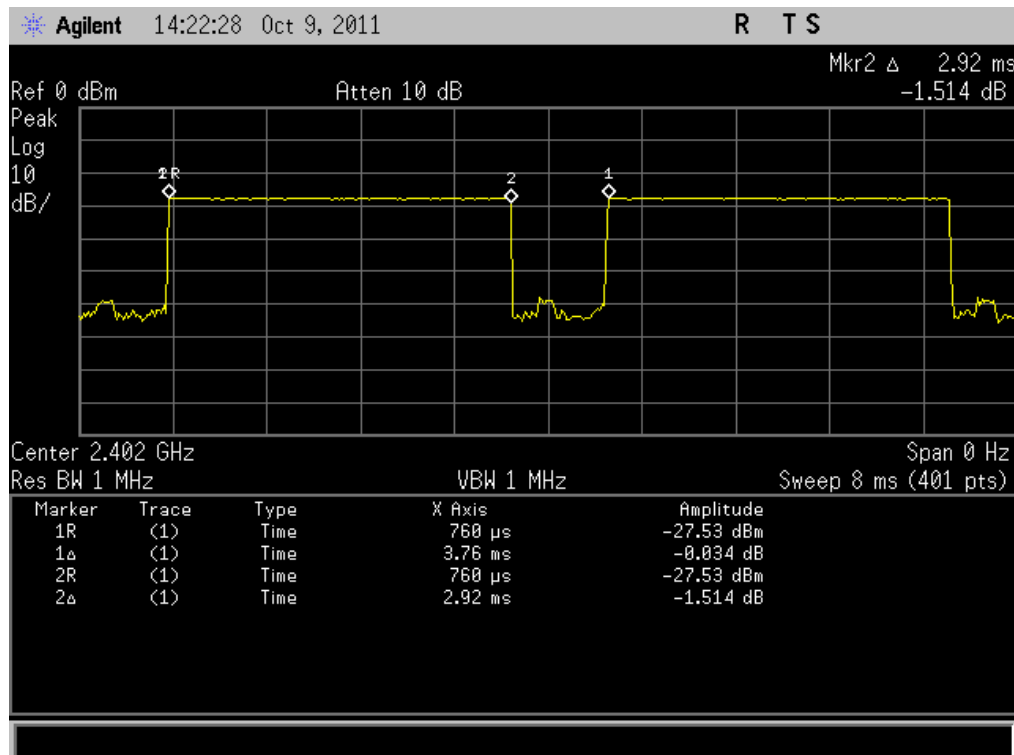

(Plot G: Channel = 2402)

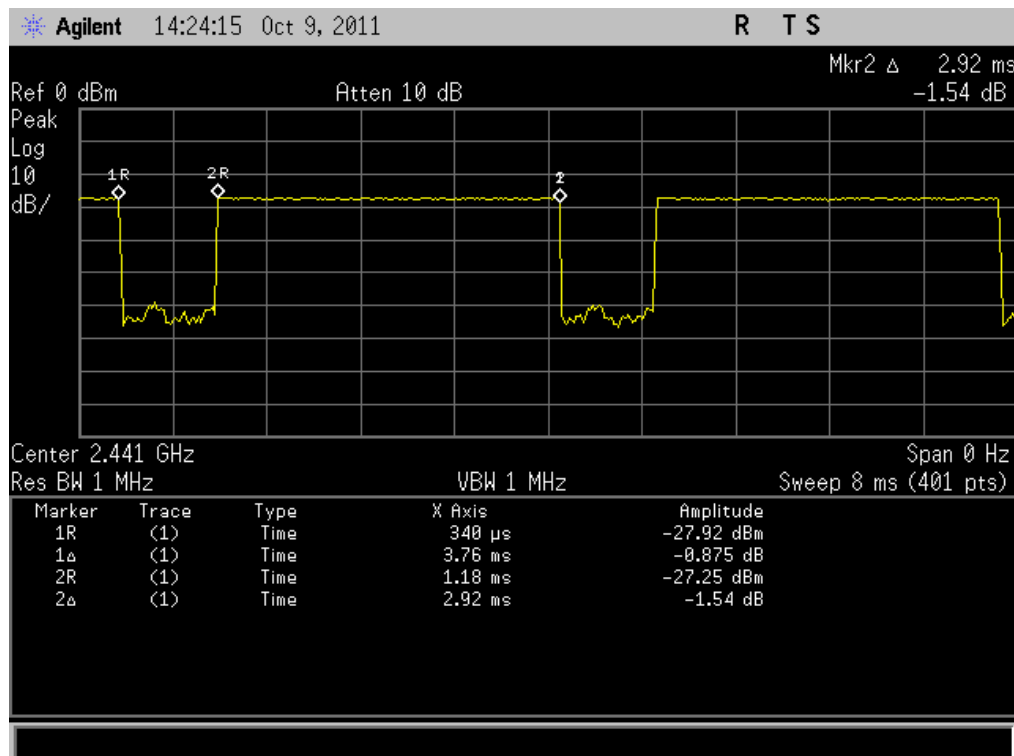

(Plot H: Channel = 2441)

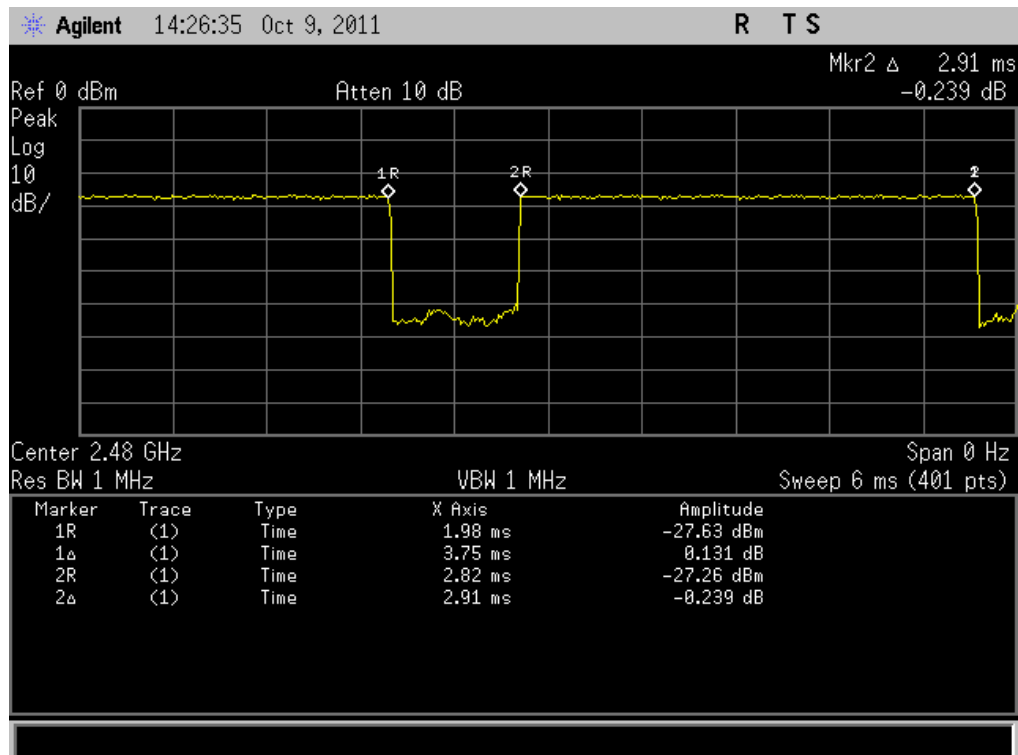

(Plot I: Channel = 2480)

2.6 Conducted Spurious Emissions

2.6.1 Requirement

According to FCC §15.247(c) and RSS-A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-49.56	Plot A.1/A.2	1.362	-18.6	PASS
39	2441	-48.85	Plot B.1/B.2	1.083	-18.9	PASS
78	2480	-45.85	Plot C.1/C.2	0.442	-19.6	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

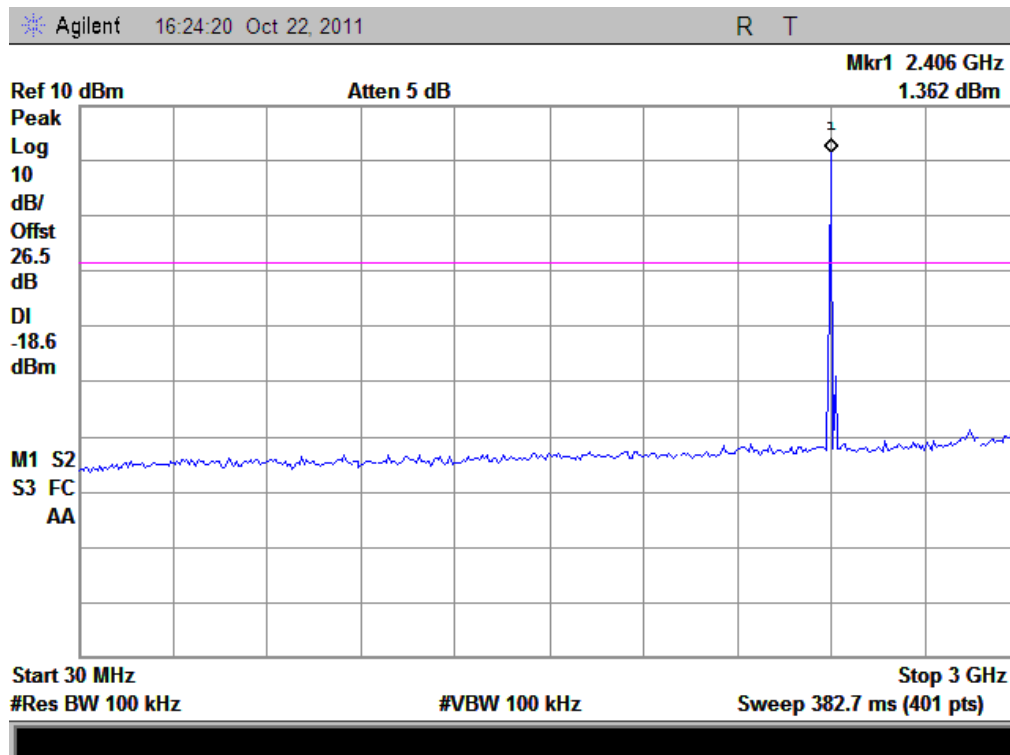


(Plot A.1: Channel = 0, 30MHz to 3GHz)

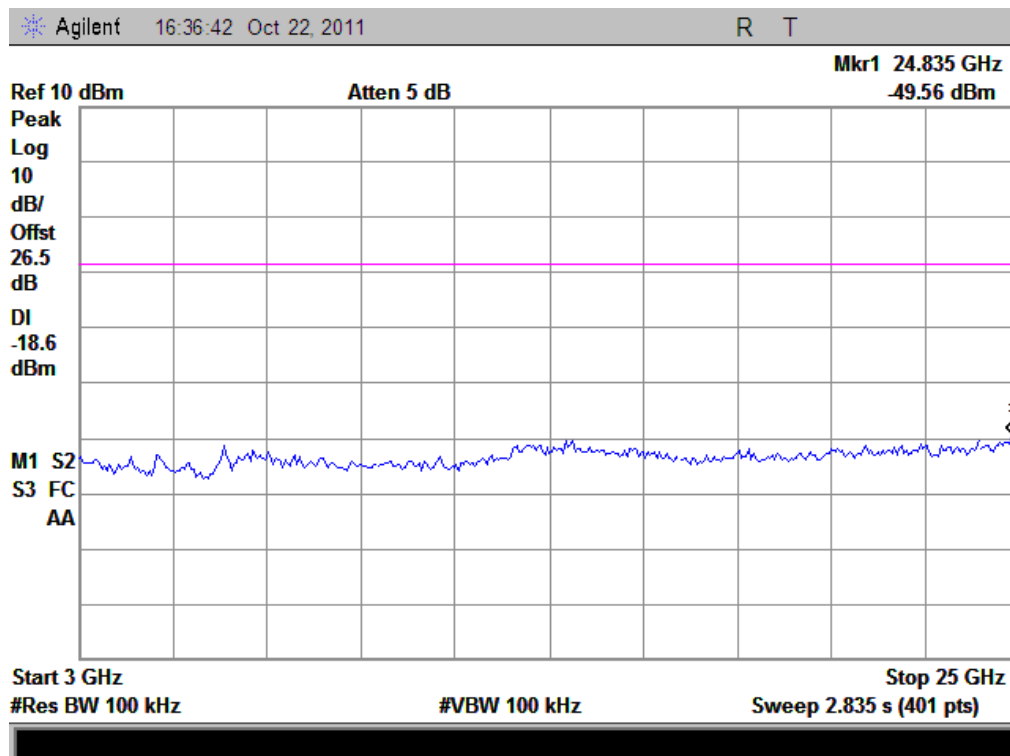


(Plot A.2: Channel = 0, 3GHz to 25GHz)

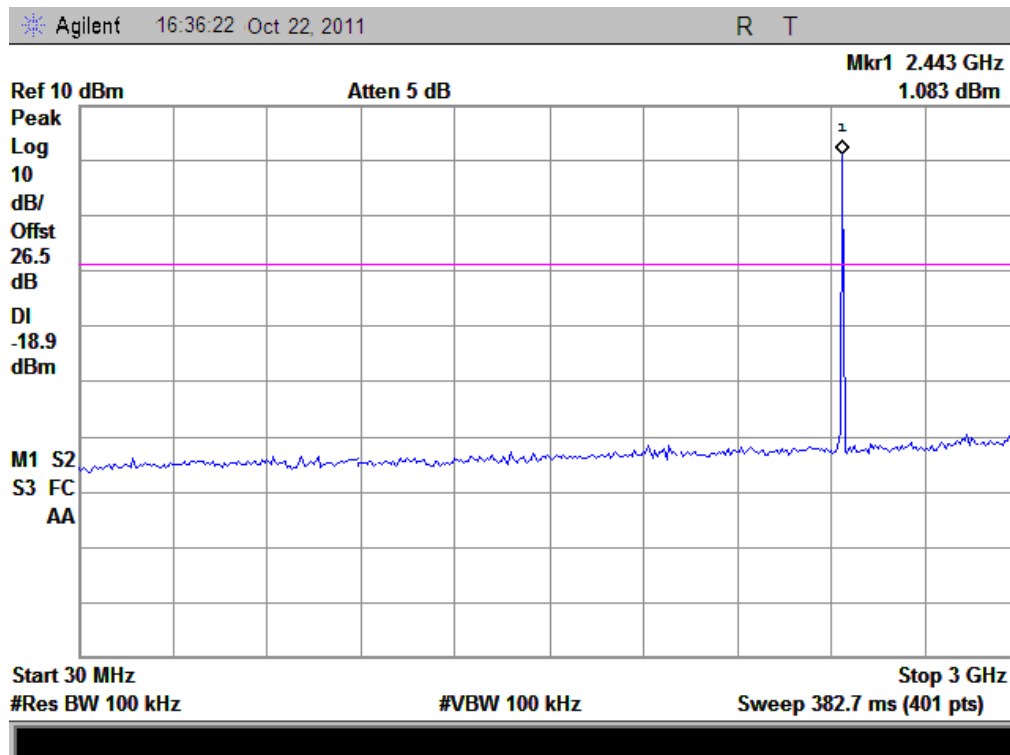


(Plot B.1: Channel = 39, 30MHz to 3GHz)

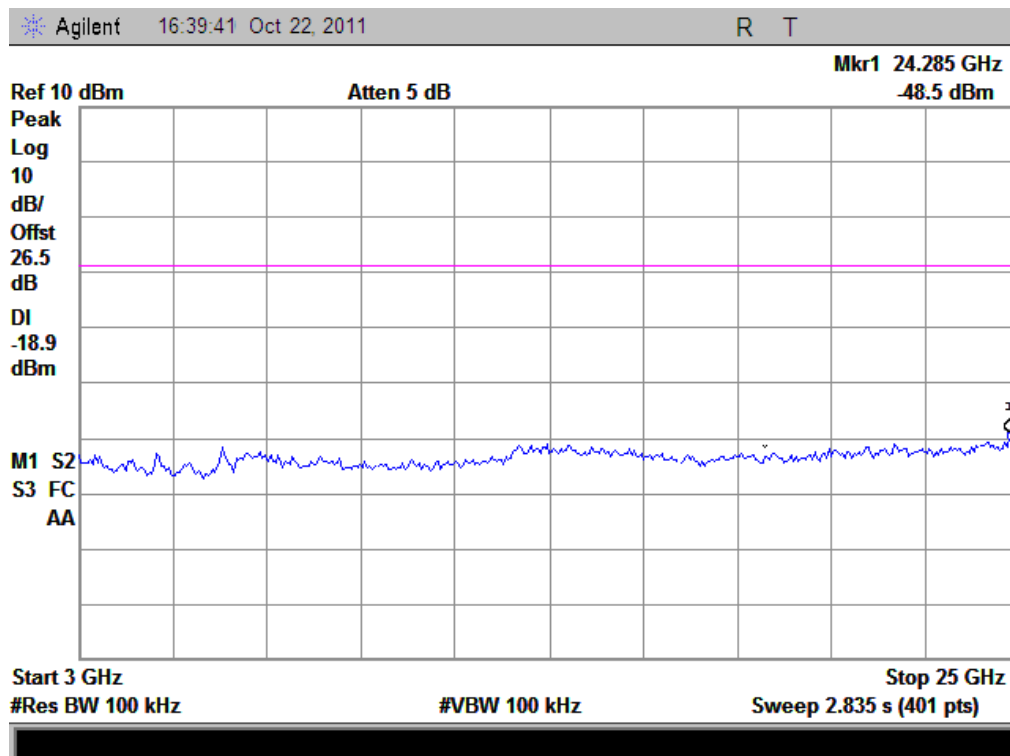

(Plot B.2: Channel = 39, 3GHz to 25GHz)

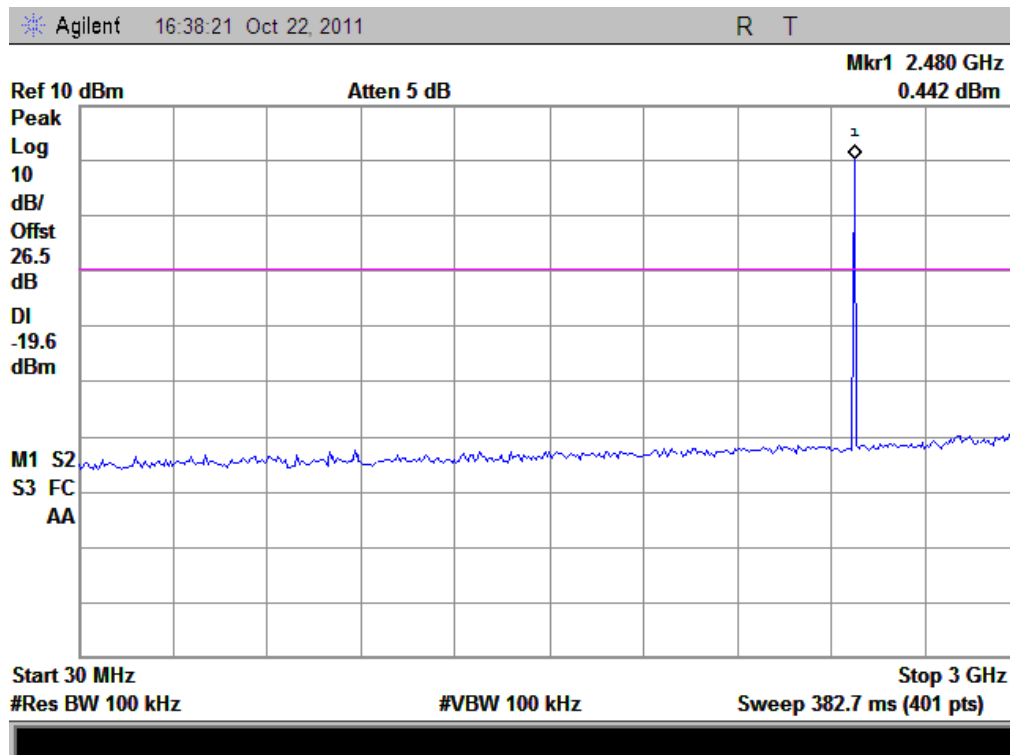

(Plot C.1: Channel = 78, 30MHz to 3GHz)

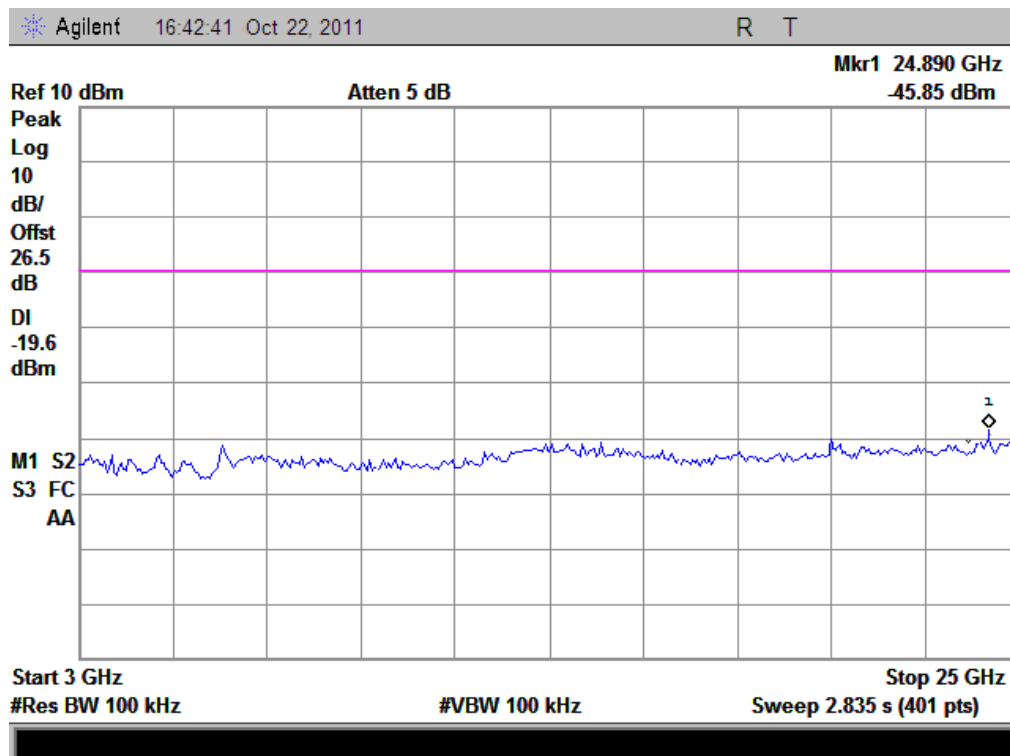

(Plot C.2: Channel = 78, 3GHz to 25GHz)


C. Test Verdict:

$\pi/4$ -DQPSK Mode



Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-50.72	Plot D.1/D.2	0.652	-19.3	PASS
39	2441	-49.61	Plot E.1/E.2	0.272	-19.7	PASS
78	2480	-48.32	Plot F.1/F.2	-1.089	-21.1	PASS


D. Test Plot:

Note: the power of the Module transmitting frequency should be ignored.

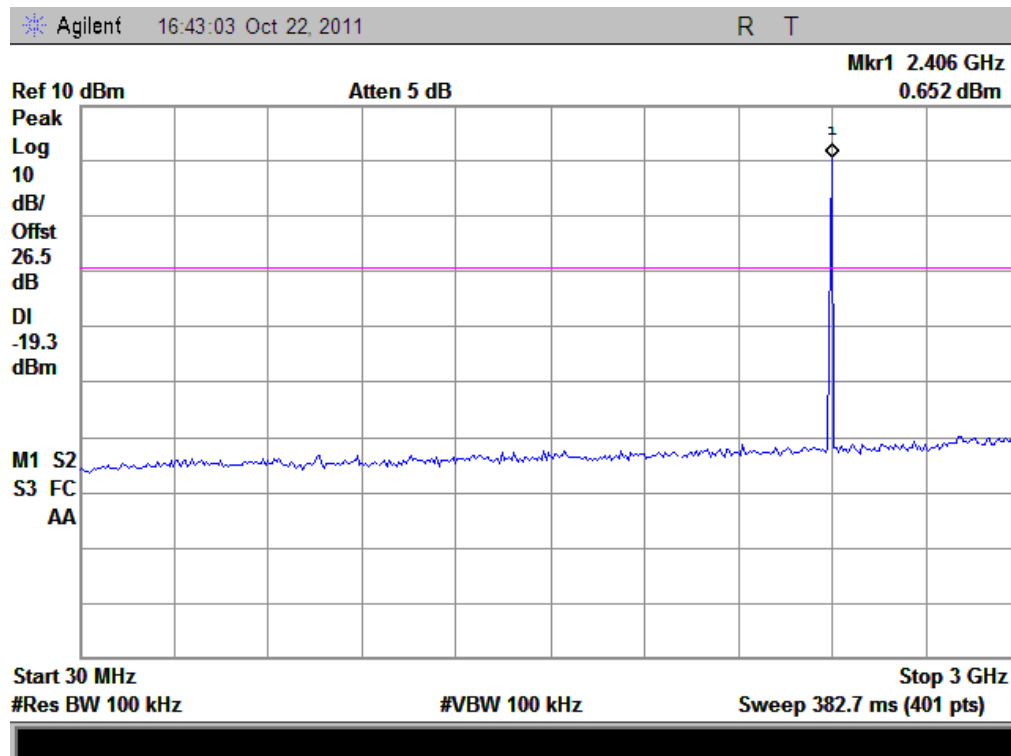


(Plot D.1: Channel = 0, 30MHz to 3GHz)

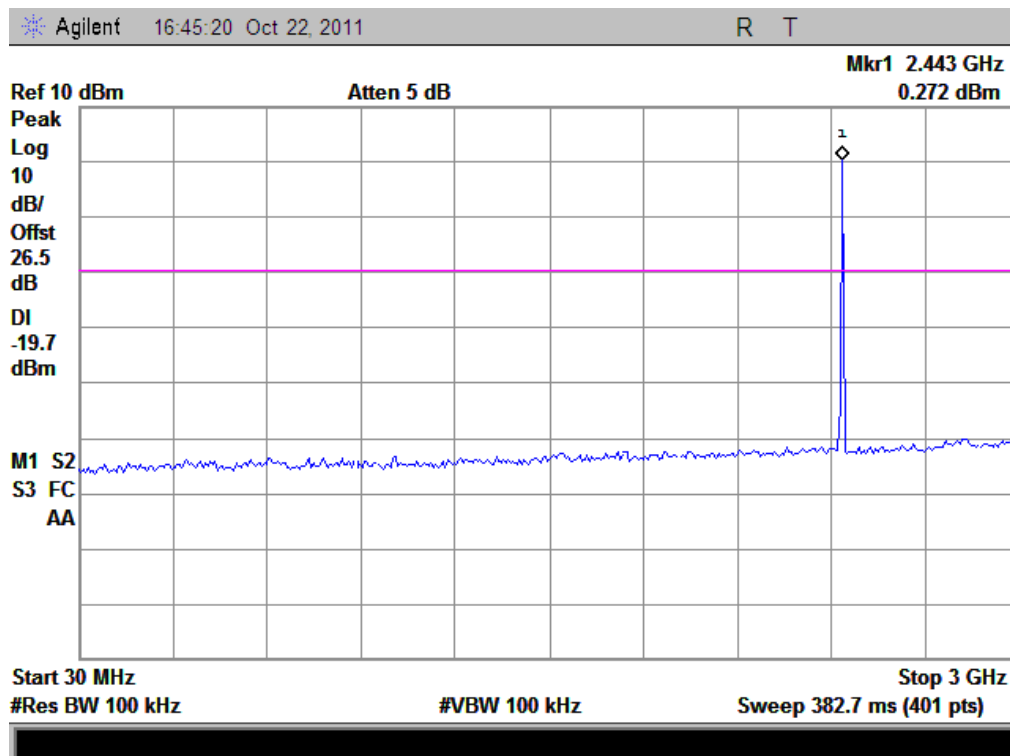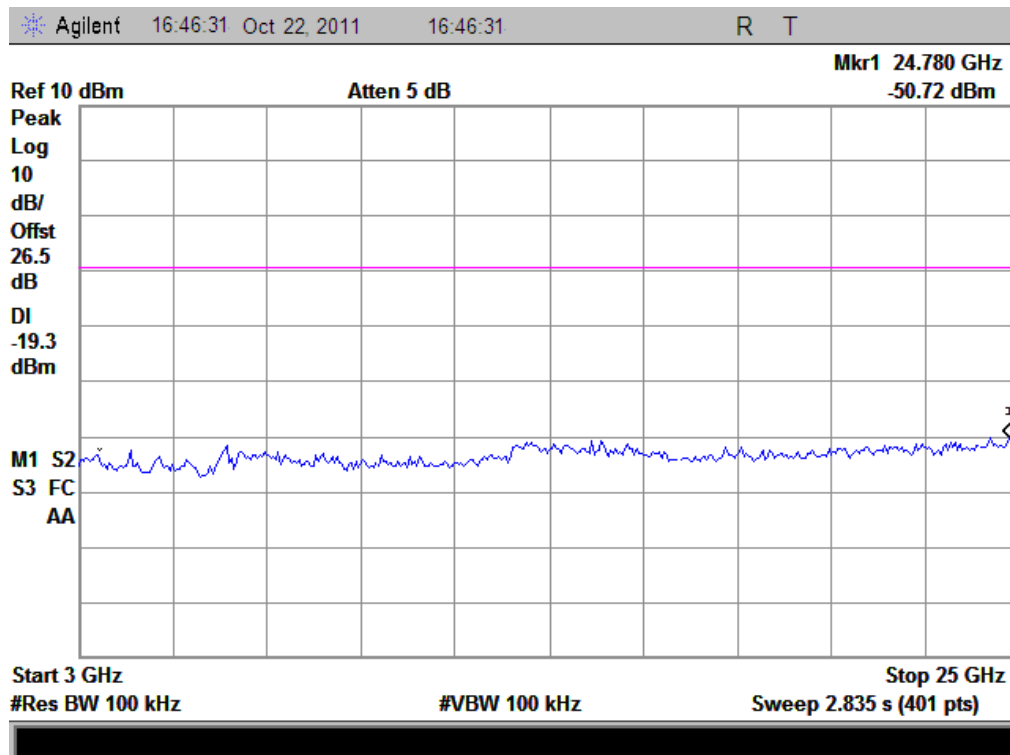


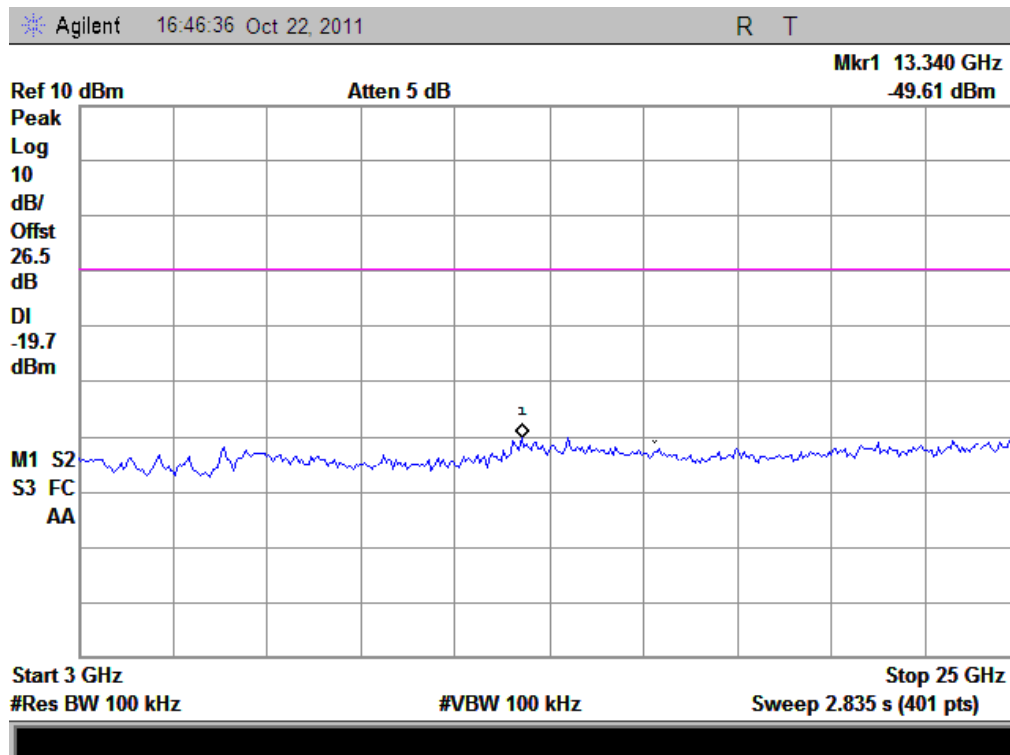

(Plot E.2: Channel = 39, 3GHz to 25GHz)

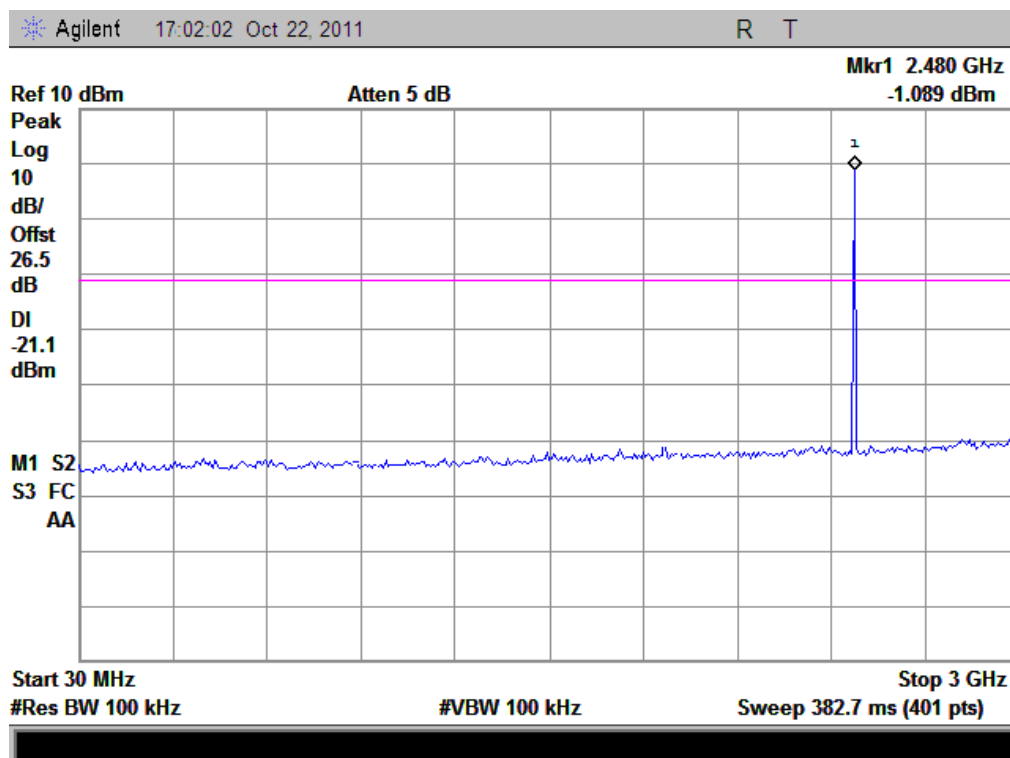

(Plot F.1: Channel = 78, 30MHz to 3GHz)

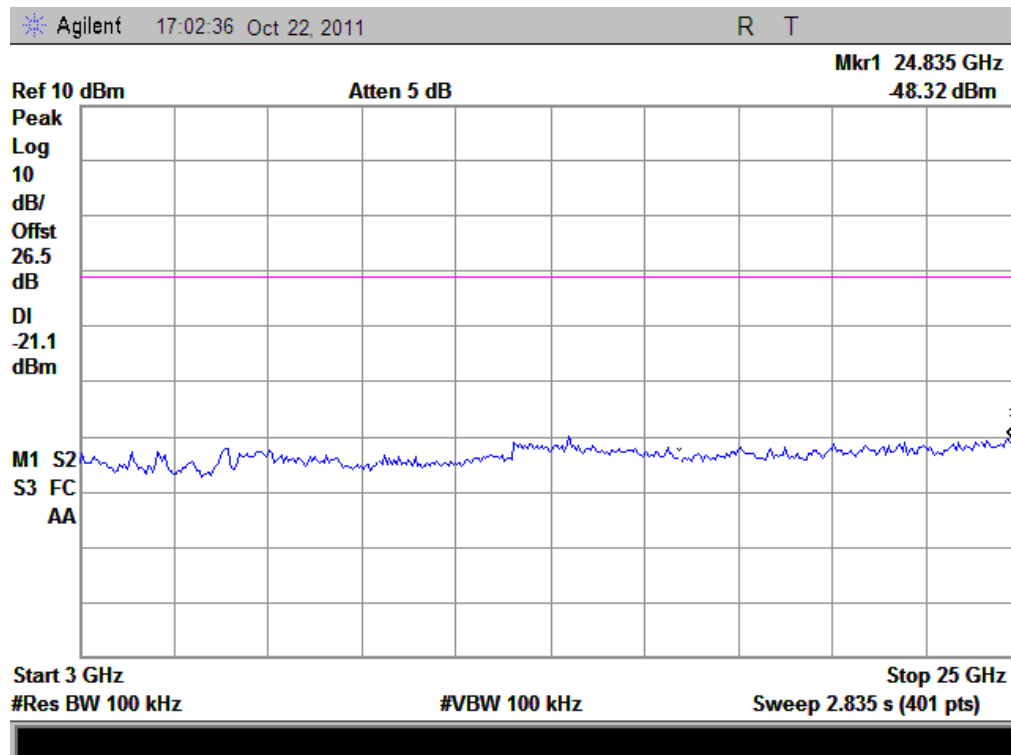

(Plot F.2: Channel = 78, 3GHz to 25GHz)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-48.52	Plot G.1/G.2	1.142	-18.9	PASS
39	2441	-50.11	Plot H.1/H.2	1.124	-18.9	PASS
78	2480	-49.48	Plot I.1/I.2	-0.381	-20.4	PASS

F. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

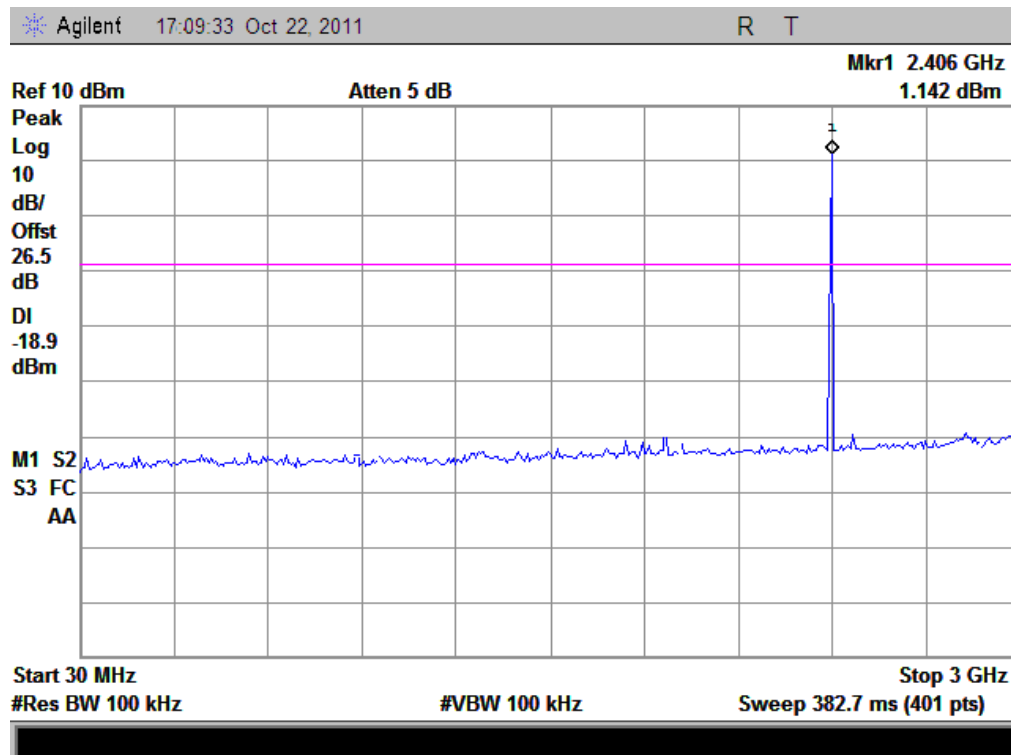


(Plot G.1: Channel = 0, 30MHz to 3GHz)

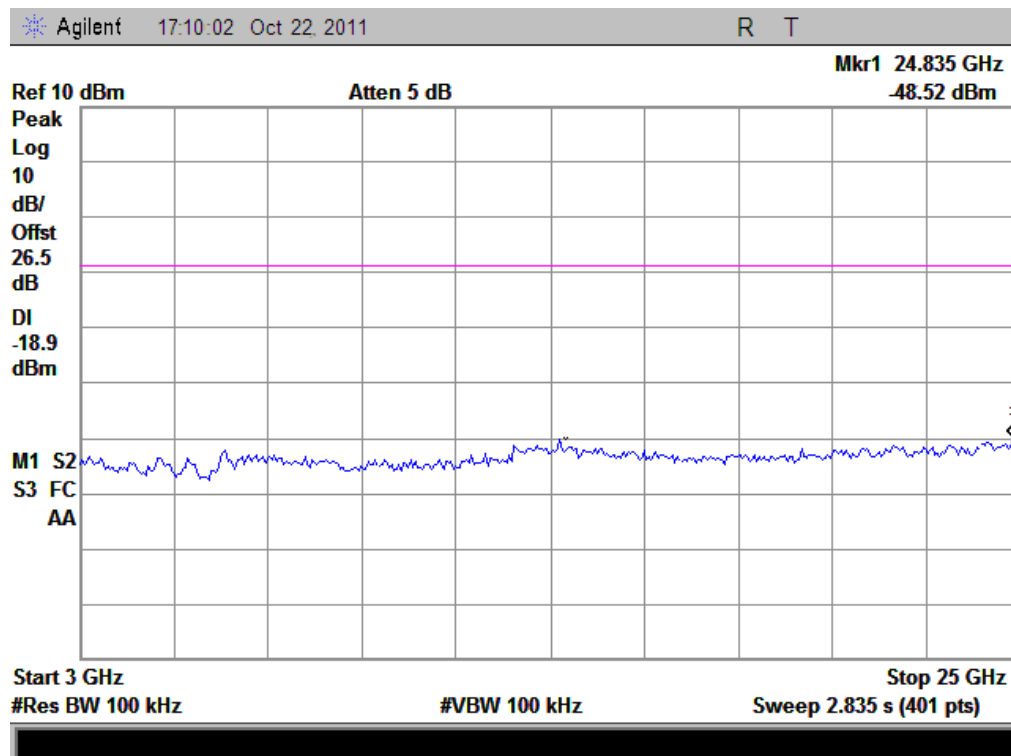


(Plot G.2: Channel = 0, 3GHz to 25GHz)

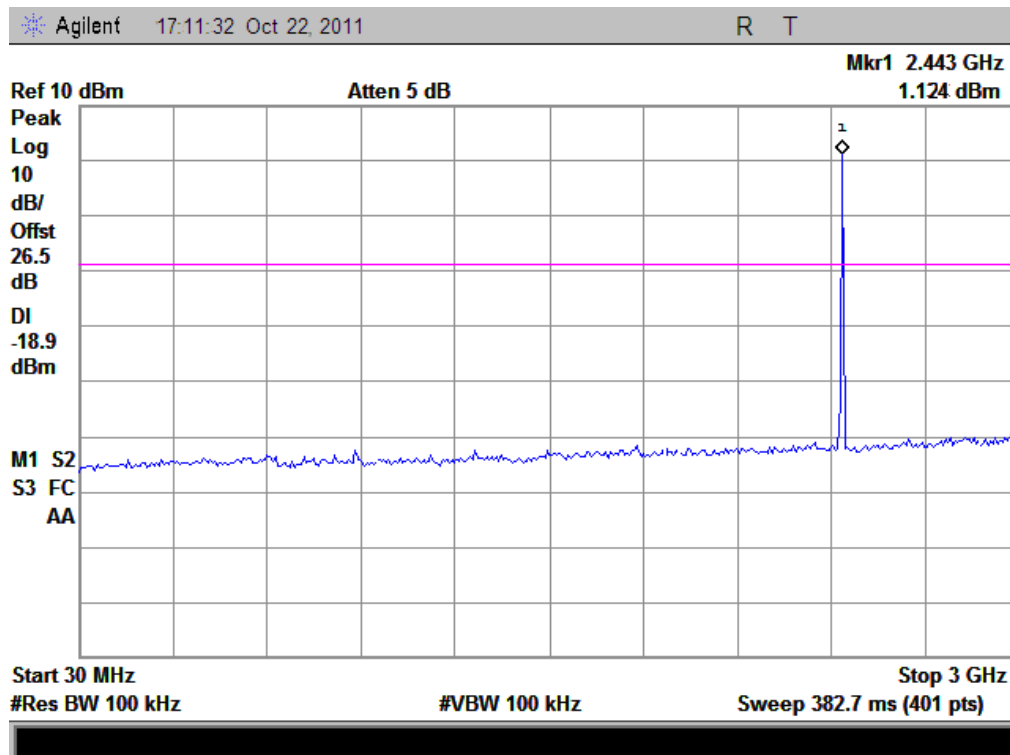


(Plot H.1: Channel = 39, 30MHz to 3GHz)

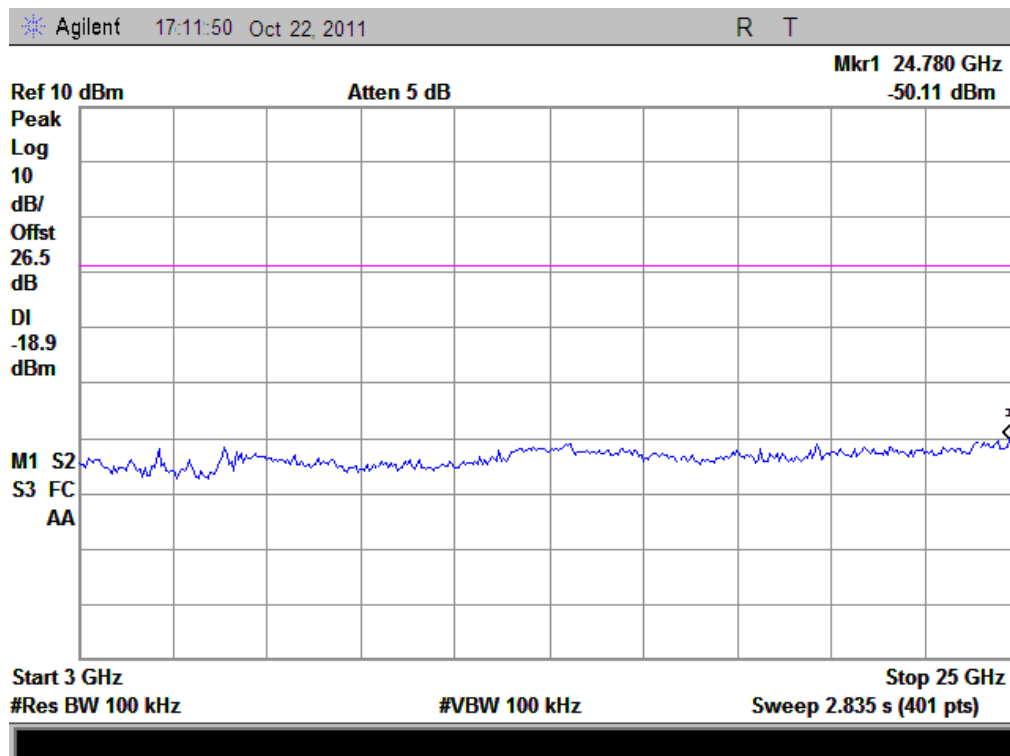

(Plot H.2: Channel = 39, 3GHz to 25GHz)

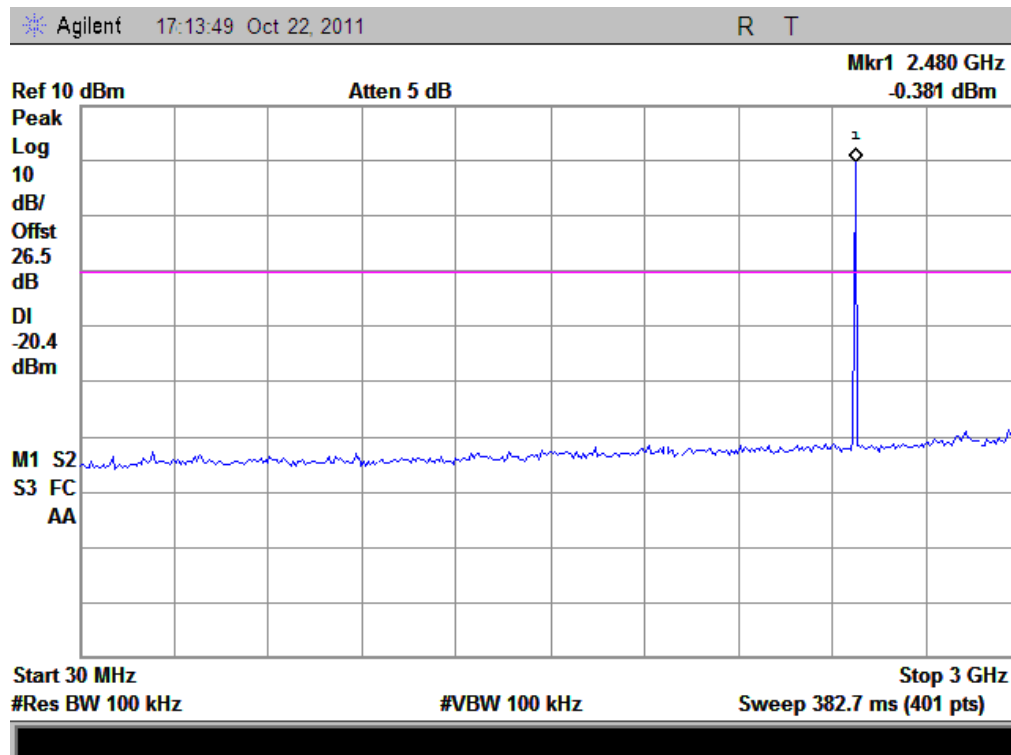

(Plot I.1: Channel = 78, 30MHz to 3GHz)

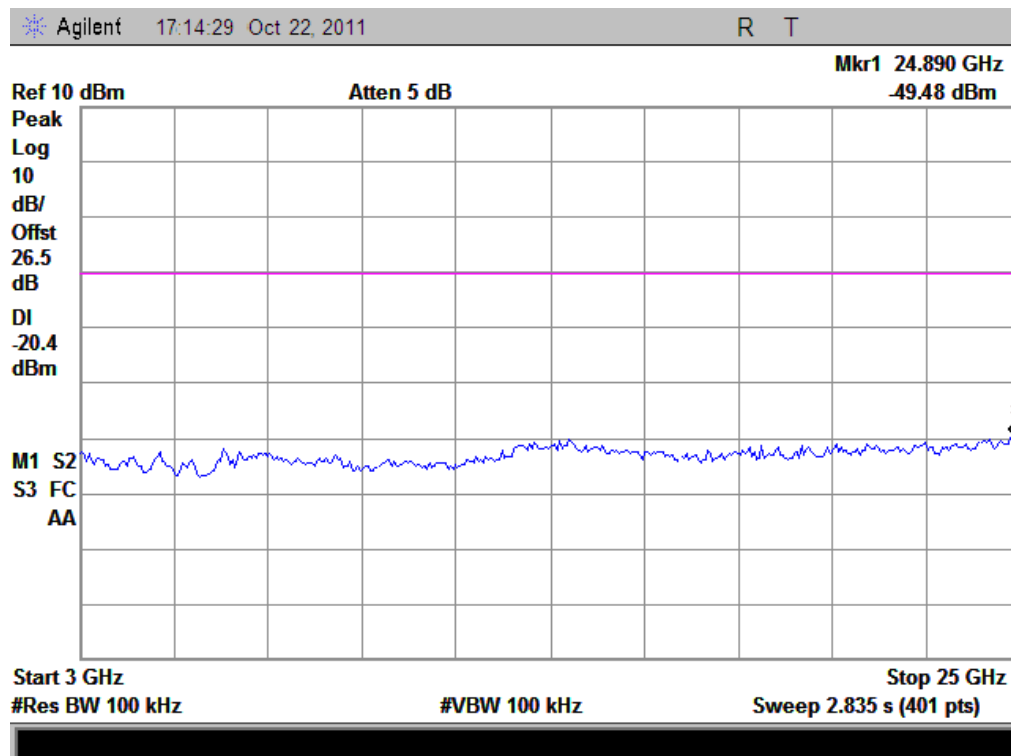

(Plot I.2: Channel = 78, 3GHz to 25GHz)


2.7 Band Edge

2.7.1 Requirement

According to FCC section 15.247(c) and RSS- A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

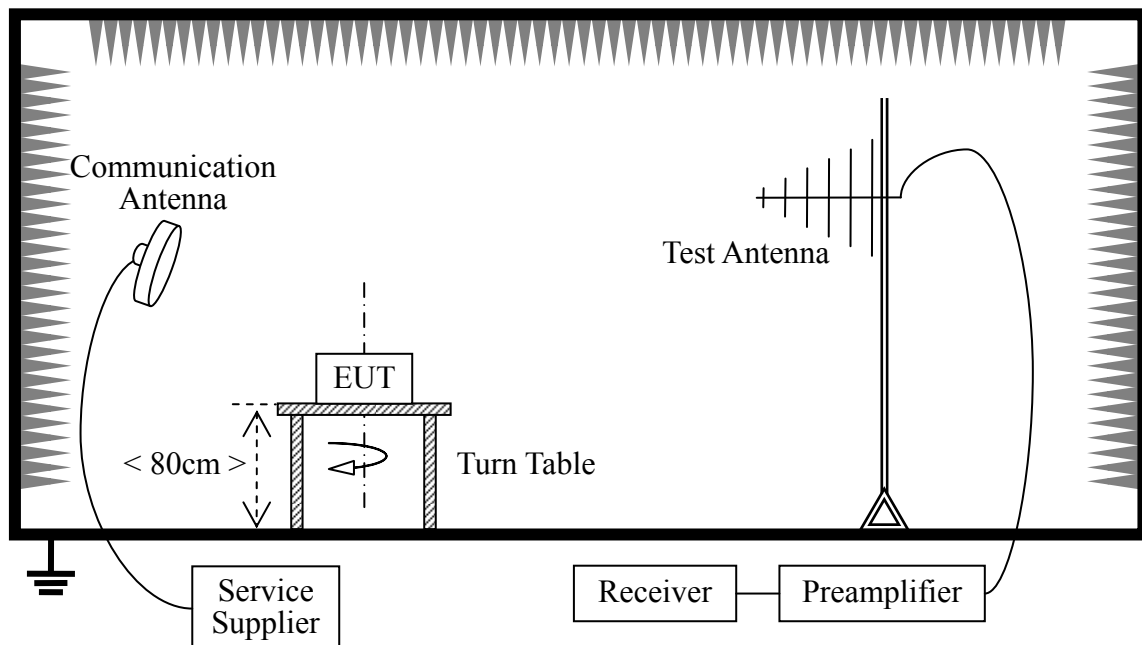

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2011.05
Receiver	Agilent	E7405A	US44210471	2011.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05

2.7.3 Test Result



The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	40.87	39.23	74	54	PASS
78	2480	40.61	38.43	74	54	PASS

B. Test Plot:

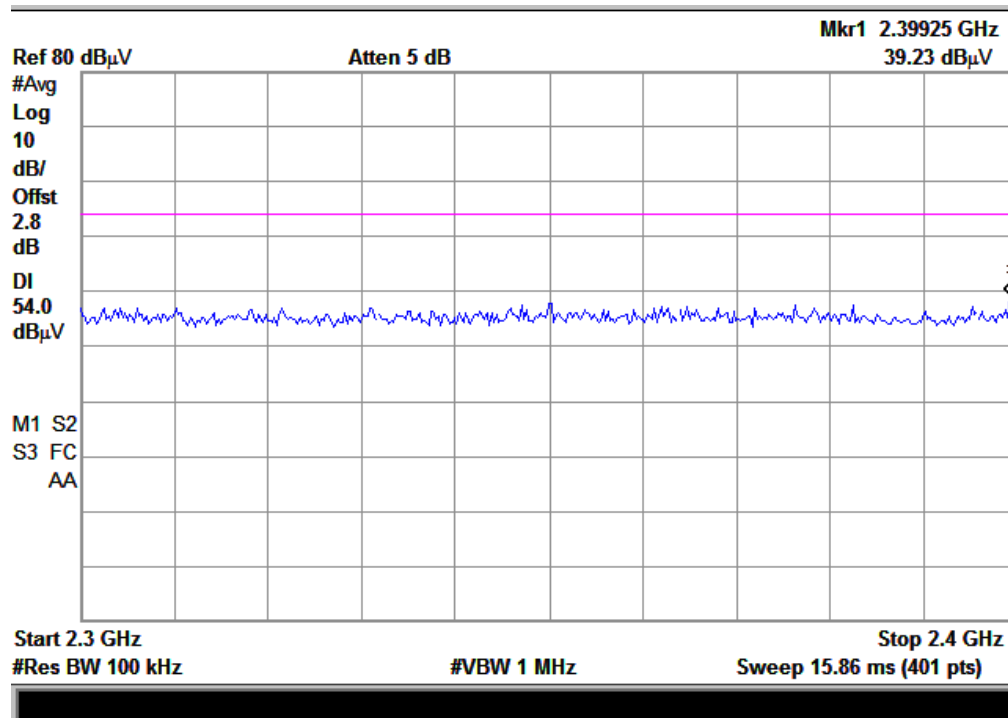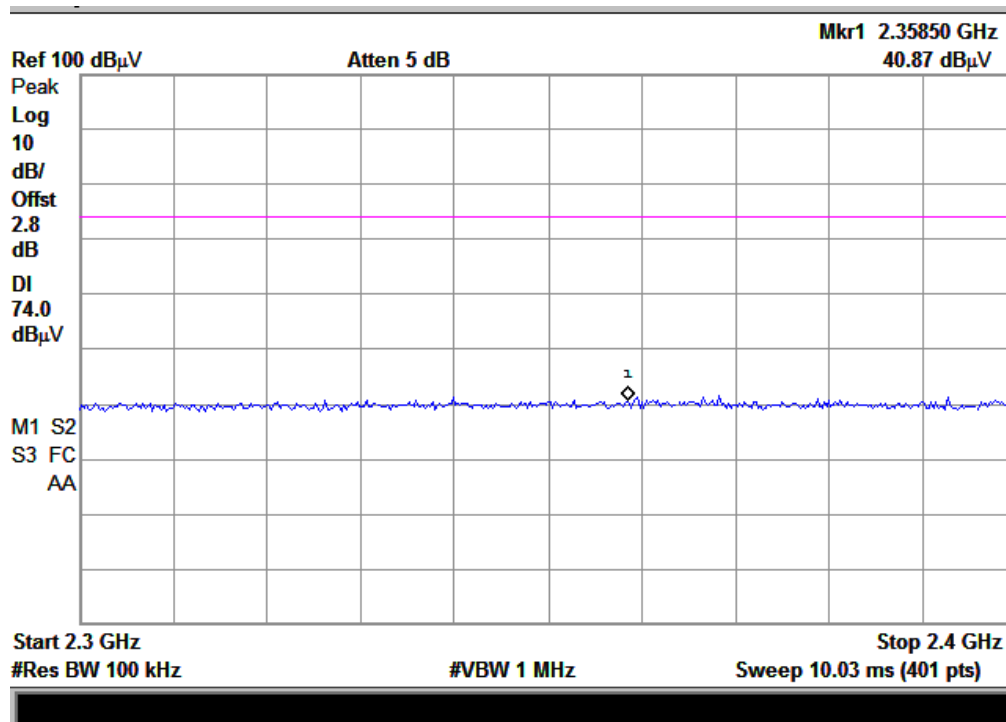

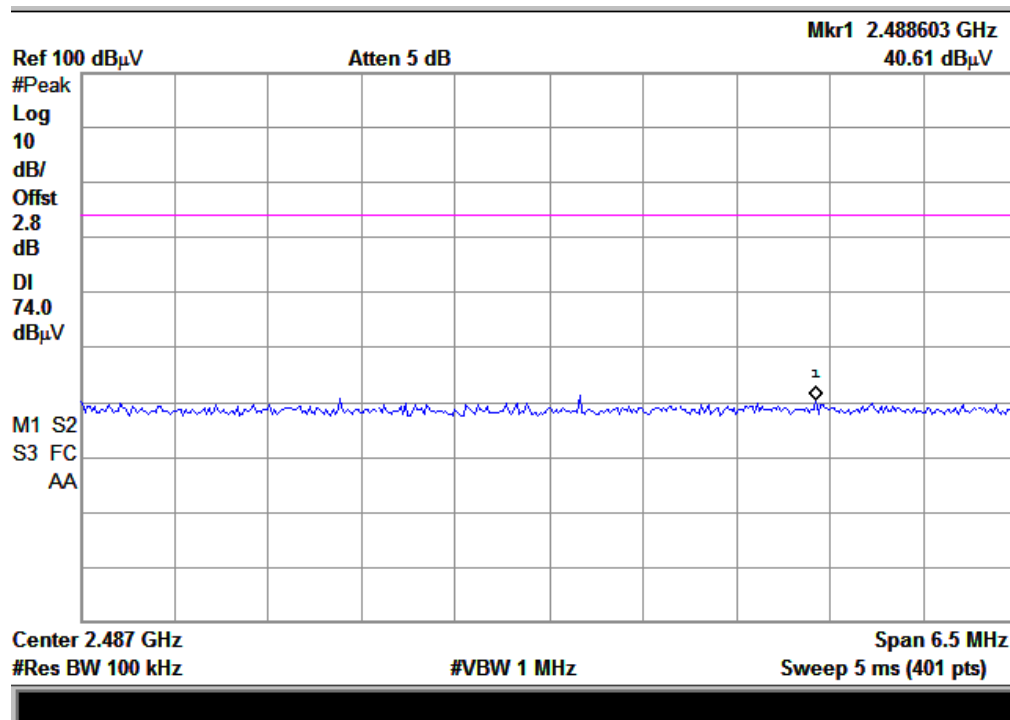

(Plot B1: Channel = 78 PEAK)

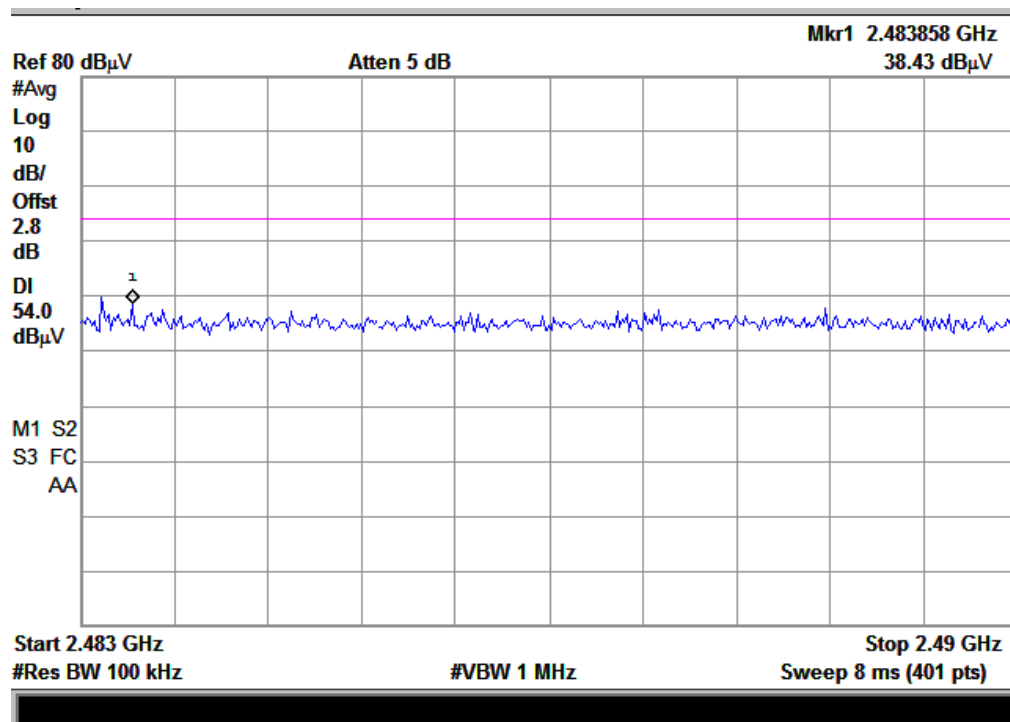


(Plot B2: Channel = 78 AVERAGE)

C. Test Verdict:



$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	43.26	37.68	74	54	PASS
78	2480	40.99	38.34	74	54	PASS

D. Test Plot:

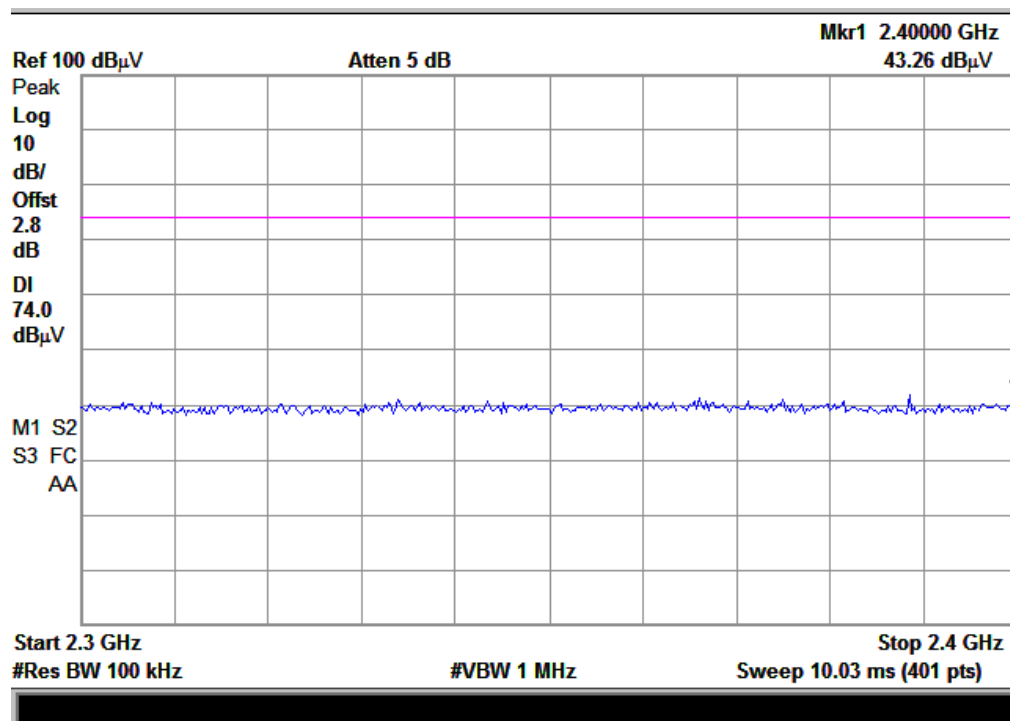

(Plot A1: Channel = 0 PEAK)

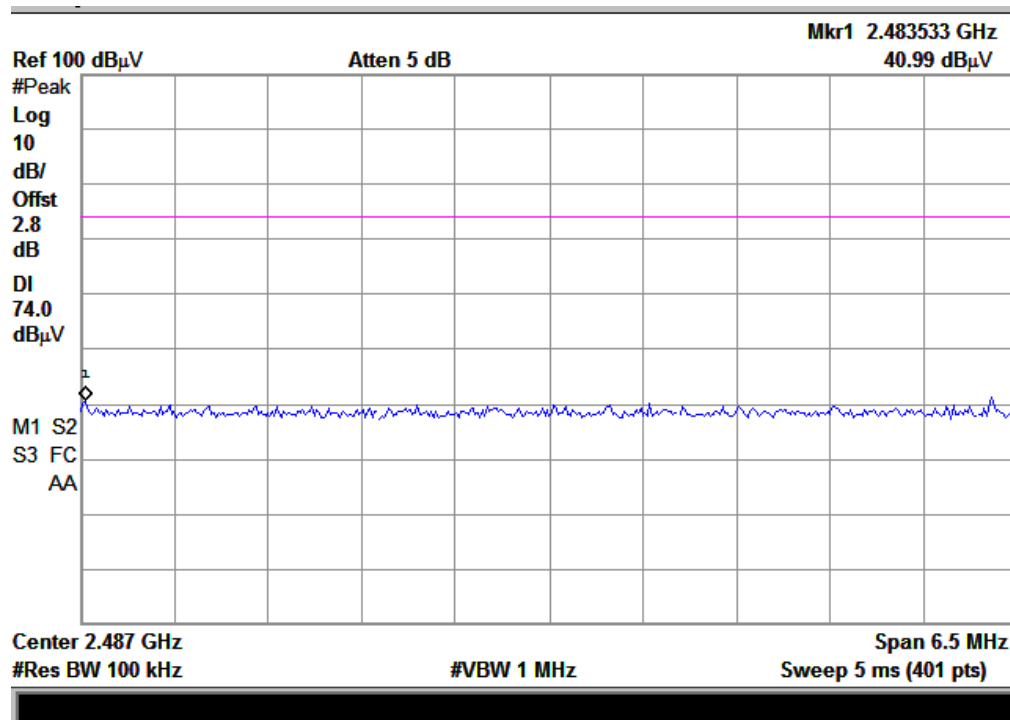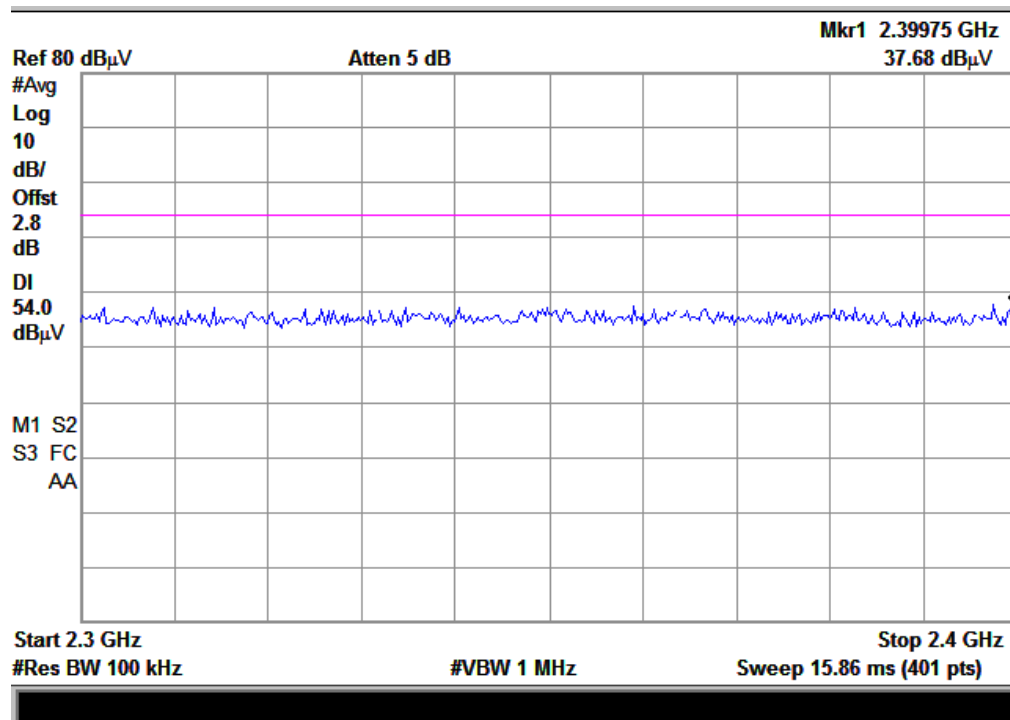

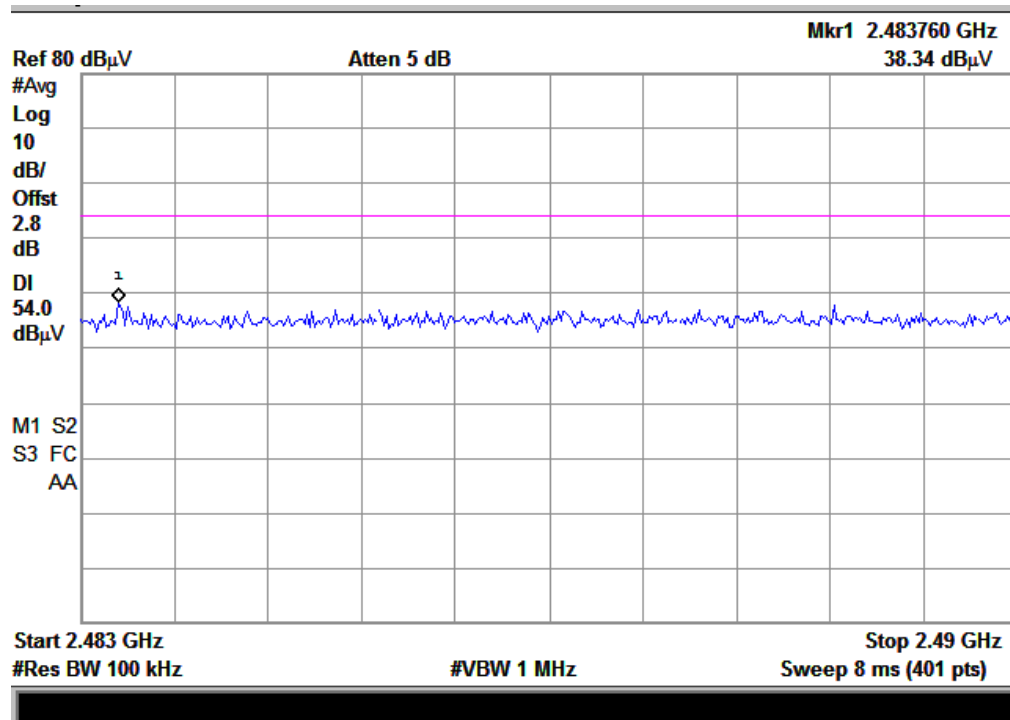



(Plot B2: Channel = 78 AVERAGE)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	41.06	37.24	74	54	PASS
78	2480	40.06	38.37	74	54	PASS

F. Test Plot:

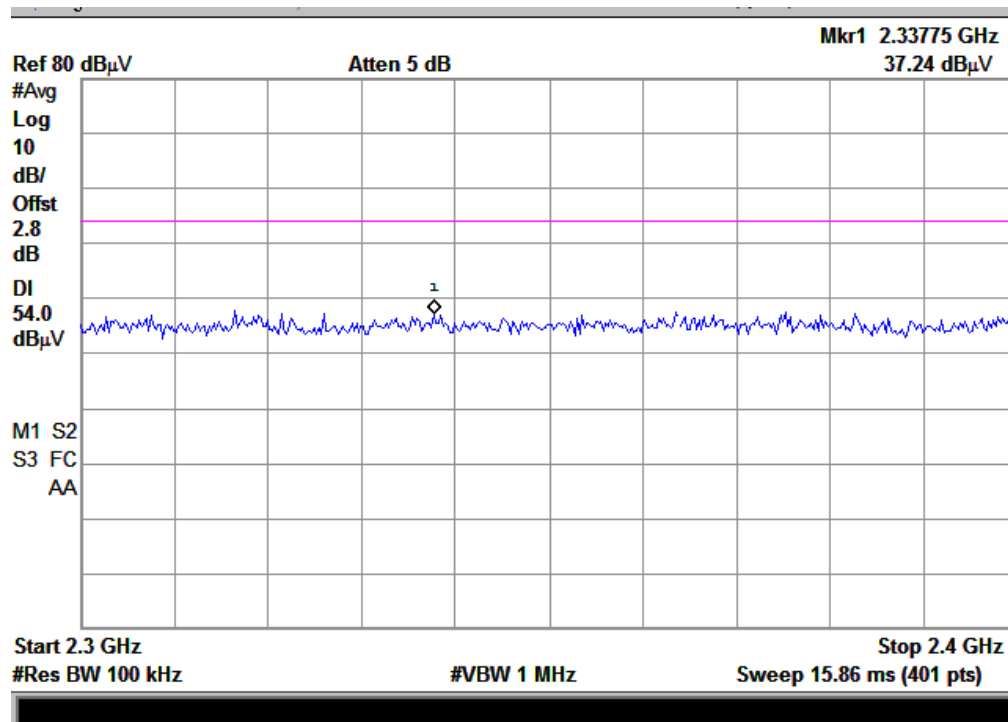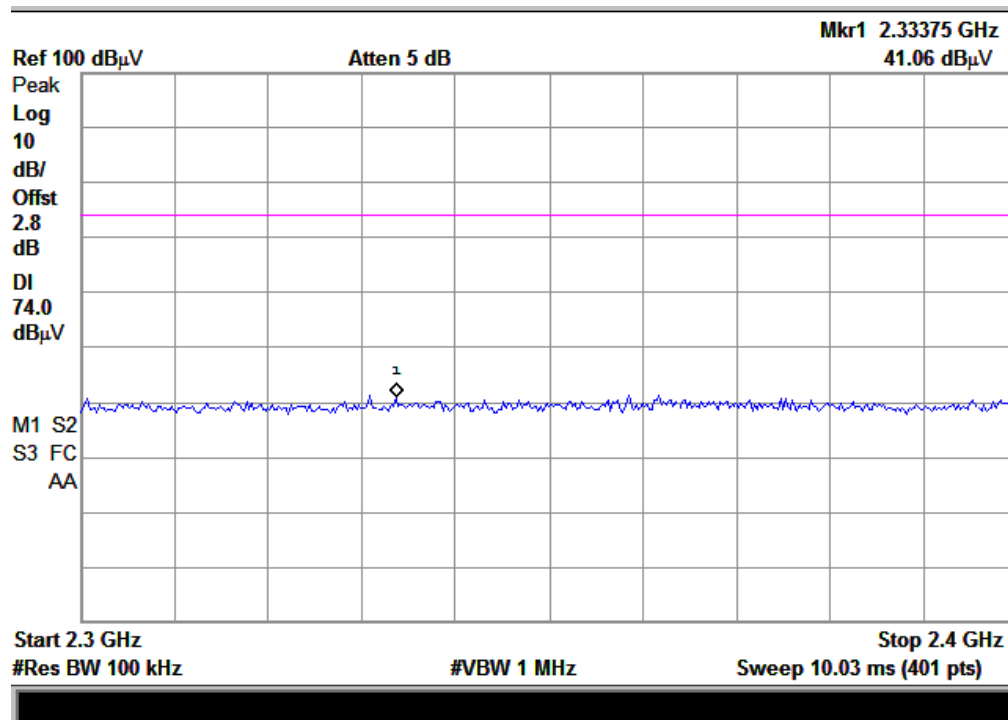

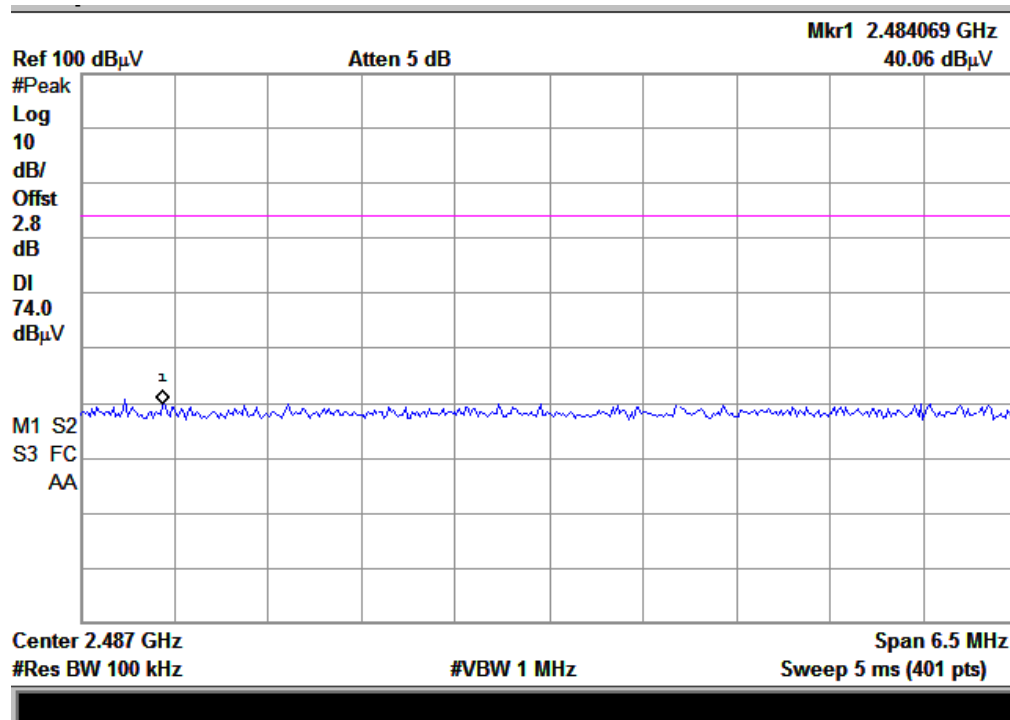

(Plot B1: Channel = 78 PEAK)

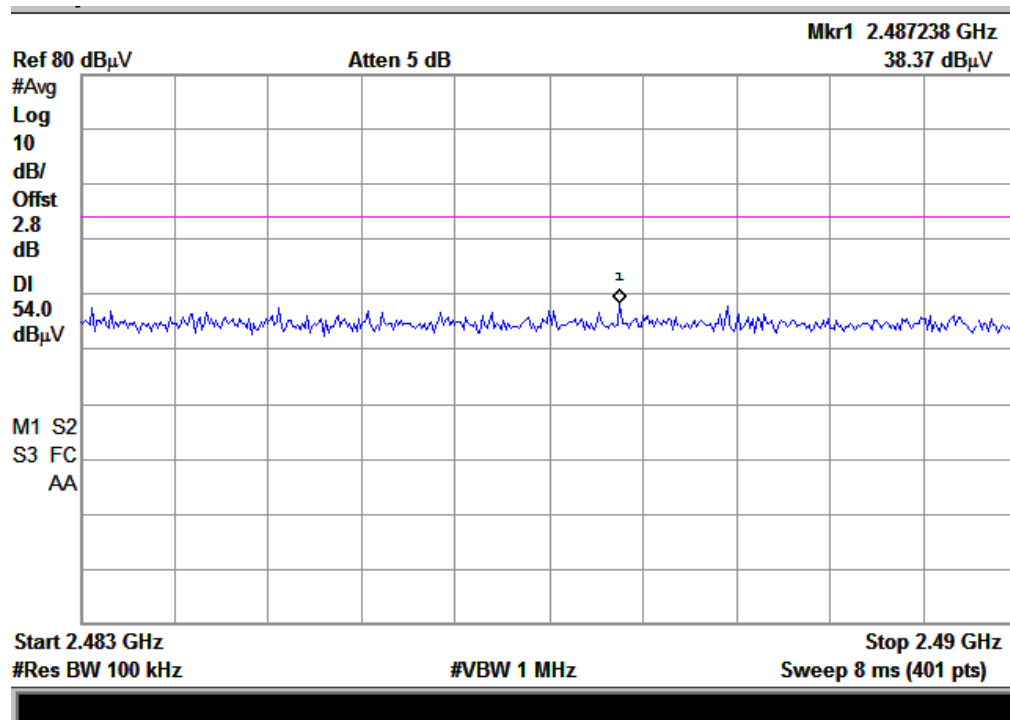

(Plot B2: Channel = 78 AVERAGE)

2.8 Conducted Emission

2.8.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2 Test Description

A. Test Setup:

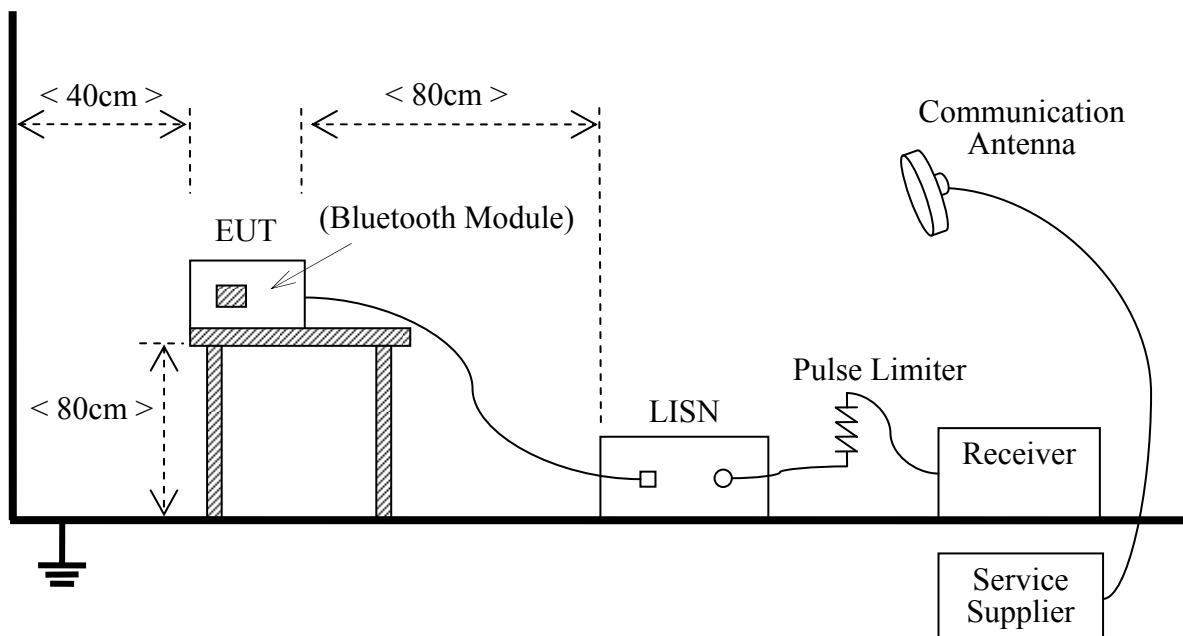

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2003


The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2011.05
LISN	Schwarzbeck	NSLK 8127	812744	2011.05
Service Supplier	R&S	CMU200	100448	2011.05
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)

2.8.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

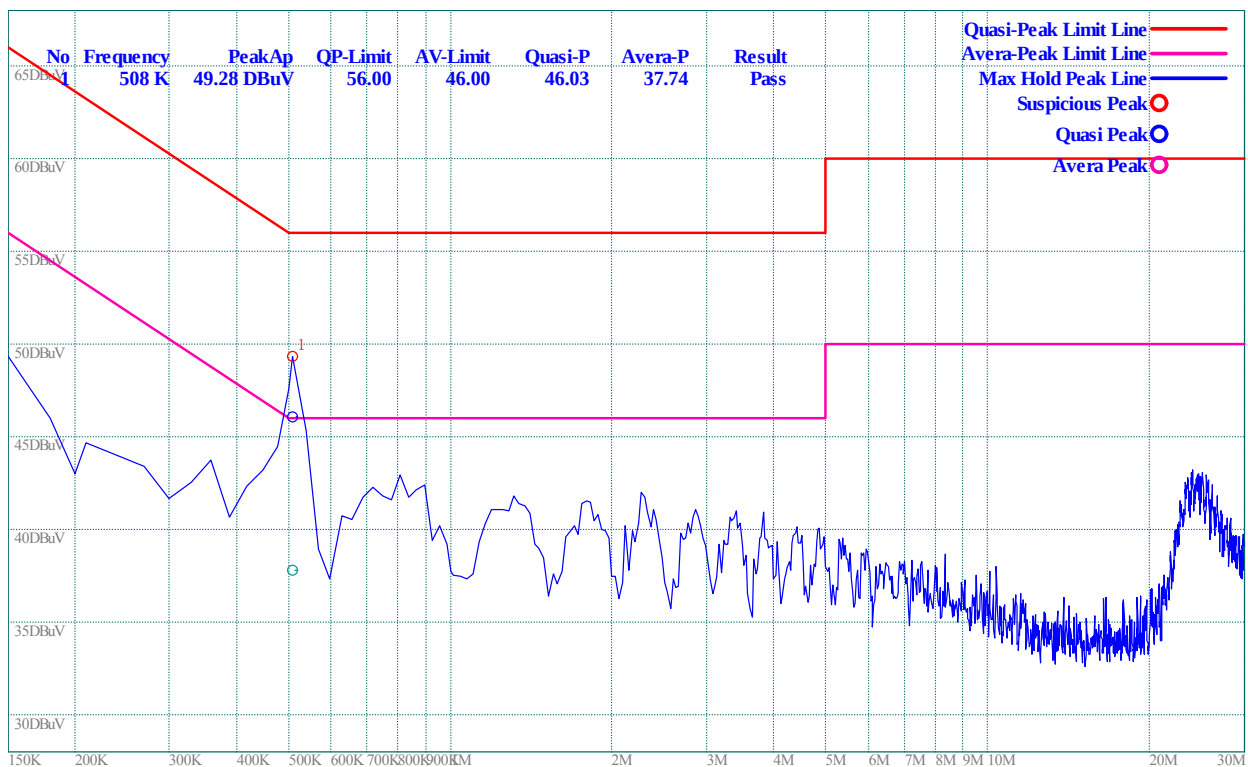

(Plot A: L Phase)

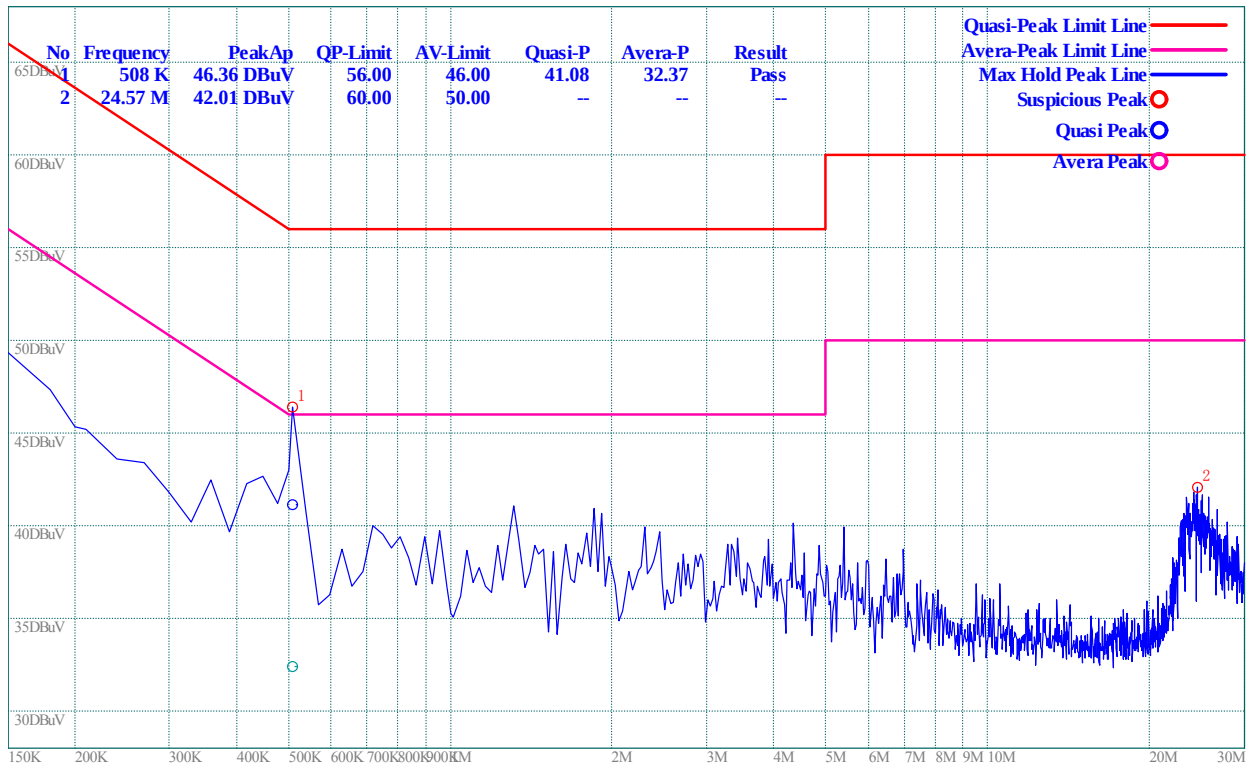

(Plot B: N Phase)

2.9 Radiated Emission (TX model)

2.9.1 Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to RSS- Gen section 7.2.3. Those emissions generated in a receiver and radiated from the receiver either via the antenna path or via the control, power, and audio cables that may be used with the receiver. All spurious emissions shall comply with the limits of next table:

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
0.009 - 0.490	2400/F(kHz)	300	QP
0.490 - 1.705	24000/F(kHz)	30	QP
1.705 - 30.0	30	30	QP
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV


Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2 Test Description

A. Test Setup:

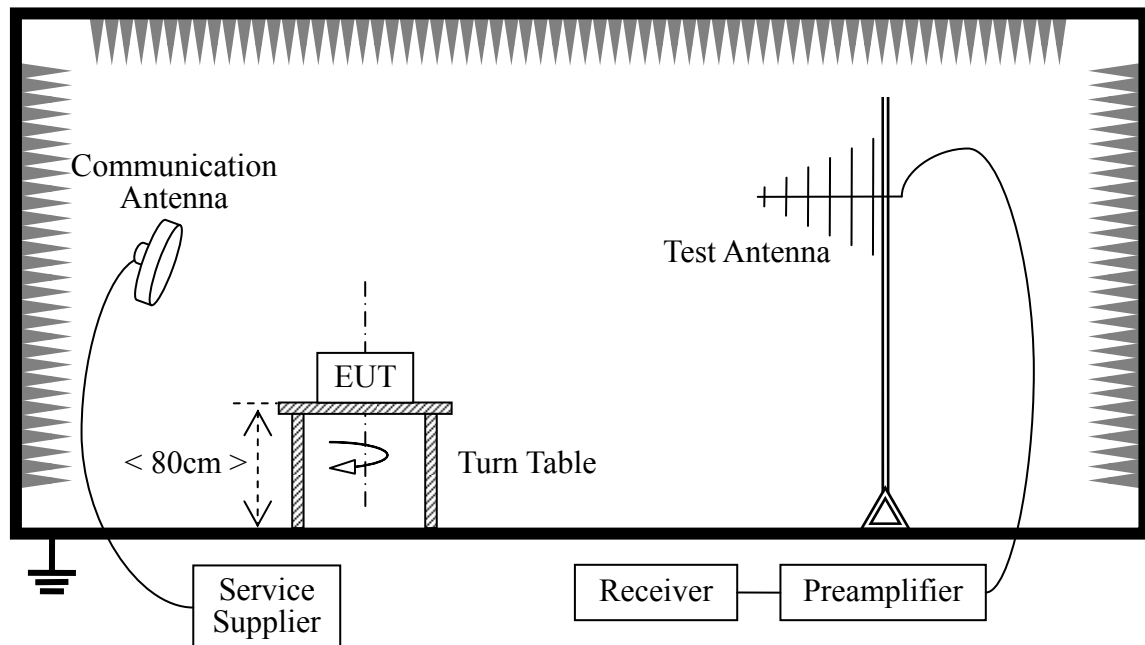

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-off test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0° to 360°, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2011.05
Receiver	Agilent	E7405A	US44210471	2011.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2011.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2011.05

2.9.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

2.9.3.1 GFSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	69.98	64.04	Horizontal	Plot A.1
		74.54	70.25	Vertical	Plot A.2
39	2441	71.45	68.06	Horizontal	Plot B.1
		75.78	70.79	Vertical	Plot B.2
78	2480	71.77	66.23	Horizontal	Plot C.1
		75.41	70.37	Vertical	Plot C.2

Test result of channel 0 (2402MHz) :

Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
598.4	33.94	--	N.A	46	N.A	>6	100	113	PASS	Horizontal
912.7	33.4	--	N.A	46	N.A	>6	100	340	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.085	43.21	--	74	54	>6	>6	100	103	PASS	Horizontal
14.065	43.49	--	74	54	>6	>6	100	4	PASS	Vertical
14.132	44.31	--	74	54	>6	>6	100	114	PASS	Horizontal

Test result of channel 39 (2441MHz):

Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
111.5	27.51	--	N.A	43.5	N.A	>6	100	28	PASS	Vertical
266.7	26.39	--	N.A	46	N.A	>6	100	107	PASS	Vertical
598.4	34.75	--	N.A	46	N.A	>6	100	125	PASS	Horizontal


912.7	34.32	--	N.A	46	N.A	>6	100	93	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
7.922	44.61	--	74	54	>6	>6	100	117	PASS	Horizontal
14.02	43.58	--	74	54	>6	>6	100	20	PASS	Horizontal

Test result of channel 78 (2480MHz):


Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
111.5	28.46	--	N.A	43.5	N.A	>6	100	114	PASS	Vertical
111.5	27.43		N.A	43.5	N.A	>6	100	60	PASS	Horizontal
912.7	34.3	--	N.A	46	N.A	>6	100	20	PASS	Vertical
912.7	33.61	--	N.A	46	N.A	>6	100	46	PASS	Horizontal
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
8.508	44.07	--	74	54	>6	>6	100	92	PASS	Vertical
14.335	43.63	--	74	54	>6	>6	100	97	PASS	Horizontal

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

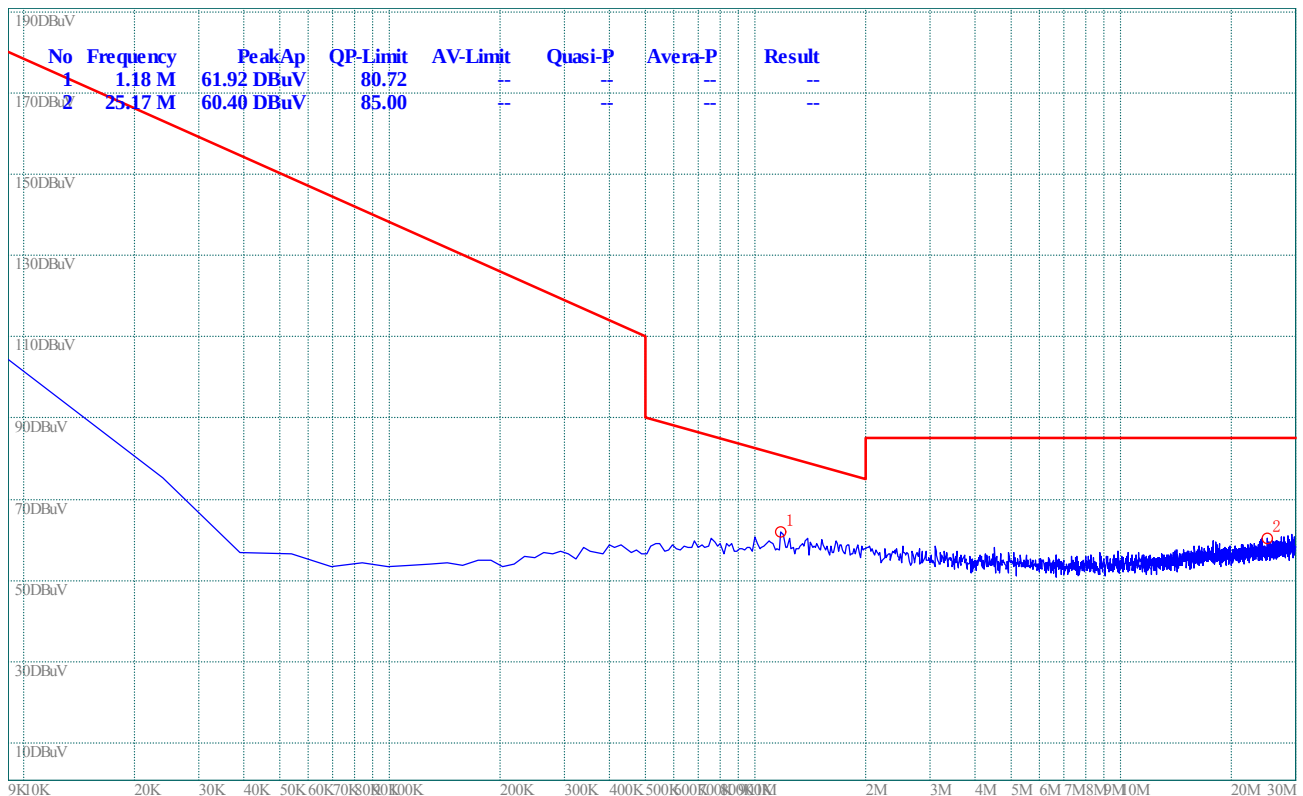

(Plot A.0: 9kHz to 30MHz)

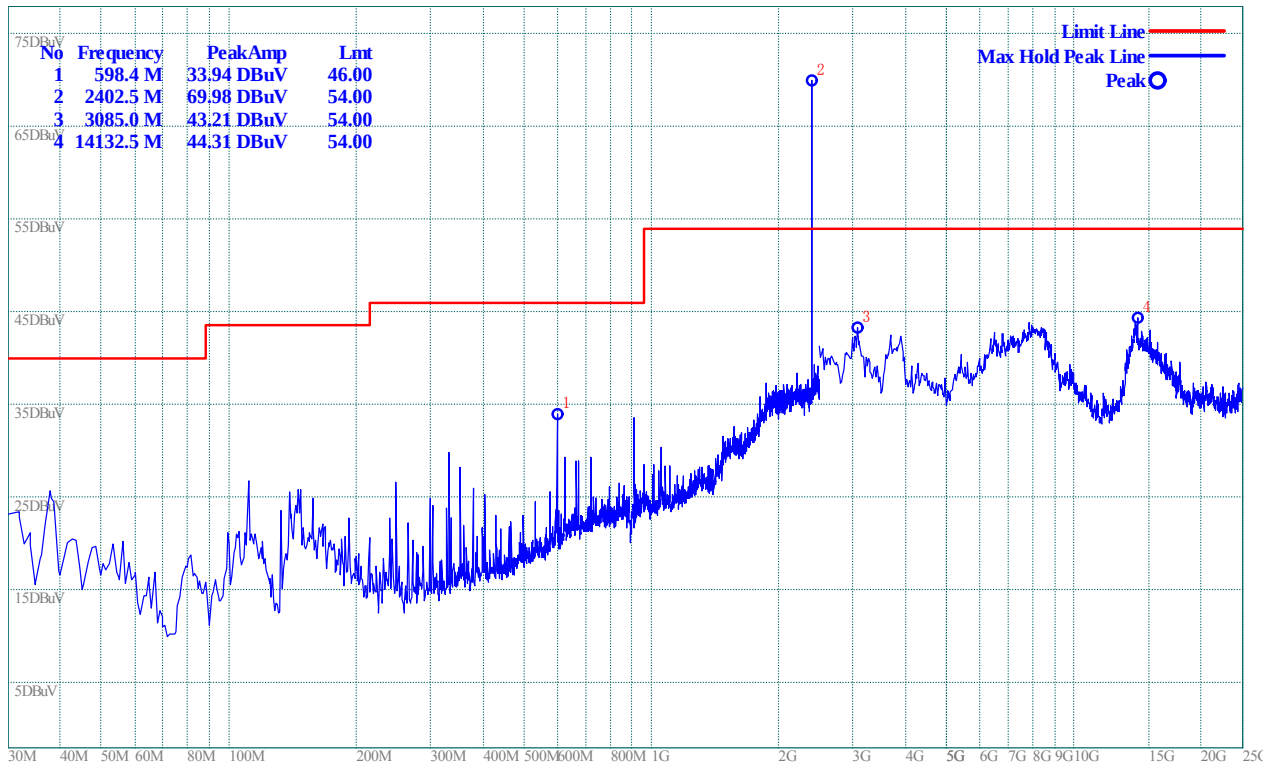


(Plot A.1: Antenna Horizontal)

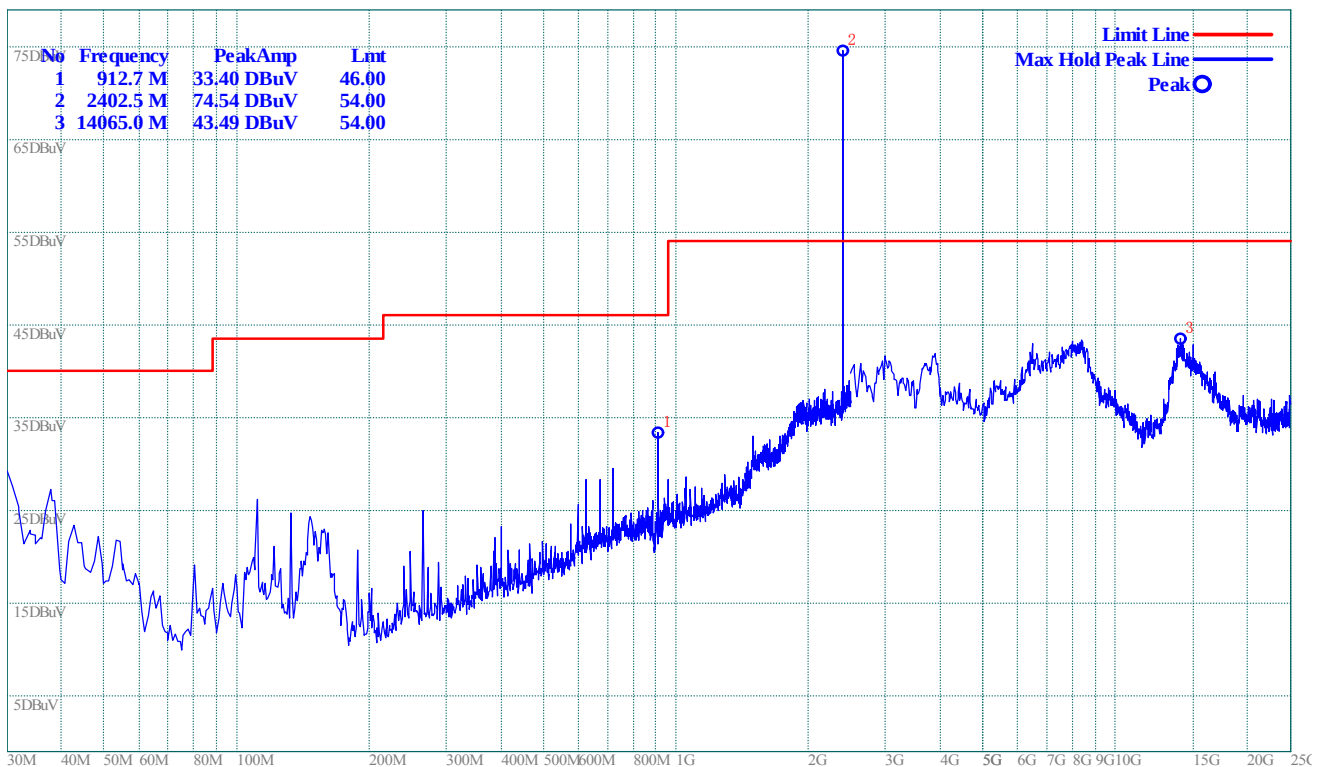


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

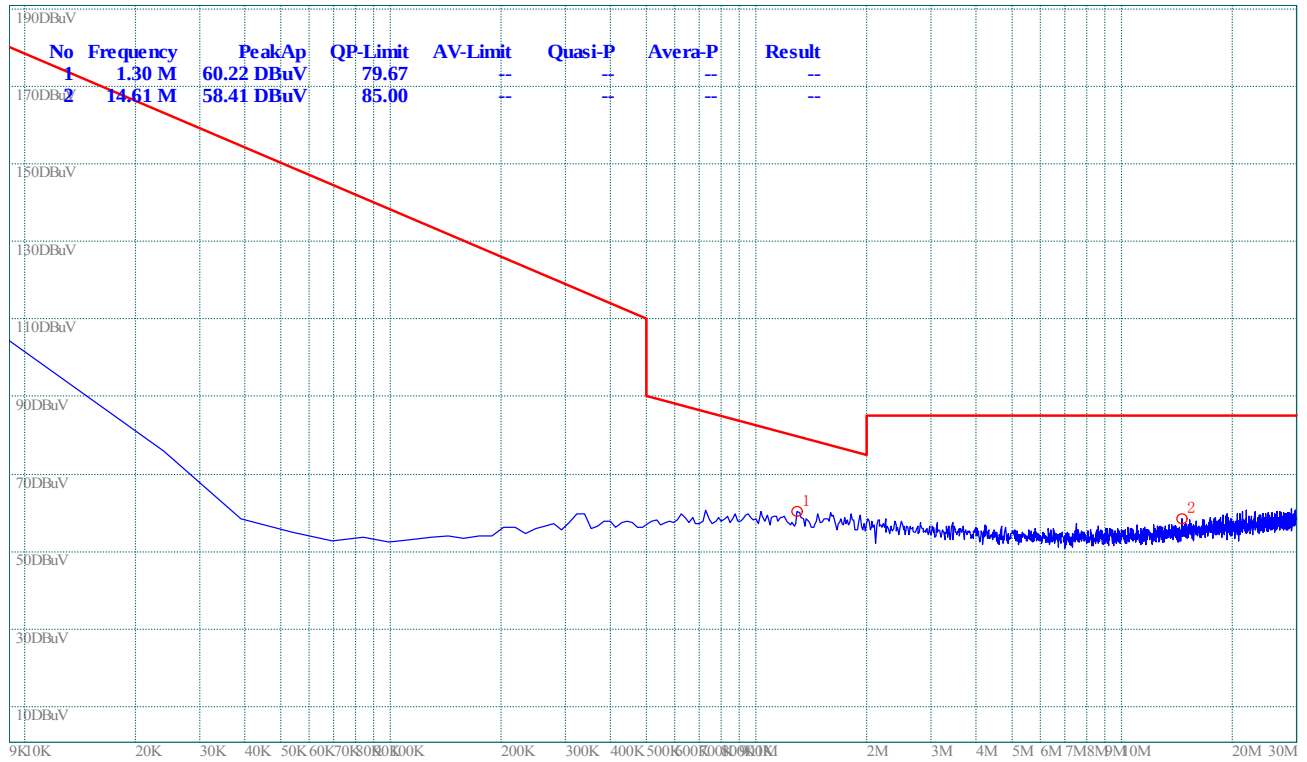

(Plot B.0: 9kHz to 30MHz)

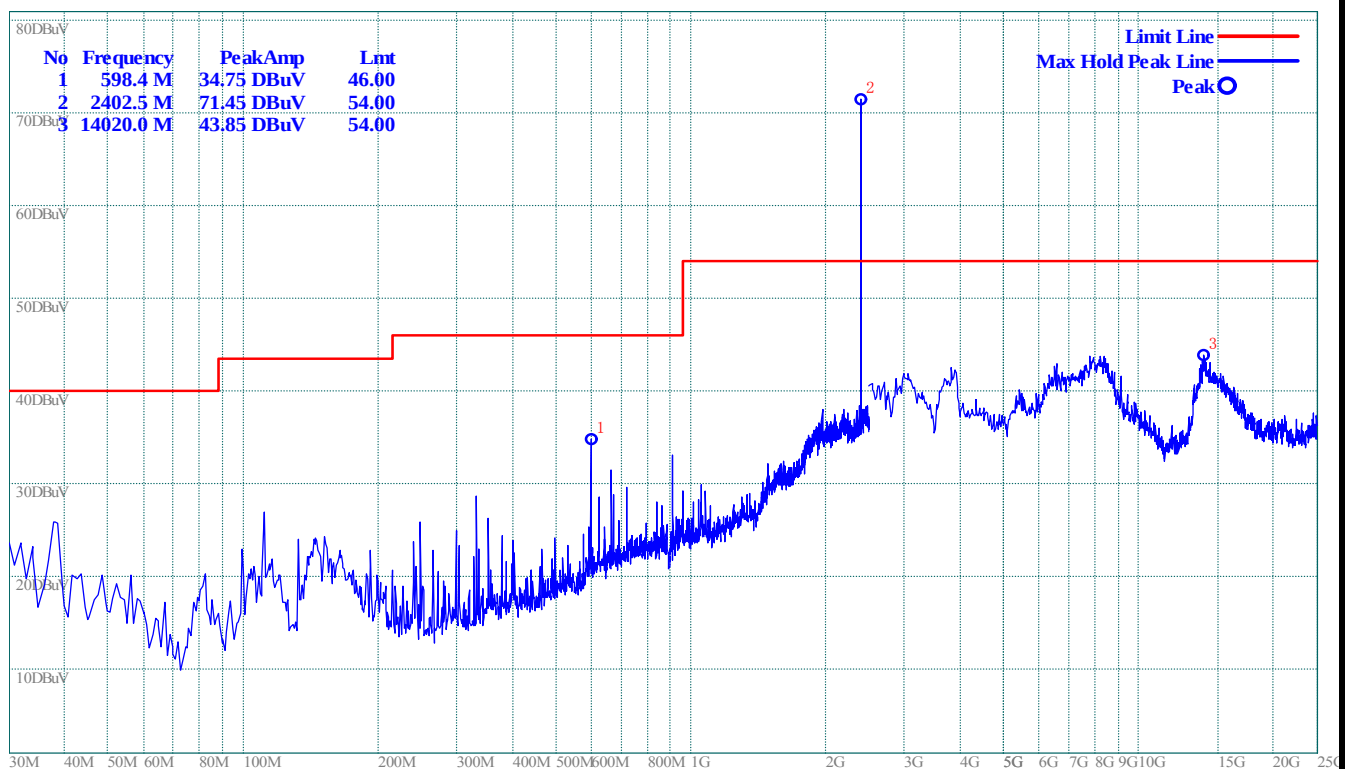

(Plot B.1: Antenna Horizontal)

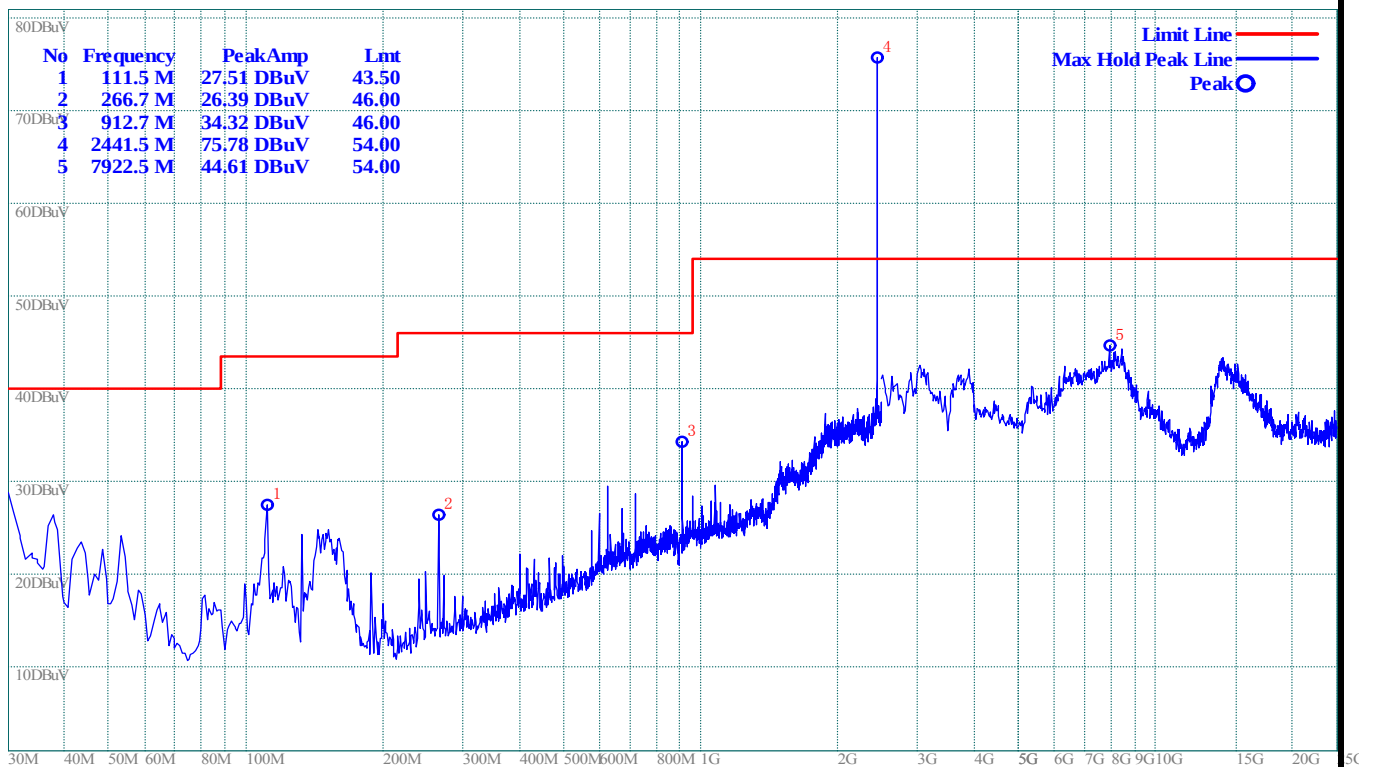


(Plot B.2: Antenna Vertical)


Plot for Channel = 78



(Plot C.0: 9kHz to 30MHz)

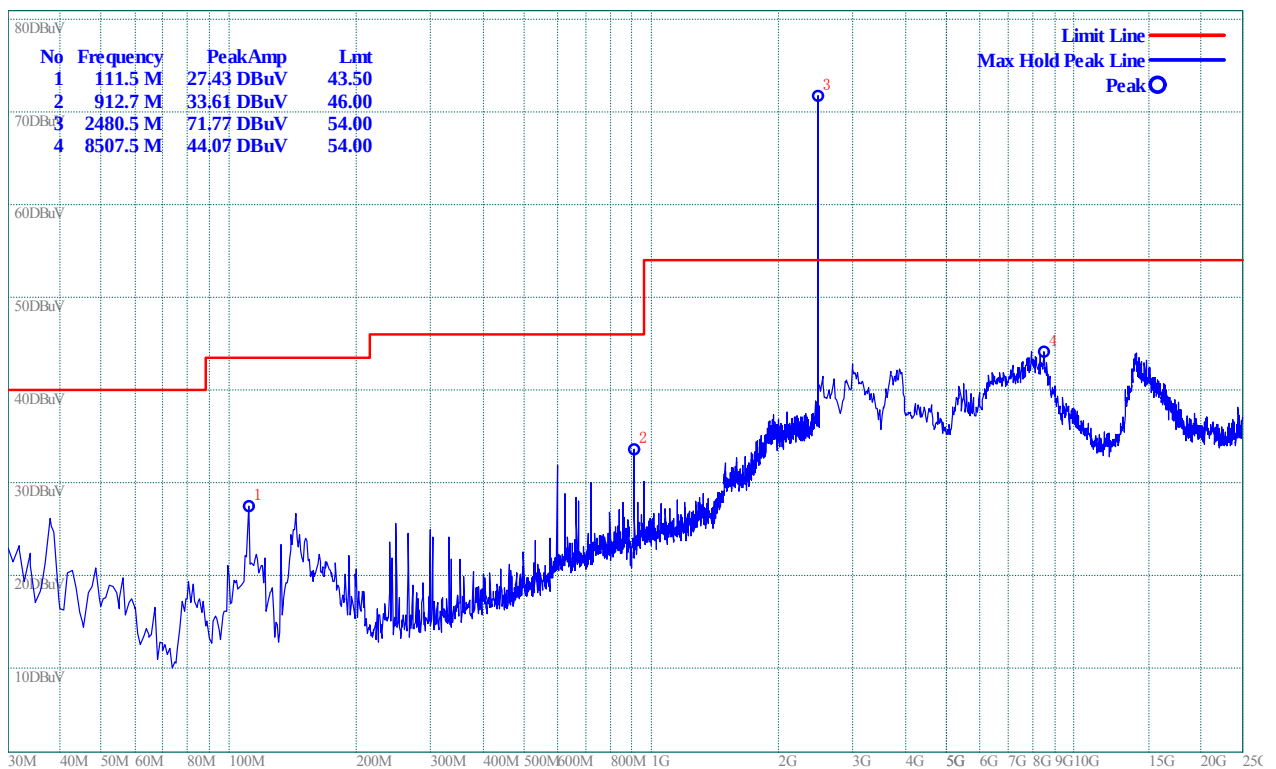

(Plot C.1: Antenna Horizontal)

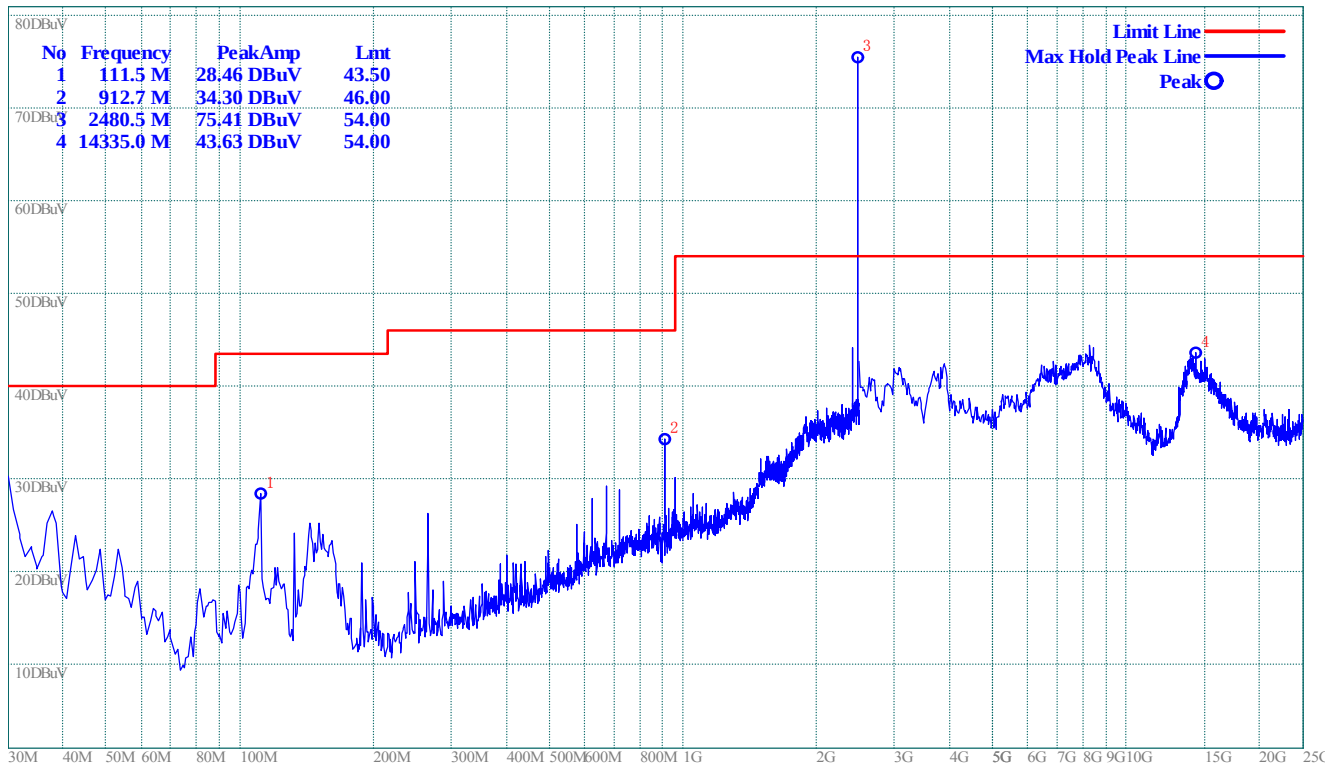

(Plot C.2: Antenna Vertical)

2.9.3.2 $\pi/4$ -DQPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	71.45	67.05	Horizontal	Plot A.1
		74.16	70.26	Vertical	Plot A.2
39	2441	75.05	70.33	Horizontal	Plot B.1
		76.57	72.15	Vertical	Plot B.2
78	2480	71.87	67.65	Horizontal	Plot C.1
		75.47	71.43	Vertical	Plot C.2

Test result of channel 0 (2402MHz):

Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
598.4	34.38	--	N.A	46	N.A	>6	100	56	PASS	Horizontal

912.7	33.78	--	N.A	46	N.A	>6	100	37	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.018	42.55	--	74	54	>6	>6	100	113	PASS	Horizontal
8.08	45.24	--	74	54	>6	>6	100	65	PASS	Vertical
8.418	44.48	--	74	54	>6	>6	100	117	PASS	Horizontal
14.448	43.98	--	74	54	>6	>6	100	104	PASS	Horizontal

Test result of channel 39 (2441MHz):


Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
111.5	28.18	--	N.A	43.5	N.A	>6	100	20	PASS	Vertical
598.4	35.02	--	N.A	46	N.A	>6	100	97	PASS	Horizontal
912.7	33.88	--	N.A	46	N.A	>6	100	118	PASS	Vertical
912.7	33.7	--	N.A	46	N.A	>6	100	65	PASS	Horizontal
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
8.125	44.14	--	74	54	>6	>6	100	38	PASS	Vertical
14.065	43.6	--	74	54	>6	>6	100	103	PASS	Horizontal

Test result of channel 78 (2480MHz):


Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
111.5	28.46	--	N.A	43.5	N.A	>6	100	78	PASS	Horizontal
912.7	33.47	--	N.A	46	N.A	>6	100	94	PASS	Vertical
912.7	33.62	--	N.A	46	N.A	>6	100	78	PASS	Horizontal
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
14.245	44.04	--	74	54	>6	>6	100	102	PASS	Horizontal
14.065	43.89	--	74	54	>6	>6	100	107	PASS	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

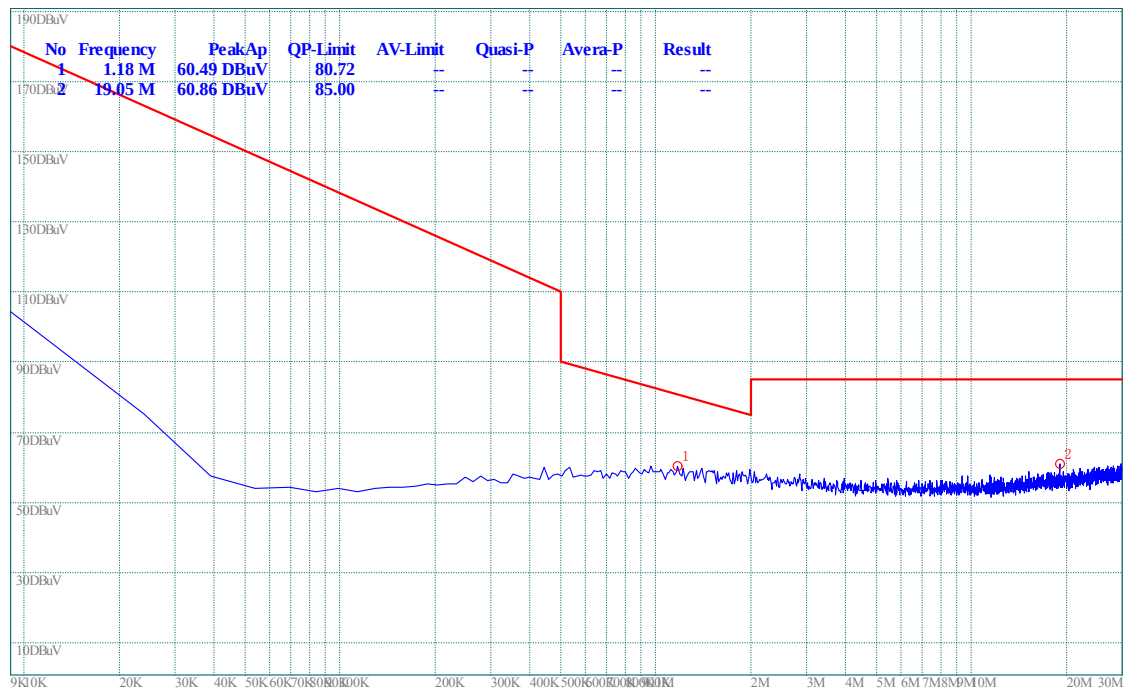

(Plot A.0: 9kHz to 30MHz)

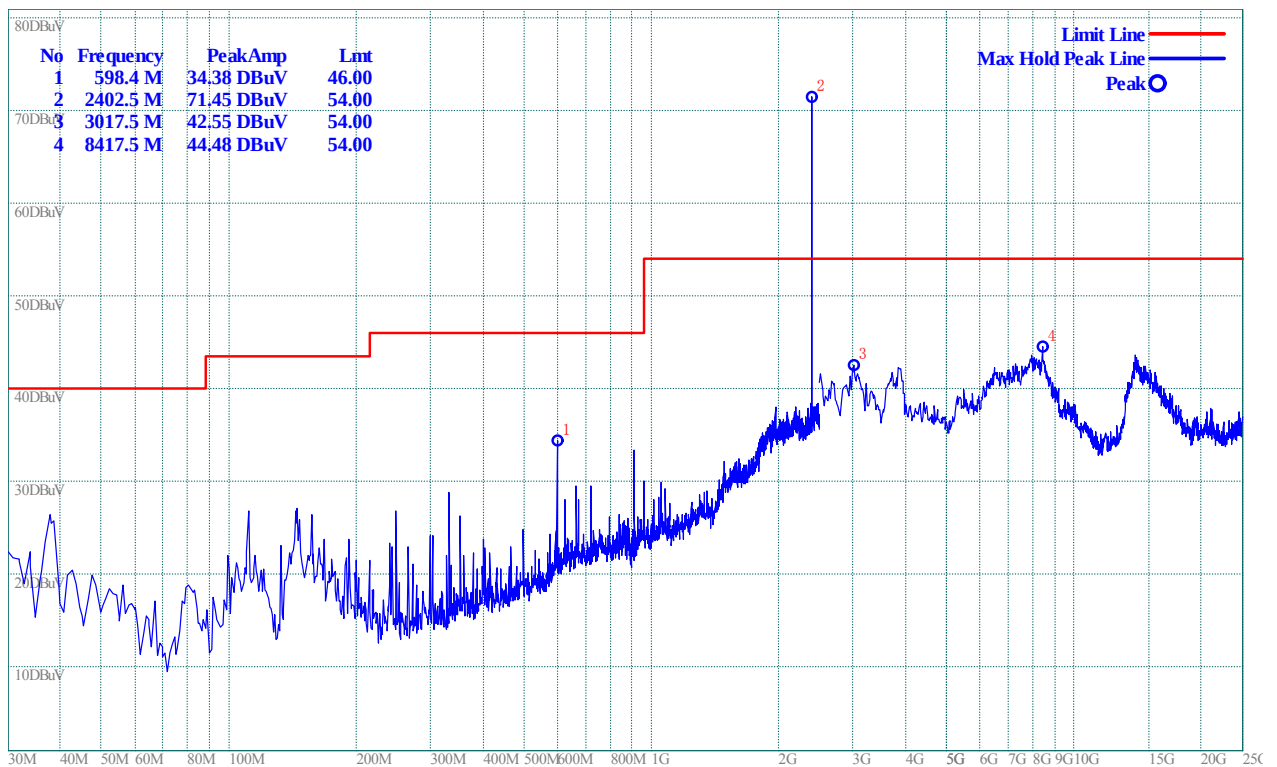

(Plot A.1: Antenna Horizontal)

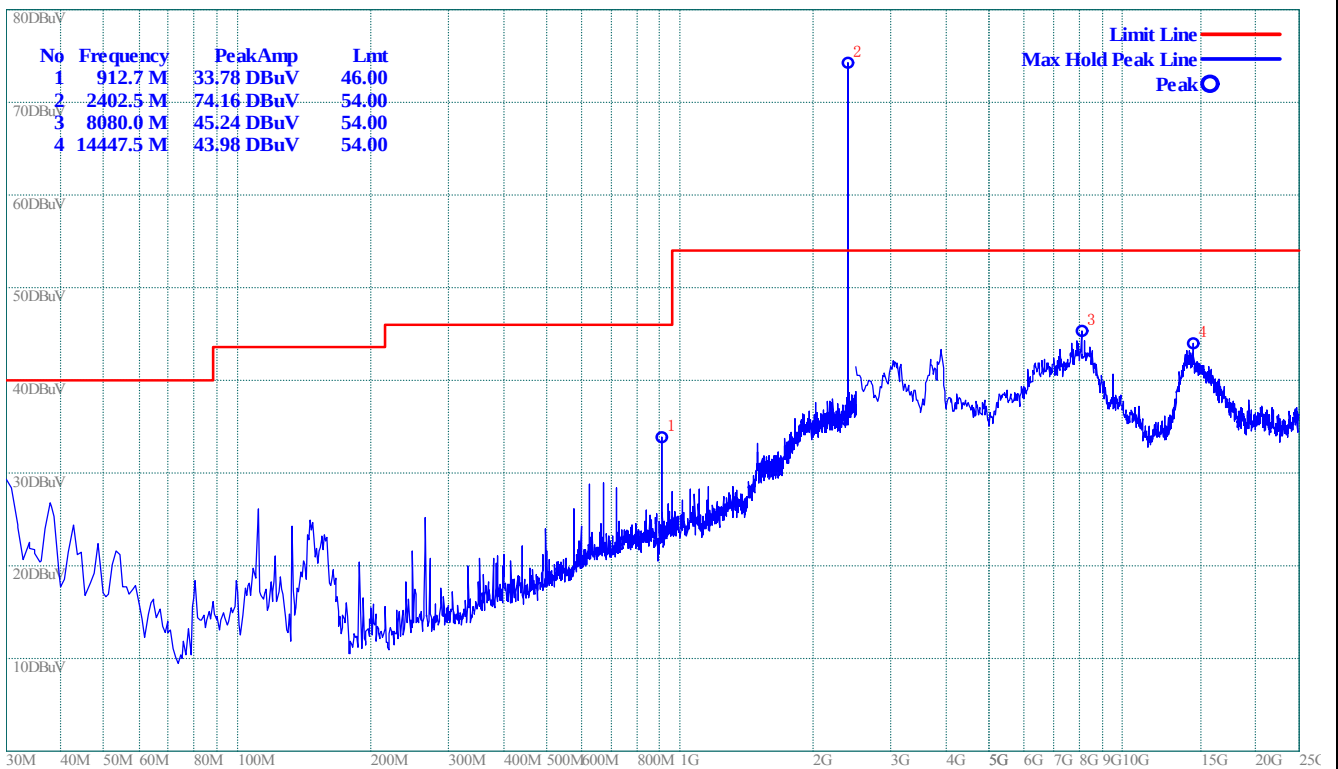


(Plot A.2: Antenna Vertical)


Plot for Channel = 39



(Plot B.0: 9kHz to 30MHz)

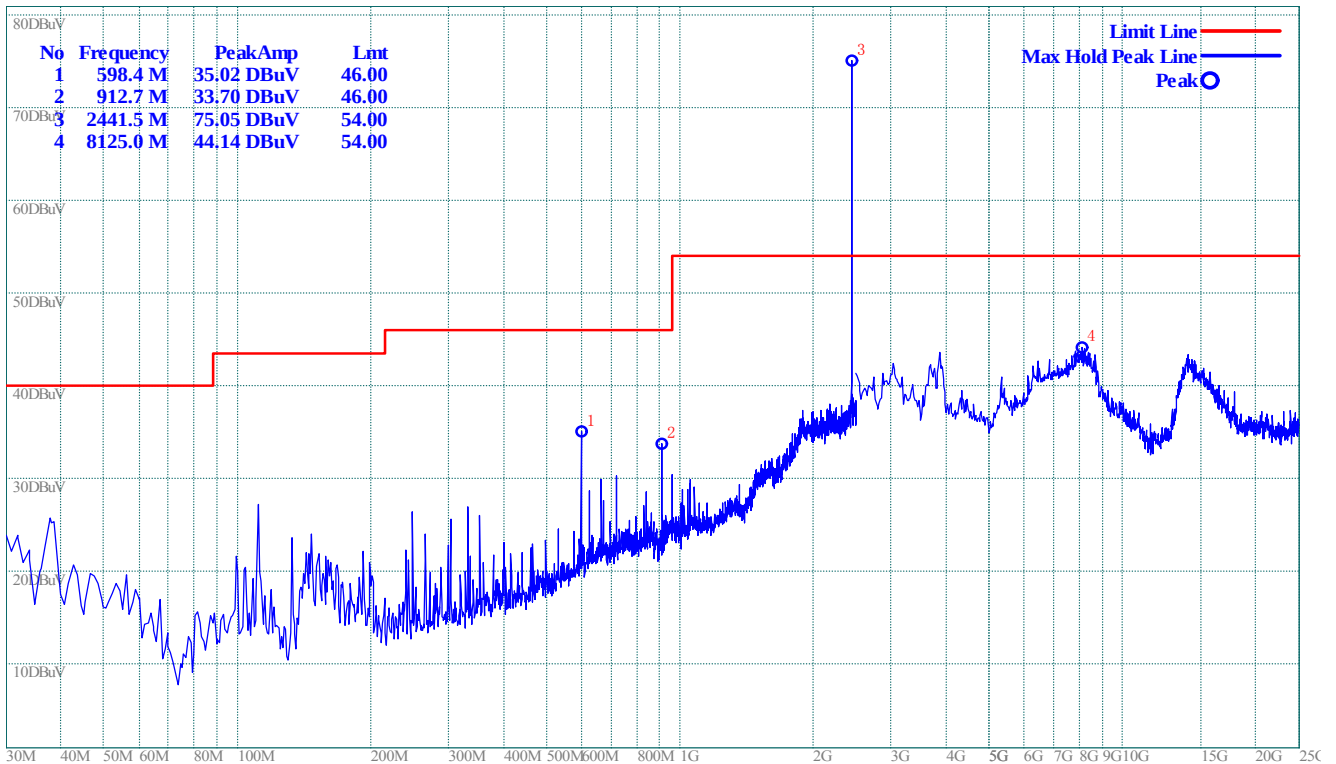


(Plot B.1: Antenna Horizontal)

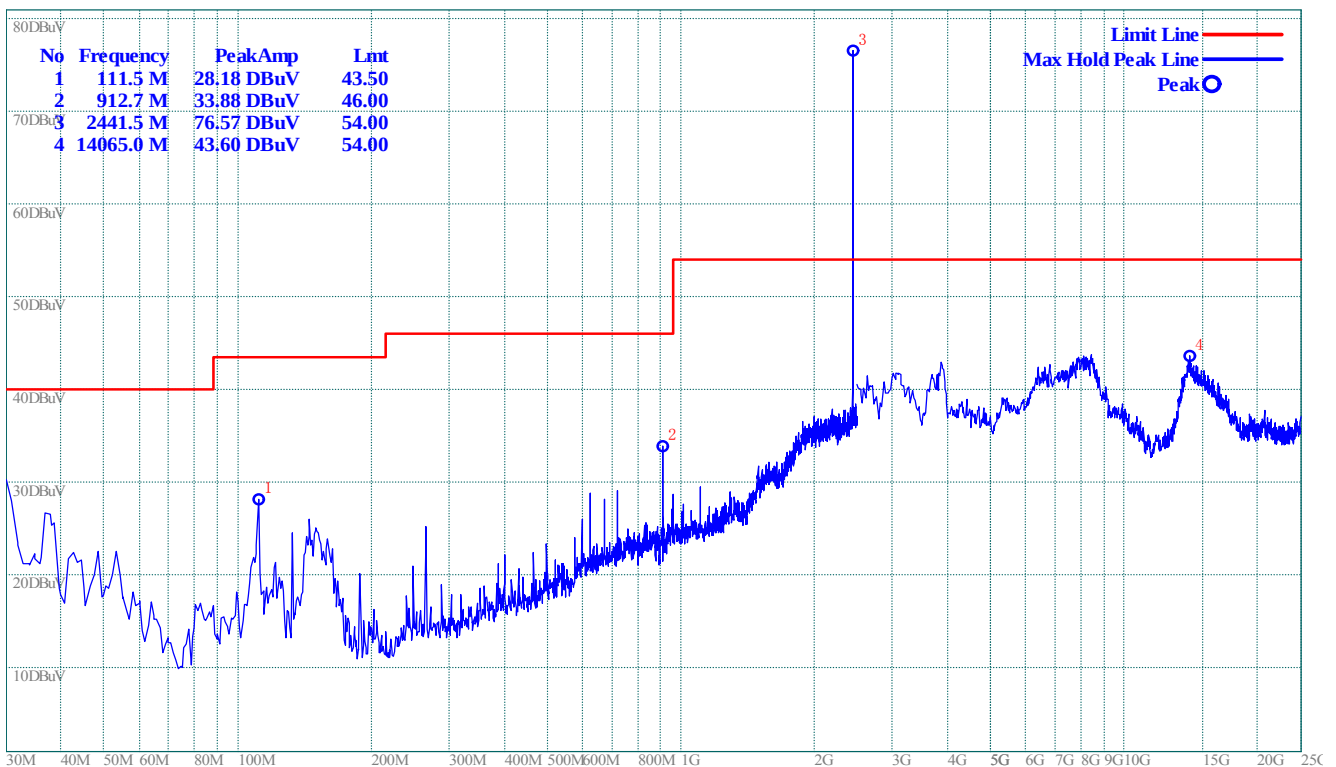


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

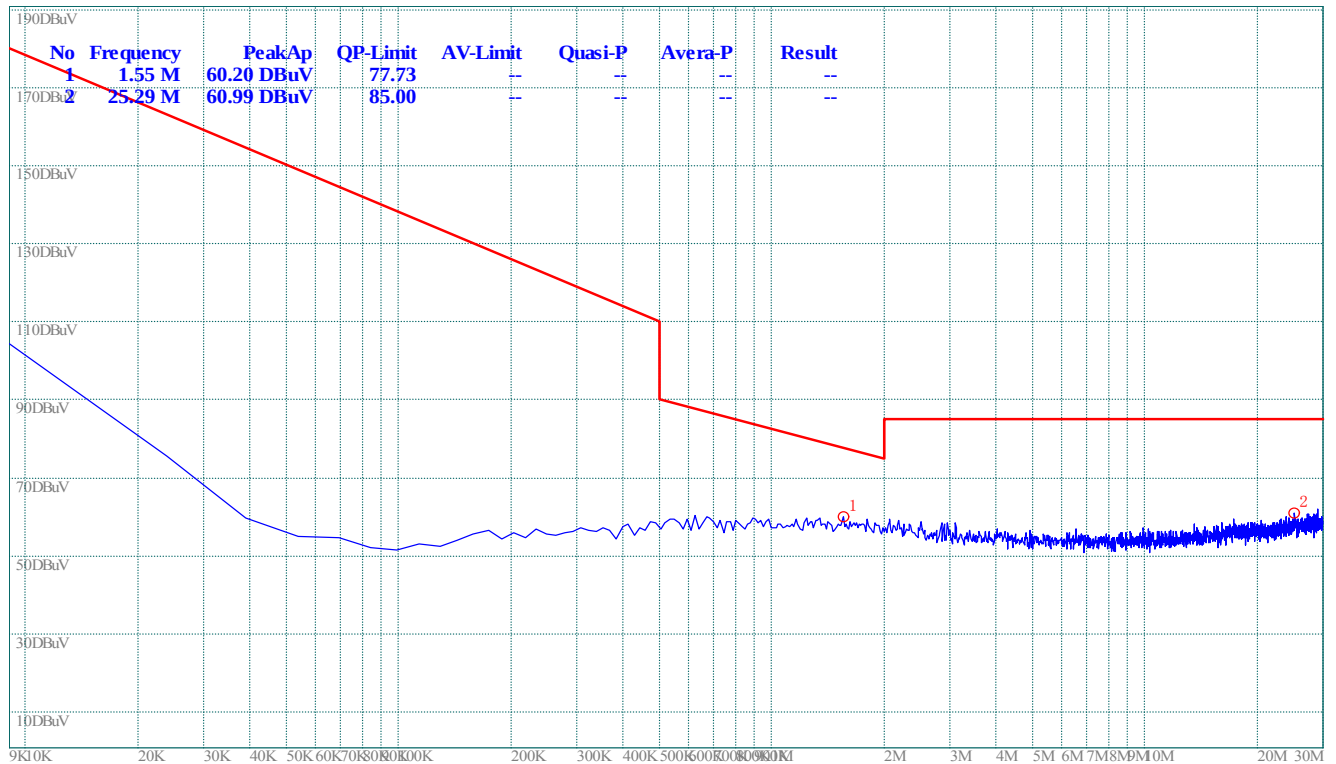

(Plot C.0: 9kHz to 30MHz)

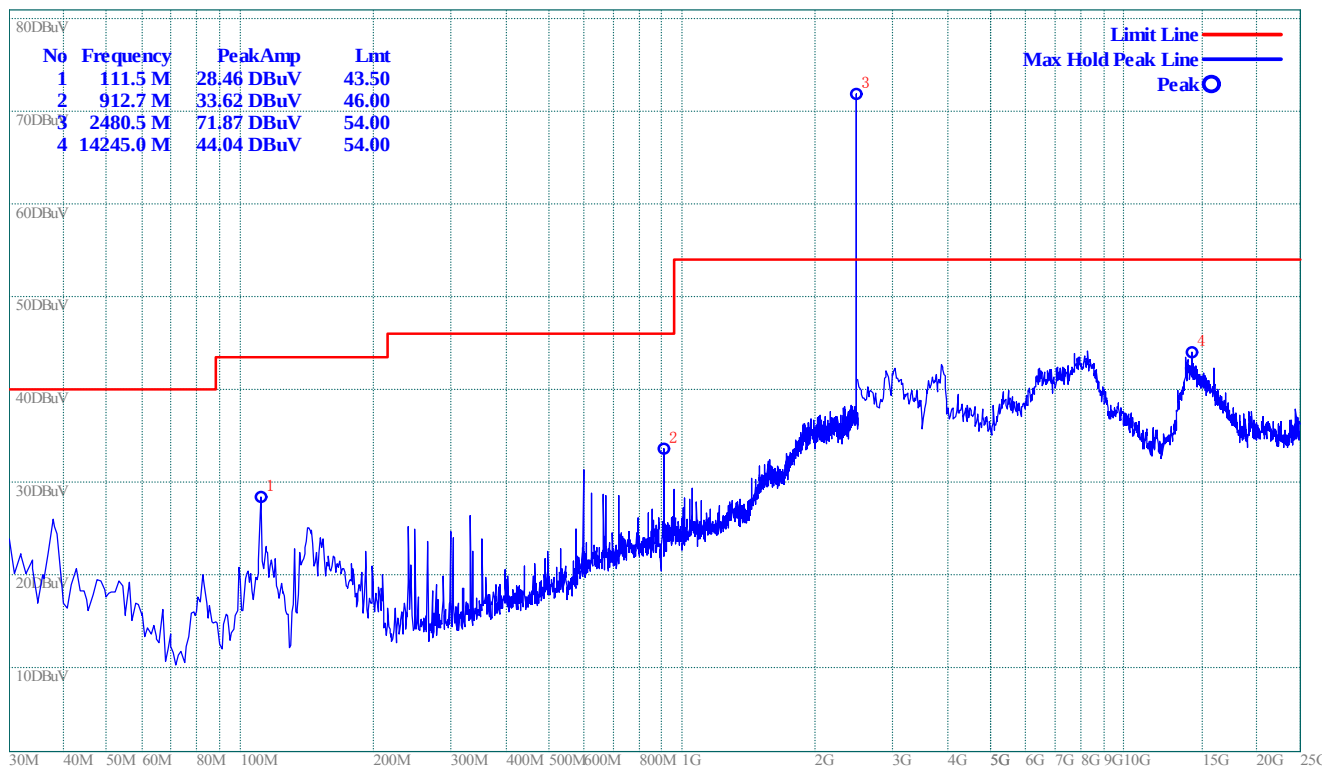

(Plot C.1: Antenna Horizontal)

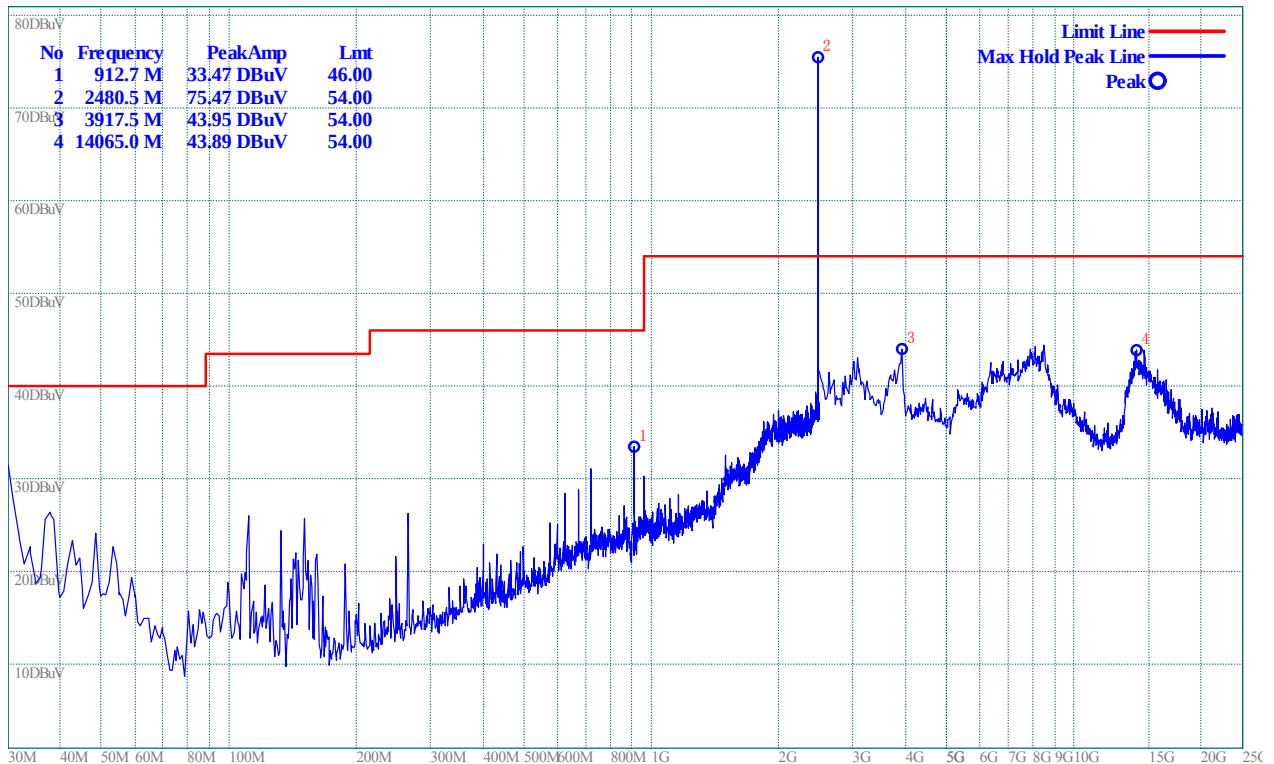

(Plot C.2: Antenna Vertical)

2.9.3.3 8-DPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	71.45	67.56	Horizontal	Plot A.1
		74.24	70.06	Vertical	Plot A.2
39	2441	74.49	70.52	Horizontal	Plot B.1
		76.26	72.09	Vertical	Plot B.2
78	2480	72.14	68.68	Horizontal	Plot C.1
		75.02	71.24	Vertical	Plot C.2

Test result of channel 0 (2402MHz):

Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
598.4	28.46	--	N.A	46	N.A	>6	100	98	PASS	Horizontal

912.7	33.74	--	N.A	46	N.A	>6	100	49	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.873	43.18	--	74	54	>6	>6	100	102	PASS	Vertical
14.133	44.52	--	74	54	>6	>6	100	112	PASS	Vertical
14.38	44.52	--	74	54	>6	>6	100	56	PASS	Horizontal

Test result of channel 39 (2441MHz):


Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
111.5	26.88	--	N.A	43.5	N.A	>6	100	23	PASS	Vertical
598.4	33.35	--	N.A	46	N.A	>6	100	79	PASS	Horizontal
912.7	33.45	--	N.A	46	N.A	>6	100	106	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.85	42.96	--	74	54	>6	>6	100	79	PASS	Horizontal
8.305	43.87	--	74	54	>6	>6	100	87	PASS	Horizontal
14.115	44.52	--	74	54	>6	>6	100	114	PASS	Vertical

Test result of channel 78 (2480MHz):


Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
598.4	33.58	--	N.A	46	N.A	>6	100	78	PASS	Horizontal
912.7	33.74	--	N.A	46	N.A	>6	100	43	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.873	43.18	--	74	54	>6	>6	100	112	PASS	Vertical
14.133	44.52	--	74	54	>6	>6	100	112	PASS	Vertical
14.38	44.4	--	74	54	>6	>6	100	59	PASS	Horizontal

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

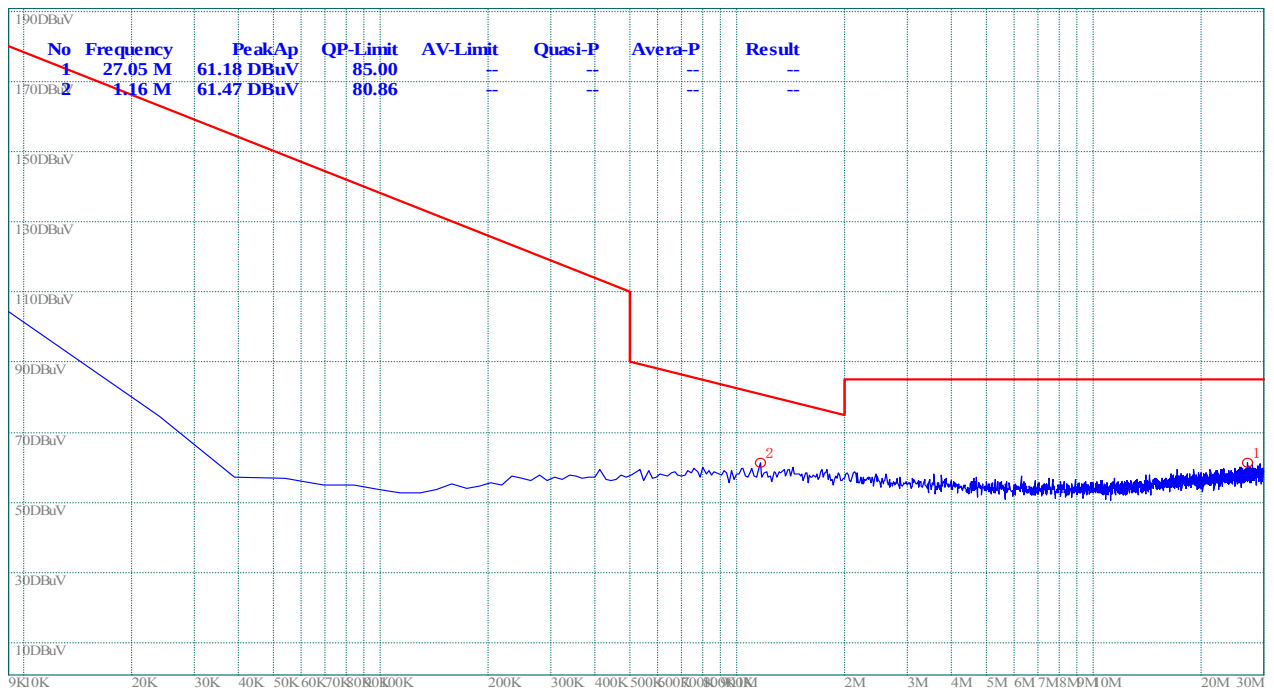

(Plot A.0: 9kHz to 30MHz)

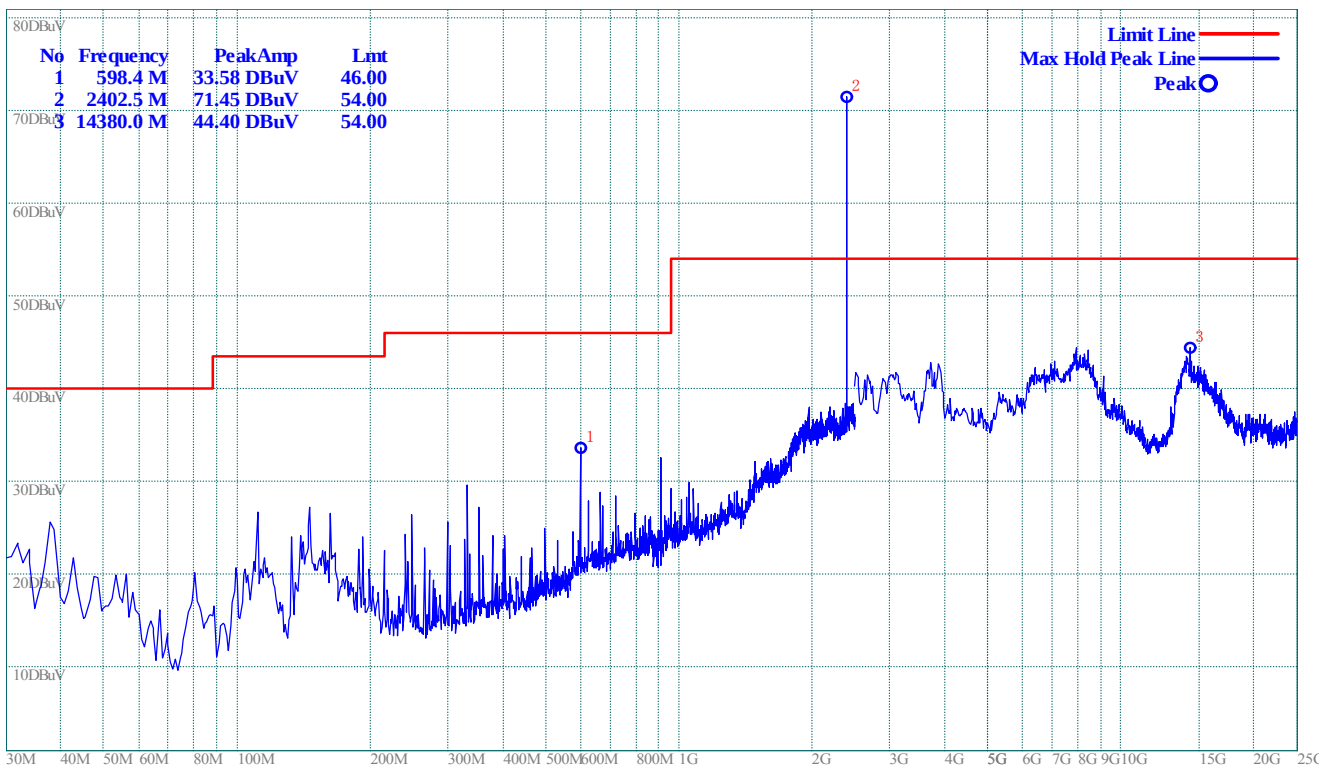


(Plot A.1: Antenna Horizontal)

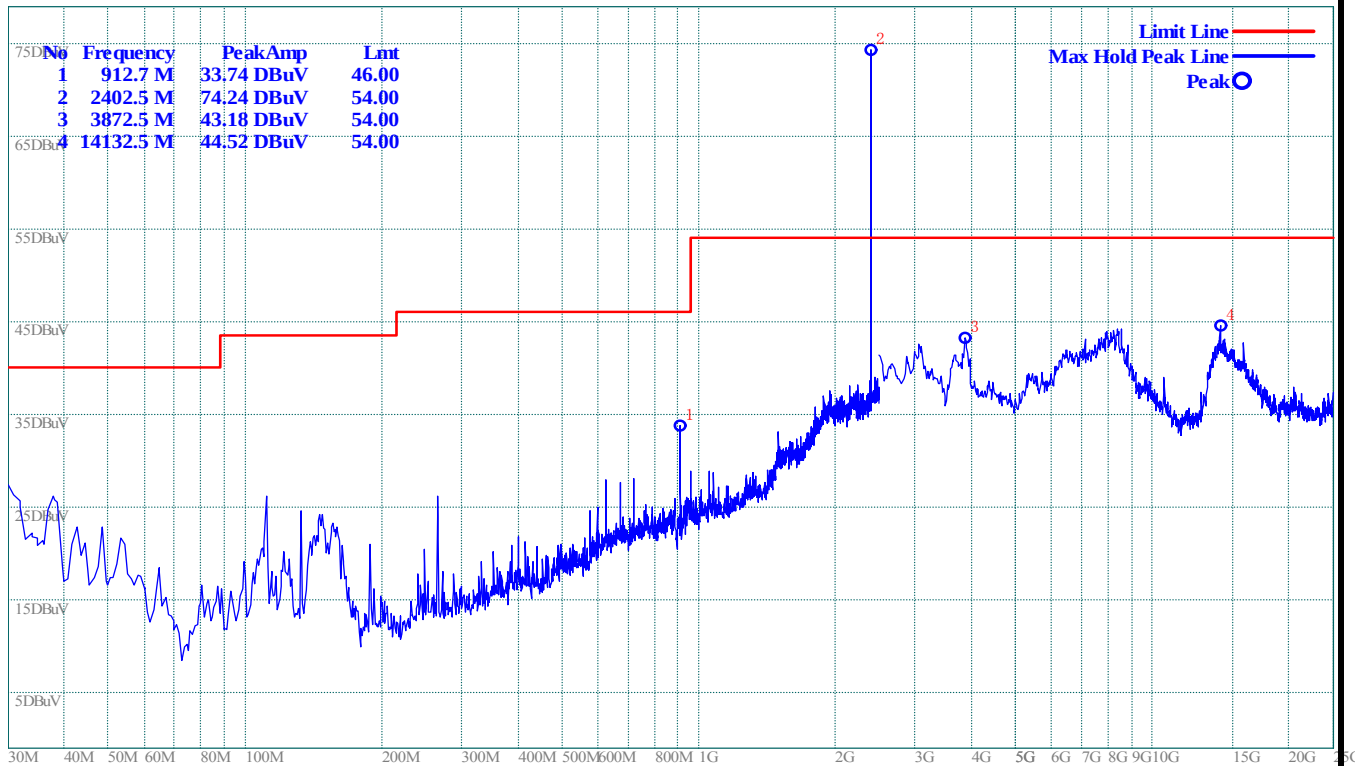


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

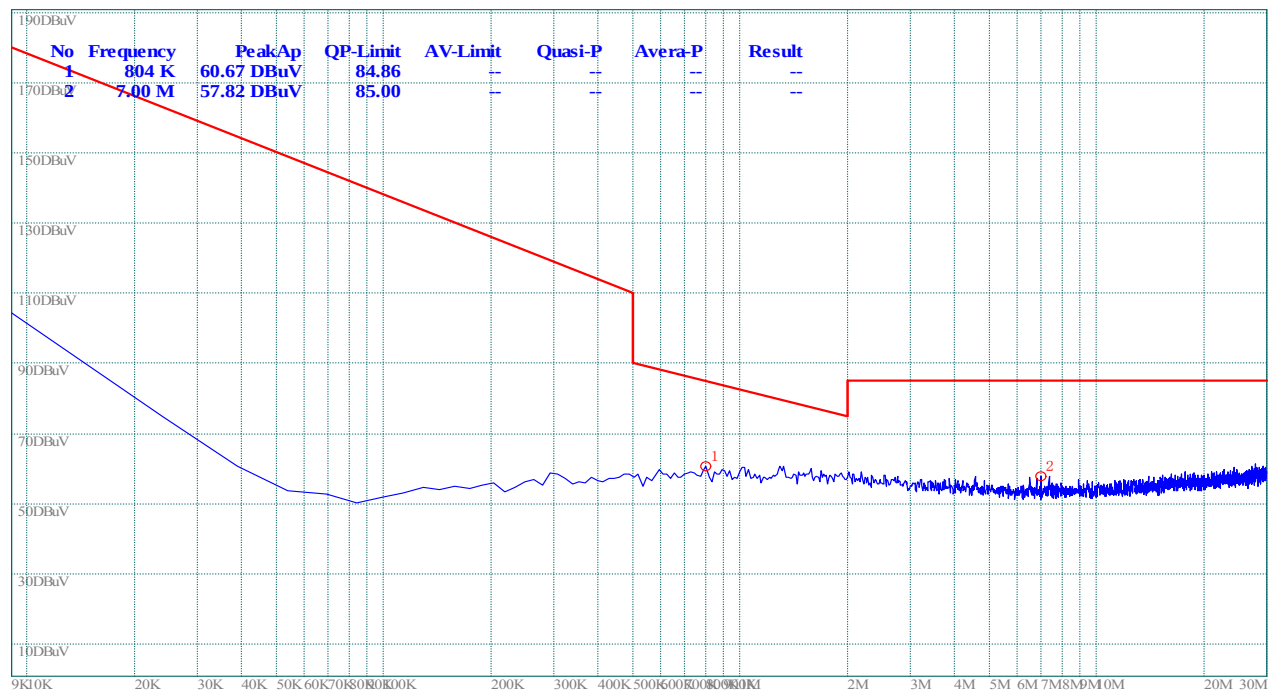

(Plot B.0: 9kHz to 30MHz)

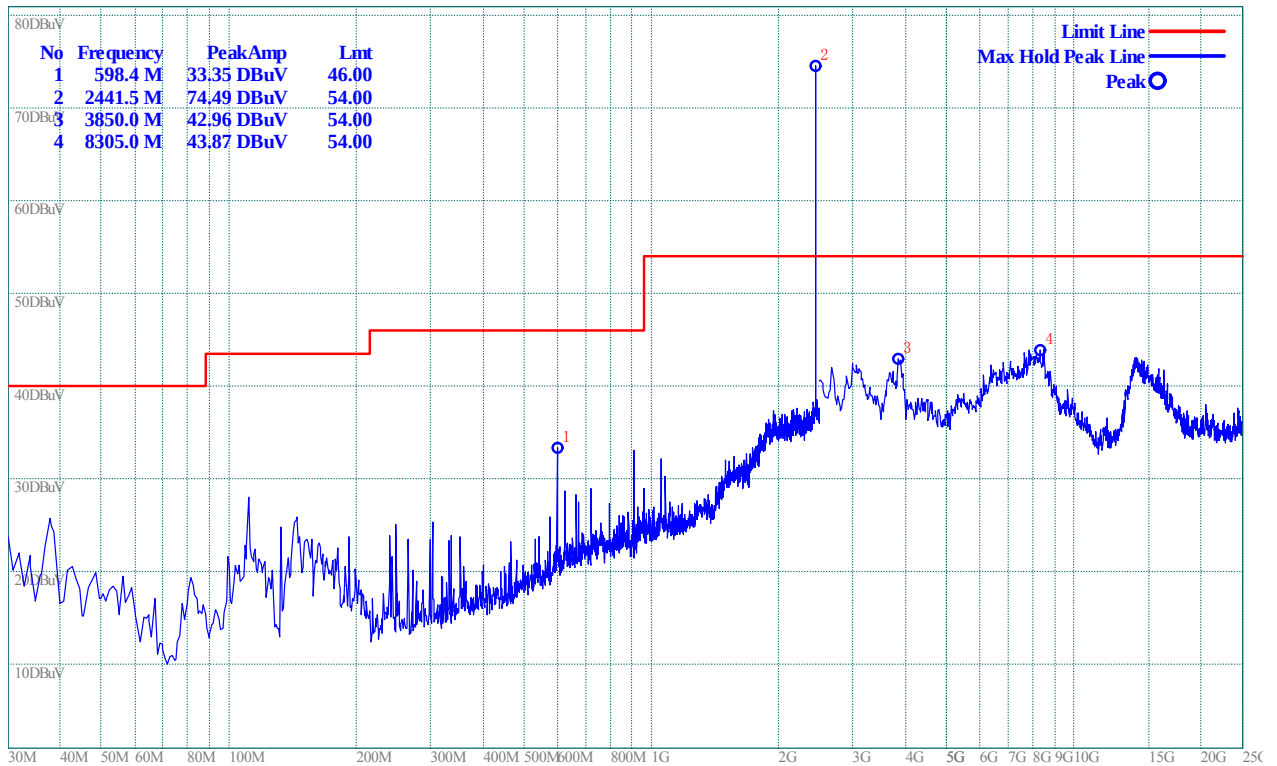


(Plot B.1: Antenna Horizontal)

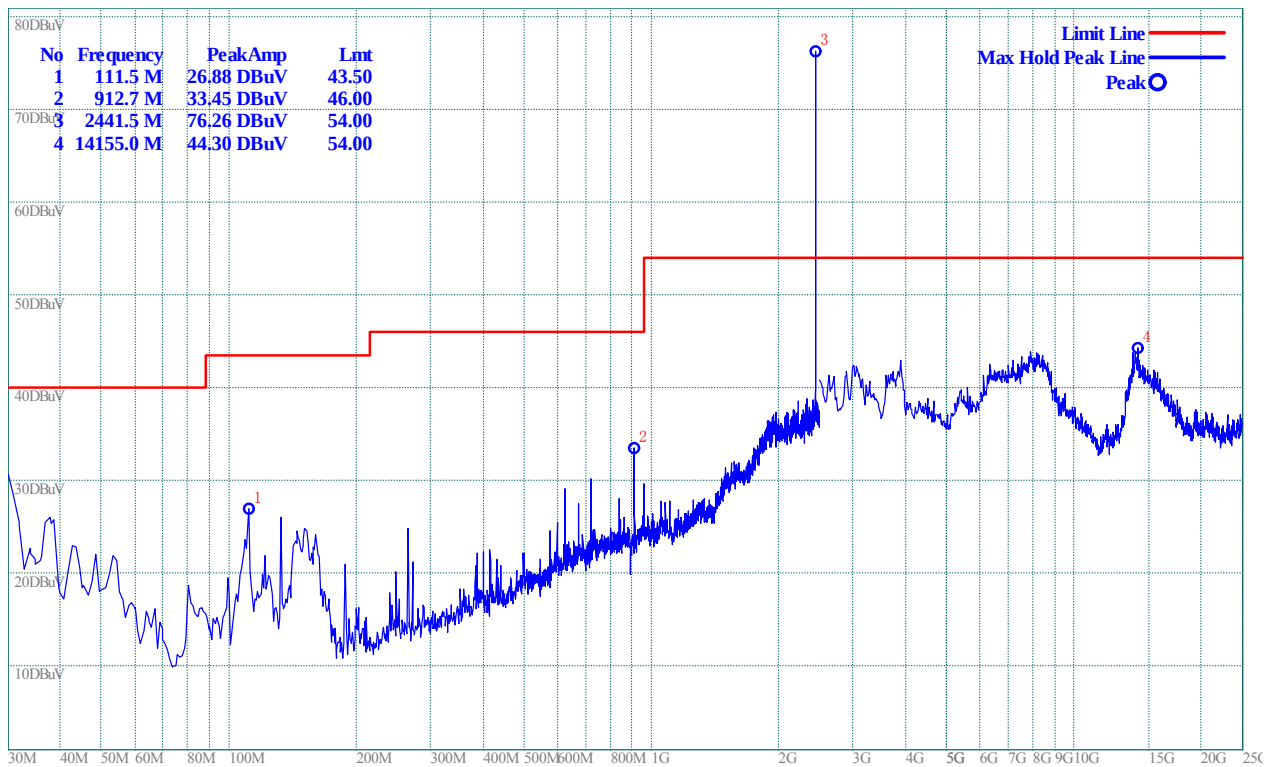


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

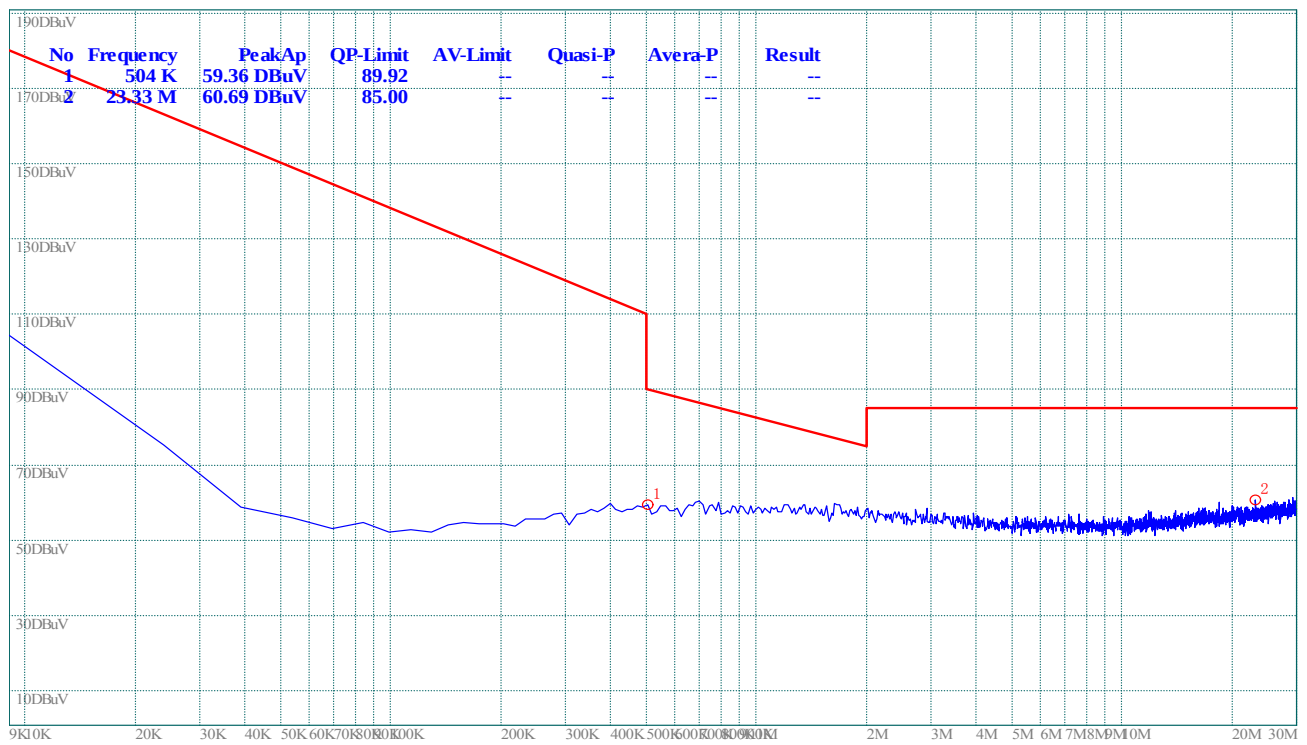

(Plot C.0: 9kHz to 30MHz)

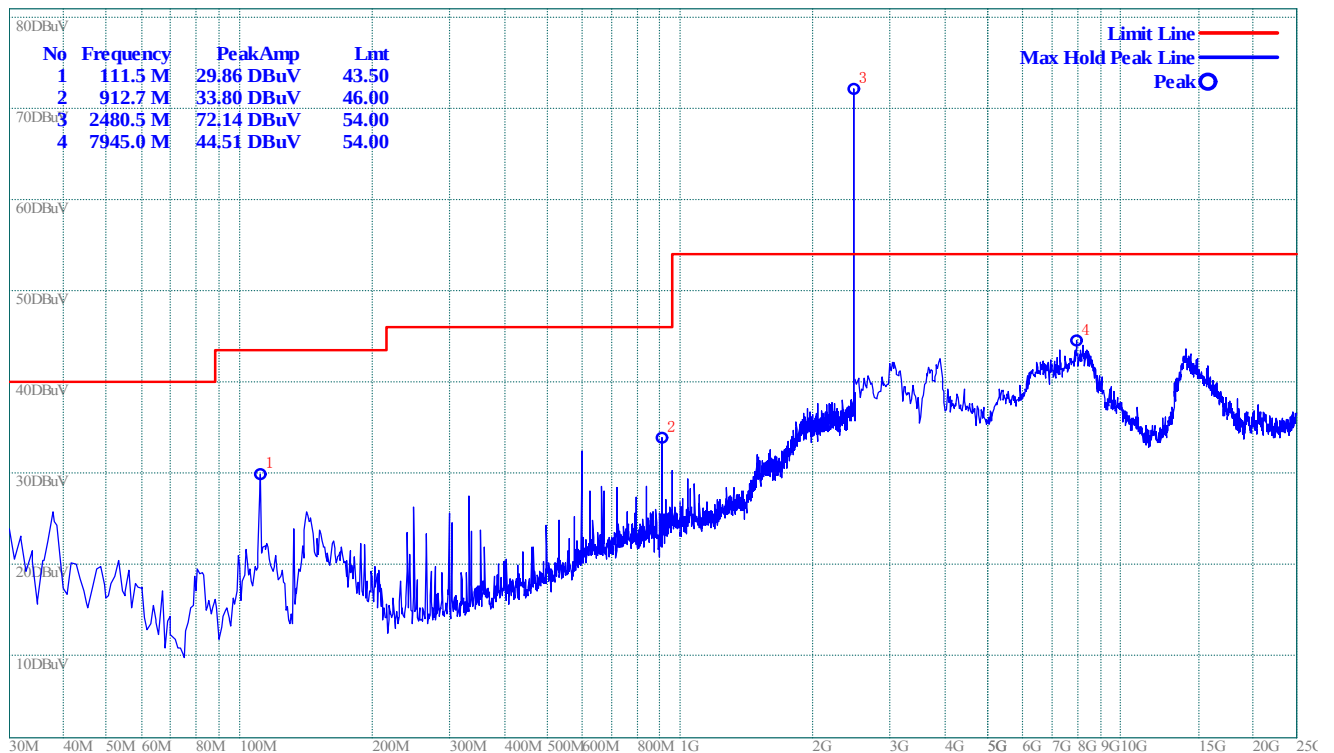

(Plot C.1: Antenna Horizontal)

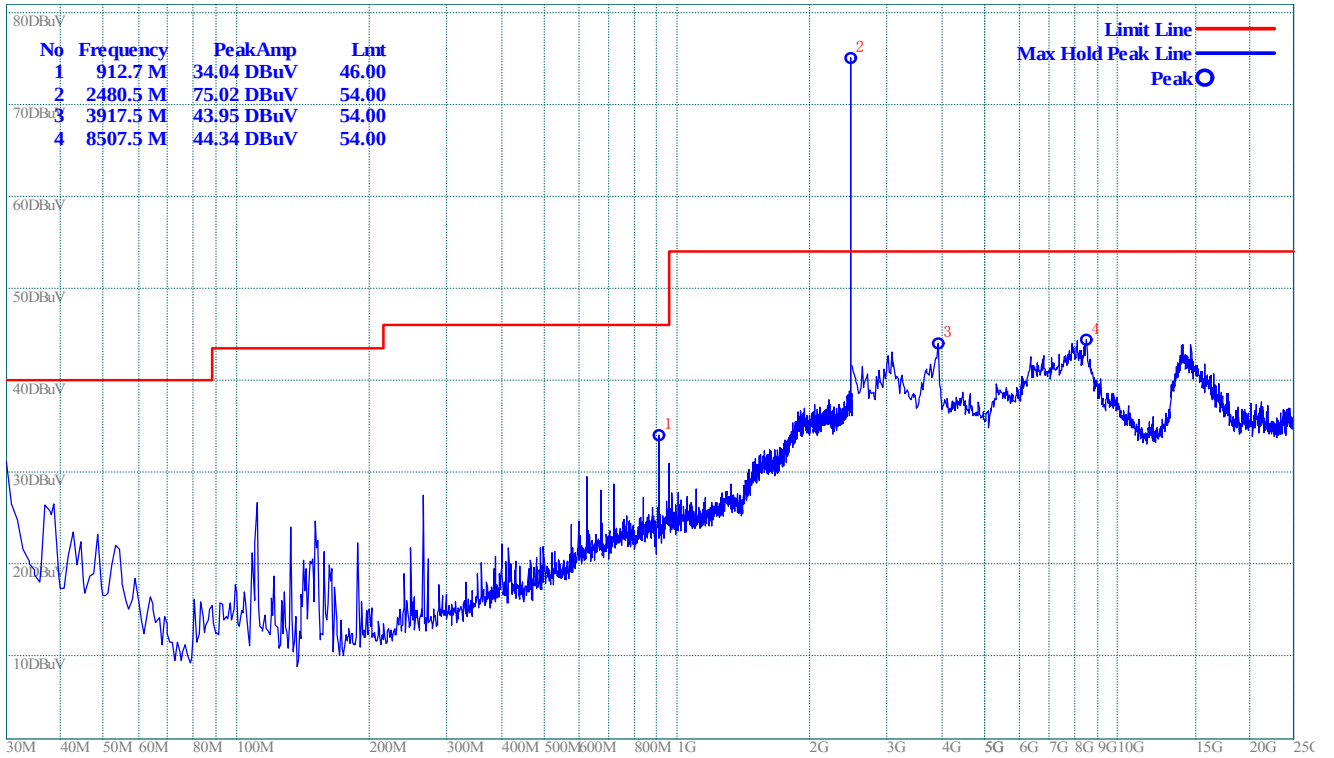

(Plot C.2: Antenna Vertical)

2.10 Radiated Emission (Receiver model)

2.10.1 Requirement

Please see section 2.1.2 of this report.

2.10.2 Test Description

Please see section 2.1.2 of this report.

2.10.3 Test Verdict for Harmonics:

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

Test result of channel 0 (2402MHz):

Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
30.0 M	25.90	--	N.A	40	N.A	>6	100	113	PASS	Horizontal
66.9 M	23.28	--	N.A	40	N.A	>6	100	340	PASS	Horizontal
866.1 M	39.15	--	N.A	46	N.A	>6	100	235	PASS	Horizontal
30.0 M	26.23	--	N.A	40	N.A	>6	100	224	PASS	Vertical
58.1 M	30.99	--	N.A	40	N.A	>6	100	250	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.220 G	45.57	--	74	54	>6	>6	100	103	PASS	Horizontal
4.615 G	43.63	--	74	54	>6	>6	100	270	PASS	Horizontal
3.243 G	45.66	--	74	54	>6	>6	100	114	PASS	Vertical
6.280 G	44.47	--	74	54	>6	>6	100	0	PASS	Vertical

Test result of channel 39 (2441MHz):

Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
30.0 M	25.90	--	N.A	40	N.A	>6	100	113	PASS	Horizontal
66.9 M	24.68	--	N.A	40	N.A	>6	100	340	PASS	Horizontal
132.8 M	23.30	--	N.A	43.5	N.A	>6	100	205	PASS	Horizontal
856.4 M	39.86	--	N.A	46	N.A	>6	100	47	PASS	Horizontal
33.9 M	31.19	--	N.A	40	N.A	>6	100	215	PASS	Vertical


60.1 M	29.89	--	N.A	40	N.A	>6	100	45	PASS	Vertical
144.5 M	21.74	--	N.A	43.5	N.A	>6	100	0	PASS	Vertical
861.3 M	35.03	--	N.A	40	N.A	>6	100	25	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
3.310 G	46.47	--	74	54	>6	>6	100	113	PASS	Horizontal
3.265 G	47.03	--	74	54	>6	>6	100	200	PASS	Vertical

Test result of channel 78 (2480MHz):


Frequency (MHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	QP	PK	QP	PK	QP				
31.0 M	24.20	--	N.A	40	N.A	>6	100	27	PASS	Horizontal
58.1 M	24.45	--	N.A	40	N.A	>6	100	120	PASS	Horizontal
132.8 M	22.67	--	N.A	43.5	N.A	>6	100	105	PASS	Horizontal
864.2 M	39.93	--	N.A	46	N.A	>6	100	69	PASS	Horizontal
59.1 M	29.77	--	N.A	40	N.A	>6	100	350	PASS	Vertical
144.5 M	22.86	--	N.A	43.5	N.A	>6	100	360	PASS	Vertical
868.1 M	37.45	--	N.A	46	N.A	>6	100	29	PASS	Vertical
Frequency (GHz)	Measurement		Limit		Margin (dB)		Height (cm)	Azimuth (deg)	Verdict	Antenna Polarization
	PK	AV	PK	QP	PK	AV				
2.447 G	43.55	--	74	54	>6	>6	100	39	PASS	Horizontal
3.243 G	45.79	--	74	54	>6	>6	100	90	PASS	Horizontal
3.243 G	45.33	--	74	54	>6	>6	100	150	PASS	Vertical

2.10.3.1 Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

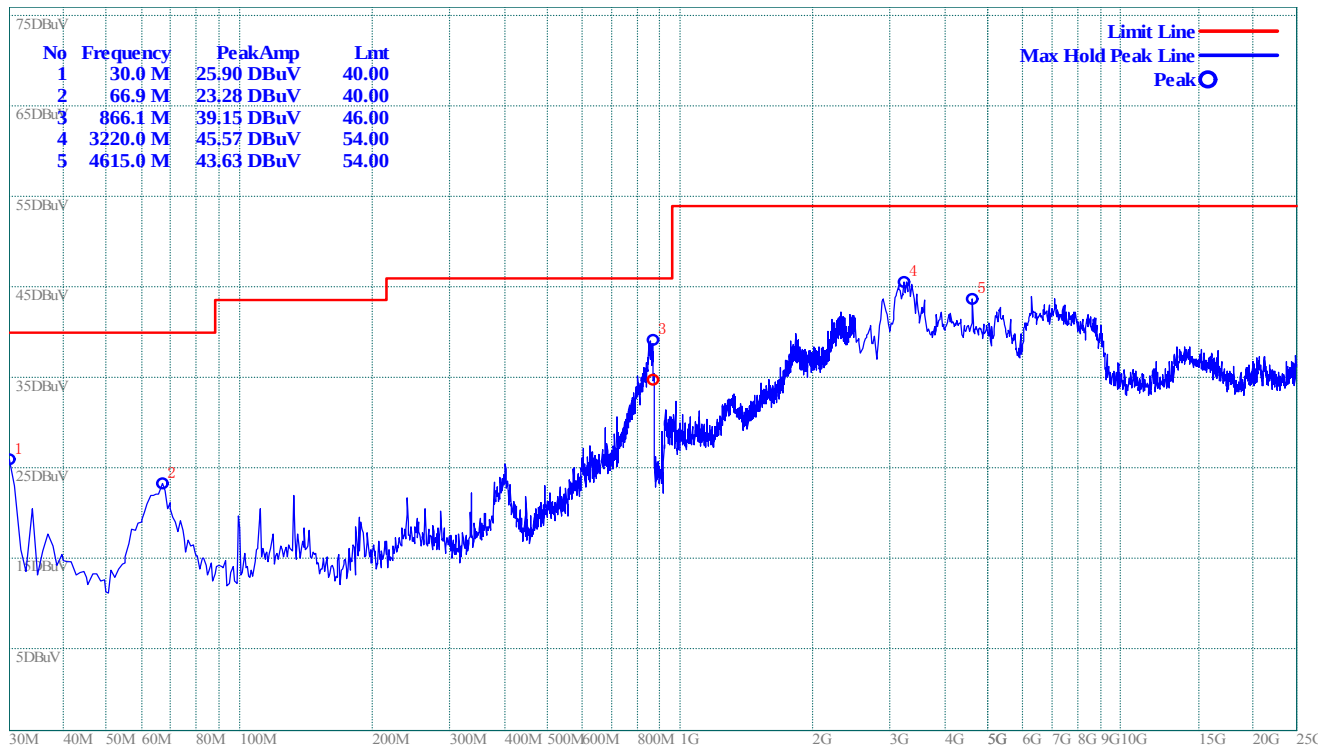


(Plot A.1: Antenna Horizontal)

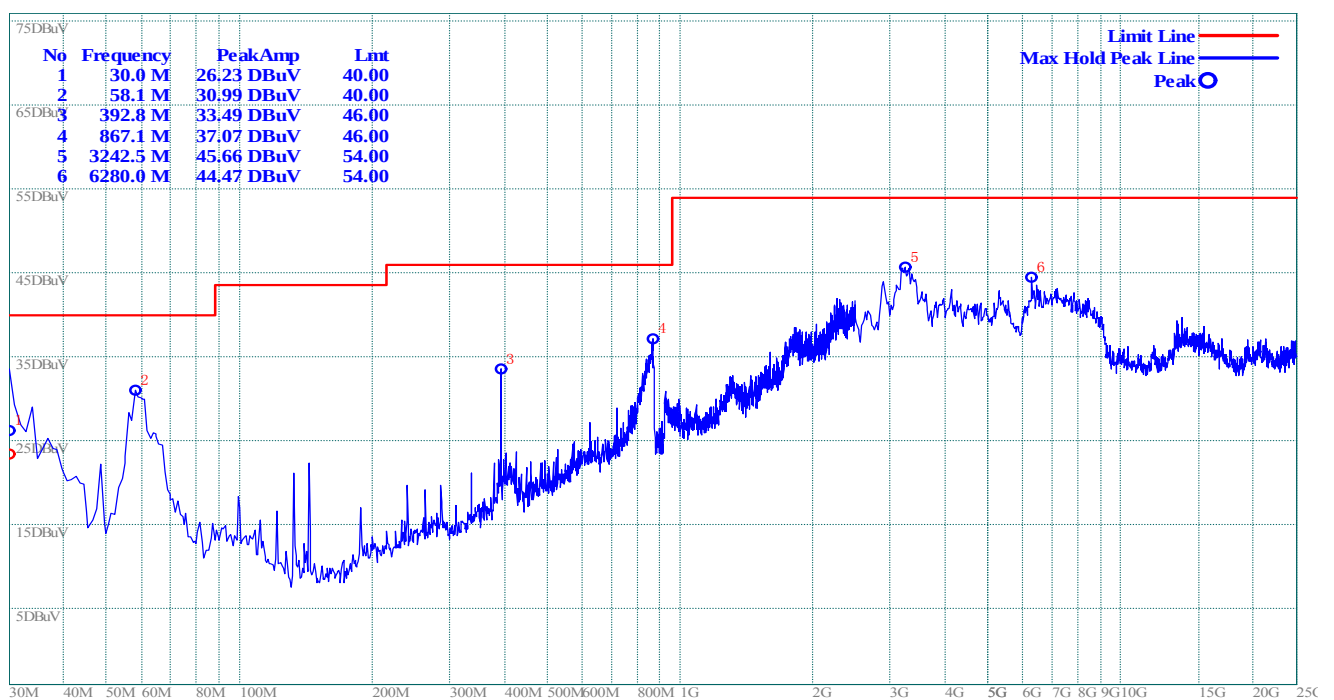


(Plot A.2: Antenna Vertical)

Plot for Channel = 39

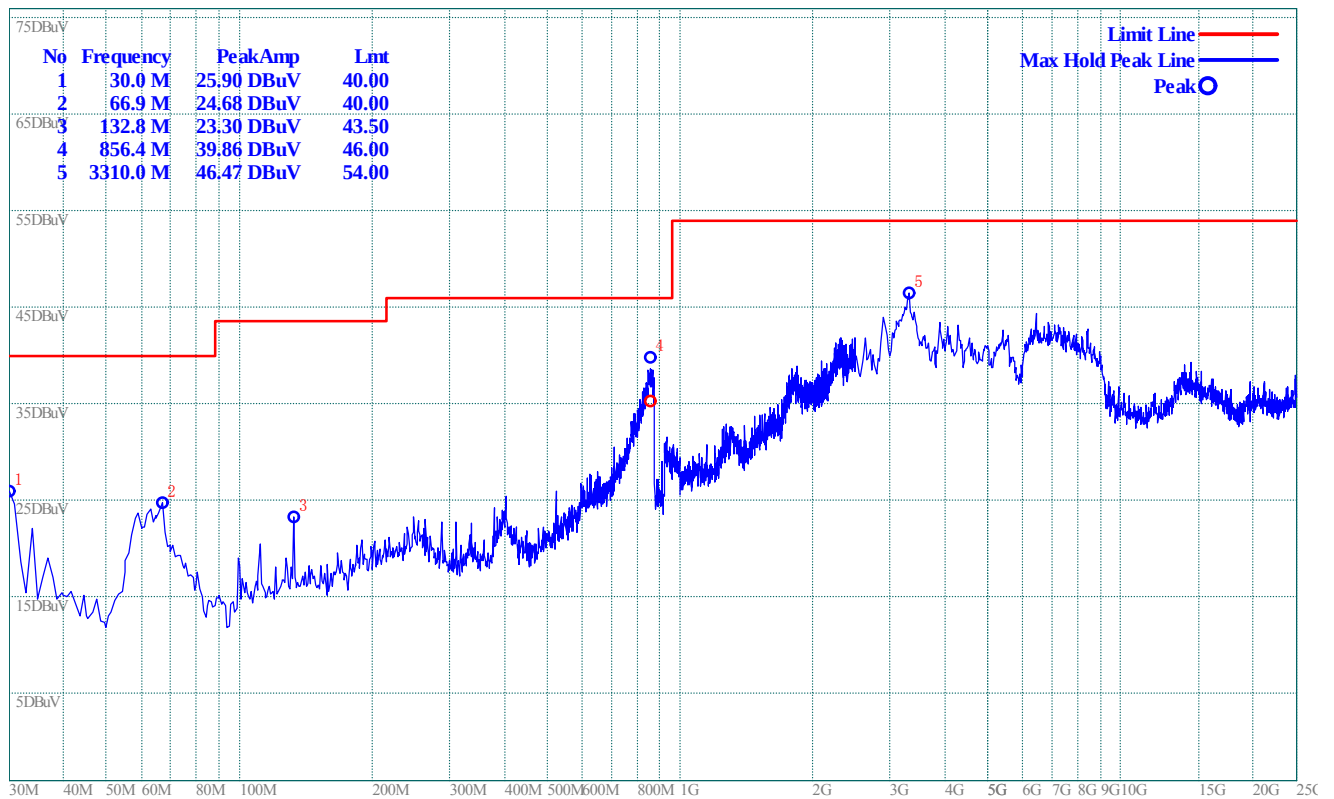


(Plot B.1: Antenna Horizontal)

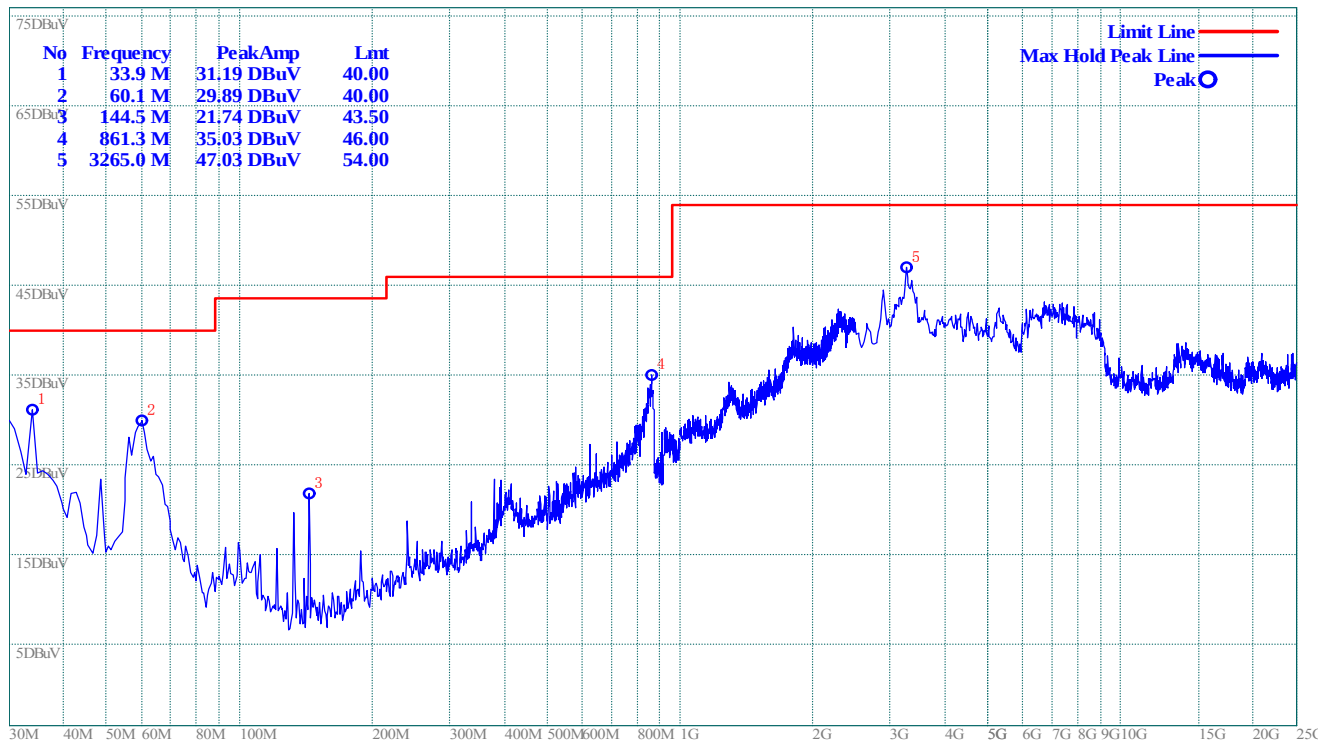


(Plot B.2: Antenna Vertical)

Plot for Channel = 78

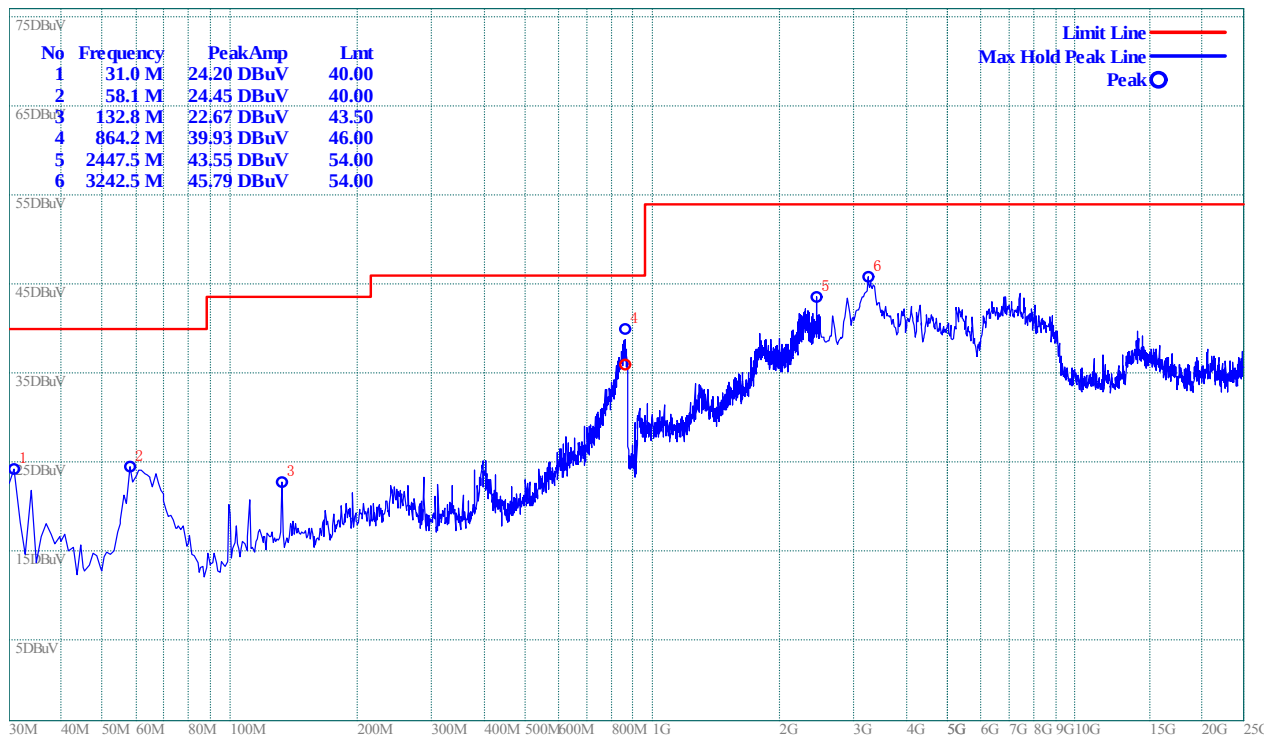

(Plot C.1: Antenna Horizontal)

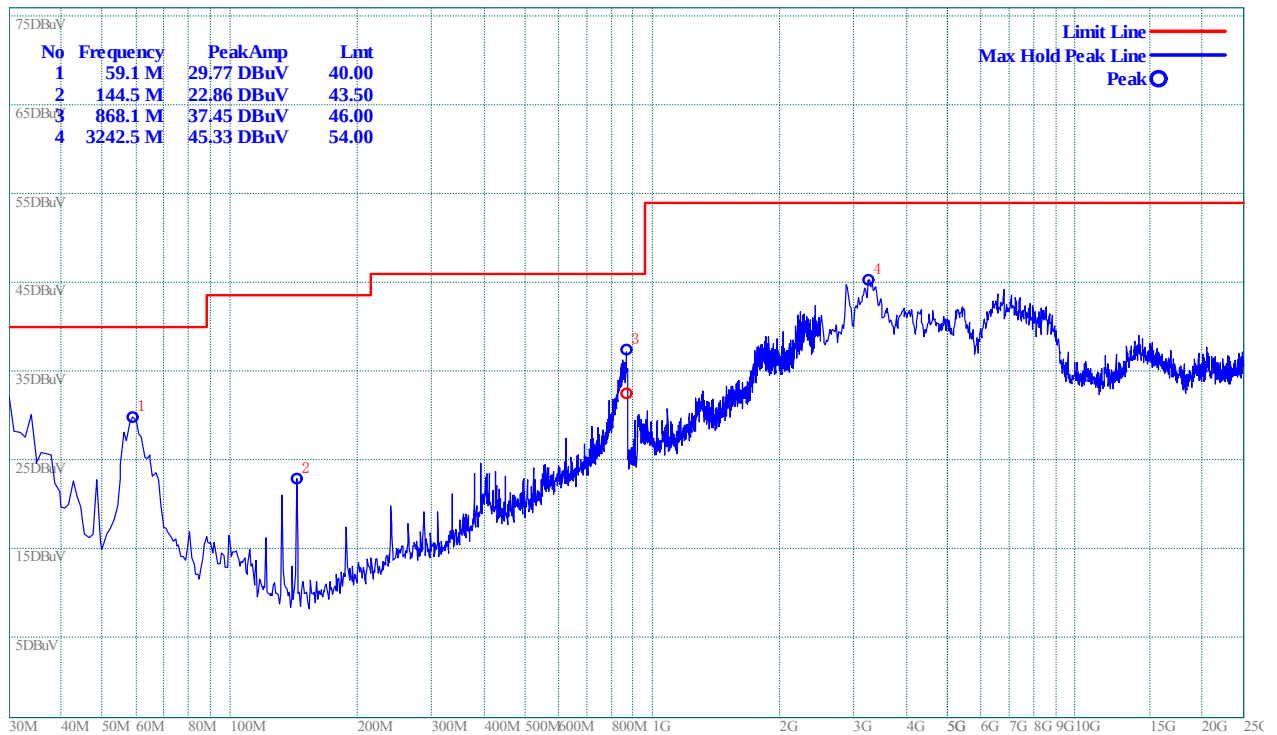

(Plot C.2: Antenna Vertical)

** END OF REPORT **