



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT - Addendum

Test Report Number – 22725-1BT

Report Date – 2009-01-16

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2009-01-11 to 2009-01-15

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2009-01-16

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885

IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ
ISO/IEC-17025:2005 accredited by UKAS



Table of Contents

Test Report Details 3

Applicable Standards 4

Summary of Testing..... 5

General and Special Conditions..... 5

Equipment and Cable Configurations..... 6

Measuring Equipment and Calibration Information 6

Description of Bluetooth (BT) Transmitter 7

Measurement Procedures and Data..... 8

 FIELD STRENGTH OF SPURIOUS EMISSIONS..... 8

 Measurement Procedure..... 8

 Measurement Results..... 8

 Maximum radiating position and orientation 9

 30-3000 MHz Low Channel Dual Polarization Y Slider Open 10

 30-3000 MHz Middle Channel Dual Polarization Y Slider Open..... 11

 30-3000 MHz High Channel Dual Polarization Y Slider Open 11

 3-18 GHz Low Channel Dual Polarization X Slider Open..... 12

 3-18 GHz Low Channel Dual Polarization Y Slider Open..... 12

 3-18 GHz Low Channel Dual Polarization Z Slider Open 13

 3-18 GHz Middle Channel Dual Polarization X Slider Open..... 13

 3-18 GHz Middle Channel Dual Polarization Y Slider Open..... 14

 3-18 GHz Middle Channel Dual Polarization Z Slider Open..... 14

 3-18 GHz High Channel Dual Polarization X Slider Open 15

 3-18 GHz High Channel Dual Polarization Y Slider Open 15

 3-18 GHz High Channel Dual Polarization Z Slider Open..... 16

 18-26.5 GHz Low Channel Dual Polarization Y Slider Open..... 17

 18-26.5 GHz Middle Channel Dual Polarization Y Slider Open..... 18

 18-26.5 GHz High Channel Dual Polarization Y Slider Open 18

 BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS..... 19

 Measurement Procedure..... 19

 Measurement Results 19

 Authorized Band Emissions Low Channel Dual Polarization X Slider Open..... 20

 Authorized Band Emissions Low Channel Dual Polarization Y Slider Open..... 21

 Authorized Band Emissions Low Channel Dual Polarization Z Slider Open 22

 Authorized Band Emissions High Channel Dual Polarization X Slider Open 23

 Authorized Band Emissions High Channel Dual Polarization Y Slider Open 24

 Authorized Band Emissions High Channel Dual Polarization Z Slider Open..... 25

 PICTURES..... 26

Test Report Details

Tests Performed By: Motorola (China) Technologies Ltd.
Asia Global Compliance Labs
No.1 Wang Jing East Road
Chao Yang District
Beijing, 100102, P. R. China
Phone: +86 10 8473 2610
FCC Registration Number: 177885
IC Registration Number: 109AW-1

Tests Requested By: Motorola Inc.
Mobile Devices business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cell phone with Bluetooth

Form Factor: Slider phone

Signaling Capability: GSM 850/900/1800/1900, EDGE class 10,
GPRS class 10, Bluetooth class 1

Serial Numbers: 354889020017776

Battery Type: BQ50 with model number SNN5804B

FCC ID: IHDP56JQ1

Project Number: 22725-1

Testing Complete Date: 01-15-2009

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart C – Intentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 27 - Wireless Communications Service
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: ANSI 63.4-2003, RSS-GEN, RSS-210 (Bluetooth).

DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" published by the Federal Communications Commission was also used in the testing of this product.

The following tests were performed according to the regulations:

- The **spurious radiated emission** requirements of § **15.247(d) of CFR47 Part 15 2006**, specifically" radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Under this project only 30 to 1000 MHz, 1 to 26.5 GHz radiated emissions and radiated band-edge measurements were performed.
- For frequencies below 1 GHz a 100 kHz RBW (6 dB) is used and above 1 GHz a 1 MHz RBW (6 dB) is used.

Summary of Testing

Test	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions	Pass
2	Band-edge Compliance of RF Radiated Emissions	Pass

Test	Test Name	Results
1	Field Strength of Spurious Emissions	See plots
2	Band-edge Compliance of RF Radiated Emissions	See plots

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The test sample was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 21.7 ° C ± 1 ° C and relative humidity of 49.4 % ± 6 % over the dates used for testing.

Equipment and Cable Configurations

The test sample was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Equipment related to the semi-anechoic chamber testing:

Equipment	Model/type	Serial number	Operational range	Date of calibration
EMI analyzers	ESU 40	100036	20 Hz – 40 GHz	12.11.2008
Pre Amplifiers	PA-02-0001:	2007343	(10 kHz – 3 GHz)	06.26.2008
	PA-02-218	2007344	3 GHz – 18 GHz	06.26.2008
	PA-02-5	2007345	18 GHz – 40 GHz	06.26.2008
Radio com. Tester	CMU 200	112790	GSM 850/900/1800/1900 IS95, UMTS, CDMA, Bluetooth	N/A
Band Reject Filter	WRCD	N/A	GSM 850/900/1800/1900 IS95, UMTS, CDMA	N/A
	4N45-24241/3/6	N/A	WLAN	N/A

The antennas used in the various tests are listed in the below table. The log-periodic antenna is used as communication and link establishment antenna for Bluetooth.

Antenna	Type	Serial number	Operational range	Date of calibration
Hybrid-log periodic	TDK HLP 3003C	130361	30 MHz – 3 GHz	11.07.08
Double ridged Horn	TDK HRN0118	130303	1 GHz – 18 GHz	03.26.08
Double ridged Horn	ETS HRN3116	00071938	18 GHz – 40 GHz	10.17.08
Log-periodic (link)	TDK HRN0118	130395	300 MHz – 3 GHz	N/A

All equipment is on a one-year calibration cycle except for link antennas

Description of Bluetooth (BT) Transmitter

The 22725-1 cell phone sample offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483.5 MHz. The Bluetooth antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by the industrial standard. In this application, the test sample is battery-operated.

Measurement Procedures and Data

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 15.205, 15.209, 15.247

Measurement Procedure

The test sample is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

Field Strength (dB μ V/m) = EMI Receiver Level (dB μ V) + Cable Loss (dB) -
Amplifier Gain (dB) + Filter loss (dB) + Antenna
Correction Factor (3/m)

For 18 GHz – 26.5 GHz:

Field Strength (dB μ V/m) = EMI Receiver Level (dB μ V) + Cable Loss (dB) -
Amplifier Gain (dB) + Filter loss (dB) + Antenna
Correction Factor (1/m)

A fully charged battery was used for the supply voltage.

The test sample was operated during the measurements under the following conditions:

- Tests were performed at low, mid and high channels.
- Tests were performed in both horizontal and vertical polarity.
- Investigation of maximum radiation orientation and position of the product sample to determine test orientations angles.
 - Tests were performed with the sample orientated along X, Y and Z orthogonal axis based on findings.
 - Tests were performed with the test sample placed in worst case position either open or closed based on form factor. Verification tests were performed for the other position.

Measurement Results

For peak emissions detected above 1 GHz, only those emissions that are higher than the AVG limit line plus 8 dB are selected for final emission analysis.

Maximum radiating position and orientation

The test sample was placed on top of a none-conductive pedestal in slider open position and a Bluetooth link towards the communication test set was established. The test sample was scanned with a log-periodic antenna connected to a spectrum analyzer over the whole sphere and the maximum radiation orientation was determined to be the Y orientation in vertical polarity.

With the test sample slider closed it was determined that the open position caused maximum radiation in the Bluetooth band.


A check of carrier on the Bluetooth center channel 39 was performed to determine the expected maximum radiation of any Bluetooth harmonics for the test sample with slider open placed in orientation Y.

Open:

Freq (MHz)	(PEAK) EMI (dBµV/m)	(2) Limit (dBµV/m)	(PEAK) Margin Lim2 (dB)	Pol	Ttbl Agl (deg)
2441.00	97.38	134.00	-36.62	H	314.90
2441.00	101.93	134.00	-32.07	V	172.20

Closed:


Freq (MHz)	(PEAK) EMI (dBµV/m)	(2) Limit (dBµV/m)	(PEAK) Margin Lim2 (dB)	Pol	Ttbl Agl (deg)
2441.00	98.43	134.00	-35.57	H	159.70
2441.00	101.06	134.00	-32.94	V	184.20

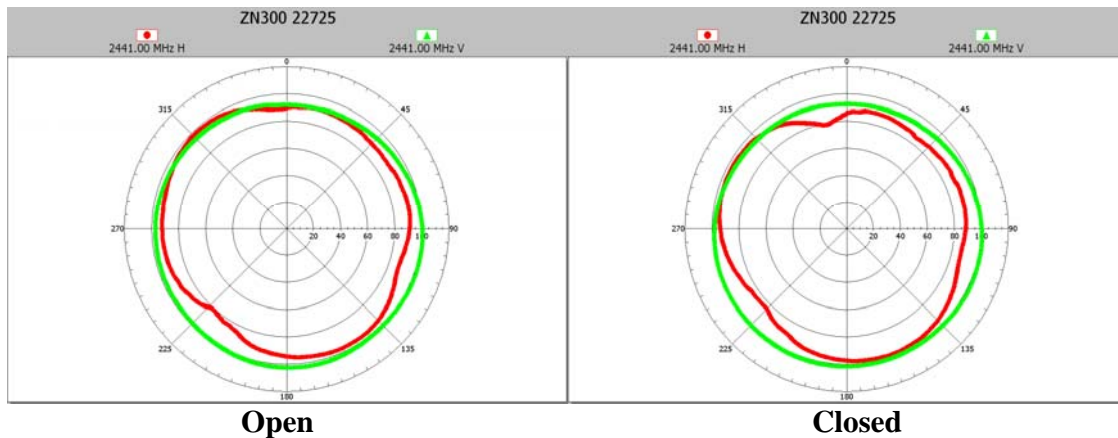


The Bluetooth radiated TX power is measured to be 4.55 dBm on channel 39 with RBW = 1 MHz (6dB).

There were no discernible emissions above the noise floor for 30 – 3000 MHz for Low, Mid and High Channels and all polarizations in Bluetooth band.

Only one worst case plot for each test frequency are shown in the below plots in the range from 30 MHz – 3000 MHz.

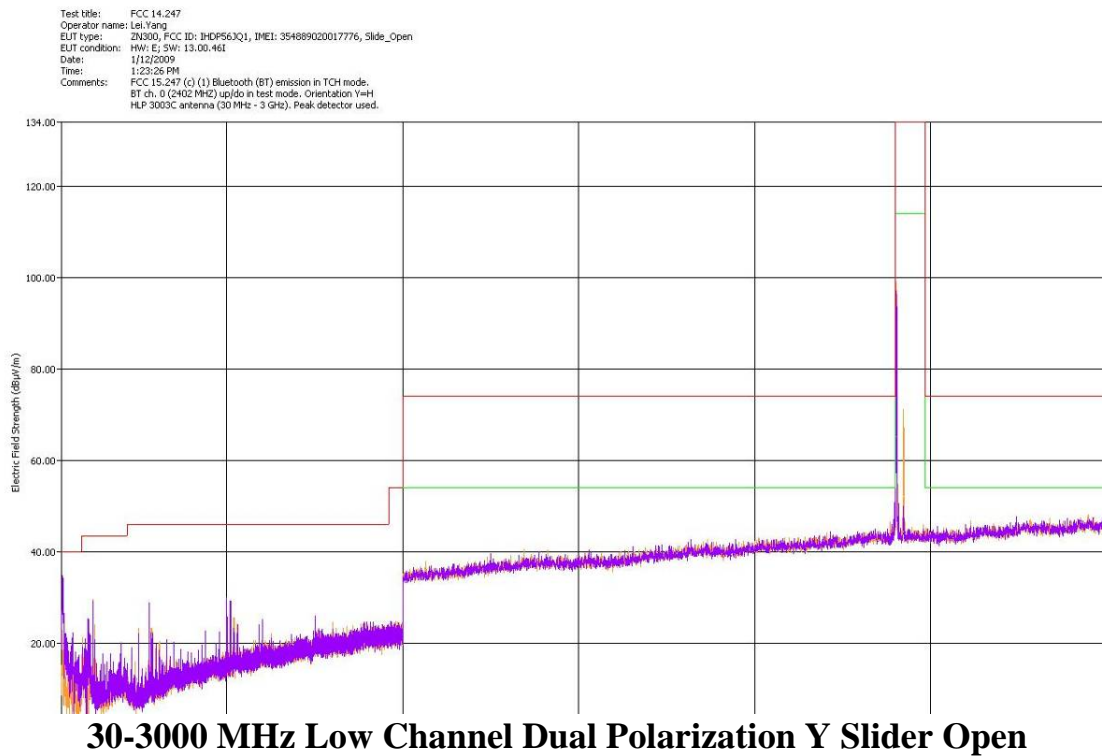


Test title: FCC 14.247
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 11:59:12 AM
Comments: FCC 15.247 (C) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 39 (2441 MHz) up/do in test mode. Orientation Y=H
HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

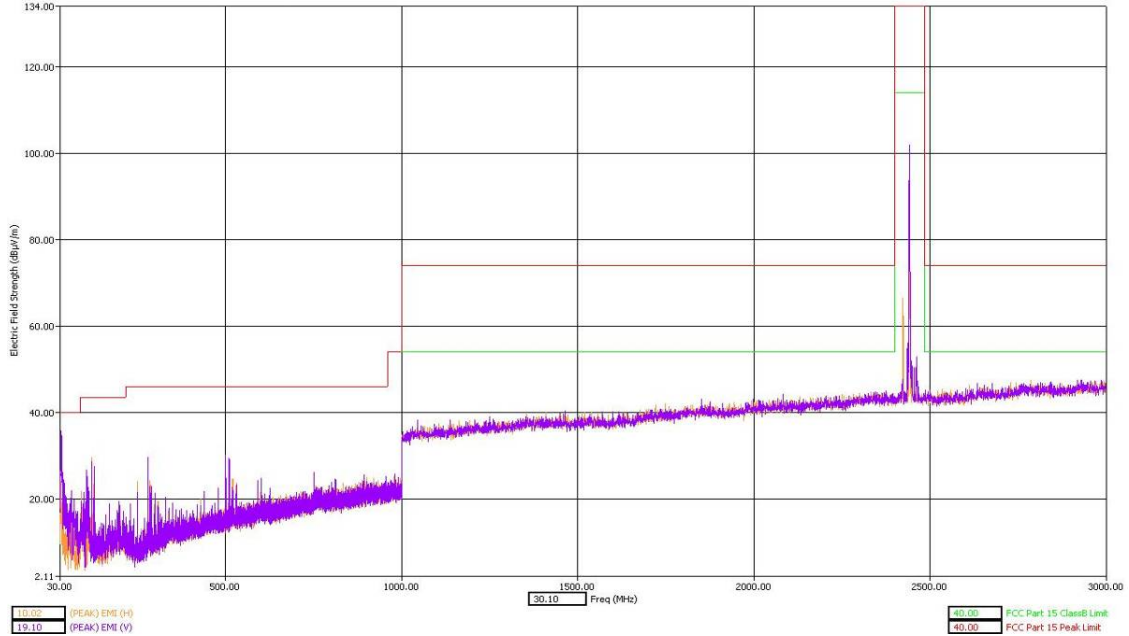


30-3000 MHz Middle Channel Dual Polarization Y Slider Open

Test title: FCC 14.247
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 12:05:51 PM
Comments: FCC 15.247 (C) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/do in test mode. Orientation Y=H
HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

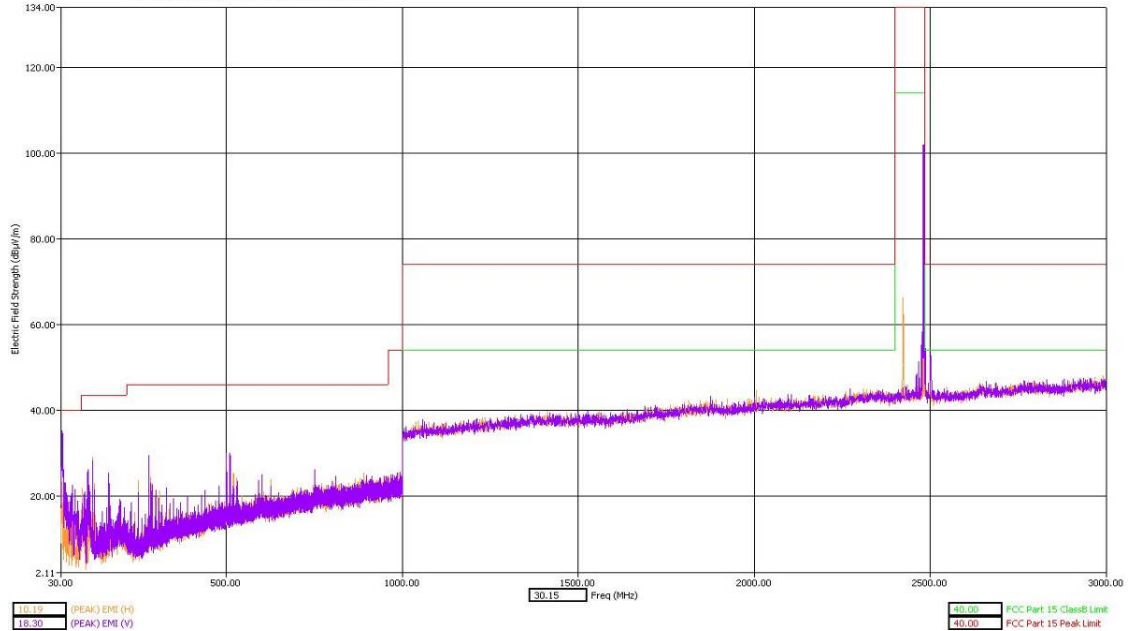


30-3000 MHz High Channel Dual Polarization Y Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 2:37:27 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 0 (2402 MHz) up/down in test mode. Orientation X=H
HRN 1008 antenna (3 GHz - 18 GHz). Peak detector used.

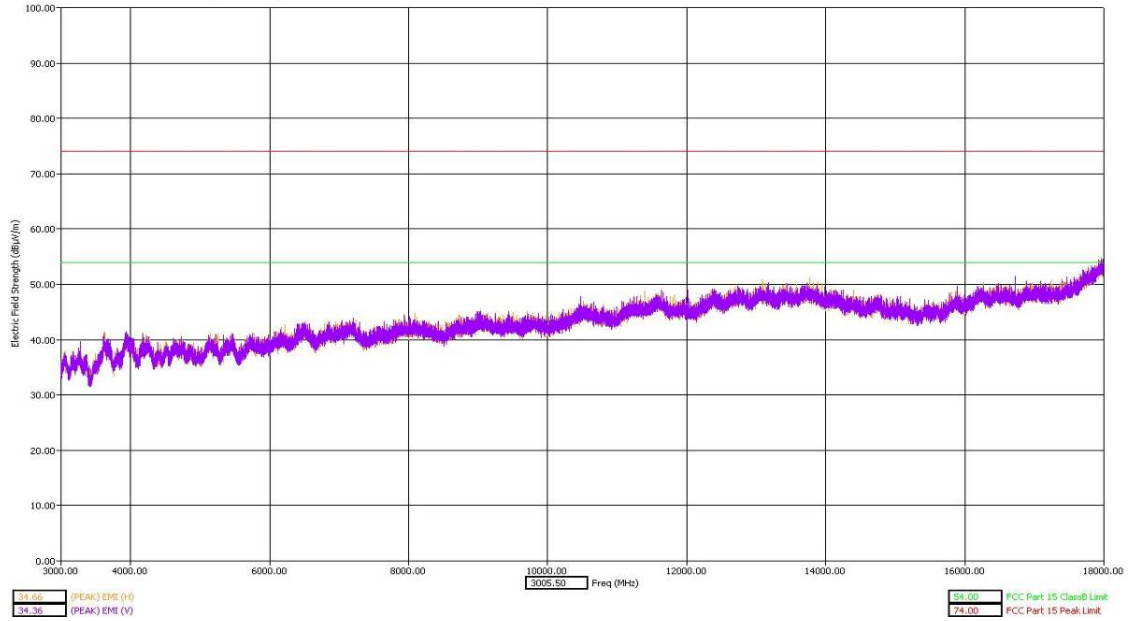


3-18 GHz Low Channel Dual Polarization X Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 1:52:41 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 0 (2402 MHz) up/down in test mode. Orientation Y=H
HRN 1008 antenna (3 GHz - 18 GHz). Peak detector used.

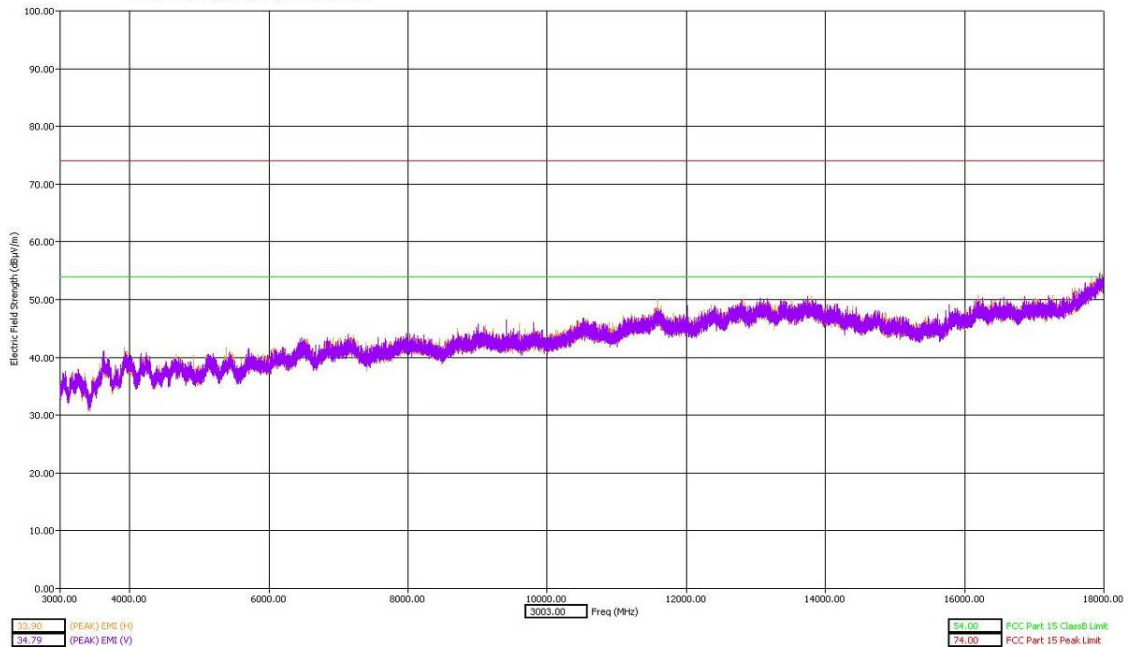


3-18 GHz Low Channel Dual Polarization Y Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 2:31:29 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 0 (2402 MHz) up/down in test mode. Orientation Z=V
HRN 1008 antenna (3 GHz - 18 GHz). Peak detector used.

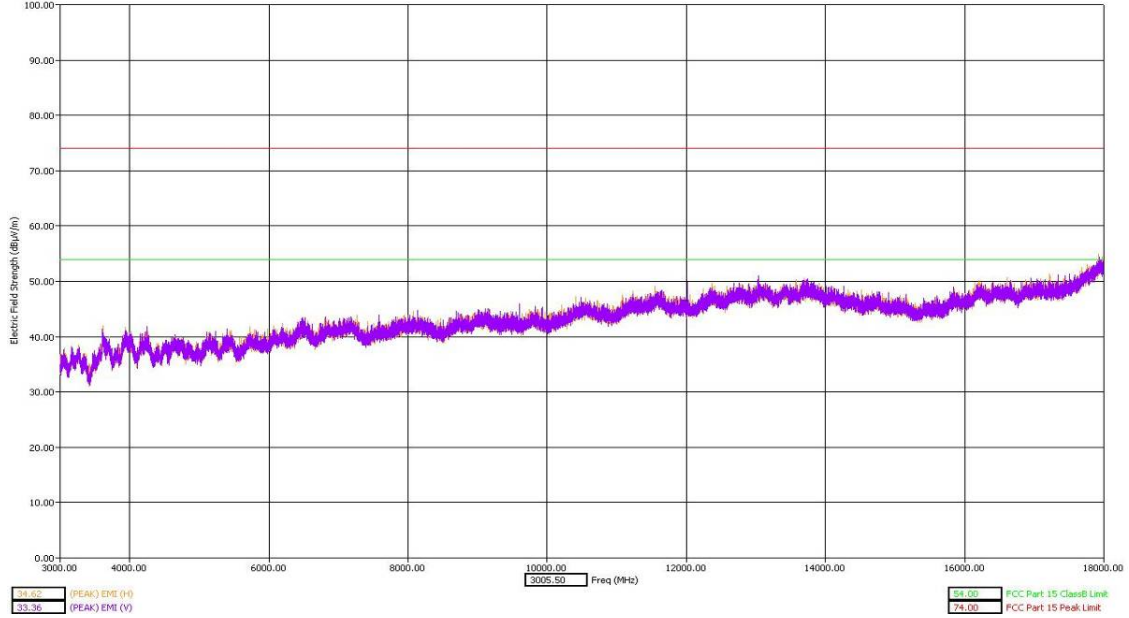


3-18 GHz Low Channel Dual Polarization Z Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 2:44:44 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 39 (2441 MHz) up/down in test mode. Orientation X=H
HRN 1008 antenna (3 GHz - 18 GHz). Peak detector used.

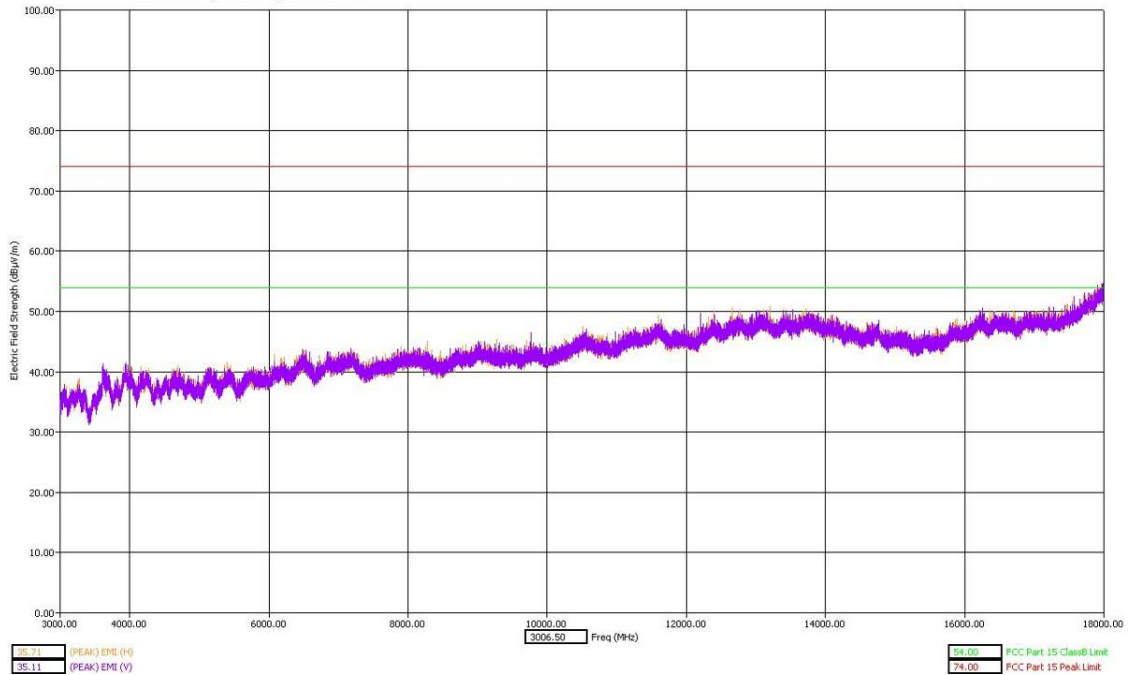


3-18 GHz Middle Channel Dual Polarization X Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 1:59:12 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 39 (2441 MHz) up/down in test mode. Orientation Y=H
HRN 1008 antenna (3 GHz - 18 GHz). Peak detector used.

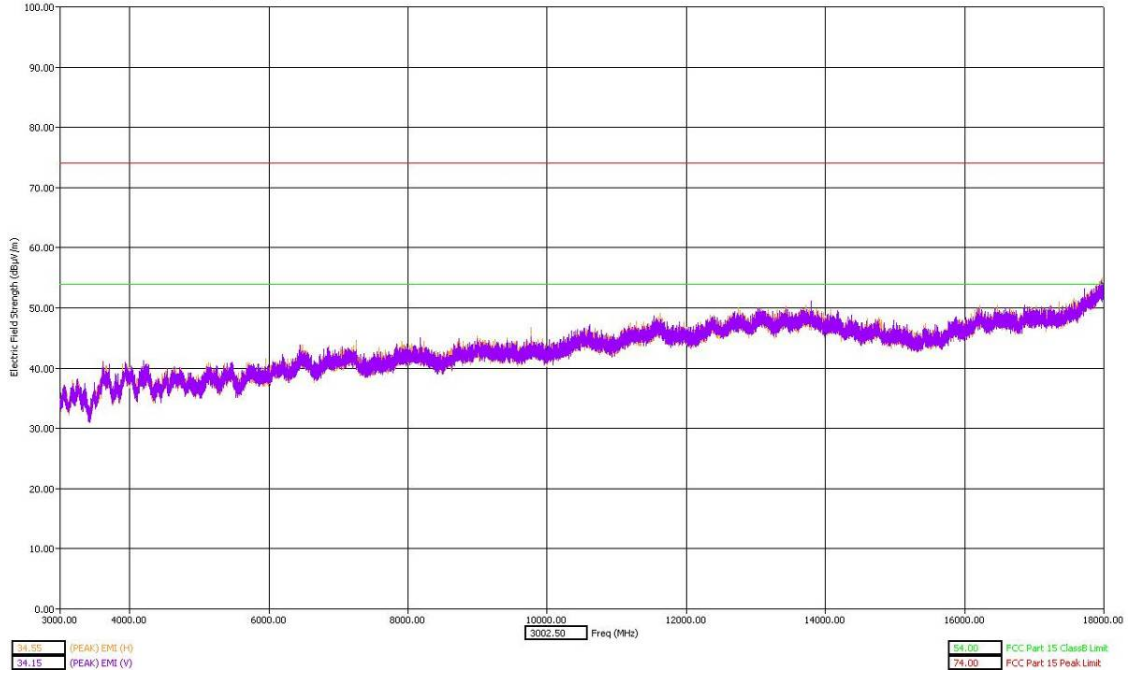


3-18 GHz Middle Channel Dual Polarization Y Slider Open

Test title: FCC 15.247(c)
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 2:22:54 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 39 (2441 MHz) up/down in test mode. Orientation Z=V
HRN 1008 antenna (3 GHz - 18 GHz). Peak detector used.

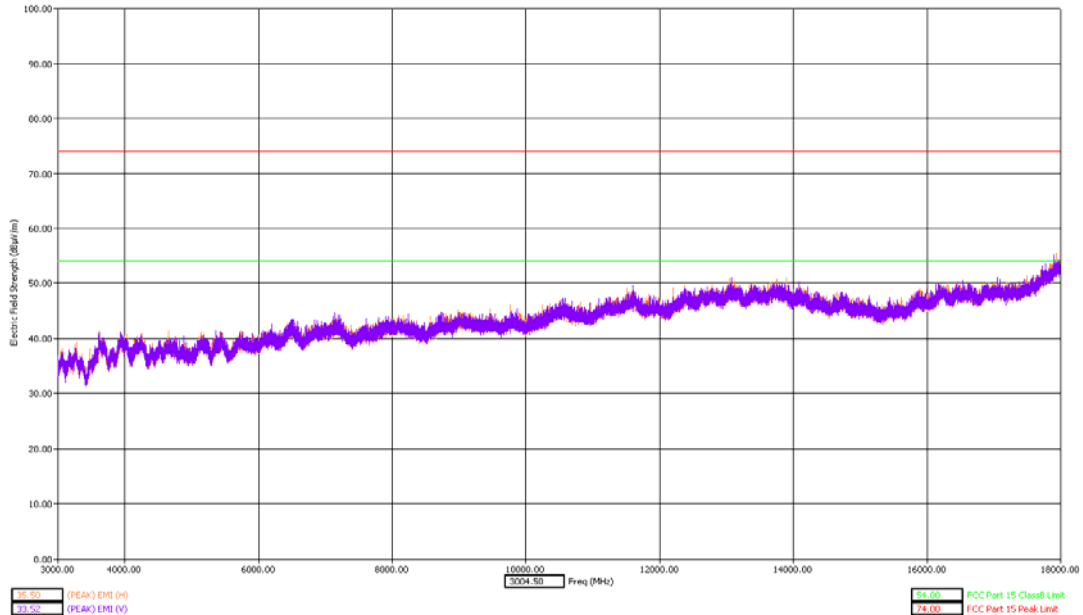


3-18 GHz Middle Channel Dual Polarization Z Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 2:49:31 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation X=H
HRN: 1008 antenna (3 GHz - 18 GHz). Peak detector used.

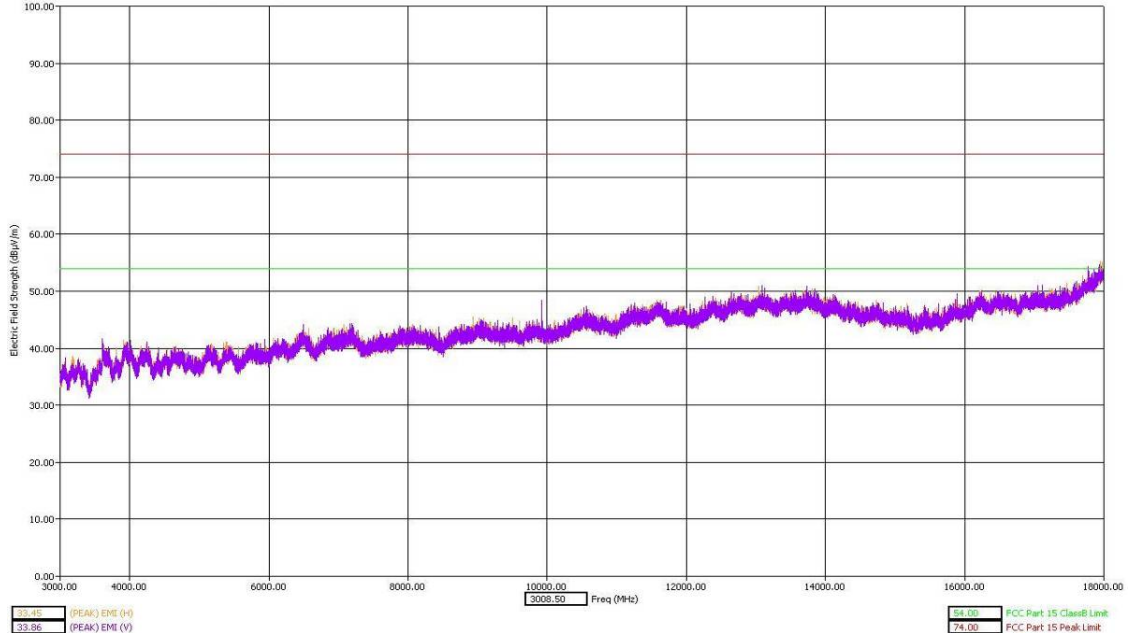


3-18 GHz High Channel Dual Polarization X Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 1/12/2009
Time: 2:04:49 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation Y=H
HRN: 1008 antenna (3 GHz - 18 GHz). Peak detector used.

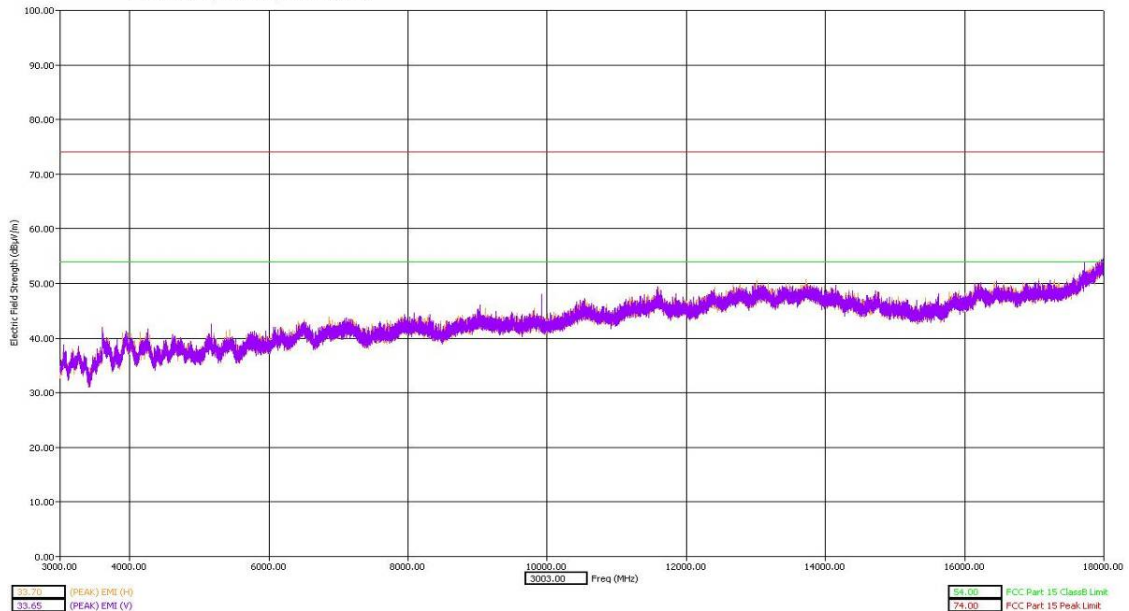

3-18 GHz High Channel Dual Polarization Y Slider Open

Test title: FCC 15.247
Operator name: Lei Yang
EUI type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: E: SW: 13.00.461
Date: 1/12/2009
Time: 2:17:24 PM
Comments: FCC 15.247 (C) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation Z=V
HRN 1008 antenna (3 GHz - 18 GHz), Peak detector used.

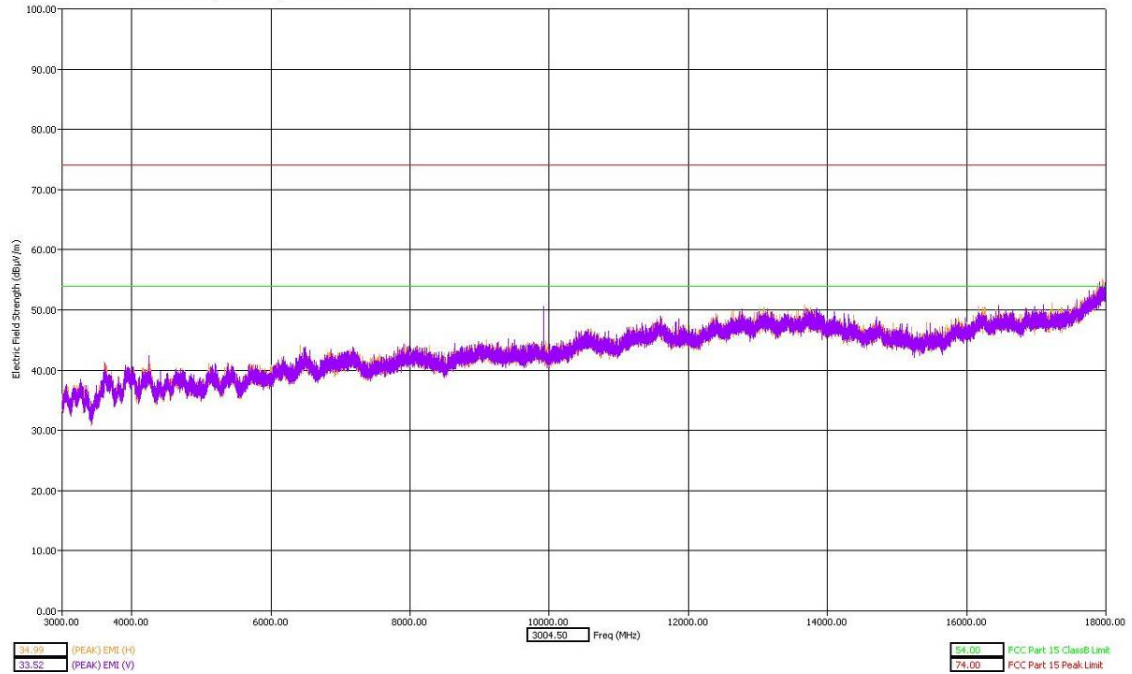


3-18 GHz High Channel Dual Polarization Z Slider Open

There were no discernible emissions above the noise floor for 18 -26.5 GHz for Low, Mid and High Channels and all polarizations in Bluetooth band.


Only one worst case plot for each test frequency are shown in the below plots in the range from 18 GHz – 26.5 GHz.

Test title: FCC 15.247
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 01/12/2009
Time: 3:11:23 PM
Comments: FCC 15.247(c)(1) Bluetooth (BT) emission in TCH mode.
BT ch. 0 (2402 MHz) up/down in test mode. Orientation Y=H
Horn 3116 antenna (18 GHz - 26.5 GHz). Peak detector used.

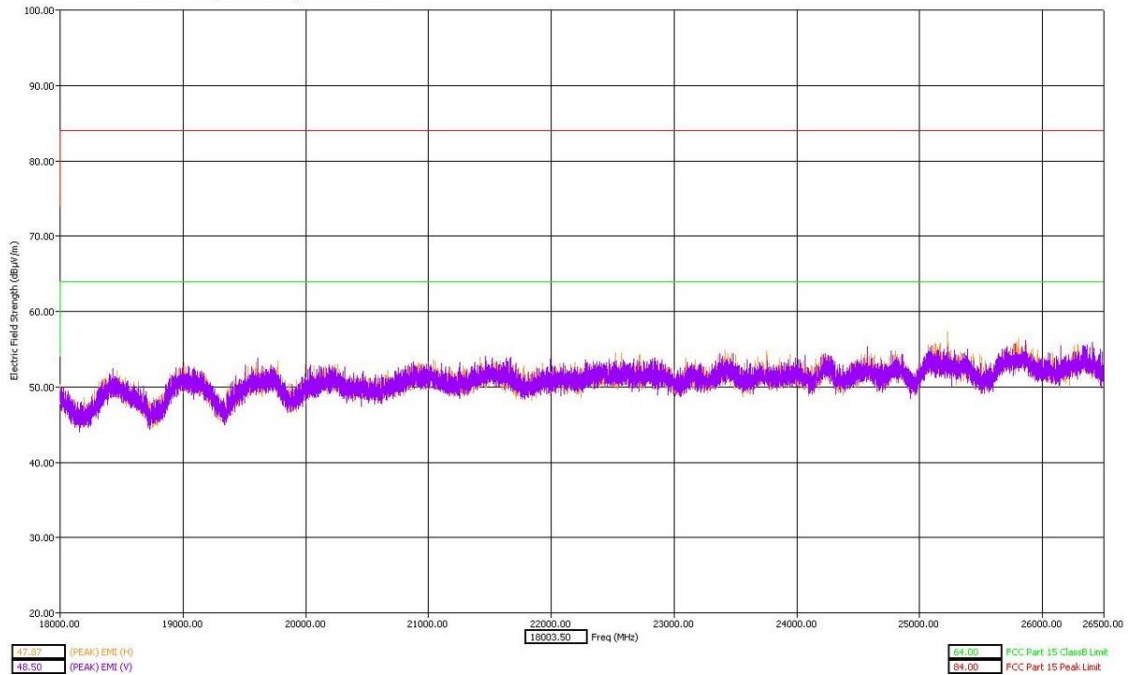


18-26.5 GHz Low Channel Dual Polarization Y Slider Open

Test title: FCC 15.247
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 01/12/2009
Time: 3:24:32 PM
Comments: FCC 15.247(C)(1) Bluetooth (BT) emission in TCH mode.
BT ch. 39 (2441 MHz) up/do in test mode. Orientation Y=H
Horn 3116 antenna (18 GHz - 26.5 GHz). Peak detector used.

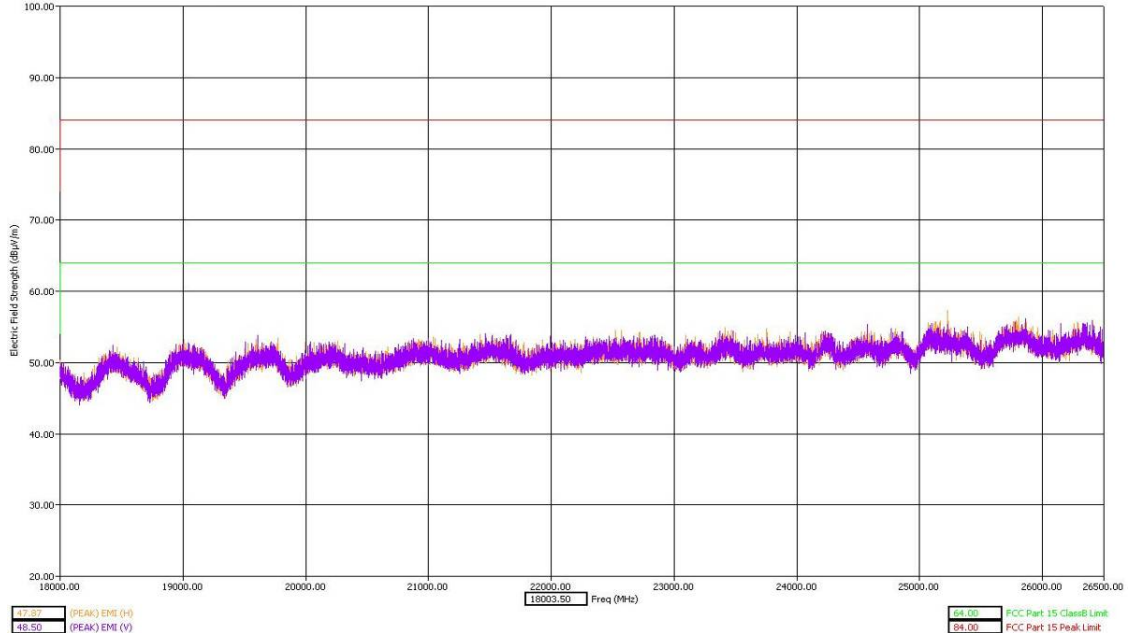

18-26.5 GHz Middle Channel Dual Polarization Y Slider Open

Test title: FCC 15.247
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354689020017776, Slide_Open
EUT condition: HW: E; SW: 13.00.461
Date: 01/12/2009
Time: 3:39:25 PM
Comments: FCC 15.247(C)(1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/do in test mode. Orientation Y=H
Horn 3116 antenna (18 GHz - 26.5 GHz). Peak detector used.

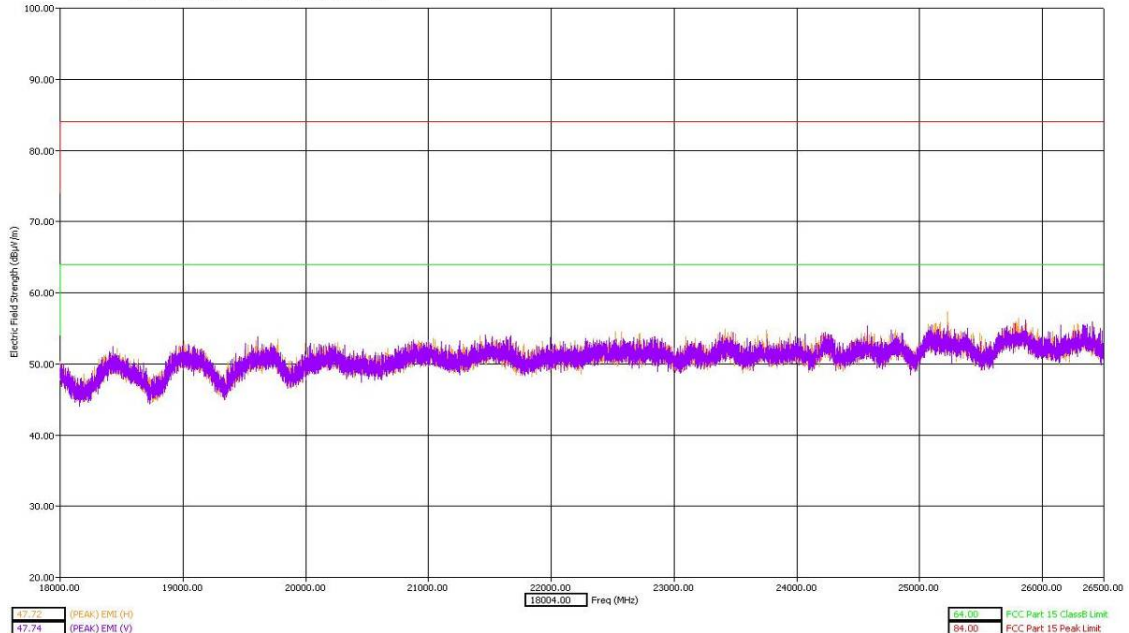

18-26.5 GHz High Channel Dual Polarization Y Slider Open

BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS

CFR Part 15.247

Measurement Procedure

The test sample is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. Test is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

Field Strength (dB μ V/m) = EMI Receiver Level (dB μ V) + Cable Loss (dB) - Amplifier Gain (dB) + Filter loss (dB) + Antenna Correction Factor (3/m)

For 18 GHz – 26.5 GHz:

Field Strength (dB μ V/m) = EMI Receiver Level (dB μ V) + Cable Loss (dB) - Amplifier Gain (dB) + Filter loss (dB) + Antenna Correction Factor (1/m)

The test sample was operated in Bluetooth single channel test mode. A fully charged battery was used for the supply voltage.

Measurement Results



Comments:

The band edge measurements crossing the corner for the low channel with respect to the average limit line is acceptable when applying the FCC rule specified in CFR 47 part 15.35(b) for the use of peak detector above 1 GHz. The peak detector limit line has been added to the graphical plots.

The test was performed in 22.5 degree angular step size when the band edge crossing is measured to be +6 dB above the AVG limit line.


The peak detector limit line has been added to the graphical plots.

See Attached:

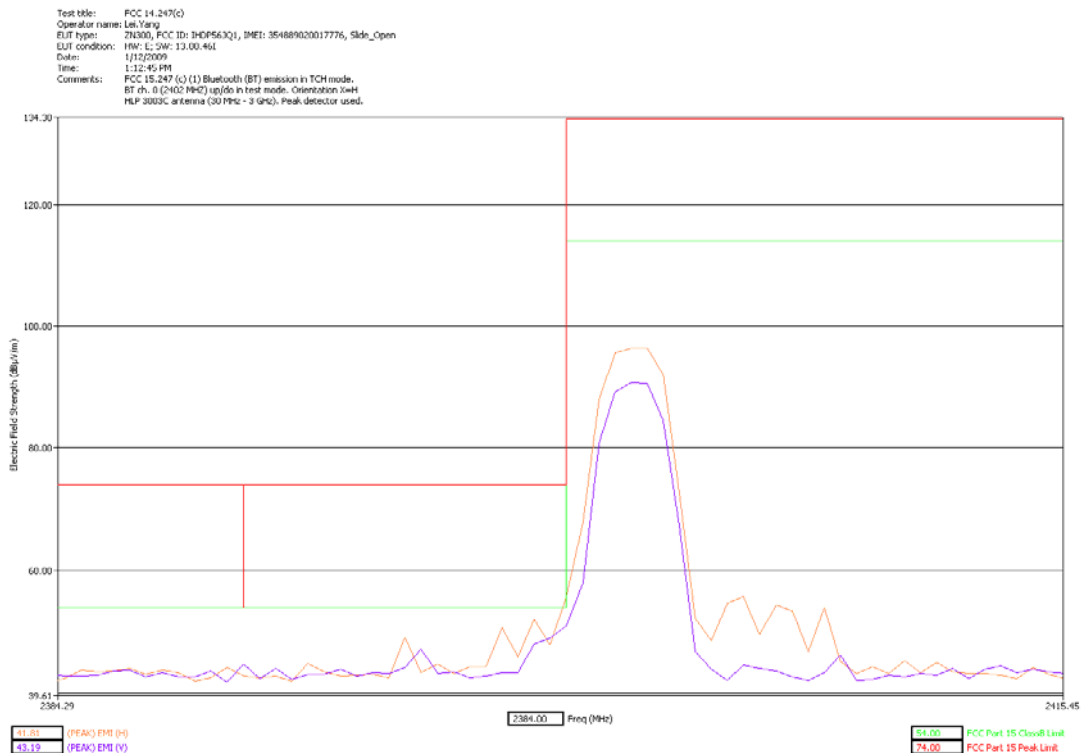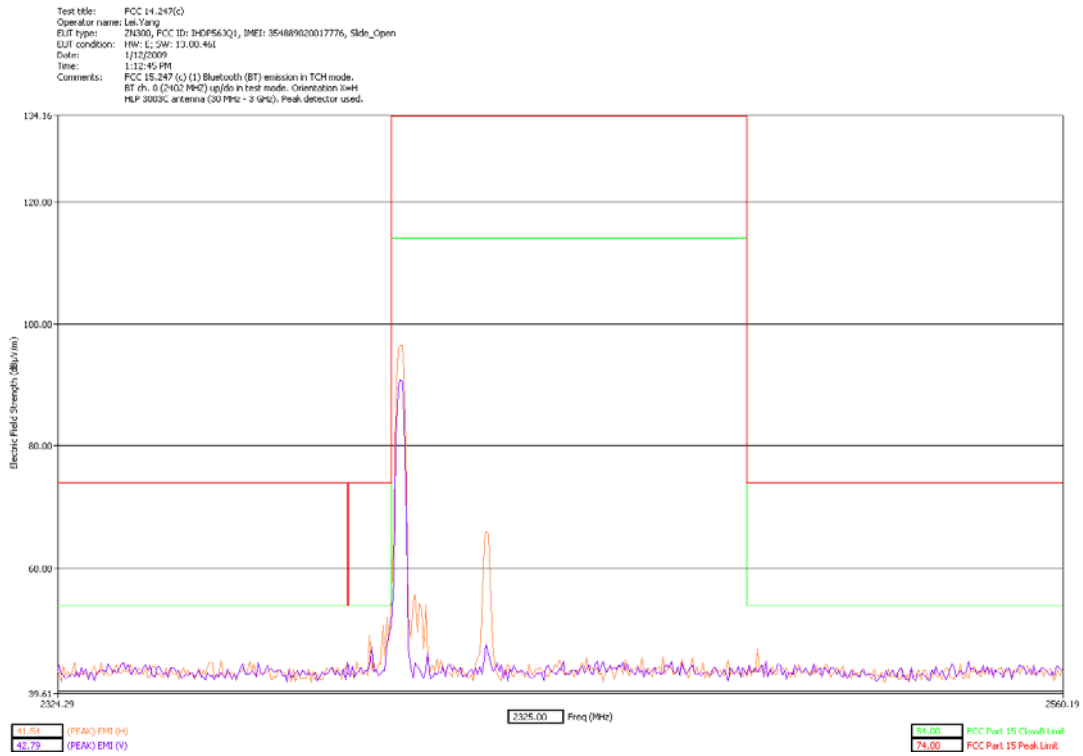


Authorized Band Emissions Low Channel Dual Polarization X Slider Open



Test title: FCC 14.247(G)
 Operator name: Lei.Yang
 EUT type: ZH300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
 EUT condition: HW: L; SW: 13.00.461
 Date: 1/12/2009
 Time: 1:22:26 PM
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
 BT ch. 0 (2402 MHz) up/down in test mode. Orientation V=H
 HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

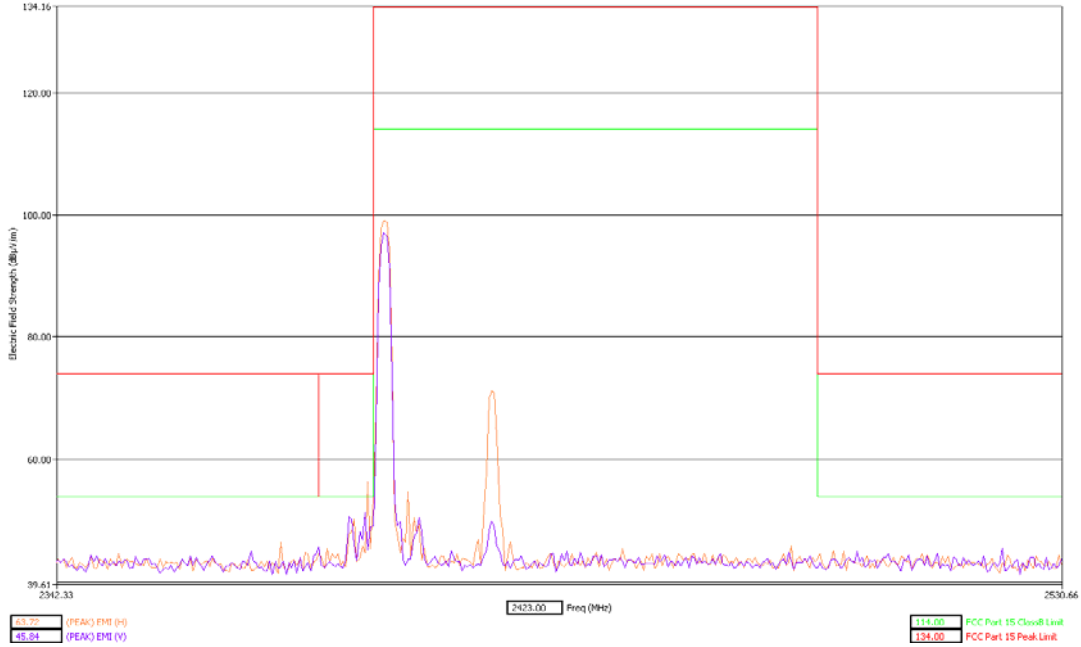

Test title: FCC 14.247(G)
 Operator name: Lei.Yang
 EUT type: ZH300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
 EUT condition: HW: L; SW: 13.00.461
 Date: 1/12/2009
 Time: 1:22:26 PM
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
 BT ch. 0 (2402 MHz) up/down in test mode. Orientation V=H
 HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

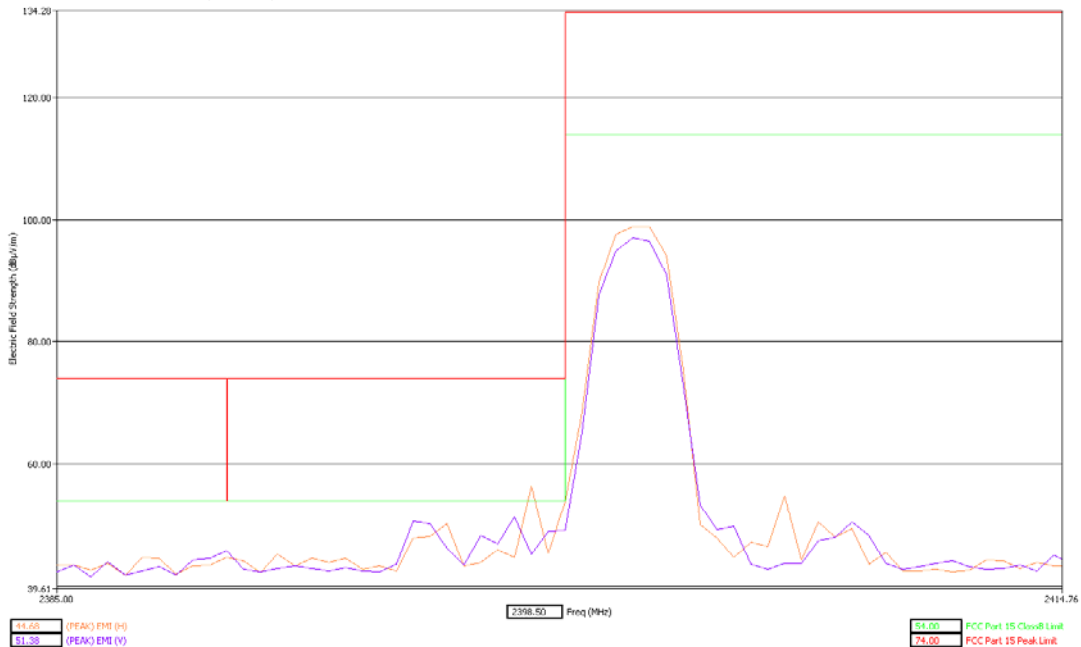


Authorized Band Emissions Low Channel Dual Polarization Y Slider Open

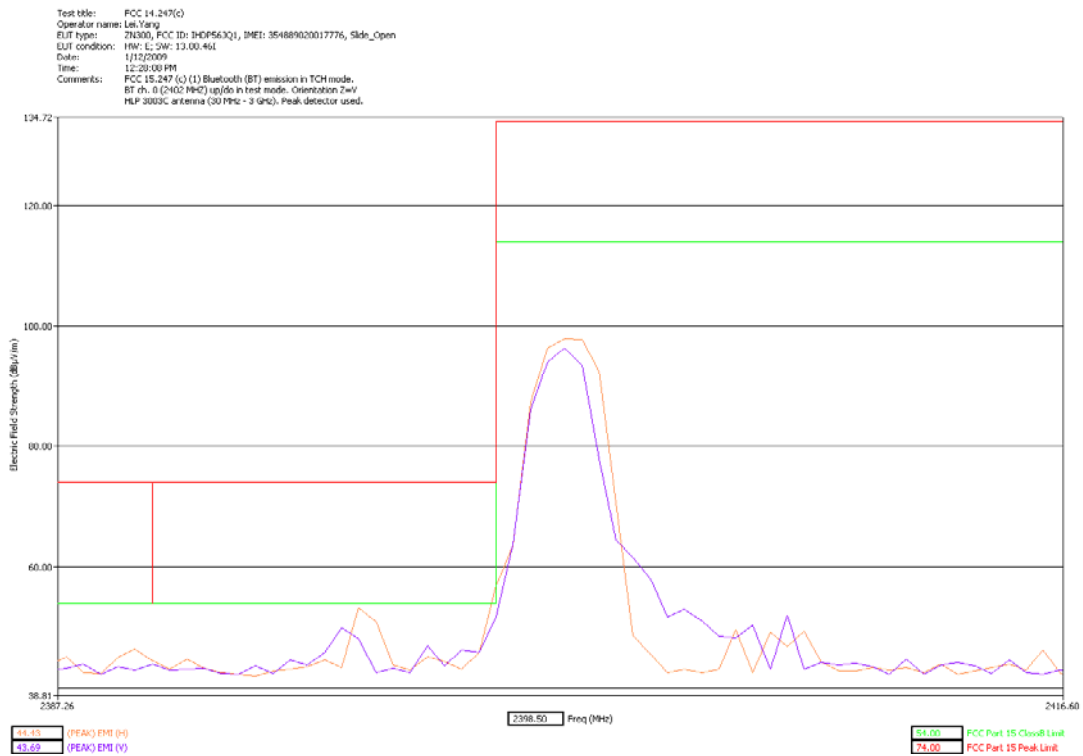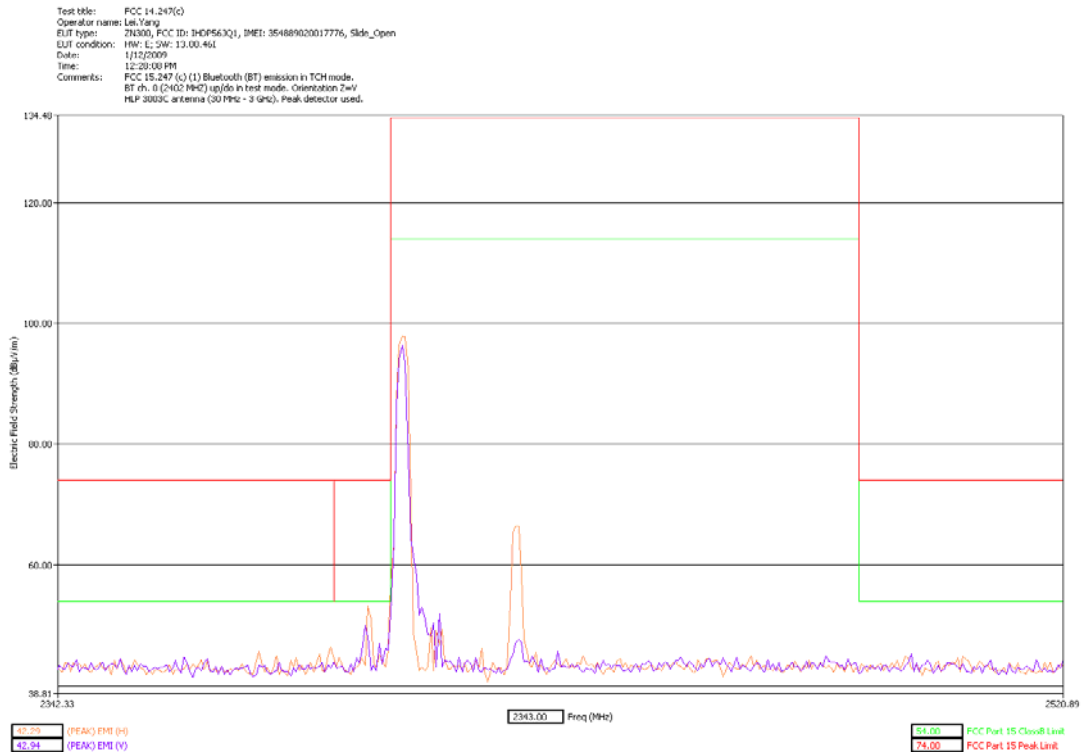


Authorized Band Emissions Low Channel Dual Polarization Z Slider Open

Test title: FCC 14.247(G)
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: L; SW: 13.00.461
Date: 1/12/2009
Time: 12:12:43 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation: x=H
HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

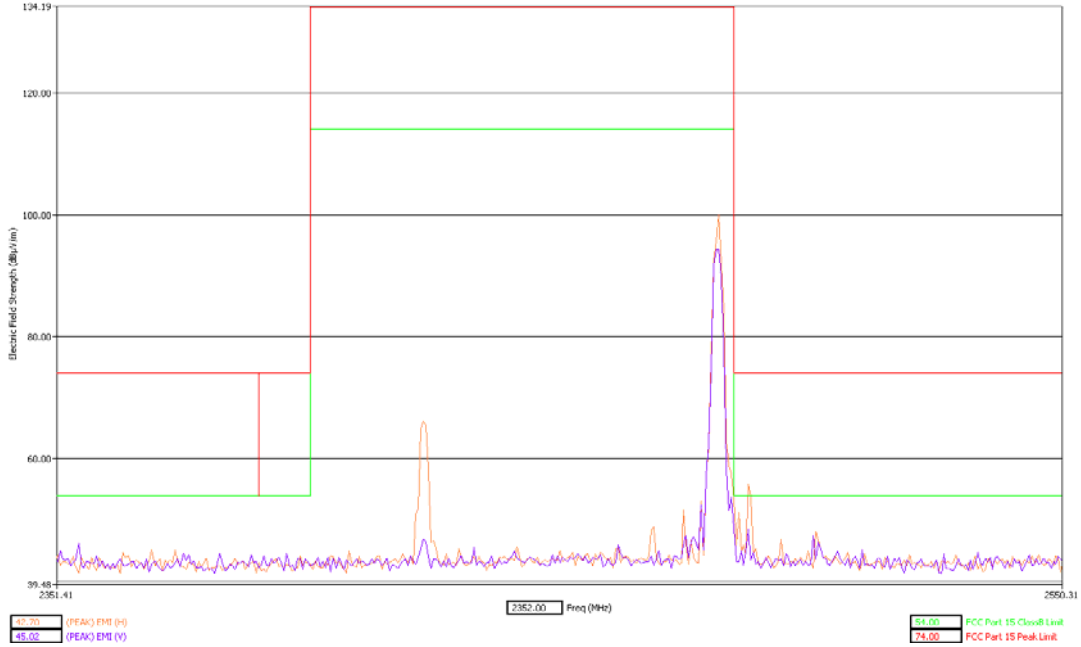


Test title: FCC 14.247(G)
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: L; SW: 13.00.461
Date: 1/12/2009
Time: 12:12:43 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation: x=H
HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

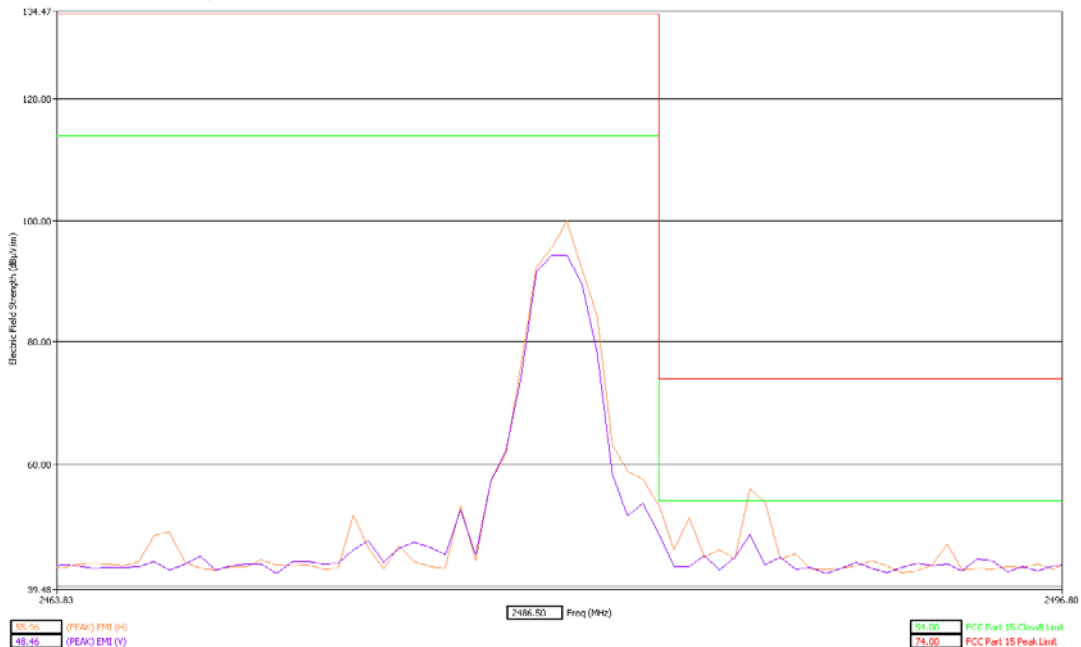


Authorized Band Emissions High Channel Dual Polarization X Slider Open



Test title: FCC 14.247(G)
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: L; SW: 13.00.461
Date: 1/12/2009
Time: 12:05:51 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation Y=H
HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

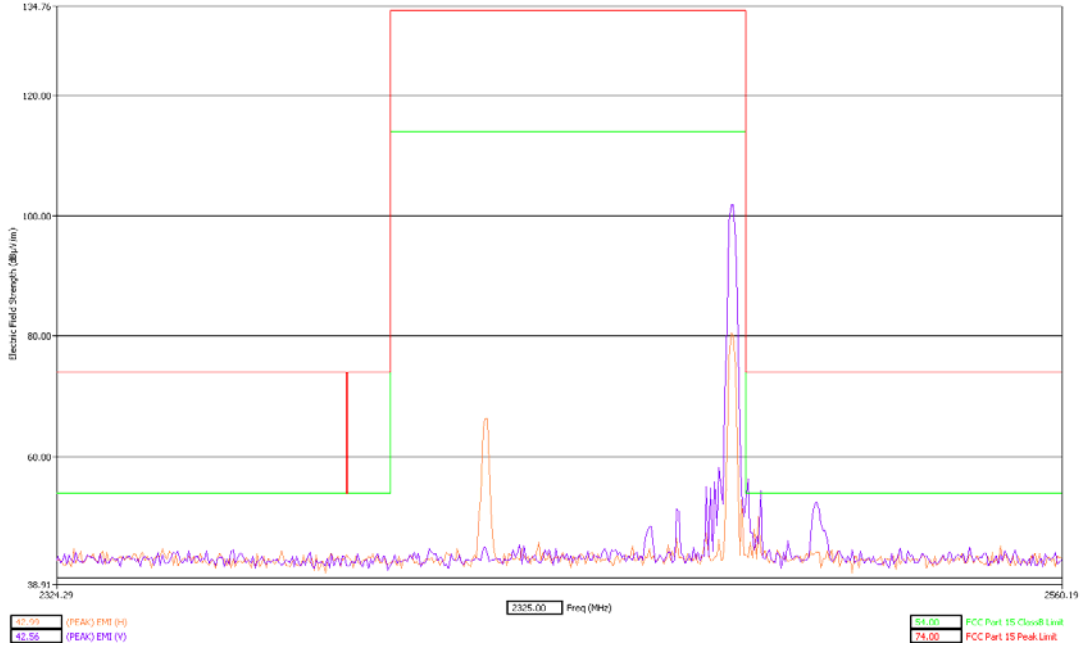

Test title: FCC 14.247(G)
Operator name: Lei.Yang
EUT type: ZN300, FCC ID: IHDP56JQ1, IMEI: 354889020017776, Slide_Open
EUT condition: HW: L; SW: 13.00.461
Date: 1/12/2009
Time: 12:05:51 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) up/down in test mode. Orientation Y=H
HLP 3003C antenna (30 MHz - 3 GHz). Peak detector used.

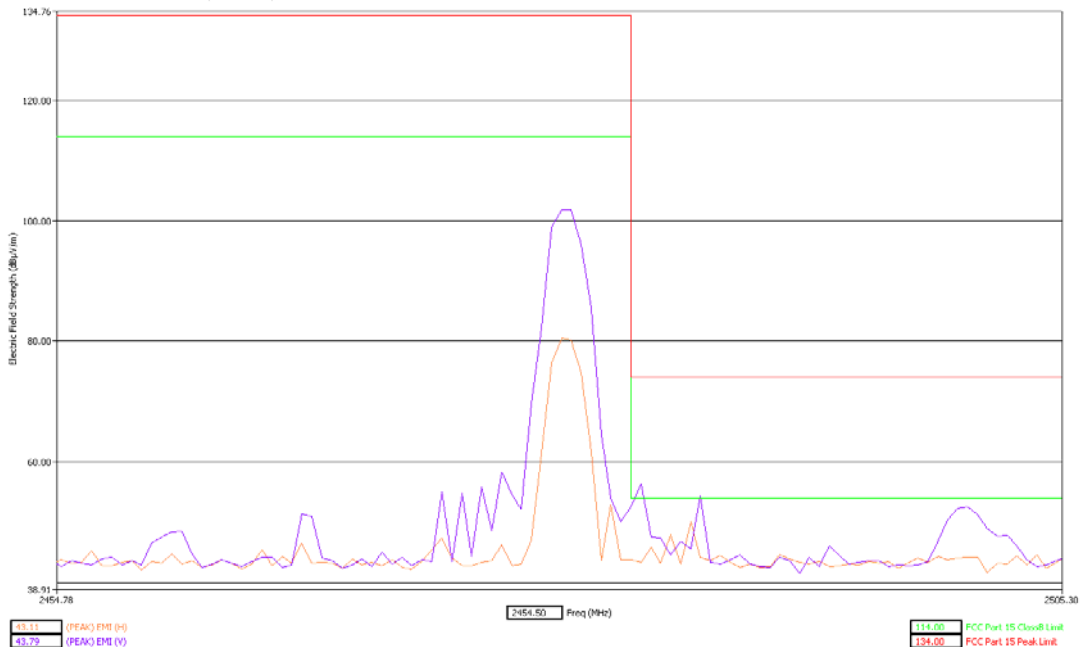

Authorized Band Emissions High Channel Dual Polarization Y Slider Open

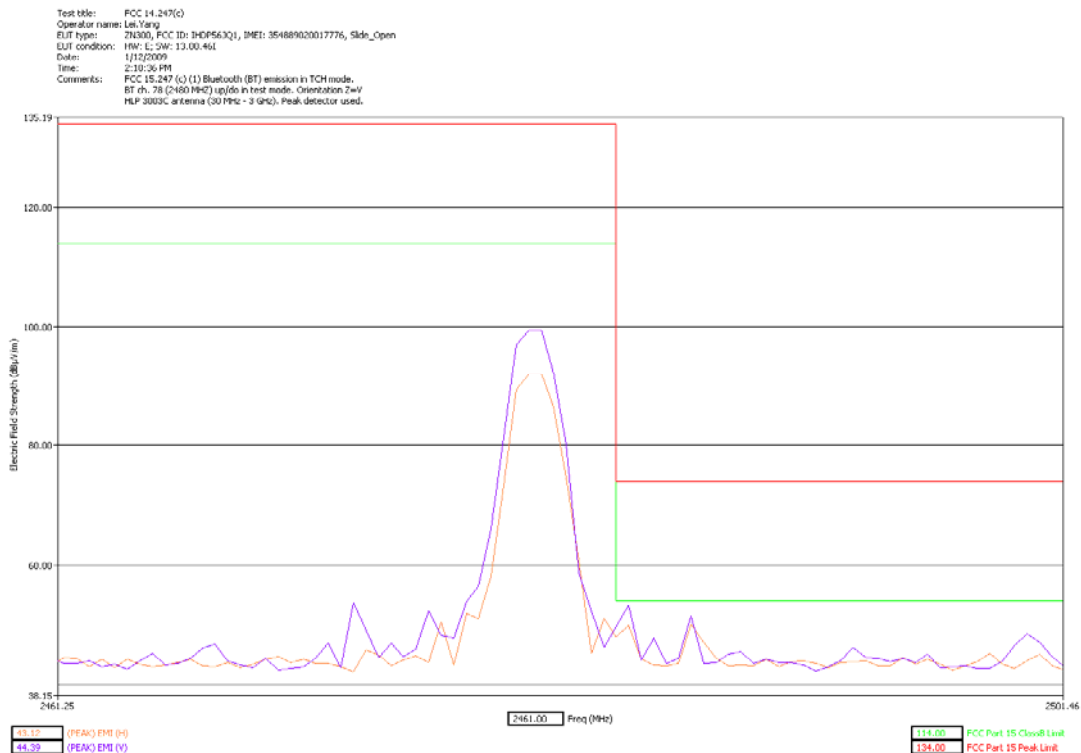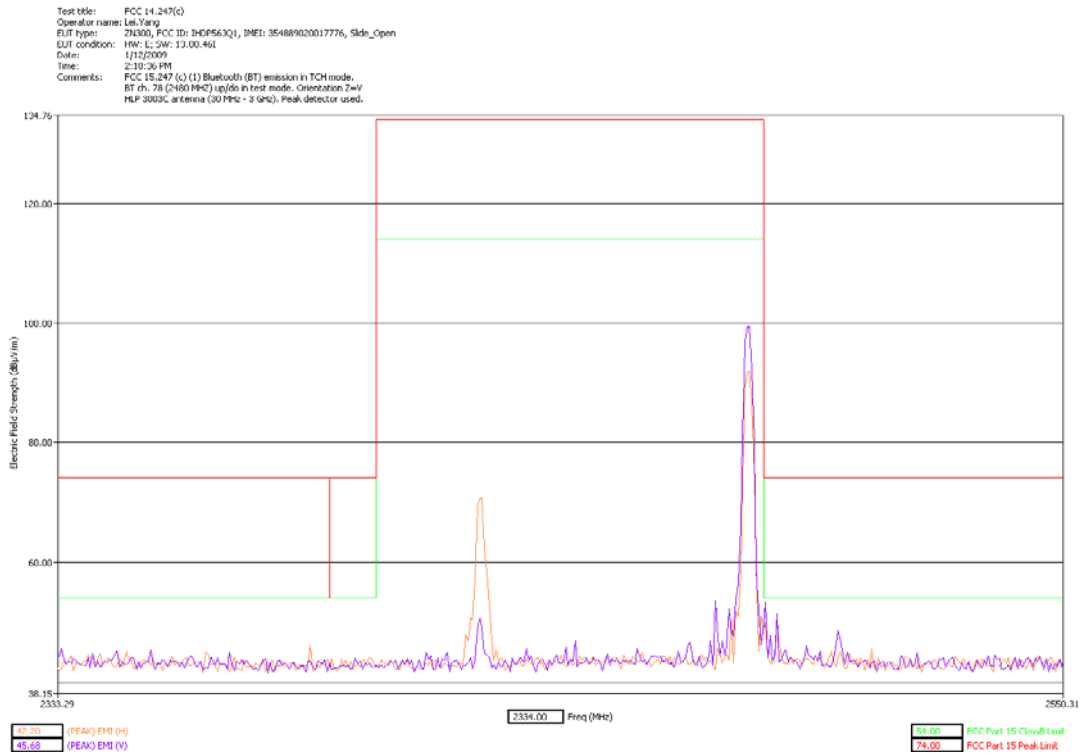

Authorized Band Emissions High Channel Dual Polarization Z Slider Open

PICTURES

The pictures related to the above test results are placed in the associated report denoted as EXHIBIT 7A2.

End of Test Report