



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2301-4
FCC ID : IHDT56AH3
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Sep. 14, 2022 ~ Sep. 26, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 8

 1.6. Specification of Accessory 8

 1.7. Test Location 9

 1.8. Test Software 9

 1.9. Applicable Standards 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 12

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 23

5. UNCERTAINTY OF EVALUATION 24

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.45 dB at 4.874 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.74 dB at 44.55 MHz for Quasi-peak

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2301-4
FCC ID	IHDT56AH3
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a HT20 WLAN 6GHz 802.11ax HE20/ HE40/ HE80/ HE160 Bluetooth BR/EDR/LE GNSS/NFC/WPT
IMEI Code	Conduction: 354336350016432/354336350016440 Radiation: 354336350016333/355169670003718
HW Version	DVT2
SW Version	TTR33.76
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT. The sample 1 is dual SIM(E-SIM + P-SIM) and the sample 2 is single SIM(P-SIM). According to the difference, we choose sample 1 to full test and the sample 2 are verified the difference.



	<p>LTE Band 32: 1452 MHz ~ 1496 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3600 MHz LTE Band 43 : 3600 MHz ~ 3700 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz LTE Band 66 : 2110 MHz~ 2200 MHz 5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz 802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz 802.11a/ax: 5925 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz WPT: 111kHz~ 148 kHz</p>
Antenna Type	<p>WWAN : IFA Antenna / Loop Antenna / Monopole Antenna WLAN 2.4GHz: IFA Antenna / Loop Antenna WLAN 5GHz/6GHz : Loop Antenna Bluetooth: IFA Antenna GNSS: IFA Antenna NFC: Loop Antenna WPT: FPC Antenna</p>
Type of Modulation	<p>GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) :π/4-DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK</p>

NFC: ASK WPT: ASK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola(Chenyang)	Model Name	MC-1251
AC Adapter 1 (EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-1252
AC Adapter 1 (UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-1253
AC Adapter 1 (AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-1255
AC Adapter 1 (AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-1256
AC Adapter 1 (BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-1257
AC Adapter 2 (US)	Brand Name	Motorola(AOHAI)	Model Name	MC-1251
AC Adapter 2 (EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-1252
AC Adapter 2 (UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-1253
AC Adapter 2 (IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-1254
AC Adapter 2 (AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-1255
AC Adapter 2 (AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-1256
AC Adapter 2 (BR)	Brand Name	Motorola(AOHAI)	Model Name	MC-1257
AC Adapter 2 (CHILE)	Brand Name	Motorola(AOHAI)	Model Name	MC-1259
Battery	Brand Name	Motorola(ATL)	Model Name	PF46
Earphone	Brand Name	Motorola(Lyand)	Model Name	MI181C(SH38D62338)
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SC18D24968
C to HDMI HDMI/USBC Cable 1	Brand Name	Motorola (Linxee)	Model Name	SC18D02146
C to HDMI HDMI/USBC Cable 2	Brand Name	Motorola (Linxee)	Model Name	SC18D38847



1.7. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN1257	314309

1.8. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + USB Cable (Charging from Adapter2) + Battery + SIM 1 For Sample 1
	Mode 2: WCDMA Band II Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + USB Cable (Charging from Adapter2) + Battery + SIM 2 For Sample 1
	Mode 3: LTE Band 13 Rx(High CH) + Bluetooth Idle + WLAN (WIFI 6E) Idle + Camera(Front) + Earphone + EUT Charging from Wireless charger + Adapter 2 Connect to Wireless charger + Battery + SIM 1 For Sample 1
	Mode 4: LTE Band 17 Rx(High CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + USB Cable(EUT Charging from Adapter2) + (EUT Charge the other phones) + Battery + SIM 1 For Sample 1
	Mode 5: LTE Band 26 Rx(Low CH) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + USB Cable (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery + SIM 1 For Sample 1
	Mode 6: LTE Band 12 Rx(Middle CH) + Bluetooth Idle + WLAN (WIFI 6E) Idle + USB Cable (Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + Battery + SIM 1 For Sample 1
	Mode 7: 5G N5 Rx(Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + C to HDMI HDMI/USBC Cable 1 With monitor + USB Cable (Charging from Adapter2) with C to HDMI HDMI/USBC Cable 1 + Battery + SIM 1 For Sample 1
	Mode 8: LTE Band 13 Rx(High CH) + MPEG4(Run Color Bar) + C to HDMI HDMI/USBC Cable 2 With monitor + USB Cable (Charging from Adapter2) with C to HDMI HDMI/USBC Cable 1 + Battery + SIM 1 For Sample 1
	Mode 9: LTE Band 13 Rx(High CH) + USB Cable (Charging from Adapter1) For Sample 1



Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + USB Cable (Charging from Adapter2) + Battery + SIM 1 For Sample 1</p> <p>Mode 2: WCDMA Band II Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + Earphone + Battery + SIM 2 For Sample 1</p> <p>Mode 3: LTE Band 13 Rx(High CH) + Bluetooth Idle + WLAN (WIFI 6E) Idle + Camera(Front) + Earphone + EUT Charging from Wireless charger) + Adapter2 Connect to Wireless charger + Battery + SIM 1 For Sample 1</p> <p>Mode 4: LTE Band 17 Rx(High CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + USB Cable(EUT Charging from Adapter2) + (EUT Charge the other phones) + Battery + SIM 1 For Sample 1</p> <p>Mode 5: LTE Band 26 Rx(Low CH) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + USB Cable (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery + SIM 1 For Sample 1</p> <p>Mode 6: LTE Band 12 Rx(Middle CH) + Bluetooth Idle + WLAN (WIFI 6E) Idle + MPEG4(Run Color Bar) + USB Cable (Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + Battery + SIM 1 For Sample 1</p> <p>Mode 7: 5G N5 Rx(Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + C to HDMI HDMI/USBC Cable 1 With monitor + USB Cable (Charging from Adapter2) with C to HDMI HDMI/USBC Cable 1 + Battery + SIM 1 For Sample 1</p> <p>Mode 8: LTE Band 17 Rx(High CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + C to HDMI HDMI/USBC Cable 1 With monitor + USB Cable (Charging from Adapter2) with C to HDMI HDMI/USBC Cable 1 + Battery + SIM 1 For Sample 1</p> <p>Mode 9: LTE Band 17 Rx(High CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + USB Cable(EUT Charging from Adapter1) + (EUT Charge the other phones) + Battery + SIM 1 For Sample 1</p> <p>Mode 10 : LTE Band 17 Rx(High CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + USB Cable(Typec to Typec)(EUT Charging to other phones) + Battery + SIM 1 For Sample 1</p> <p>Mode 11 : LTE Band 17 Rx(High CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + USB Cable(EUT Charging from Adapter2) + (EUT Charge the other phones) + Battery + SIM 1 For Sample 2</p>
Remark:	
<ol style="list-style-type: none"> 1. The worst case of AC is mode 3; only the test data of this mode is reported. 2. The worst case of RE is mode 4; only the test data of this mode is reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook 4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report. 5. SIM1: P-SIM; SIM2: E-SIM 	

2.2. Connection Diagram of Test System

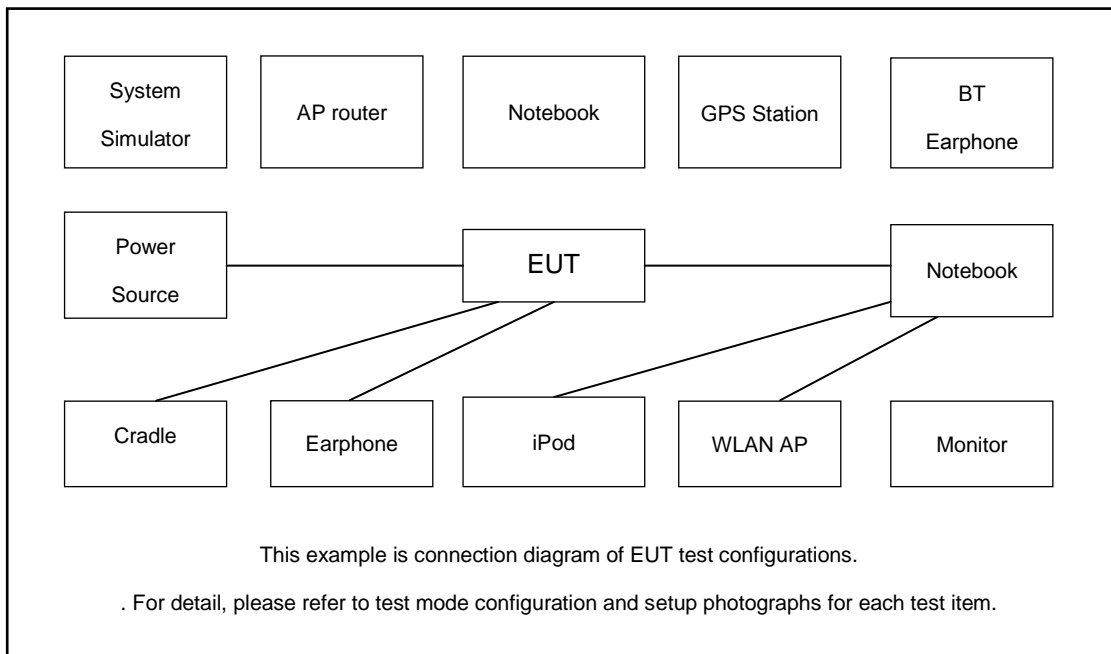

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
2.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
3.	Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
4.	5GNR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
5.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
6.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
7.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
8.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
9.	Hard disk	KINGSHARE	KSP6120G	Fcc DoC	N/A	Shielded, 1.2m
10.	Wireless Charger	HUAWEI	CP61	N/A	N/A	N/A
11.	Hard Disk	Lenovo	F310	DoC	N/A	Shielded, 1.2m
12.	Monitor	PHILIPS	BDM3275UP	Fcc DoC	N/A	Unshielded,1.8m



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function
6. Turn on WPT function
7. Wireless Charge from a Wireless Charger.
8. Wireless Charge for other Mobile Phone.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

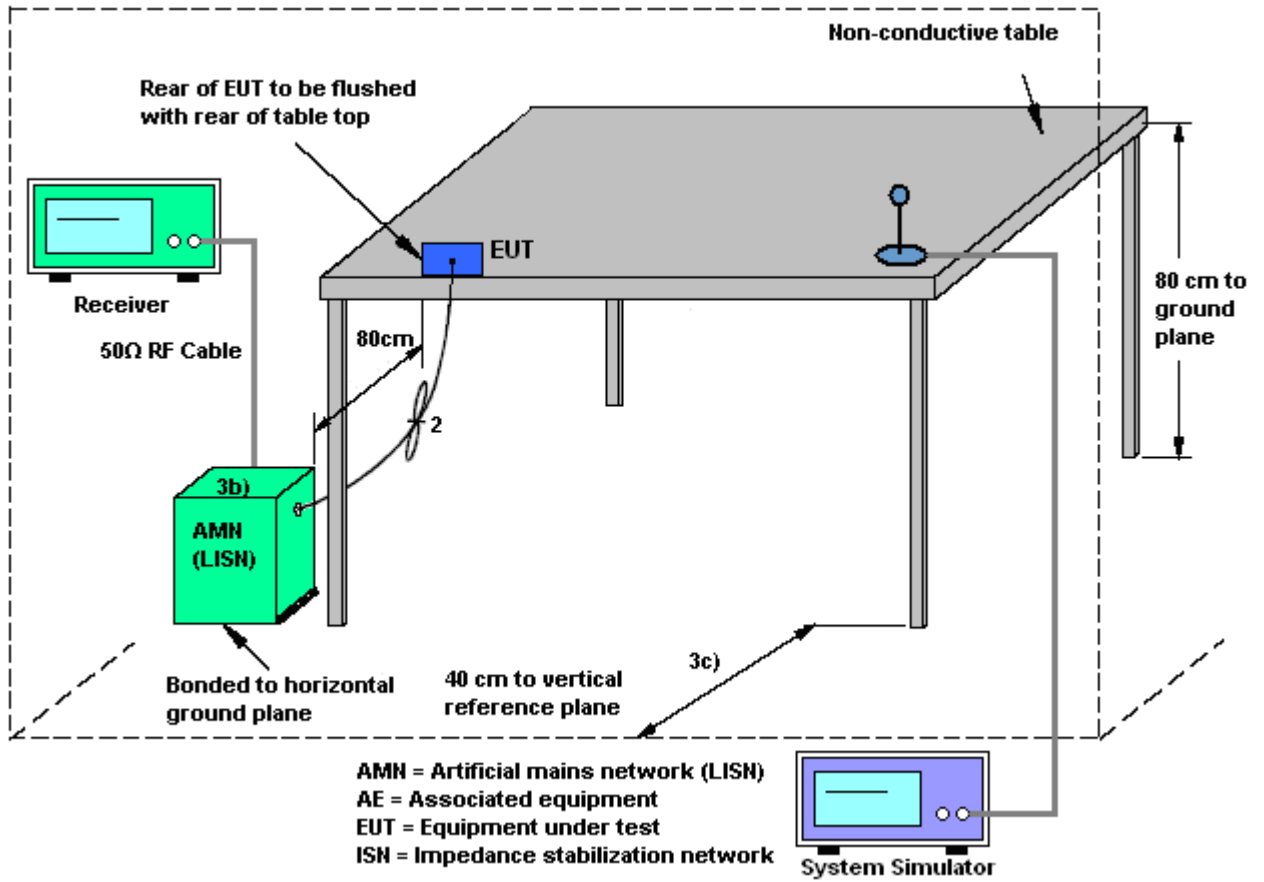



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

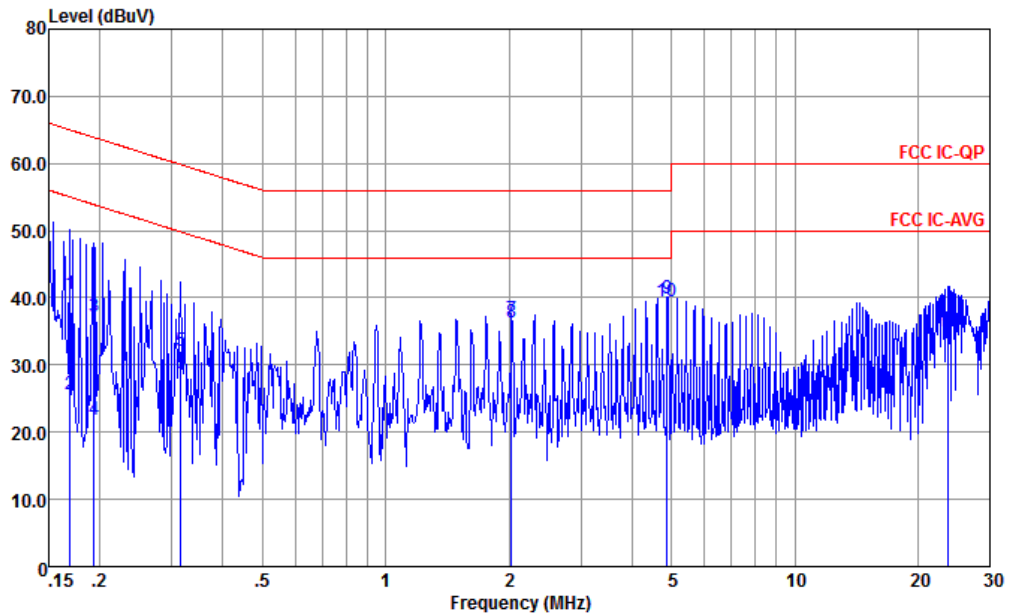


Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.169	40.66	-24.33	64.99	30.20	0.03	10.43	QP
2	0.169	25.66	-29.33	54.99	15.20	0.03	10.43	Average
3	0.193	37.22	-26.67	63.89	26.80	0.04	10.38	QP
4	0.193	21.92	-31.97	53.89	11.50	0.04	10.38	Average
5	0.315	32.17	-27.67	59.84	21.80	0.07	10.30	QP
6	0.315	28.77	-21.07	49.84	18.40	0.07	10.30	Average
7	2.033	36.87	-19.13	56.00	26.50	0.14	10.23	QP
8	2.033	36.37	-9.63	46.00	26.00	0.14	10.23	Average
9	4.874	39.95	-16.05	56.00	29.50	0.18	10.27	QP
10 *	4.874	39.55	-6.45	46.00	29.10	0.18	10.27	Average
11	23.636	35.77	-24.23	60.00	24.60	0.62	10.55	QP
12	23.636	35.07	-14.93	50.00	23.90	0.62	10.55	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

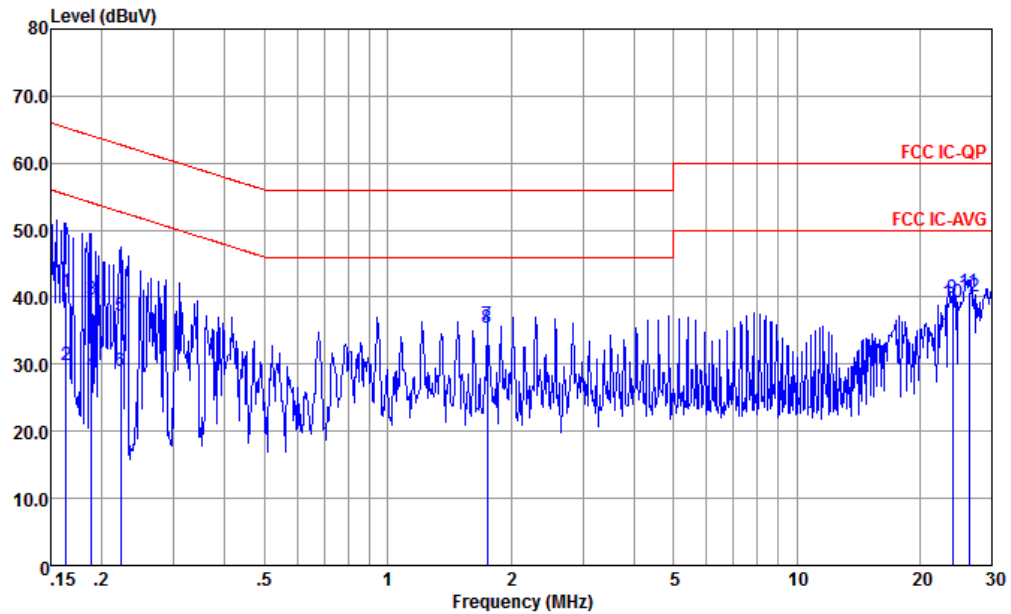

Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.163	40.75	-24.55	65.30	30.19	0.11	10.45	QP
2	0.163	29.85	-25.45	55.30	19.29	0.11	10.45	Average
3	0.188	39.69	-24.42	64.11	29.20	0.10	10.39	QP
4	0.188	28.69	-25.42	54.11	18.20	0.10	10.39	Average
5	0.222	37.25	-25.49	62.74	26.80	0.10	10.35	QP
6	0.222	28.95	-23.79	52.74	18.50	0.10	10.35	Average
7	1.753	35.86	-20.14	56.00	25.49	0.14	10.23	QP
8	1.753	35.46	-10.54	46.00	25.09	0.14	10.23	Average
9	24.015	39.82	-20.18	60.00	28.60	0.66	10.56	QP
10	24.015	39.12	-10.88	50.00	27.90	0.66	10.56	Average
11	26.418	40.81	-19.19	60.00	29.50	0.73	10.58	QP
12 *	26.418	40.11	-9.89	50.00	28.80	0.73	10.58	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

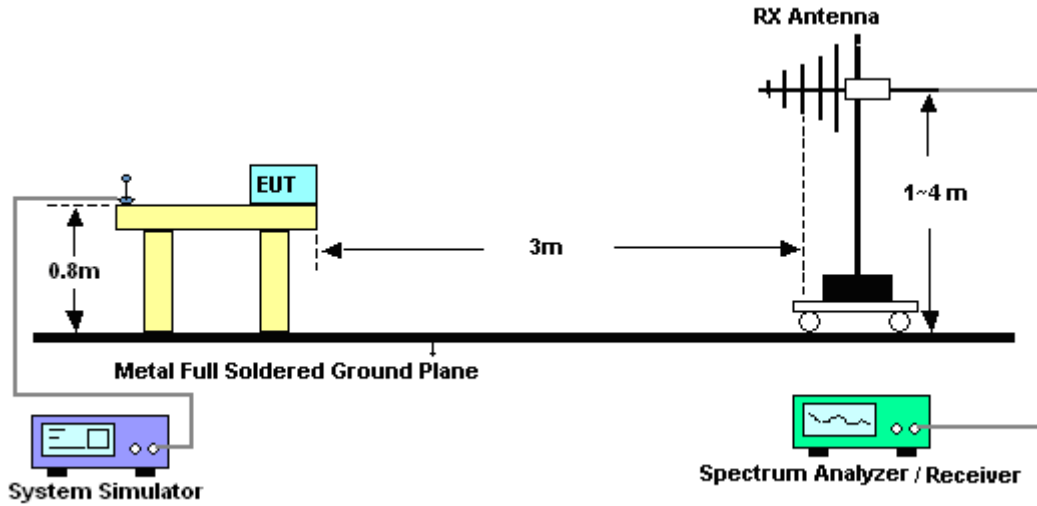


For radiated emissions above 1GHz

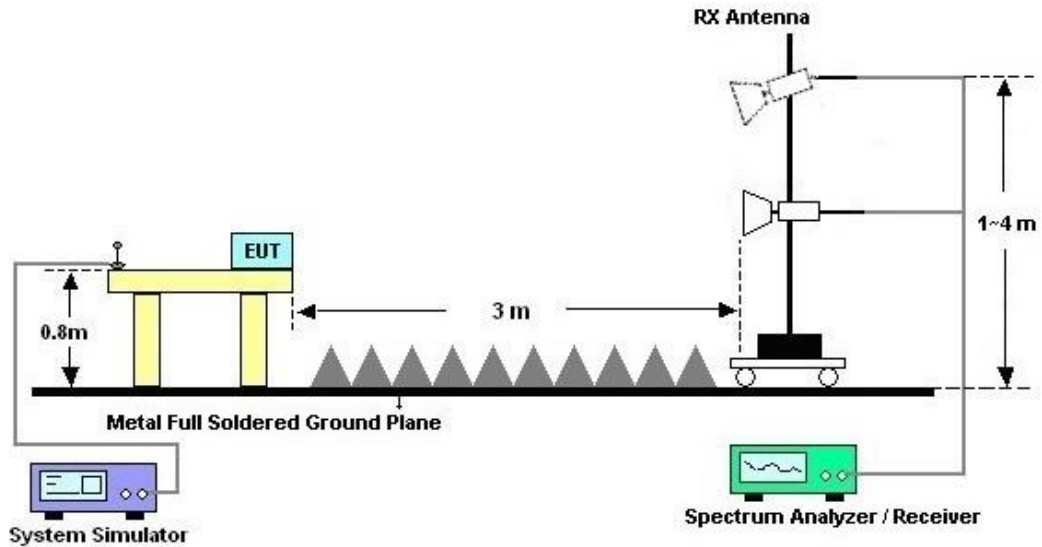



3.2.5. Test Result of Radiated Emission

Test Engineer :	Feng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

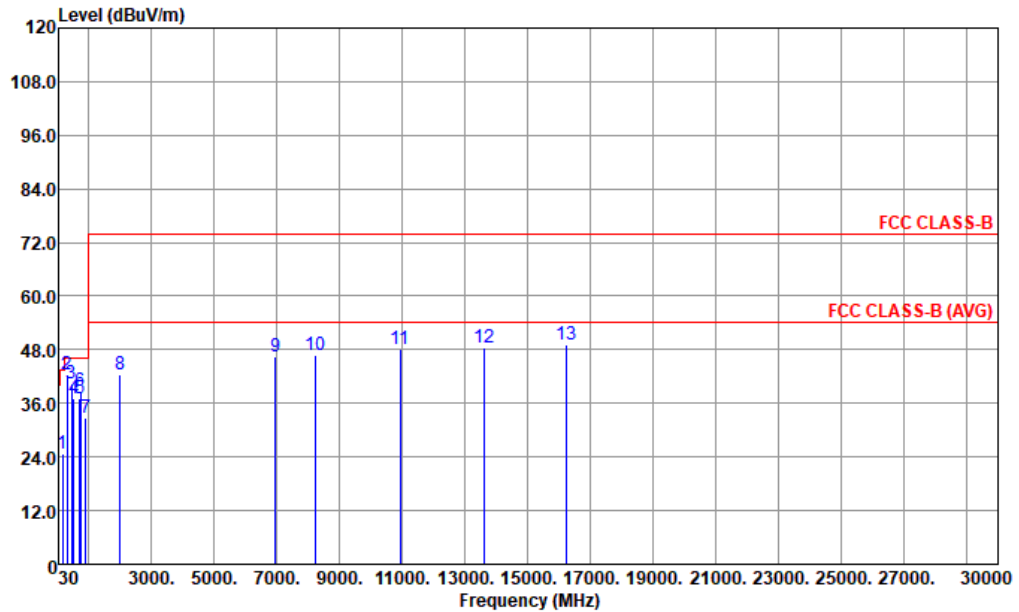


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49921 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	159.98	24.88	-18.62	43.50	38.92	16.52	1.84	32.40	---	---	Peak
2	302.57	42.36	-3.64	46.00	52.79	19.40	2.57	32.40	100	200	Peak
3	440.31	40.54	-5.46	46.00	47.08	22.75	3.11	32.40	---	---	Peak
4	514.03	36.94	-9.06	46.00	41.86	24.33	3.15	32.40	---	---	Peak
5	704.15	37.25	-8.75	46.00	38.90	26.78	3.96	32.39	---	---	Peak
6	741.01	38.67			39.62	27.32	4.05	32.32	---	---	Peak
7	889.42	32.75	-13.25	46.00	30.90	28.99	4.44	31.58	---	---	Peak
8	2003.00	42.58	-31.42	74.00	40.66	30.30	6.72	35.10	---	---	Peak
9	6950.00	46.37	-27.63	74.00	30.72	35.57	13.03	32.95	---	---	Peak
10	8225.00	46.78	-27.22	74.00	31.37	35.28	14.65	34.52	---	---	Peak
11	10928.00	48.09	-25.91	74.00	27.83	38.88	16.56	35.18	---	---	Peak
12	13597.00	48.40	-25.60	74.00	25.38	39.68	18.68	35.34	---	---	Peak
13	16215.00	49.13	-24.87	74.00	23.20	40.65	20.50	35.22	---	---	Peak



Test Engineer :	Feng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

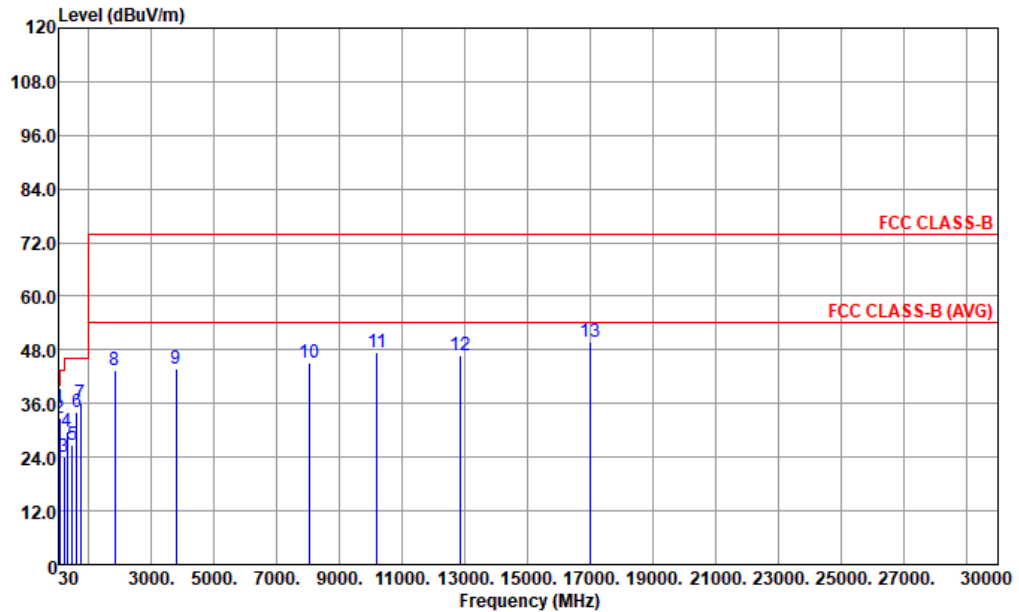

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49921 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	44.55	35.26	-4.74	40.00	49.76	16.95	0.95	32.40	100	53	QP
2	76.56	32.78	-7.22	40.00	49.65	14.30	1.23	32.40	---	---	Peak
3	217.21	23.98	-22.02	46.00	38.97	15.32	2.09	32.40	---	---	Peak
4	300.63	29.86	-16.14	46.00	40.35	19.35	2.56	32.40	---	---	Peak
5	475.23	26.82	-19.18	46.00	32.58	23.50	3.14	32.40	---	---	Peak
6	613.94	34.26	-11.74	46.00	36.73	26.26	3.67	32.40	---	---	Peak
7	741.01	35.99			36.94	27.32	4.05	32.32	---	---	Peak
8	1833.00	43.44	-30.56	74.00	42.81	29.40	6.40	35.17	---	---	Peak
9	3788.00	43.75	-30.25	74.00	32.90	34.76	9.42	33.33	---	---	Peak
10	8038.00	45.20	-28.80	74.00	30.96	35.47	13.43	34.66	---	---	Peak
11	10197.00	47.39	-26.61	74.00	28.16	38.35	16.10	35.22	---	---	Peak
12	12832.00	46.88	-27.12	74.00	24.75	39.63	18.06	35.56	---	---	Peak
13	16997.00	49.66	-24.34	74.00	22.44	41.20	21.03	35.01	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Sep. 14, 2022~Sep. 15, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2021	Sep. 14, 2022~Sep. 15, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Sep. 14, 2022~Sep. 15, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Sep. 14, 2022~Sep. 15, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Sep. 14, 2022~Sep. 15, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Sep. 14, 2022~Sep. 15, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2022	Sep. 14, 2022~Sep. 15, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Sep. 14, 2022~Sep. 15, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Sep. 14, 2022~Sep. 15, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Sep. 14, 2022~Sep. 15, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Sep. 14, 2022~Sep. 15, 2022	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May. 24, 2022	Sep. 24, 2022~Sep. 26, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Sep. 24, 2022~Sep. 26, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Sep. 24, 2022~Sep. 26, 2022	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Sep. 24, 2022~Sep. 26, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------