



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2317-1, XT2317-2, XT2317-3, XT2317DL
FCC ID : IHDT56AL4
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Nov. 25, 2022 ~ Nov. 30, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1. GENERAL DESCRIPTION5

 1.1. Applicant.....5

 1.2. Manufacturer5

 1.3. Product Feature of Equipment Under Test5

 1.4. Product Specification of Equipment Under Test6

 1.5. Specification of Accessory7

 1.6. Modification of EUT7

 1.7. Test Location.....8

 1.8. Test Software8

 1.9. Applicable Standards8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST9

 2.1. Test Mode9

 2.2. Connection Diagram of Test System11

 2.3. Support Unit used in test configuration and system.....12

 2.4. EUT Operation Test Setup.....12

3. TEST RESULT.....13

 3.1. Test of AC Conducted Emission Measurement13

 3.2. Test of Radiated Emission Measurement17

4. LIST OF MEASURING EQUIPMENT21

5. UNCERTAINTY OF EVALUATION22

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FC2N1003 | Rev. 01 | Initial issue of report | Jan. 18, 2023 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|----------|-----------------------|-----------------|--------|---|
| 3.1 | 15.107 | AC Conducted Emission | < 15.107 limits | PASS | Under limit 7.9 dB at 0.15 MHz |
| 3.2 | 15.109 | Radiated Emission | < 15.109 limits | PASS | Under limit 9.49 dB at 239.52 MHz |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2317-1, XT2317-2, XT2317-3, XT2317DL |
| FCC ID | IHDT56AL4 |
| EUT supports Radios application | GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/FM |
| IMEI Code | Conduction: 352398200006445 for Sample 1 359026430023087 for Sample 2 Radiation: 352398200006445 for Sample 1 359026430023061 for Sample 2 |
| HW Version | DVT2 |
| SW Version | T1TH33.27 |
| EUT Stage | Identical Prototype |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The four model name XT2317-1, XT2317-2, XT2317-3, XT2317DL are the same product except model name different for market segment.
3. There are two types of EUT, sample 1 is 1st source and sample 2 is 2nd source. For details, please refer to the XT2317-1, XT2317-2, XT2317-3, XT2317DL_Operational Description of Product Equality Declaration exhibit separately. Based on the similarity between them, we choose sample 1 to full test and sample 2 to verify the differences.



1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx Frequency | GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 14 : 788 MHz ~ 798 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 25 : 1850 MHz ~ 1915 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 30 : 2305 MHz ~ 2315 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz |
| Rx Frequency | GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 14 : 758 MHz ~ 768 MHz LTE Band 17 : 734 MHz ~ 746 MHz LTE Band 25 : 1930 MHz ~ 1995 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 29 : 717 MHz ~ 728 MHz LTE Band 30 : 2350 MHz ~ 2360 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 66 : 2110 MHz~ 2200 MHz LTE Band 71 : 617 MHz ~ 652 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; |



| | |
|---------------------------|--|
| | 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz |
| Antenna Type | WWAN : Fixed Internal Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: MDA Antenna FM : External Earphone Antenna |
| Type of Modulation | GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM |

1.5. Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------|-----------------------|------------|-----------|
| AC Adapter 1 | Brand Name | Motorola (Aohai) | Model Name | MC-101 |
| AC Adapter 2 | Brand Name | Motorola (Salcomp) | Model Name | MC-101 |
| AC Adapter 3 | Brand Name | Motorola (Chenyang) | Model Name | MC-101 |
| Battery 1 | Brand Name | Motorola (ATL) | Model Name | PG50 |
| Battery 2 | Brand Name | Motorola (SCUD) | Model Name | PG50 |
| Earphone | Brand Name | Motorola (New Leader) | Model Name | MH191 |
| USB Cable 1 | Brand Name | Motorola (SAIBAO) | Model Name | SWT-A120A |
| USB Cable 2 | Brand Name | Motorola (NAEE) | Model Name | 1.1.0157 |
| USB Cable 3 | Brand Name | Motorola (WASHIN) | Model Name | HX-WT-40 |

1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (Kunshan) | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-KS 03CH02-KS | CN1257 | 314309 |

1.8. Test Software

| Item | Site | Manufacturer | Name | Version |
|------|-----------|--------------|------|--------------|
| 1. | 03CH02-KS | AUDIX | E3 | 6.2009-8-24a |
| 2. | CO01-KS | AUDIX | E3 | 6.2009-8-24 |

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

| Test Items | Function Type |
|-----------------------|---|
| AC Conducted Emission | Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 1) for Sample 1 |
| | Mode 2: WCDMA Band V Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable 2(Charging from Adapter 2) for Sample 1 |
| | Mode 3: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable 3(Charging from Adapter 3) for Sample 1 |
| | Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1 |
| | Mode 5: LTE Band 14 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + NB USB Data Link to EUT (eMMC) for Sample 1 |
| | Mode 6: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to NB for Sample 1 |
| | Mode 7: LTE Band 12 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + NB USB Data Link to EUT (SD) for Sample 1 |
| | Mode 8: LTE Band 71 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1 |
| | Mode 9: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 3(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1 |
| | Mode 10 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 2 |
| | Mode 11 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 2 |




| | |
|--------------------|---|
| Radiated Emissions | <p>Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 1) for Sample 1</p> <p>Mode 2: WCDMA Band V Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable 2(Charging from Adapter 2) for Sample 1</p> <p>Mode 3: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable 3(Charging from Adapter 3) for Sample 1</p> <p>Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1</p> <p>Mode 5: LTE Band 14 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + NB USB Data Link to EUT (eMMC) for Sample 1</p> <p>Mode 6: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to NB for Sample 1</p> <p>Mode 7: LTE Band 12 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + NB USB Data Link to EUT (SD) for Sample 1</p> <p>Mode 8: LTE Band 71 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1</p> <p>Mode 9: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 1 + USB Cable 3(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1</p> <p>Mode 10 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 2</p> <p>Mode 11 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98M) + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 2</p> |
|--------------------|---|

Remark:

1. The worst case of AC is mode 4; only the test data of this mode is reported.
2. The worst case of RE is mode 4; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.

2.2.Connection Diagram of Test System

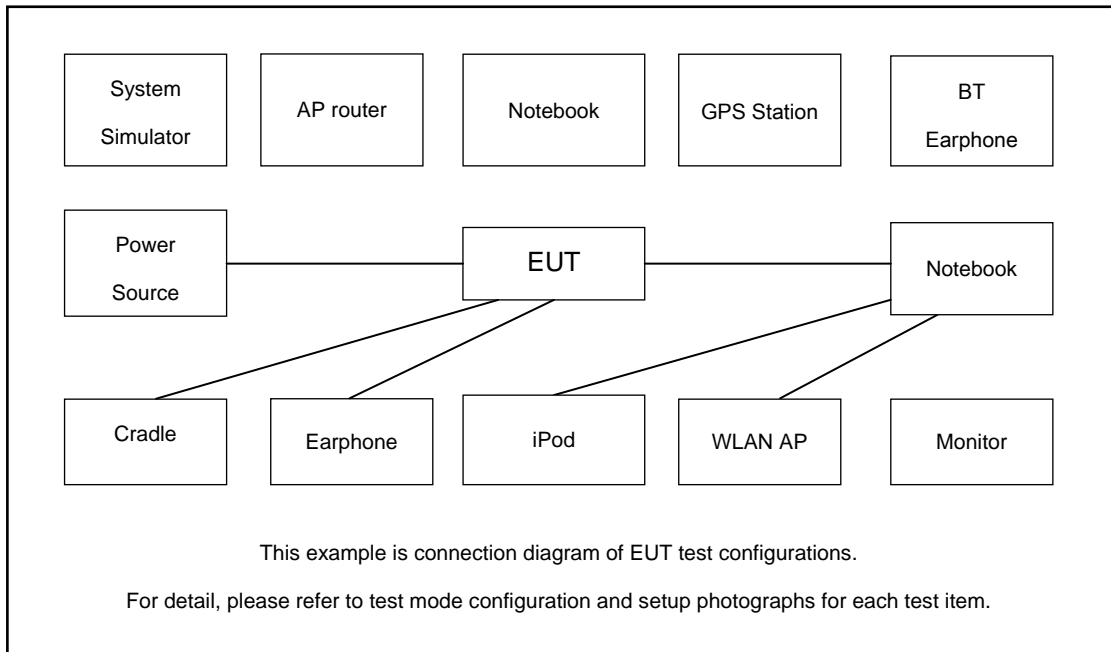

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-------------------------|------------|---------------|------------|----------------|--|
| 1. | System Simulator | Anritus | MT8821C | N/A | N/A | Unshielded, 1.8m |
| 2. | System Simulator | Anritus | MT8820C | N/A | N/A | Unshielded, 1.8m |
| 3. | Vector Signal Generator | R&S | SMBV100A | 258305 | N/A | N/A |
| 4. | WLAN AP | D-link | DIR-655 | KA21R655B1 | N/A | Unshielded, 1.8m |
| 5. | WLAN AP | TP-Link | TL-WDR5600 | N/A | N/A | Unshielded, 1.8m |
| 6. | Bluetooth Earphone | Lenovo | LBH308 | N/A | N/A | N/A |
| 7. | Bluetooth Earphone | Xiaomi | LYEJ02LM | N/A | N/A | N/A |
| 8. | Notebook | Lenovo | V130-15IKB005 | N/A | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 9. | Notebook | Lenovo | V130-14IKB001 | N/A | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 10. | Hard Disk | Lenovo | F310 | DoC | Shielded, 1.2m | N/A |
| 11. | Hard Disk | KINGSHARE | KSP6120G | N/A | N/A | N/A |
| 12. | SD Card | SanDisk | Uitra | N/A | N/A | N/A |

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|--------------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

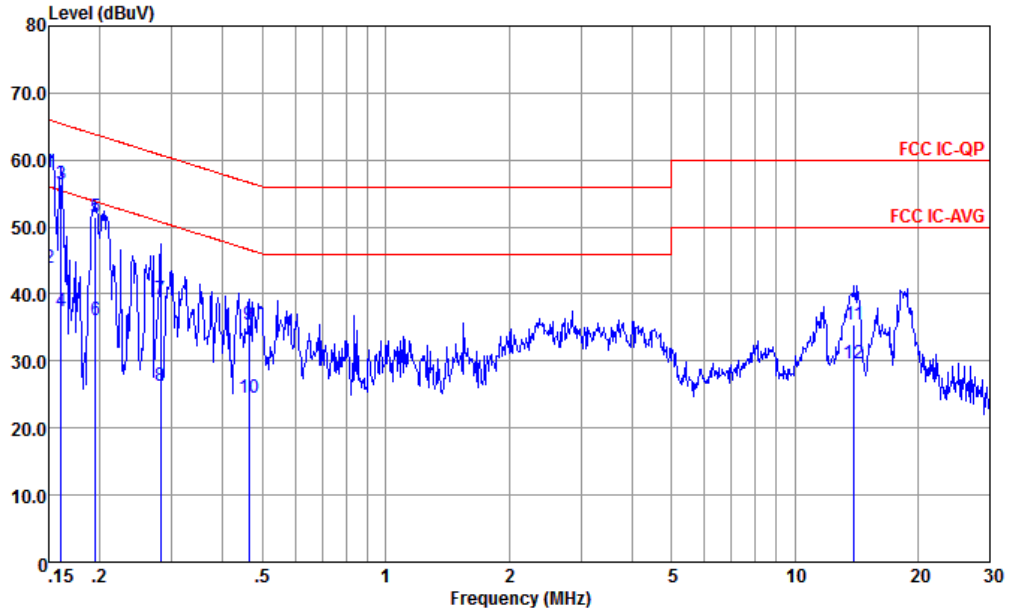


Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-LINE LINE

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.150 | 58.10 | -7.90 | 66.00 | 47.60 | 0.07 | 10.43 | QP |
| 2 | 0.150 | 43.80 | -12.20 | 56.00 | 33.30 | 0.07 | 10.43 | Average |
| 3 | 0.161 | 56.39 | -9.04 | 65.43 | 45.90 | 0.06 | 10.43 | QP |
| 4 | 0.161 | 37.39 | -18.04 | 55.43 | 26.90 | 0.06 | 10.43 | Average |
| 5 | 0.195 | 51.55 | -12.25 | 63.80 | 41.11 | 0.02 | 10.42 | QP |
| 6 | 0.195 | 36.04 | -17.76 | 53.80 | 25.60 | 0.02 | 10.42 | Average |
| 7 | 0.282 | 39.31 | -21.45 | 60.76 | 28.90 | 0.05 | 10.36 | QP |
| 8 | 0.282 | 26.21 | -24.55 | 50.76 | 15.80 | 0.05 | 10.36 | Average |
| 9 | 0.464 | 35.42 | -21.21 | 56.63 | 25.20 | -0.02 | 10.24 | QP |
| 10 | 0.464 | 24.42 | -22.21 | 46.63 | 14.20 | -0.02 | 10.24 | Average |
| 11 | 13.989 | 35.45 | -24.55 | 60.00 | 24.49 | -0.20 | 11.16 | QP |
| 12 | 13.989 | 29.55 | -20.45 | 50.00 | 18.59 | -0.20 | 11.16 | Average |



| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

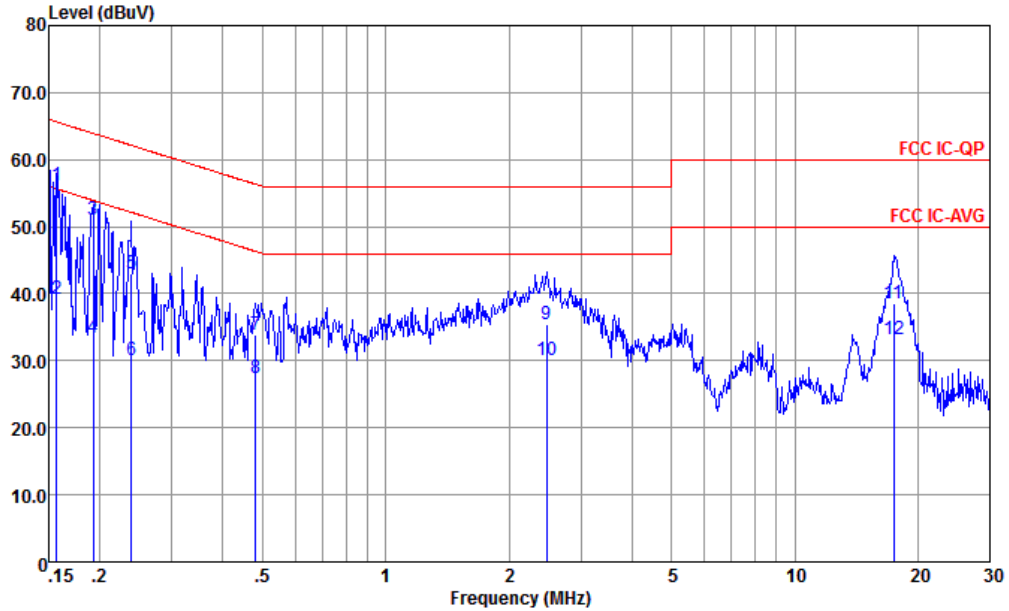

Site : CO01-KS
Condition : FCC IC-QP LISN-060105-NEUTRAL NEUTRAL

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.156 | 56.26 | -9.39 | 65.65 | 45.80 | 0.03 | 10.43 | QP |
| 2 | 0.156 | 39.26 | -16.39 | 55.65 | 28.80 | 0.03 | 10.43 | Average |
| 3 | 0.192 | 51.07 | -12.86 | 63.93 | 40.60 | 0.05 | 10.42 | QP |
| 4 | 0.192 | 33.37 | -20.56 | 53.93 | 22.90 | 0.05 | 10.42 | Average |
| 5 | 0.239 | 42.99 | -19.14 | 62.13 | 32.59 | 0.01 | 10.39 | QP |
| 6 | 0.239 | 29.99 | -22.14 | 52.13 | 19.59 | 0.01 | 10.39 | Average |
| 7 | 0.481 | 33.95 | -22.37 | 56.32 | 23.80 | -0.08 | 10.23 | QP |
| 8 | 0.481 | 27.35 | -18.97 | 46.32 | 17.20 | -0.08 | 10.23 | Average |
| 9 | 2.474 | 35.53 | -20.47 | 56.00 | 25.60 | -0.13 | 10.06 | QP |
| 10 | 2.474 | 30.13 | -15.87 | 46.00 | 20.20 | -0.13 | 10.06 | Average |
| 11 | 17.475 | 38.65 | -21.35 | 60.00 | 27.61 | -0.24 | 11.28 | QP |
| 12 | 17.475 | 33.25 | -16.75 | 50.00 | 22.21 | -0.24 | 11.28 | Average |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

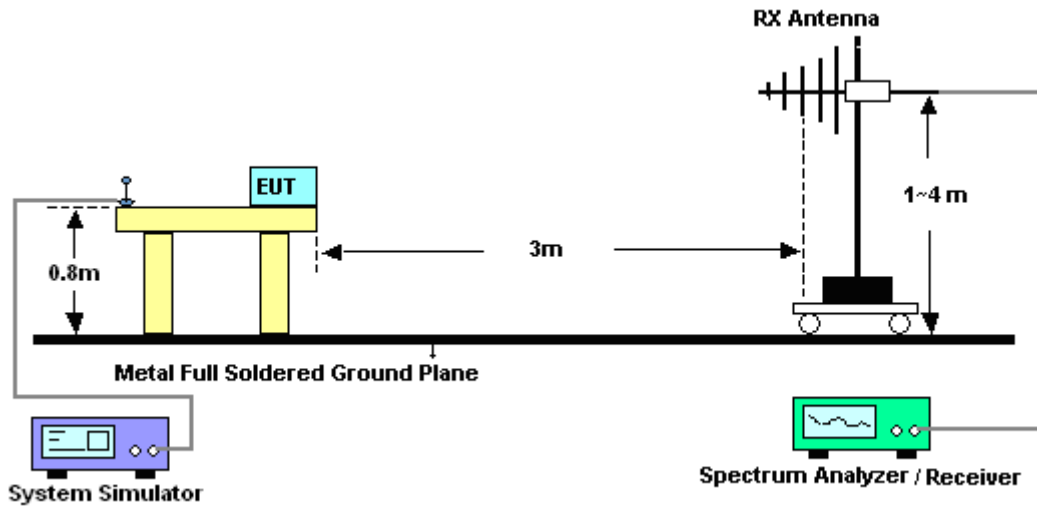


For radiated emissions above 1GHz

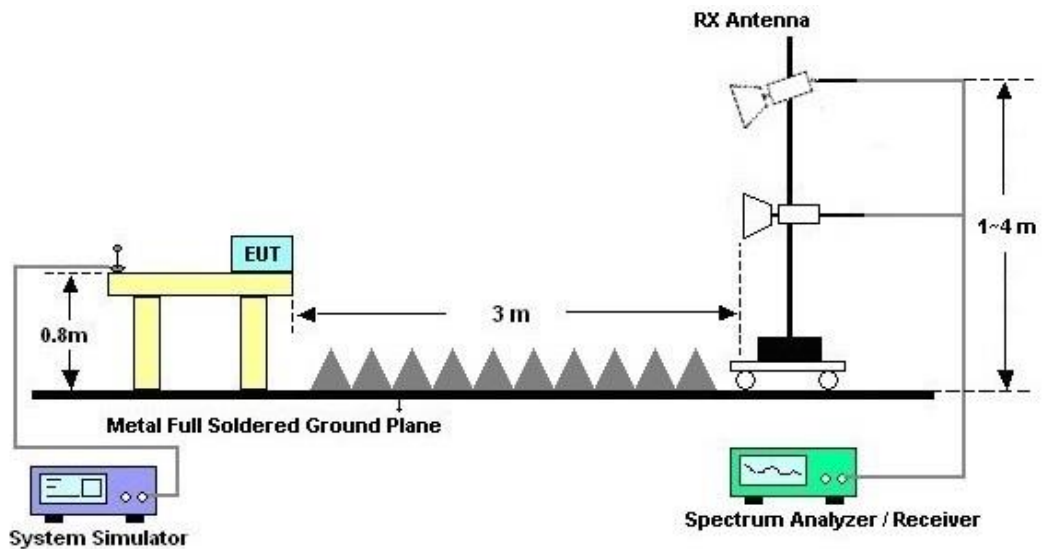



3.2.5. Test Result of Radiated Emission

| | | | |
|-----------------|--|---------------------|------------|
| Test Engineer : | Feng | Temperature : | 21~22°C |
| | | Relative Humidity : | 41~42% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #1 is base station (FM option) signal which can be ignored. #6 is system simulator signal which can be ignored. | | |

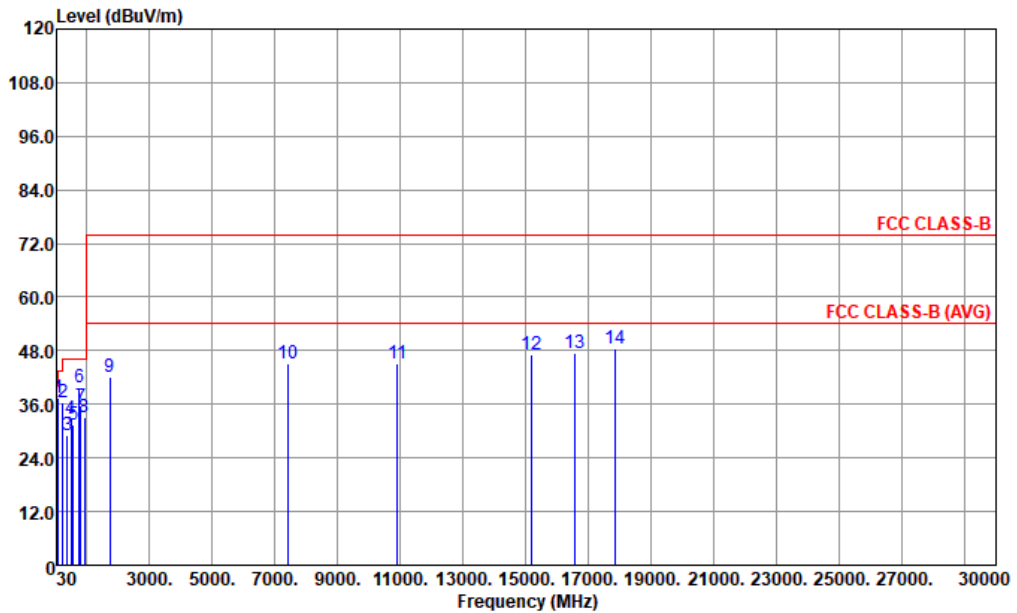


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49921 HORIZONTAL

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark | |
|----|----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 97.90 | 37.40 | | | 52.57 | 15.80 | 1.43 | 32.40 | --- | --- | Peak |
| 2 | 239.52 | 36.51 | -9.49 | 46.00 | 49.49 | 17.33 | 2.09 | 32.40 | --- | --- | Peak |
| 3 | 373.38 | 29.04 | -16.96 | 46.00 | 37.37 | 21.20 | 2.87 | 32.40 | --- | --- | Peak |
| 4 | 488.81 | 32.63 | -13.37 | 46.00 | 38.10 | 23.79 | 3.14 | 32.40 | --- | --- | Peak |
| 5 | 556.71 | 31.56 | -14.44 | 46.00 | 35.46 | 25.25 | 3.25 | 32.40 | --- | --- | Peak |
| 6 | 753.62 | 39.78 | | | 40.47 | 27.51 | 4.08 | 32.28 | --- | --- | Peak |
| 7 | 802.12 | 35.43 | -10.57 | 46.00 | 35.08 | 28.22 | 4.22 | 32.09 | --- | --- | Peak |
| 8 | 932.10 | 33.02 | -12.98 | 46.00 | 30.14 | 29.57 | 4.55 | 31.24 | --- | --- | Peak |
| 9 | 1731.00 | 42.01 | -31.99 | 74.00 | 67.52 | 28.12 | 6.21 | 59.84 | --- | --- | Peak |
| 10 | 7409.00 | 45.05 | -28.95 | 74.00 | 55.63 | 36.45 | 13.50 | 60.53 | --- | --- | Peak |
| 11 | 10894.00 | 44.97 | -29.03 | 74.00 | 50.83 | 38.16 | 16.54 | 60.56 | --- | --- | Peak |
| 12 | 15195.00 | 47.24 | -26.76 | 74.00 | 48.17 | 39.39 | 19.63 | 59.95 | --- | --- | Peak |
| 13 | 16572.00 | 47.37 | -26.63 | 74.00 | 45.18 | 40.26 | 20.74 | 58.81 | --- | --- | Peak |
| 14 | 17864.00 | 48.35 | -25.65 | 74.00 | 42.85 | 41.34 | 21.31 | 57.15 | --- | --- | Peak |



| | | | |
|-----------------|--|---------------------|----------|
| Test Engineer : | Feng | Temperature : | 21~22°C |
| | | Relative Humidity : | 41~42% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #2 is base station (FM option) signal which can be ignored. #6 is system simulator signal which can be ignored. | | |

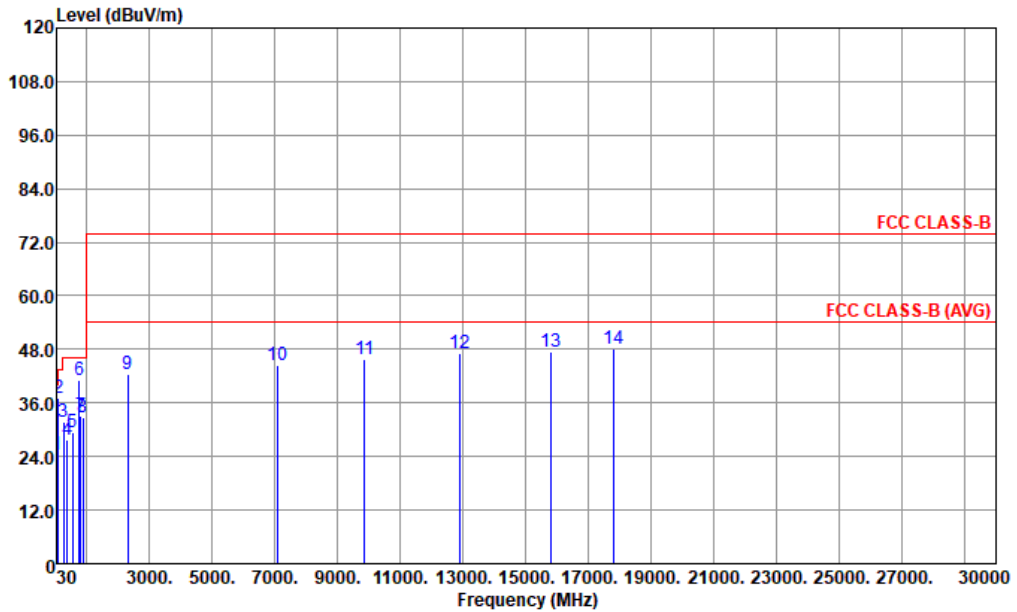

Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 49921 VERTICAL

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp | A/Pos | T/Pos | Remark | | |
|----|----------|--------|------------|------------|-------------------|--------------|-------|-------|--------|-----|------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 53.28 | 24.51 | -15.49 | 40.00 | 42.12 | 13.78 | 1.01 | 32.40 | --- | --- | Peak |
| 2 | 97.90 | 36.94 | | | 52.11 | 15.80 | 1.43 | 32.40 | --- | --- | Peak |
| 3 | 254.07 | 31.75 | -14.25 | 46.00 | 43.02 | 19.00 | 2.13 | 32.40 | --- | --- | Peak |
| 4 | 386.96 | 27.82 | -18.18 | 46.00 | 35.74 | 21.55 | 2.93 | 32.40 | --- | --- | Peak |
| 5 | 541.19 | 29.43 | -16.57 | 46.00 | 33.73 | 24.92 | 3.18 | 32.40 | --- | --- | Peak |
| 6 | 754.00 | 40.97 | | | 41.66 | 27.51 | 4.08 | 32.28 | --- | --- | Peak |
| 7 | 802.12 | 32.97 | -13.03 | 46.00 | 32.62 | 28.22 | 4.22 | 32.09 | --- | --- | Peak |
| 8 | 885.54 | 32.61 | -13.39 | 46.00 | 30.85 | 28.96 | 4.42 | 31.62 | --- | --- | Peak |
| 9 | 2309.00 | 42.43 | -31.57 | 74.00 | 62.66 | 32.45 | 7.25 | 59.93 | --- | --- | Peak |
| 10 | 7069.00 | 44.56 | -29.44 | 74.00 | 55.54 | 36.24 | 13.24 | 60.46 | --- | --- | Peak |
| 11 | 9857.00 | 45.80 | -28.20 | 74.00 | 53.40 | 37.50 | 15.73 | 60.83 | --- | --- | Peak |
| 12 | 12883.00 | 47.00 | -27.00 | 74.00 | 50.28 | 38.73 | 18.09 | 60.10 | --- | --- | Peak |
| 13 | 15824.00 | 47.58 | -26.42 | 74.00 | 47.07 | 40.03 | 20.19 | 59.71 | --- | --- | Peak |
| 14 | 17813.00 | 47.99 | -26.01 | 74.00 | 42.63 | 41.28 | 21.29 | 57.21 | --- | --- | Peak |

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|--------------|------------|--------------|-------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver | R&S | ESC17 | 100768 | 9kHz~7GHz; | May 24, 2022 | Nov. 30, 2022 | May 23, 2023 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 13, 2022 | Nov. 30, 2022 | Oct. 12, 2023 | Conduction (CO01-KS) |
| AC LISN | MessTec | AN3016 | 060105 | 9kHz~30MHz | May 24, 2022 | Nov. 30, 2022 | May 23, 2023 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP000000811 | AC 0V~300V, 45Hz~1000Hz | Oct. 12, 2022 | Nov. 30, 2022 | Oct. 11, 2023 | Conduction (CO01-KS) |
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz;Max 30dBm | Oct. 12, 2022 | Nov. 25, 2022 | Oct. 11, 2023 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55370528 | 10Hz-44G,MAX 30dB | Oct. 12, 2022 | Nov. 25, 2022 | Oct. 11, 2023 | Radiation (03CH02-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 44483 | 30MHz-1GHz | Dec. 22, 2021 | Nov. 25, 2022 | Dec. 21, 2022 | Radiation (03CH02-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 00218642 | 1GHz~18GHz | Apr. 18, 2022 | Nov. 25, 2022 | Apr. 17, 2023 | Radiation (03CH02-KS) |
| SHF-EHF Horn | Com-power | AH-840 | 101070 | 18GHz~40GHz | Jan. 05, 2022 | Nov. 25, 2022 | Jan. 04, 2023 | Radiation (03CH02-KS) |
| Amplifier | SONOMA | 310N | 413741 | 9KHz-1GHz | Jan. 05, 2022 | Nov. 25, 2022 | Jan. 04, 2023 | Radiation (03CH02-KS) |
| Amplifier | EM | EM01G18G | 060806 | 1GHz~18GHz | Oct. 12, 2022 | Nov. 25, 2022 | Oct. 11, 2023 | Radiation (03CH02-KS) |
| Amplifier | MITEQ | EM18G40GGA | 060728 | 18~40GHz | Jan. 05, 2022 | Nov. 25, 2022 | Jan. 04, 2023 | Radiation (03CH02-KS) |
| AC Power Source | Chroma | 61601 | 616010002473 | N/A | NCR | Nov. 25, 2022 | NCR | Radiation (03CH02-KS) |
| Turn Table | MF | MF7802 | N/A | 0~360 degree | NCR | Nov. 25, 2022 | NCR | Radiation (03CH02-KS) |
| Antenna Mast | MF | MF7802 | N/A | 1 m~4 m | NCR | Nov. 25, 2022 | NCR | Radiation (03CH02-KS) |

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.78dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.0dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.0dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.1dB |
|---|-------|