



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2431-2, XT2431-3
FCC ID : IHDT56AM6
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Nov. 30, 2023 ~ Dec. 15, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 5
1.6 Maximum EIRP Power and Emission Designator 6
1.7 Testing Site 6
1.8 Test Software 7
1.9 Applied Standards 7
1.10 Specification of Accessory 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8
2.1 Test Mode 8
2.2 Connection Diagram of Test System 9
2.3 Support Unit used in test configuration and system 9
2.4 Measurement Results Explanation Example 9
2.5 Frequency List of Low/Middle/High Channels 10
3 CONDUCTED TEST ITEMS 11
3.1 Measuring Instruments 11
3.2 Test Setup 11
3.3 Test Result of Conducted Test 11
3.4 Conducted Output Power Measurement 12
3.5 Peak-to-Average Ratio 13
3.6 EIRP 14
3.7 Occupied Bandwidth 15
3.8 Conducted Band Edge Measurement 16
3.9 Conducted Spurious Emission Measurement 17
3.10 Frequency Stability Measurement 18
4 RADIATED TEST ITEMS 19
4.1 Measuring Instruments 19
4.2 Test Setup 19
4.3 Test Result of Radiated Test 20
4.4 Radiated Spurious Emission Measurement 21
5 LIST OF MEASURING EQUIPMENT 22
6 MEASUREMENT UNCERTAINTY 23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 40.1 dB at 6960.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/matrix manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2431-2, XT2431-3
FCC ID	IHDT56AM6
IMEI Code	Conducted: 355221240002058/355221240002066 Radiation: 355221240002157
HW Version	DVT
SW Version	U1TD34.37
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	LTE Band 42: 3450 MHz ~ 3550 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 42C : 22.11 dBm
Antenna Gain	LTE Band 42C : -3.80 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

LTE Band 42C_CA	QPSK		16QAM/64QAM	
BW (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20MHz+20MHz	0.0678	37M6G7D	0.0533	37M5W7D
20MHz+15MHz	0.0662	32M9G7D	0.0524	32M9W7D
20MHz+10MHz	0.0671	28M0G7D	0.0528	28M0W7D
20MHz+5MHz	0.0658	23M1G7D	0.0512	23M3W7D
15MHz+20MHz	0.0665	32M5G7D	0.0530	32M7W7D
10MHz+20MHz	0.0667	27M8G7D	0.0527	27M8W7D
5MHz+20MHz	0.0662	23M3G7D	0.0520	23M2W7D

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.10 Specification of Accessory

Accessories Information				
Battery 1	Brand Name	Motorola (ATL)	Model Name	QA50
Battery 2	Brand Name	Motorola (Jiade)	Model Name	QF50



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y Plane)

Test Items	Band	Bandwidth (MHz)										Modulation			RB #			Test Channel				
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	1	Half	Full	L	M	H		
Max. Output Power	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v					v		
26dB and 99% Bandwidth	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v				v			v		
Conducted Band Edge	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v		v	v		v		
Conducted Spurious Emission	42C_CA	v	v	v	v	v	v	v	-	-	-	v			v			v	v	v		
E.I.R.P.	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v					v		
Radiated Spurious Emission	42C_CA	Worst Case																				v
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																					

2.2 Connection Diagram of Test System

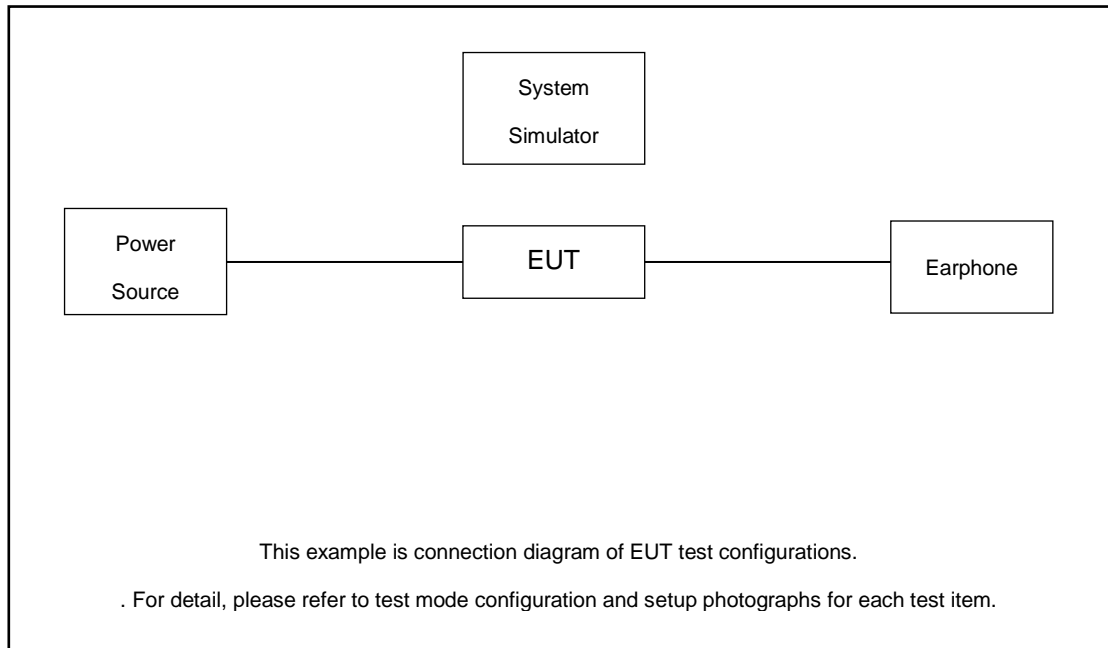

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Adapter	MOTO	MC-20L	N/A	N/A	N/A
4.	USB Cable	saibao	N/A	N/A	N/A	N/A
5.	Earphone	MOTO	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.50 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 5.50 + 10 = 15.50 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 42C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	42190	42590	42792
		Frequency	3460	3500	3520.2
	SCC	Channel	42388	42788	42990
		Frequency	3479.8	3519.8	3540
20 + 15	PCC	Channel	42190	42590	42844
		Frequency	3460	3500	3525.4
	SCC	Channel	42361	42761	43015
		Frequency	3477.1	3517.1	3542.5
15 + 20	PCC	Channel	42165	42590	42819
		Frequency	3457.5	3500	3522.9
	SCC	Channel	42336	42761	42990
		Frequency	3474.6	3517.1	3540
20 + 10	PCC	Channel	42190	42590	42896
		Frequency	3460	3500	3530.6
	SCC	Channel	42334	42734	43040
		Frequency	3474.4	3514.4	3545
10 + 20	PCC	Channel	42140	42590	42846
		Frequency	3455	3500	3525.6
	SCC	Channel	42284	42734	42990
		Frequency	3469.4	3514.4	3540
20 + 5	PCC	Channel	42190	42590	42948
		Frequency	3460	3500	3535.8
	SCC	Channel	42307	42707	43065
		Frequency	3471.7	3511.7	3547.5
5 + 20	PCC	Channel	42115	42590	42873
		Frequency	3452.5	3500	3528.3
	SCC	Channel	42232	42707	42990
		Frequency	3464.2	3511.7	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

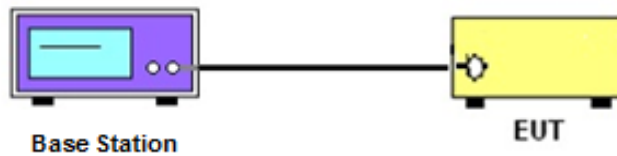

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

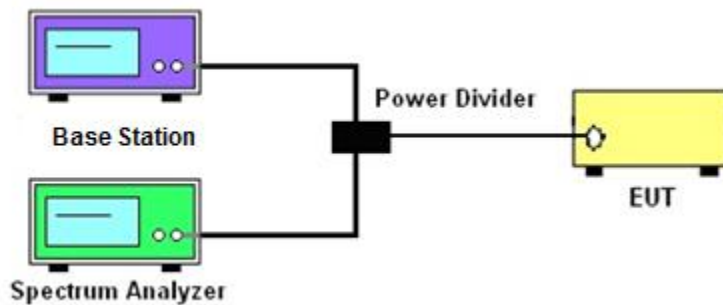

3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW \geq 500KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

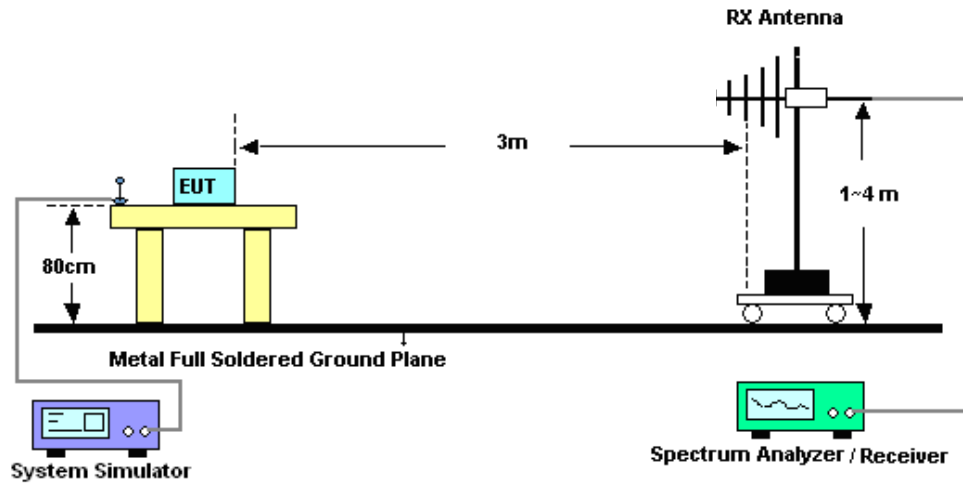

4.2.3 For radiated test above 1GHz



4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Dec. 13, 2023~ Dec. 15, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Dec. 13, 2023~ Dec. 15, 2023	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Dec. 13, 2023~ Dec. 15, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Dec. 13, 2023~ Dec. 15, 2023	Jul. 04, 2024	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2023	Nov. 30, 2023	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Nov. 30, 2023	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Nov. 30, 2023	Apr. 08, 2024	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 10, 2023	Nov. 30, 2023	Oct. 09, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Nov. 30, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	Nov. 30, 2023	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	Nov. 30, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 10, 2023	Nov. 30, 2023	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 10, 2023	Nov. 30, 2023	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 30, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 30, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 30, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.82
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.56
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.54
---	------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Hank Lin	Temperature :	24~26°C
		Relative Humidity :	50~53%

CA Power and EIRP

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	22.05	0.0668
M	QPSK	1	Max	1	0	22.11	0.0678
H	QPSK	1	Max	1	0	22.08	0.0673
L	16QAM	1	Max	1	0	21.01	0.0526
M	16QAM	1	Max	1	0	21.05	0.0531
H	16QAM	1	Max	1	0	21.07	0.0533
L	64QAM	1	Max	1	0	19.96	0.0413
M	64QAM	1	Max	1	0	20.01	0.0418
H	64QAM	1	Max	1	0	19.95	0.0412
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.01	0.0662
H	16QAM	1	Max	1	0	20.99	0.0524
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.03	0.0665
H	16QAM	1	Max	1	0	21.04	0.0530
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.07	0.0671
H	16QAM	1	Max	1	0	21.03	0.0528
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.04	0.0667
H	16QAM	1	Max	1	0	21.02	0.0527
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	21.98	0.0658
H	16QAM	1	Max	1	0	20.89	0.0512
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.01	0.0662
H	16QAM	1	Max	1	0	20.96	0.0520



LTE Band 42C 27Q

26dB Bandwidth

Mode	LTE Band 42C : 26dB BW(MHz)			
QPSK				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	24.78	29.91	34.76	24.88
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	29.91	34.76	39.80	


Mode	LTE Band 42C : 26dB BW(MHz)			
16QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	24.63	29.91	34.90	27.12
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	29.97	35.11	39.88	



LTE Band 42C


QPSK

Middle Channel / 5MHz+20MHz

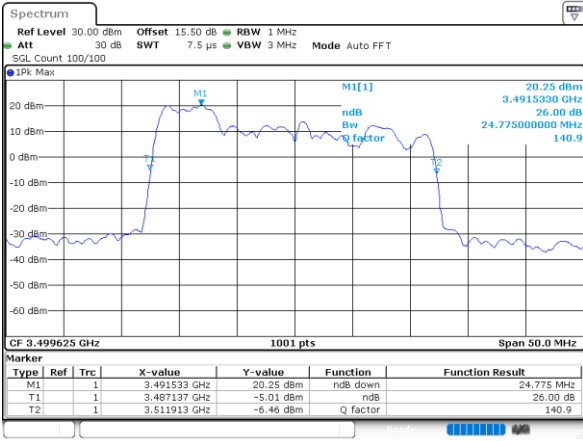


Date: 13, DEC, 2023 13:41:57

Middle Channel / 10MHz+20MHz

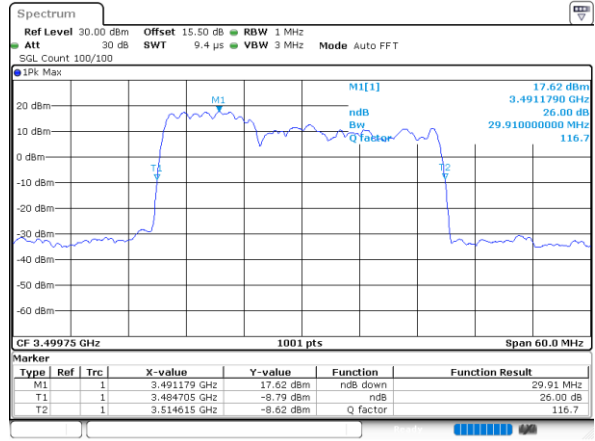


Date: 14, DEC, 2023 01:33:57

Middle Channel / 15MHz+20MHz

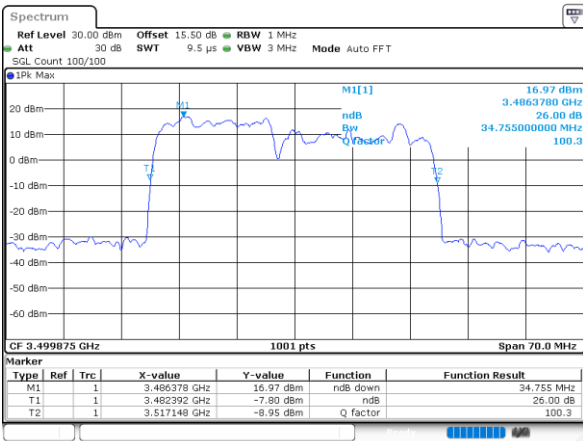


Date: 14, DEC, 2023 02:27:19

Middle Channel / 20MHz+5MHz

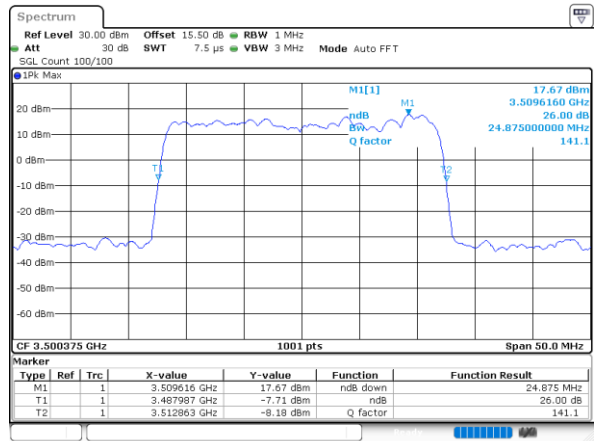


Date: 14, DEC, 2023 08:51:07

Middle Channel / 20MHz+10MHz

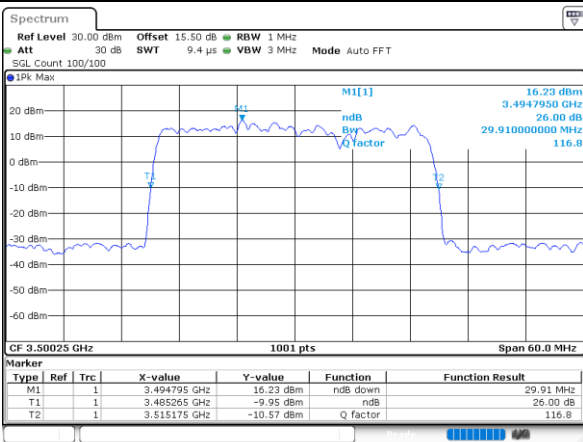


Date: 14, DEC, 2023 14:53:58

Middle Channel / 20MHz+15MHz

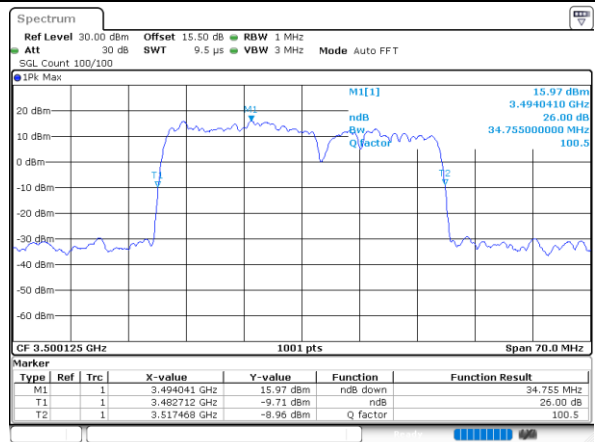

Date: 14, DEC, 2023 15:45:40

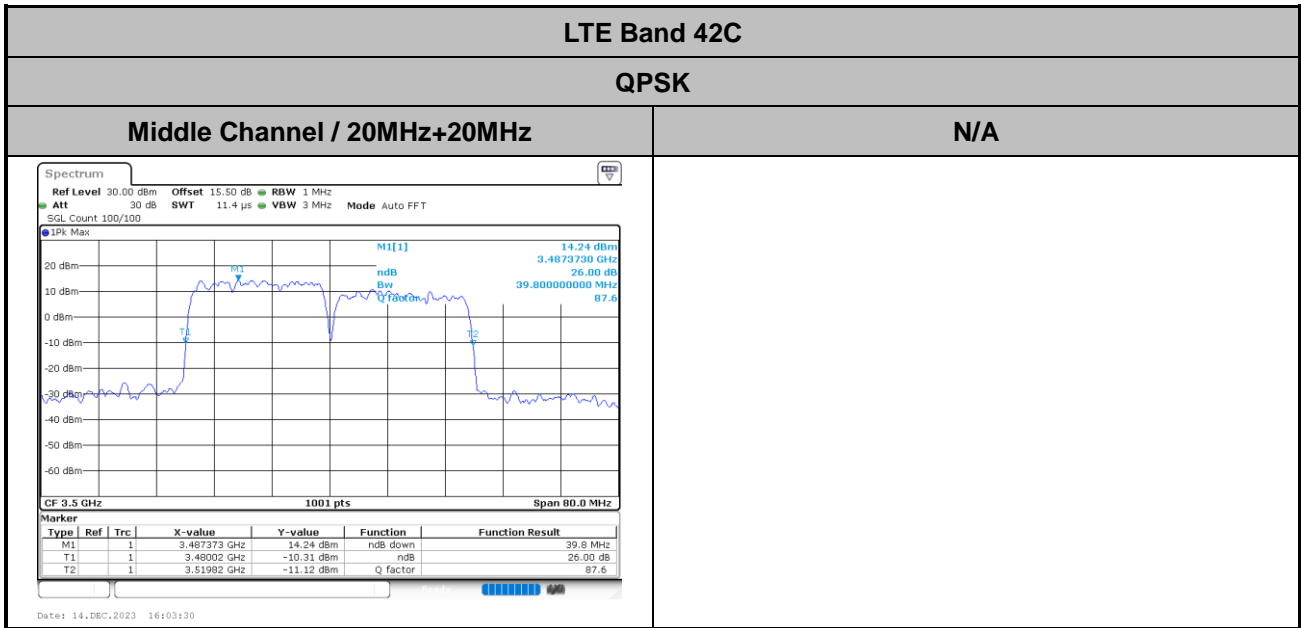




LTE Band 42C


16QAM

Middle Channel / 5MHz+20MHz

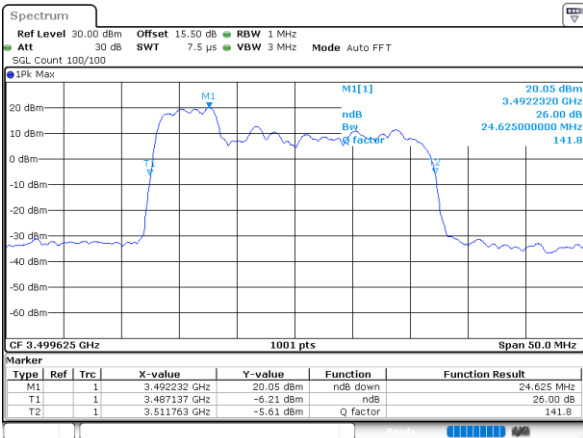


Date: 13, DEC, 2023 13:41:25

Middle Channel / 10MHz+20MHz

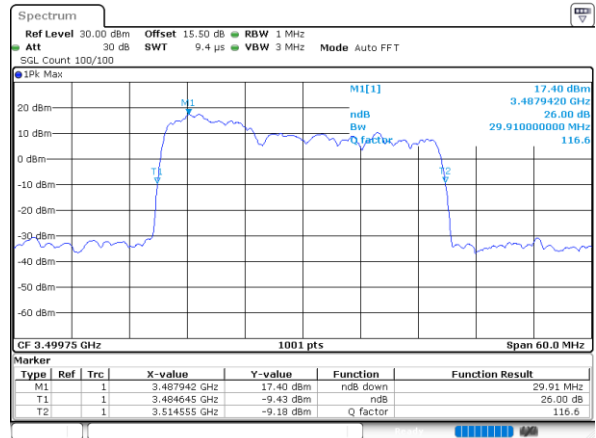


Date: 14, DEC, 2023 01:32:09

Middle Channel / 15MHz+20MHz

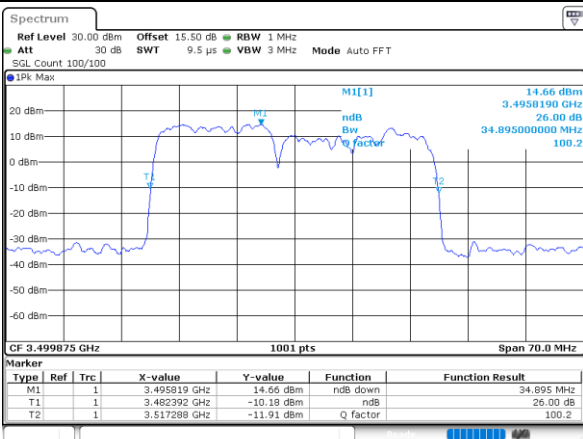


Date: 14, DEC, 2023 02:26:42

Middle Channel / 20MHz+5MHz

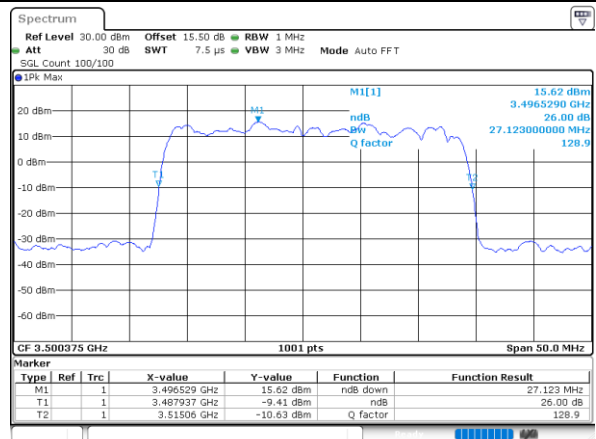


Date: 14, DEC, 2023 08:49:17

Middle Channel / 20MHz+10MHz

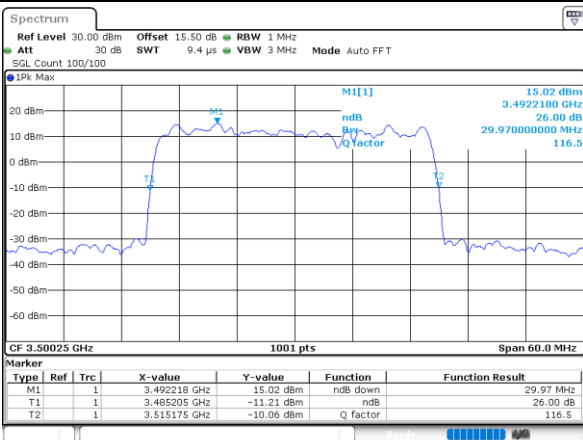


Date: 14, DEC, 2023 14:50:42

Middle Channel / 20MHz+15MHz

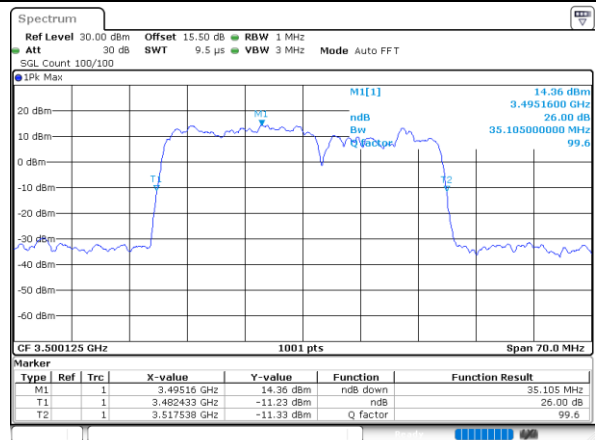

Date: 14, DEC, 2023 15:47:16

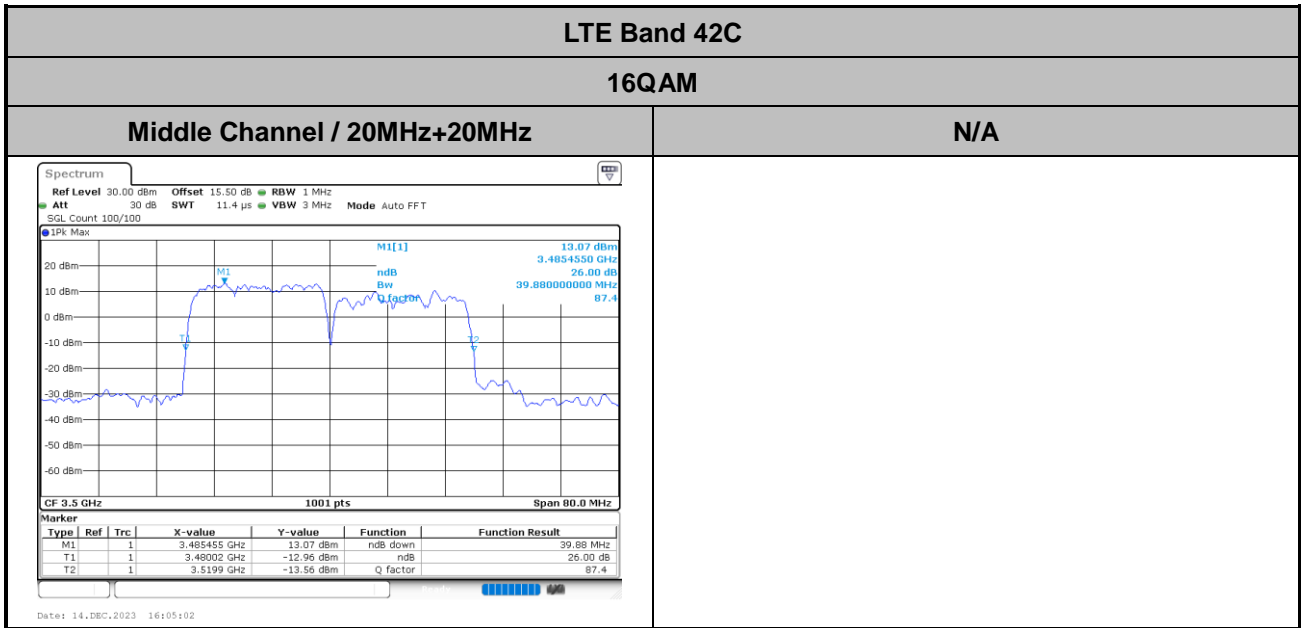



Occupied Bandwidth

Mode	LTE Band 42C : 99%OBW(MHz)			
QPSK				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	23.28	27.75	32.52	23.13
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	27.99	32.87	37.56	


Mode	LTE Band 42C : 99%OBW(MHz)			
16QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	23.18	27.81	32.73	23.33
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	27.99	32.94	37.48	



LTE Band 42C


QPSK

Middle Channel / 5MHz+20MHz

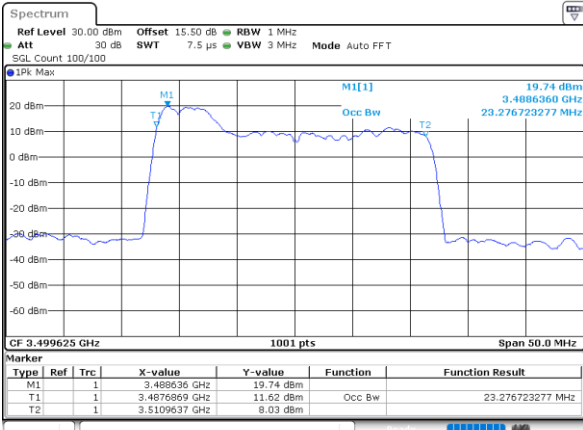


Date: 13, DEC, 2023 13:42:28

Middle Channel / 10MHz+20MHz

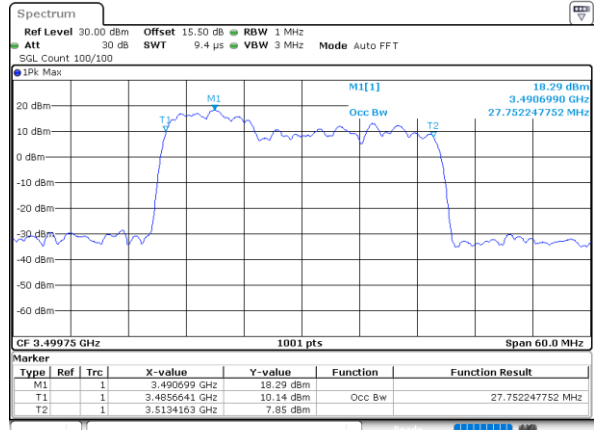


Date: 14, DEC, 2023 01:33:21

Middle Channel / 15MHz+20MHz

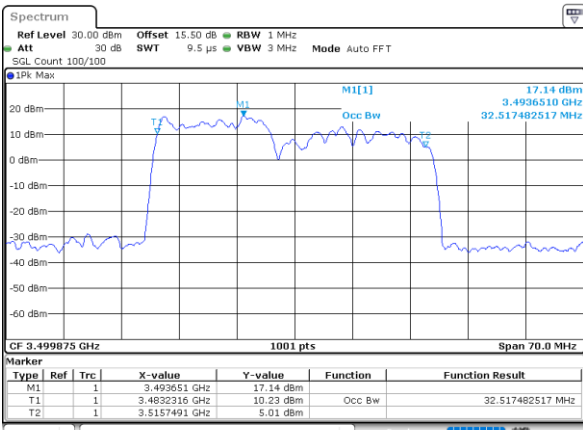


Date: 14, DEC, 2023 02:27:55

Middle Channel / 20MHz+5MHz

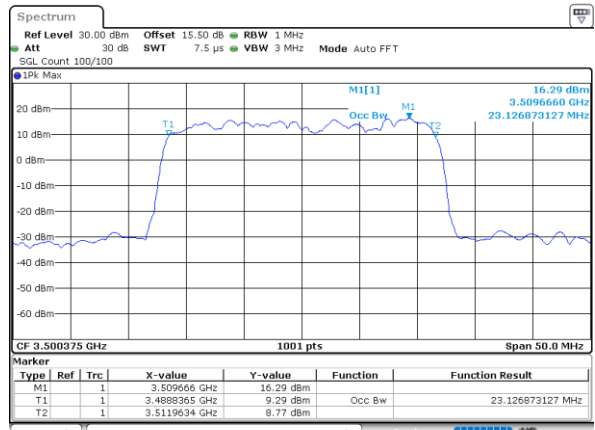


Date: 14, DEC, 2023 08:50:31

Middle Channel / 20MHz+10MHz

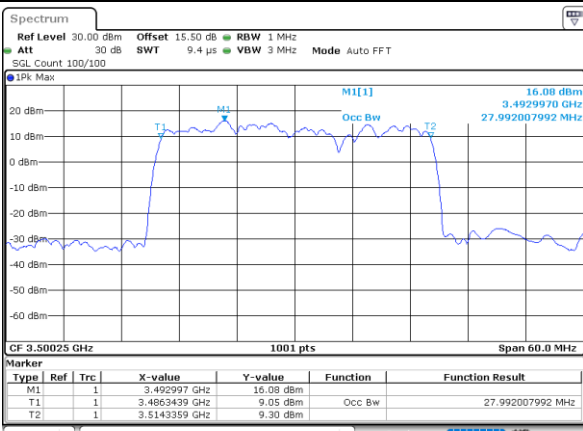


Date: 14, DEC, 2023 14:52:59

Middle Channel / 20MHz+15MHz

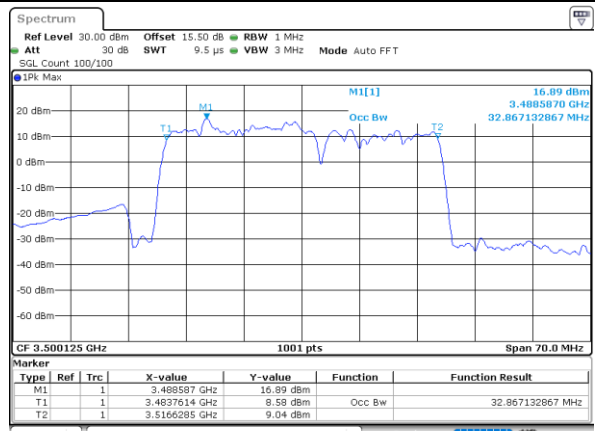

Date: 14, DEC, 2023 15:44:59

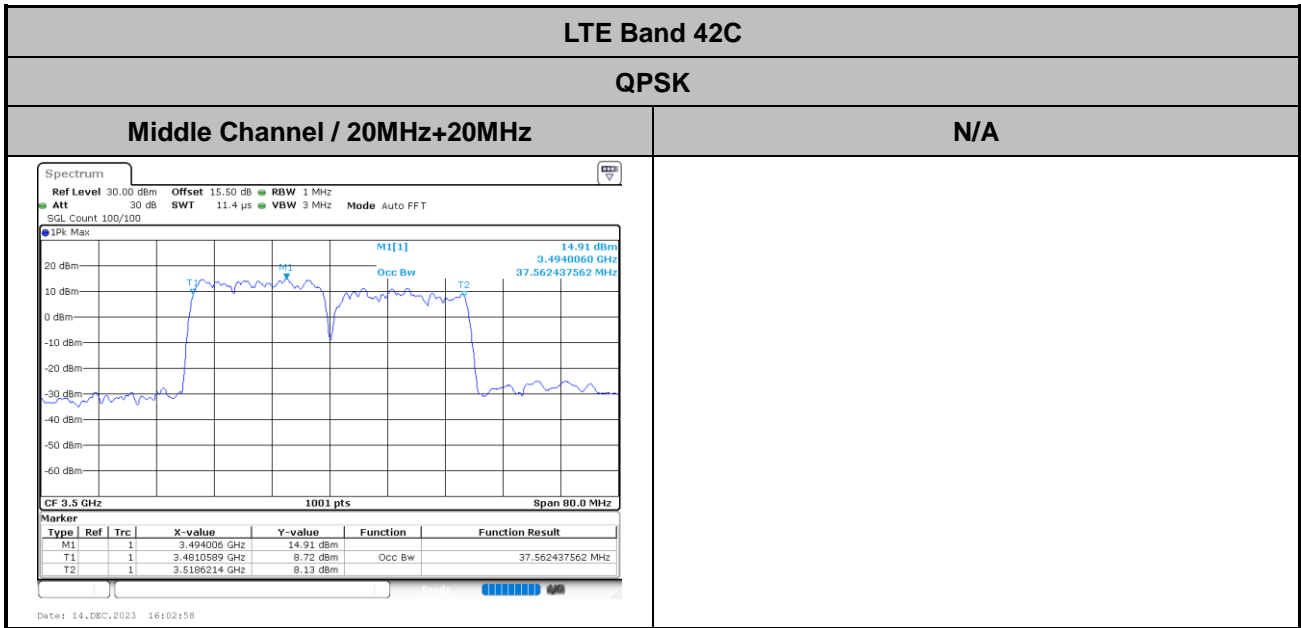




LTE Band 42C


16QAM

Middle Channel / 5MHz+20MHz

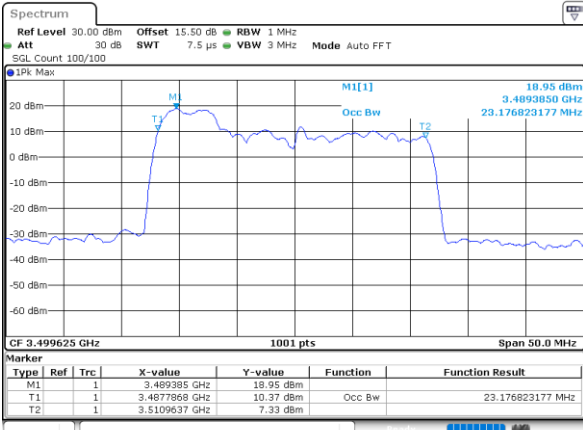


Date: 13, DEC, 2023 13:40:54

Middle Channel / 10MHz+20MHz

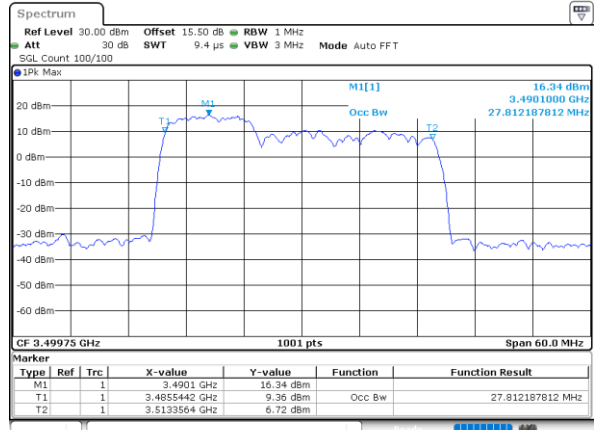


Date: 14, DEC, 2023 01:32:45

Middle Channel / 15MHz+20MHz

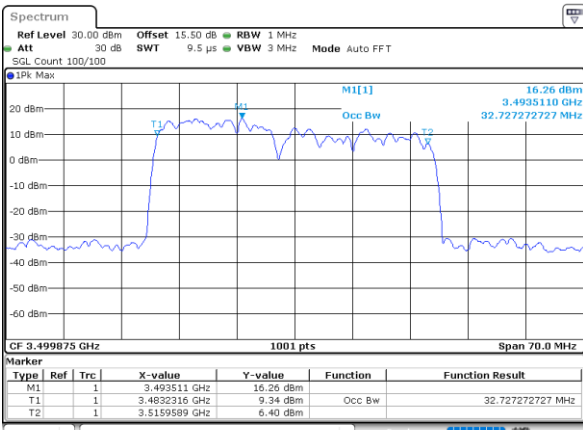


Date: 14, DEC, 2023 02:26:06

Middle Channel / 20MHz+5MHz

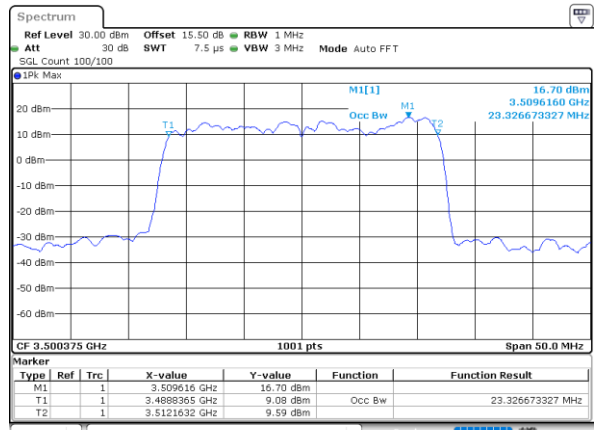


Date: 14, DEC, 2023 08:49:54

Middle Channel / 20MHz+10MHz

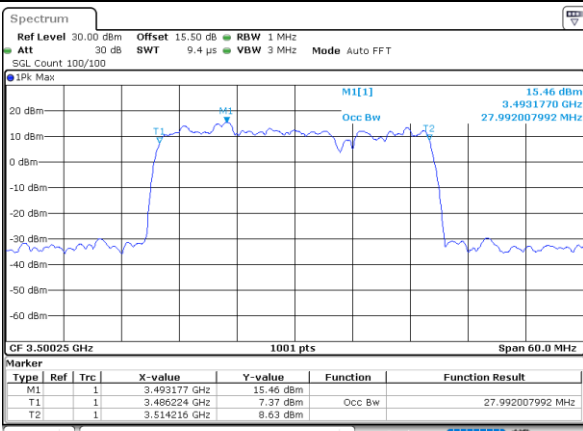


Date: 14, DEC, 2023 14:50:01

Middle Channel / 20MHz+15MHz

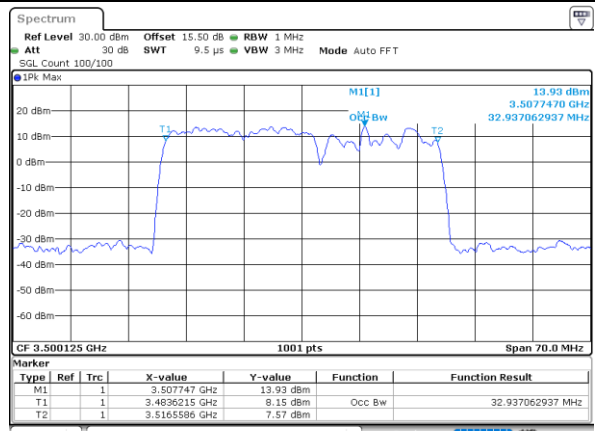

Date: 14, DEC, 2023 15:46:45

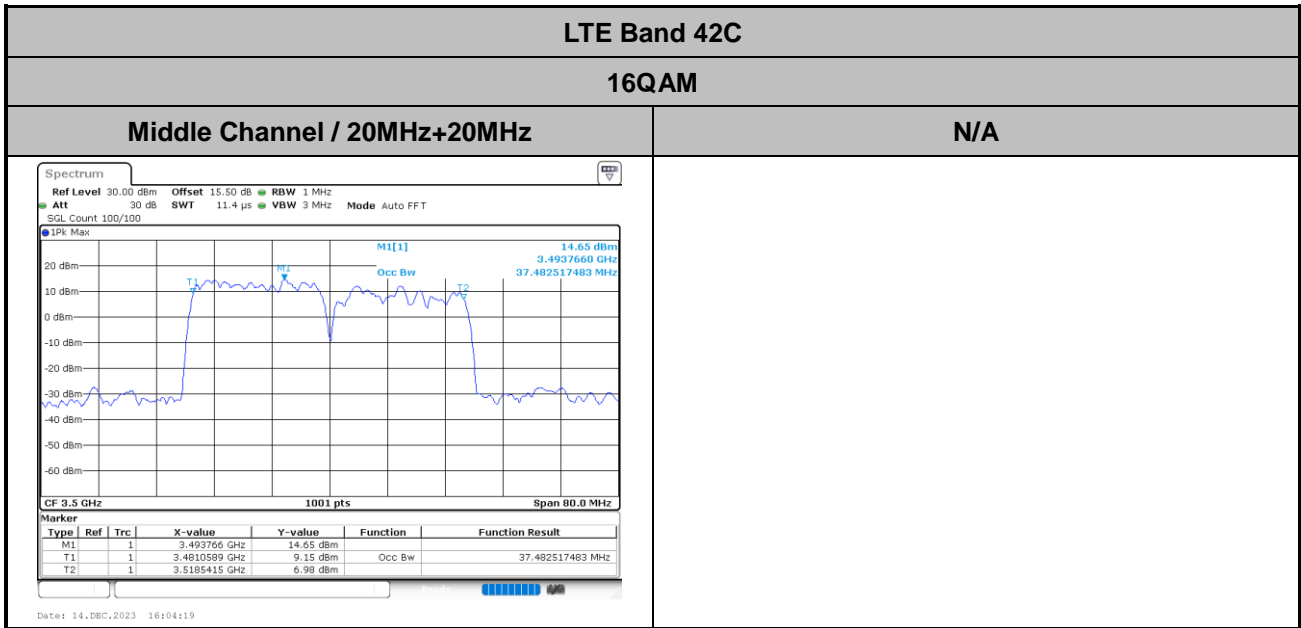




Conducted Band Edge

LTE Band 42C / 5MHz+20MHz


QPSK

Lowest Band Edge / 1RB0 and 1RB99

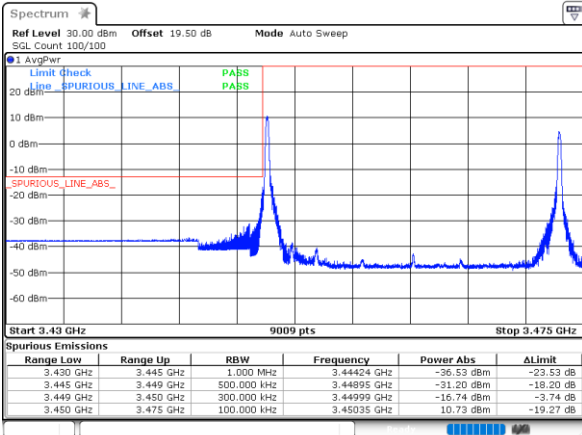


Date: 13, DEC, 2023 13:12:27

Highest Band Edge / 1RB0 and 1RB99

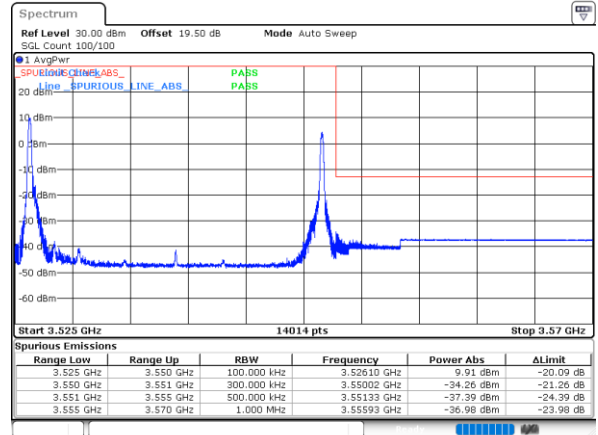


Date: 13, DEC, 2023 01:11:00

Lowest Band Edge / 1RB49 and 1RB0

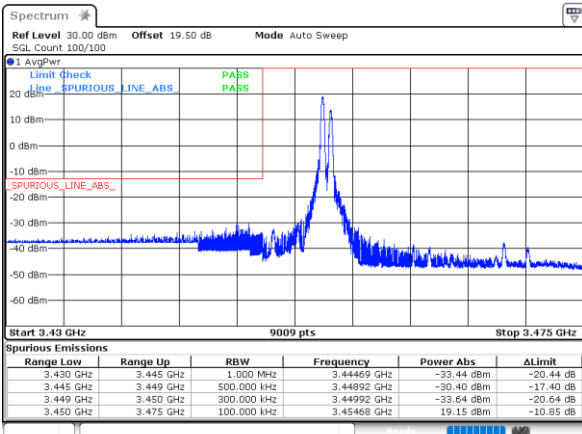

Date: 13, DEC, 2023 13:14:16

Highest Band Edge / 1RB49 and 1RB0

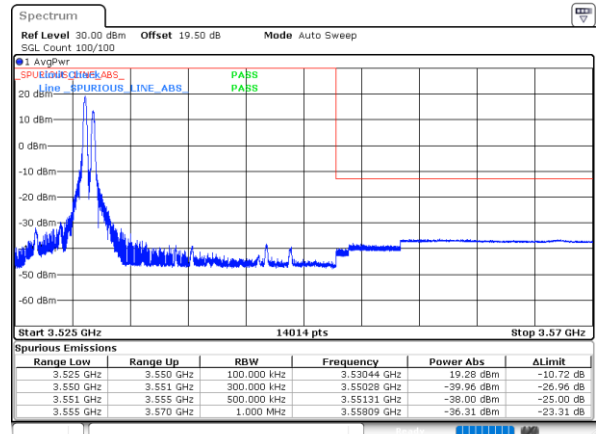


Date: 13, DEC, 2023 01:17:07




LTE Band 42C / 5MHz+20MHz

Lowest Band Edge / Full RB

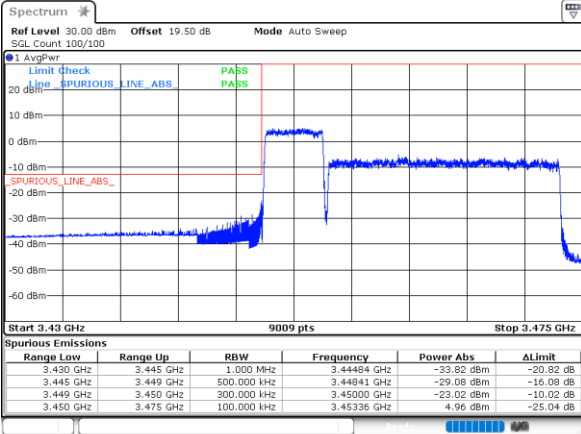

Date: 13, DEC, 2023 13:24:00

Highest Band Edge / Full RB

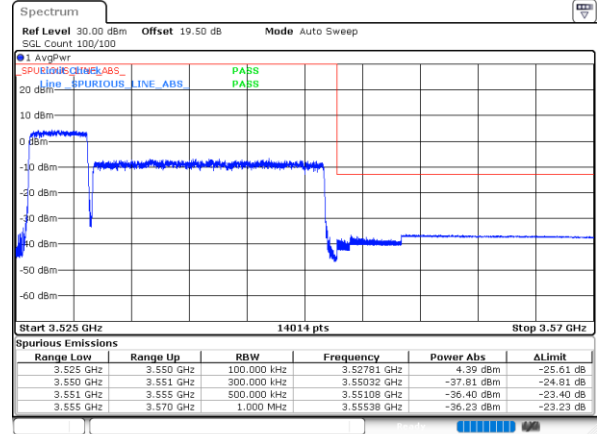

Date: 13, DEC, 2023 01:10:06





LTE Band 42C / 10MHz+20MHz

QPSK

Lowest Band Edge / 1RB0 and 1RB49

Highest Band Edge / 1RB0 and 1RB49

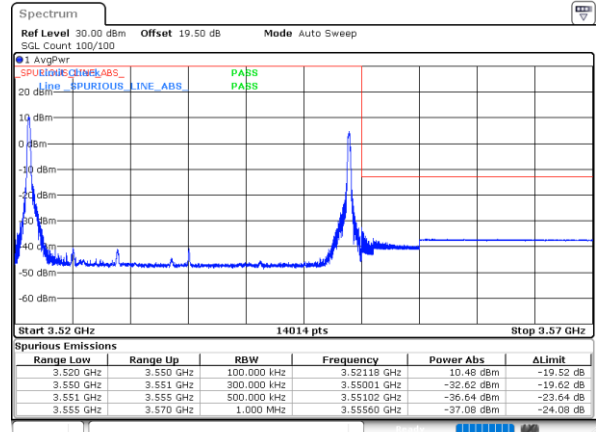
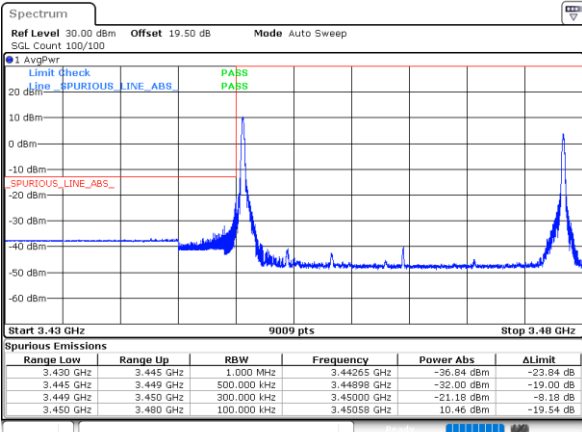


Date: 13, DEC, 2023 09:14:41

Date: 13, DEC, 2023 09:14:54

Lowest Band Edge / 1RB74 and 1RB0

Highest Band Edge / 1RB74 and 1RB0

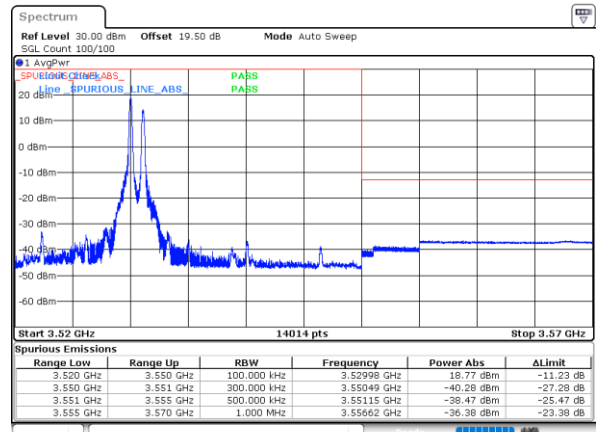
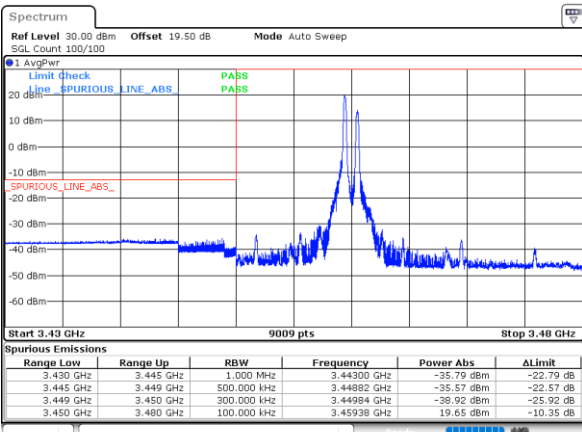


Date: 13, DEC, 2023 08:54:56

Date: 13, DEC, 2023 09:14:02

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

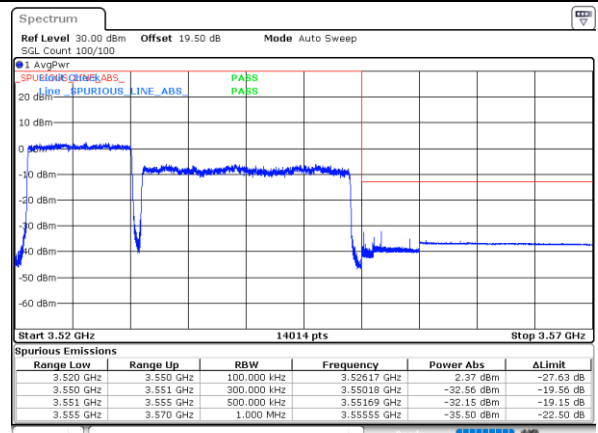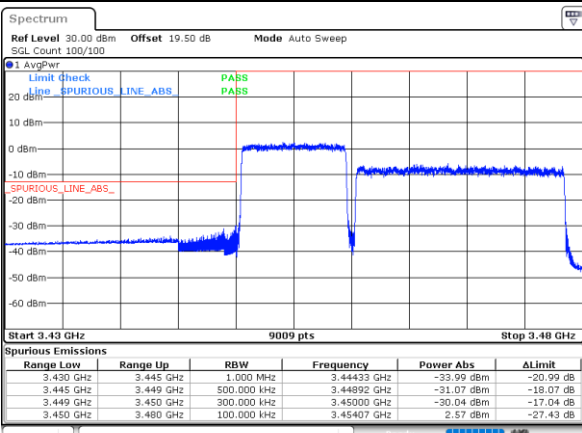

Date: 13, DEC, 2023 09:15:42

Date: 13, DEC, 2023 09:14:53





LTE Band 42C / 15MHz+20MHz

QPSK

Lowest Band Edge / 1RB0 and 1RB74

Highest Band Edge / 1RB0 and 1RB74

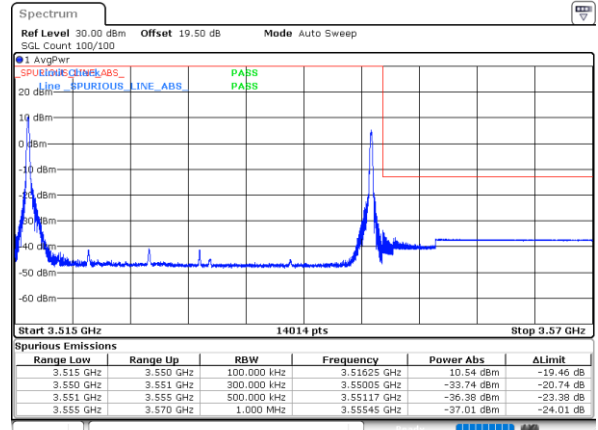
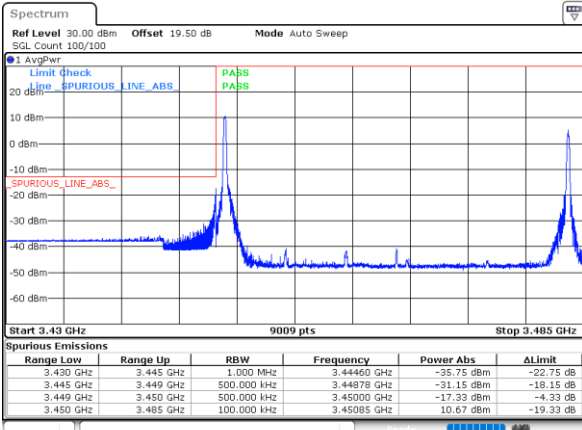


Date: 13, DEC, 2023 10:28:48

Date: 13, DEC, 2023 10:19:32

Lowest Band Edge / 1RB74 and 1RB0

Highest Band Edge / 1RB74 and 1RB0

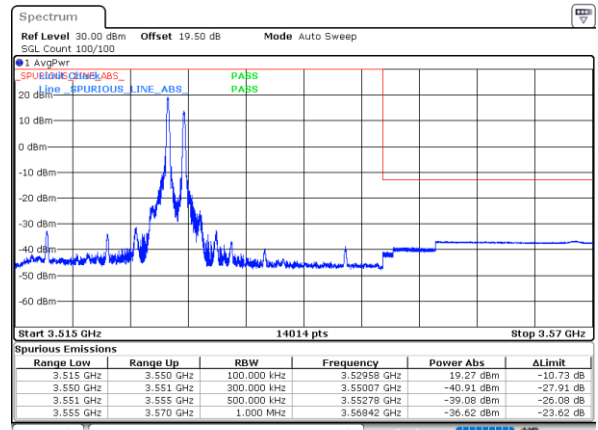
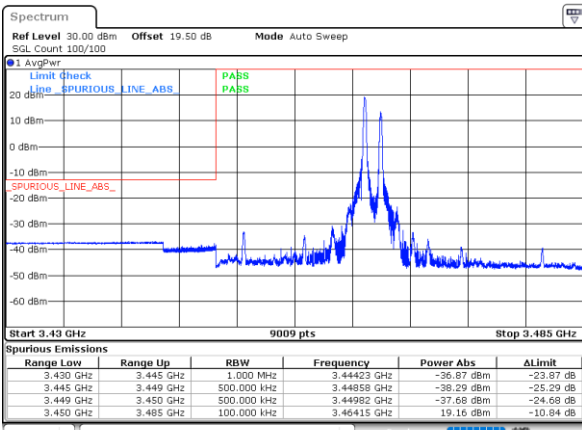


Date: 13, DEC, 2023 10:23:42

Date: 13, DEC, 2023 10:44:39

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

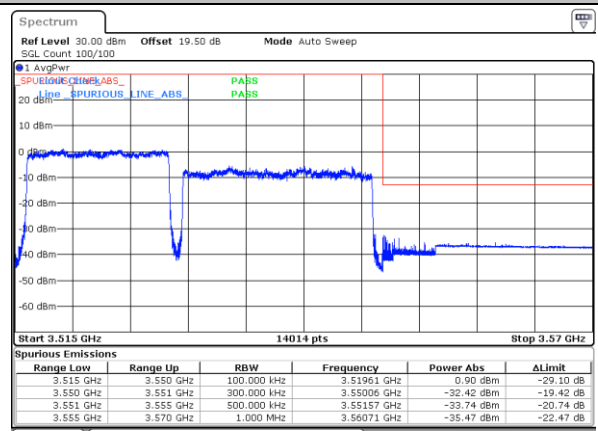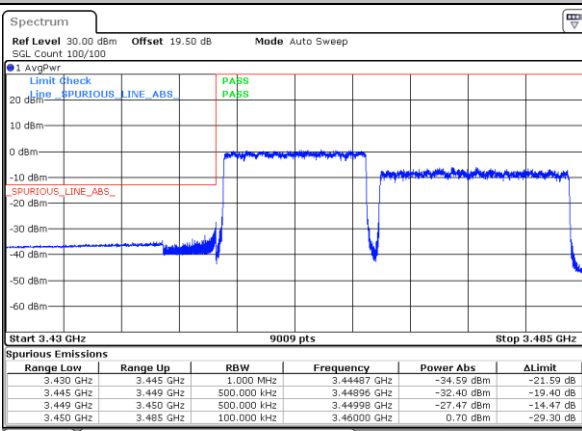

Date: 13, DEC, 2023 10:29:49

Date: 13, DEC, 2023 10:38:31





LTE Band 42C / 20MHz+5MHz

QPSK

Lowest Band Edge / 1RB0 and 1RB9

Highest Band Edge / 1RB0 and 1RB9

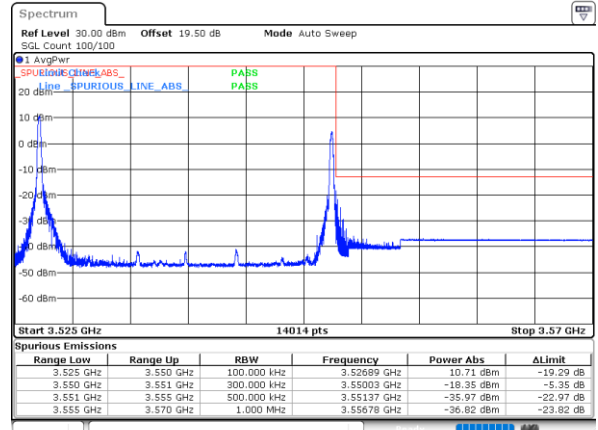
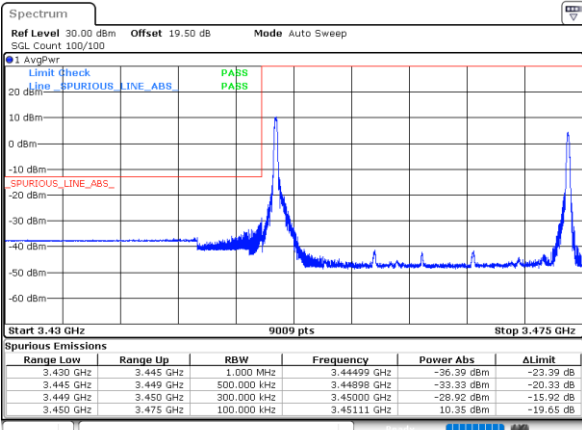


Date: 13, DEC, 2023 01:20:23

Date: 13, DEC, 2023 11:37:34

Lowest Band Edge / 1RB74 and 1RB0

Highest Band Edge / 1RB74 and 1RB0

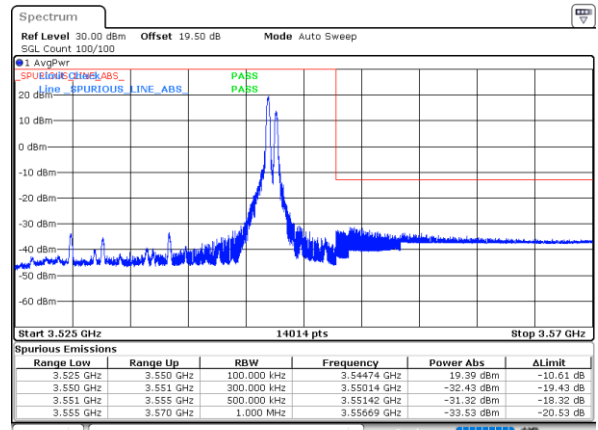
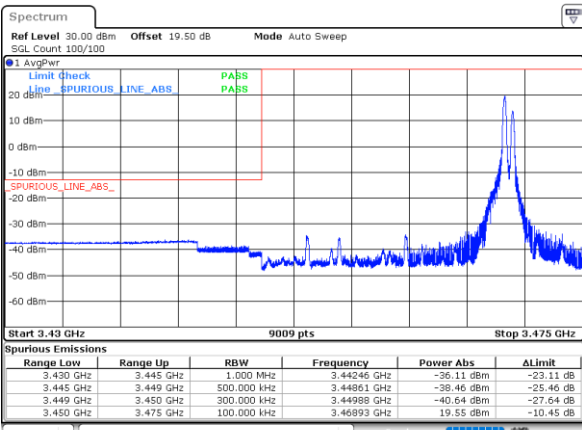


Date: 13, DEC, 2023 01:25:16

Date: 13, DEC, 2023 11:42:44

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

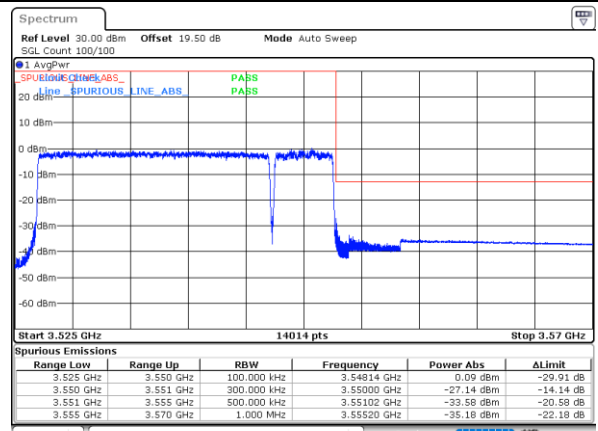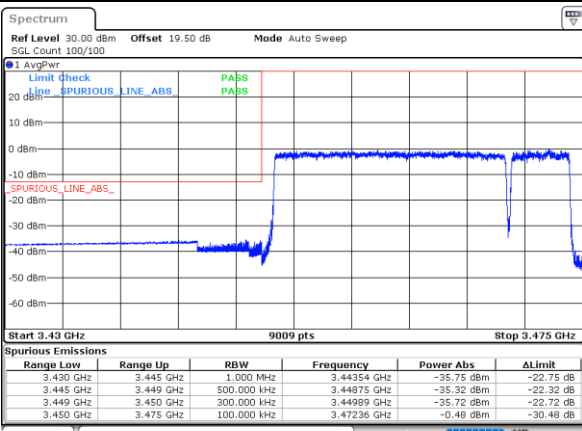

Date: 13, DEC, 2023 01:31:25

Date: 13, DEC, 2023 11:43:46





LTE Band 42C / 20MHz+10MHz

QPSK

Lowest Band Edge / 1RB0 and 1RB49

Highest Band Edge / 1RB0 and 1RB49

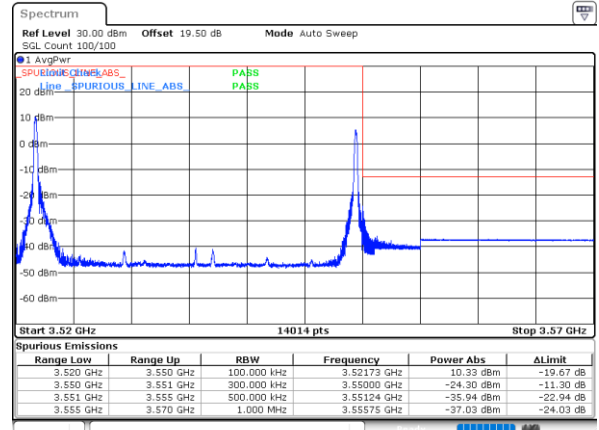
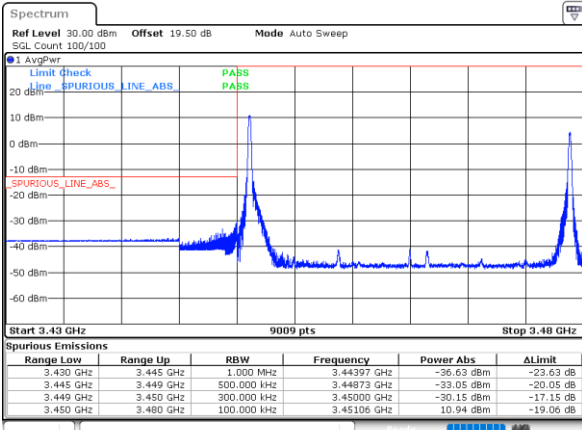


Date: 13, DEC, 2023 10:03:28

Date: 13, DEC, 2023 10:12:57

Lowest Band Edge / 1RB99 and 1RB0

Highest Band Edge / 1RB99 and 1RB0

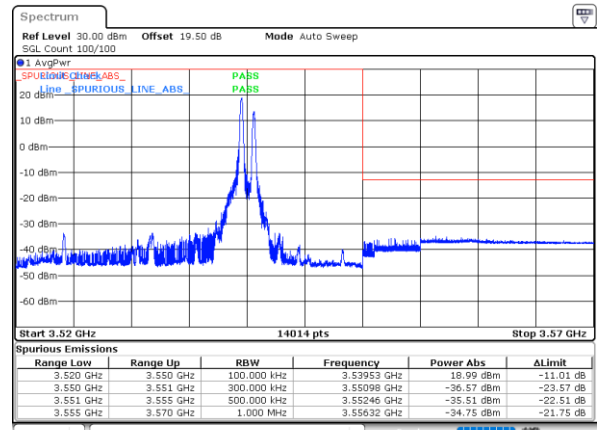
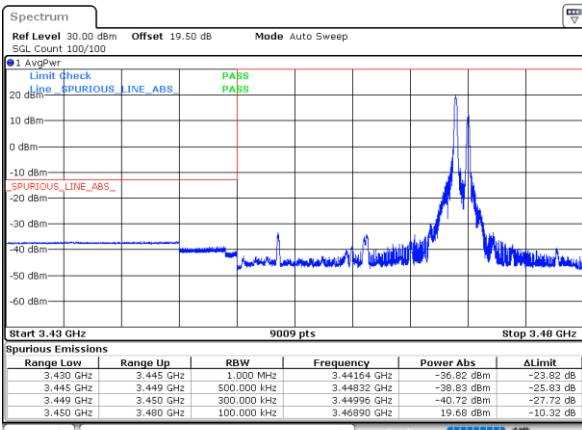


Date: 13, DEC, 2023 09:58:22

Date: 13, DEC, 2023 10:18:05

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

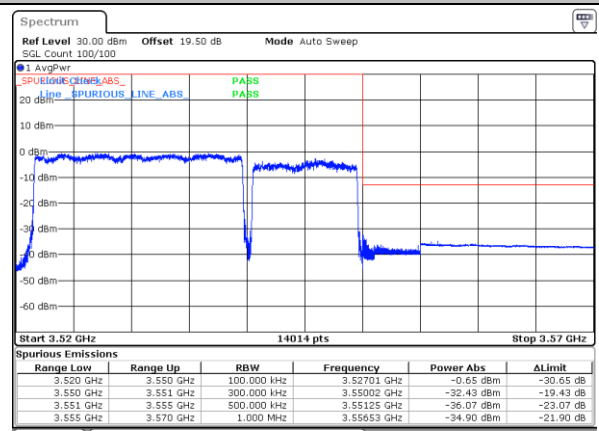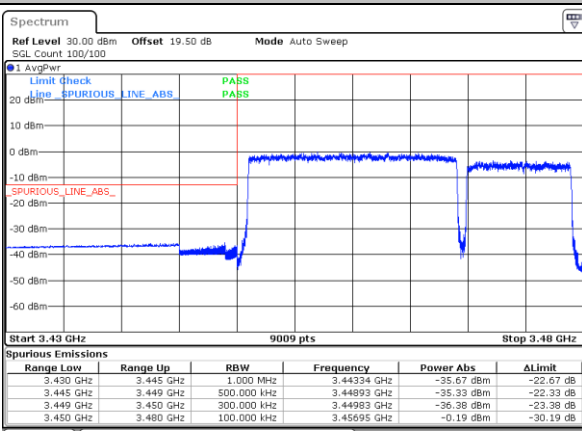

Date: 13, DEC, 2023 10:04:30

Date: 13, DEC, 2023 10:11:55





LTE Band 42C / 20MHz+15MHz

QPSK

Lowest Band Edge / 1RB0 and 1RB74

Highest Band Edge / 1RB0 and 1RB74

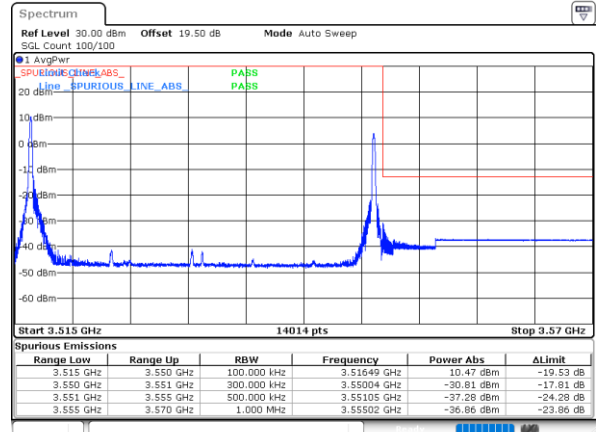
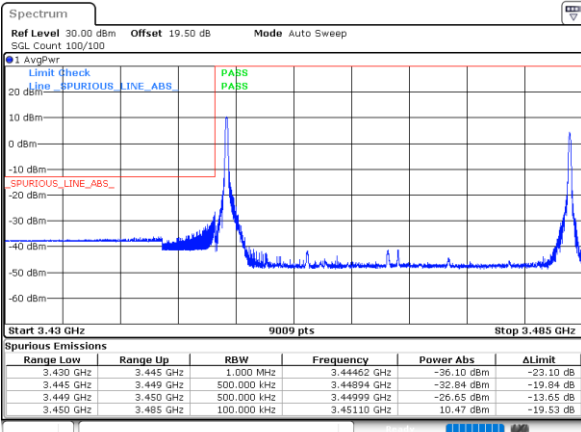


Date: 13, DEC, 2023 10:52:41

Date: 13, DEC, 2023 11:01:15

Lowest Band Edge / 1RB99 and 1RB0

Highest Band Edge / 1RB99 and 1RB0

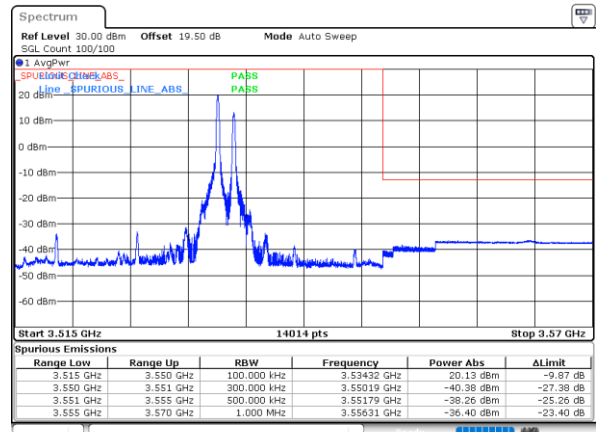
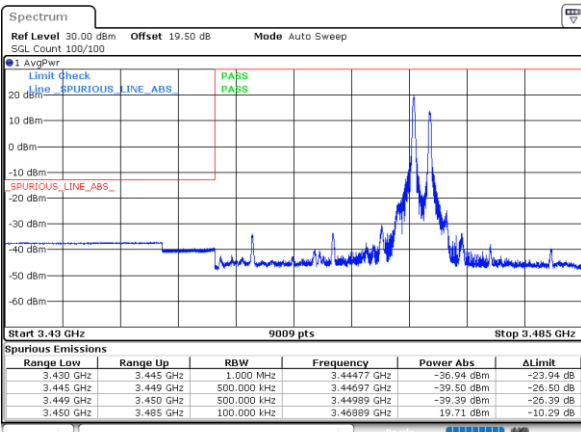


Date: 13, DEC, 2023 10:47:35

Date: 13, DEC, 2023 11:06:22

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

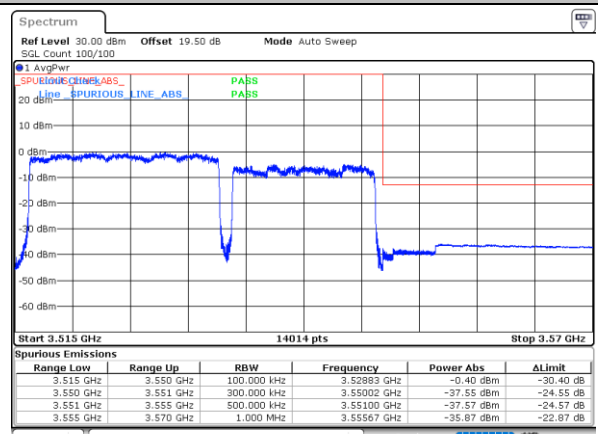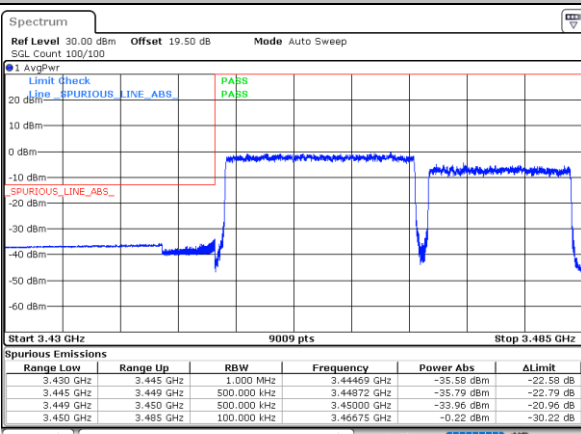

Date: 13, DEC, 2023 10:53:43

Date: 13, DEC, 2023 11:00:14





LTE Band 42C / 20MHz+20MHz

QPSK

Lowest Band Edge / 1RB0 and 1RB9

Highest Band Edge / 1RB0 and 1RB9

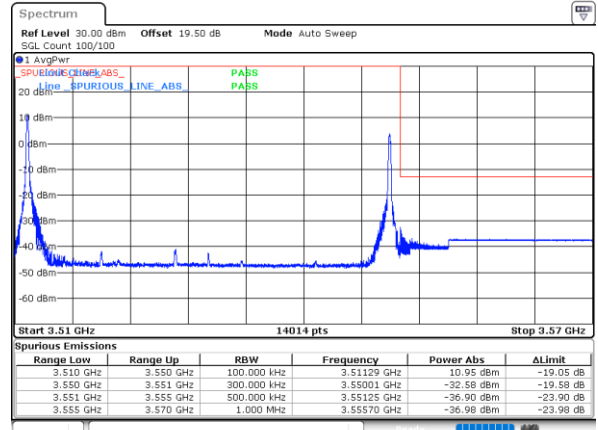
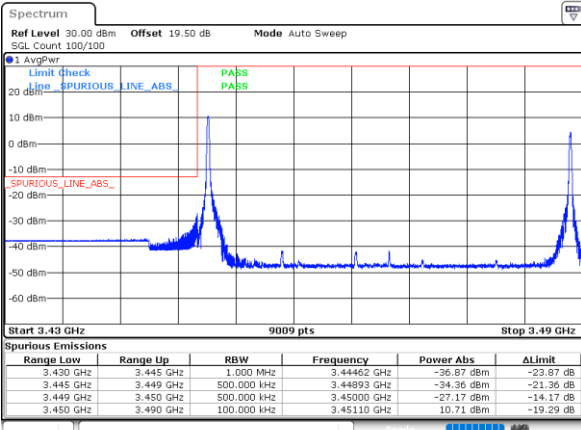


Date: 13, DEC, 2023 11:14:19

Date: 13, DEC, 2023 11:12:00

Lowest Band Edge / 1RB99 and 1RB0

Highest Band Edge / 1RB99 and 1RB0

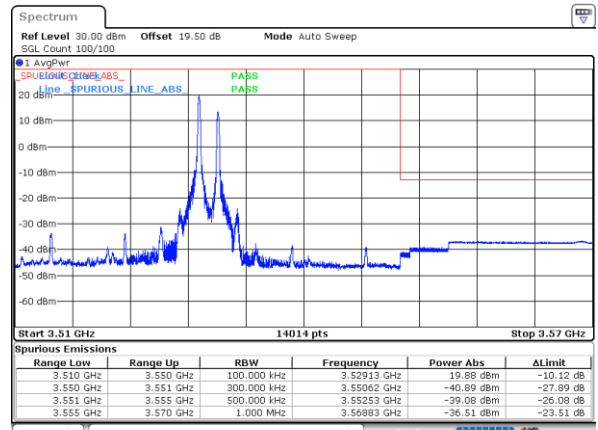
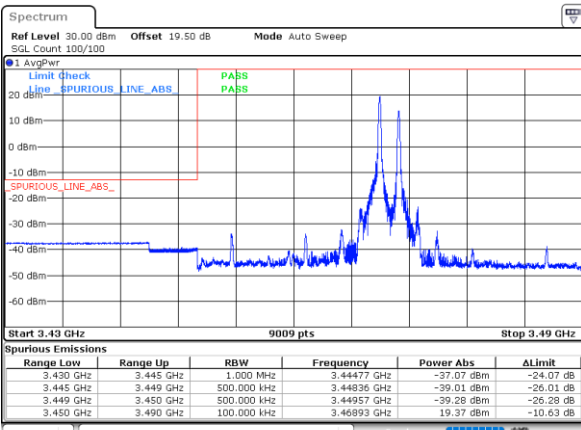


Date: 13, DEC, 2023 11:09:27

Date: 13, DEC, 2023 11:28:53

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

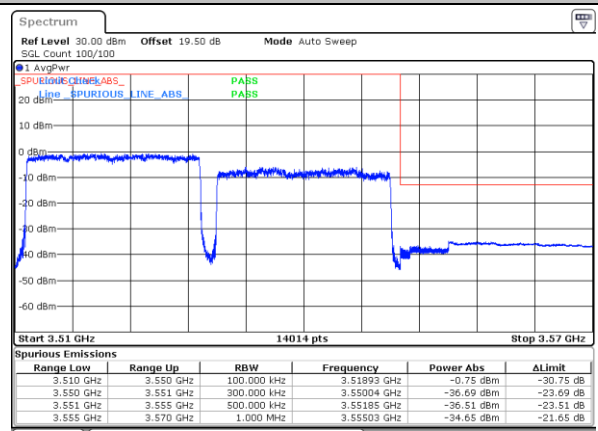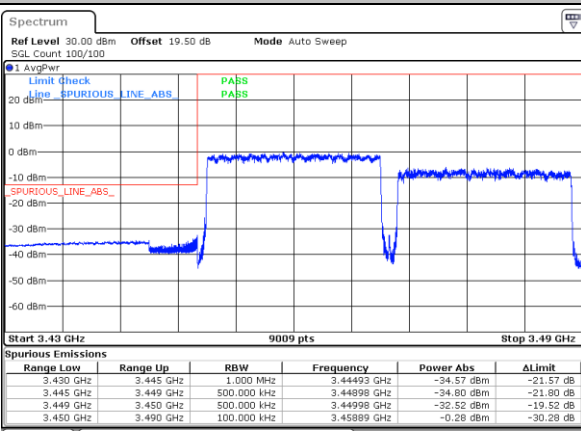

Date: 13, DEC, 2023 11:15:16

Date: 13, DEC, 2023 11:23:01





LTE Band 42C / 5MHz+20MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB9

Highest Band Edge / 1RB0 and 1RB9

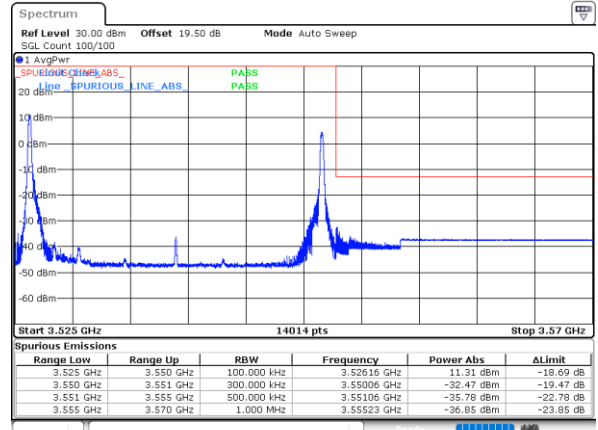
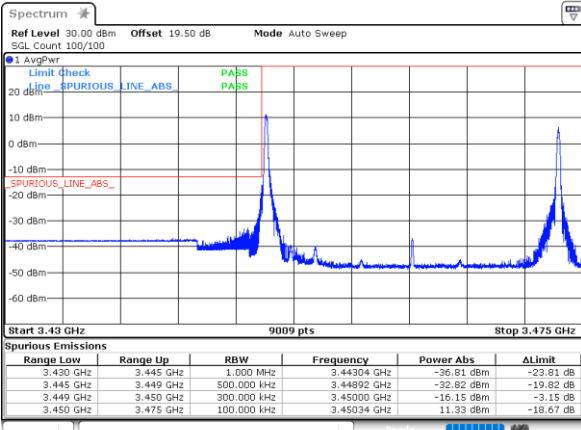


Date: 13, DEC, 2023 13:11:32

Date: 13, DEC, 2023 01:12:43

Lowest Band Edge / 1RB49 and 1RB0

Highest Band Edge / 1RB49 and 1RB0

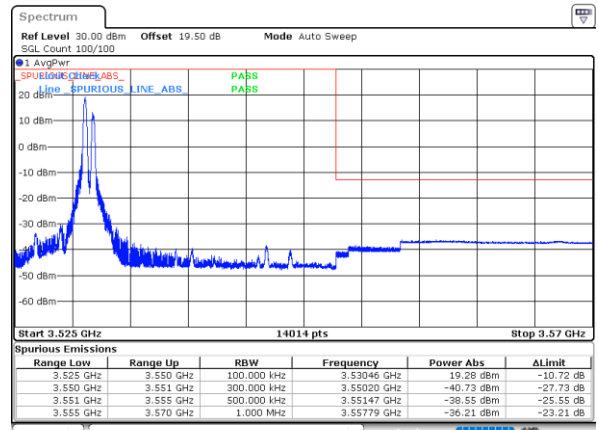
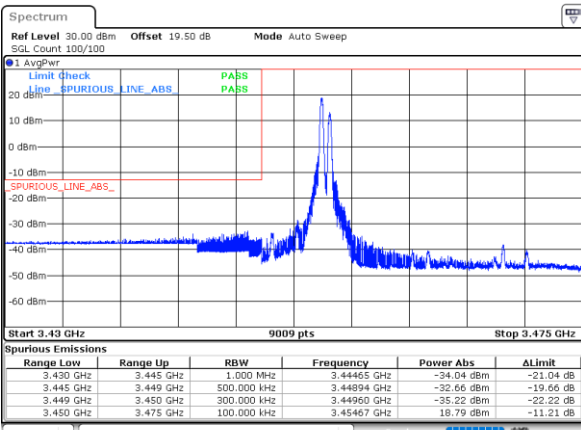


Date: 13, DEC, 2023 13:15:31

Date: 13, DEC, 2023 01:16:16

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

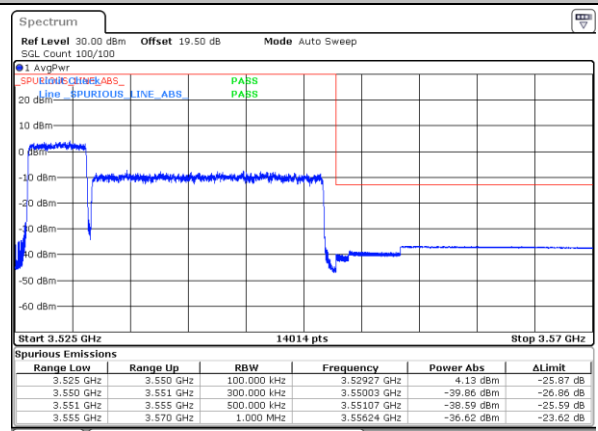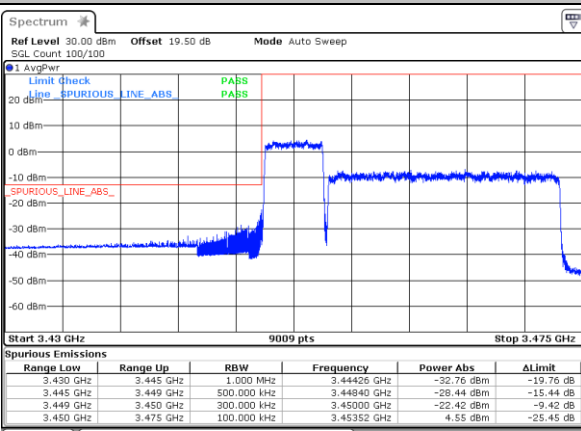

Date: 13, DEC, 2023 13:22:40

Date: 13, DEC, 2023 01:09:08





LTE Band 42C / 10MHz+20MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB49

Highest Band Edge / 1RB0 and 1RB49

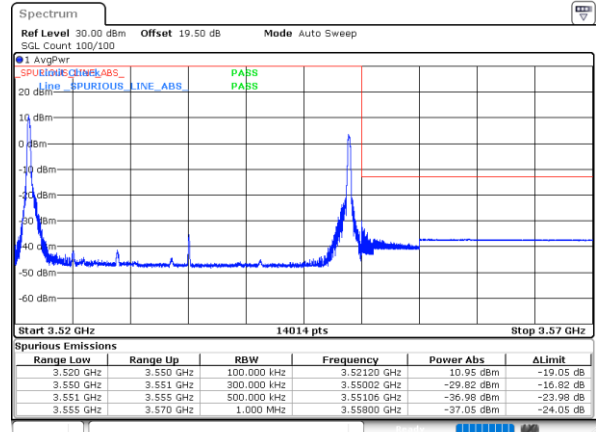
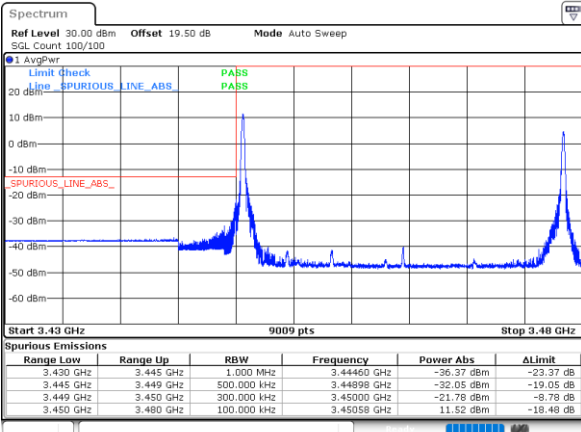


Date: 13. DEC. 2023 08:59:02

Date: 13. DEC. 2023 09:14:56

Lowest Band Edge / 1RB74 and 1RB0

Highest Band Edge / 1RB74 and 1RB0

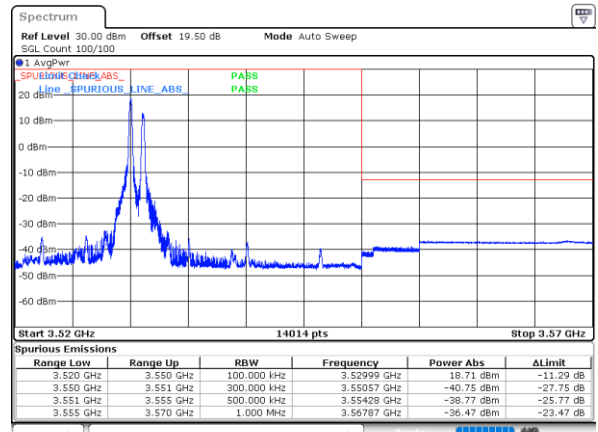
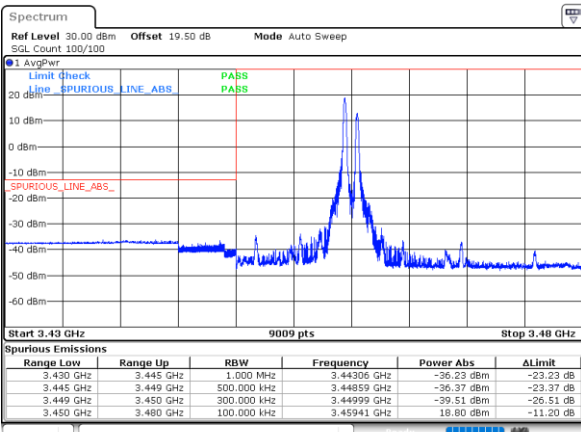


Date: 13. DEC. 2023 08:55:58

Date: 13. DEC. 2023 09:15:01

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

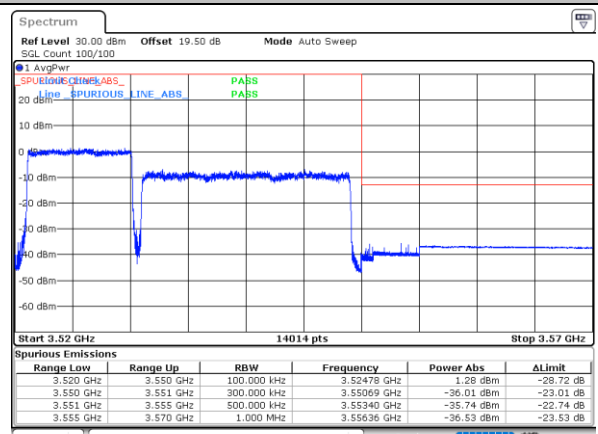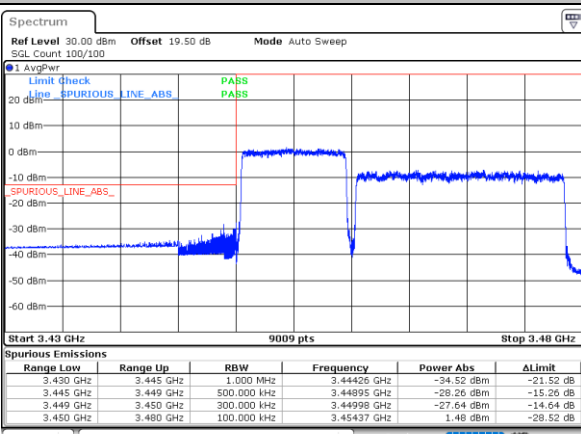

Date: 13. DEC. 2023 09:36:44

Date: 13. DEC. 2023 09:14:52





LTE Band 42C / 15MHz+20MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB74

Highest Band Edge / 1RB0 and 1RB74

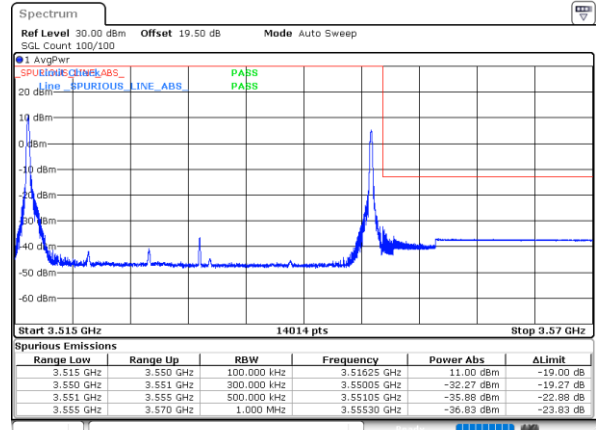
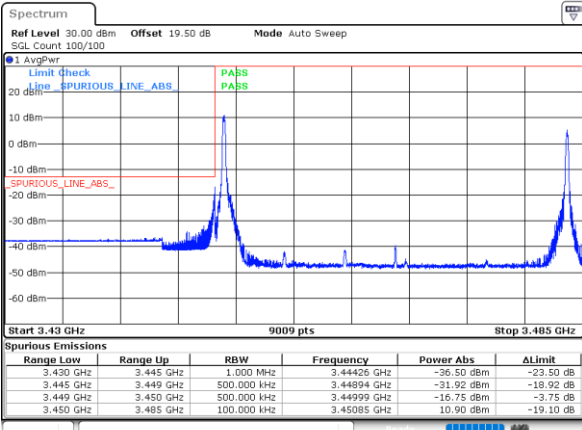


Date: 13, DEC, 2023 10:27:46

Date: 13, DEC, 2023 10:49:34

Lowest Band Edge / 1RB74 and 1RB0

Highest Band Edge / 1RB74 and 1RB0

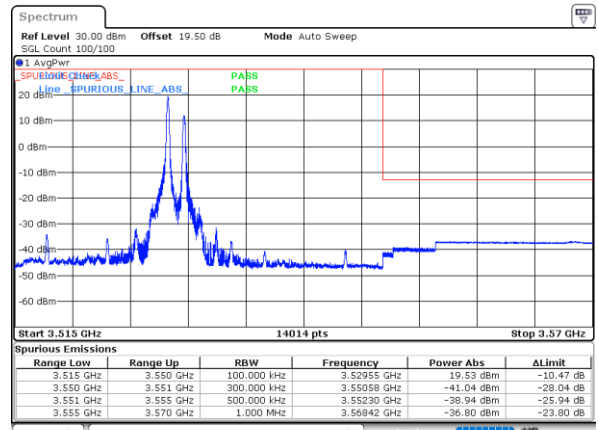
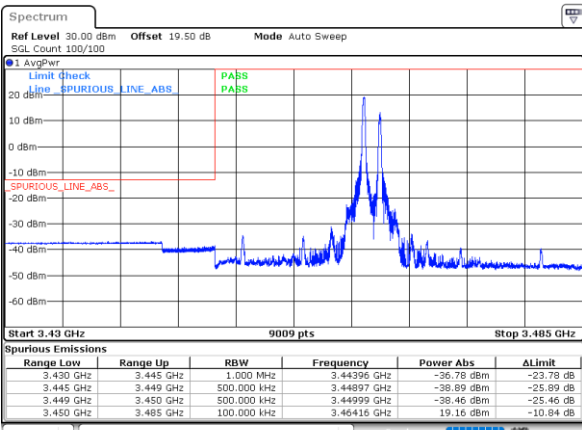


Date: 13, DEC, 2023 10:24:43

Date: 13, DEC, 2023 10:43:38

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

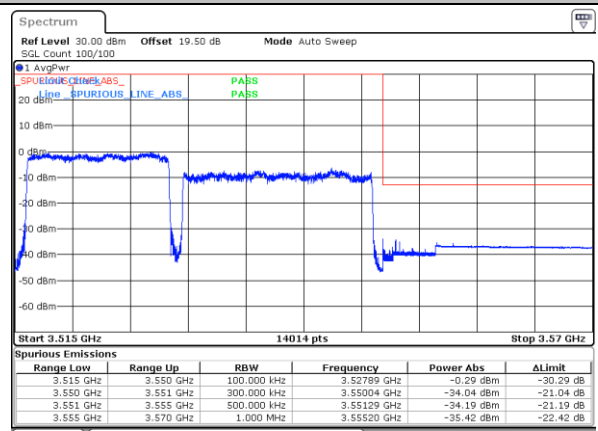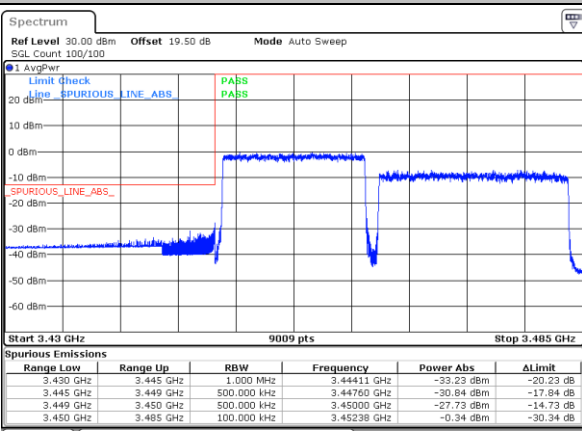

Date: 13, DEC, 2023 10:30:51

Date: 13, DEC, 2023 10:37:29





LTE Band 42C / 20MHz+5MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB9

Highest Band Edge / 1RB0 and 1RB9

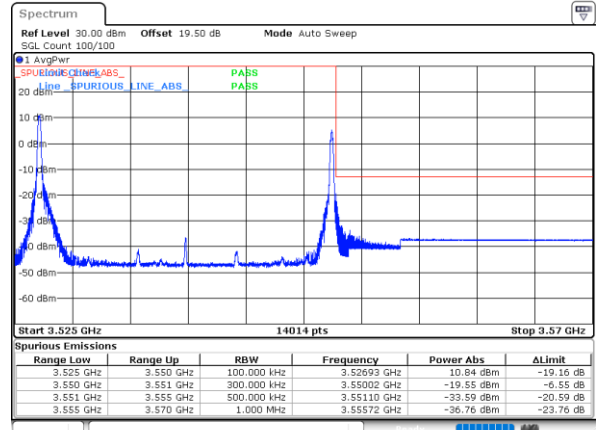
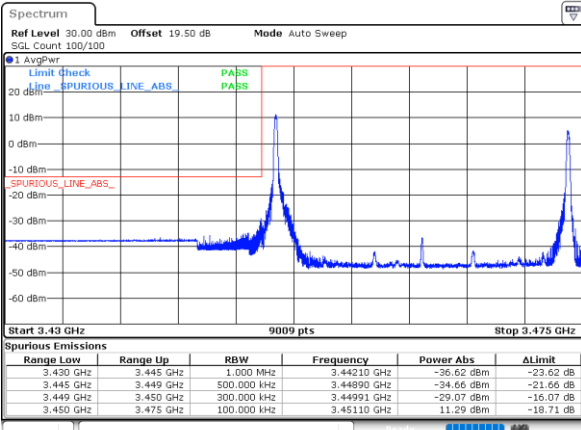


Date: 13, DEC, 2023 01:29:22

Date: 13, DEC, 2023 11:39:36

Lowest Band Edge / 1RB74 and 1RB0

Highest Band Edge / 1RB74 and 1RB0

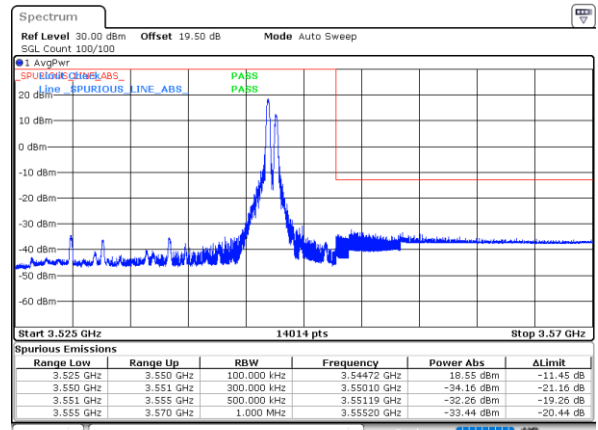
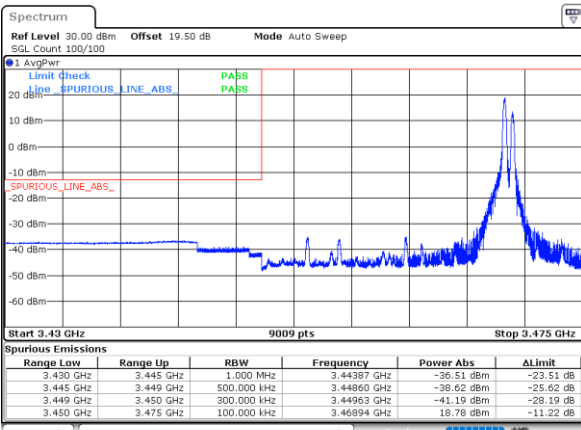


Date: 13, DEC, 2023 01:26:17

Date: 13, DEC, 2023 11:41:42

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

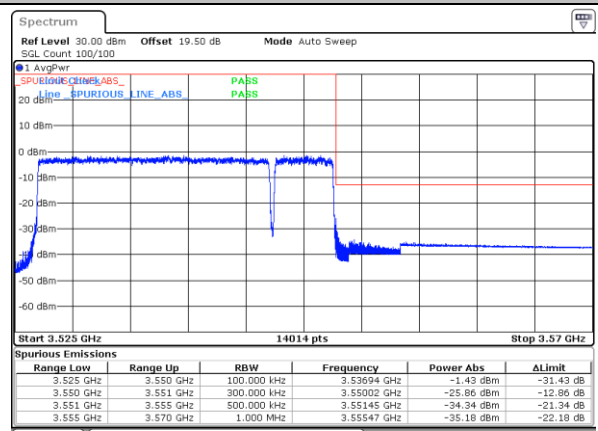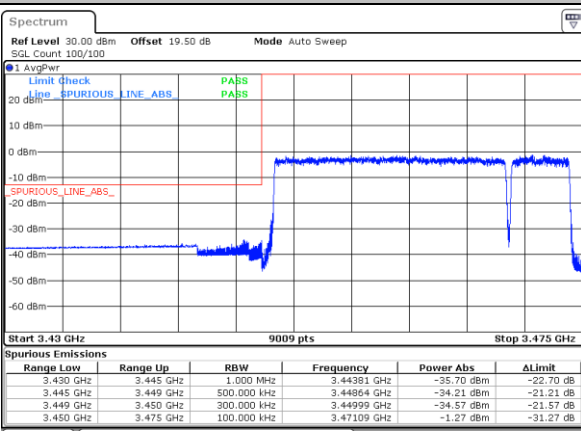

Date: 13, DEC, 2023 01:32:26

Date: 13, DEC, 2023 11:44:47





LTE Band 42C / 20MHz+10MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB49

Highest Band Edge / 1RB0 and 1RB49

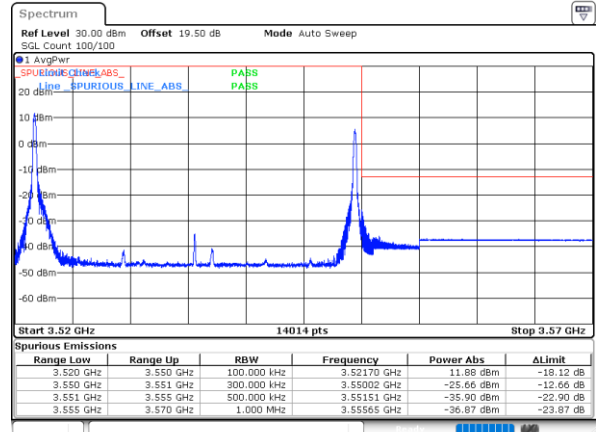
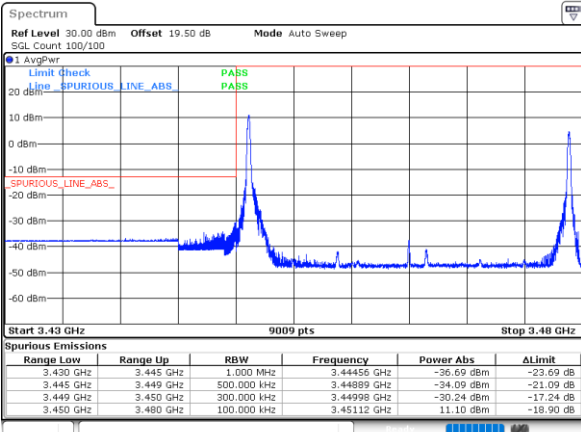


Date: 13, DEC, 2023 10:02:26

Date: 13, DEC, 2023 10:13:58

Lowest Band Edge / 1RB99 and 1RB0

Highest Band Edge / 1RB99 and 1RB0

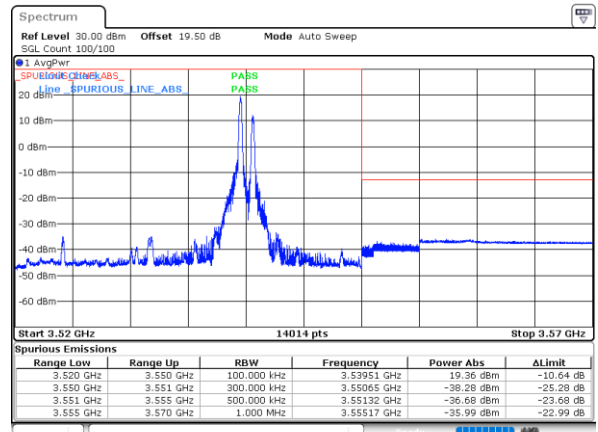
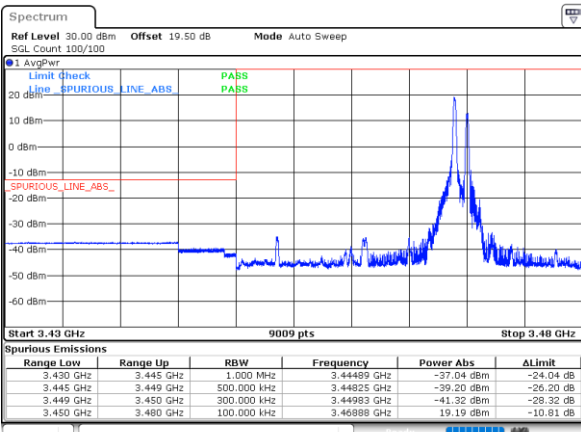


Date: 13, DEC, 2023 09:59:23

Date: 13, DEC, 2023 10:17:04

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

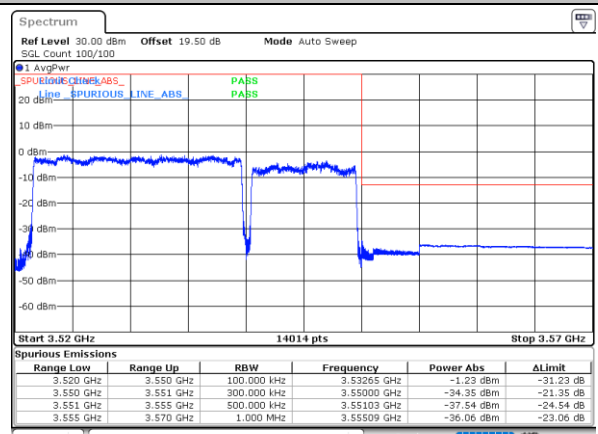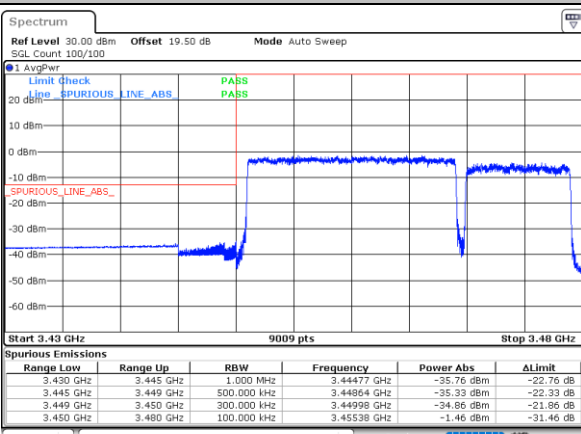

Date: 13, DEC, 2023 10:05:31



Date: 13, DEC, 2023 10:10:54

LTE Band 42C / 20MHz+15MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB74

Highest Band Edge / 1RB0 and 1RB74

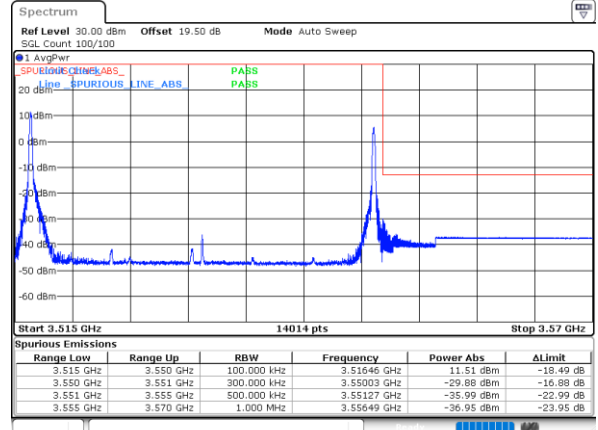
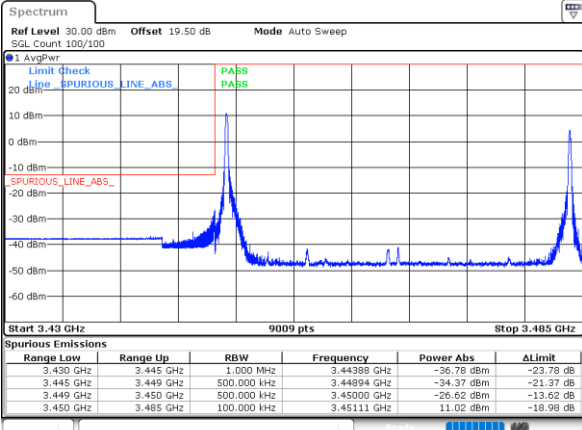


Date: 13, DEC, 2023 10:51:40

Date: 13, DEC, 2023 11:02:16

Lowest Band Edge / 1RB99 and 1RB0

Highest Band Edge / 1RB99 and 1RB0

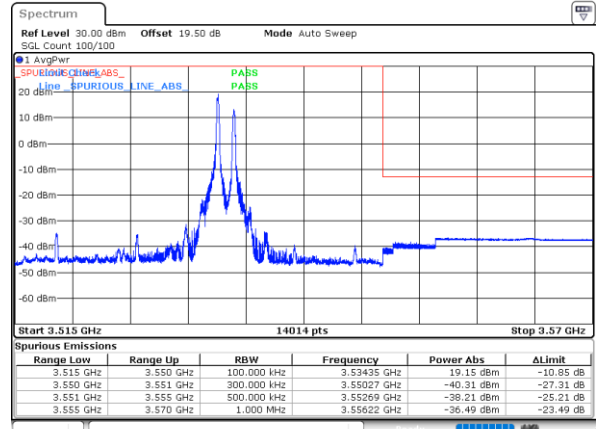
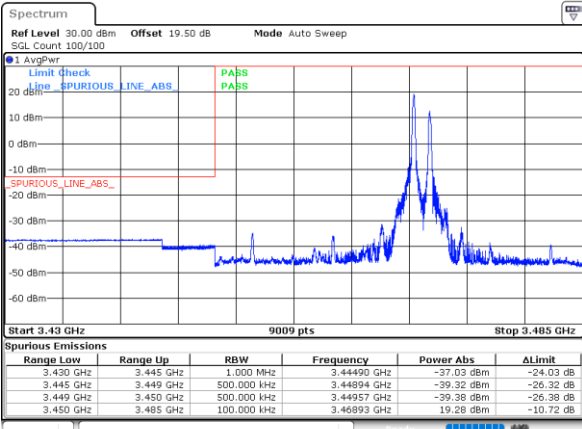


Date: 13, DEC, 2023 10:48:36

Date: 13, DEC, 2023 11:05:20

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

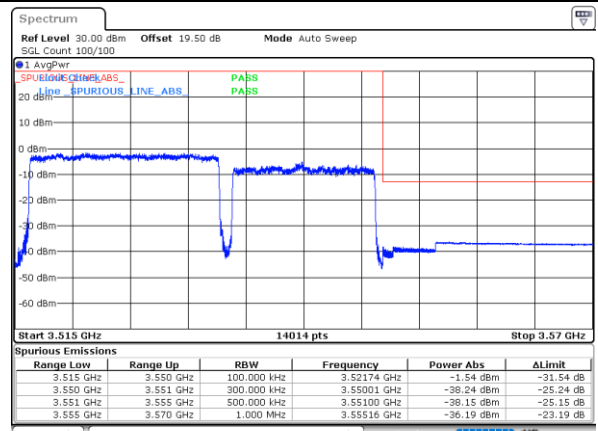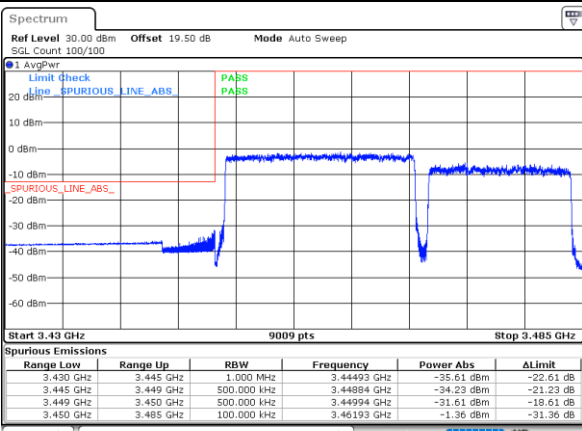

Date: 13, DEC, 2023 10:54:44

Date: 13, DEC, 2023 10:59:12





LTE Band 42C / 20MHz+20MHz

16QAM

Lowest Band Edge / 1RB0 and 1RB9

Highest Band Edge / 1RB0 and 1RB9

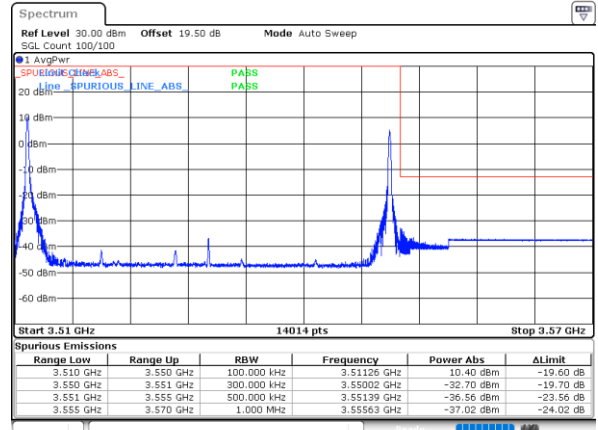
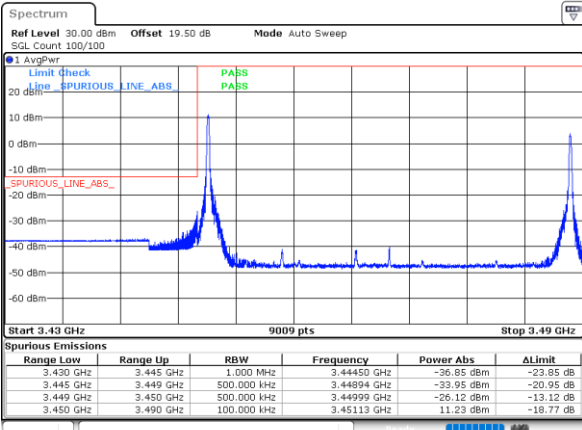


Date: 13, DEC, 2023 11:13:20

Date: 13, DEC, 2023 11:24:58

Lowest Band Edge / 1RB99 and 1RB0

Highest Band Edge / 1RB99 and 1RB0

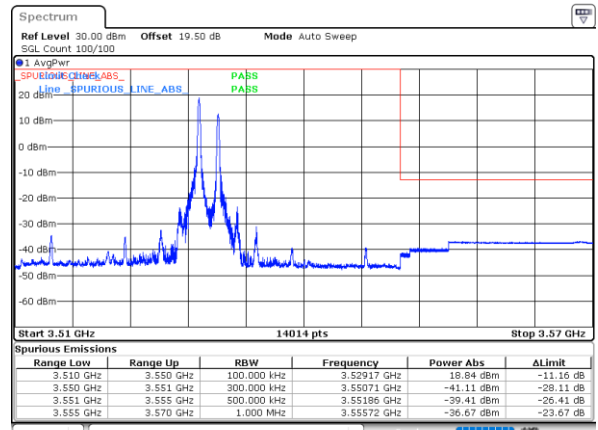
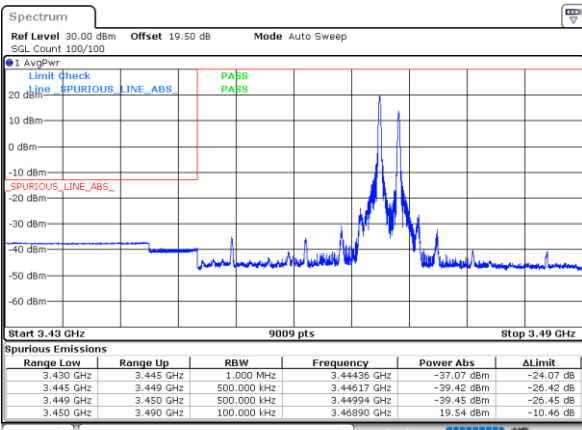


Date: 13, DEC, 2023 11:10:26

Date: 13, DEC, 2023 11:27:54

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

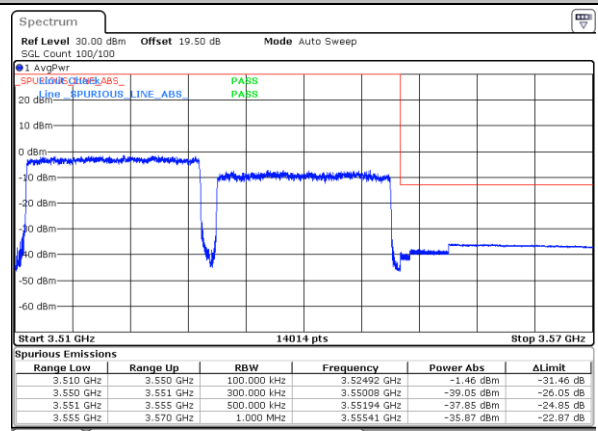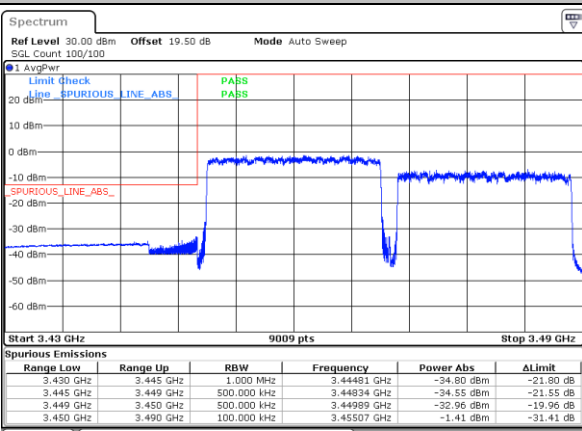

Date: 13, DEC, 2023 11:16:16

Date: 13, DEC, 2023 11:22:02