

# FCC RF Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2413-1, XT2413-3  
FCC ID : IHDT56AN3  
STANDARD : 47 CFR Part 2, 90(R)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Oct. 11, 2023 ~ Oct. 13, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3
SUMMARY OF TEST RESULT .....4
1 GENERAL DESCRIPTION .....5
1.1 Applicant .....5
1.2 Manufacturer .....5
1.3 Feature of Equipment Under Test .....5
1.4 Maximum ERP Power, and Emission Designator .....6
1.5 Testing Site .....6
1.6 Specification of Accessory .....7
1.7 Test Software .....7
1.8 Applied Standards .....7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....8
2.1 Test Mode .....8
2.2 Connection Diagram of Test System .....9
2.3 Support Unit used in test configuration and system .....9
2.4 Measurement Results Explanation Example .....9
2.5 Frequency List of Low/Middle/High Channels .....10
3 CONDUCTED TEST ITEMS .....11
3.1 Measuring Instruments .....11
3.2 Conducted Output Power and ERP .....12
3.3 Peak-to-Average Ratio .....13
3.4 Occupied Bandwidth .....14
3.5 Conducted Band Edge Measurement .....15
3.6 Emission Mask .....16
3.7 Conducted Spurious Emission Measurement .....17
3.8 Frequency Stability Measurement .....18
4 RADIATED TEST ITEMS .....19
4.1 Measuring Instruments .....19
4.2 Test Setup .....19
4.3 Test Result of Radiated Test .....20
4.4 Radiated Spurious Emission Measurement .....21
5 LIST OF MEASURING EQUIPMENT .....22
6 MEASUREMENT UNCERTAINTY .....23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG391515-01A	Rev. 01	Initial issue of report	Nov. 07, 2023

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.2	§2.1046	Conducted Output Power	—	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	ERP < 3Watt	PASS	-
3.3	-	Peak-to-Average Ratio	—	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	—	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)(3)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.6	§2.1051 §90.210(n)	Emission Mask	Mask B	PASS	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	< ±1.25 ppm	PASS	-
4.4	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 22.47 dB at 1577.00 MHz

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2413-1, XT2413-3
FCC ID	IHDT56AN3
Tx Frequency	LTE Band 14: 788 MHz ~ 798 MHz
Rx Frequency	LTE Band 14: 758 MHz ~ 768 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	<Ant.0> 22.84 dBm <Ant.1> 22.76 dBm
Antenna Gain	<Ant.0> -7.2 dBi <Ant.1> -10.1 dBi
Type of Modulation	QPSK / 16QAM / 64QAM
IMEI Code	Conducted: 350803920011023 Radiation: 350803920011585
HW Version	DVT2
SW Version	T3TF33.55
EUT Stage	Identical Prototype

**Remark:**

1. The model name XT2413-1, XT2413-3 are the same product except model name different for market segment.
2. The maximum ERP/EIRP is calculated from max output power and max antenna gain, so only the maximum ERP of Ant.0 is shown in the report.

### 1.4 Maximum ERP Power, and Emission Designator

LTE Band 14		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	790.5~795.5	0.0218	4M49G7D	0.0185	4M49W7D
10	793	0.0223	9M03G7D	0.0190	8M99W7D

### 1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

## 1.6 Specification of Accessory

Accessories Information				
AC Adapter 1	Brand Name	Motorola (AOHO)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3	Brand Name	Motorola(Chenyang)	Model Name	MC-101
Battery 1	Brand Name	Motorola (Sunwoda)	Model Name	QF50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	QF50
USB Cable 1	Brand Name	Saibao	Model Name	S928D97979/S928D97981
USB Cable 2	Brand Name	Naiyi	Model Name	S928D97980/S928D97982

## 1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

## 1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 90(R)
- ♦ ANSI C63.26
- ♦ KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y Plane)

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	V	-	-	-	V	V	V	V	V	V	V	V	V
	14	-	-		V	-	-	V	V	V	V	V			V	
Peak-to-Average Ratio	14	-	-	V	V	-	-	V	V	V			V		V	
26dB and 99% Bandwidth	14	-	-	V	V	-	-	V	V				V		V	
Conducted Band Edge	14	-	-	V		-	-	V	V	V	V		V	V		V
	14	-	-		V	-	-	V	V	V	V		V		V	
Emission Mask	14	-	-	V		-	-	V	V	V	V		V	V	V	V
	14	-	-		V	-	-	V	V	V	V		V		V	
Conducted Spurious Emission	14	-	-	V		-	-	V				V		V	V	V
	14	-	-		V	-	-	V				V			V	
Frequency Stability	14	-	-		V	-	-	V					V		V	
E.R.P	14	-	-	V		-	-	V	V	V	V			V	V	V
	14	-	-		V	-	-	V	V	V	V				V	
Radiated Spurious Emission	14	-	-		V	-	-	V				V			V	

- Note**
- The mark "v" means that this configuration is chosen for testing
  - The mark "-" means that this bandwidth is not supported.
  - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.



## 2.2 Connection Diagram of Test System

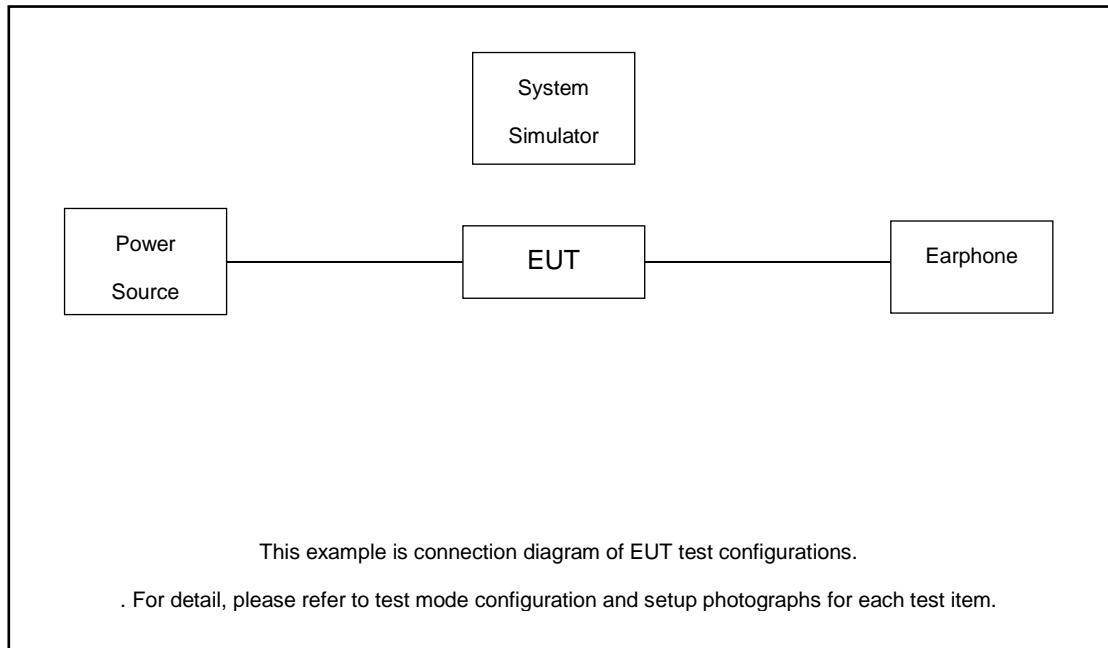

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.0 dB and 10dB attenuator.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

$$= 4.0 + 10 = 14.0 \text{ (dB)}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

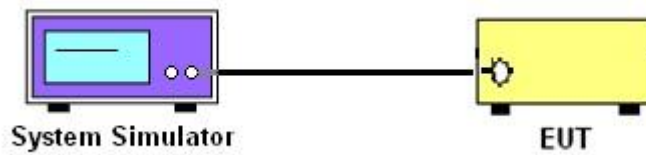

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

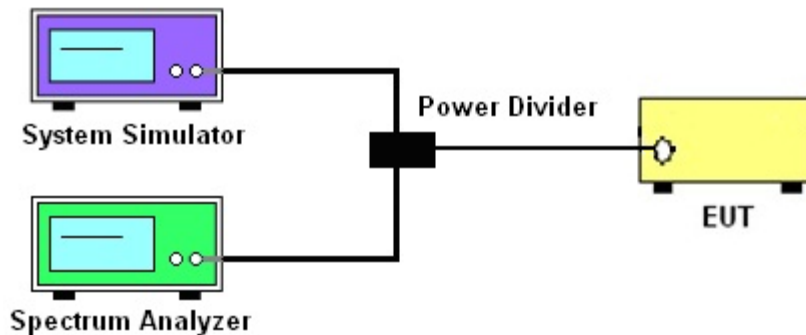

##### 3.1.4 Frequency Stability

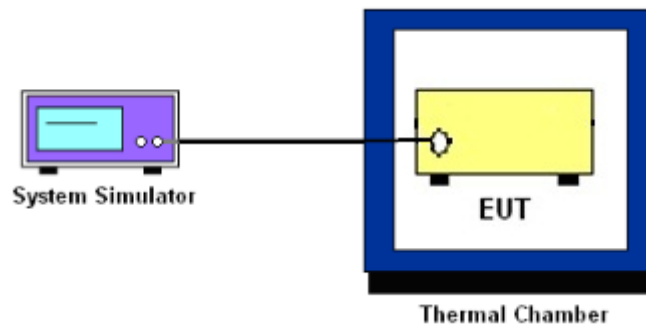

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

## 3.2 Conducted Output Power and ERP

### 3.2.1 Description of the Conducted Output Power Measurement and ERP

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

### **3.3 Peak-to-Average Ratio**

#### **3.3.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### **3.3.2 Test Procedures**

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

## 3.4 Occupied Bandwidth

### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.5 Conducted Band Edge Measurement

### 3.5.1 Description of Conducted Band Edge Measurement

For operations in the 758-768 MHz and the 788-798 MHz bands

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power P(Watts)} \\ & = P(W) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}. \end{aligned}$$

## 3.6 Emission Mask

### 3.6.1 Description of Emission Mask

<Emission Mask B>.

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.



## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and base station via power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's, for under 1GHz RBW = 100kHz, VBW = 300kHz and for above 1GHz RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)  
= -13dBm.

## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 1.25$  ppm of the center frequency.

### 3.8.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

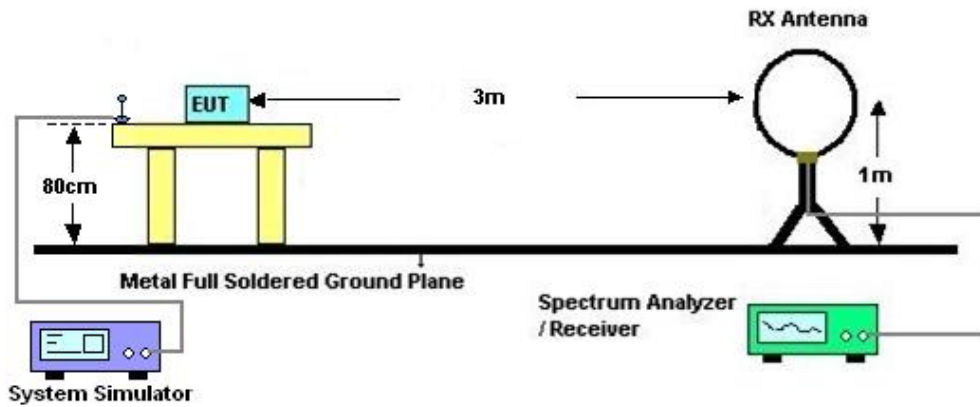

#### 4.2.2 For radiated test from 30MHz to 1GHz

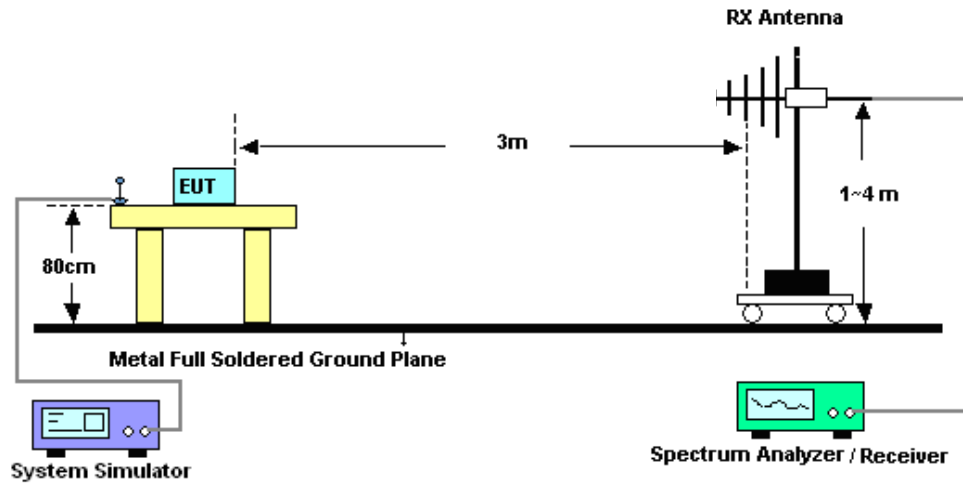

**4.2.3 For radiated test above 1GHz**

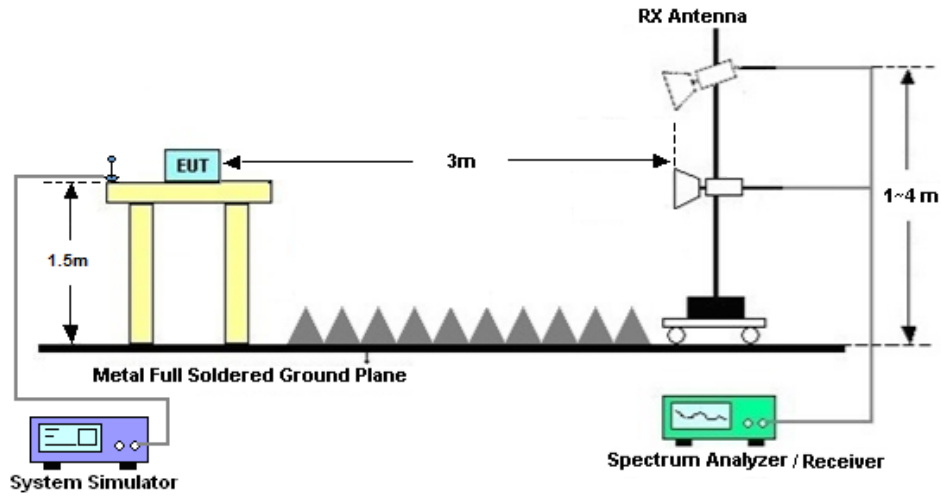

**4.3 Test Result of Radiated Test**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] (dB)$   
=  $[30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
= -13dBm.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Oct. 11, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 17, 2022	Oct. 11, 2023	Oct. 16, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Oct. 11, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Oct. 11, 2023	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Oct. 13, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Oct. 13, 2023	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 19, 2022	Oct. 13, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May. 14, 2023	Oct. 13, 2023	May. 13, 2024	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Oct. 13, 2023	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08,2023	Oct. 13, 2023	Apr. 07,2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Oct. 13, 2023	Apr. 03, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Oct. 13, 2023	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Nov. 10, 2022	Oct. 13, 2023	Nov. 09, 2023	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 13, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 13, 2023	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48dB
---------------------------------------------------------------------	--------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53dB
---------------------------------------------------------------------	--------

### Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02dB
---------------------------------------------------------------------	--------

----- THE END -----



## Appendix A. Test Results of Conducted Test

Test Engineer :	Fly Liang	Temperature :	22~23°C
		Relative Humidity :	40~42%

### Conducted Output Power(Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23330		
Frequency (MHz)				793		
10	QPSK	1	0		22.84	
10	QPSK	1	25		22.66	
10	QPSK	1	49		22.61	
10	QPSK	25	0		21.78	
10	QPSK	25	12		21.59	
10	QPSK	25	25		21.57	
10	QPSK	50	0		21.62	
10	16QAM	1	0		22.13	
10	16QAM	1	25		22.12	
10	16QAM	1	49		21.90	
10	16QAM	25	0		20.65	
10	16QAM	25	12		20.57	
10	16QAM	25	25		20.56	
10	16QAM	50	0		20.62	
10	64QAM	1	0		21.08	
10	64QAM	1	25		20.92	
10	64QAM	1	49		20.80	
10	64QAM	25	0		19.70	
10	64QAM	25	12		19.60	
10	64QAM	25	25		19.63	
10	64QAM	50	0		19.61	
Channel				23305	23330	23355
Frequency (MHz)				790.5	793	795.5
5	QPSK	1	0	22.68	22.67	22.74
5	QPSK	1	12	22.49	22.57	22.58
5	QPSK	1	24	22.43	22.46	22.43
5	QPSK	12	0	21.63	21.65	21.60
5	QPSK	12	7	21.43	21.51	21.46
5	QPSK	12	13	21.49	21.47	21.44
5	QPSK	25	0	21.47	21.46	21.45
5	16QAM	1	0	22.00	22.01	22.03
5	16QAM	1	12	22.03	22.01	21.97
5	16QAM	1	24	21.76	21.73	21.75
5	16QAM	12	0	20.54	20.53	20.47
5	16QAM	12	7	20.43	20.49	20.41
5	16QAM	12	13	20.42	20.40	20.43
5	16QAM	25	0	20.48	20.49	20.45
5	64QAM	1	0	20.93	20.91	20.97
5	64QAM	1	12	20.79	20.81	20.79
5	64QAM	1	24	20.63	20.72	20.62






5	64QAM	12	0	19.54	19.58	19.53
5	64QAM	12	7	19.50	19.49	19.50
5	64QAM	12	13	19.55	19.46	19.50
5	64QAM	25	0	19.45	19.53	19.43




## LTE Band 14

### Peak-to-Average Ratio

Mode	LTE Band 14 / 5MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.78	5.71	6.20	PASS
Mode	LTE Band 14 / 10MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.78	5.74	6.14	PASS

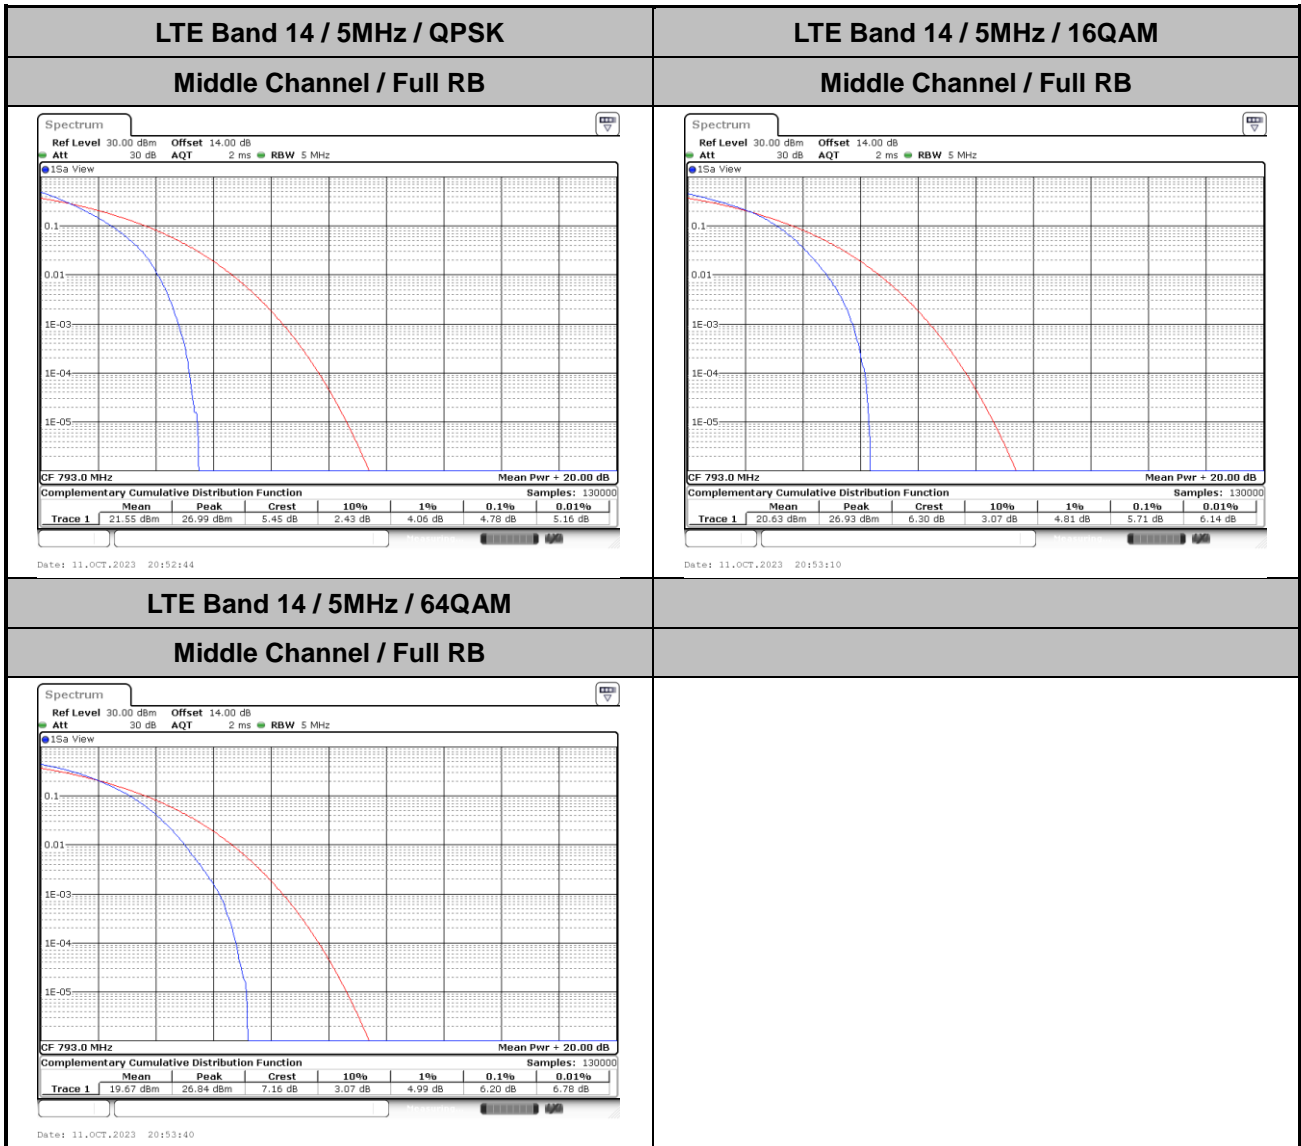

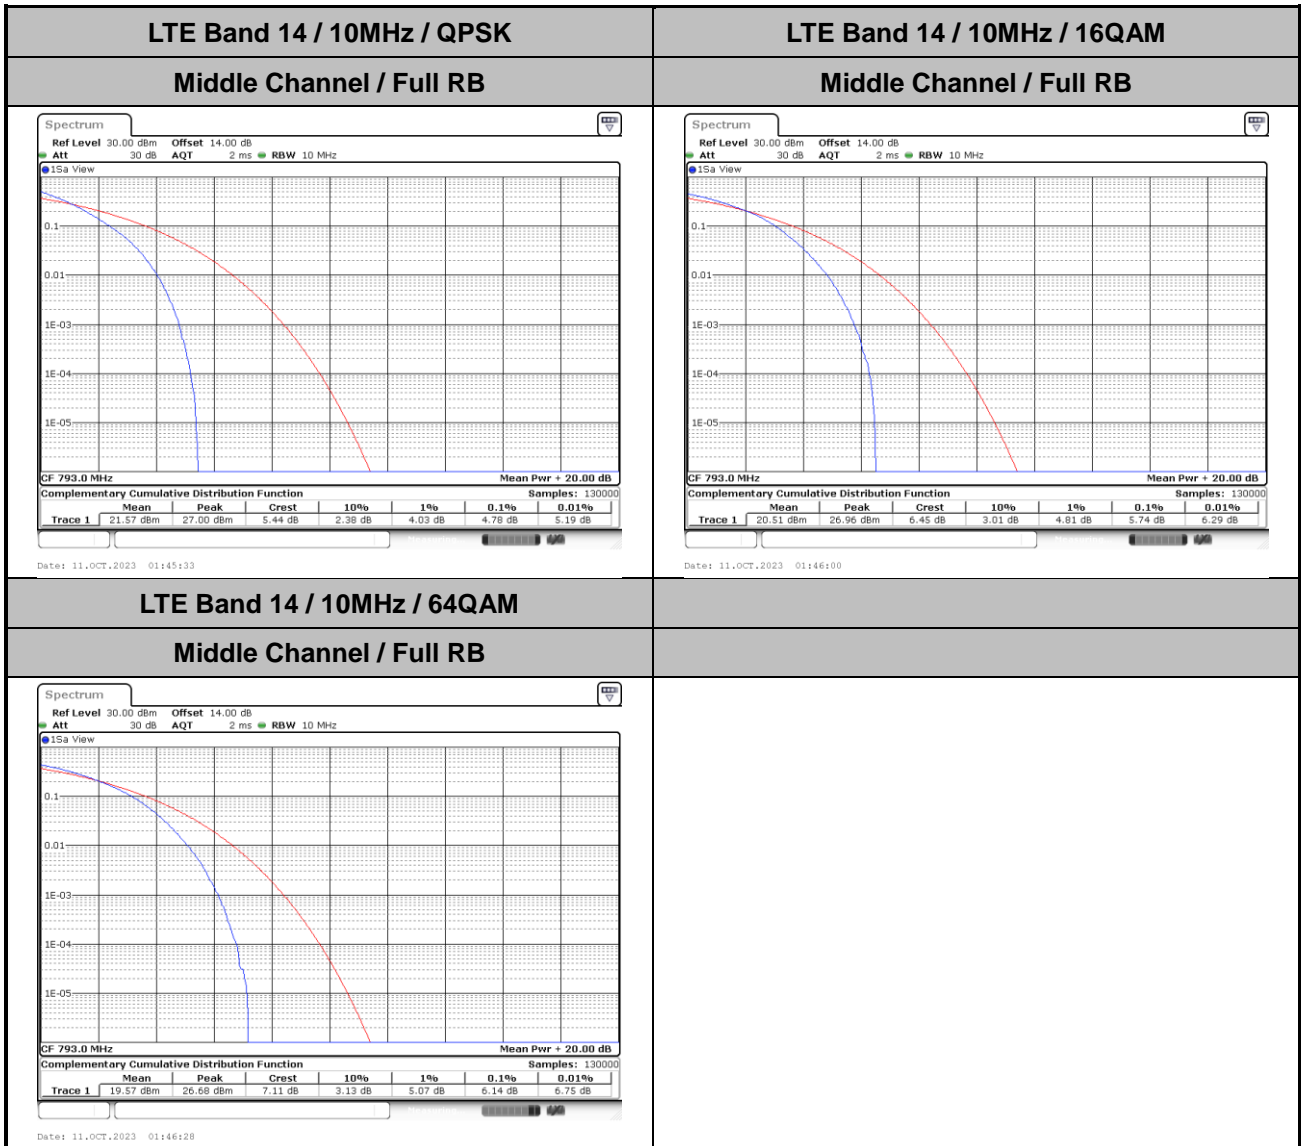




### 26dB Bandwidth

Mode	LTE Band 14 : 26dB BW(MHz)										
	5MHz		10MHz								
Mod.	QPSK	16QAM	QPSK	16QAM							
Middle CH	4.81	4.85	9.97	10.05							




LTE Band 14

Middle Channel / 5MHz / QPSK

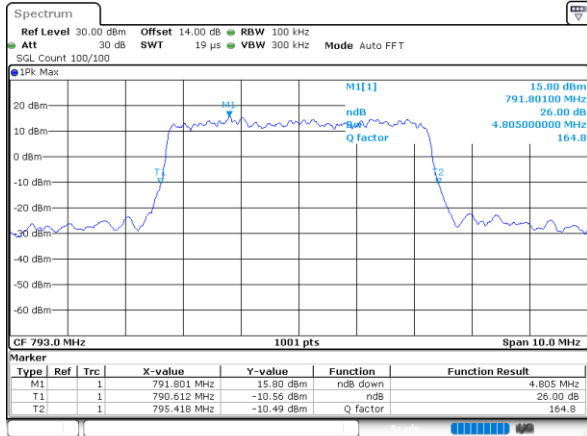


Date: 11.OCT.2023 01:12:51

Middle Channel / 5MHz / 16QAM

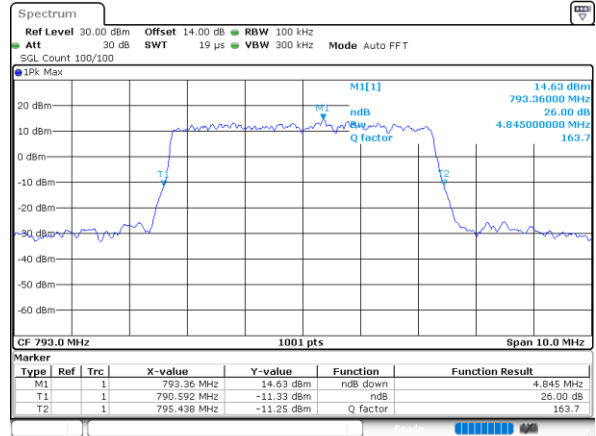


Date: 11.OCT.2023 01:13:31

Middle Channel / 10MHz / QPSK

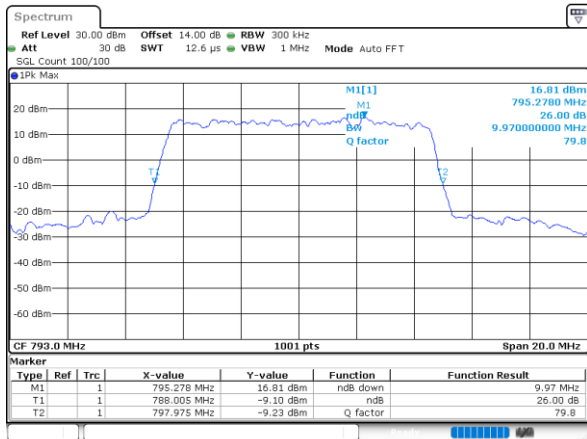

Date: 11.OCT.2023 01:44:25

Middle Channel / 10MHz / 16QAM

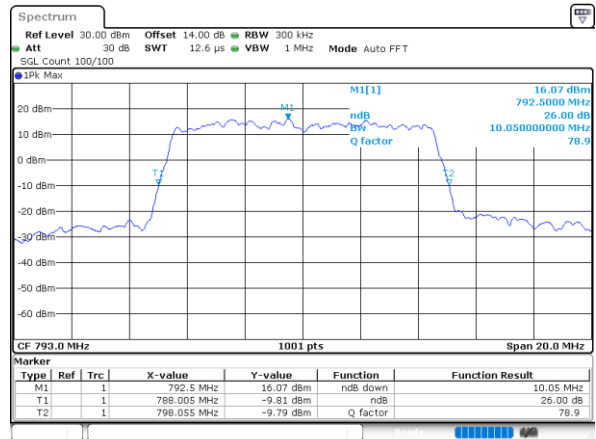

Date: 11.OCT.2023 01:45:06




### Occupied Bandwidth

Mode	LTE Band 14 : 99%OBW(MHz)									
BW	5MHz		10MHz							
Mod.	QPSK	16QAM	QPSK	16QAM						
Middle CH	4.49	4.49	9.03	8.99						




LTE Band 14

Middle Channel / 5MHz / QPSK

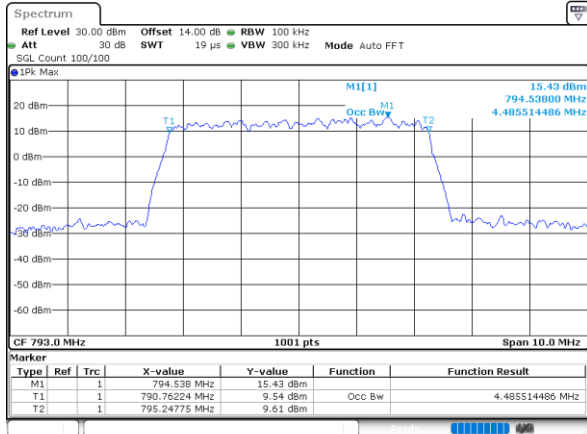


Date: 11.OCT.2023 01:12:37

Middle Channel / 5MHz / 16QAM

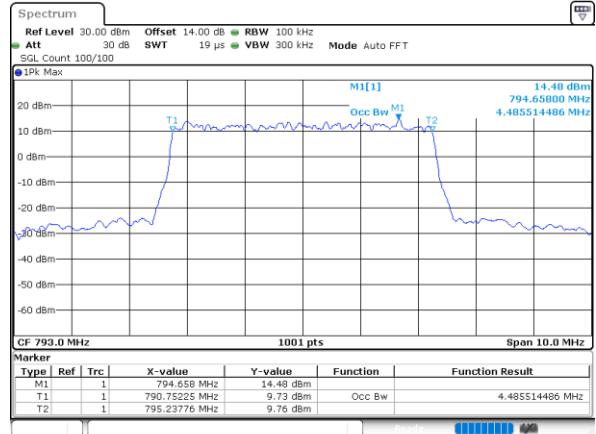


Date: 11.OCT.2023 01:13:17

Middle Channel / 10MHz / QPSK

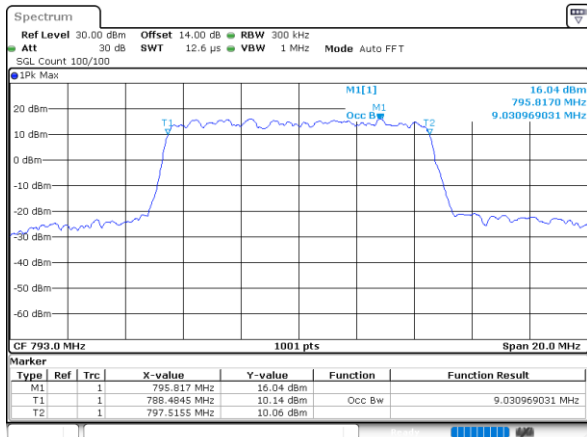

Date: 11.OCT.2023 01:44:11

Middle Channel / 10MHz / 16QAM

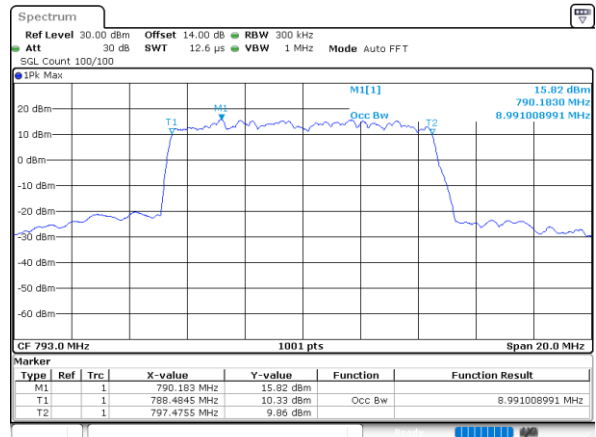

Date: 11.OCT.2023 01:44:52






# Conducted Band Edge


## LTE Band 14 / 5MHz / QPSK

### Lowest Band Edge / 1 RB

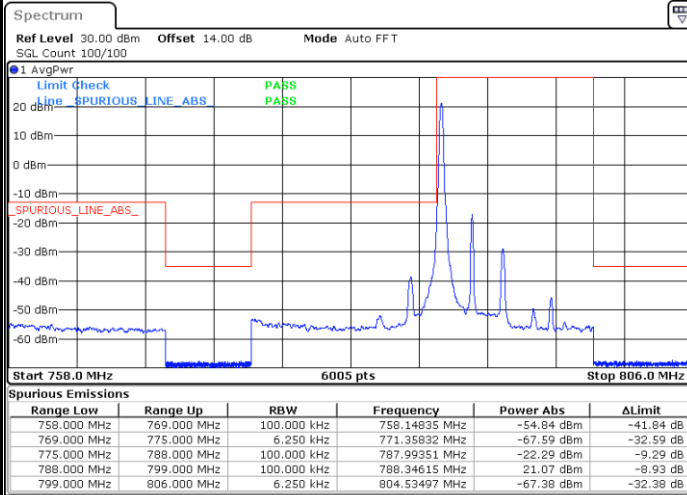


Date: 11.OCT.2023 00:49:10

### Highest Band Edge / 1 RB

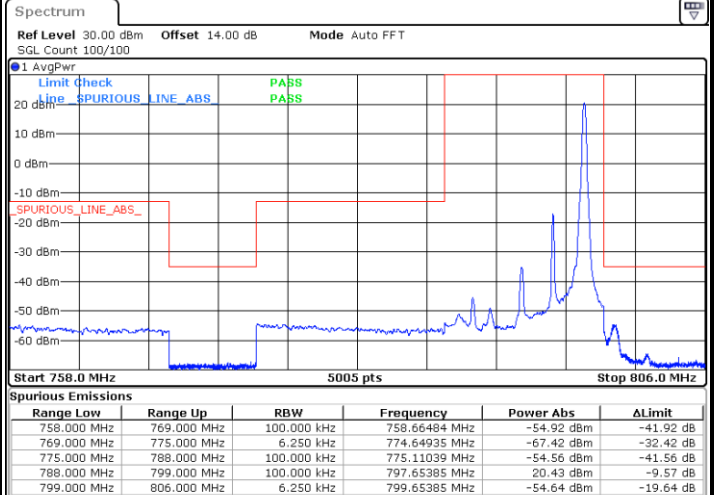


Date: 11.OCT.2023 01:14:16

### Lowest Band Edge / Full RB

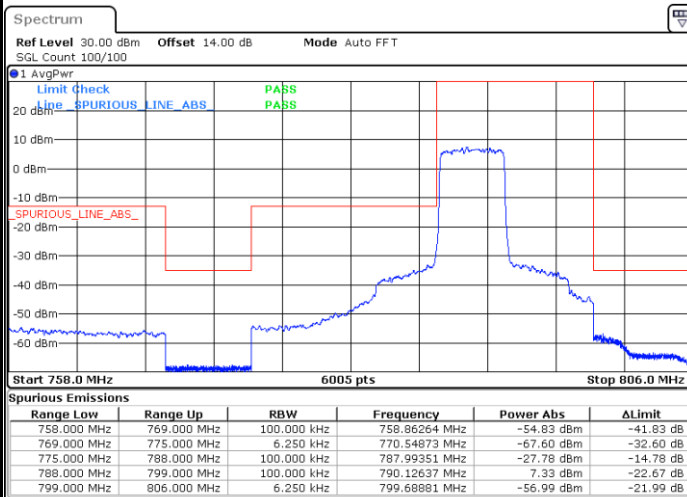

Date: 11.OCT.2023 00:51:30

### Highest Band Edge / Full RB

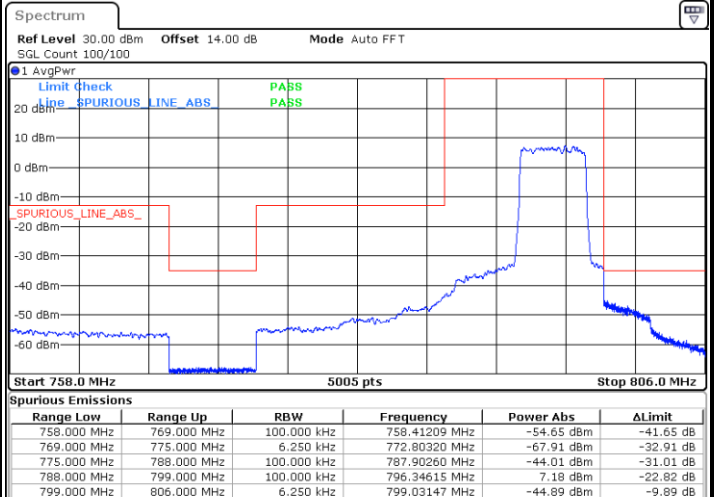


Date: 11.OCT.2023 01:16:37



LTE Band 14 / 5MHz / 16QAM


Lowest Band Edge / 1 RB

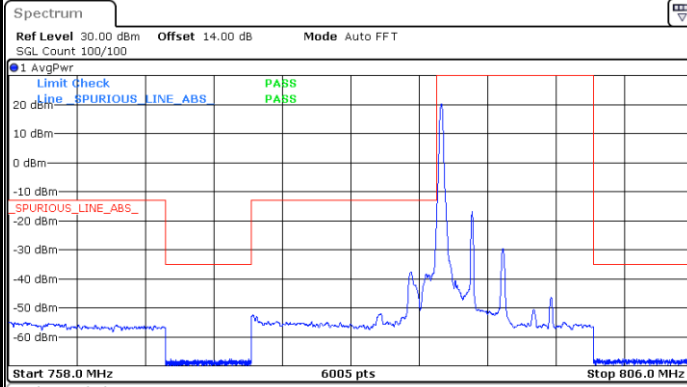

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	759.20330 MHz	-55.01 dBm	-42.01 dB
769.000 MHz	775.000 MHz	6.250 kHz	774.82159 MHz	-67.57 dBm	-32.57 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-21.49 dBm	-8.49 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.34615 MHz	20.24 dBm	-9.76 dB
799.000 MHz	806.000 MHz	6.250 kHz	802.04545 MHz	-67.48 dBm	-32.48 dB

Date: 11.OCT.2023 00:49:56


Highest Band Edge / 1 RB

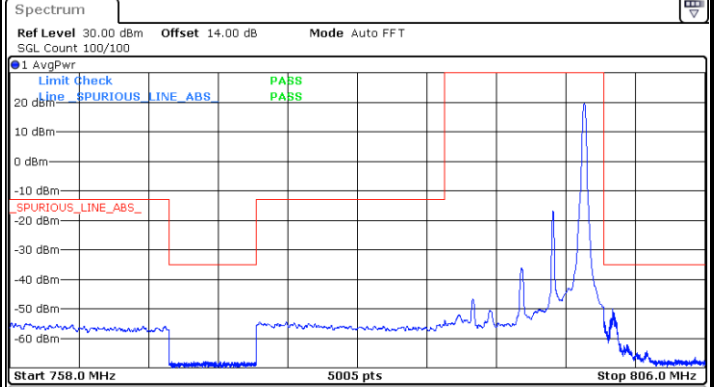

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.12637 MHz	-54.86 dBm	-41.86 dB
769.000 MHz	775.000 MHz	6.250 kHz	771.65235 MHz	-67.81 dBm	-32.81 dB
775.000 MHz	788.000 MHz	100.000 kHz	775.25325 MHz	-54.47 dBm	-41.47 dB
788.000 MHz	799.000 MHz	100.000 kHz	797.67582 MHz	-19.52 dBm	-10.48 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.64685 MHz	-49.99 dBm	-14.99 dB

Date: 11.OCT.2023 01:15:03


Lowest Band Edge / Full RB

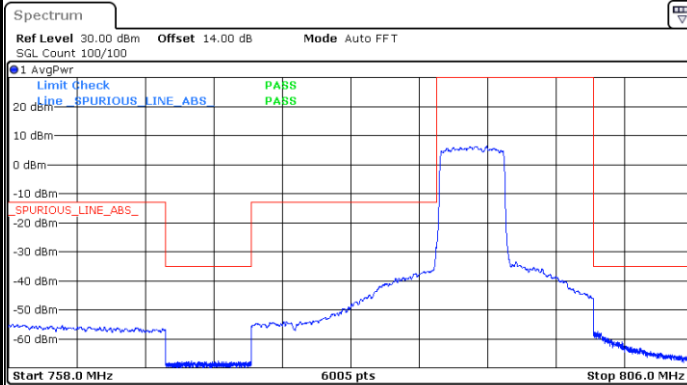

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.28022 MHz	-55.05 dBm	-42.05 dB
769.000 MHz	775.000 MHz	6.250 kHz	770.80660 MHz	-67.63 dBm	-32.63 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-27.77 dBm	-14.77 dB
788.000 MHz	799.000 MHz	100.000 kHz	791.51099 MHz	6.28 dBm	-23.72 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.28322 MHz	-57.49 dBm	-22.49 dB

Date: 11.OCT.2023 00:52:16

Highest Band Edge / Full RB

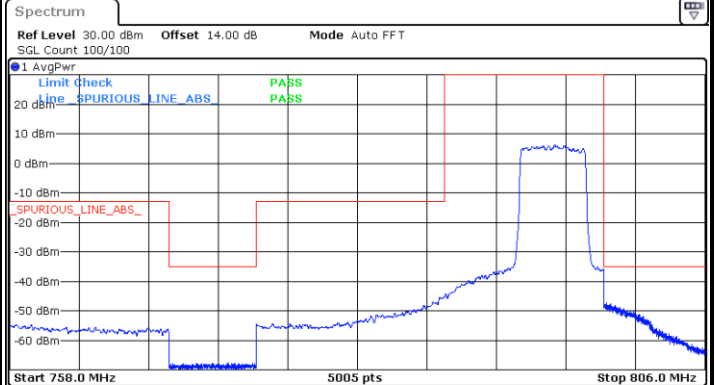


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.47802 MHz	-54.79 dBm	-41.79 dB
769.000 MHz	775.000 MHz	6.250 kHz	773.09690 MHz	-67.55 dBm	-32.55 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.94156 MHz	-45.40 dBm	-32.40 dB
788.000 MHz	799.000 MHz	100.000 kHz	795.64286 MHz	6.00 dBm	-24.00 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.17832 MHz	-47.36 dBm	-12.36 dB

Date: 11.OCT.2023 01:17:23



LTE Band 14 / 5MHz / 64QAM


Lowest Band Edge / 1 RB

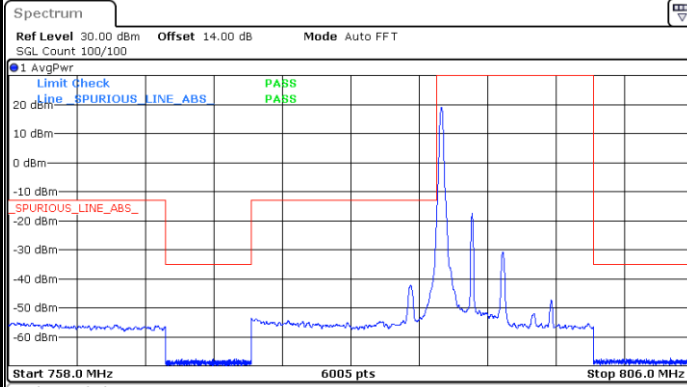

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.63187 MHz	-55.22 dBm	-42.22 dB
769.000 MHz	775.000 MHz	6.250 kHz	772.35982 MHz	-67.70 dBm	-32.70 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-21.27 dBm	-8.27 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.35714 MHz	19.07 dBm	-10.93 dB
799.000 MHz	806.000 MHz	6.250 kHz	804.39510 MHz	-67.45 dBm	-32.45 dB

Date: 11.OCT.2023 00:50:43


Highest Band Edge / 1 RB

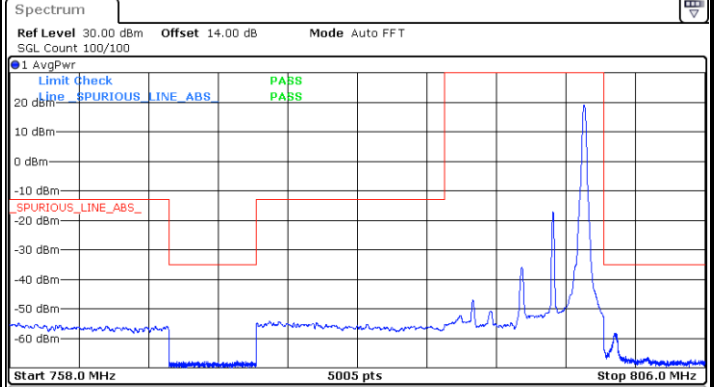

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.59890 MHz	-54.86 dBm	-41.86 dB
769.000 MHz	775.000 MHz	6.250 kHz	773.69031 MHz	-67.73 dBm	-32.73 dB
775.000 MHz	788.000 MHz	100.000 kHz	775.94156 MHz	-54.25 dBm	-41.25 dB
788.000 MHz	799.000 MHz	100.000 kHz	797.65385 MHz	19.06 dBm	-10.94 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.75874 MHz	-58.26 dBm	-23.26 dB

Date: 11.OCT.2023 01:15:50


Lowest Band Edge / Full RB

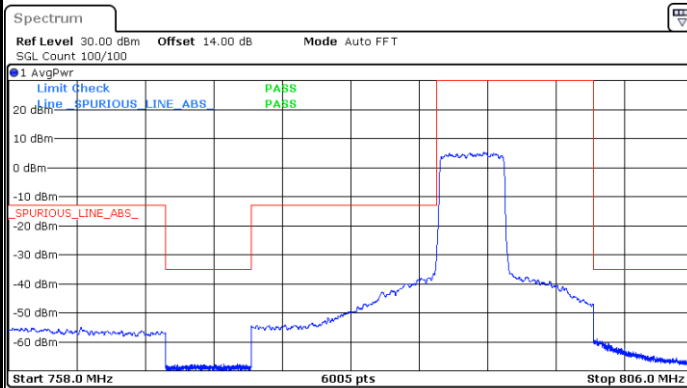

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	763.07143 MHz	-55.17 dBm	-42.17 dB
769.000 MHz	775.000 MHz	6.250 kHz	774.02999 MHz	-67.72 dBm	-32.72 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-31.52 dBm	-18.52 dB
788.000 MHz	799.000 MHz	100.000 kHz	791.33516 MHz	5.09 dBm	-24.91 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.25524 MHz	-59.00 dBm	-24.00 dB


Date: 11.OCT.2023 00:53:44


Highest Band Edge / Full RB

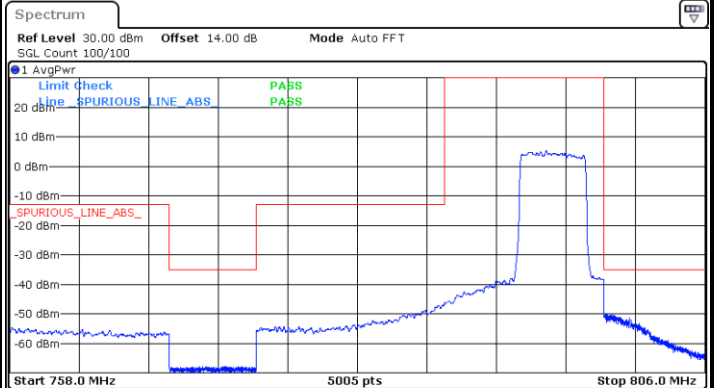


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.18132 MHz	-54.66 dBm	-41.66 dB
769.000 MHz	775.000 MHz	6.250 kHz	772.92308 MHz	-67.86 dBm	-32.86 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-46.97 dBm	-33.97 dB
788.000 MHz	799.000 MHz	100.000 kHz	795.02747 MHz	5.20 dBm	-24.80 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.01748 MHz	-49.51 dBm	-14.51 dB

Date: 11.OCT.2023 01:18:10

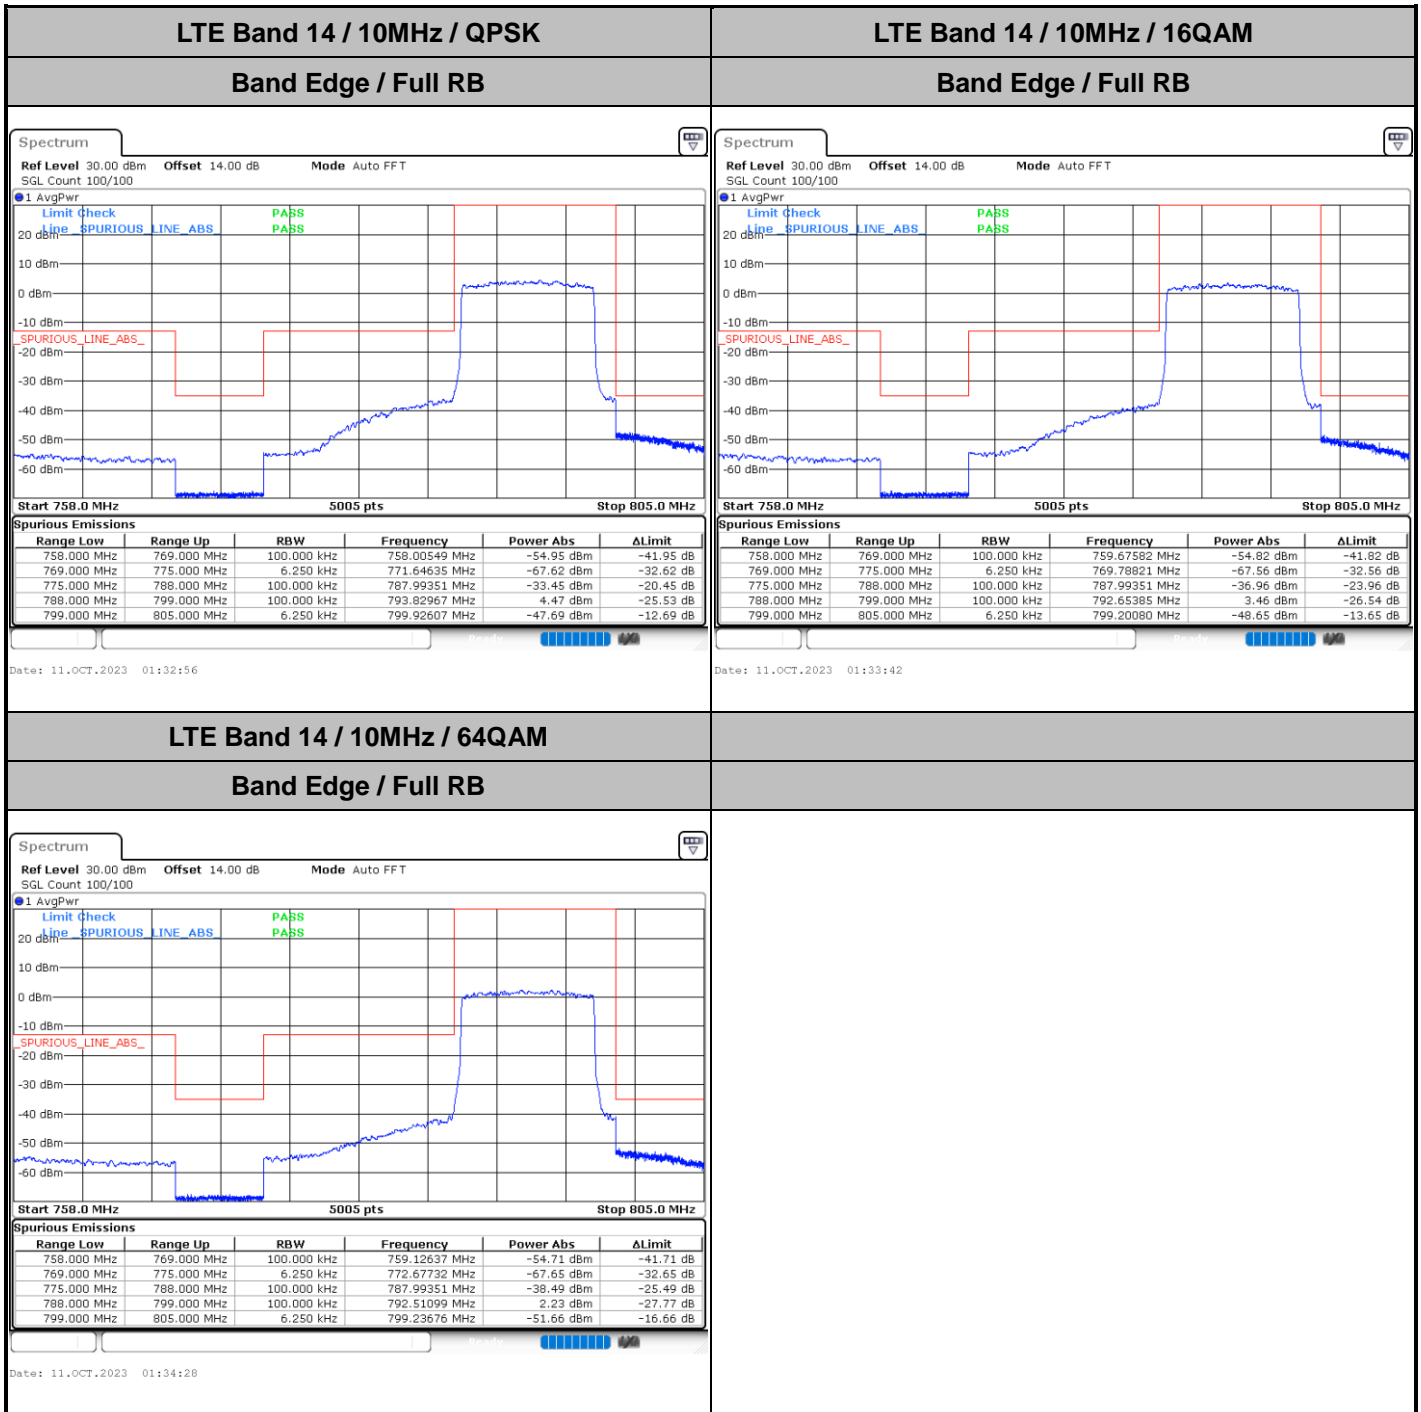


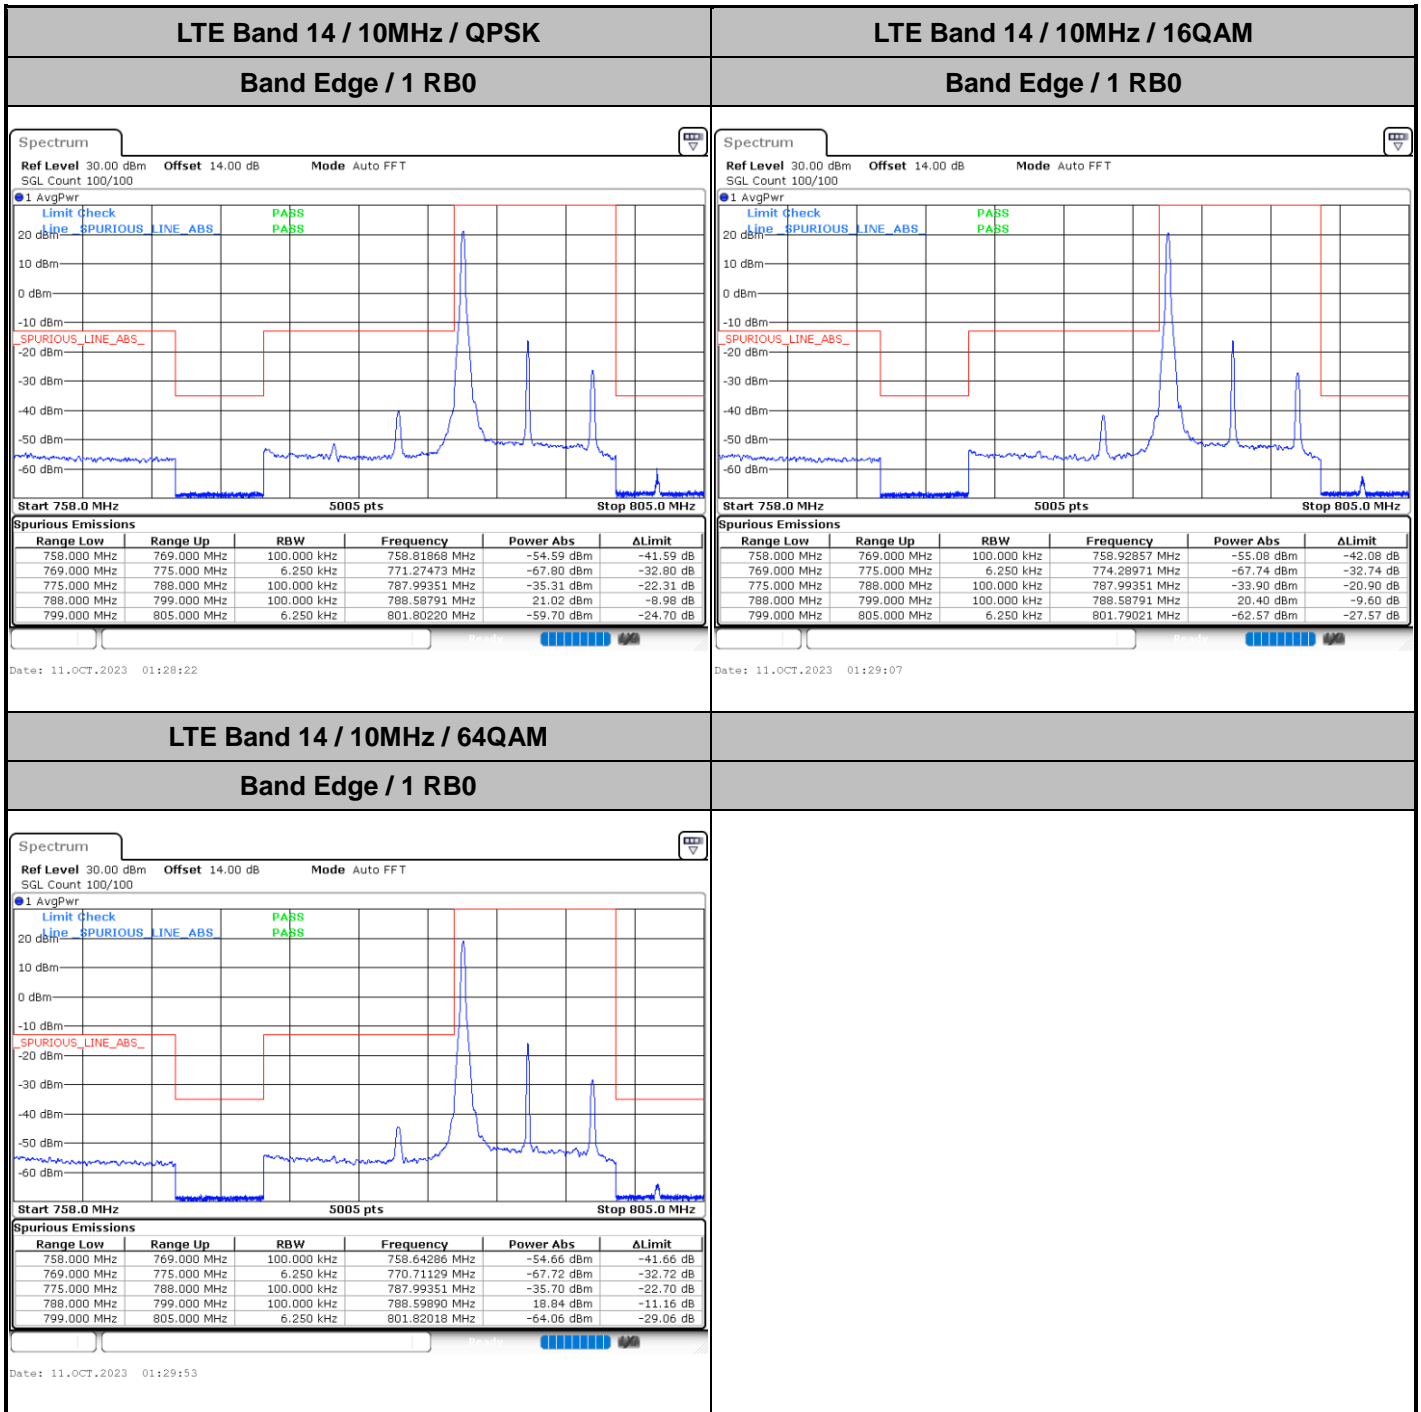

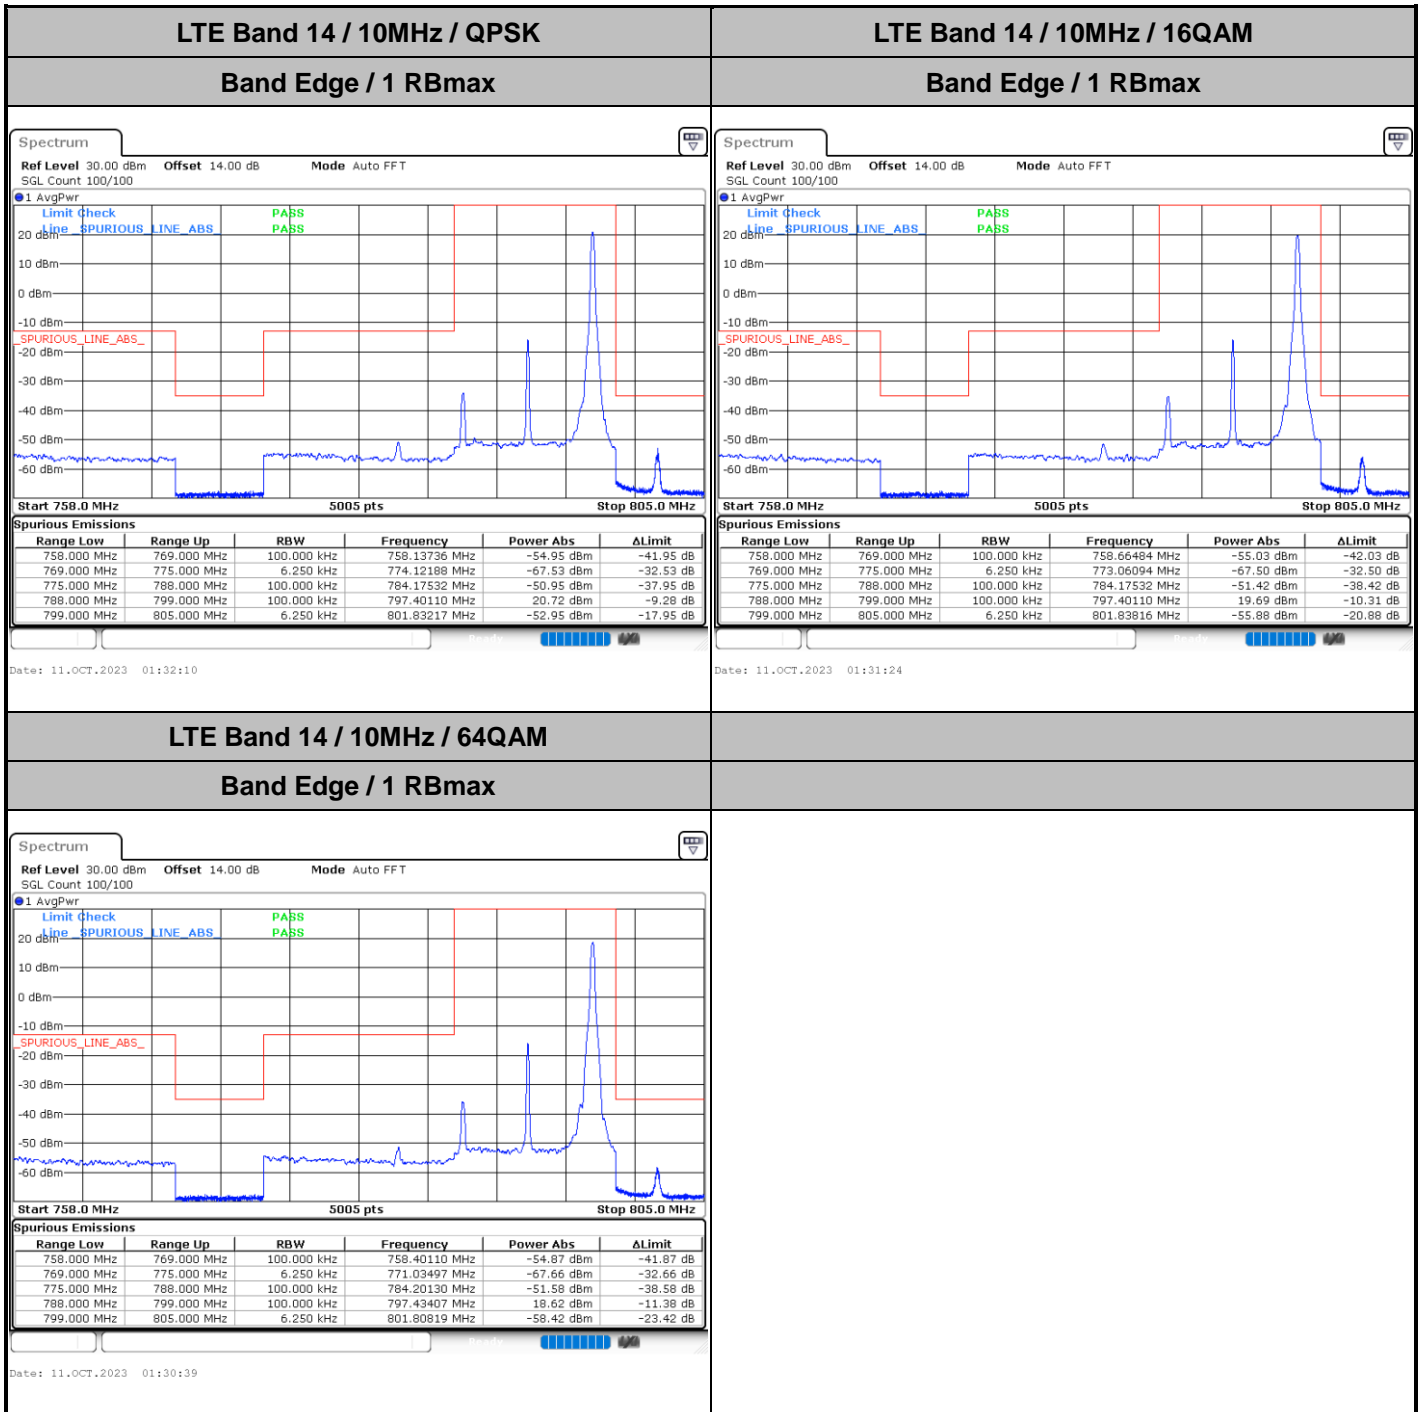




# Conducted Spurious Emission

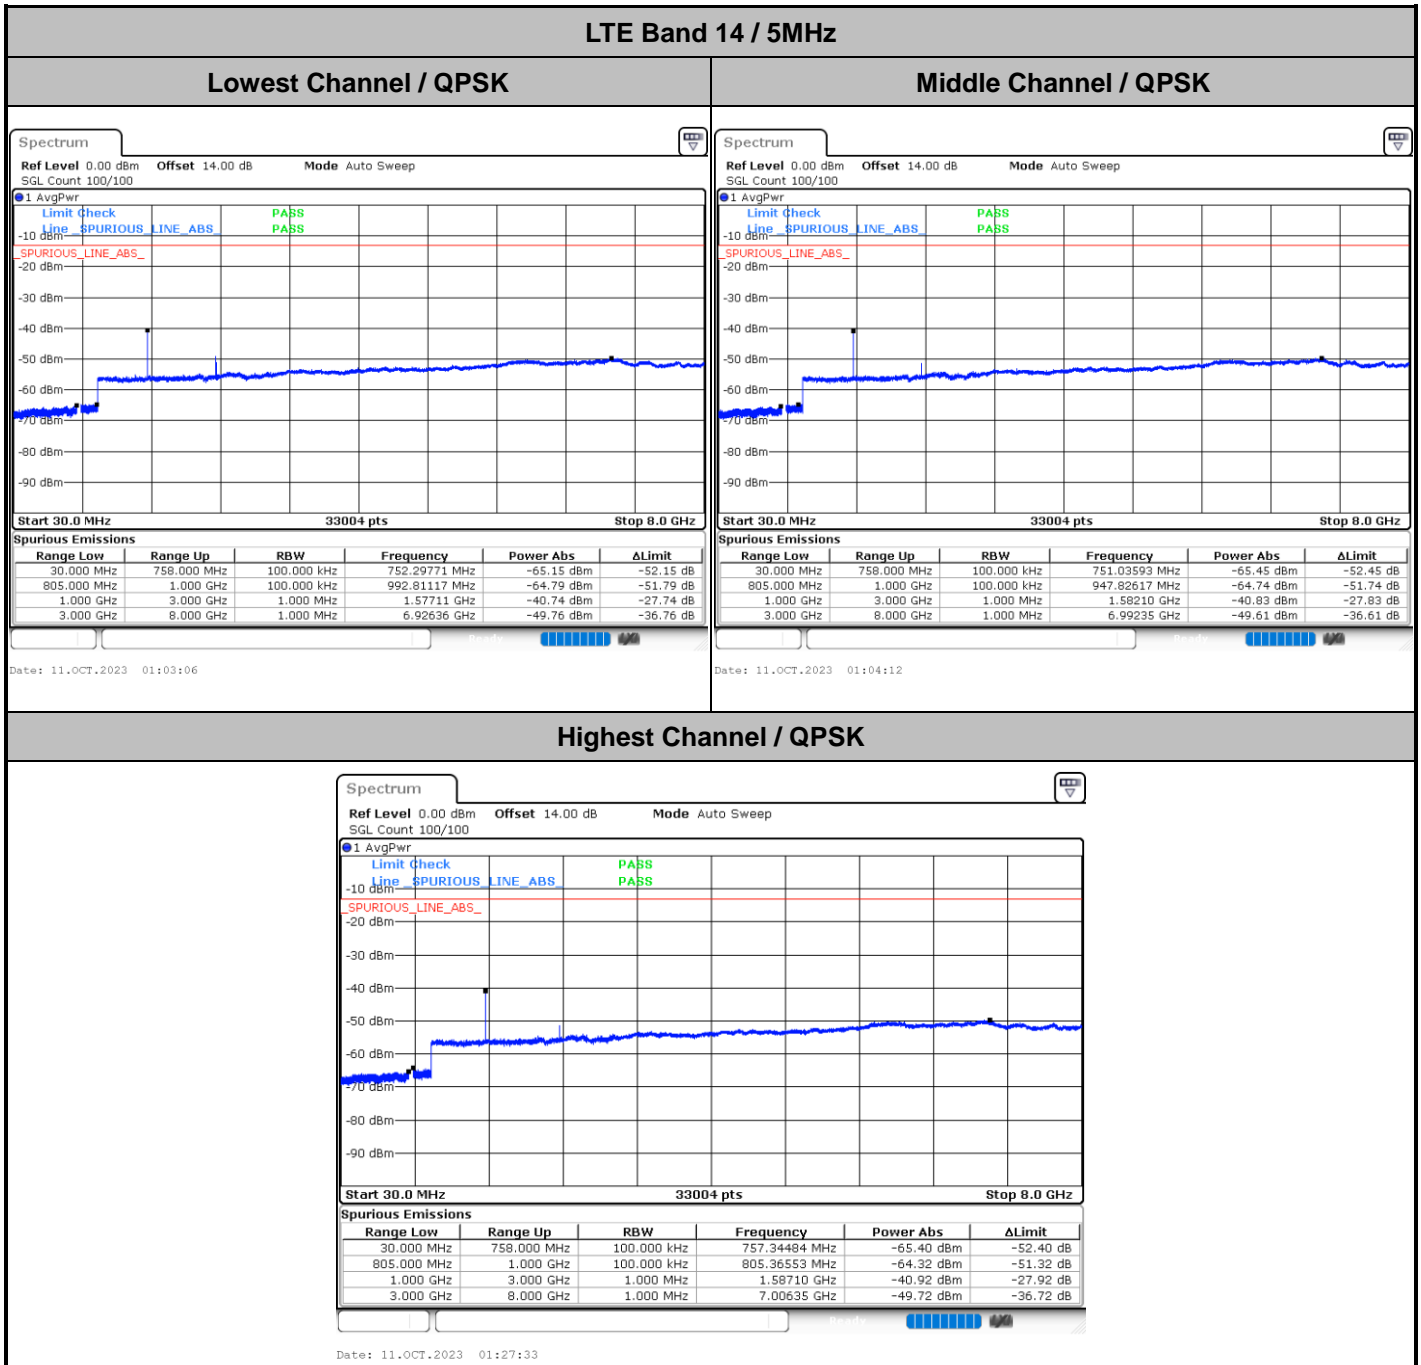



LTE Band 14 / 10MHz

Middle Channel / QPSK

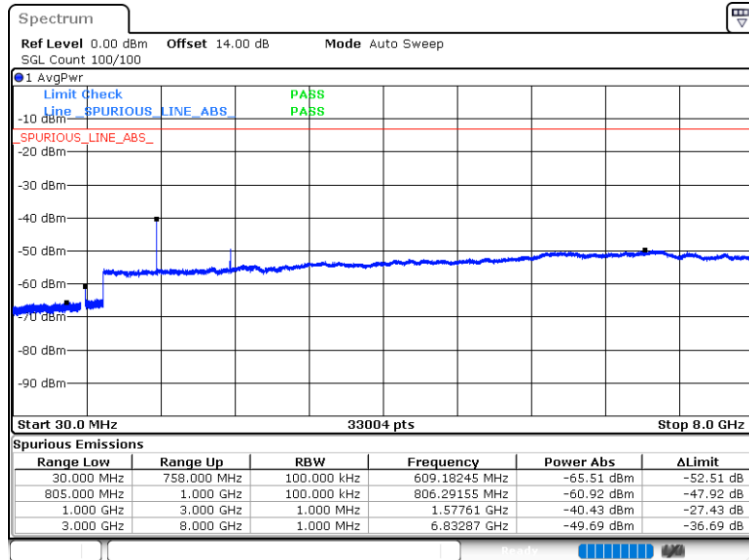


Date: 11.OCT.2023 01:43:45




**Mask**

**LTE Band 14 / 5MHz / QPSK**

**Lowest Channel / 1RB**

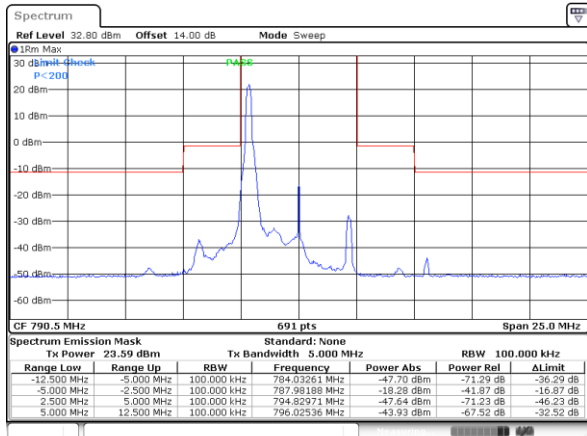


Date: 11.OCT.2023 00:54:39

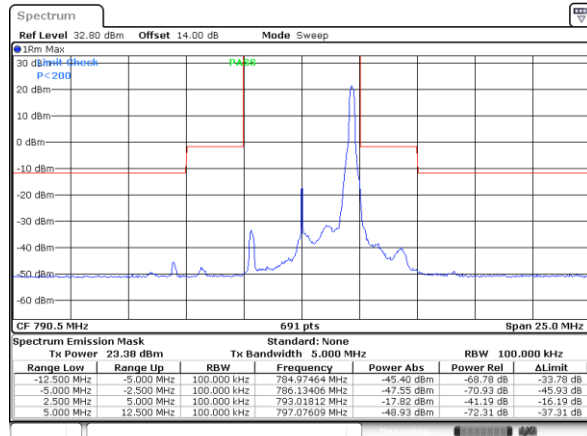

Date: 11.OCT.2023 00:57:25

**Lowest Channel / Full RB**

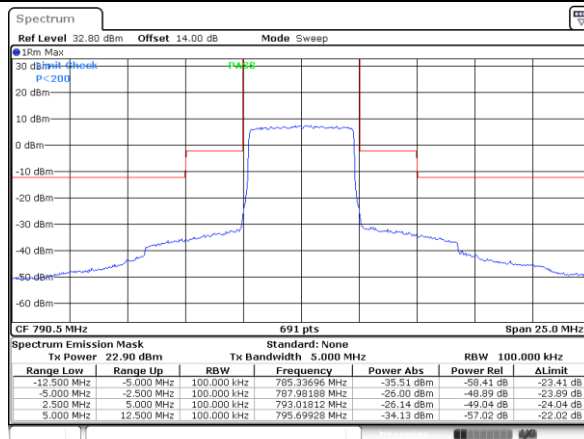


Date: 11.OCT.2023 01:00:11




LTE Band 14 / 5MHz / 16QAM

Lowest Channel / 1RB

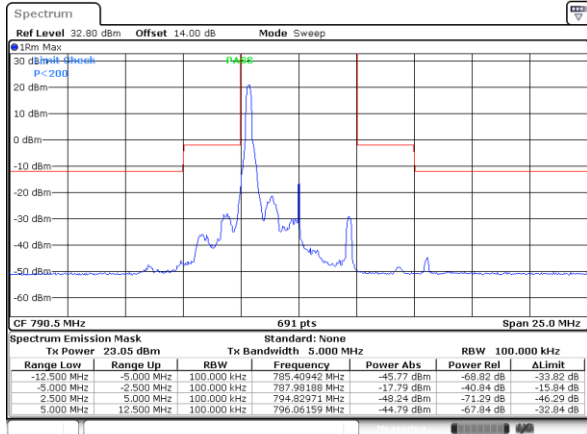


Date: 11.OCT.2023 00:55:134

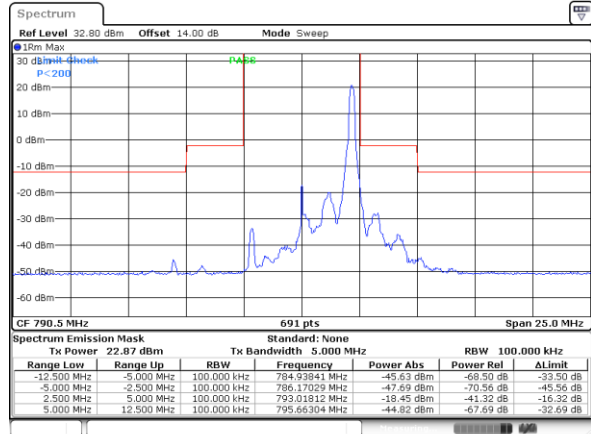

Date: 11.OCT.2023 00:58:120

Lowest Channel / Full RB

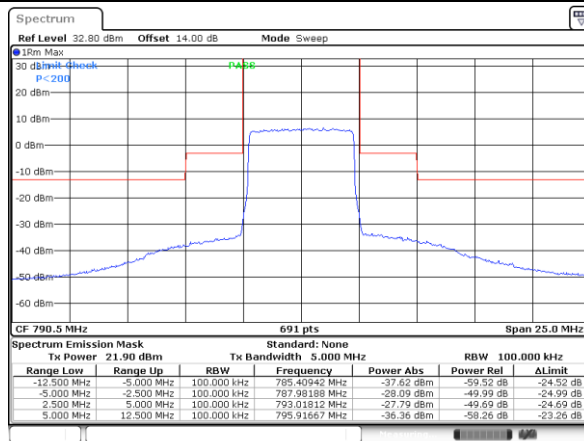


Date: 11.OCT.2023 01:01:06




LTE Band 14 / 5MHz / 64QAM

Lowest Channel / 1RB

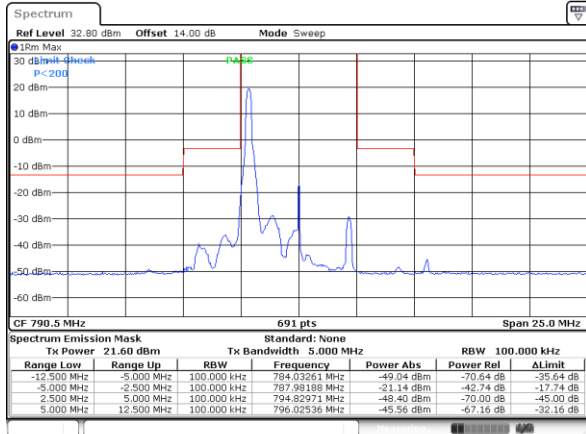


Date: 11.OCT.2023 00:56:29

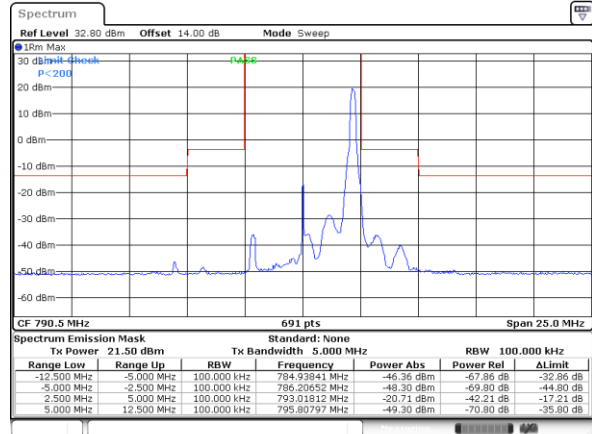

Date: 11.OCT.2023 00:59:15

Lowest Channel / Full RB

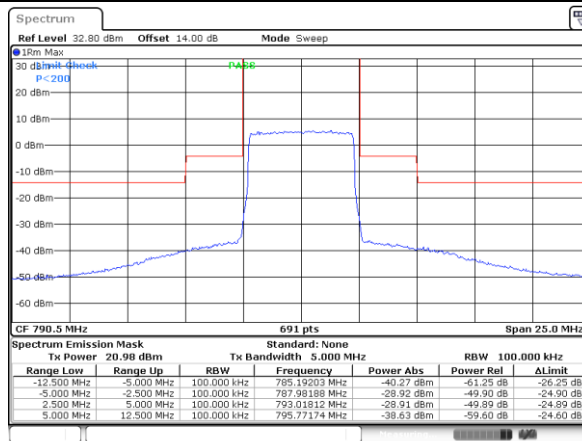


Date: 11.OCT.2023 01:02:01




LTE Band 14 / 5MHz / QPSK

Middle Channel / 1RB

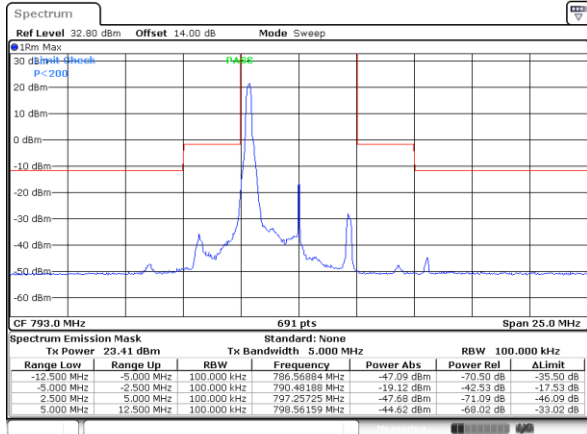


Date: 11.OCT.2023 01:04:54

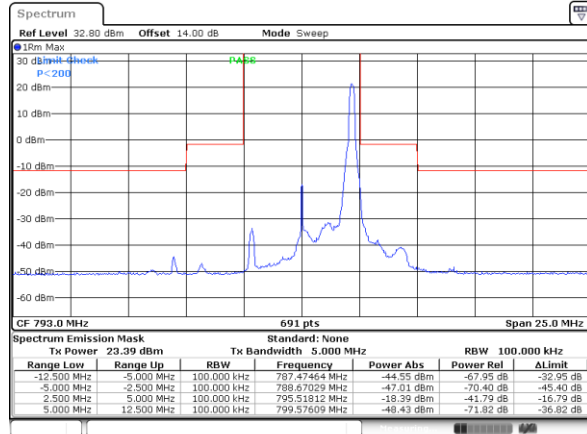

Date: 11.OCT.2023 01:07:38

Middle Channel / Full RB

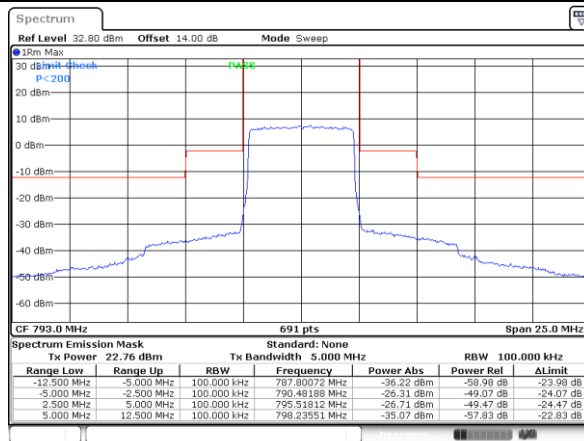


Date: 11.OCT.2023 01:10:21




LTE Band 14 / 5MHz / 16QAM

Middle Channel / 1RB

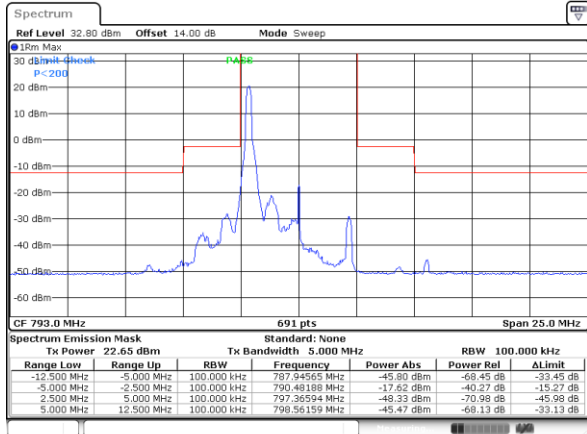


Date: 11.OCT.2023 01:05:19

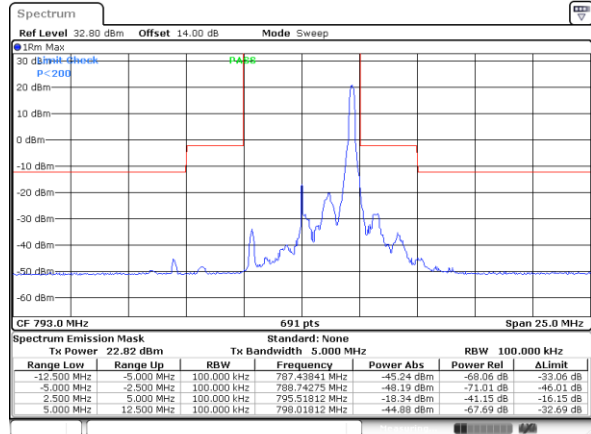

Date: 11.OCT.2023 01:08:32

Middle Channel / Full RB

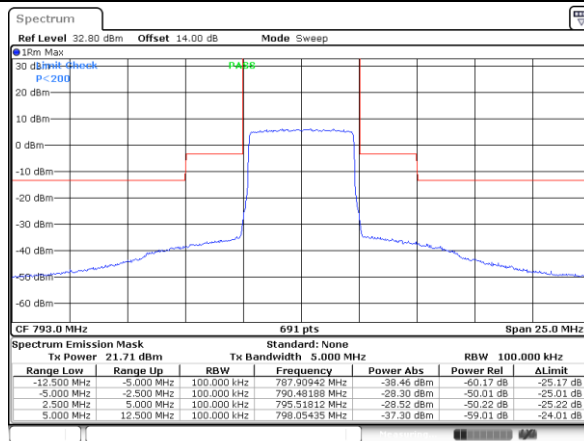


Date: 11.OCT.2023 01:11:16




LTE Band 14 / 5MHz / 64QAM

Middle Channel / 1RB

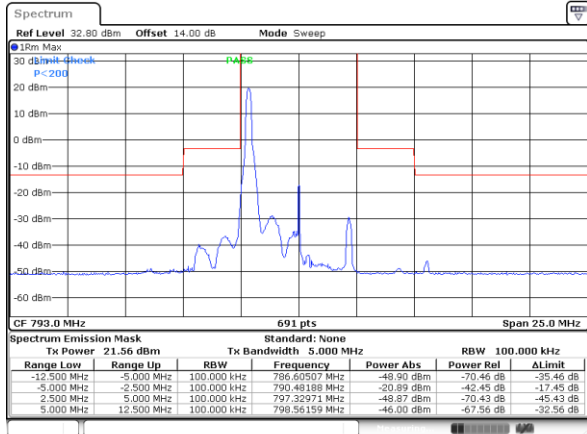


Date: 11.OCT.2023 01:06:43

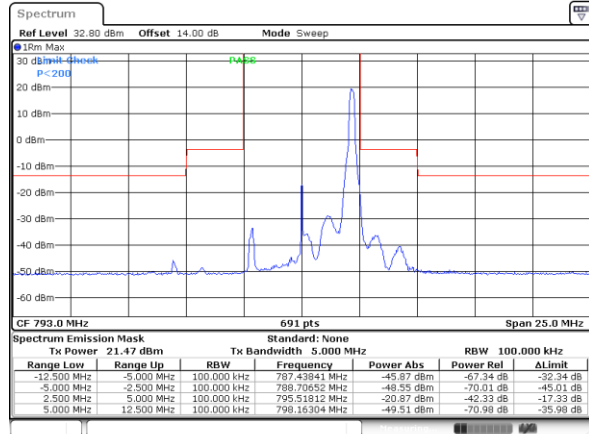

Date: 11.OCT.2023 01:09:27

Middle Channel / Full RB

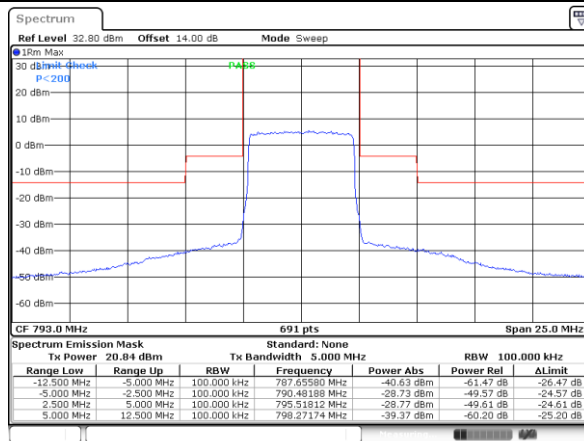


Date: 11.OCT.2023 01:12:11




LTE Band 14 / 5MHz / QPSK

Highest Channel / 1RB

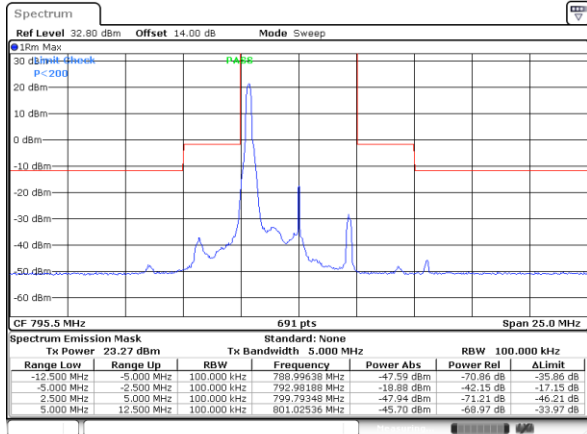


Date: 11.OCT.2023 01:19:06

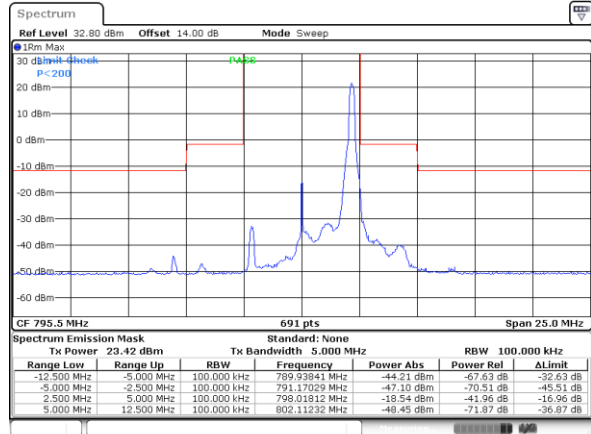

Date: 11.OCT.2023 01:21:51

Highest Channel / Full RB

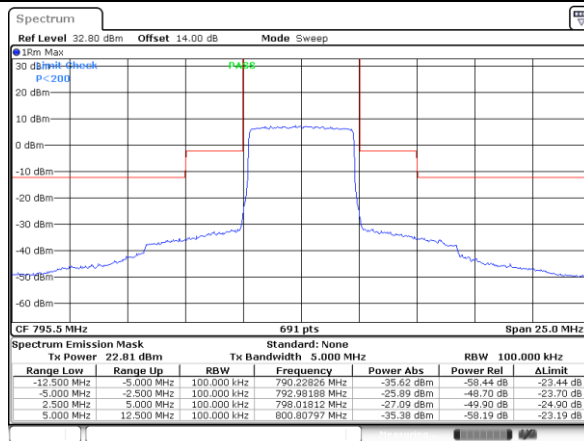


Date: 11.OCT.2023 01:24:37




LTE Band 14 / 5MHz / 16QAM

Highest Channel / 1RB

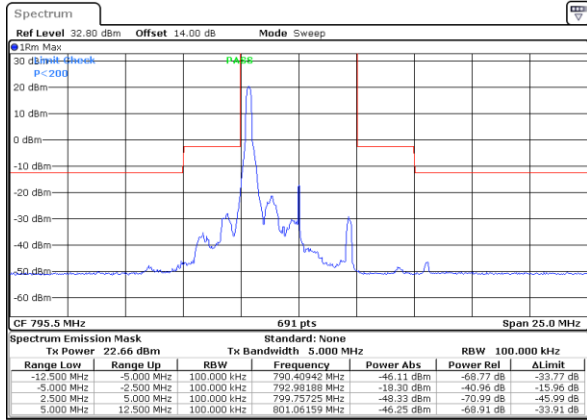


Date: 11.OCT.2023 01:20:01

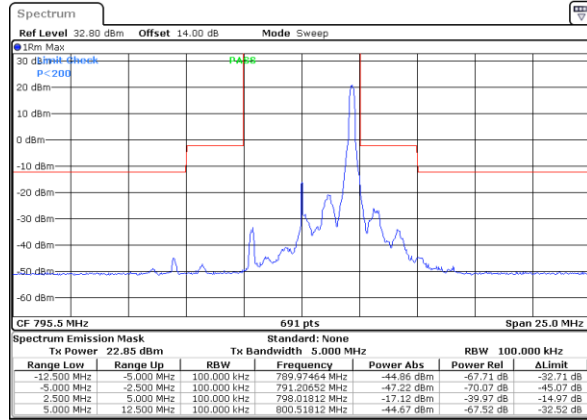

Date: 11.OCT.2023 01:22:47

Highest Channel / Full RB

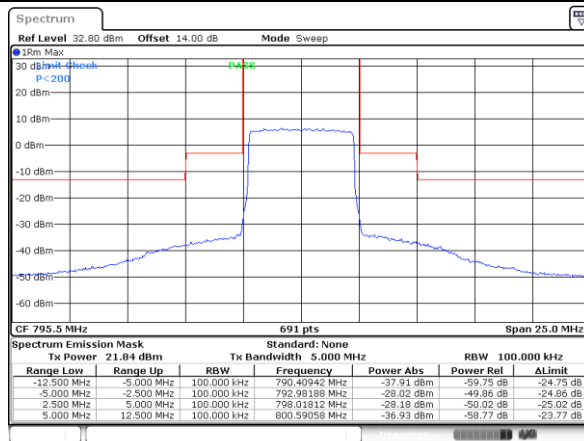


Date: 11.OCT.2023 01:25:32






LTE Band 14 / 5MHz / 64QAM

Highest Channel / 1RB

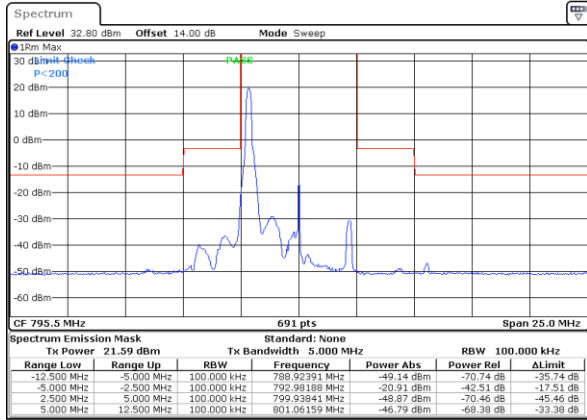


Date: 11.OCT.2023 01:20:56

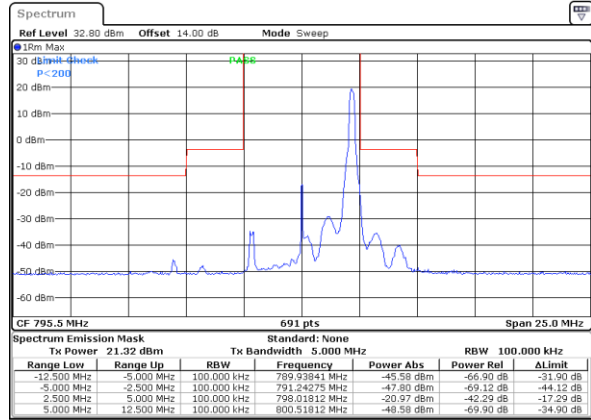

Date: 11.OCT.2023 01:23:42

Highest Channel / Full RB


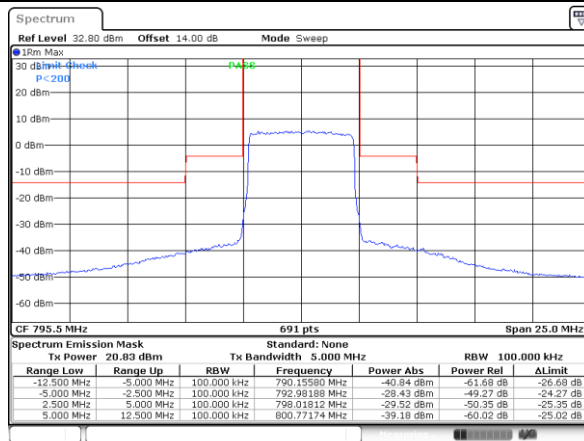


Date: 11.OCT.2023 01:26:27




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

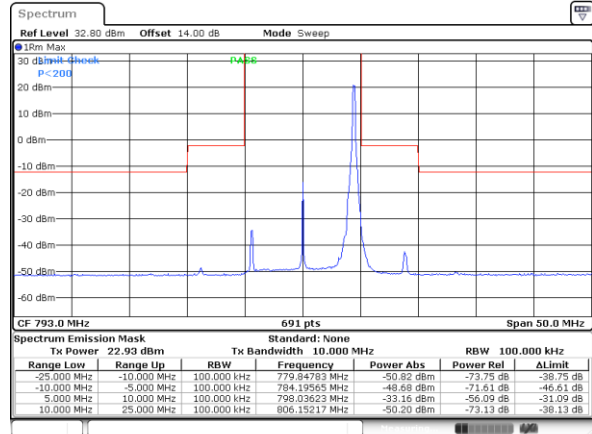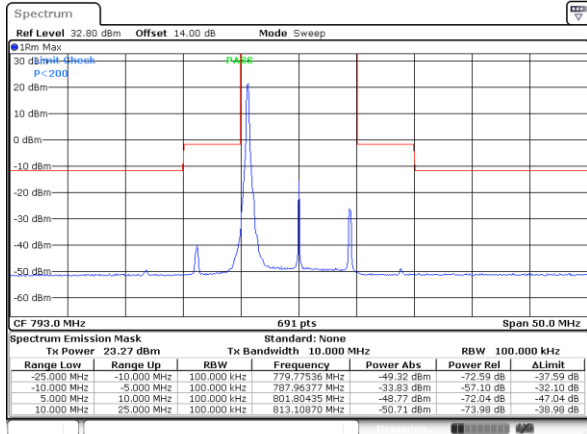


Middle Channel / Full RB

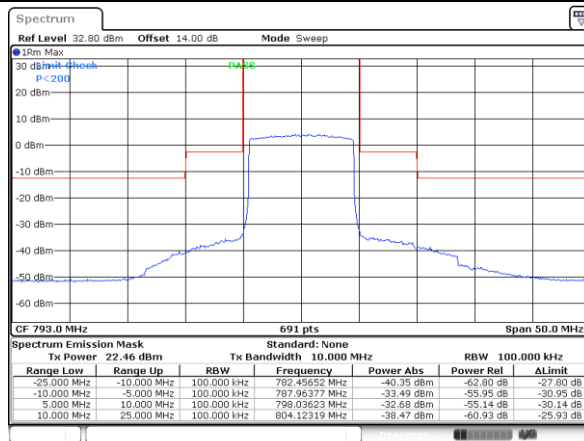




LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

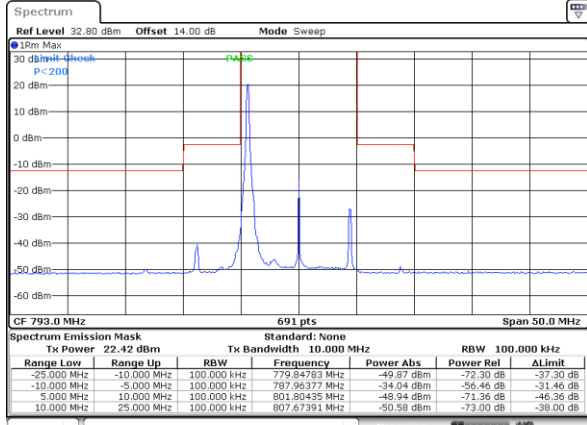


Date: 11.OCT.2023 01:36:17

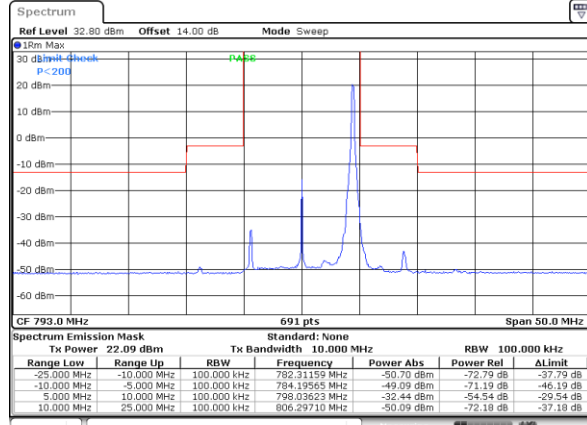

Date: 11.OCT.2023 01:39:01

Middle Channel / Full RB

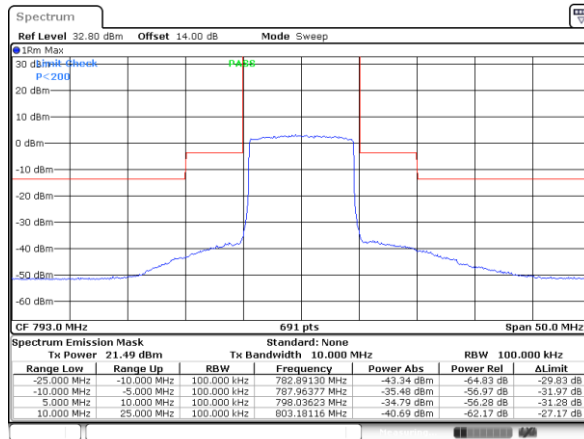


Date: 11.OCT.2023 01:41:45




LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

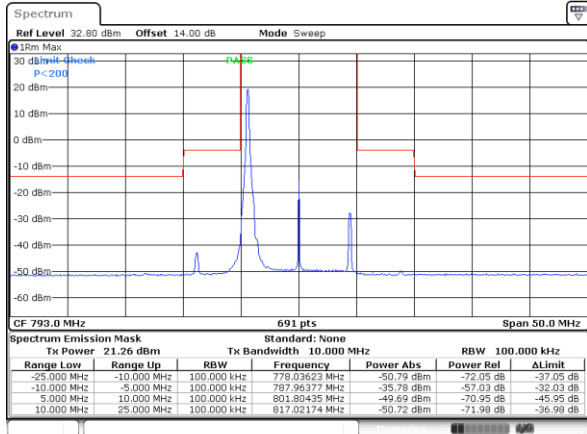


Date: 11.OCT.2023 01:37:12

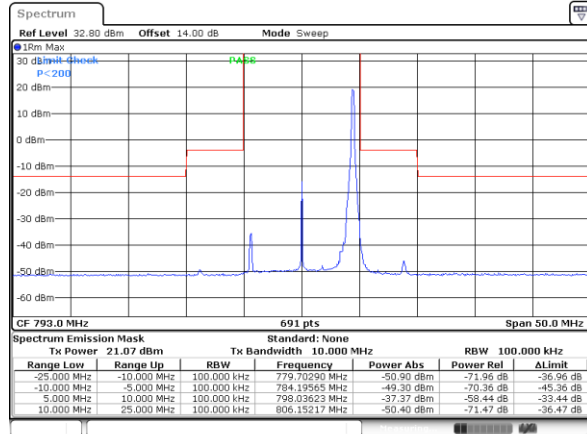

Date: 11.OCT.2023 01:39:56

Middle Channel / Full RB

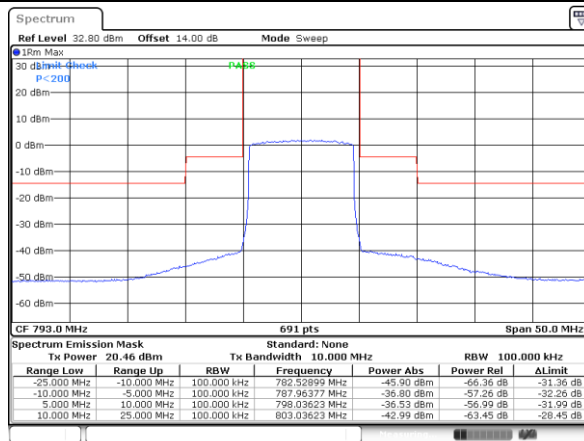

Date: 11.OCT.2023 01:42:40

**Frequency Stability**

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0025	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0003	
0	Normal Voltage	0.0006	
-10	Normal Voltage	0.0003	
-20	Normal Voltage	0.0006	
-30	Normal Voltage	0.0005	
20	Maximum Voltage	0.0008	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0015	

**Note:**

1. Normal Voltage = 3.91 V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.

**ERP**

LTE Band 14 (G <sub>T</sub> - L <sub>C</sub> = -7.20 dBi) QPSK						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency (MHz)	790.5	793	795.5		793	
Conducted Power (dBm)	22.68	22.67	22.74		22.84	
Conducted Power (Watts)	0.1854	0.1849	0.1879		0.1923	
ERP(dBm)	13.33	13.32	13.39		13.49	
ERP(Watts)	0.0215	0.0215	0.0218		0.0223	

LTE Band 14 (G <sub>T</sub> - L <sub>C</sub> = -7.20 dBi) 16QAM						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency (MHz)	790.5	793	795.5		793	
Conducted Power (dBm)	22.00	22.01	22.03		22.13	
Conducted Power (Watts)	0.1585	0.1589	0.1596		0.1633	
ERP(dBm)	12.65	12.66	12.68		12.78	
ERP(Watts)	0.0184	0.0185	0.0185		0.0190	



LTE Band 14 ( $G_T - L_C = -7.20$ dBi) 64QAM						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	20.93	20.91	20.97		21.08	
Conducted Power (Watts)	0.1239	0.1233	0.1250		0.1282	
ERP(dBm)	11.58	11.56	11.62		11.73	
ERP(Watts)	0.0144	0.0143	0.0145		0.0149	



### Appendix B. Test Results of Radiated Test

#### Field Strength of Spurious Radiated

Test Engineer :	Shiwei Wen	Temperature :	22~25°C
		Relative Humidity :	48~52%

LTE Band 14 / QPSK / ANTO									
Bandwidth	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
10MHz	1577	-65.25	-42.15	-23.10	-77.08	-68.50	4.00	9.40	H
	2365.5	-60.66	-13	-47.66	-79.26	-64.23	4.88	10.60	H
	3154	-59.11	-13	-46.11	-79.51	-64.04	5.52	12.60	H
	1577	-64.62	-42.15	-22.47	-77.02	-67.87	4.00	9.40	V
	2365.5	-60.04	-13	-47.04	-79.10	-63.61	4.88	10.60	V
	3154	-56.93	-13	-43.93	-79.26	-61.86	5.52	12.60	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.									
Test Result					PASS				