

# FCC EMC TEST REPORT

**Name of Sample:** Mobile Cellular Phone  
**Model of Sample:** XT2363-1, XT2363-2  
**Applicant:** Motorola Mobility LLC  
**Issued Date:** 2023-10-18



**ADR TEST AND CERTIFICATION CENTER**

**Motorola Mobility LLC, a Lenovo Company**

**Add: No. 19, Gao Xin 4th Road Wuhan, People's Republic of China 430205**

**Phone: (86)18702717862**

**E-mail: [lucz1@motorola.com](mailto:lucz1@motorola.com)**

Name of Client	Motorola Mobility LLC		
Address of Client	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA		
Trademark	Motorola	Type Name or ID	IHDT56AQ1
Applicant No.	RF168607 RF168904 RF169180	Sample No.	SN: NFOL220231    Sample 1 SN: NFOB290113    Sample 2 SN: NFOLB70172    Sample 3
Delivering Date	2023-09-21	Test Date(s)	2023-09-22 to 2023-10-18
Sample Illustration	None		
Standard	47 CFR FCC PART 15 Subpart B ANSI C63.4-2014		
Conclusion	PASS		
Remarks	None		

Editor: Chuan Sun

Chuan Sun

Auditor: Jianfeng Wen

Jianfeng Wen

Approver: Huangsheng Lin

Huangsheng Lin



## Catalogue

- 1. Information Of Equipment Under Test(EUT) ..... 5
- 2. Details Of Test ..... 7
  - 2.1 Applicant..... 7
  - 2.2 Location of Test ..... 7
  - 2.3 Applied Standards..... 7
- 3. Result Summary ..... 8
- 4. Tests Configuration Of EUT..... 9
  - 4.1 EUT Test Modes..... 9
  - 4.2 Configuration Of Test System..... 11
  - 4.3 Support Unit For Test..... 12
- 5. Test Result ..... 13
  - 5.1 Radiated Emissions ..... 13
  - 5.2 Conducted Emissions ..... 15
- 6. Test Equipment And Software ..... 16
- 7. System Measurement Uncertainty ..... 16
- 8. Test Data ..... 17
  - 8.1 Radiated Emissions ..... 17
  - 8.2 Conducted Emissions ..... 19
- 9. EUT And Test Set-up Photos ..... 20
  - 9.1 EUT ..... 20
  - 9.2 Radiated Emissions ..... 21
  - 9.3 Conducted Emissions ..... 22

**1. Information Of Equipment Under Test(EUT)**

<b>Product Name:</b>	Mobile Cellular Phone	
<b>Brand Name:</b>	Motorola	
<b>Model Name:</b>	XT2363-1, XT2363-2	
<b>FCC ID:</b>	IHDT56AQ1	
<b>Software Version:</b>	UUG34.22 for Sample1, UUG34.30 for Sample2/3	
<b>Hardware Version:</b>	DVT	
<b>IMEI Code:</b>	Conduction: 350735340021598/350735340021606 for Sample1 356977530014538/356977530014546 for Sample2 350735340031977/350735340031985 for Sample3 Radiation: 350735340021598/350735340021606 for Sample1 356977530014538/356977530014546 for Sample2 350735340031977/350735340031985 for Sample3	
<b>Supports Radio application in this standard:</b>		
GSM/WCDMA/LTE/5G NR/WLAN/BLUETOOTH/GNSS/NFC		
<b>Accessory</b>		
<b>Product</b>	<b>Brand</b>	<b>model</b>
AC Adapter 1(US)	Motorola (AOHAI)	MC-201L
AC Adapter 1(EU)	Motorola (AOHAI)	MC-202L
AC Adapter 1(UK)	Motorola (AOHAI)	MC-203L
AC Adapter 1(AU)	Motorola (AOHAI)	MC-205L
AC Adapter 1(AR)	Motorola (AOHAI)	MC-206L
AC Adapter 2(US)	Motorola (Salcomp)	MC-201L
AC Adapter 2(EU)	Motorola (Salcomp)	MC-202L
AC Adapter 2(UK)	Motorola (Salcomp)	MC-203L
AC Adapter 2(AU)	Motorola (Salcomp)	MC-205L
AC Adapter 2(AR)	Motorola (Salcomp)	MC-206L
AC Adapter 2(BR)	Motorola (Salcomp)	MC-207L
AC Adapter 2(CHILE)	Motorola (Salcomp)	MC-209L
AC Adapter 3(BR)	Motorola (Chenyang)	MC-207L
AC Adapter 4(BR)	Motorola (Cliptech)	MC-207L
AC Adapter 5(IN)	Motorola (XIH)	MC-204
USB Cable 1	Motorola (Saibao)	SZN-A026A
USB Cable 2	Motorola (Juwei)	JWUB1606-ZN01H
USB Cable 3	Motorola (HeXin)	HX-ZN-19
Battery 1	Motorola (ATL)	QF50
Battery 2	Motorola (SCUD)	QF50
Battery 3	Motorola (Sunwoda)	QF50

## Remark:

1. The EUT's information was declared by manufacturer. Please refer to the manufacturer's specifications or user's manual for more detailed description.
2. This is a report for XT2363-1 and XT2363-2. The detailed differences between them can be referred to the PED (Product Equality Declaration) document. There are 3 samples in total. Sample1 and sample3 are XT2363-2, Sample2 is XT2363-1. Based on the similarity, sample1 is fully tested. For sample2 and sample3, only the related test cases from sample1 were verified for the differences.

## 2. Details Of Test

### 2.1 Applicant

<b>Applicant Name:</b>	Motorola Mobility LLC
<b>Address:</b>	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

### 2.2 Location of Test

<b>Test Site 1:</b>	ADR TEST AND CERTIFICATION CENTER
<b>Address:</b>	NO.19, Gao Xin 4 <sup>th</sup> Road, Wuhan, 430205, P.R China

### 2.3 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

**47 CFR FCC PART 15 Subpart B**

**ANSI C63.4-2014**

### 3. Result Summary

Test Items	Test Standard	Limit	Result (PASS/FAIL)	Site
Radiated emissions	ANSI C63.4-2014	15.109 Class B	PASS	Site 1
Conducted emissions	ANSI C63.4-2014	15.107 Class B	PASS	Site 1

decision rules: Statements of conformity (e.g. Pass/Fail) to specifications are made in this report without taking measurement uncertainty into account except when requested by the customer. Where statements of conformity are made in this report, the following decision rules are applied:

PASS- Results within limits/specifications

FAIL- Results exceed limits/specifications

Remark: For the test result, the EUT had been tested with all test modes. But only the worst case was shown in test report.

Summary of Environment Condition, Test Date and Test Engineer for all Test Items

Test items	Ambient Temperature ( °C )	Relative Humidity (%)	Atmospheric Pressure (kPa)	Test Date	Test Engineer
Radiated emissions	23~26	47~52	/	Sep. 25, 2023 ~ Oct. 18, 2023	Liu Rencong Xiao Chuanghui
Conducted emissions	23~25	49-52	/	Sep. 22, 2023 ~ Oct. 18, 2023	Cao man Xiao Chuanghui



## 4. Tests Configuration Of EUT

### 4.1 EUT Test Modes

All the test modes were carried out with the EUT under the normal operation, which were shown in this test report and defined as below:

Test Items	configuration
Radiated Emissions	Mode1: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + Earphone + USB Cable1(Charging from Adapter1) + SIM 1 for Sample 1
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + Camera(Rear) + Earphone + USB Cable 2(Charging from Adapter2) + SIM 1 for Sample 1
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN(5G)Idle + Battery + USB Cable3(Charging from Adapter3) + SIM 2 for Sample 1
	Mode 4: LTE Band 17 Idle + Bluetooth Idle + WLAN(2.4G)Idle + NFC On + Battery + Earphone + USB Cable1(Charging from Adapter4 ) + SIM 2 for Sample 1
	Mode 5: LTE Band 12 Idle + Bluetooth Idle + WLAN(5G)Idle + MPEG4(RunColor Bar) + Battery + Earphone + SIM 2 for Sample 1
	Mode 6: LTE Band 13 Idle + Bluetooth Idle + WLAN(2.4G)Idle + GNSS Rx + USBCable1(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + Battery+ SIM 2 for Sample 1
	Mode 7: LTE Band 26 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + Battery + USB Cable2(Data Link with Notebook) + NB USB Data Link toEUT(eMMC) + SIM 2 for Sample 1
	Mode 8: n5 Idle + Bluetooth Idle + WLAN(2.4G)Idle + Camera(Rear) + Battery + Earphone + USB Cable2(Charging from Adapter5) + SIM1 for Sample 1
	Mode 9: WCDMA Band V Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + Battery + USB Cable3(Charging from Adapter 2) + SIM 1 for Sample 1
	Mode10: LTE Band 17 Idle + Bluetooth Idle + WLAN(2.4G)Idle + NFC On + Battery + USB Cable2(Charging from Adapter1) + SIM 1 for Sample 1
	Mode11: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + Earphone + USB Cable1(Charging from Adapter1) + SIM 1 for Sample 2
	Mode12: WCDMA Band V Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) +Battery+ USB Cable2(Charging from Adapter2) + SIM 2 for Sample 2
	Mode13: LTE Band 12 Idle + Bluetooth earphone link + WLAN(5G)Idle + NFC On + MPEG4(RunColor Bar) + Battery + USB Cable3(Charging from Adapter3)+ SIM 2 for Sample 2
	Mode14: LTE Band 17 Idle + Bluetooth Idle + WLAN(2.4G)Idle + Battery + Earphone + USB Cable1(Charging from Adapter4 ) + SIM 2 for Sample 2
	Mode15: n5 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + Battery + GNSS Rx + USB Cable1(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SIM 2 for Sample 2
	Mode16: LTE Band 26 Idle + Bluetooth Idle + WLAN(5G)Idle + MPEG4(RunColor Bar) + Battery + Earphone + USB Cable1(Charging from Adapter5) + SIM 1 for Sample 2

	<p>Mode17: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + Earphone + USB Cable1(Charging from Adapter1) + SIM 1 for Sample 3</p> <p>Mode18: LTE Band 13 Idle + Bluetooth Idle + WLAN(2.4G)Idle + GNSS Rx + USB Cable1(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + Battery + SIM 2 for Sample 3</p>
<p>AC Conducted Emission</p>	<p>Mode1: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + Earphone + USB Cable1(Charging from Adapter1) + SIM 1 for Sample 1</p> <p>Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + Camera(Rear) + Earphone + USB Cable 2(Charging fromAdapter2) + SIM 1 for Sample 1</p> <p>Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN(5G)Idle + Battery + Earphone + USB Cable3(Charging from Adapter3) + SIM 2 for Sample 1</p> <p>Mode 4: LTE Band 17 Idle + Bluetooth Idle + WLAN(2.4G)Idle + NFC On + Battery + Earphone + USB Cable1(Charging from Adapter4) + SIM 1 for Sample 1</p> <p>Mode 5: LTE Band 12 Idle + Bluetooth Idle + WLAN(5G)Idle + MPEG4(RunColor Bar) + Battery + Earphone + USB Cable1(Charging from Adapter5) + SIM 1 for Sample 1</p> <p>Mode 6: LTE Band 13 Idle + Bluetooth Idle + WLAN(2.4G)Idle + GNSS Rx + USB Cable1(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + Battery + SIM 1 for Sample 1</p> <p>Mode 7: LTE Band 26 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Rear) + Battery + USB Cable2(Data Link with Notebook) + NB USB Data Link toEUT(eMMC) + SIM 1 for Sample 1</p> <p>Mode 8: n5 Idle + Bluetooth Idle + WLAN(2.4G)Idle + Camera(Rear) + Battery + USB Cable1(Charging from Adapter3) + for Sample 1</p> <p>Mode 9: LTE Band 12 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + Battery + Earphone + USB Cable2(Charging from Adapter2) + SIM 1 for Sample 1</p> <p>Mode10: LTE Band 17 Idle + Bluetooth Idle + WLAN(2.4G)Idle + NFC On + Battery + USB Cable2(Charging from Adapter1) + SIM 1 for Sample 1</p> <p>Mode11: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + Earphone + USB Cable1(Charging from Adapter1) + SIM 1 for Sample2</p> <p>Mode12: WCDMA Band V Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + Battery + Earphone + USB Cable2(Charging from Adapter2)+ SIM 2 for Sample 2</p> <p>Mode13: LTE Band 12 Idle + Bluetooth earphone link + WLAN(5G)Idle + GNSS Rx + MPEG4(RunColor Bar) + Battery + USB Cable3(Charging from Adapter3) + SIM 2 for Sample 2</p> <p>Mode14: LTE Band 17 Idle + Bluetooth Idle + WLAN(5G)Idle + NFC On Battery + Earphone + USB Cable1(Charging from Adapter4) + SIM 1 for Sample 2</p> <p>Mode15: n5 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Rear) + Battery + USB Cable2(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SIM 1 for Sample 2</p>

<p>Mode16: LTE Band 26 Idle + Bluetooth earphone link + WLAN(2.4G)Idle + NFC On + Battery + USB Cable2(Charging from Adapter5) + SIM 1 for Sample 2</p> <p>Mode17: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + Earphone + USB Cable1(Charging from Adapter1) + SIM 1 for Sample 3</p> <p>Mode18: LTE Band 26 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Rear) + Battery + USB Cable2(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SIM 1 for Sample 3</p>
---

Remark:

1. If there is over one kind of accessories, each one should be applied in the all test modes. However, only the worst case will be recorded in this report.
2. If EUT has more than one typical operation, only the worst case will be recorded in this report.

Link Mode:

When the EUT state is switched on and worked.

Idle Mode:


When the EUT state is switch on but without Radio Resource Control (RRC) connection.

Worst mode of all test items listed in section 4.1

Test items	Worst mode
Radiated Emission	18
Conducted Emission	17

Remark: Only data of worst mode (if test item has) was reported in test result.

#### 4.2 Configuration Of Test System

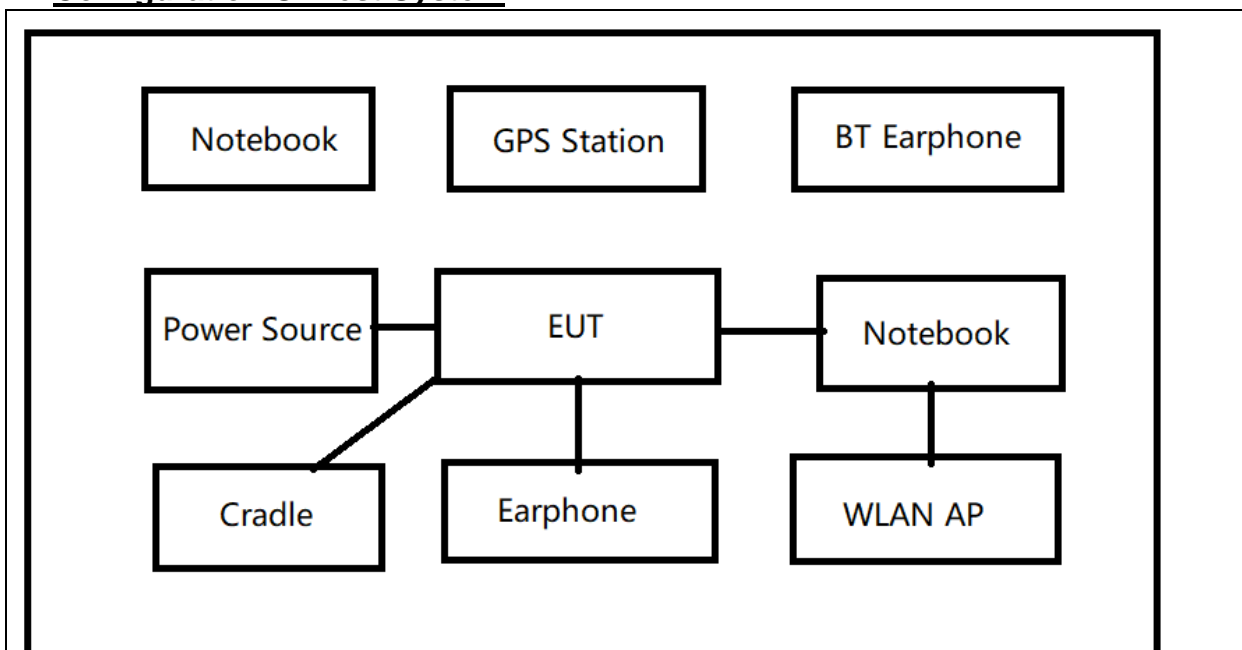

This example is connection diagram of EUT test configurations.

For detail, please refer to test mode configuration and setup photographs for each test item.

**4.3 Support Unit For Test**

<b>Name</b>	<b>Model Name</b>	<b>Manufacturer</b>	<b>S/N</b>
System Simulator	CMW500	R&S	141518
System Simulator	CMW500	R&S	171184
System Simulator	CMX500	R&S	101840
Vector Signal Generator	SMBV100A	R&S	258462
WLAN AP	TP-Link-8342	TP-Link	NA
WLAN AP	H3C Magic NX54	H3C	NA
Notebook	YOGA Pro 14s	Lenovo	PF48HYHV
Bluetooth Earphone	TR6	SOA/Y	NA
Bluetooth Earphone	Earbuds X2	COSONIC	NA
SD Card	128 PRO Plus	Samsung	NA
U disk	L7C	Lenovo	NA
Earphone	SH38C81577	Lyand	D3252

## 5. Test Result

### 5.1 Radiated Emissions

#### 5.1.1 Limit

Frequency range MHz	Quasi-peak limits dB (μV/m)		RBW kHz
30 to 88	40		120
88 to 216	43.5		120
216 to 960	46		120
960 to 1000	54		120
Frequency range MHz	Peak limits dB (μV/m)	Average limits dB (μV/m)	RBW MHz
Above 1000	74	54	1

At transitional frequencies the lower limit applies.

#### 5.1.2 Test Procedure

1. The test site, test set-up and test methods were according to ANSI C63.4-2014.
2. The EUT was placed on a non-metallic table 0.8m above the reference ground plane. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3m from the receiving antenna, which was mounted on a variable height antenna tower. The height range of tower was 1m to 4m.
4. A preliminary scan and a final scan of the emissions were made by using test script of software; The emissions were measured using quasi-peak detector (30M~1000MHz) and PK/AV detector (above 1GHz).
5. The maximal emission was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup.
6. The EUT was configured in the typical operating mode.

#### 5.1.3 Test Set-up

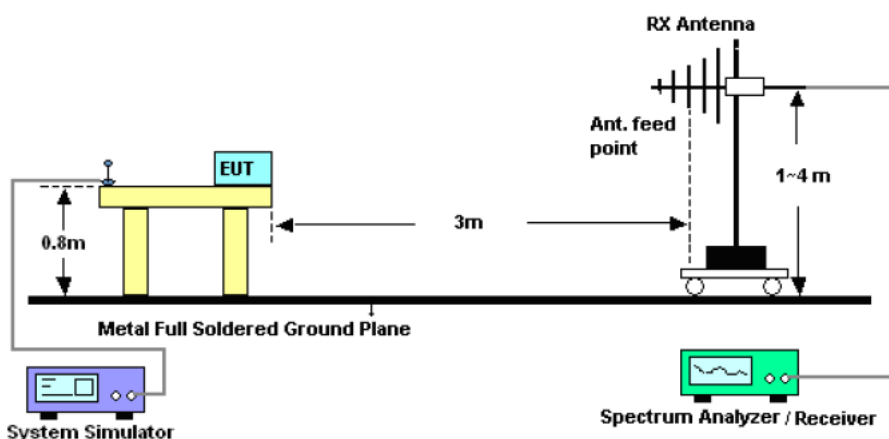


Figure.1 Test set-up of radiated emissions (30MHz~1000MHz)

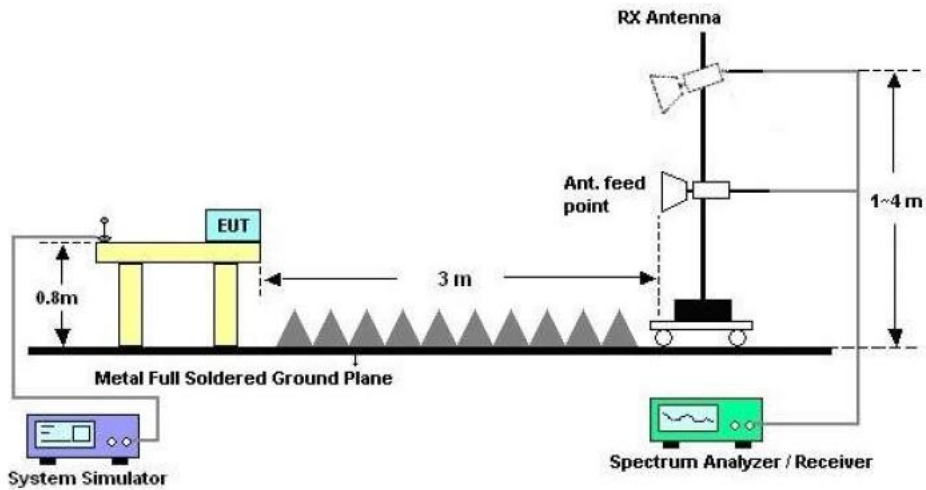


Figure.2 Test set-up of radiated emissions (above 1GHz)

#### 5.1.4 Test Results

The EUT has met the requirements for Radiated Emissions.

Test data refer to the section 8.1 of this report.

Only the worst test result was shown in this report.

**5.2 Conducted Emissions**

**5.2.1 Limit**

Frequency range MHz	Class B Limits dB (µV)		RBW kHz
	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	9
0.50 to 5	56	46	9
5 to 30	60	50	9

NOTE 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.  
NOTE 2: The lower limit is applicable at the transition frequency.

**5.2.2 Test Procedure**

1. The test site, test set-up and test methods were according to ANSI C63.4-2014.
2. The EUT was placed on a non-metallic table 0.8m above the reference ground plane.
3. The EUT was connected to LISN and LISN was connected to the reference ground plane. EUT was 80cm away from LISN.
4. A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using quasi-peak and average detector.
5. Conducted Emission at AC port measurements were undertaken on the L and N lines.
6. The EUT was configured in the typical operating mode.

**5.2.3 Test Set-up**

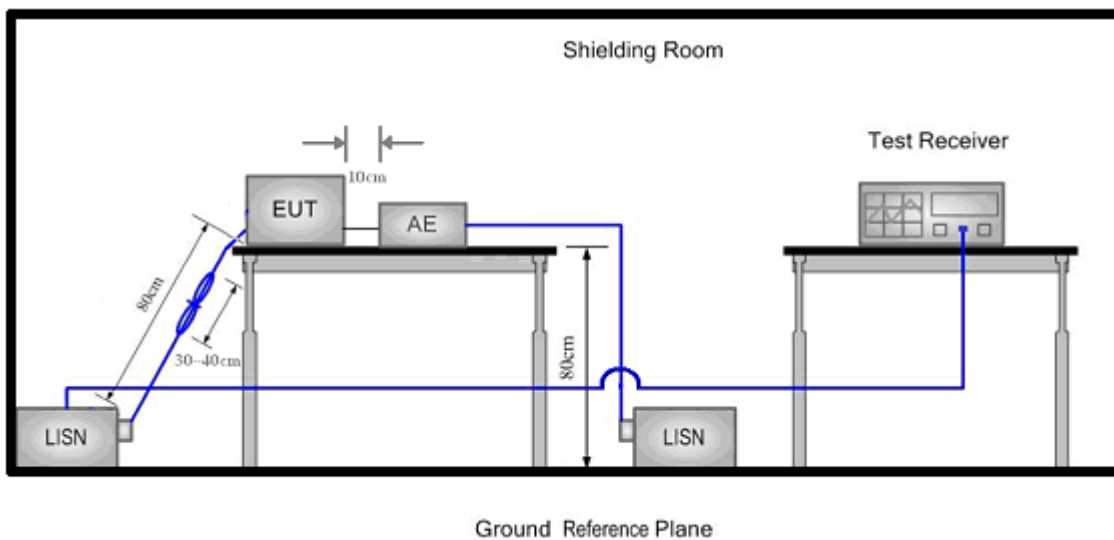


Figure.3 Test set-up of conducted emissions

**5.2.4 Test Results**

The EUT has met the requirements for Conducted Emissions. Test data refer to the section 8.2 of this report. Only the worst test result was shown in this report.

## 6. Test Equipment And Software

Main Test Equipments						
Test items	Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration interval (year)
RE	Double Ridged Horde Antenna	R&S	HF907	100545	2022/02/23	3
	Log-per.-Antenna	R&S	VULB9163	630	2022/02/22	2
	broadband Antenna	R&S	QWH-SL-18-40-K-SG	12004	2022/01/20	3
	EMI Test Receiver (30M~1GHz)	R&S	ESR7	101188	2023/07/14	1
	Signal Analyzer (Above 1GHz)	R&S	FSV40	100956	2022/12/26	1
CE	LISN	R&S	ENV216	101223	2023/07/14	1
	EMI Test Receiver	R&S	ESR7	101188	2023/07/14	1
Software Information						
Test Item	Software Name			Version		
RE	EMC32			V 10.40.10		
CE	EMC32			V 10.40.10		

## 7. System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:


Measurement Uncertainty		
Items	Extended Uncertainty	
RE(30MHz~1GHz)	Field strength(dB $\mu$ V/m)	U=5.8dB; k=2
RE(1GHz~18GHz)	Field strength(dB $\mu$ V/m)	U=4.9dB; k=2
RE(18GHz-40GHz)	Field strength(dB $\mu$ V/m)	U=5.1dB; k=2
CE(150kHz~30MHz)	Voltage(dB $\mu$ V)	U=3.3dB; k=2



## 8. Test Data

### 8.1 Radiated Emissions

30MHz~1GHz

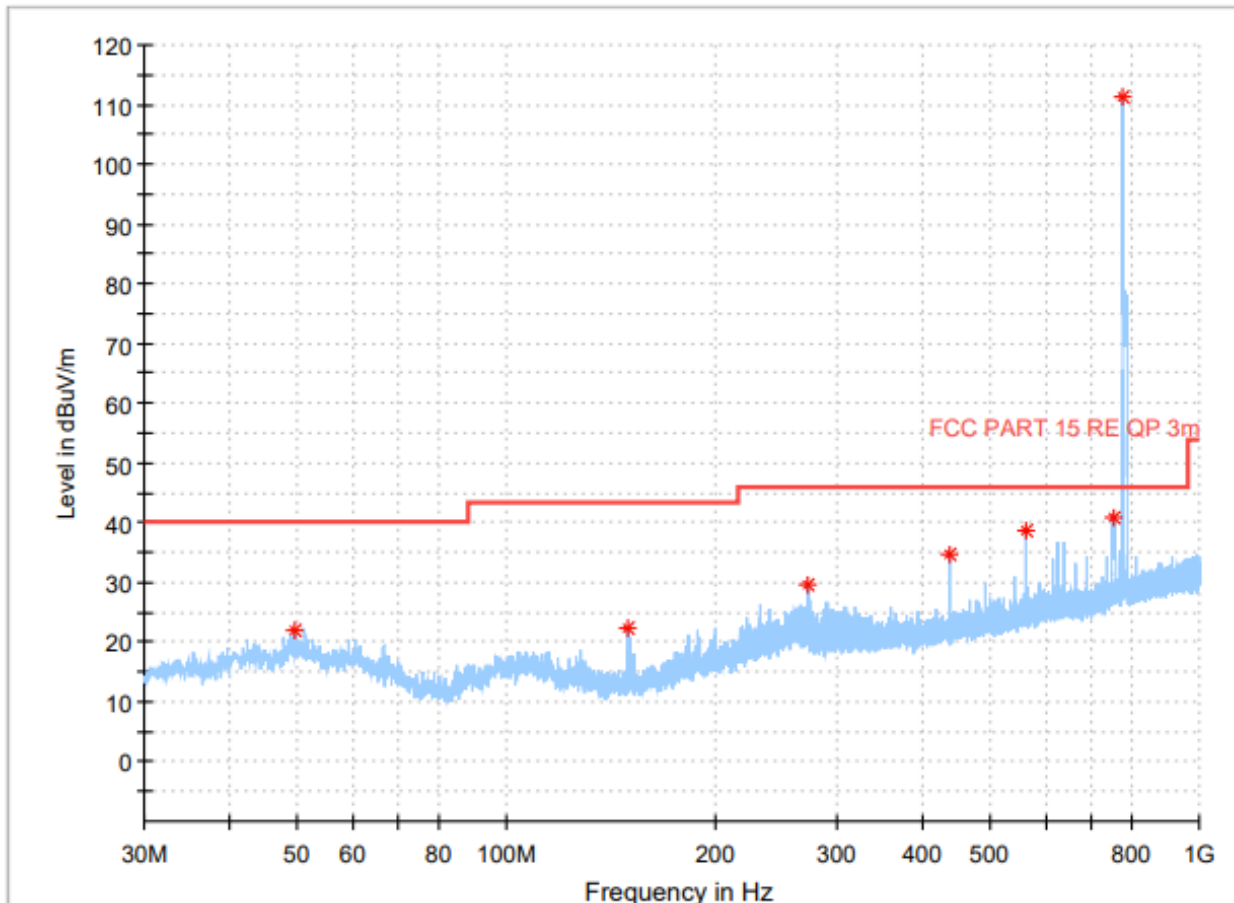

### Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
49.594000	21.98	40.00	18.02	---	V	0.0	20.4
149.310000	22.47	43.50	21.03	---	V	135.0	14.9
271.724000	29.53	46.00	16.48	---	H	90.0	20.1
437.545500	34.81	46.00	11.19	---	V	135.0	23.7
562.530000	38.74	46.00	7.26	---	V	225.0	26.1
752.553000	40.96	46.00	5.04	---	H	45.0	29.1
777.579000	111.30	46.00	-65.30	---	V	90.0	29.1


Remark: 777.579MHz is RF signal which can be ignored.

Note:

Level = Reading level by receiver + Corr. (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

1GHz~40GHz

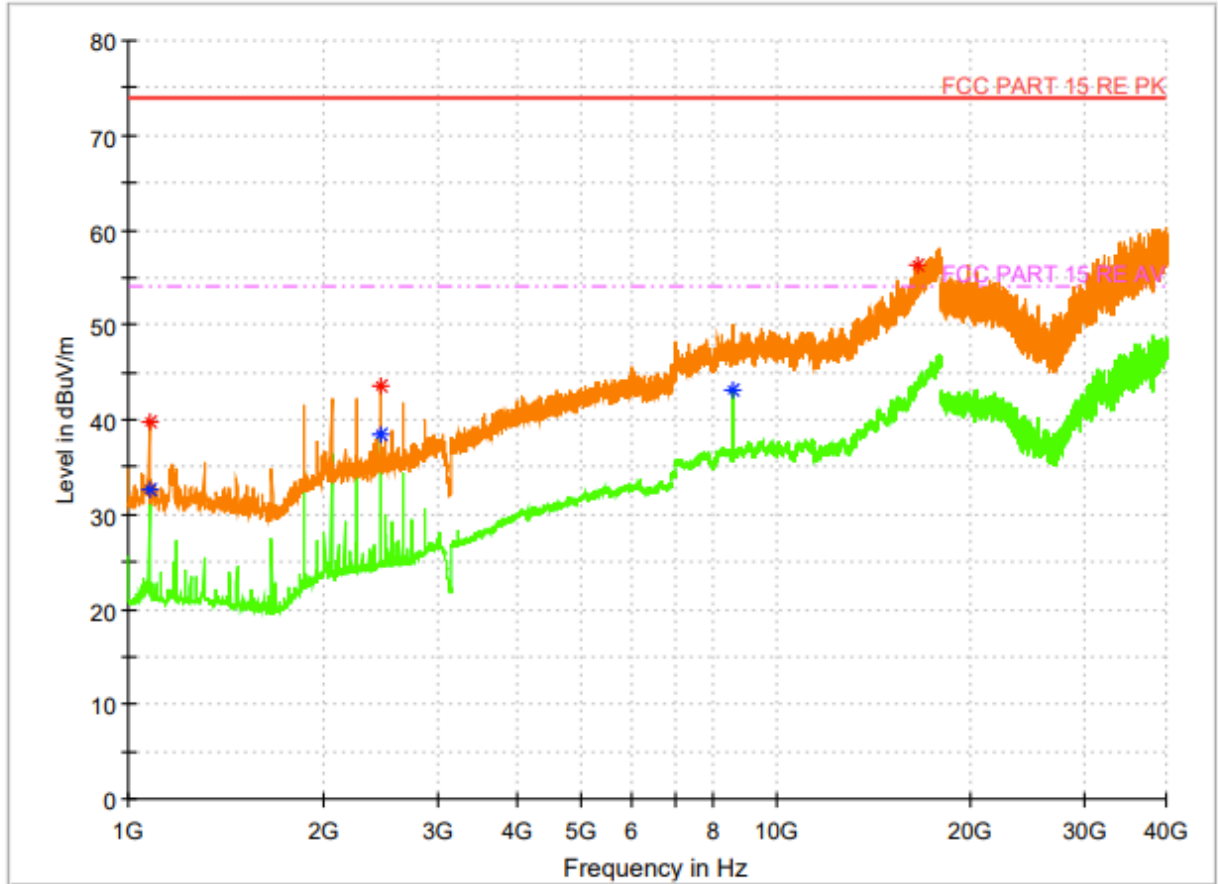


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
1079.900000	---	32.57	54.00	21.43	---	V	0.0	-14.3
1079.900000	39.80	---	74.00	34.20	---	V	45.0	-14.3
2453.500000	---	38.39	54.00	15.61	---	H	315.0	-8.3
2453.500000	43.50	---	74.00	30.50	---	H	315.0	-8.3
8587.100000	---	43.14	54.00	10.86	---	V	0.0	3.3
16578.800000	56.33	---	74.00	17.67	---	V	225.0	11.0

Level =Reading level by receiver + Corr. (Antenna factor + cable loss – preamplifier gain)  
 The reading level is calculated by software which is not shown in the sheet.

**8.2 Conducted Emissions**

AC Port Test Data

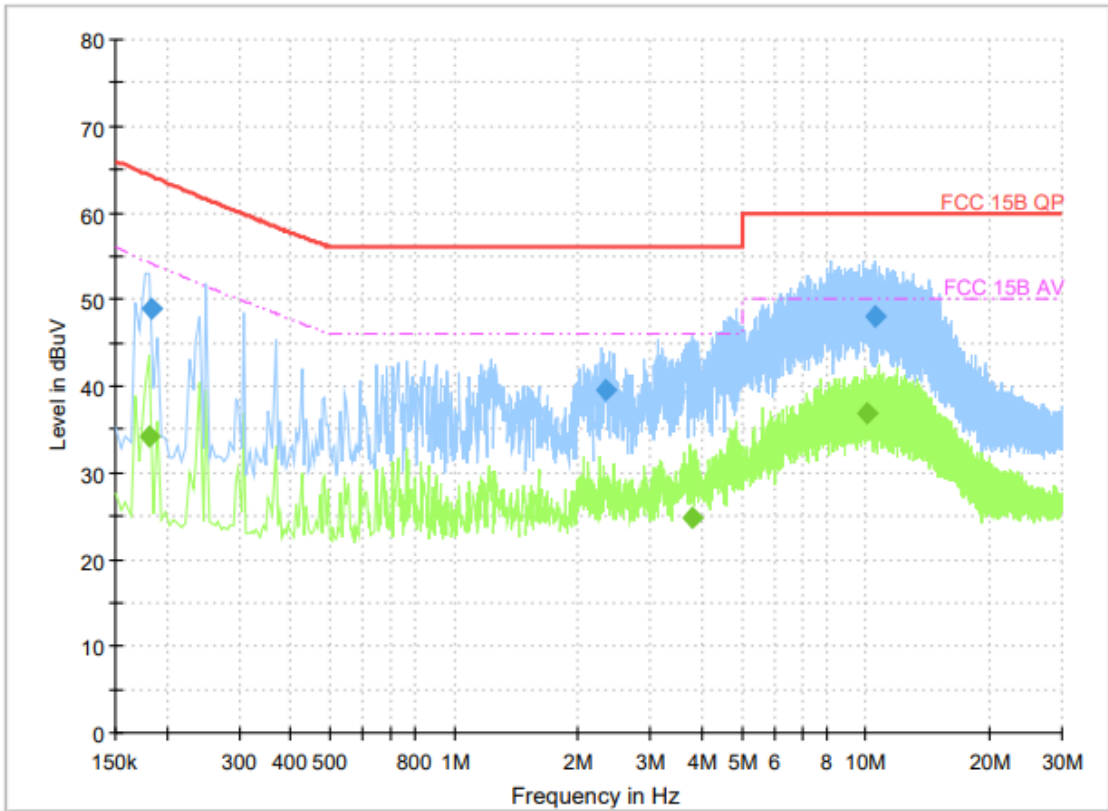

**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.182454	---	34.27	54.24	19.97	9.000	L1	ON	9.9
0.183500	48.83	---	64.21	15.38	9.000	N	ON	9.8
2.342727	39.51	---	56.00	16.49	9.000	L1	ON	9.9
3.805477	---	24.84	46.00	21.16	9.000	L1	ON	10.0
10.056068	---	36.76	50.00	13.24	9.000	L1	ON	10.2
10.557568	48.07	---	60.00	11.93	9.000	L1	ON	10.2

Note:

Level =Reading level by receiver + Corr. (cable loss+ insertion loss)

The reading level is calculated by software which is not shown in the sheet.