



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2429-1
FCC ID : IHDT56AR4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Feb. 03, 2024 ~ Feb. 23, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

1.1 Applicant5

1.2 Manufacturer.....5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification of Equipment Under Test.....5

1.5 Modification of EUT6

1.6 Testing Location6

1.7 Test Software.....6

1.8 Applicable Standards.....7

1.9 Specification of Accessory.....7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8

2.1 Carrier Frequency Channel8

2.2 Test Mode.....9

2.3 Connection Diagram of Test System.....10

2.4 Support Unit used in test configuration and system11

2.5 EUT Operation Test Setup11

2.6 Measurement Results Explanation Example.....11

3 TEST RESULT12

3.1 Number of Channel Measurement12

3.2 Hopping Channel Separation Measurement13

3.3 Dwell Time Measurement.....14

3.4 20dB and 99% Bandwidth Measurement15

3.5 Output Power Measurement.....16

3.6 Conducted Band Edges Measurement.....17

3.7 Conducted Spurious Emission Measurement18

3.8 Radiated Band Edges and Spurious Emission Measurement19

3.9 AC Conducted Emission Measurement.....23

3.10 Antenna Requirements.....25

4 LIST OF MEASURING EQUIPMENT.....26

5 MEASUREMENT UNCERTAINTY27

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR411904A	Rev. 01	Initial issue of report	Mar. 11, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.58 dB at 56.190 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.33 dB at 0.206 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2429-1
FCC ID	IHDT56AR4
IMEI Code	Conducted: 356305710036859/356305710036867 Conduction: 356305710030753/356305710030761 Radiation: 356305710030779/356305710030787
HW Version	DVT2
SW Version	U2UU34.8
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 11.97 dBm (0.0157 W) Bluetooth EDR (2Mbps) : 12.96 dBm (0.0198 W) Bluetooth EDR (3Mbps) : 13.13 dBm (0.0206 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.836 MHz Bluetooth EDR (2Mbps) : 1.178 MHz Bluetooth EDR (3Mbps) : 1.166 MHz
Antenna Type / Gain	IFA Antenna type with gain -7.2 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π/4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH05-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola (chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola (chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola (chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola (chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola (chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola (chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola (chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola(Acbel)	Model Name	MC-687N
AC Adapter 2(IN)	Brand Name	Motorola(Acbel)	Model Name	MC-684N
Battery 1	Brand Name	Motorola (ATL)	Model Name	QC50
Battery 2	Brand Name	Motorola(SCUD)	Model Name	QC50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SLQ-A248A
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	S928E13829
USB Cable 3	Brand Name	Motorola (Saibao)	Model Name	SLQ-A248A



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π/4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 2 (Charging From Adaptor 2)		
Remark: 1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission. 2. For Radiated Test Cases, The tests were performed with Adapter1 and USB Cable1 .			

2.3 Connection Diagram of Test System

AC Conducted Emission:

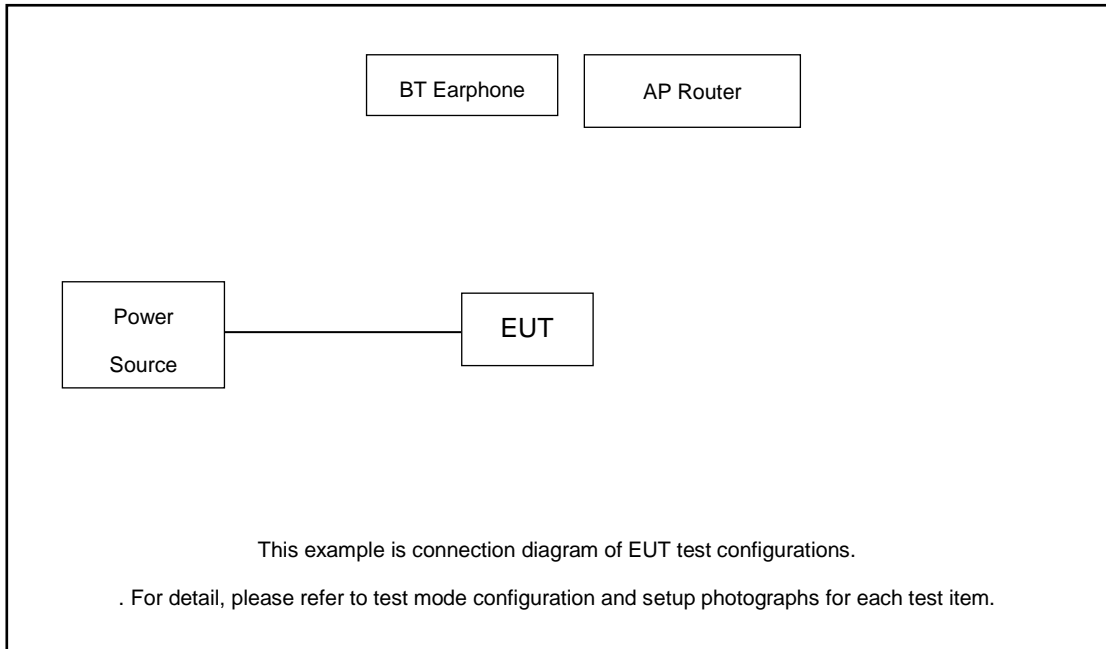

Radiated Emission:

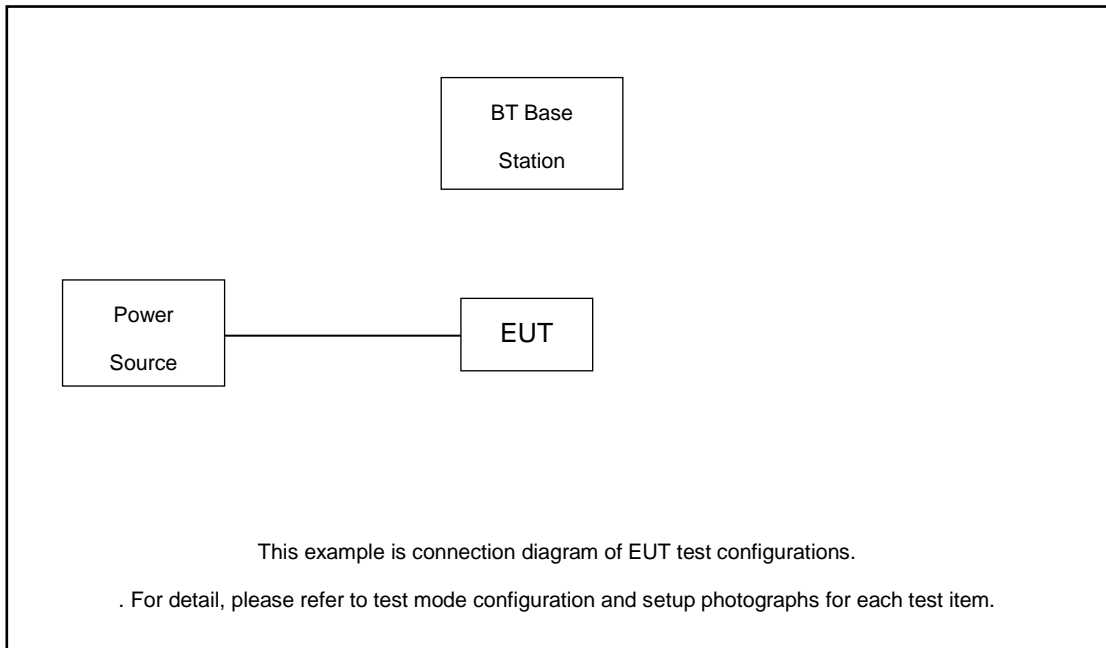



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.86 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\
 &= 1.86 + 10 = 11.86 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

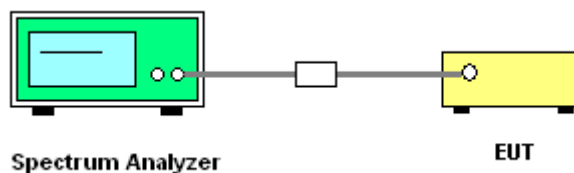

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

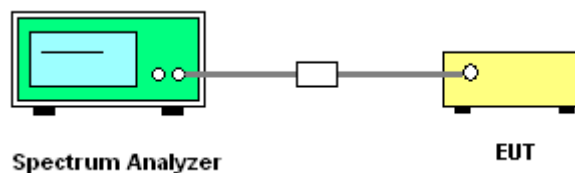

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

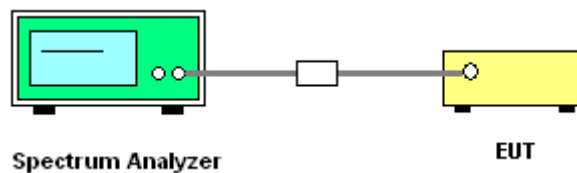

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

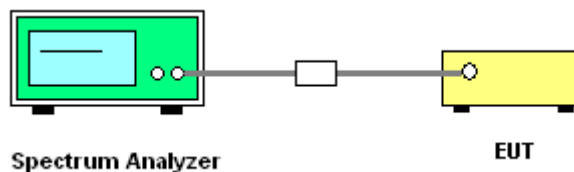

3.4.5 Test Result of 20dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

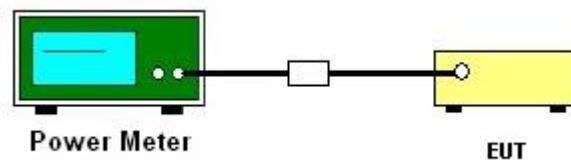

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup



3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup



3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

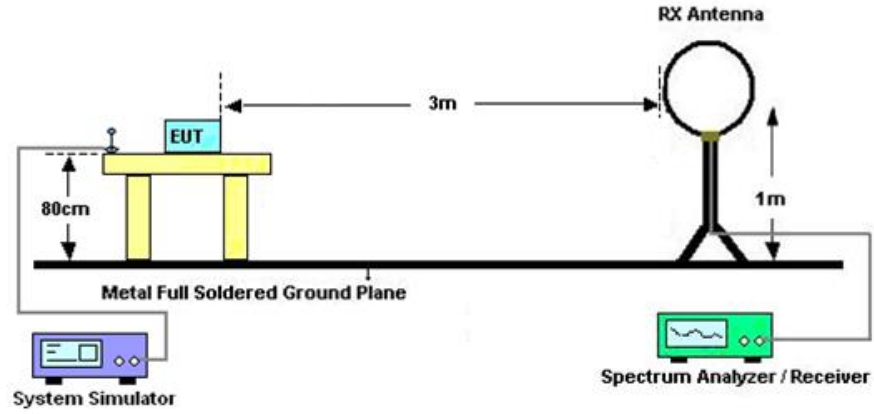

For radiated emissions from 30MHz to 1GHz

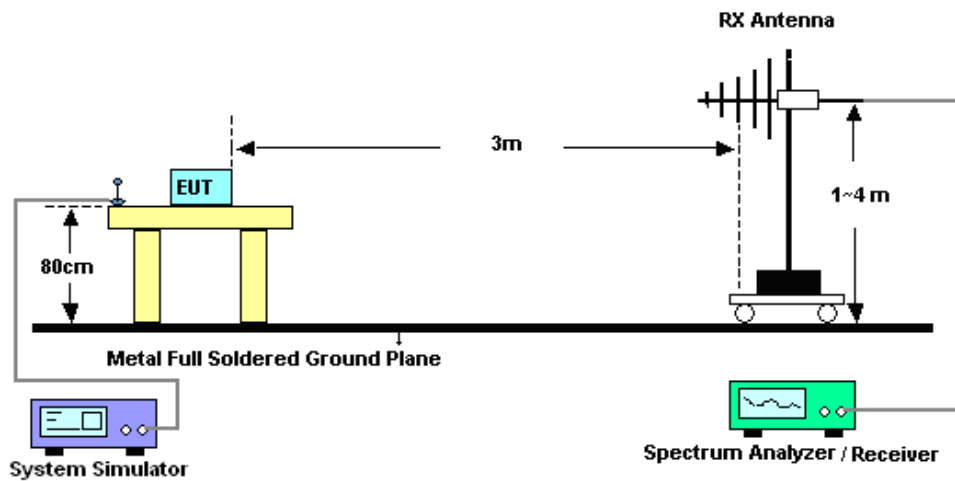

For radiated emissions above 1GHz

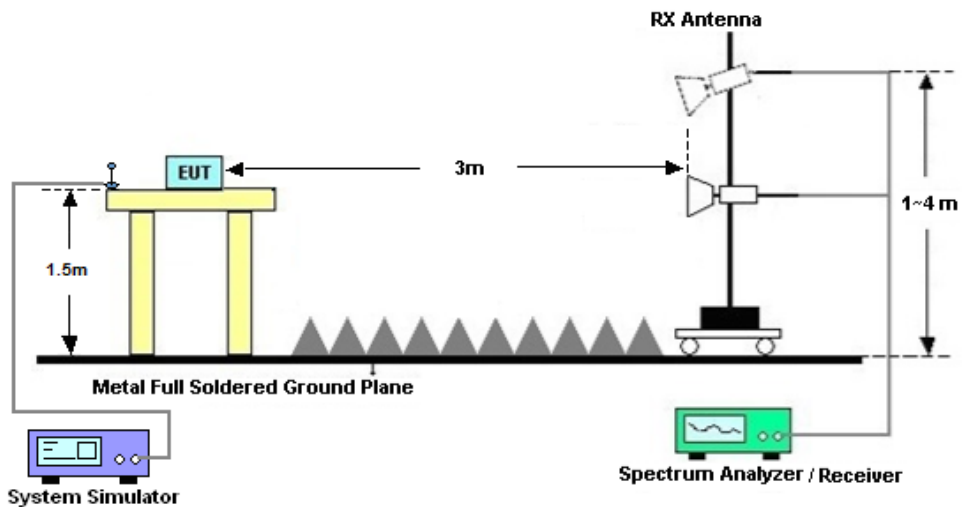



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

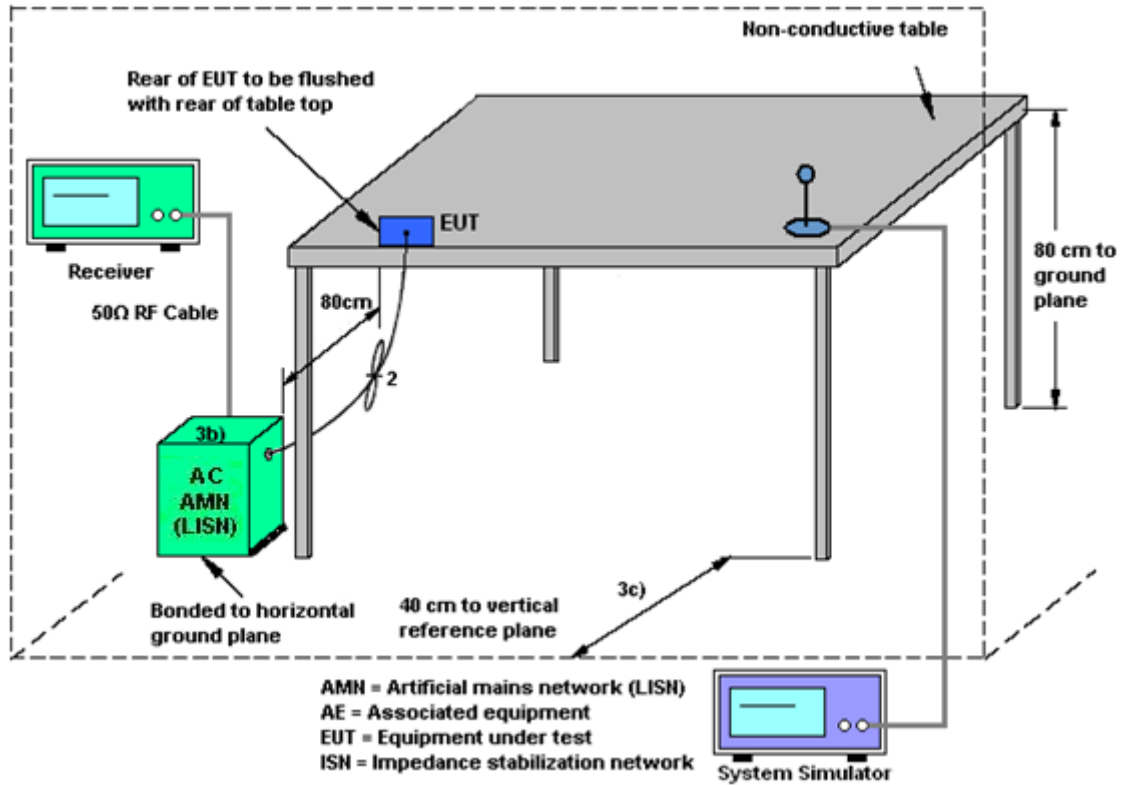

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2023	Feb. 23, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar. 24, 2023	Feb. 23, 2024	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Feb. 23, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	Feb. 23, 2024	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Feb. 23, 2024	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2024	Feb. 23, 2024	Jan. 04, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 06, 2023	Feb. 23, 2024	Jul. 05, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2024	Feb. 23, 2024	Jan. 04, 2025	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 10, 2023	Feb. 23, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 03, 2024	Feb. 23, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 23, 2024	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 23, 2024	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 23, 2024	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Feb. 22, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Feb. 22, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Feb. 22, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Feb. 22, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Feb. 03, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Feb. 03, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Feb. 03, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---------------------------------------------------------------------	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH	
Test Date: <u>2024.2.3</u>	Test Engineer: <u>Jiang Jun</u>


20dB Emission Bandwidth



Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]
DH5	Ant6	2402	0.94	2401.54	2402.48
		2441	0.94	2440.54	2441.48
		2480	0.94	2479.54	2480.48
2DH1	Ant6	2402	1.28	2401.35	2402.63
		2441	1.28	2440.35	2441.63
		2480	1.28	2479.35	2480.63
3DH1	Ant6	2402	1.23	2401.40	2402.64
		2441	1.23	2440.40	2441.64
		2480	1.24	2479.40	2480.64




Test Graphs

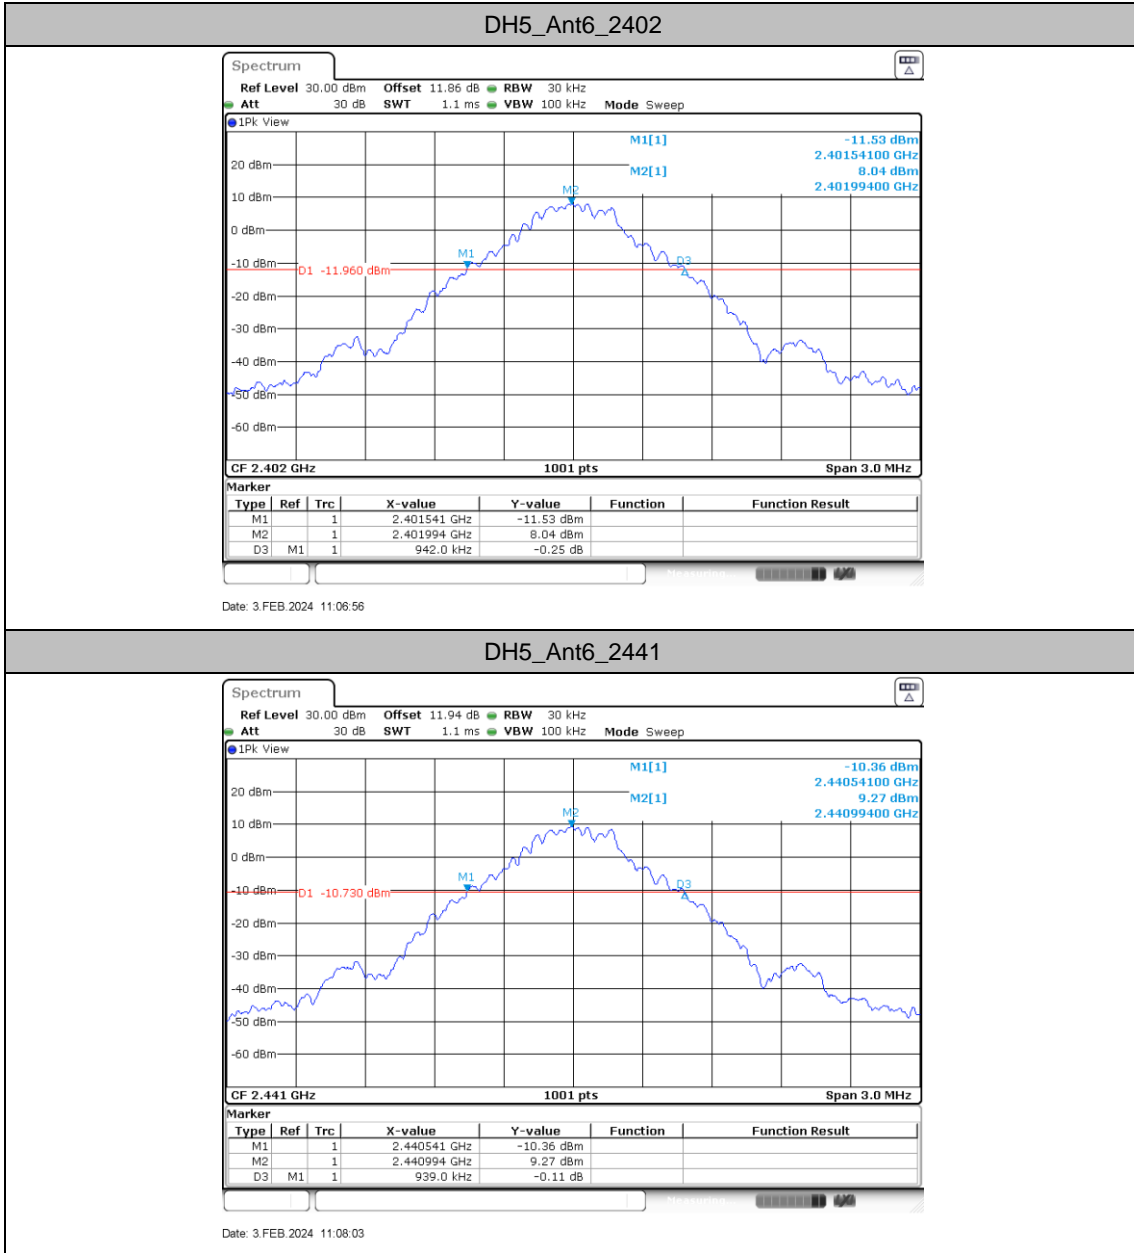

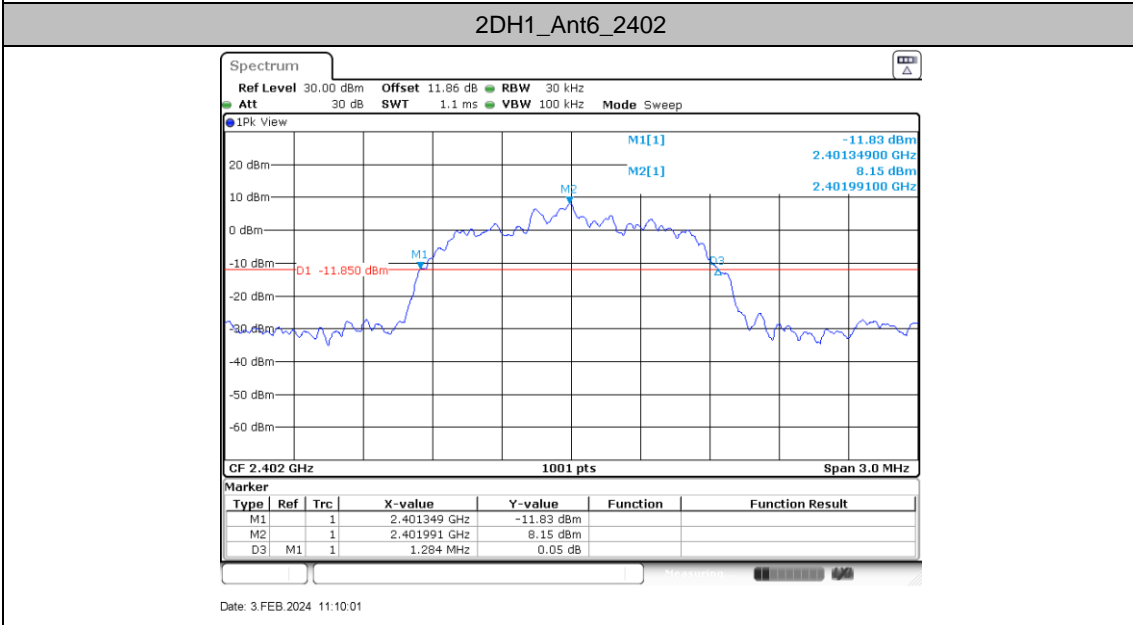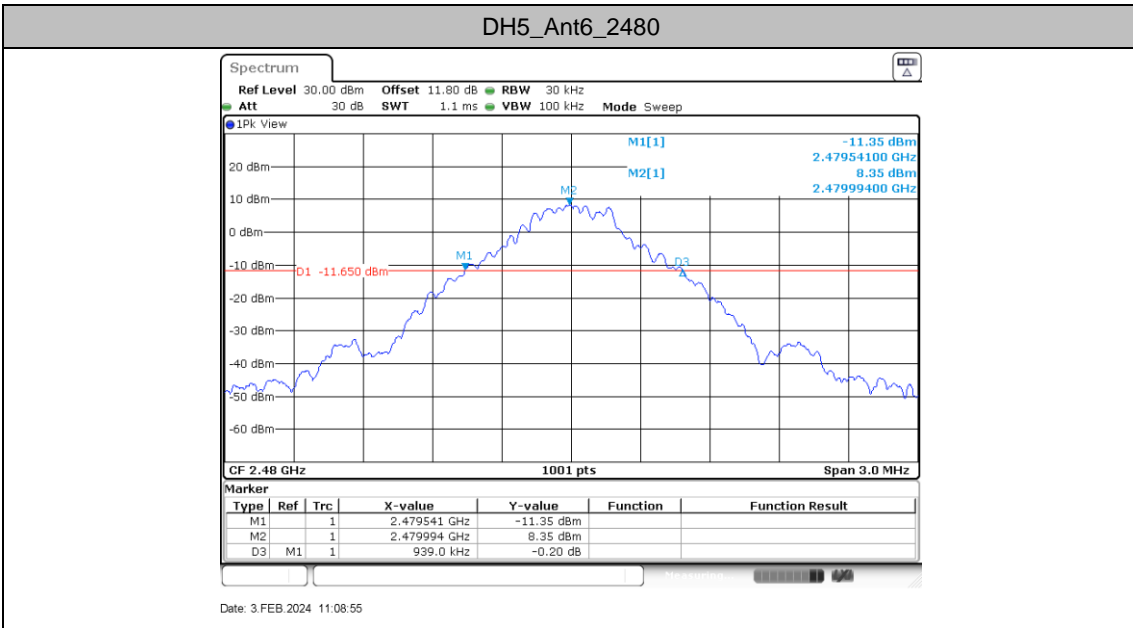




2DH1_Ant6_2441

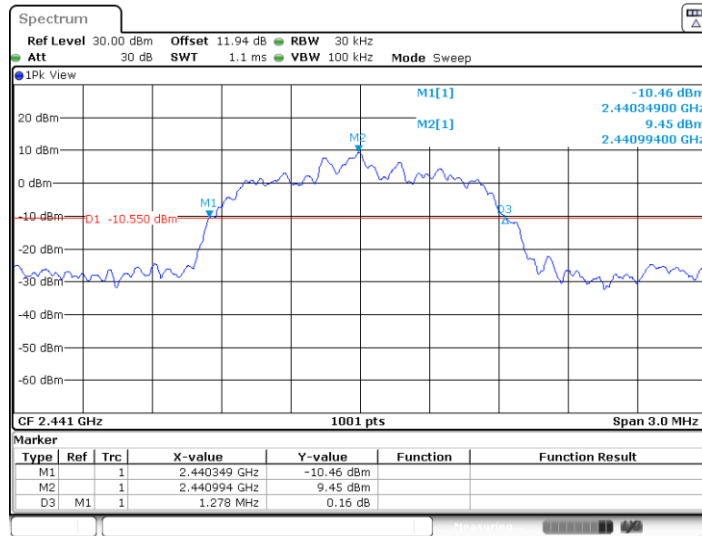

Date: 3.FEB.2024 11:11:06


2DH1_Ant6_2480

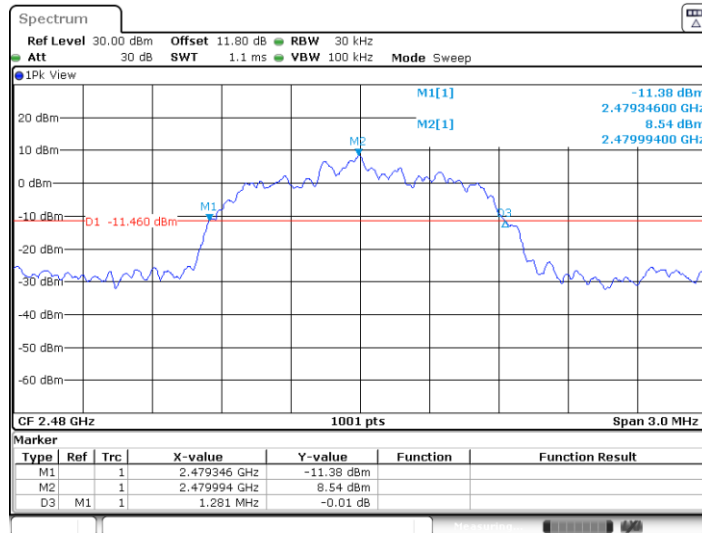

Date: 3.FEB.2024 11:11:59




3DH1_Ant6_2402

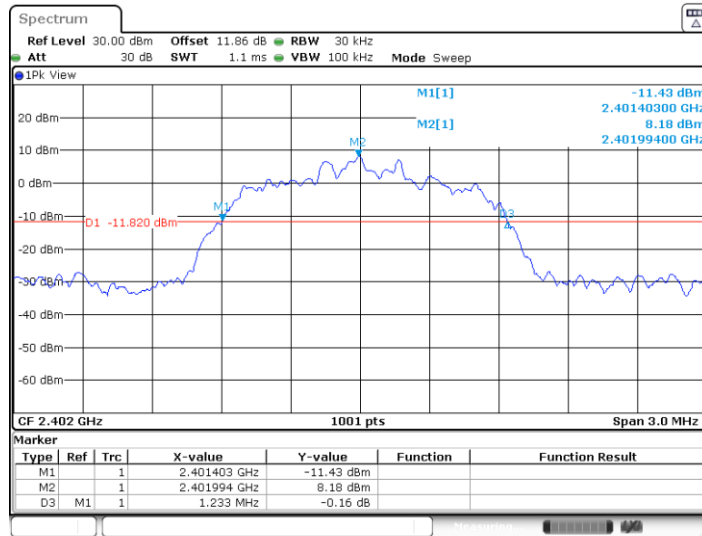


Date: 3.FEB.2024 11:13:04

3DH1_Ant6_2441

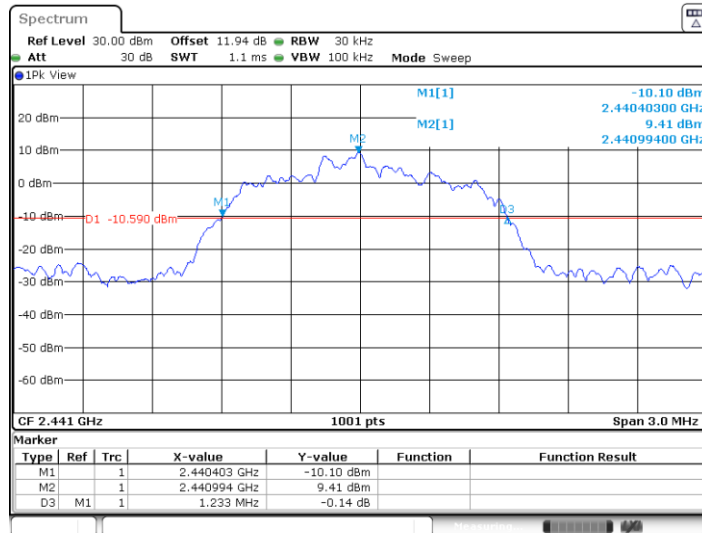

Date: 3.FEB.2024 11:14:10

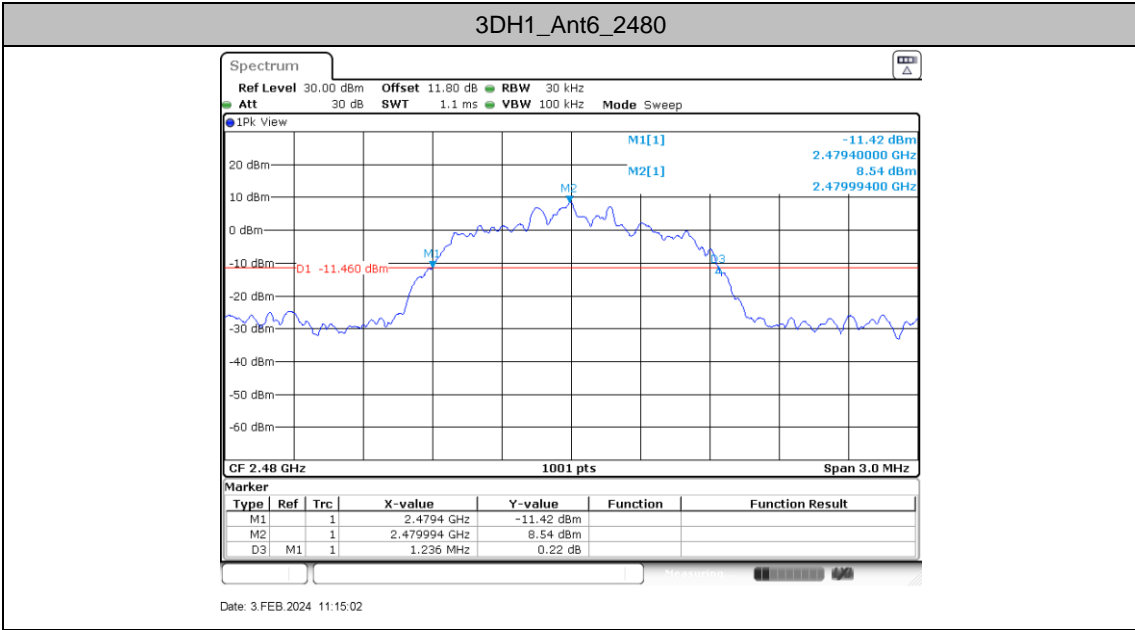




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant6	2402	0.836	2401.5834	2402.4196
		2441	0.833	2440.5834	2441.4166
		2480	0.83	2479.5834	2480.4136
2DH1	Ant6	2402	1.172	2401.4096	2402.5814
		2441	1.178	2440.4066	2441.5844
		2480	1.178	2479.4066	2480.5844
3DH1	Ant6	2402	1.157	2401.4396	2402.5964
		2441	1.166	2440.4336	2441.5994
		2480	1.166	2479.4336	2480.5994




Test Graphs

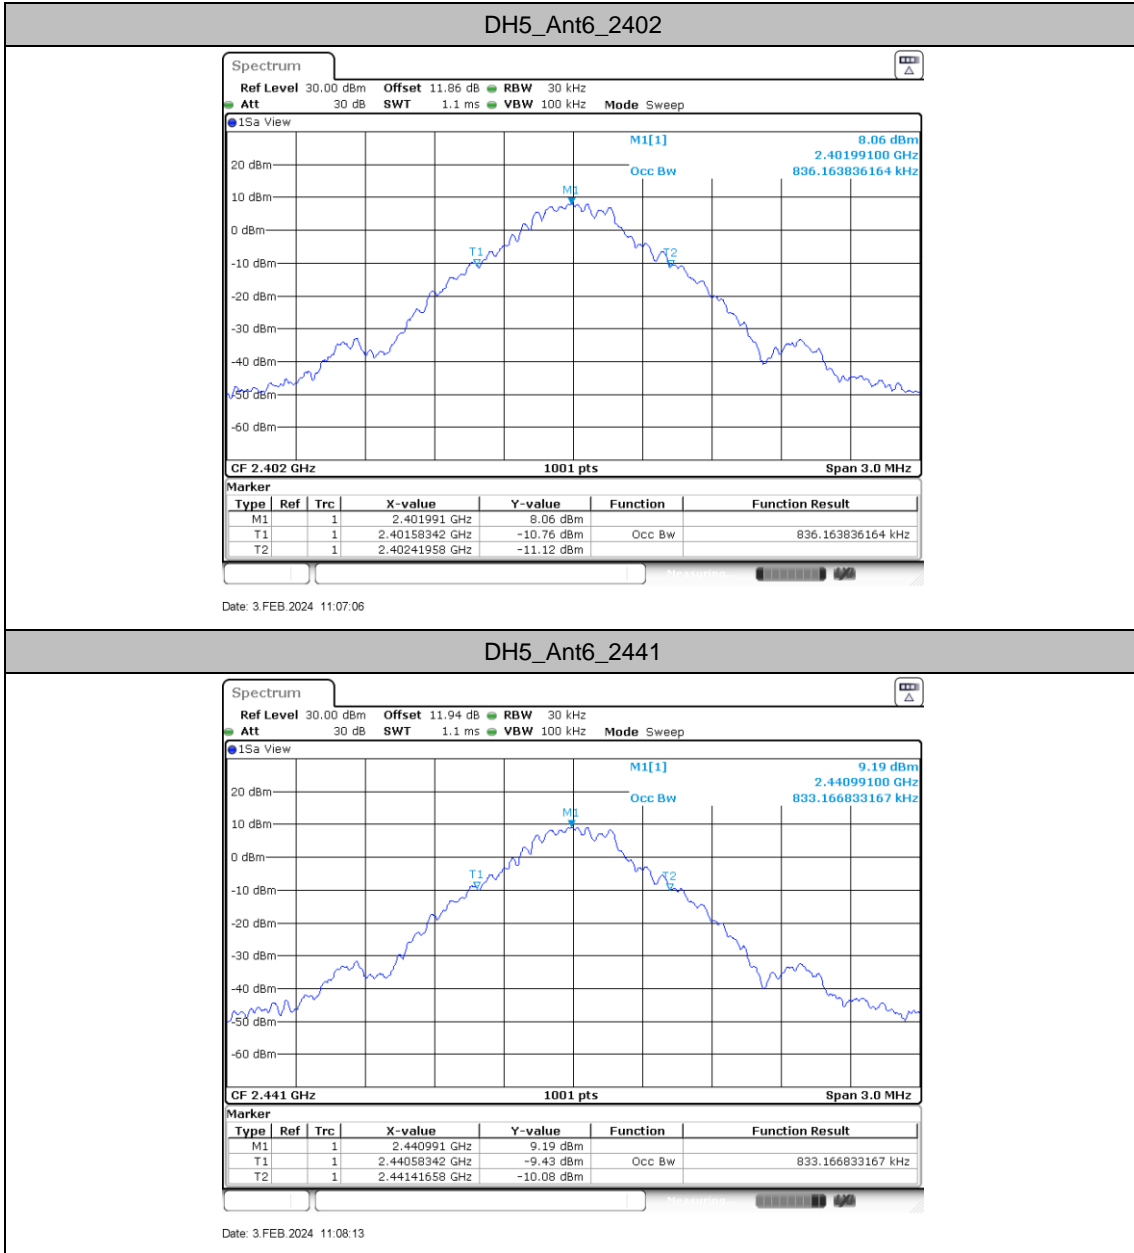




DH5_Ant6_2480

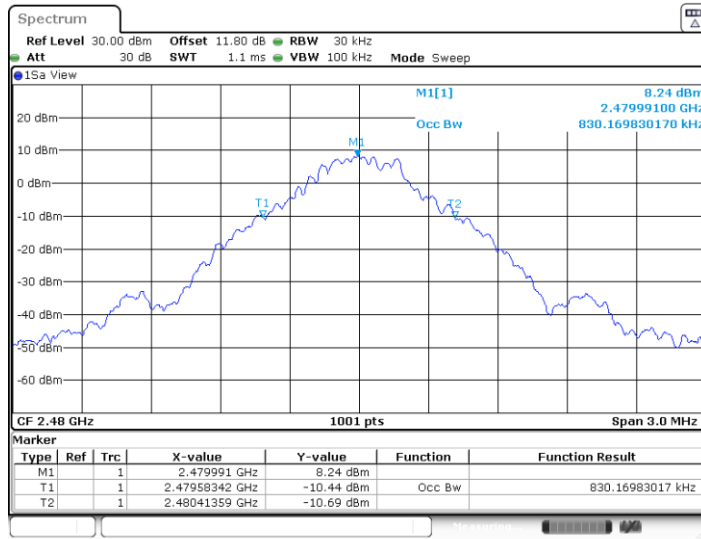

Date: 3.FEB.2024 11:09:05


2DH1_Ant6_2402

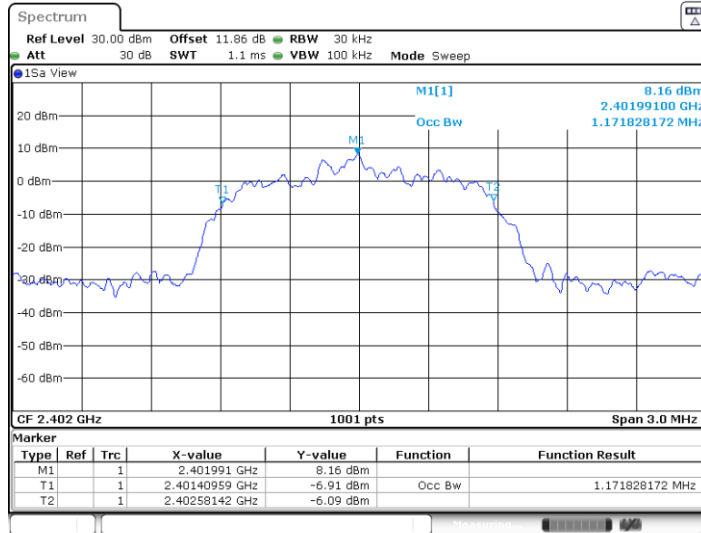

Date: 3.FEB.2024 11:10:10




2DH1_Ant6_2441

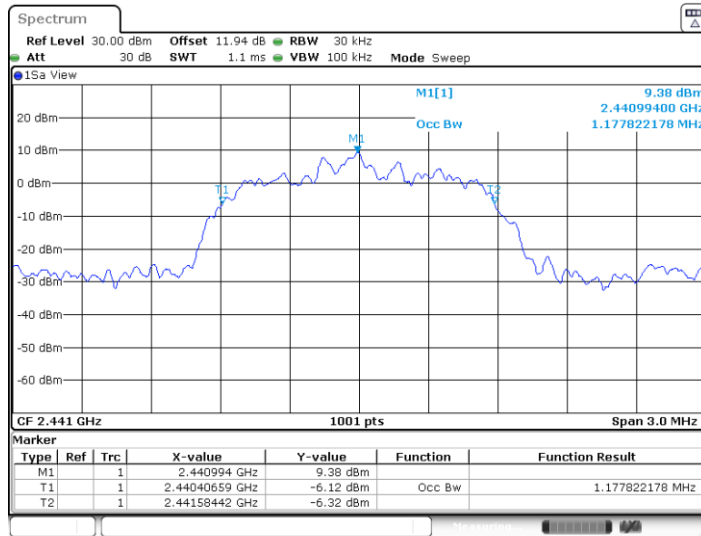

Date: 3.FEB.2024 11:11:16


2DH1_Ant6_2480

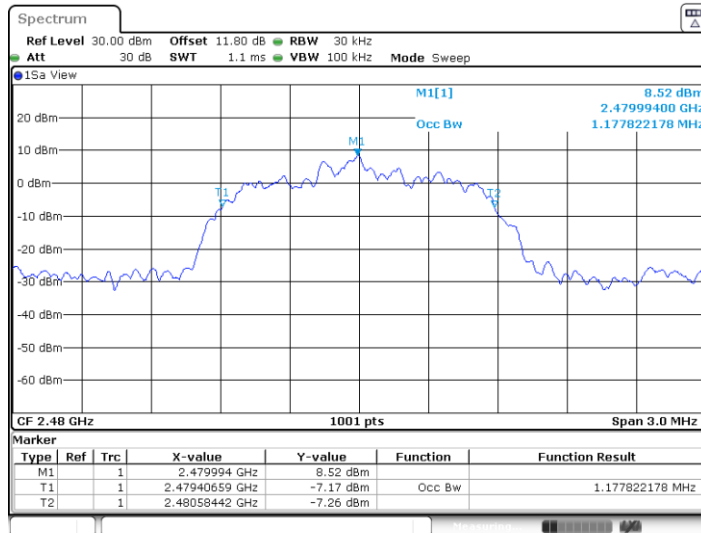

Date: 3.FEB.2024 11:12:08




3DH1_Ant6_2402

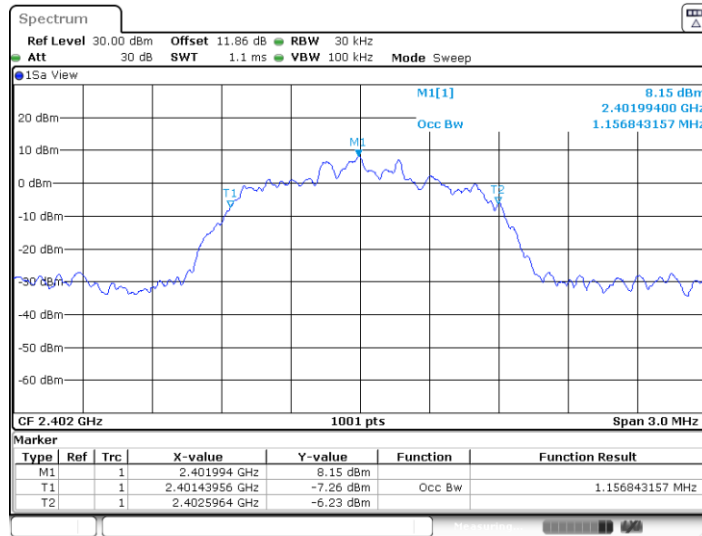


Date: 3.FEB.2024 11:13:14

3DH1_Ant6_2441

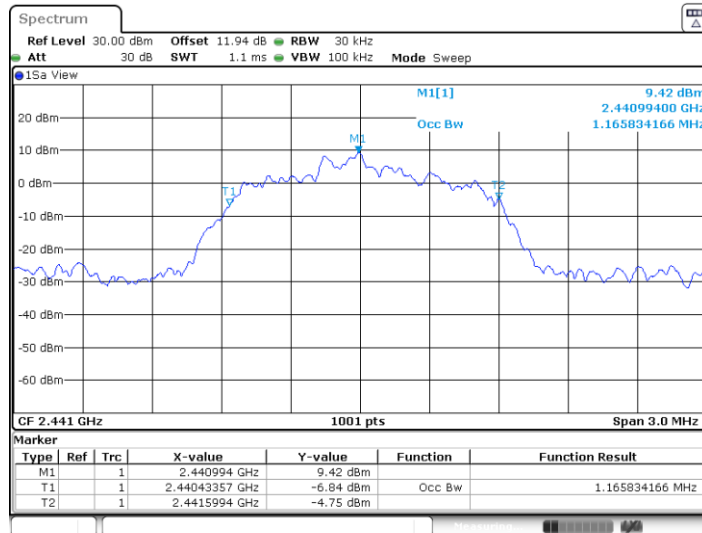

Date: 3.FEB.2024 11:14:20

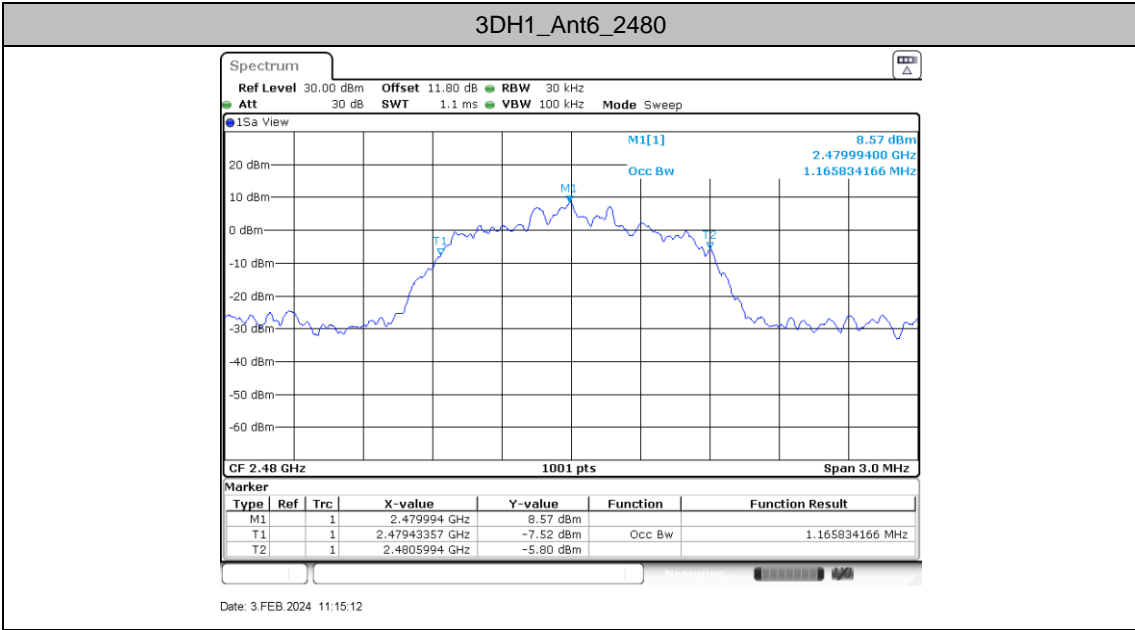



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Power (dBm)	Power Limit (dBm)	Pass/Fail
DH5	Ant6	0	10.75	20.97	Pass
		39	11.97	20.97	Pass
		78	11.14	20.97	Pass
2DH5	Ant6	0	11.91	20.97	Pass
		39	12.96	20.97	Pass
		78	12.12	20.97	Pass
3DH5	Ant6	0	12.11	20.97	Pass
		39	13.13	20.97	Pass
		78	12.29	20.97	Pass




Carrier frequency separation



Test Result

TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant6	2402	1.004	≥ 0.627	PASS
		2441	1	≥ 0.627	PASS
		2480	0.996	≥ 0.627	PASS
2DH1	Ant6	2402	0.996	≥ 0.853	PASS
		2441	0.996	≥ 0.853	PASS
		2480	1.004	≥ 0.853	PASS
3DH1	Ant6	2402	1.004	≥ 0.820	PASS
		2441	1.004	≥ 0.820	PASS
		2480	1	≥ 0.827	PASS




Test Graphs

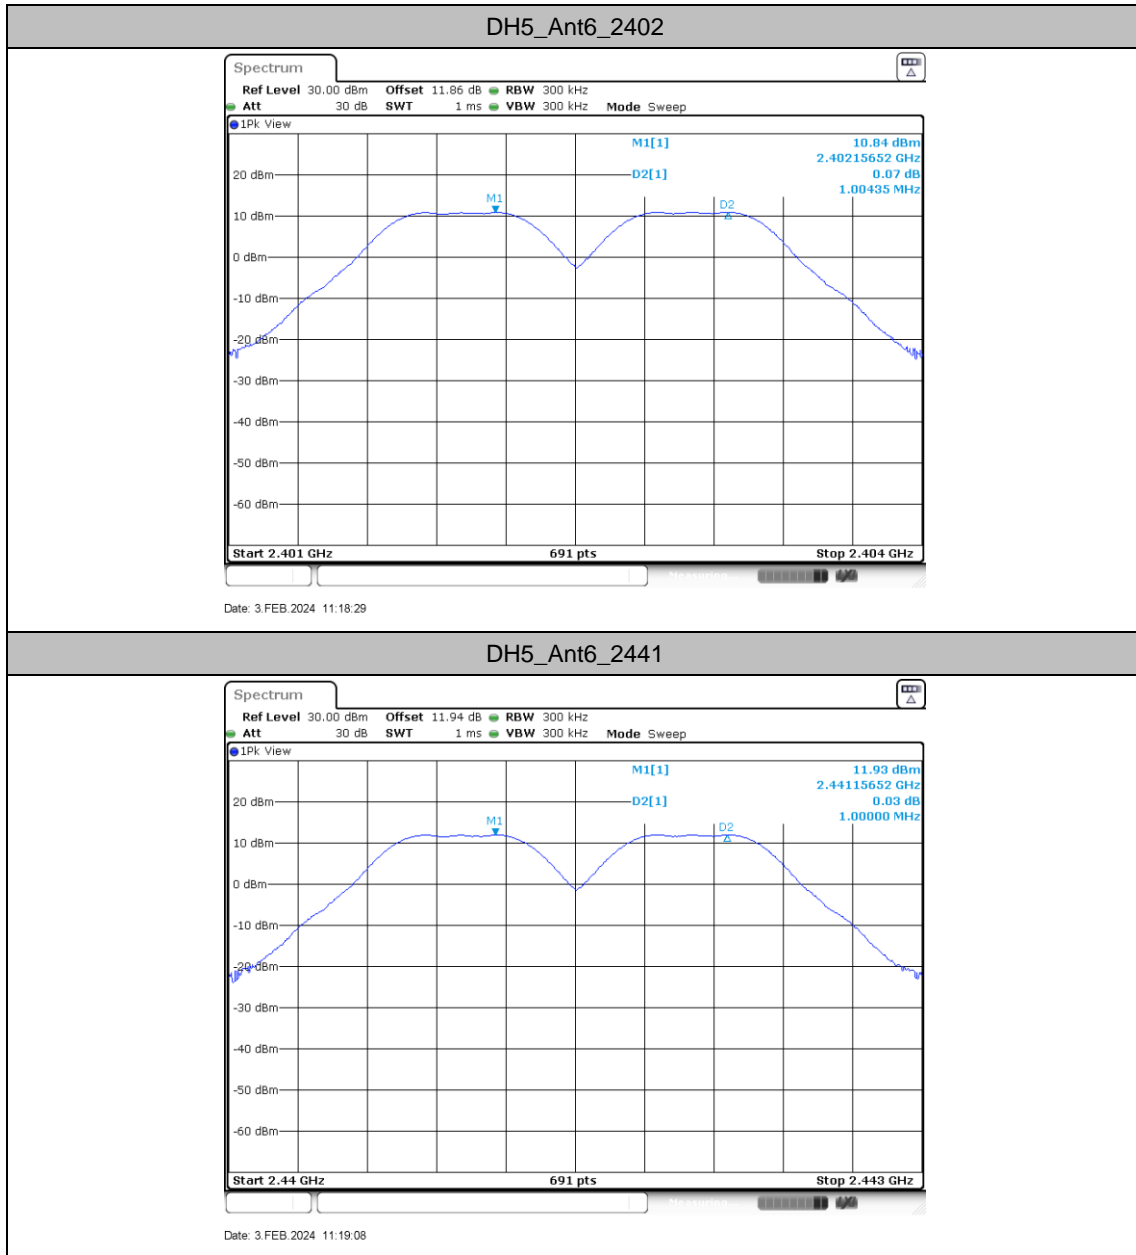

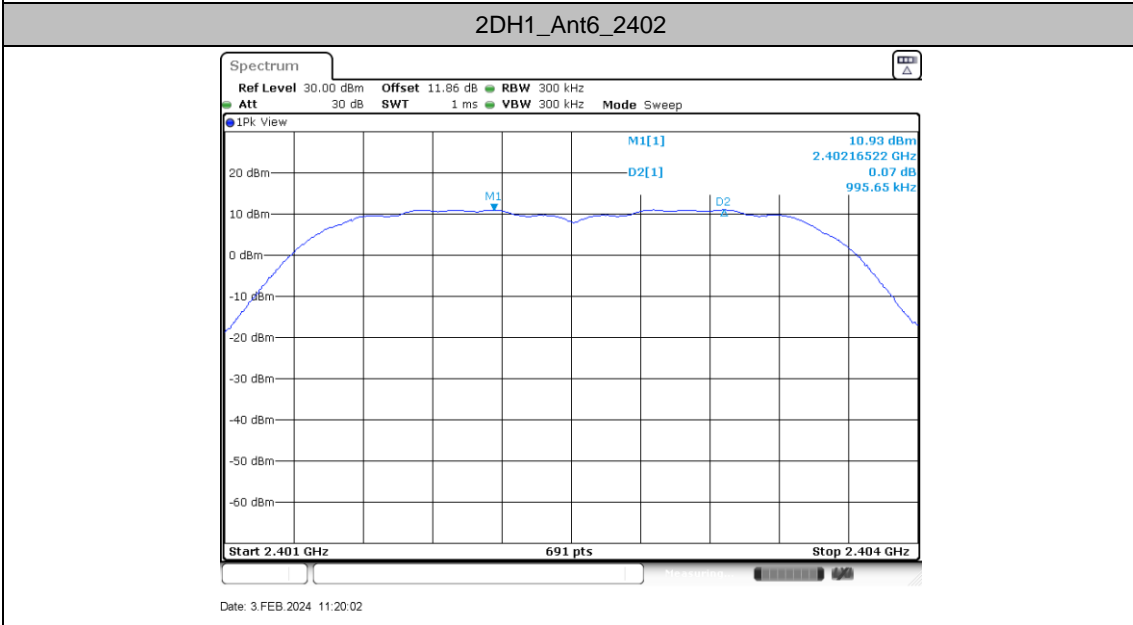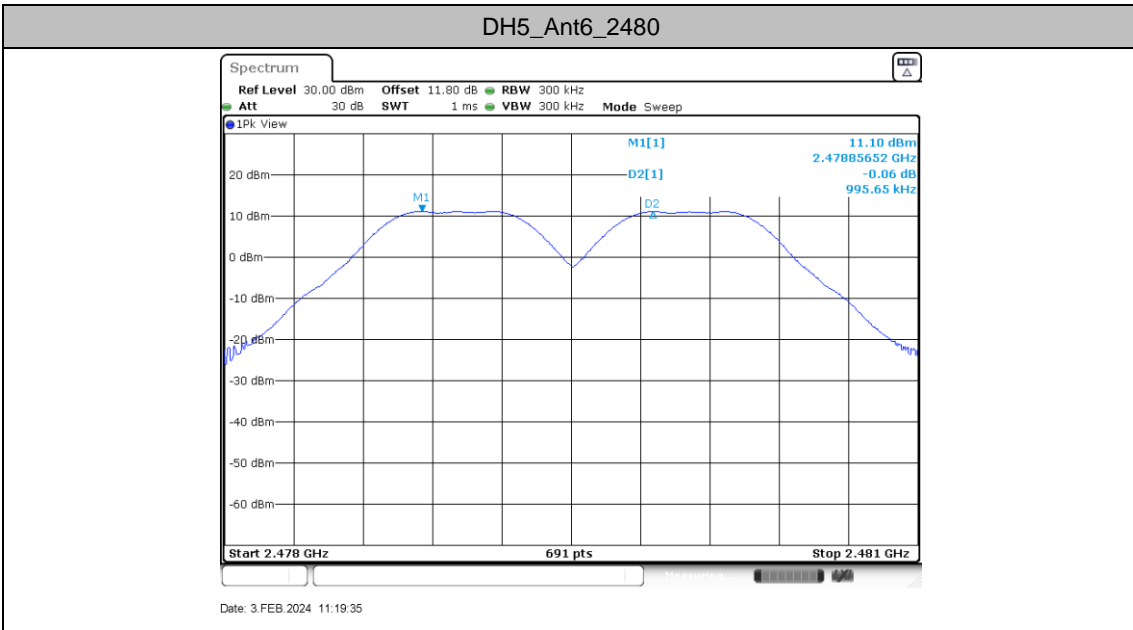




2DH1_Ant6_2441

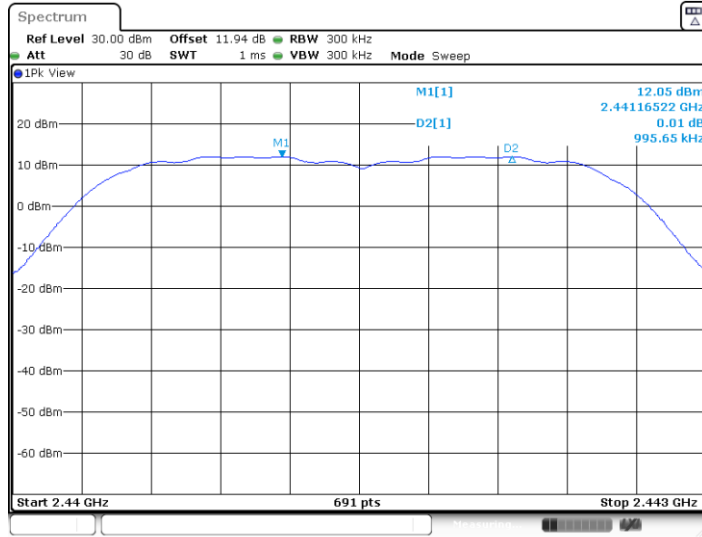

Date: 3.FEB.2024 11:20:32


2DH1_Ant6_2480

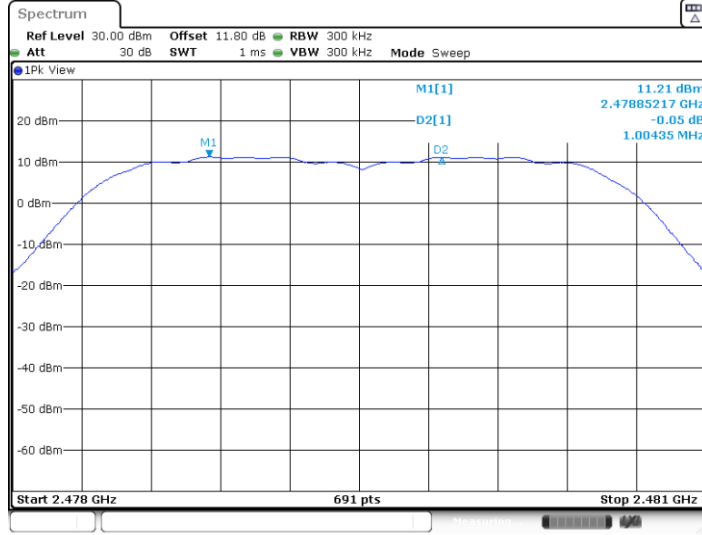

Date: 3.FEB.2024 11:21:01




3DH1_Ant6_2402

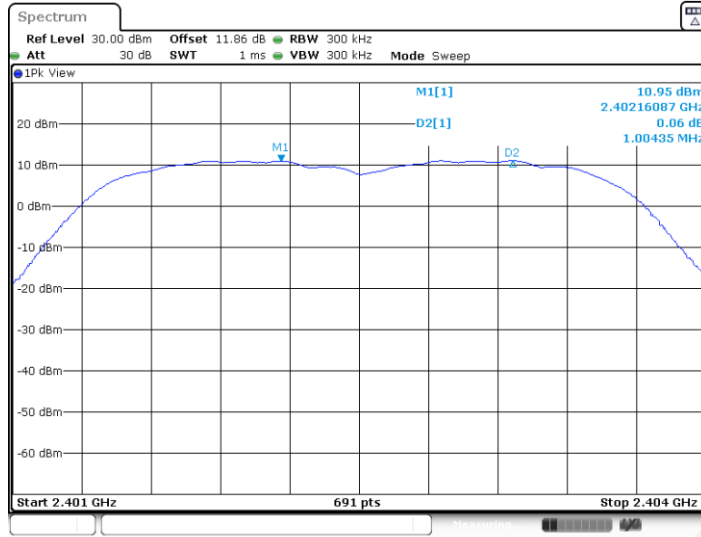


Date: 3.FEB.2024 11:21:28

3DH1_Ant6_2441

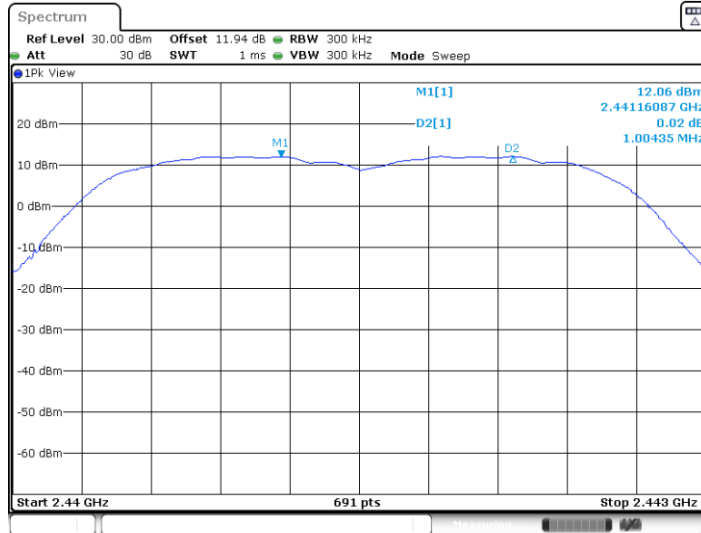

Date: 3.FEB.2024 11:21:56

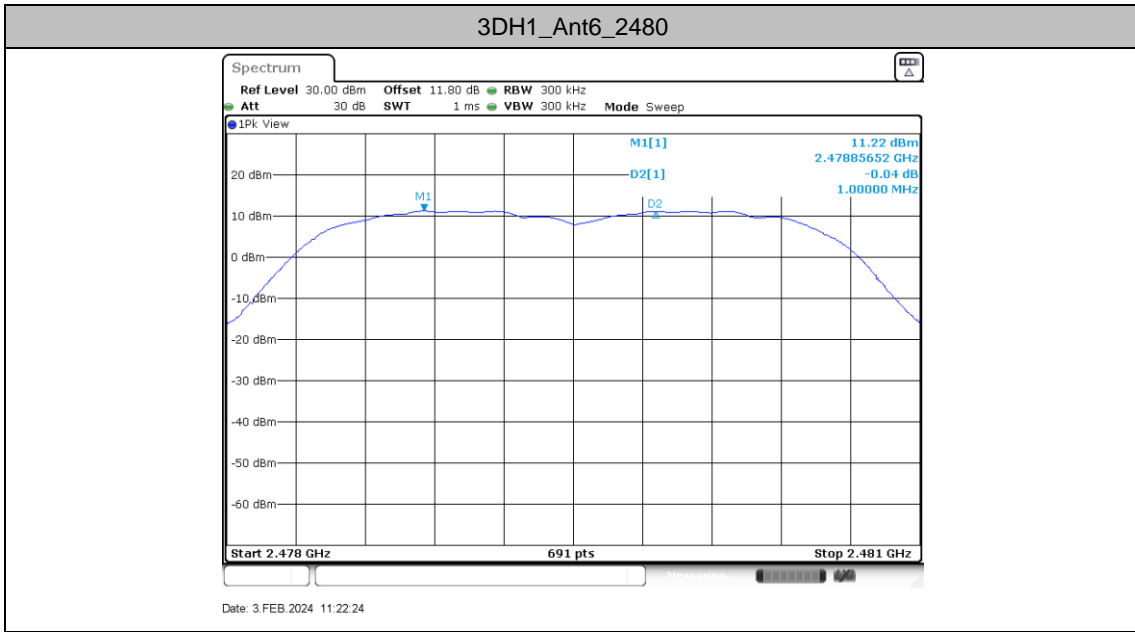



Time of occupancy

Test Result

TestMode	Antenna	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	Ant6	79	106.67	2.8899	0.31	0.4	Pass
AFH	Ant6	20	53.33	2.8899	0.15	0.4	Pass




Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant6	Hop	79	≥15	PASS

Test Graphs

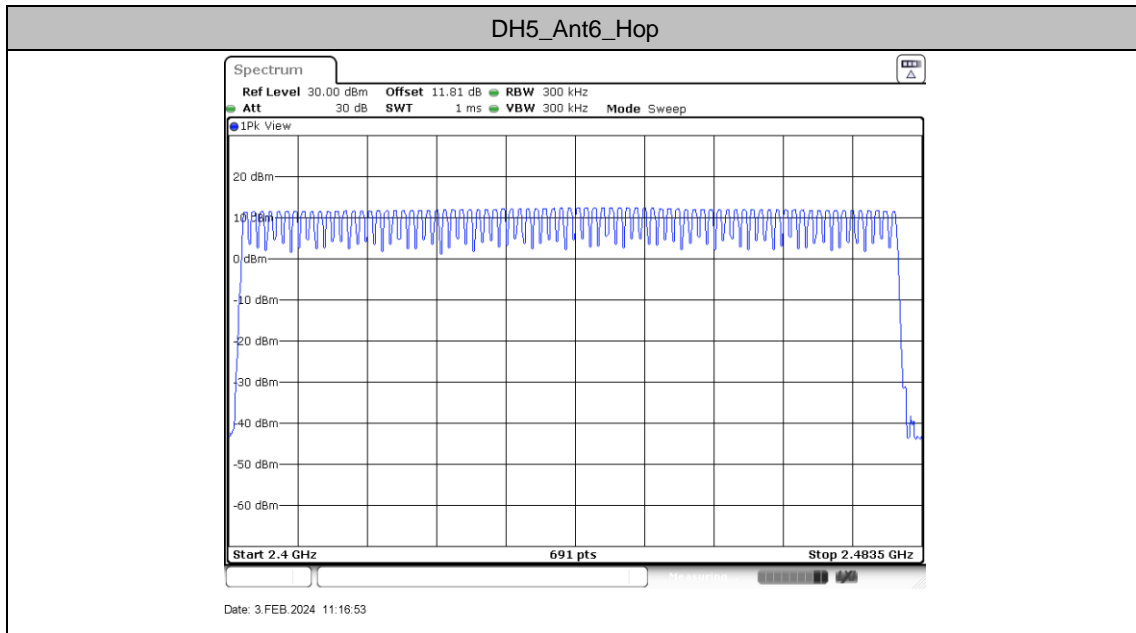




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant6	Low	2402	10.74	-45.4	≤-9.26	PASS
		High	2480	10.80	-46.19	≤-9.2	PASS
		Low	Hop_2402	10.30	-46.88	≤-9.7	PASS
		High	Hop_2480	10.77	-46.49	≤-9.23	PASS
2DH1	Ant6	Low	2402	10.70	-43.66	≤-9.3	PASS
		High	2480	10.97	-45.92	≤-9.03	PASS
		Low	Hop_2402	10.23	-46.07	≤-9.77	PASS
		High	Hop_2480	10.98	-46.57	≤-9.02	PASS
3DH1	Ant6	Low	2402	10.83	-43.36	≤-9.17	PASS
		High	2480	11.08	-46.44	≤-8.92	PASS
		Low	Hop_2402	10.78	-47.01	≤-9.22	PASS
		High	Hop_2480	11.02	-46.66	≤-8.98	PASS




Test Graphs

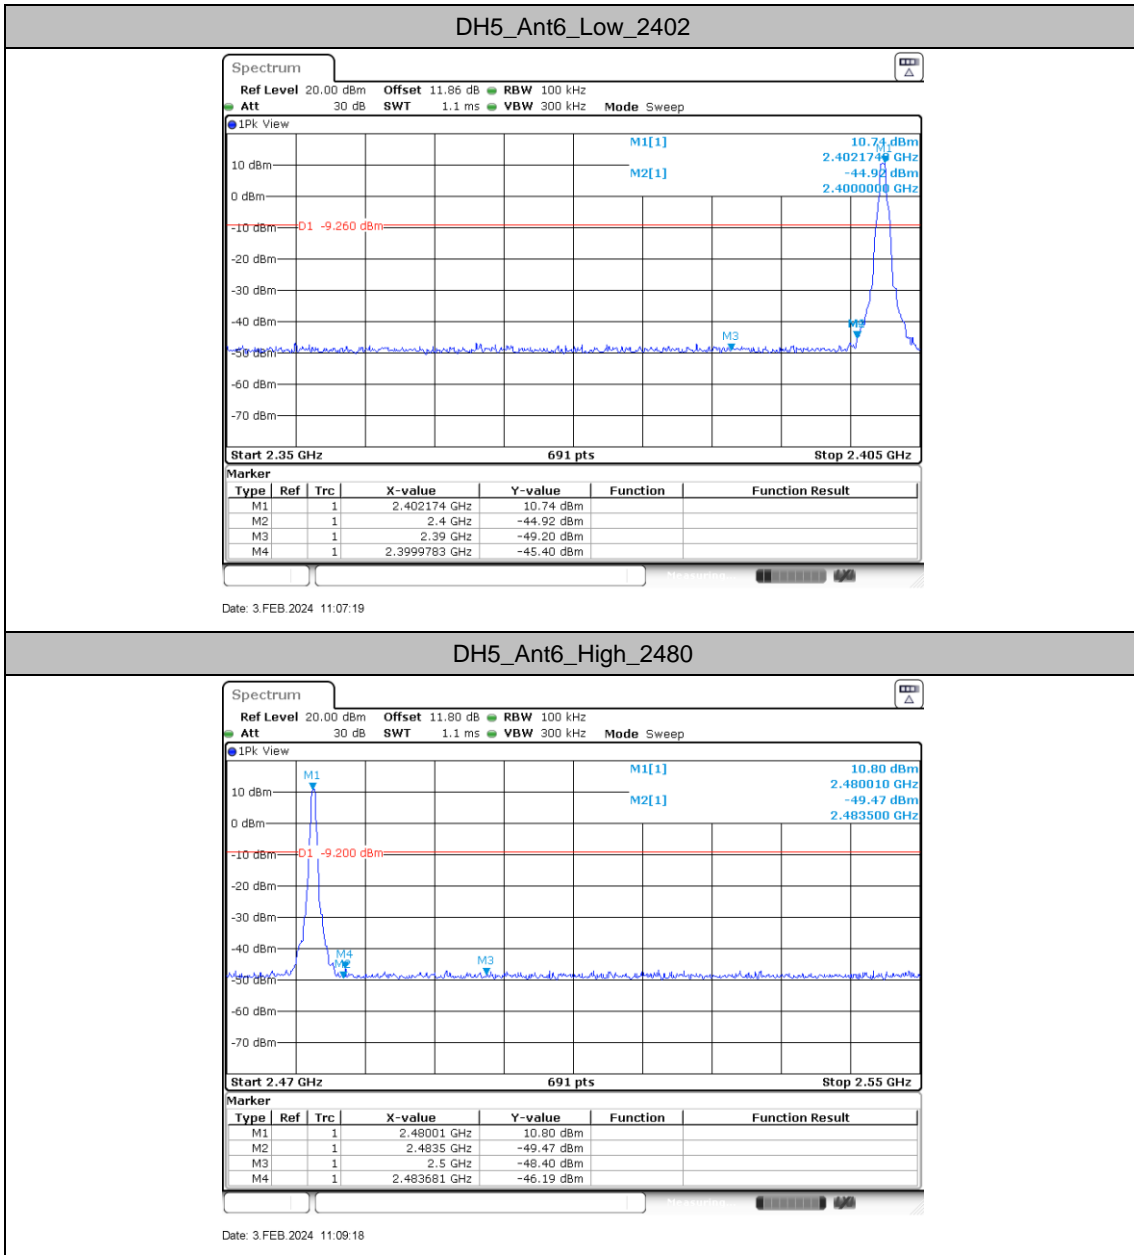




DH5_Ant6_Low_Hop_2402

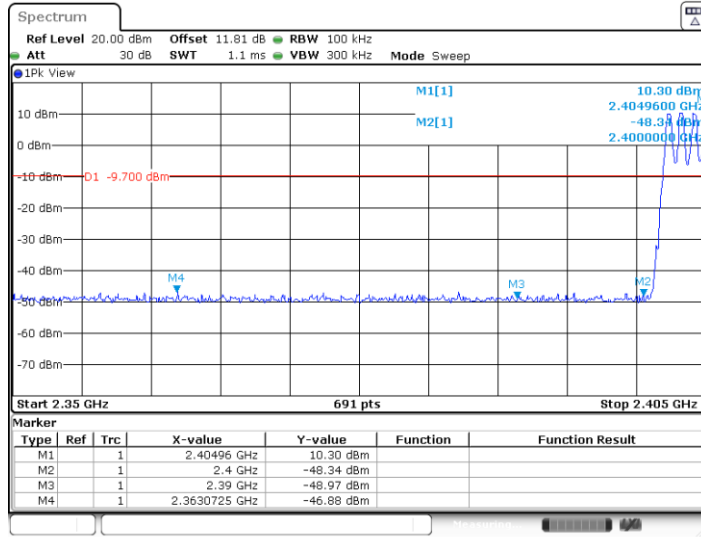

Date: 3.FEB.2024 11:17:06


DH5_Ant6_High_Hop_2480

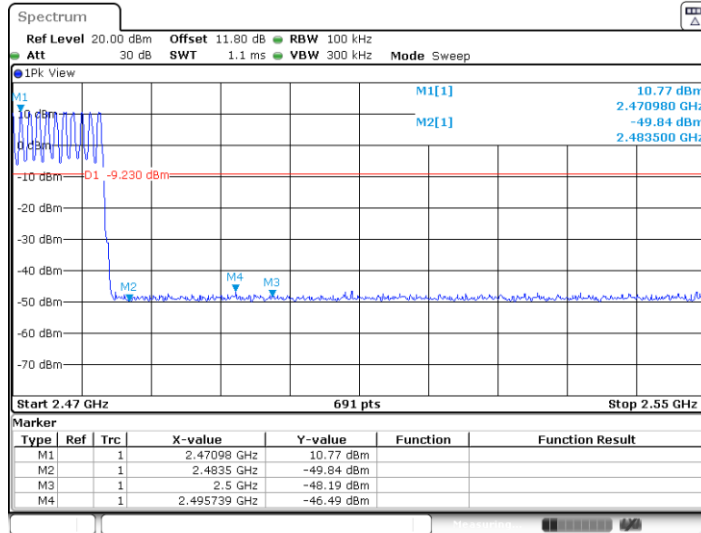

Date: 3.FEB.2024 11:17:19




2DH1_Ant6_Low_2402

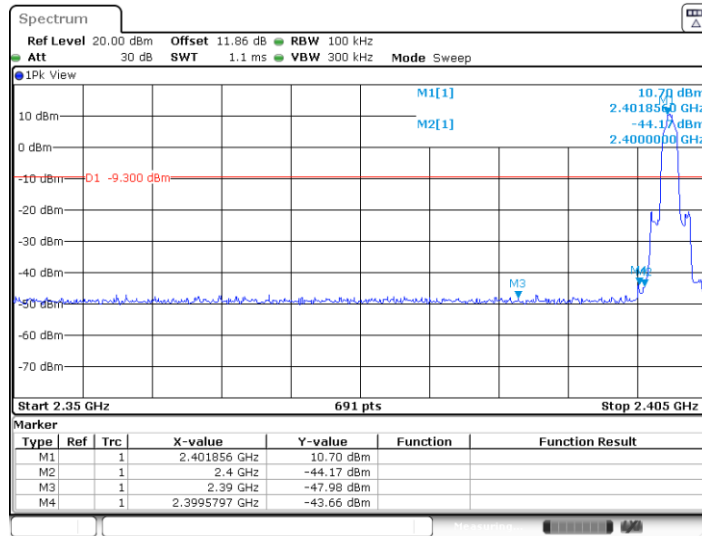

Date: 3.FEB.2024 11:10:23


2DH1_Ant6_High_2480

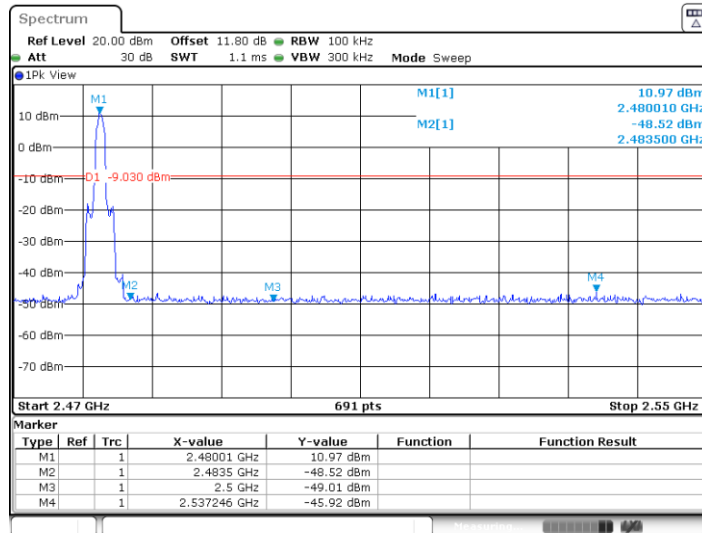

Date: 3.FEB.2024 11:12:21




2DH1_Ant6_Low_Hop_2402

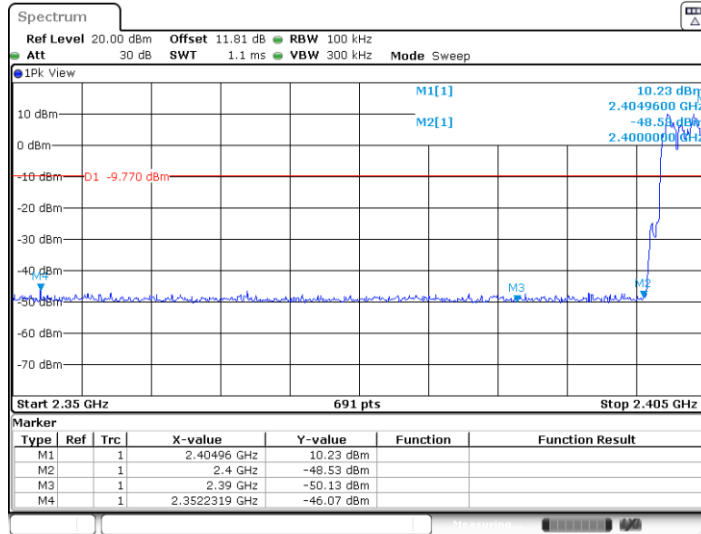

Date: 3.FEB.2024 11:17:33


2DH1_Ant6_High_Hop_2480

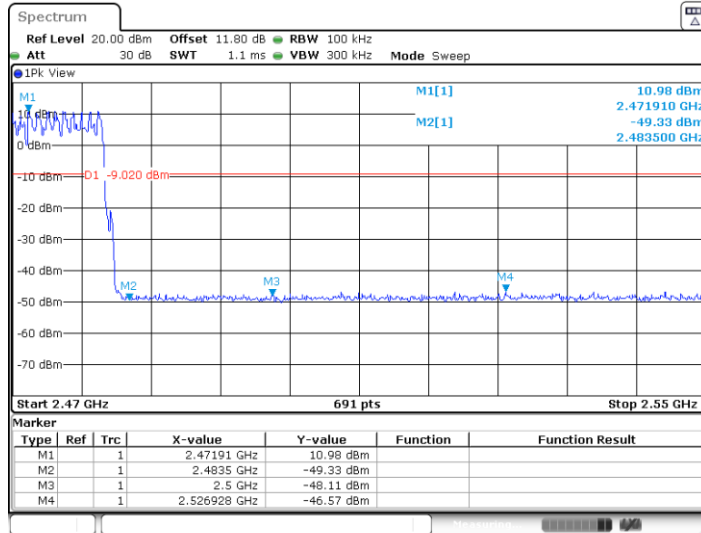

Date: 3.FEB.2024 11:17:46




3DH1_Ant6_Low_2402

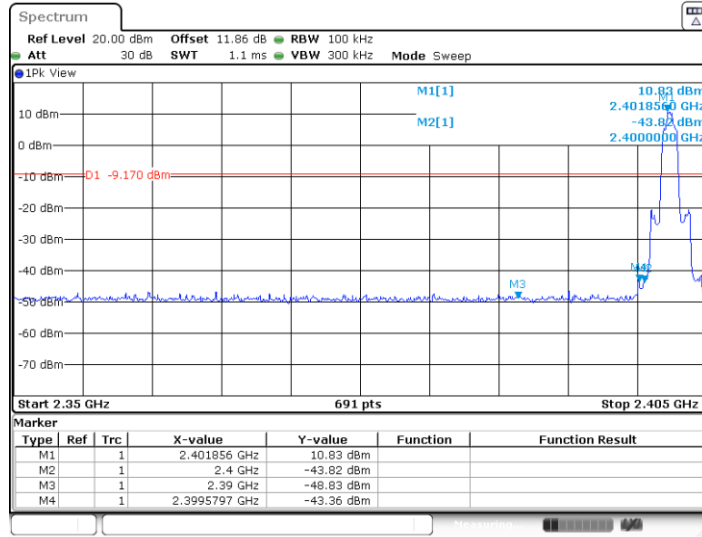

Date: 3.FEB.2024 11:13:27


3DH1_Ant6_High_2480

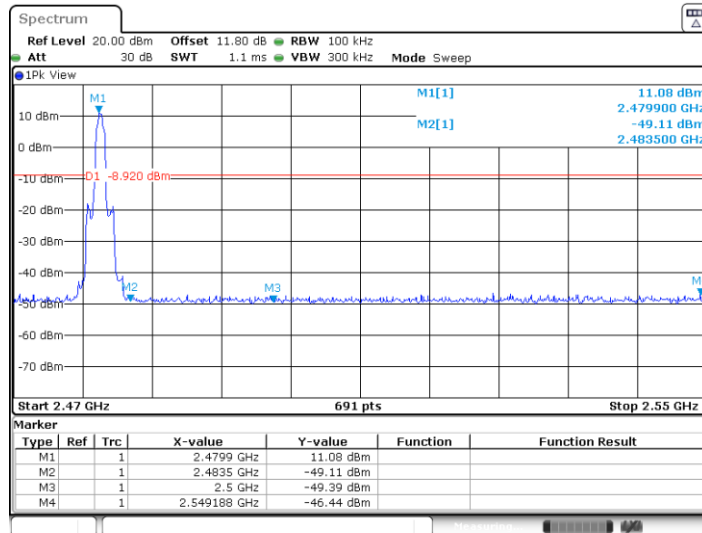

Date: 3.FEB.2024 11:15:25




3DH1_Ant6_Low_Hop_2402

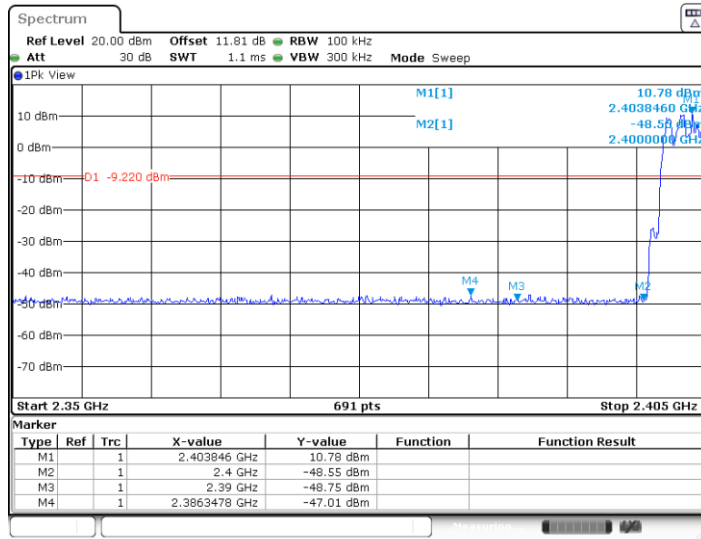

Date: 3.FEB.2024 11:18:00

3DH1_Ant6_High_Hop_2480

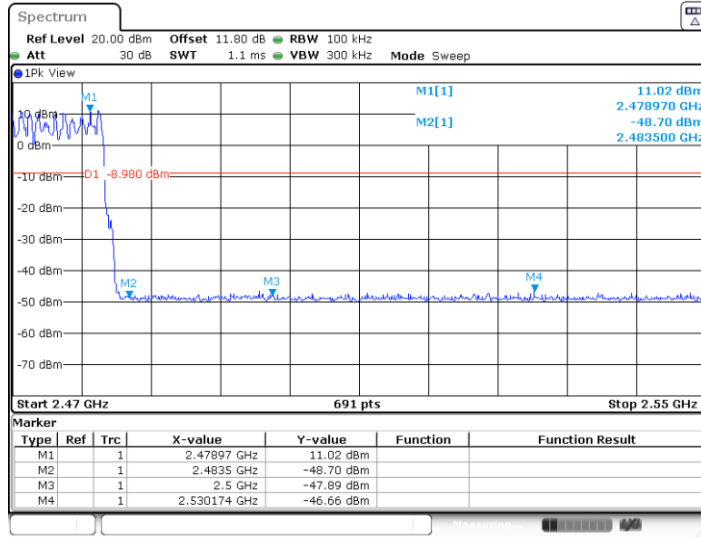

Date: 3.FEB.2024 11:18:13




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant6	2402	Reference	10.73	10.73	---	PASS
			30~1000	10.73	-56.44	≤-9.27	PASS
			1000~26500	10.73	-46.6	≤-9.27	PASS
		2441	Reference	11.82	11.82	---	PASS
			30~1000	11.82	-57	≤-8.18	PASS
			1000~26500	11.82	-46.11	≤-8.18	PASS
		2480	Reference	10.85	10.85	---	PASS
			30~1000	10.85	-56.79	≤-9.15	PASS
			1000~26500	10.85	-46	≤-9.15	PASS
2DH1	Ant6	2402	Reference	10.66	10.66	---	PASS
			30~1000	10.66	-56.64	≤-9.34	PASS
			1000~26500	10.66	-43.84	≤-9.34	PASS
		2441	Reference	11.79	11.79	---	PASS
			30~1000	11.79	-56.39	≤-8.21	PASS
			1000~26500	11.79	-45.76	≤-8.21	PASS
		2480	Reference	10.89	10.89	---	PASS
			30~1000	10.89	-57.04	≤-9.11	PASS
			1000~26500	10.89	-48.91	≤-9.11	PASS
3DH1	Ant6	2402	Reference	10.82	10.82	---	PASS
			30~1000	10.82	-56.41	≤-9.18	PASS
			1000~26500	10.82	-43.97	≤-9.18	PASS
		2441	Reference	11.95	11.95	---	PASS
			30~1000	11.95	-56.14	≤-8.05	PASS
			1000~26500	11.95	-47.13	≤-8.05	PASS
		2480	Reference	11.06	11.06	---	PASS
			30~1000	11.06	-56.61	≤-8.94	PASS
			1000~26500	11.06	-48.79	≤-8.94	PASS




Test Graphs

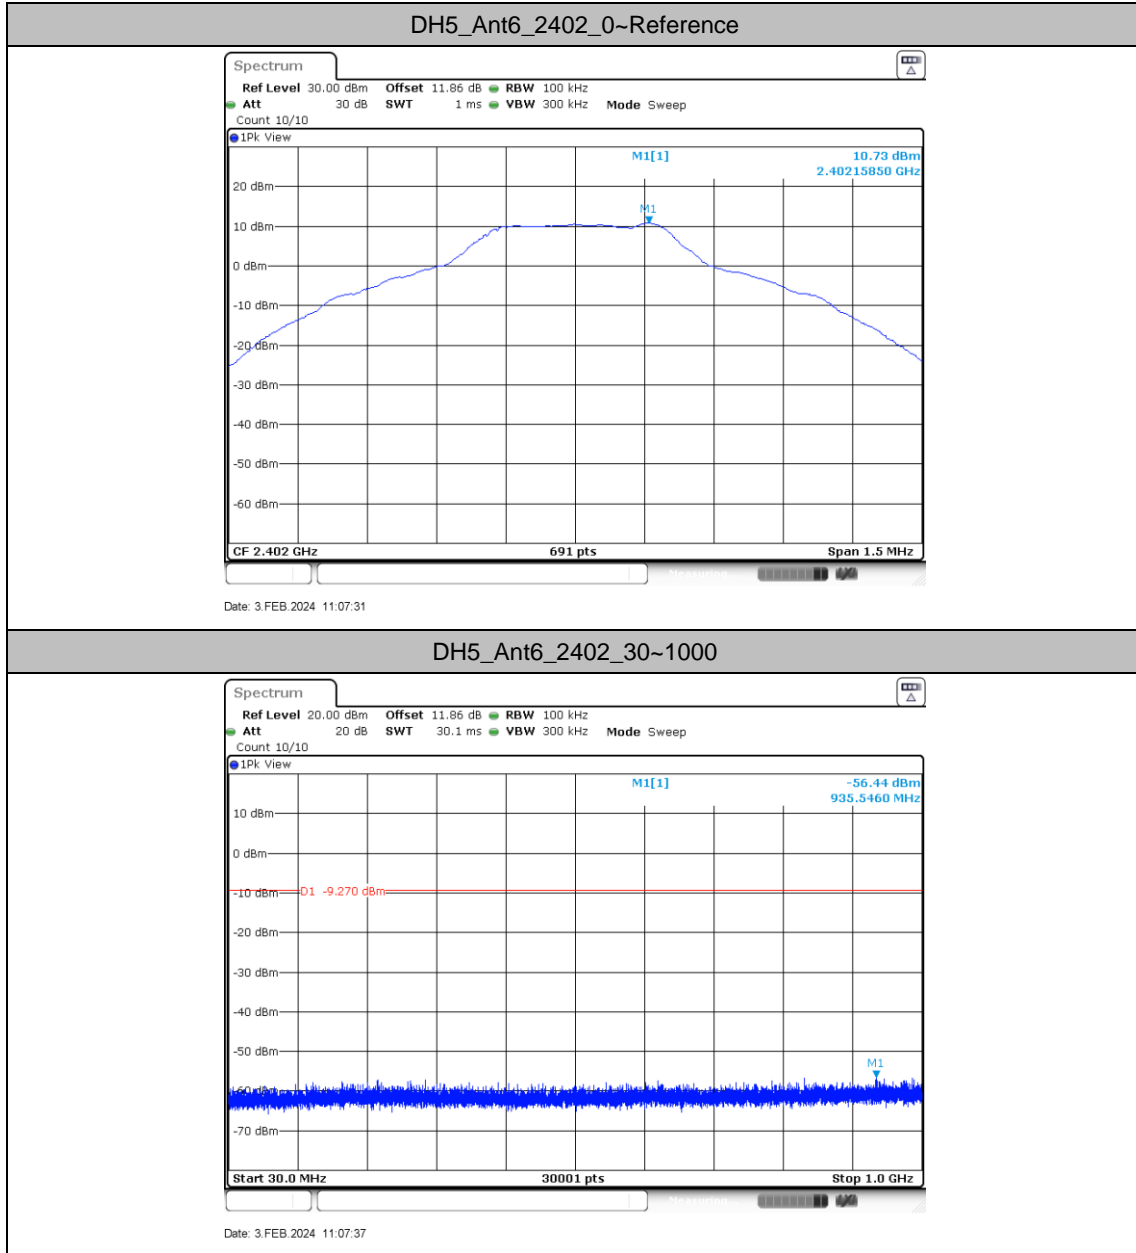




DH5_Ant6_2402_1000~26500

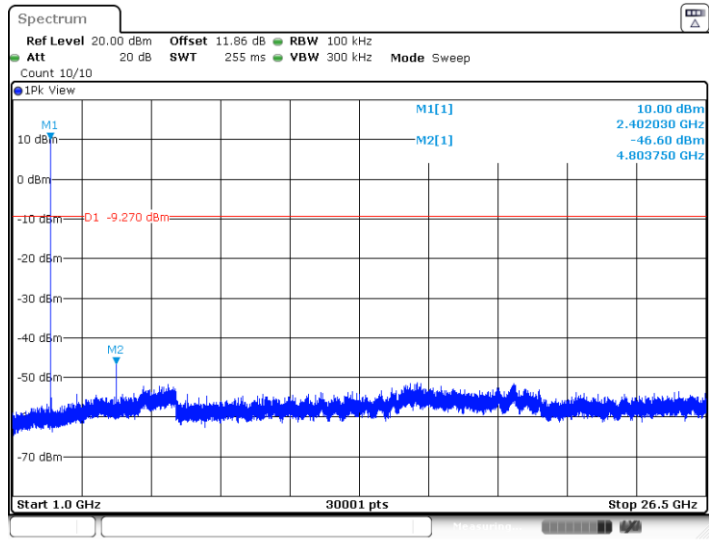

Date: 3.FEB.2024 11:07:52


DH5_Ant6_2441_0~Reference

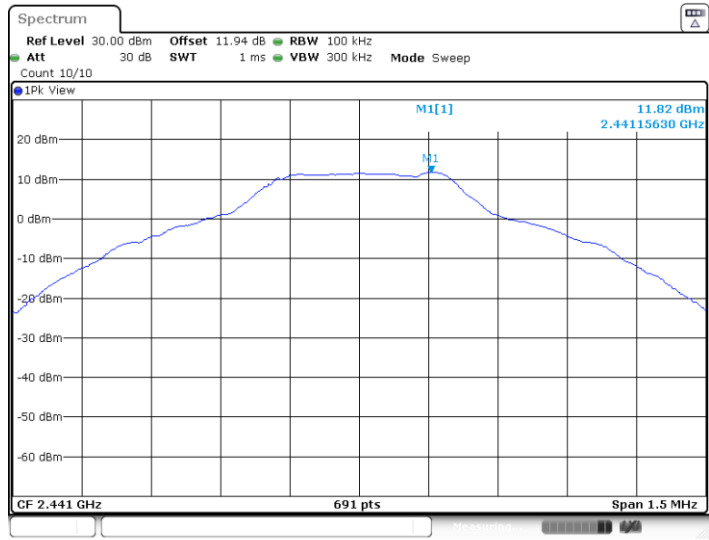

Date: 3.FEB.2024 11:08:24




DH5_Ant6_2441_30~1000

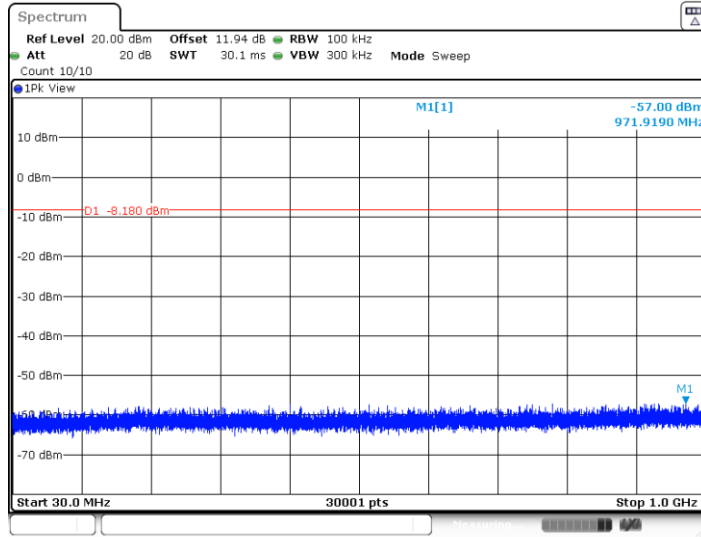

Date: 3.FEB.2024 11:08:30


DH5_Ant6_2441_1000~26500

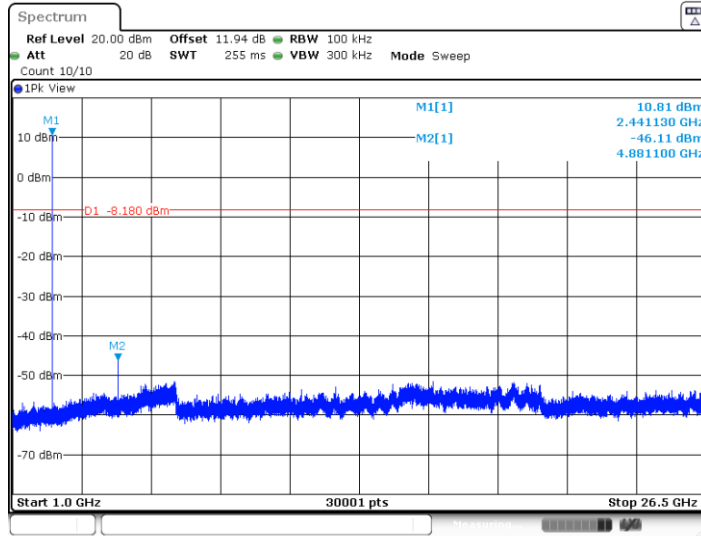

Date: 3.FEB.2024 11:08:45




DH5_Ant6_2480_0~Reference

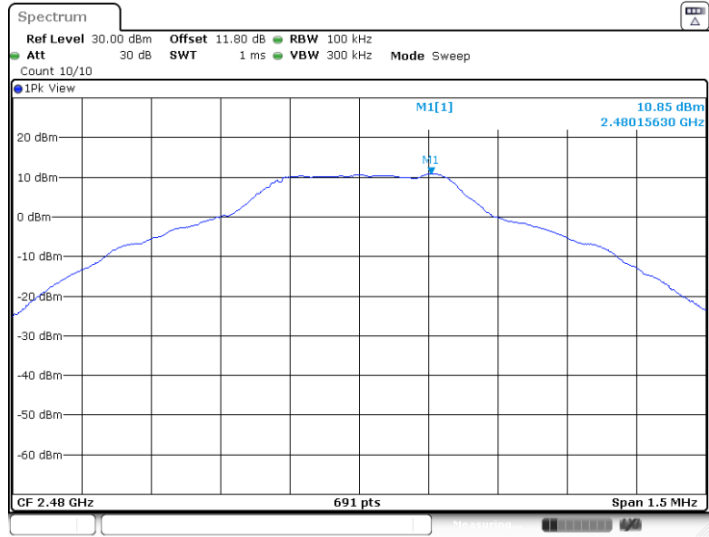

Date: 3.FEB.2024 11:09:29


DH5_Ant6_2480_30~1000

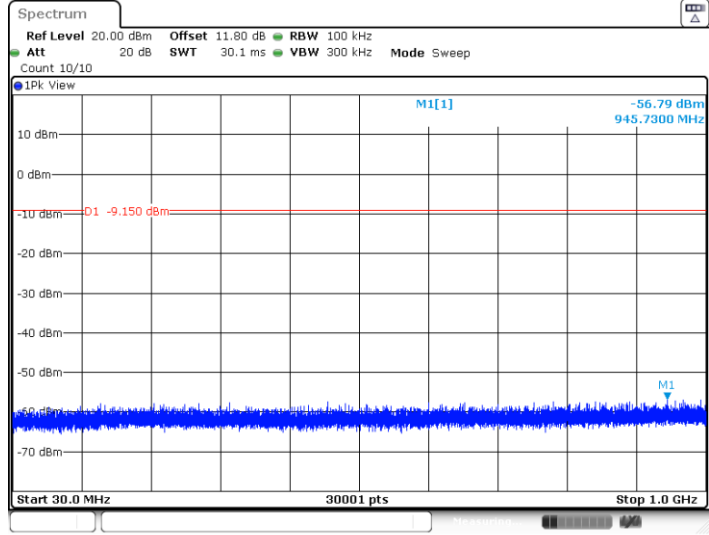

Date: 3.FEB.2024 11:09:35




DH5_Ant6_2480_1000~26500

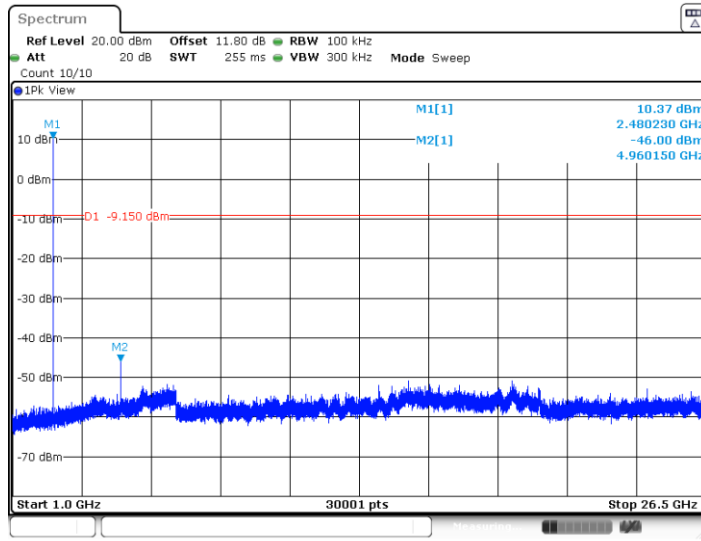

Date: 3.FEB.2024 11:09:50


2DH1_Ant6_2402_0~Reference

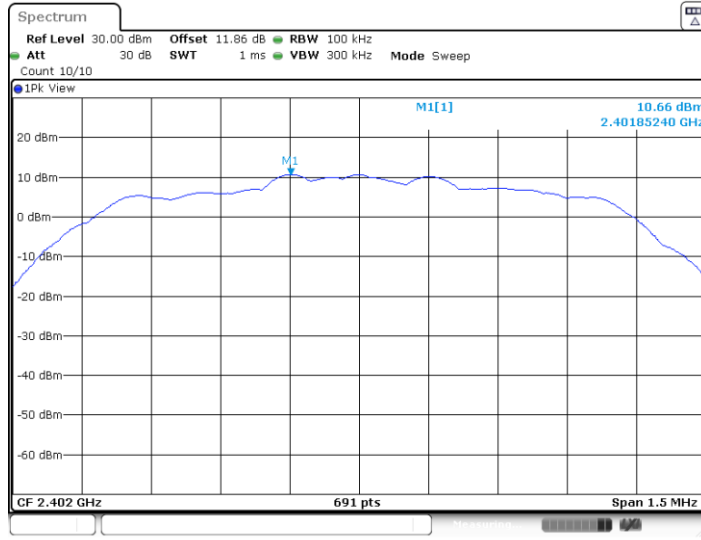

Date: 3.FEB.2024 11:10:35




2DH1_Ant6_2402_30~1000

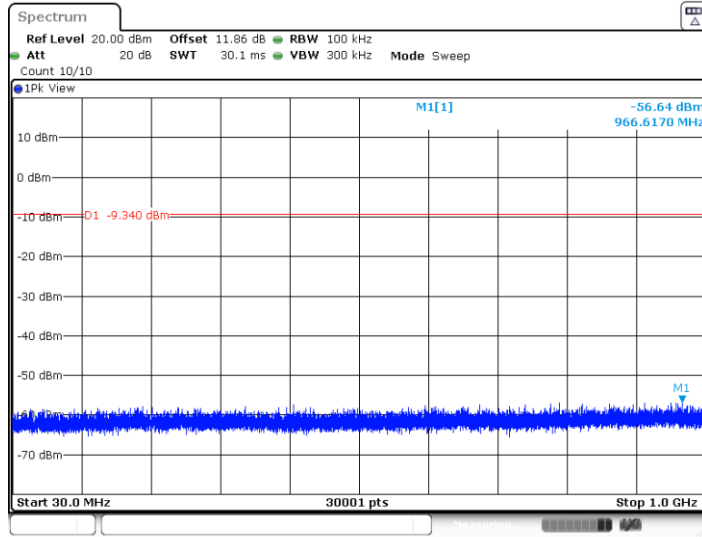

Date: 3.FEB.2024 11:10:41


2DH1_Ant6_2402_1000~26500

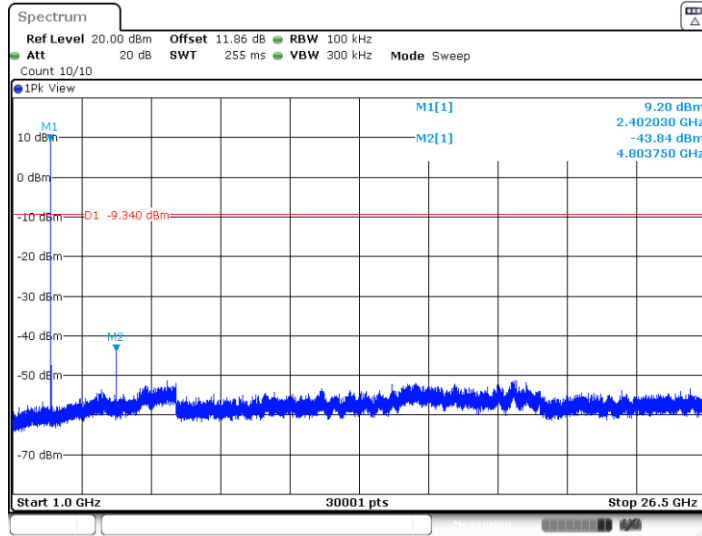

Date: 3.FEB.2024 11:10:56




2DH1_Ant6_2441_0~Reference

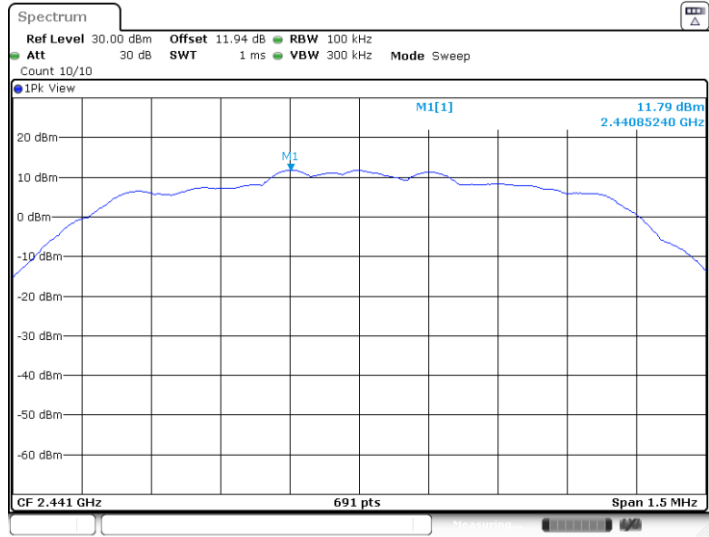

Date: 3.FEB.2024 11:11:28


2DH1_Ant6_2441_30~1000

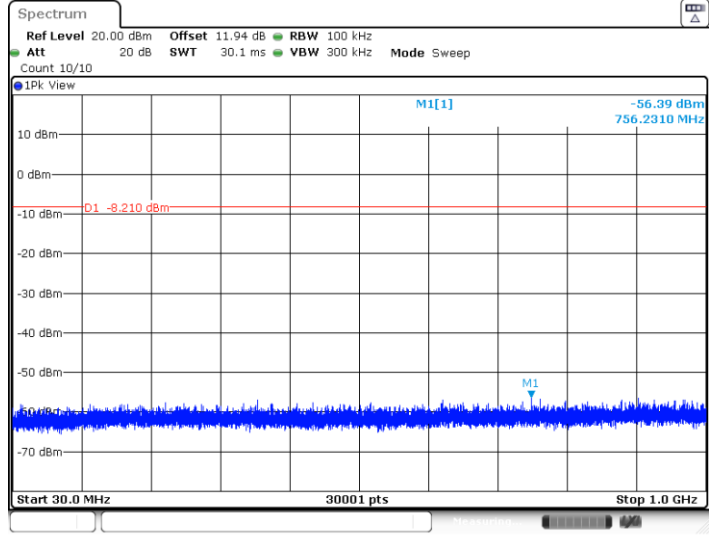

Date: 3.FEB.2024 11:11:33




2DH1_Ant6_2441_1000~26500

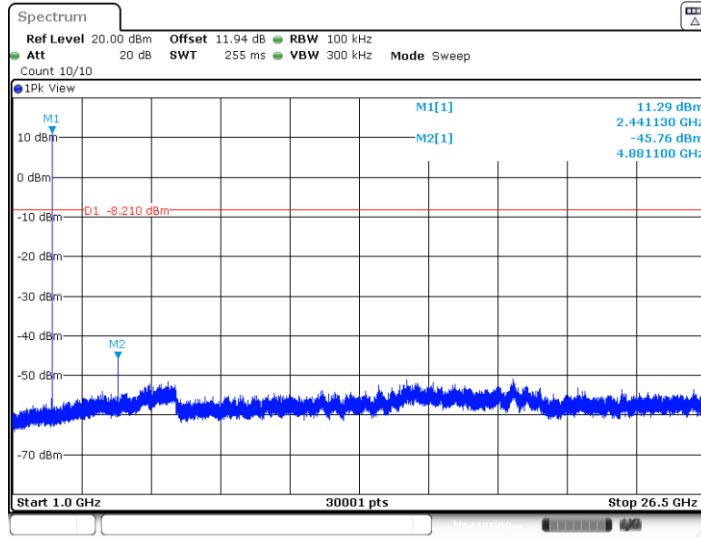

Date: 3.FEB.2024 11:11:48


2DH1_Ant6_2480_0~Reference

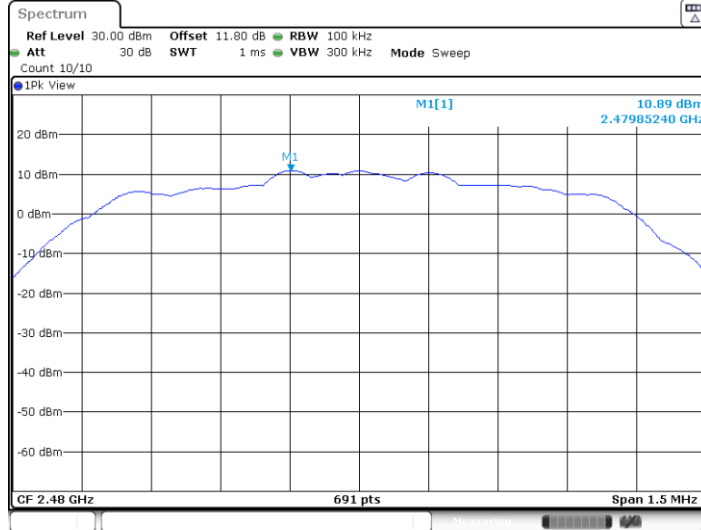

Date: 3.FEB.2024 11:12:33




2DH1_Ant6_2480_30~1000

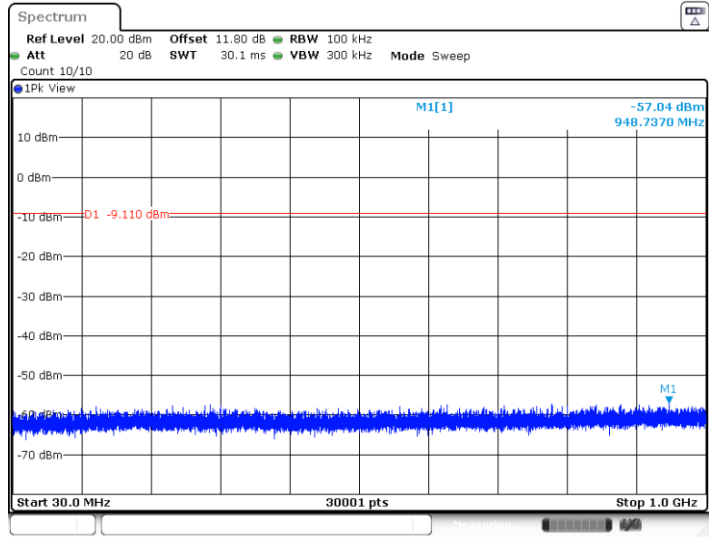

Date: 3.FEB.2024 11:12:39


2DH1_Ant6_2480_1000~26500

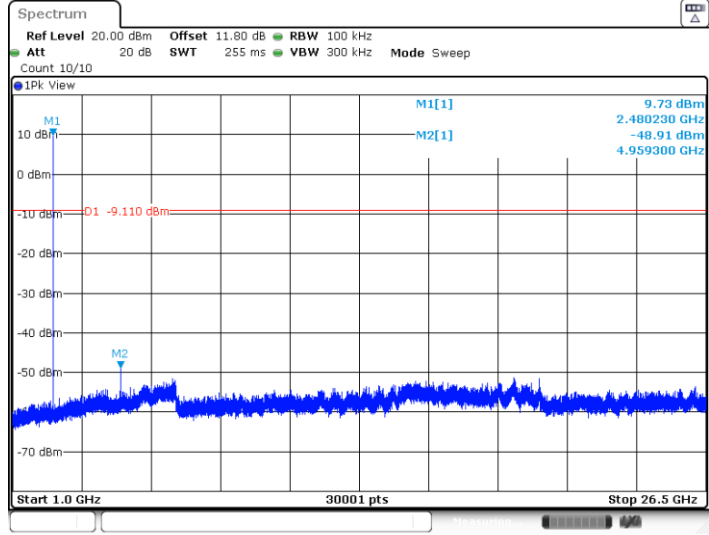

Date: 3.FEB.2024 11:12:54




3DH1_Ant6_2402_0~Reference

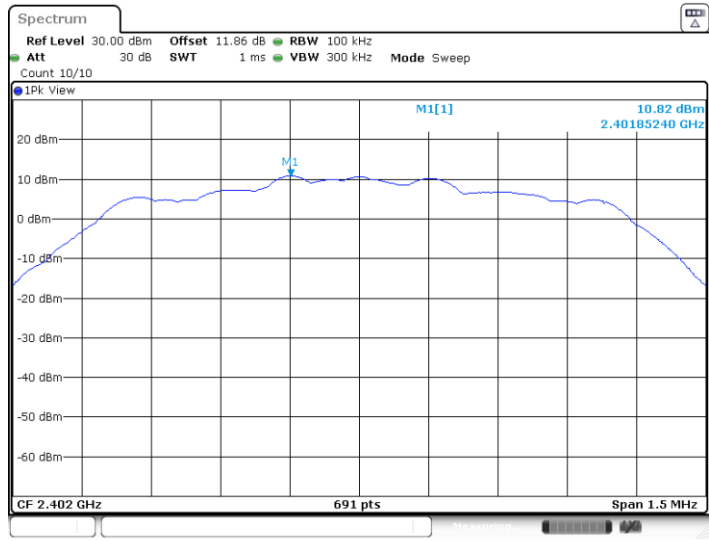

Date: 3.FEB.2024 11:13:39


3DH1_Ant6_2402_30~1000

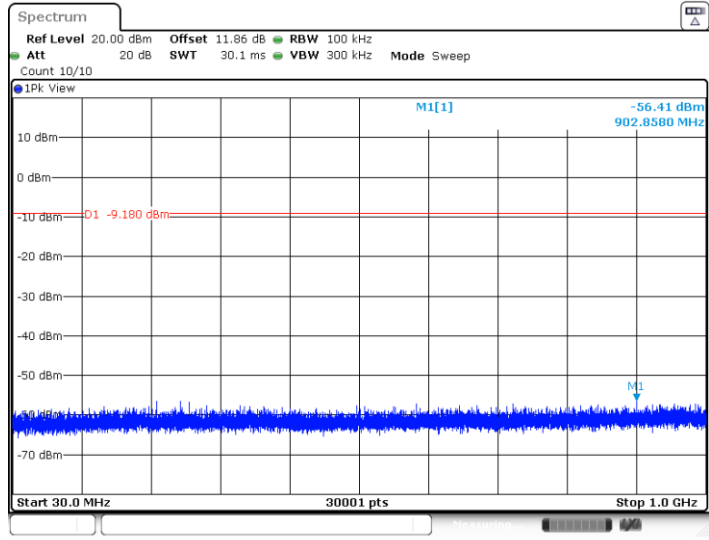

Date: 3.FEB.2024 11:13:44




3DH1_Ant6_2402_1000~26500

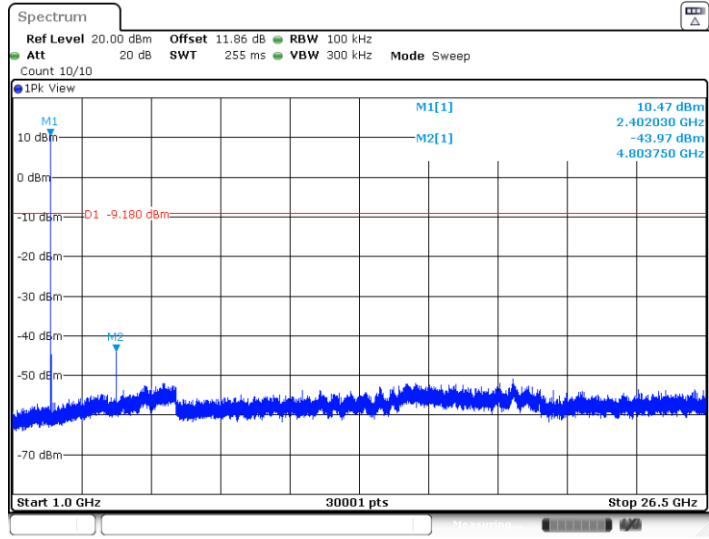

Date: 3.FEB.2024 11:14:00


3DH1_Ant6_2441_0~Reference

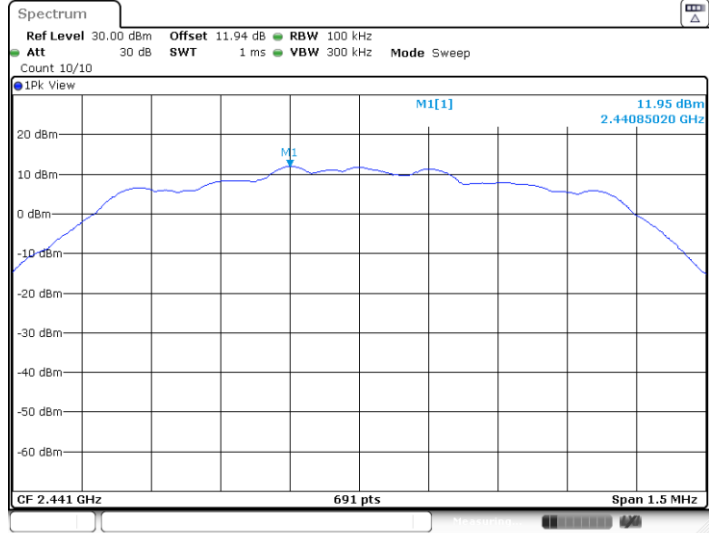

Date: 3.FEB.2024 11:14:31




3DH1_Ant6_2441_30~1000

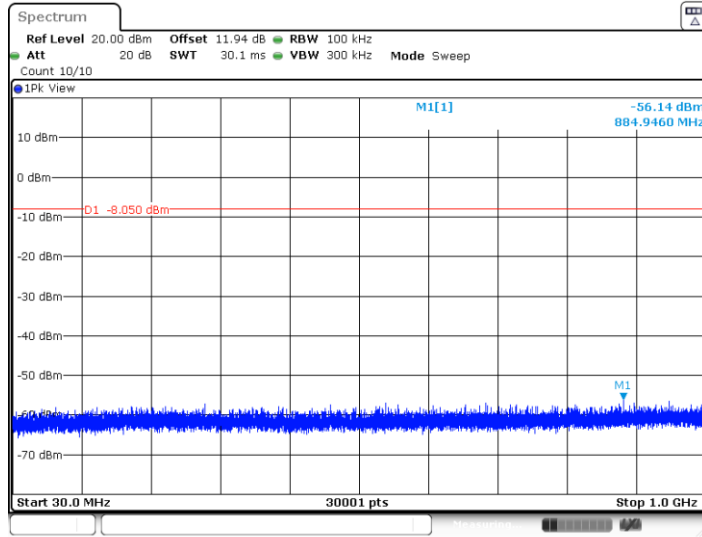

Date: 3.FEB.2024 11:14:37


3DH1_Ant6_2441_1000~26500

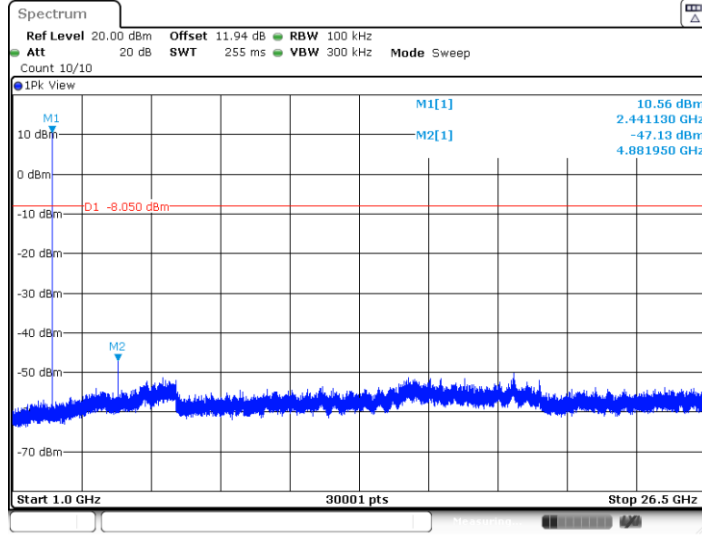

Date: 3.FEB.2024 11:14:52




3DH1_Ant6_2480_0~Reference

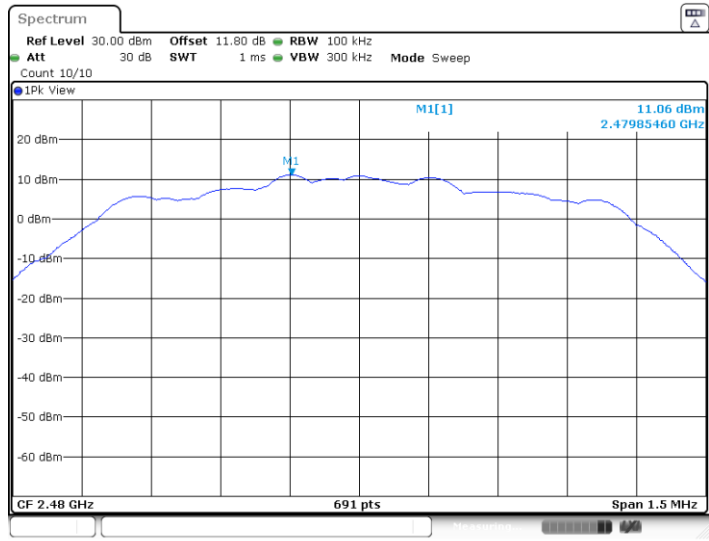


Date: 3.FEB.2024 11:15:37

3DH1_Ant6_2480_30~1000

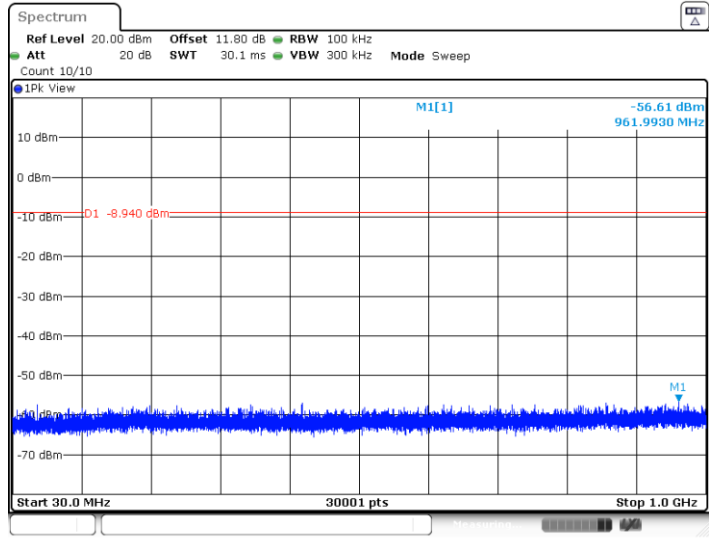


Date: 3.FEB.2024 11:15:42

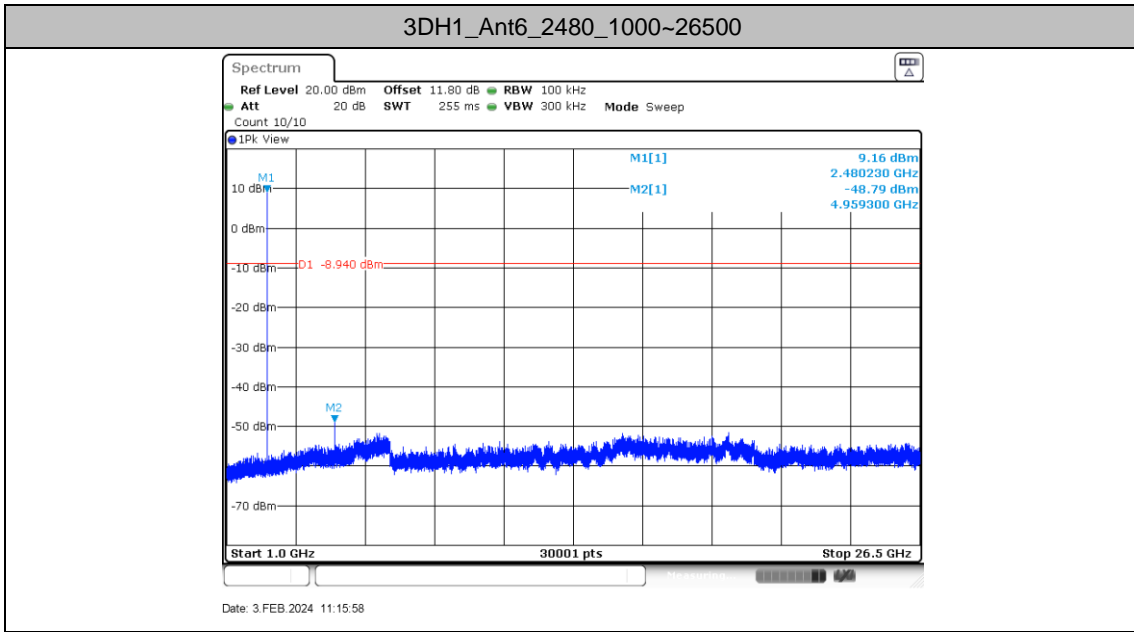



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

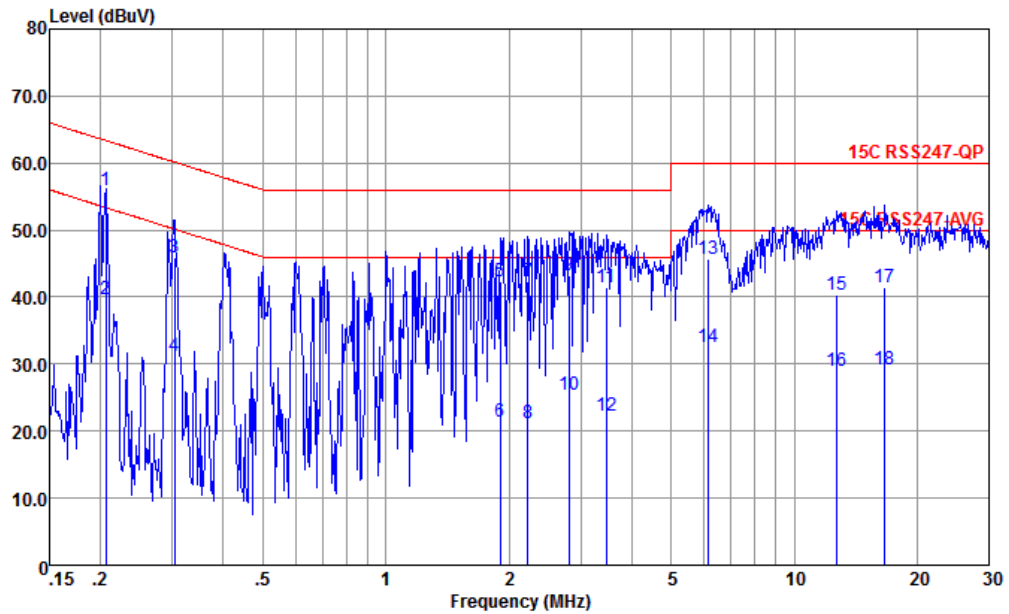


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.206	56.03	-7.33	63.36	45.60	0.03	10.40	QP
2	0.206	39.73	-13.63	53.36	29.30	0.03	10.40	Average
3	0.303	45.87	-14.28	60.15	35.50	0.04	10.33	QP
4	0.303	31.27	-18.88	50.15	20.90	0.04	10.33	Average
5	1.908	42.44	-13.56	56.00	32.50	-0.14	10.08	QP
6	1.908	21.44	-24.56	46.00	11.50	-0.14	10.08	Average
7	2.225	42.45	-13.55	56.00	32.49	-0.12	10.08	QP
8	2.225	21.25	-24.75	46.00	11.29	-0.12	10.08	Average
9	2.809	43.18	-12.82	56.00	33.20	-0.09	10.07	QP
10	2.809	25.48	-20.52	46.00	15.50	-0.09	10.07	Average
11	3.472	41.47	-14.53	56.00	31.50	-0.10	10.07	QP
12	3.472	22.27	-23.73	46.00	12.30	-0.10	10.07	Average
13	6.153	45.58	-14.42	60.00	35.60	-0.14	10.12	QP
14	6.153	32.58	-17.42	50.00	22.60	-0.14	10.12	Average
15	12.716	40.41	-19.59	60.00	29.50	-0.14	11.05	QP
16	12.716	29.01	-20.99	50.00	18.10	-0.14	11.05	Average
17	16.661	41.55	-18.45	60.00	30.50	-0.21	11.26	QP
18	16.661	29.25	-20.75	50.00	18.20	-0.21	11.26	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

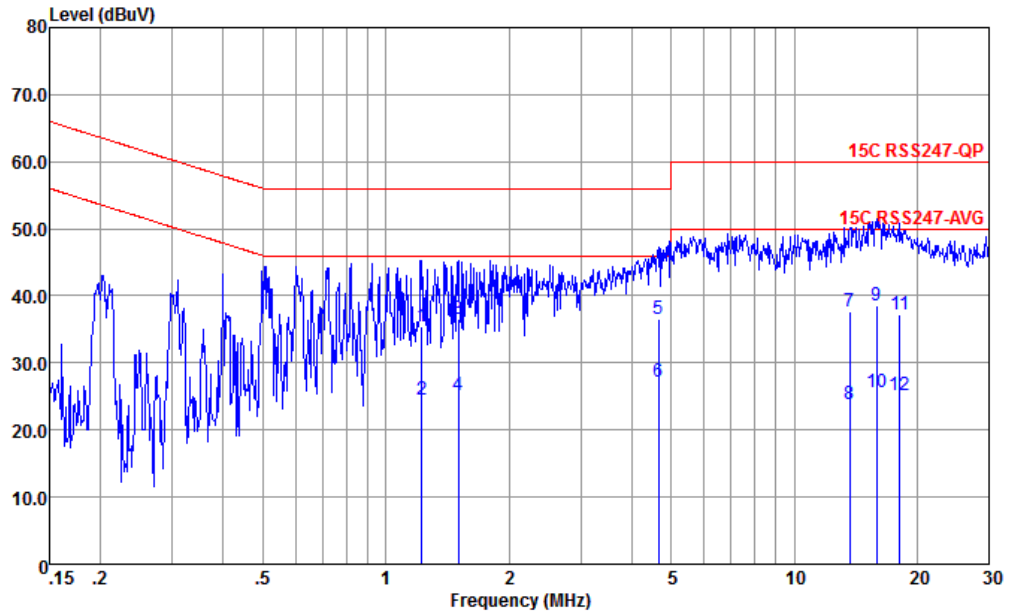

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.223	35.48	-20.52	56.00	25.50	-0.11	10.09	QP
2	1.223	24.58	-21.42	46.00	14.60	-0.11	10.09	Average
3	1.503	36.57	-19.43	56.00	26.60	-0.11	10.08	QP
4	1.503	25.17	-20.83	46.00	15.20	-0.11	10.08	Average
5	4.647	36.53	-19.47	56.00	26.60	-0.13	10.06	QP
6 *	4.647	27.13	-18.87	46.00	17.20	-0.13	10.06	Average
7	13.695	37.60	-22.40	60.00	26.60	-0.12	11.12	QP
8	13.695	23.90	-26.10	50.00	12.90	-0.12	11.12	Average
9	15.885	38.60	-21.40	60.00	27.49	-0.13	11.24	QP
10	15.885	25.60	-24.40	50.00	14.49	-0.13	11.24	Average
11	18.135	37.28	-22.72	60.00	26.19	-0.21	11.30	QP
12	18.135	25.28	-24.72	50.00	14.19	-0.21	11.30	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	1Mbps	-
Mode 2	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	1Mbps	-
Mode 3	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1Mbps	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2335.74	54.58	74.00	-19.42	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	40.23	74.00	-33.77	H	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	44.06	74.00	-29.94	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2486.14	55.39	74.00	-18.61	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	42.86	74.00	-31.14	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	56.19	33.42	40.00	-6.58	V	PEAK	Pass	LF



Mode	1																																																																																																																	
	Band Edge																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																	
ANT	6																																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																																
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2335.74</td> <td>54.58</td> <td>74.00</td> <td>-19.42</td> <td>39.46</td> <td>31.45</td> <td>8.61</td> <td>30.94</td> <td>6.00</td> <td>130</td> <td>99 PEAK</td> </tr> <tr> <td>2</td> <td>2335.74</td> <td>29.79</td> <td>54.00</td> <td>-24.21</td> <td>14.67</td> <td>31.45</td> <td>8.61</td> <td>30.94</td> <td>6.00</td> <td>130</td> <td>99 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2335.74	54.58	74.00	-19.42	39.46	31.45	8.61	30.94	6.00	130	99 PEAK	2	2335.74	29.79	54.00	-24.21	14.67	31.45	8.61	30.94	6.00	130	99 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>104.89</td> <td>-----</td> <td>-----</td> <td>89.11</td> <td>31.91</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>130</td> <td>99 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>80.10</td> <td>-----</td> <td>-----</td> <td>64.32</td> <td>31.91</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>130</td> <td>99 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	104.89	-----	-----	89.11	31.91	8.80	30.93	6.00	130	99 PEAK	2	2402.00	80.10	-----	-----	64.32	31.91	8.80	30.93	6.00	130	99 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2335.74	54.58	74.00	-19.42	39.46	31.45	8.61	30.94	6.00	130	99 PEAK																																																																																																							
2	2335.74	29.79	54.00	-24.21	14.67	31.45	8.61	30.94	6.00	130	99 AVERAGE																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2402.00	104.89	-----	-----	89.11	31.91	8.80	30.93	6.00	130	99 PEAK																																																																																																							
2	2402.00	80.10	-----	-----	64.32	31.91	8.80	30.93	6.00	130	99 AVERAGE																																																																																																							



Mode	1																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2382.67</td> <td>54.36</td> <td>74.00</td> <td>-19.64</td> <td>38.75</td> <td>31.78</td> <td>8.76</td> <td>30.93</td> <td>6.00</td> <td>336</td> <td>58</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2382.67</td> <td>29.57</td> <td>54.00</td> <td>-24.43</td> <td>13.96</td> <td>31.78</td> <td>8.76</td> <td>30.93</td> <td>6.00</td> <td>336</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.67	54.36	74.00	-19.64	38.75	31.78	8.76	30.93	6.00	336	58	PEAK	2	2382.67	29.57	54.00	-24.43	13.96	31.78	8.76	30.93	6.00	336	58	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>103.02</td> <td>-----</td> <td>-----</td> <td>87.24</td> <td>31.91</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>336</td> <td>58</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>78.23</td> <td>-----</td> <td>-----</td> <td>62.45</td> <td>31.91</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>336</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.02	-----	-----	87.24	31.91	8.80	30.93	6.00	336	58	PEAK	2	2402.00	78.23	-----	-----	62.45	31.91	8.80	30.93	6.00	336	58	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2382.67	54.36	74.00	-19.64	38.75	31.78	8.76	30.93	6.00	336	58	PEAK																																																																																																		
2	2382.67	29.57	54.00	-24.43	13.96	31.78	8.76	30.93	6.00	336	58	AVERAGE																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	103.02	-----	-----	87.24	31.91	8.80	30.93	6.00	336	58	PEAK																																																																																																		
2	2402.00	78.23	-----	-----	62.45	31.91	8.80	30.93	6.00	336	58	AVERAGE																																																																																																		



Mode	1																																																																															
	Harmonic																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.23</td> <td>74.00</td> <td>-33.77</td> <td>59.29</td> <td>34.09</td> <td>12.54</td> <td>65.69</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4804.00	40.23	74.00	-33.77	59.29	34.09	12.54	65.69	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>39.32</td> <td>74.00</td> <td>-34.68</td> <td>58.38</td> <td>34.09</td> <td>12.54</td> <td>65.69</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4804.00	39.32	74.00	-34.68	58.38	34.09	12.54	65.69	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	4804.00	40.23	74.00	-33.77	59.29	34.09	12.54	65.69	0.00	--	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	4804.00	39.32	74.00	-34.68	58.38	34.09	12.54	65.69	0.00	--	PEAK																																																																					



Mode	2																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>39.46</td> <td>74.00</td> <td>-34.54</td> <td>59.00</td> <td>33.94</td> <td>12.06</td> <td>65.54</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>44.06</td> <td>74.00</td> <td>-29.94</td> <td>58.33</td> <td>35.60</td> <td>14.99</td> <td>64.86</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4882.00	39.46	74.00	-34.54	59.00	33.94	12.06	65.54	0.00	--	--	PEAK	2	7323.00	44.06	74.00	-29.94	58.33	35.60	14.99	64.86	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>39.50</td> <td>74.00</td> <td>-34.50</td> <td>59.04</td> <td>33.94</td> <td>12.06</td> <td>65.54</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>43.06</td> <td>74.00</td> <td>-30.94</td> <td>57.33</td> <td>35.60</td> <td>14.99</td> <td>64.86</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4882.00	39.50	74.00	-34.50	59.04	33.94	12.06	65.54	0.00	--	--	PEAK	2	7323.00	43.06	74.00	-30.94	57.33	35.60	14.99	64.86	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4882.00	39.46	74.00	-34.54	59.00	33.94	12.06	65.54	0.00	--	--	PEAK																																																																																																
2	7323.00	44.06	74.00	-29.94	58.33	35.60	14.99	64.86	0.00	--	--	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4882.00	39.50	74.00	-34.50	59.04	33.94	12.06	65.54	0.00	--	--	PEAK																																																																																																
2	7323.00	43.06	74.00	-30.94	57.33	35.60	14.99	64.86	0.00	--	--	PEAK																																																																																																



Mode	3																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.14</td> <td>55.39</td> <td>74.00</td> <td>-18.61</td> <td>39.24</td> <td>32.24</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>107</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2486.14</td> <td>30.60</td> <td>54.00</td> <td>-23.40</td> <td>14.45</td> <td>32.24</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>107</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2486.14	55.39	74.00	-18.61	39.24	32.24	8.88	30.97	6.00	107	360	PEAK	2	2486.14	30.60	54.00	-23.40	14.45	32.24	8.88	30.97	6.00	107	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.40</td> <td>-----</td> <td>-----</td> <td>87.27</td> <td>32.22</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>107</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>78.61</td> <td>-----</td> <td>-----</td> <td>62.48</td> <td>32.22</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>107</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2480.00	103.40	-----	-----	87.27	32.22	8.88	30.97	6.00	107	360	PEAK	2	2480.00	78.61	-----	-----	62.48	32.22	8.88	30.97	6.00	107	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2486.14	55.39	74.00	-18.61	39.24	32.24	8.88	30.97	6.00	107	360	PEAK																																																																																																
2	2486.14	30.60	54.00	-23.40	14.45	32.24	8.88	30.97	6.00	107	360	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2480.00	103.40	-----	-----	87.27	32.22	8.88	30.97	6.00	107	360	PEAK																																																																																																
2	2480.00	78.61	-----	-----	62.48	32.22	8.88	30.97	6.00	107	360	AVERAGE																																																																																																



Mode	3																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.47</td> <td>55.00</td> <td>74.00</td> <td>-19.00</td> <td>38.82</td> <td>32.29</td> <td>8.87</td> <td>30.98</td> <td>6.00</td> <td>393</td> <td>57</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2498.47</td> <td>30.21</td> <td>54.00</td> <td>-23.79</td> <td>14.03</td> <td>32.29</td> <td>8.87</td> <td>30.98</td> <td>6.00</td> <td>393</td> <td>57</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2498.47	55.00	74.00	-19.00	38.82	32.29	8.87	30.98	6.00	393	57	PEAK	2	2498.47	30.21	54.00	-23.79	14.03	32.29	8.87	30.98	6.00	393	57	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>101.23</td> <td>-----</td> <td>-----</td> <td>85.10</td> <td>32.22</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>393</td> <td>57</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>76.44</td> <td>-----</td> <td>-----</td> <td>60.31</td> <td>32.22</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>393</td> <td>57</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2480.00	101.23	-----	-----	85.10	32.22	8.88	30.97	6.00	393	57	PEAK	2	2480.00	76.44	-----	-----	60.31	32.22	8.88	30.97	6.00	393	57	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2498.47	55.00	74.00	-19.00	38.82	32.29	8.87	30.98	6.00	393	57	PEAK																																																																																																
2	2498.47	30.21	54.00	-23.79	14.03	32.29	8.87	30.98	6.00	393	57	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2480.00	101.23	-----	-----	85.10	32.22	8.88	30.97	6.00	393	57	PEAK																																																																																																
2	2480.00	76.44	-----	-----	60.31	32.22	8.88	30.97	6.00	393	57	AVERAGE																																																																																																





Mode	3																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>39.87</td> <td>74.00</td> <td>-34.13</td> <td>59.24</td> <td>33.96</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.86</td> <td>74.00</td> <td>-31.14</td> <td>57.20</td> <td>35.64</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4960.00	39.87	74.00	-34.13	59.24	33.96	12.07	65.40	0.00	--	--	PEAK	2	7440.00	42.86	74.00	-31.14	57.20	35.64	15.21	65.19	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>39.61</td> <td>74.00</td> <td>-34.39</td> <td>58.98</td> <td>33.96</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.86</td> <td>74.00</td> <td>-32.14</td> <td>56.20</td> <td>35.64</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4960.00	39.61	74.00	-34.39	58.98	33.96	12.07	65.40	0.00	--	--	PEAK	2	7440.00	41.86	74.00	-32.14	56.20	35.64	15.21	65.19	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4960.00	39.87	74.00	-34.13	59.24	33.96	12.07	65.40	0.00	--	--	PEAK																																																																																																
2	7440.00	42.86	74.00	-31.14	57.20	35.64	15.21	65.19	0.00	--	--	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4960.00	39.61	74.00	-34.39	58.98	33.96	12.07	65.40	0.00	--	--	PEAK																																																																																																
2	7440.00	41.86	74.00	-32.14	56.20	35.64	15.21	65.19	0.00	--	--	PEAK																																																																																																




Mode	3	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	6	
Pol.	Horizontal	Vertical
Peak Avg		

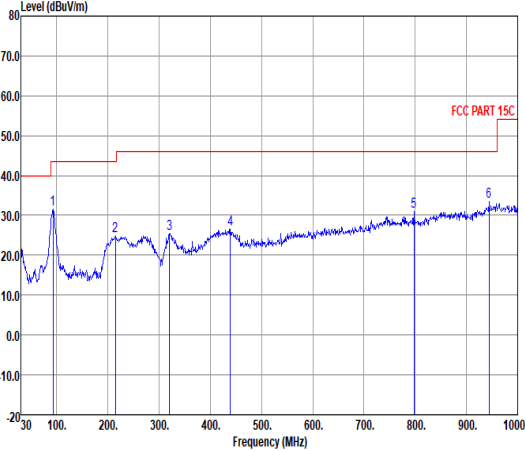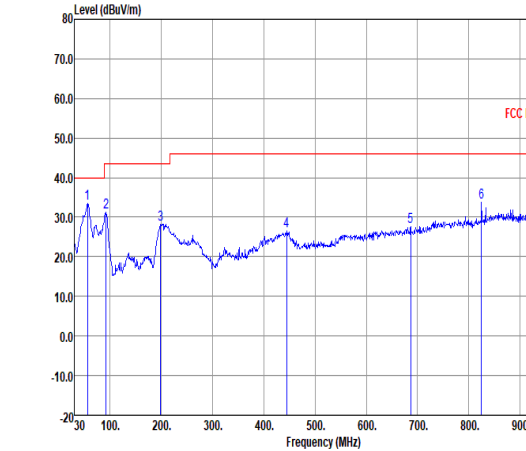


Mode	3																																																																																																																																																																									
	30-1G																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																									
ANT	6																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>Read Level (dBuV)</th> <th>Cable Loss (dB)</th> <th>Antenna Factor (dB/m)</th> <th>Preamp Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>93.05</td><td>31.56</td><td>-11.94</td><td>43.50</td><td>47.24</td><td>1.45</td><td>15.73</td><td>32.86</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>214.30</td><td>24.90</td><td>-18.60</td><td>43.50</td><td>39.21</td><td>2.23</td><td>16.28</td><td>32.82</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>320.03</td><td>25.49</td><td>-20.51</td><td>46.00</td><td>35.86</td><td>2.72</td><td>19.77</td><td>32.86</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>439.34</td><td>26.42</td><td>-19.58</td><td>46.00</td><td>33.88</td><td>3.20</td><td>22.35</td><td>33.01</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>797.27</td><td>30.99</td><td>-15.01</td><td>46.00</td><td>33.18</td><td>4.31</td><td>26.24</td><td>32.74</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>943.74</td><td>33.48</td><td>-12.52</td><td>46.00</td><td>33.00</td><td>4.70</td><td>27.46</td><td>31.68</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	93.05	31.56	-11.94	43.50	47.24	1.45	15.73	32.86	---	---	Peak	2	214.30	24.90	-18.60	43.50	39.21	2.23	16.28	32.82	---	---	Peak	3	320.03	25.49	-20.51	46.00	35.86	2.72	19.77	32.86	---	---	Peak	4	439.34	26.42	-19.58	46.00	33.88	3.20	22.35	33.01	---	---	Peak	5	797.27	30.99	-15.01	46.00	33.18	4.31	26.24	32.74	---	---	Peak	6	943.74	33.48	-12.52	46.00	33.00	4.70	27.46	31.68	---	---	Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>Read Level (dBuV)</th> <th>Cable Loss (dB)</th> <th>Antenna Factor (dB/m)</th> <th>Preamp Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>56.19</td><td>33.42</td><td>-6.58</td><td>40.00</td><td>51.95</td><td>1.11</td><td>13.28</td><td>32.92</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>92.08</td><td>31.22</td><td>-12.28</td><td>43.50</td><td>47.10</td><td>1.44</td><td>15.54</td><td>32.86</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>198.78</td><td>28.24</td><td>-15.26</td><td>43.50</td><td>43.51</td><td>2.14</td><td>15.43</td><td>32.84</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>444.19</td><td>26.46</td><td>-19.54</td><td>46.00</td><td>33.84</td><td>3.22</td><td>22.43</td><td>33.03</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>686.69</td><td>27.71</td><td>-18.29</td><td>46.00</td><td>31.51</td><td>4.01</td><td>25.23</td><td>33.04</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>824.43</td><td>33.66</td><td>-12.34</td><td>46.00</td><td>35.42</td><td>4.38</td><td>26.42</td><td>32.56</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	56.19	33.42	-6.58	40.00	51.95	1.11	13.28	32.92	---	---	Peak	2	92.08	31.22	-12.28	43.50	47.10	1.44	15.54	32.86	---	---	Peak	3	198.78	28.24	-15.26	43.50	43.51	2.14	15.43	32.84	---	---	Peak	4	444.19	26.46	-19.54	46.00	33.84	3.22	22.43	33.03	---	---	Peak	5	686.69	27.71	-18.29	46.00	31.51	4.01	25.23	33.04	---	---	Peak	6	824.43	33.66	-12.34	46.00	35.42	4.38	26.42	32.56	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																														
1	93.05	31.56	-11.94	43.50	47.24	1.45	15.73	32.86	---	---	Peak																																																																																																																																																															
2	214.30	24.90	-18.60	43.50	39.21	2.23	16.28	32.82	---	---	Peak																																																																																																																																																															
3	320.03	25.49	-20.51	46.00	35.86	2.72	19.77	32.86	---	---	Peak																																																																																																																																																															
4	439.34	26.42	-19.58	46.00	33.88	3.20	22.35	33.01	---	---	Peak																																																																																																																																																															
5	797.27	30.99	-15.01	46.00	33.18	4.31	26.24	32.74	---	---	Peak																																																																																																																																																															
6	943.74	33.48	-12.52	46.00	33.00	4.70	27.46	31.68	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	56.19	33.42	-6.58	40.00	51.95	1.11	13.28	32.92	---	---	Peak																																																																																																																																																															
2	92.08	31.22	-12.28	43.50	47.10	1.44	15.54	32.86	---	---	Peak																																																																																																																																																															
3	198.78	28.24	-15.26	43.50	43.51	2.14	15.43	32.84	---	---	Peak																																																																																																																																																															
4	444.19	26.46	-19.54	46.00	33.84	3.22	22.43	33.03	---	---	Peak																																																																																																																																																															
5	686.69	27.71	-18.29	46.00	31.51	4.01	25.23	33.04	---	---	Peak																																																																																																																																																															
6	824.43	33.66	-12.34	46.00	35.42	4.38	26.42	32.56	---	---	Peak																																																																																																																																																															

Appendix D. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

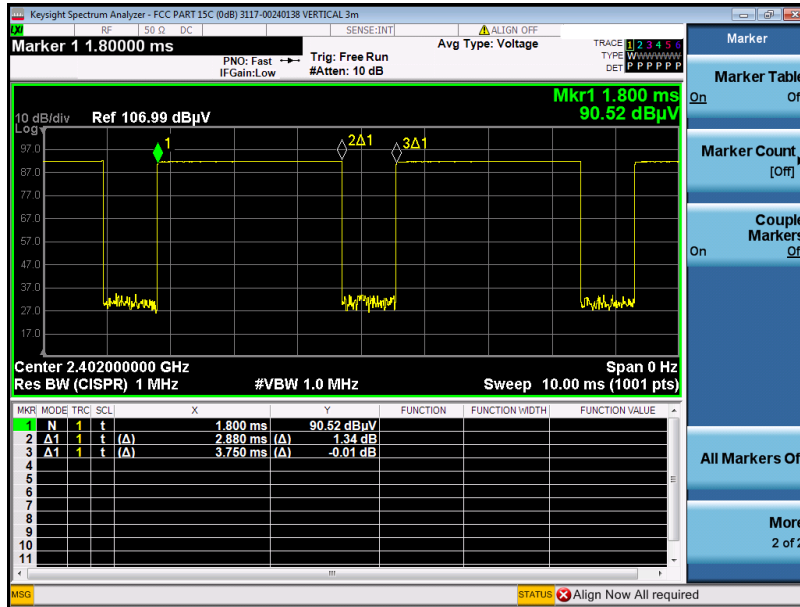

3DH5 on time (Count Pulses) Plot on Channel 39

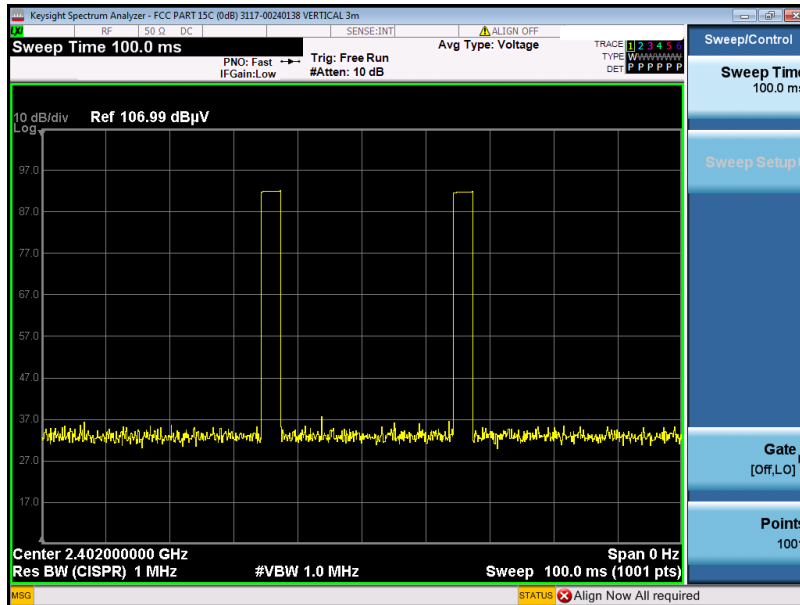

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.