



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2515-1, XT2515-2, XT2515-3, XT2515V
FCC ID : IHDT56AU5
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 30, 2024 ~ Sep. 25, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software	6
1.8 Applicable Standards	7
1.9 Specification of Accessory	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement	12
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	17
3.6 AC Conducted Emission Measurement	21
3.7 Antenna Requirements	23
4 LIST OF MEASURING EQUIPMENT	24
5 MEASUREMENT UNCERTAINTY	25
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR483010C	Rev. 01	Initial issue of report	Oct. 17, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.20 dB at 2483.56 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.84 dB at 0.755 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2515-1, XT2515-2, XT2515-3, XT2515V
FCC ID	IHDT56AU5
IMEI Code	Conducted: 359673880054938/359673880054901 Conduction: 350213730021636/350213730021644 Radiation: 359673880048138
HW Version	DVT2
SW Version	VVE35.35
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four models, the four models are for different markets and no other difference.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 23.93 dBm (0.2472 W) 802.11g : 26.54 dBm (0.4508 W) 802.11n HT20 : 26.53 dBm (0.4498 W) 802.11n HT40 : 29.83 dBm (0.9616 W)
99% Occupied Bandwidth	802.11b : 12.836MHz 802.11g : 17.345MHz 802.11n HT20 : 18.364MHz 802.11n HT40 : 36.582MHz
Antenna Type / Gain	Loop Antenna type with gain -4.4 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter	Brand Name	Motorola(Aohai)	Model Name	MC-201L
Battery	Brand Name	Motorola(NVT)	Model Name	RW50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	S928E42856
USB Cable 2	Brand Name	Motorola(Naiyi)	Model Name	S928E42857
USB Cable 3	Brand Name	Motorola(Saibao)	Model Name	S928E44701
USB Cable 4	Brand Name	Motorola(Naiyi)	Model Name	S928E44702

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable1 (Charging from Adapter)
Remark: For Radiated Test Cases, the tests were performed with Adapter, Earphone and USB Cable1.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

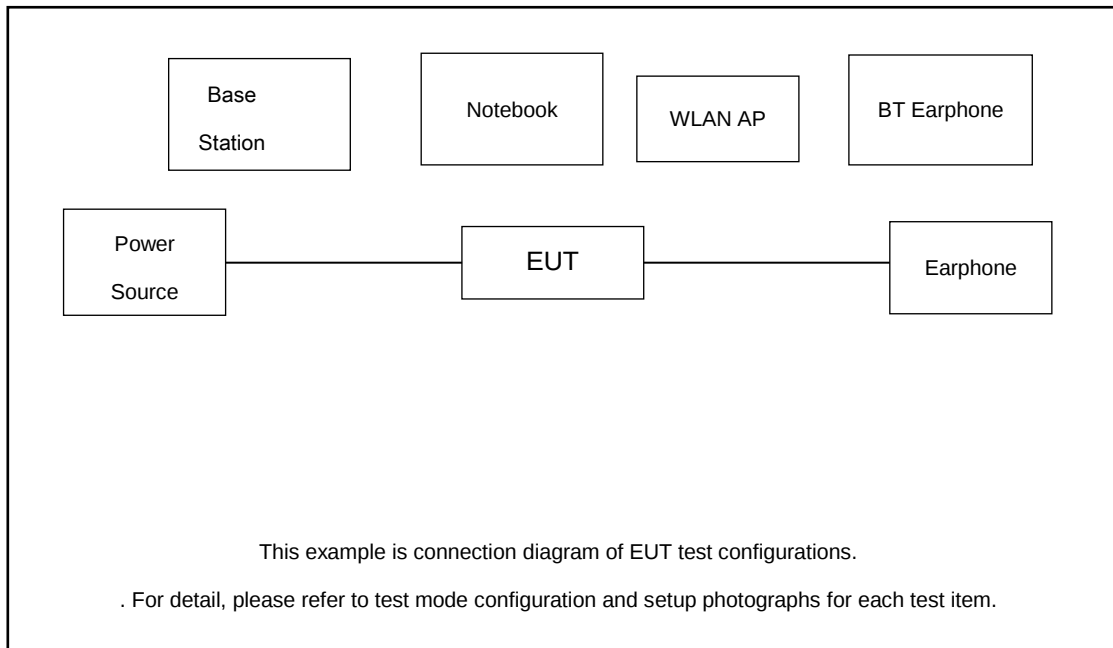

Radiated Emission:

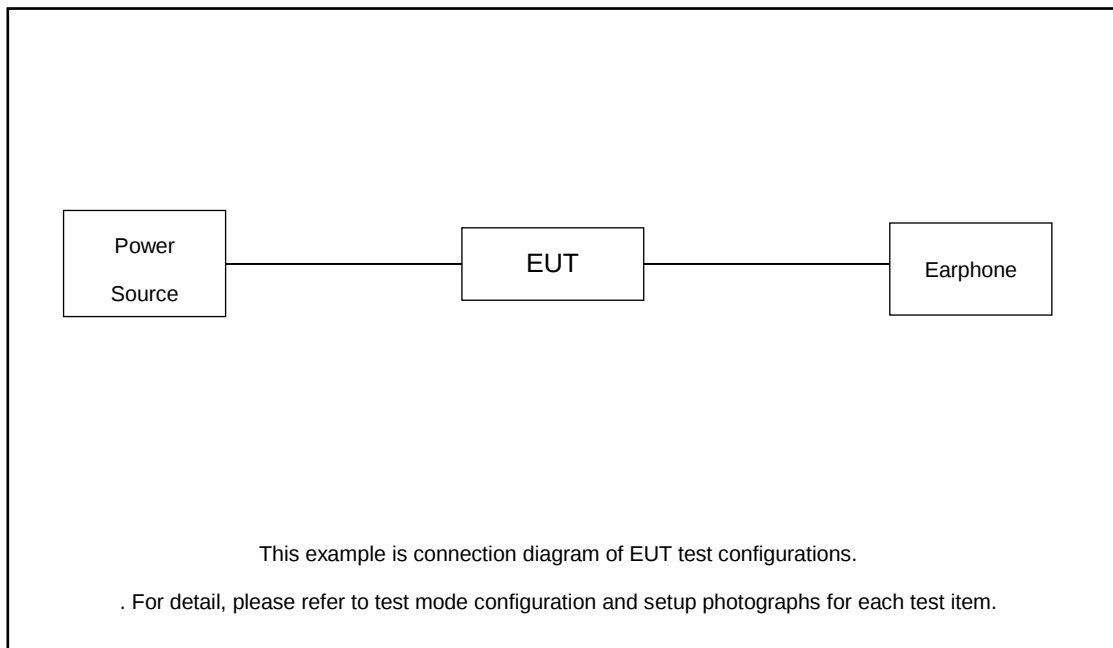

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	Earphone	Lenovo	SH100	N/A	Unshielded,1.2m	N/A
6.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.11 dB and 20dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.11 + 20 = 22.11 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

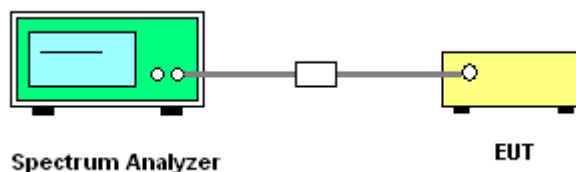

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

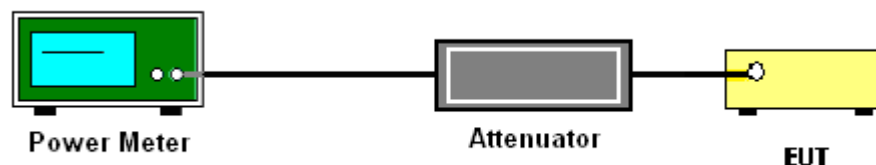



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant6	Ant6	Ant6	Ant6	Ant6	
11b	1Mbps	1	1	2412	23.45	30.00	-4.40	19.05	36.00	Pass
11b	1Mbps	1	6	2437	23.85	30.00	-4.40	19.45	36.00	Pass
11b	1Mbps	1	11	2462	23.93	30.00	-4.40	19.53	36.00	Pass
11g	6Mbps	1	1	2412	25.76	30.00	-4.40	21.36	36.00	Pass
11g	6Mbps	1	6	2437	26.54	30.00	-4.40	22.14	36.00	Pass
11g	6Mbps	1	11	2462	26.13	30.00	-4.40	21.73	36.00	Pass
HT20	MCS0	1	1	2412	25.79	30.00	-4.40	21.39	36.00	Pass
HT20	MCS0	1	6	2437	26.53	30.00	-4.40	22.13	36.00	Pass
HT20	MCS0	1	11	2462	25.65	30.00	-4.40	21.25	36.00	Pass
HT40	MCS0	1	3	2422	25.42	30.00	-4.40	21.02	36.00	Pass
HT40	MCS0	1	4	2427	26.44	30.00	-4.40	22.04	36.00	Pass
HT40	MCS0	1	6	2437	29.83	30.00	-4.40	25.43	36.00	Pass
HT40	MCS0	1	8	2447	26.43	30.00	-4.40	22.03	36.00	Pass
HT40	MCS0	1	9	2452	24.92	30.00	-4.40	20.52	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Setting	Pass /Fail
					Ant6	Ant6	Ant6	Ant6	Ant6	Ant6	Ant1	
11b	1Mbps	1	1	2412	0.00	21.17	30.00	-4.40	16.77	36.00	21.00	Pass
11b	1Mbps	1	6	2437	0.00	21.64	30.00	-4.40	17.24	36.00	21.00	Pass
11b	1Mbps	1	11	2462	0.00	21.65	30.00	-4.40	17.25	36.00	21.00	Pass
11g	6Mbps	1	1	2412	0.11	19.24	30.00	-4.40	14.84	36.00	19.50	Pass
11g	6Mbps	1	6	2437	0.11	20.68	30.00	-4.40	16.28	36.00	20.50	Pass
11g	6Mbps	1	11	2462	0.11	19.40	30.00	-4.40	15.00	36.00	19.00	Pass
HT20	MCS0	1	1	2412	0.12	19.20	30.00	-4.40	14.80	36.00	19.50	Pass
HT20	MCS0	1	6	2437	0.12	20.58	30.00	-4.40	16.18	36.00	20.50	Pass
HT20	MCS0	1	11	2462	0.12	18.36	30.00	-4.40	13.96	36.00	18.00	Pass
HT40	MCS0	1	3	2422	0.22	17.12	30.00	-4.40	12.72	36.00	17.50	Pass
HT40	MCS0	1	4	2427	0.22	17.34	30.00	-4.40	12.94	36.00	18.00	Pass
HT40	MCS0	1	6	2437	0.22	19.57	30.00	-4.40	15.17	36.00	20.00	Pass
HT40	MCS0	1	8	2447	0.22	17.24	30.00	-4.40	12.84	36.00	18.00	Pass
HT40	MCS0	1	9	2452	0.22	16.17	30.00	-4.40	11.77	36.00	16.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

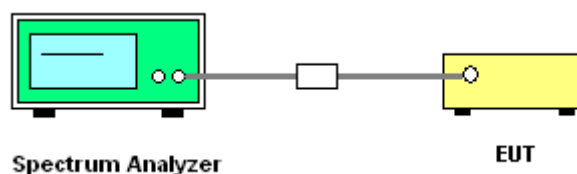

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

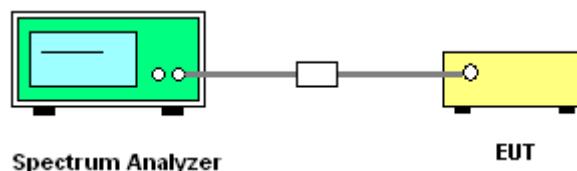

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A .

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

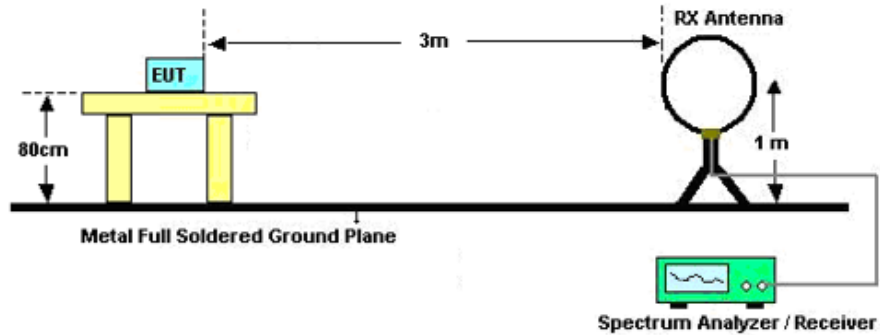

For radiated emissions from 30MHz to 1GHz

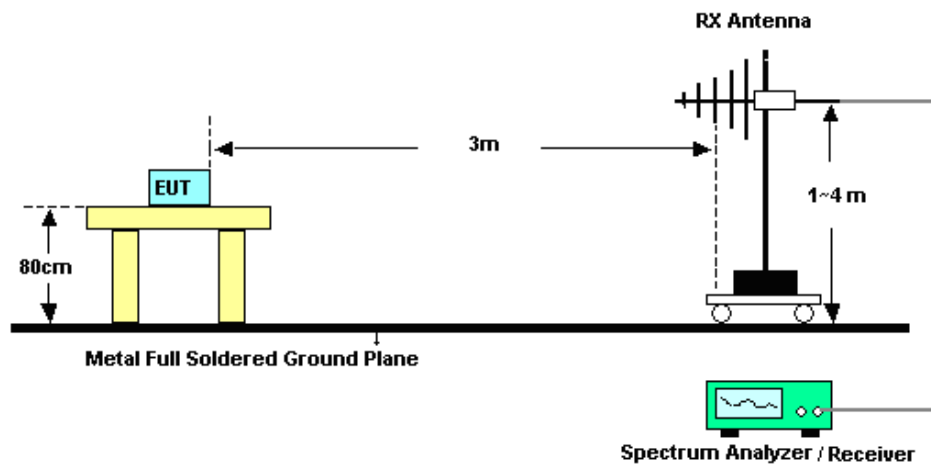

For radiated emissions above 1GHz

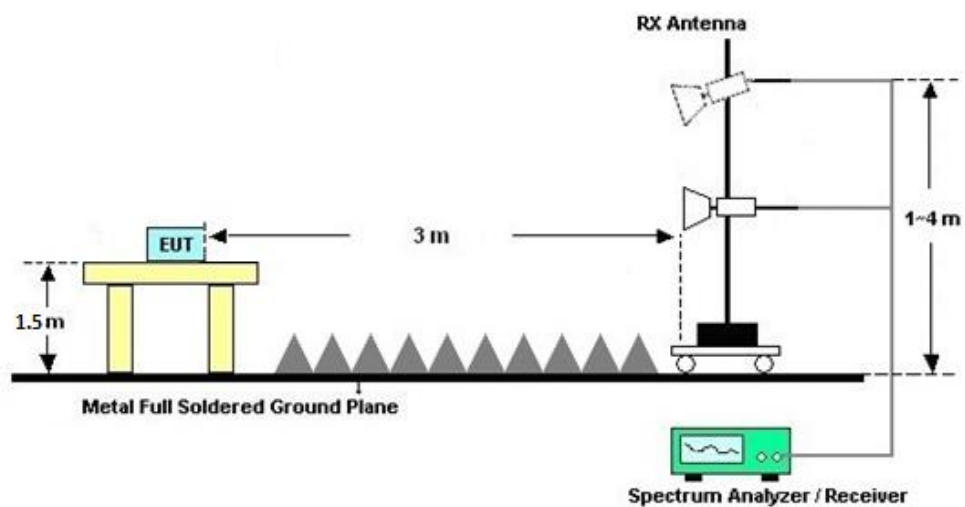

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

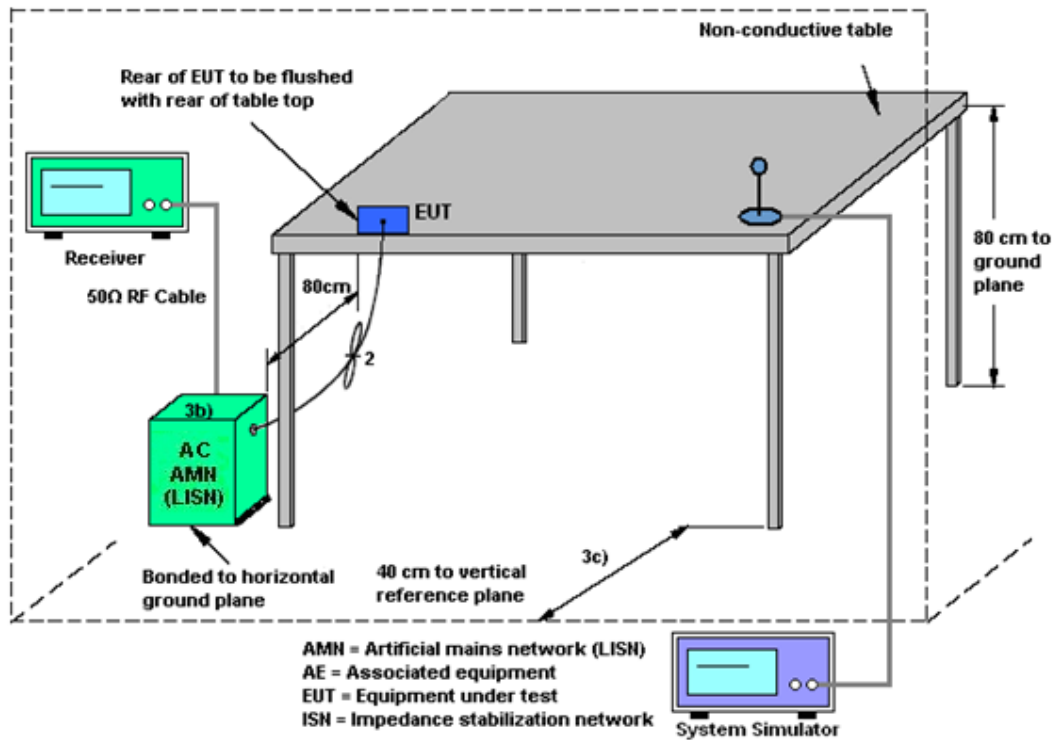

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Sep. 07, 2024~ Sep. 21, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Sep. 07, 2024~ Sep. 21, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Sep. 07, 2024~ Sep. 21, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 30, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Aug. 30, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Aug. 30, 2024	Dec. 05, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 30, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 30, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 30, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 30, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 30, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 30, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Sep. 25, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Sep. 25, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Sep. 25, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Sep. 25, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

**Ambient Condition:** 25 °C, 45 %RH**Test Date:** 2024.9.7~2024.9.21**Test Engineer:** Jiang Jun


DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant6	2412	7.53	2408.49	2416.02	0.5	PASS
		2437	8.08	2432.98	2441.06	0.5	PASS
		2462	8.08	2457.98	2466.06	0.5	PASS
11G	Ant6	2412	15.43	2404.48	2419.92	0.5	PASS
		2437	14.67	2429.88	2444.55	0.5	PASS
		2462	15.80	2454.12	2469.92	0.5	PASS
11N20SISO	Ant6	2412	16.56	2404.23	2420.79	0.5	PASS
		2437	15.43	2429.45	2444.88	0.5	PASS
		2462	14.70	2454.88	2469.59	0.5	PASS
11N40SISO	Ant6	2422	35.09	2404.49	2439.58	0.5	PASS
		2427	35.09	2409.49	2444.58	0.5	PASS
		2437	35.09	2419.49	2454.58	0.5	PASS
		2447	35.09	2429.49	2464.58	0.5	PASS
		2452	35.09	2434.49	2469.58	0.5	PASS




Test Graphs

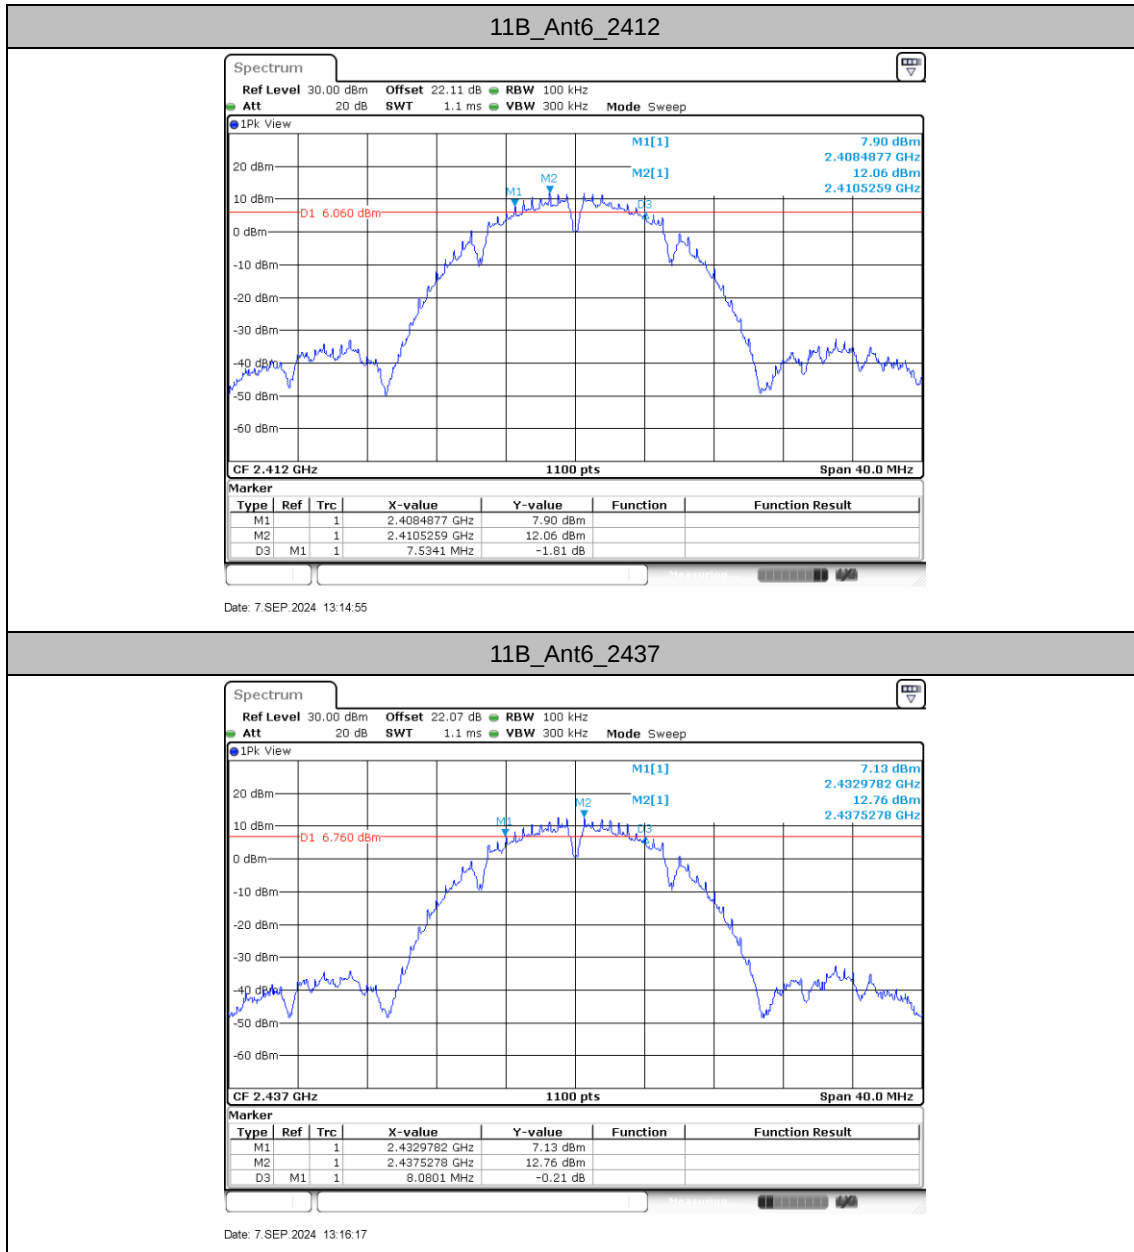




11B_Ant6_2462

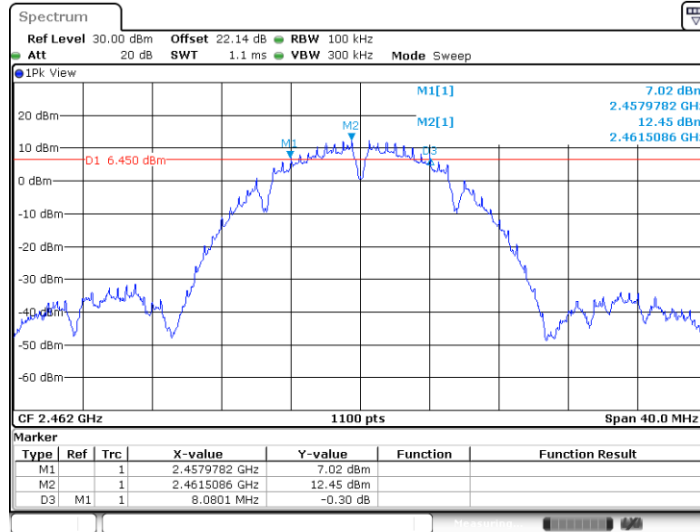

Date: 7.SEP.2024 13:17:30


11G_Ant6_2412

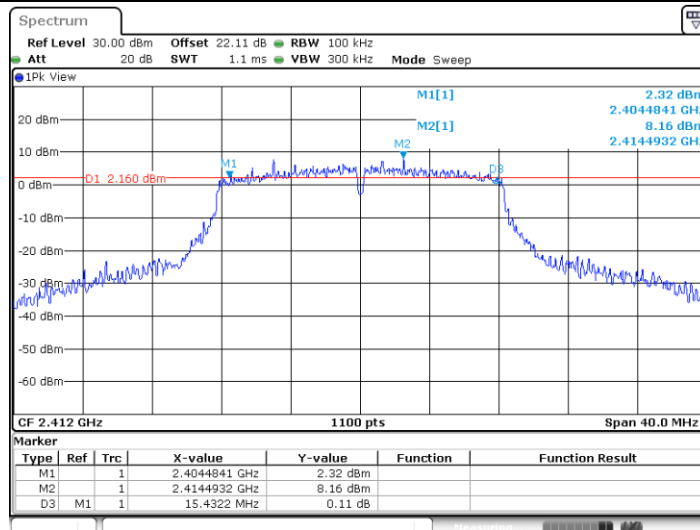

Date: 7.SEP.2024 13:18:58




11G_Ant6_2437

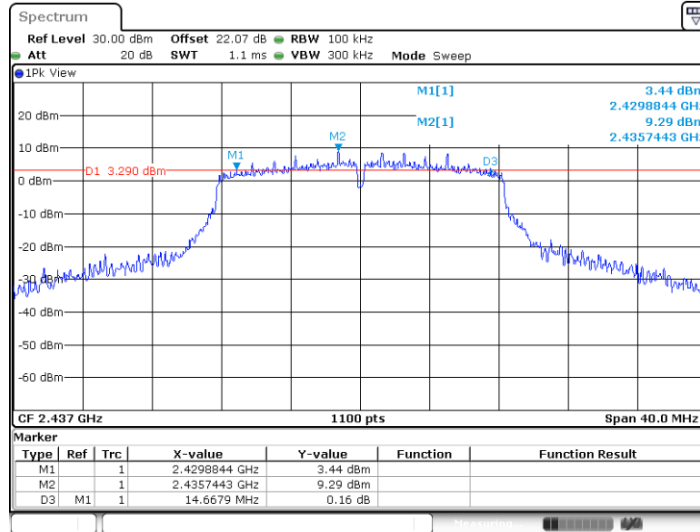

Date: 7.SEP.2024 13:20:23


11G_Ant6_2462

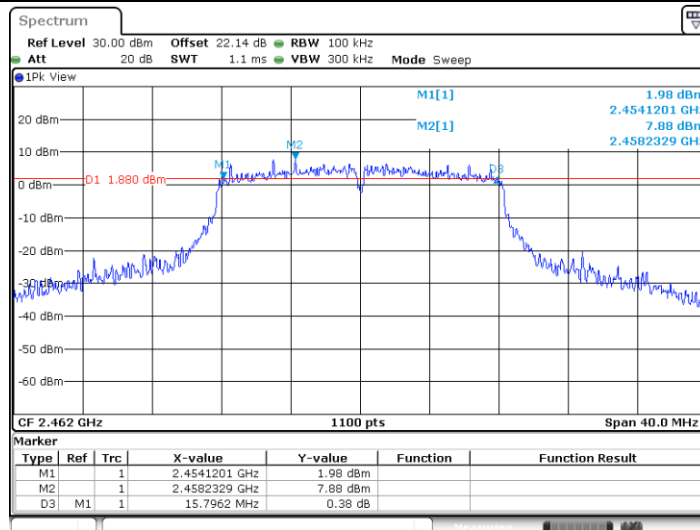

Date: 7.SEP.2024 13:21:38




11N20SISO_Ant6_2412

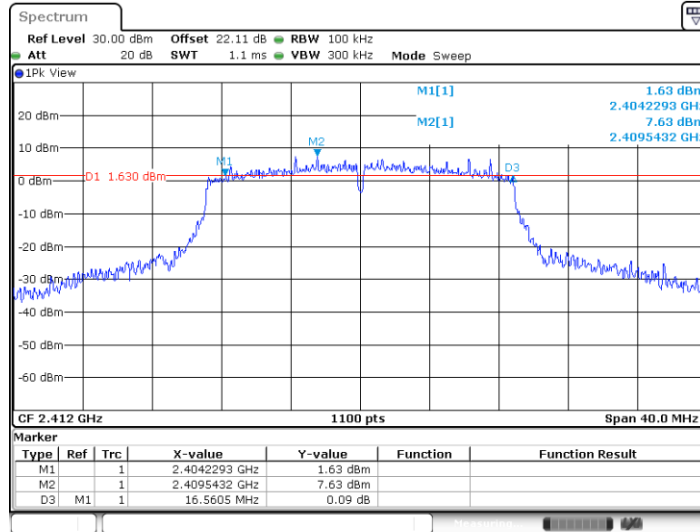

Date: 7.SEP.2024 13:23:31


11N20SISO_Ant6_2437

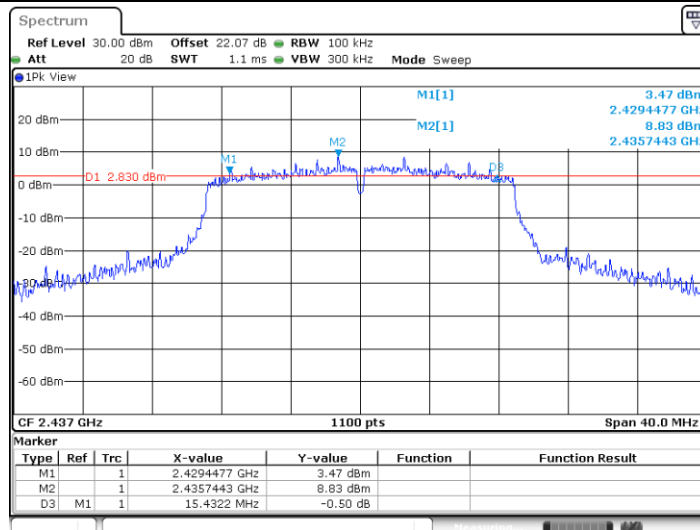

Date: 7.SEP.2024 13:25:20




11N20SISO_Ant6_2462

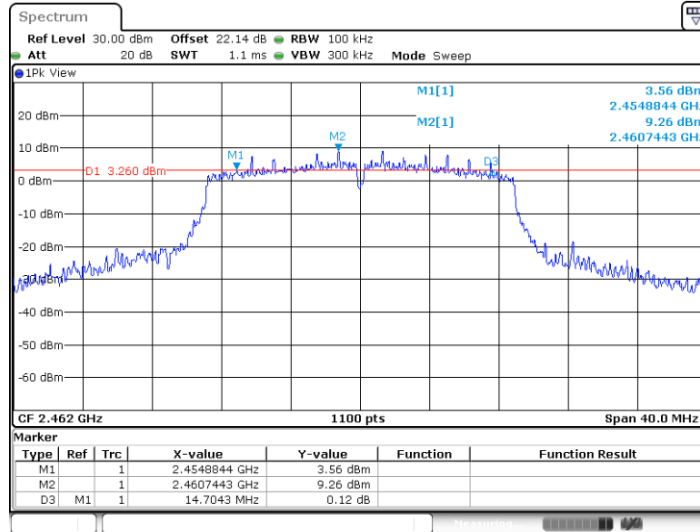

Date: 7 SEP 2024 13:26:45


11N40SISO_Ant6_2422

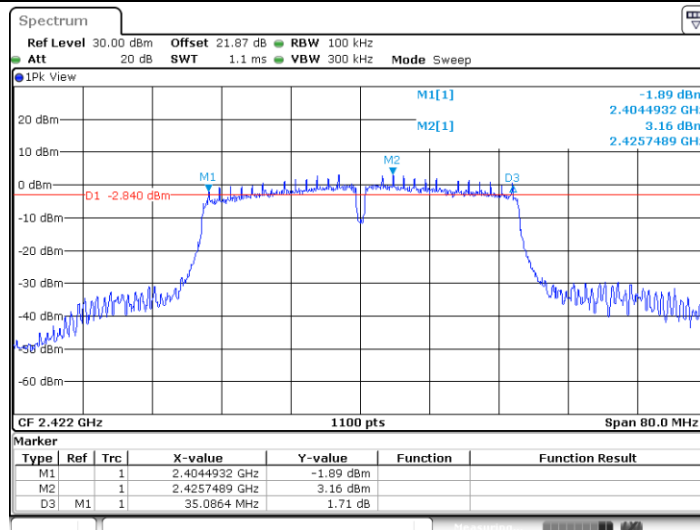

Date: 21 SEP 2024 17:05:20




11N40SISO_Ant6_2427

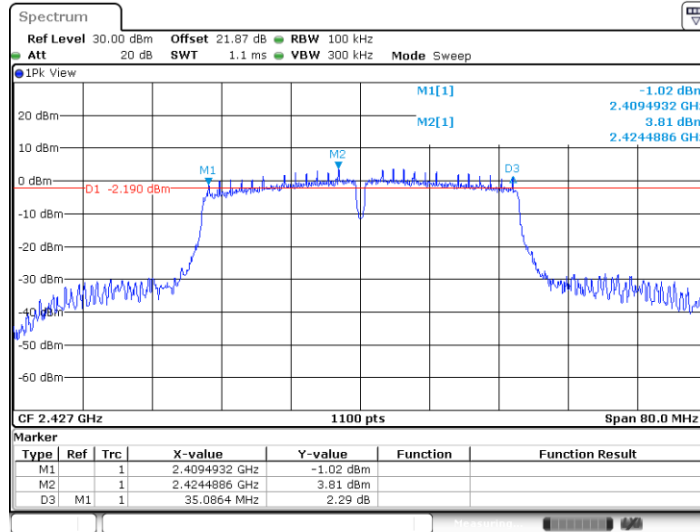

Date: 21.SEP.2024 17:07:23


11N40SISO_Ant6_2437

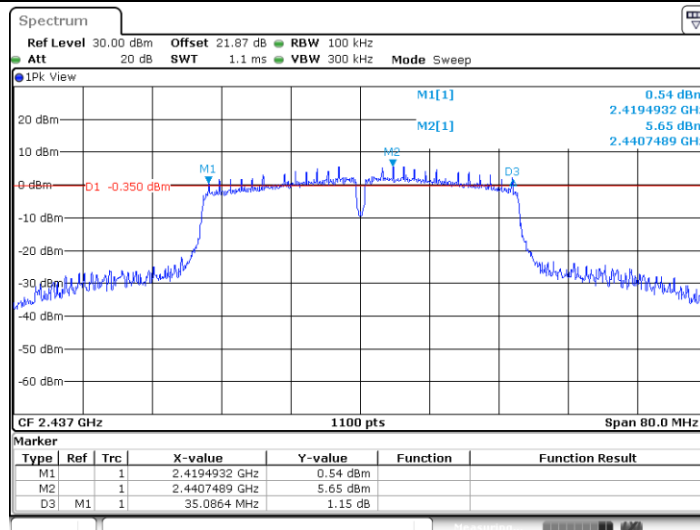

Date: 21.SEP.2024 17:08:53




11N40SISO_Ant6_2447

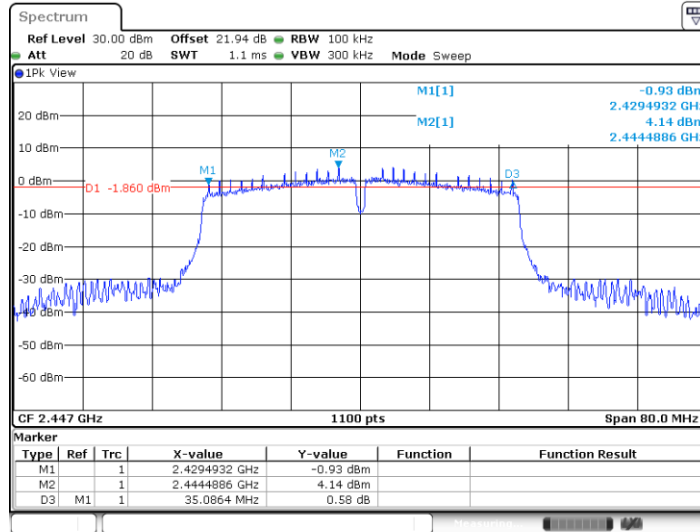

Date: 21.SEP.2024 17:10:09

11N40SISO_Ant6_2452

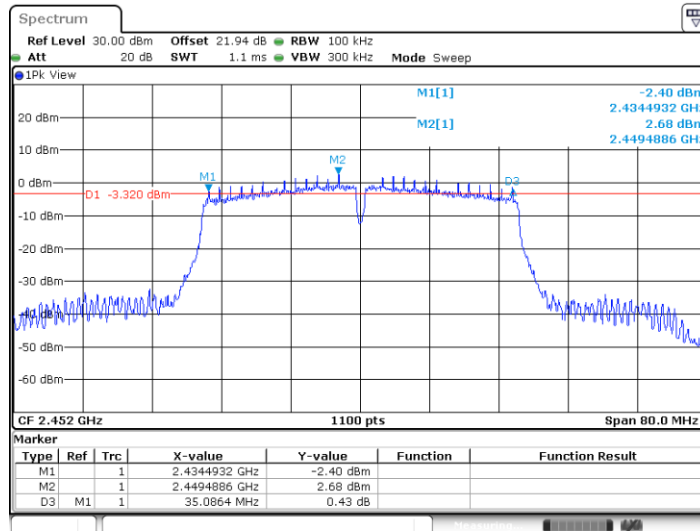

Date: 21.SEP.2024 17:11:37



Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant6	2412	12.8	2405.6545	2418.4545	---	---
		2437	12.836	2430.6545	2443.4909	---	---
		2462	12.764	2455.6182	2468.3818	---	---
11G	Ant6	2412	17.309	2403.4000	2420.7091	---	---
		2437	17.345	2428.4000	2445.7455	---	---
		2462	17.345	2453.2909	2470.6364	---	---
11N20SISO	Ant6	2412	18.218	2402.9273	2421.1455	---	---
		2437	18.327	2427.8545	2446.1818	---	---
		2462	18.364	2452.7455	2471.1091	---	---
11N40SISO	Ant6	2422	36.364	2404.0000	2440.3636	---	---
		2427	36.436	2408.9273	2445.3636	---	---
		2437	36.582	2418.7818	2455.3636	---	---
		2447	36.364	2428.8545	2465.2182	---	---
		2452	36.291	2433.8545	2470.1455	---	---




Test Graphs






11B_Ant6_2462

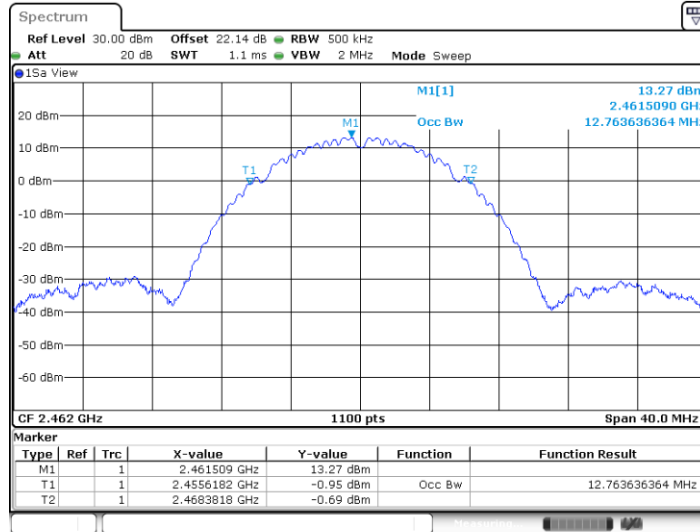

Date: 7.SEP.2024 13:17:36


11G_Ant6_2412

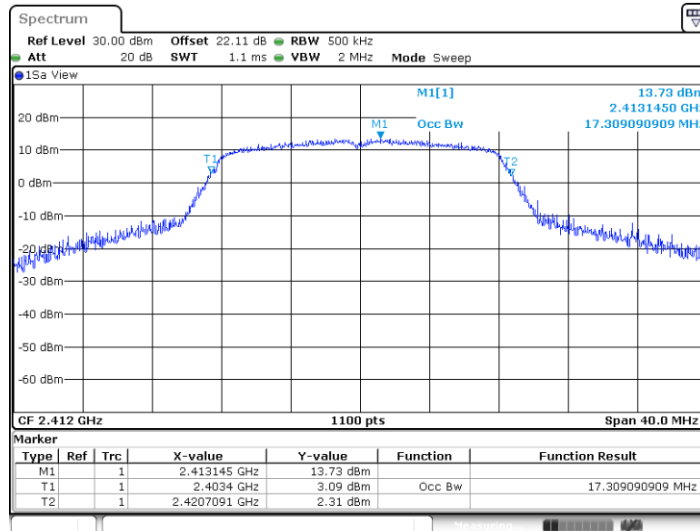

Date: 7.SEP.2024 13:19:04




11G_Ant6_2437

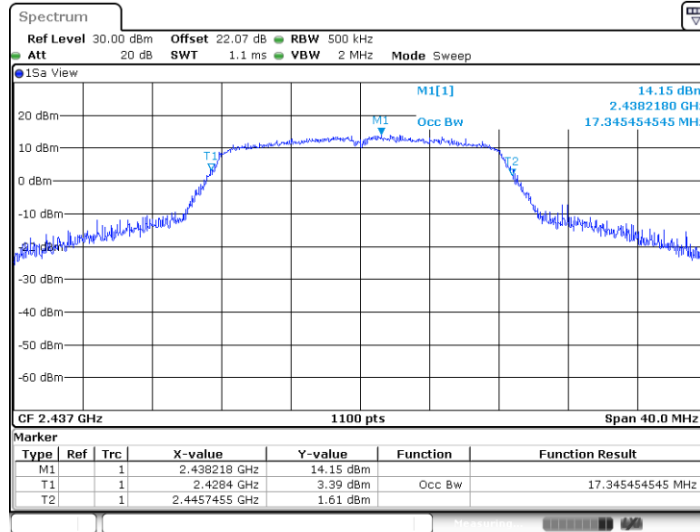

Date: 7.SEP.2024 13:20:29


11G_Ant6_2462

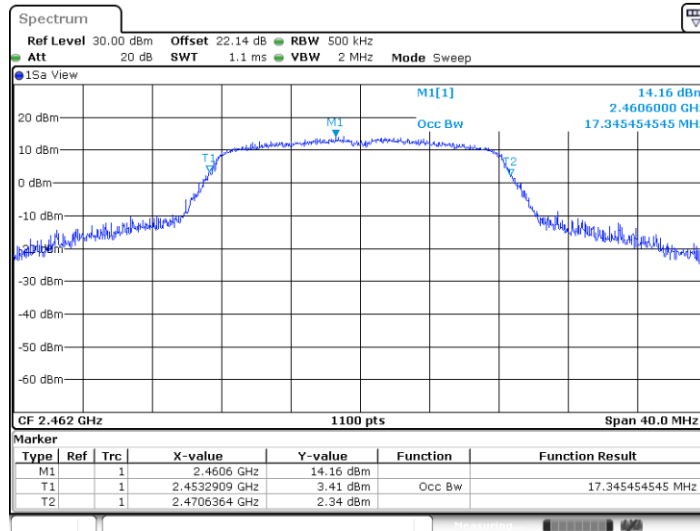

Date: 7.SEP.2024 13:21:44




11N20SISO_Ant6_2412

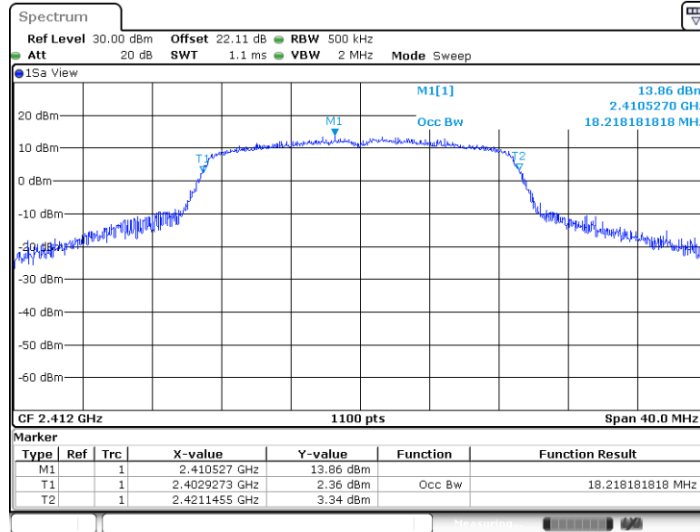

Date: 7.SEP.2024 13:23:37


11N20SISO_Ant6_2437

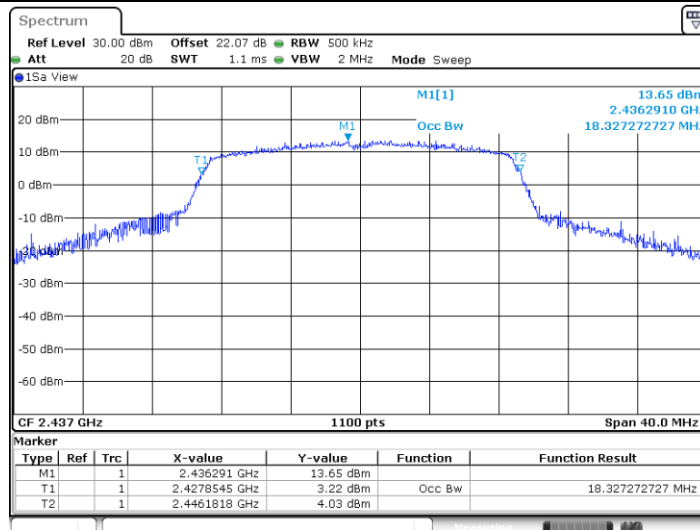


Date: 7.SEP.2024 13:25:26



11N20SISO_Ant6_2462

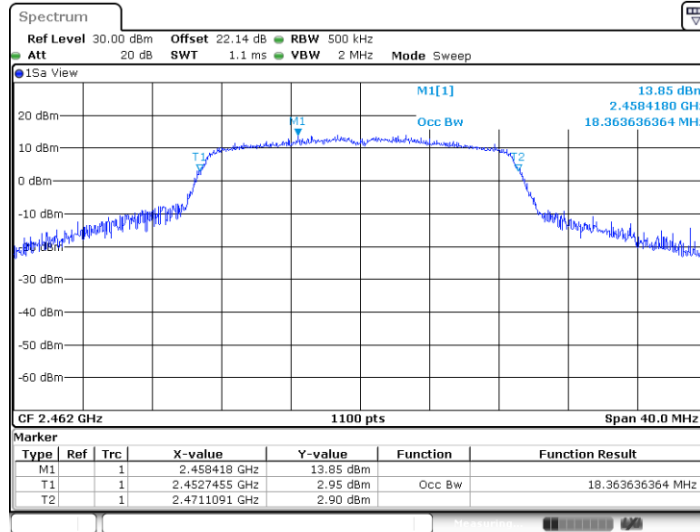


11N40SISO_Ant6_2422

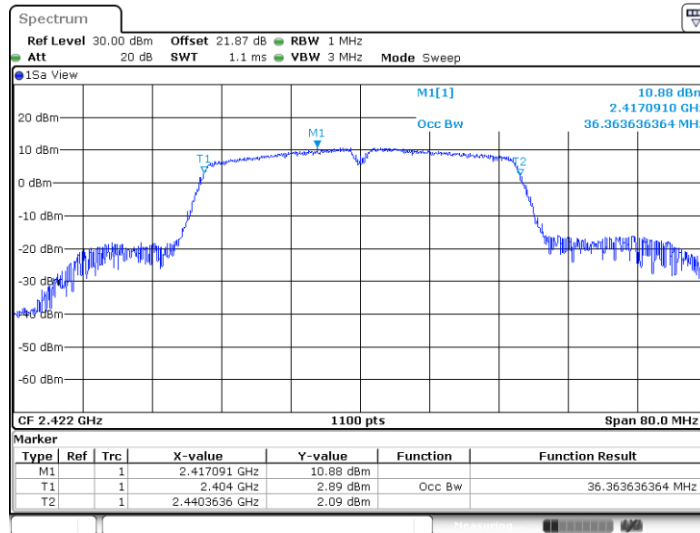




11N40SISO_Ant6_2427

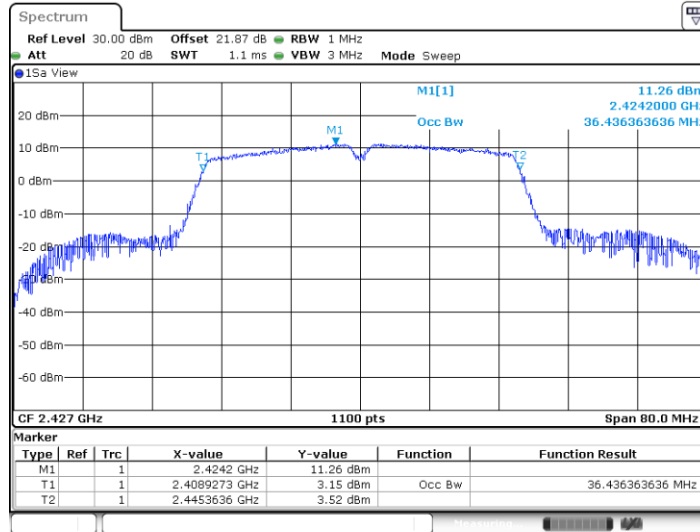

Date: 21.SEP.2024 17:07:30


11N40SISO_Ant6_2437

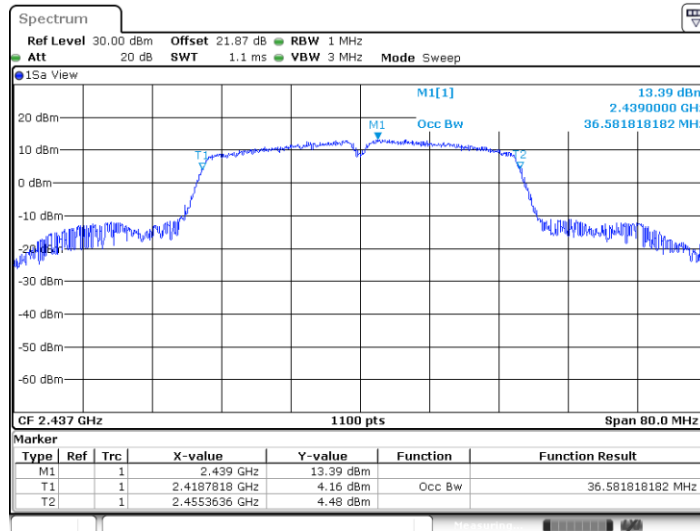

Date: 21.SEP.2024 17:09:00




11N40SISO_Ant6_2447

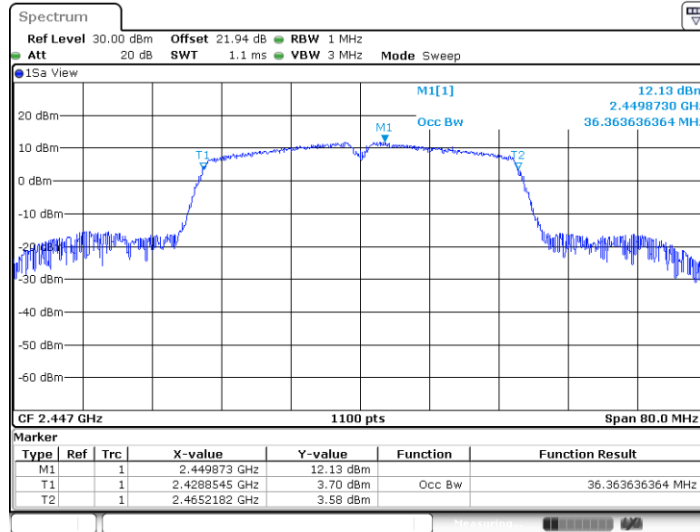

Date: 21.SEP.2024 17:10:16

11N40SISO_Ant6_2452

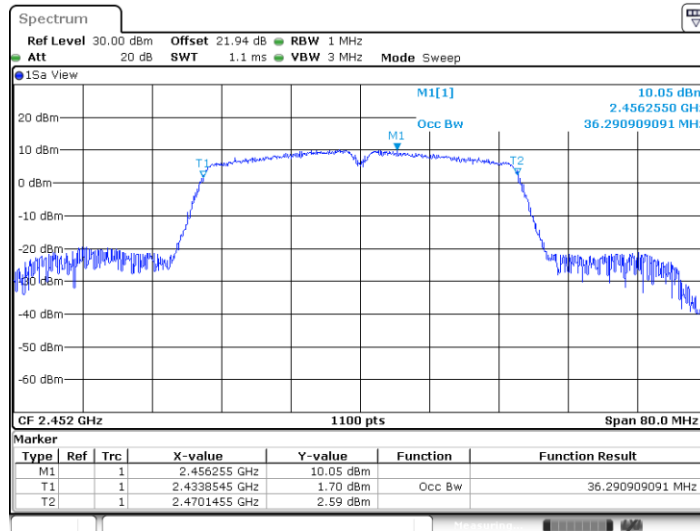

Date: 21.SEP.2024 17:11:43




Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant6	2412	-0.68	≤8.00	PASS
		2437	-1.18	≤8.00	PASS
		2462	-0.58	≤8.00	PASS
11G	Ant6	2412	-6.58	≤8.00	PASS
		2437	-4.79	≤8.00	PASS
		2462	-6.47	≤8.00	PASS
11N20SISO	Ant6	2412	-5.72	≤8.00	PASS
		2437	-4.11	≤8.00	PASS
		2462	-7.28	≤8.00	PASS
11N40SISO	Ant6	2422	-11.16	≤8.00	PASS
		2427	-10.54	≤8.00	PASS
		2437	-9.04	≤8.00	PASS
		2447	-10.42	≤8.00	PASS
		2452	-12.3	≤8.00	PASS




Test Graphs

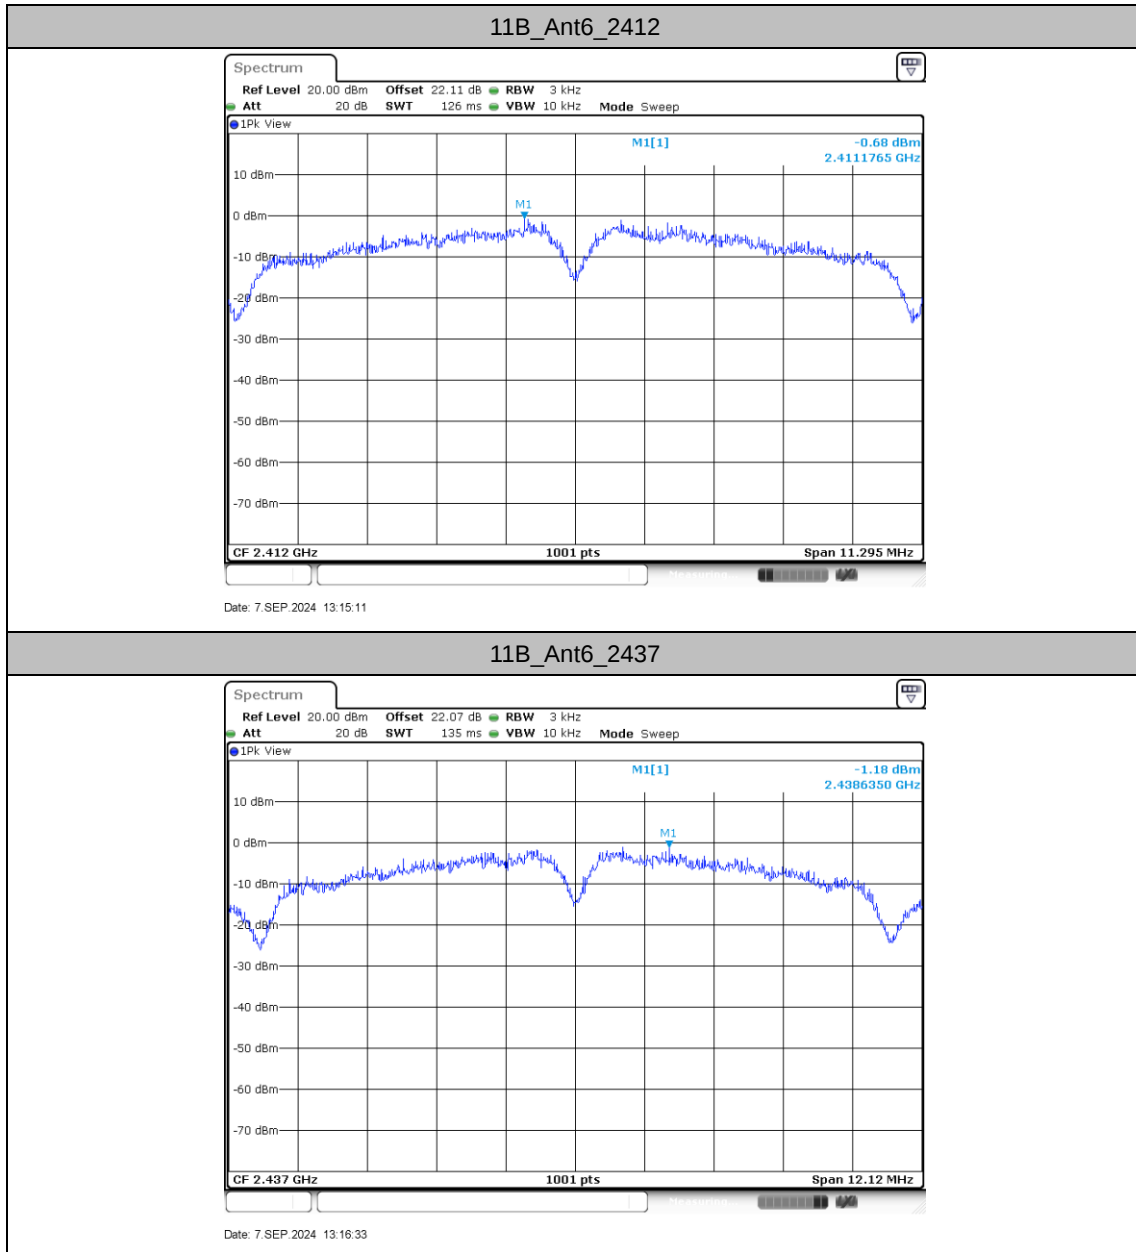




11B_Ant6_2462

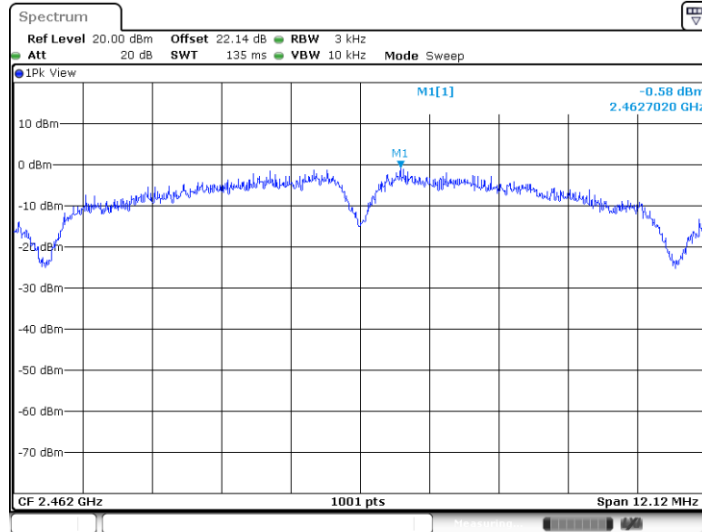

Date: 7.SEP.2024 13:17:47


11G_Ant6_2412

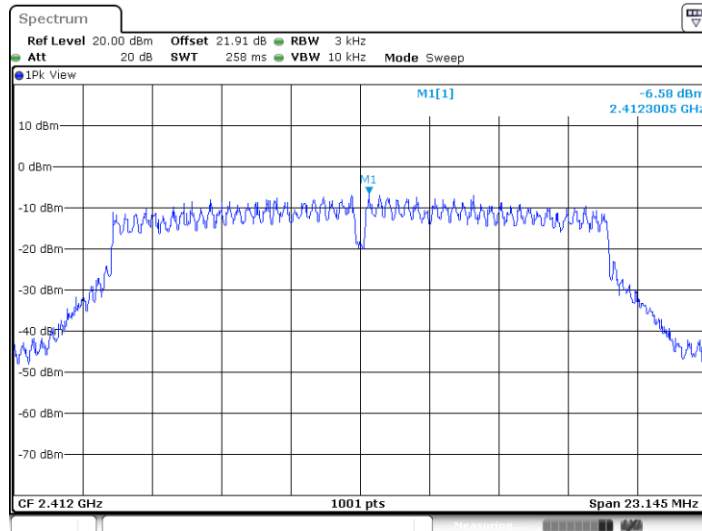

Date: 21.SEP.2024 16:58:01




11G_Ant6_2437

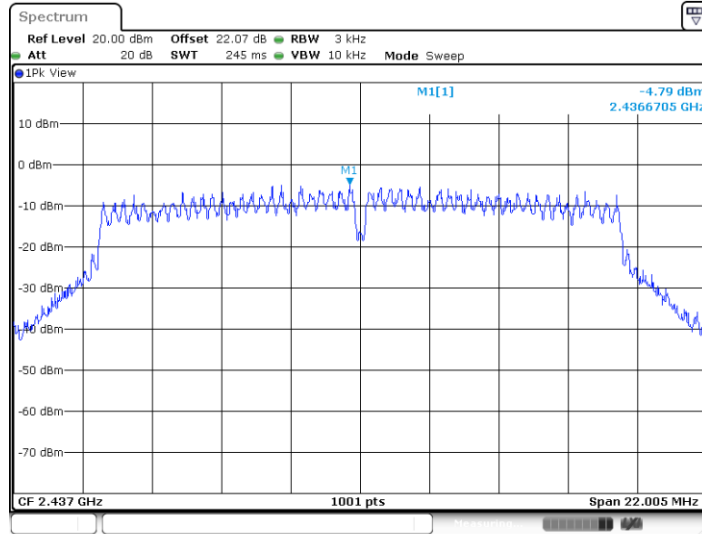

Date: 7 SEP 2024 13:20:40


11G_Ant6_2462

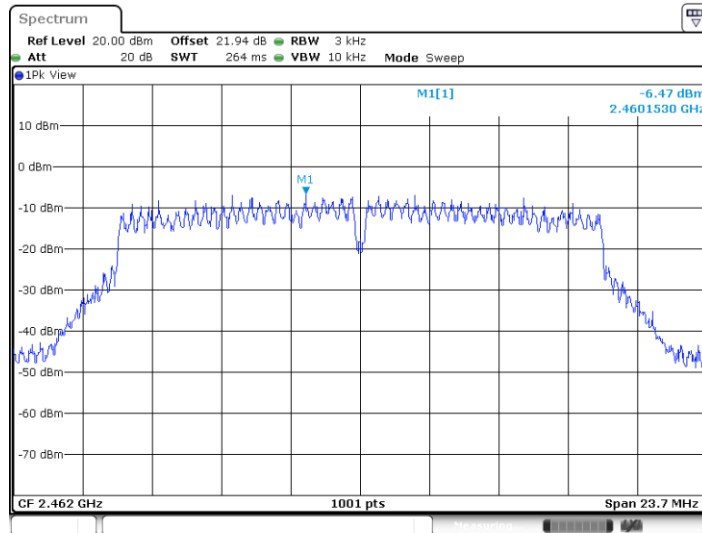

Date: 21 SEP 2024 16:59:39




11N20SISO_Ant6_2412

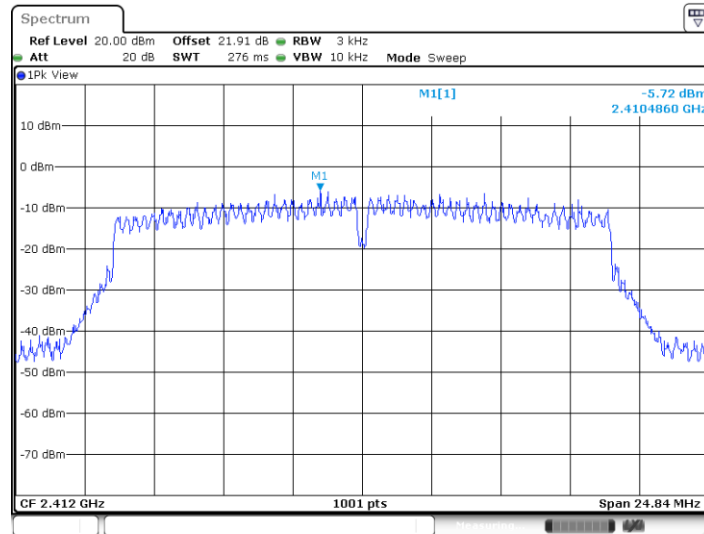

Date: 21.SEP.2024 17:03:50


11N20SISO_Ant6_2437

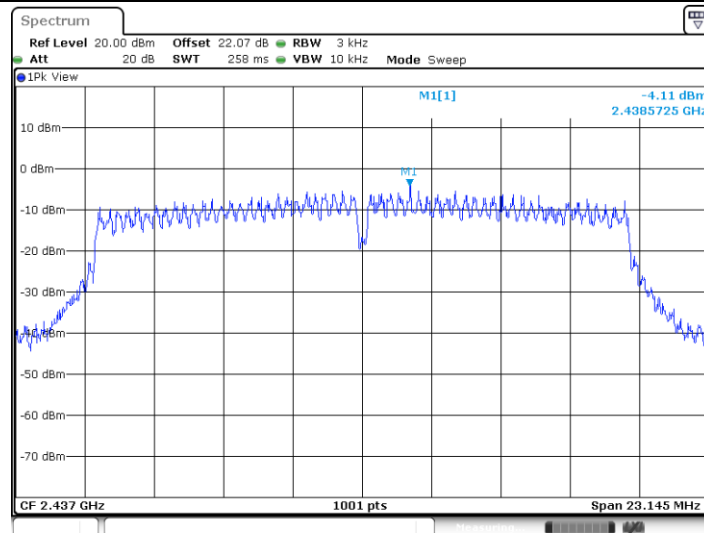

Date: 7.SEP.2024 13:25:37




11N20SISO_Ant6_2462

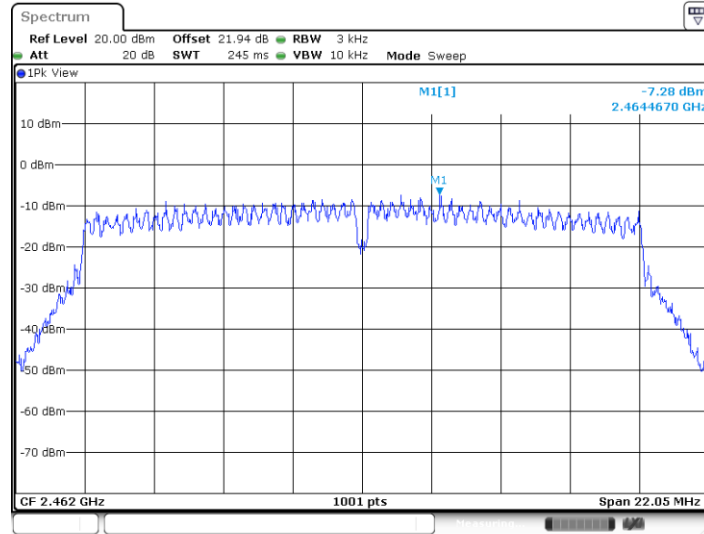

Date: 21.SEP.2024 17:04:46


11N40SISO_Ant6_2422

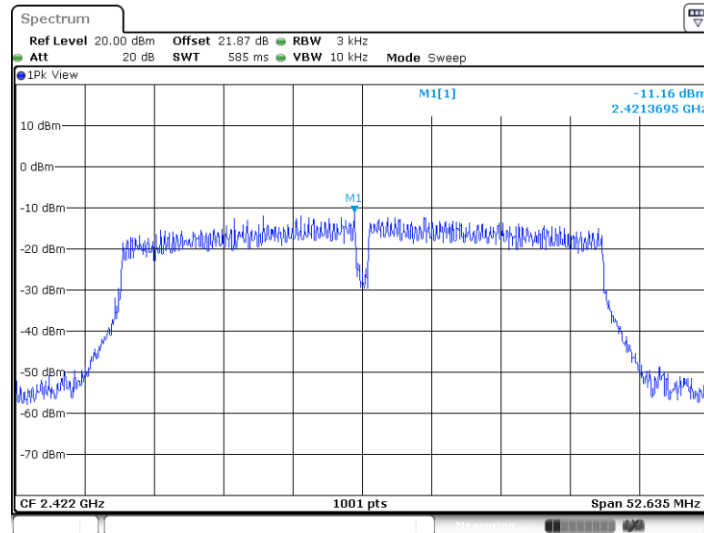


Date: 21.SEP.2024 17:05:37



11N40SISO_Ant6_2427

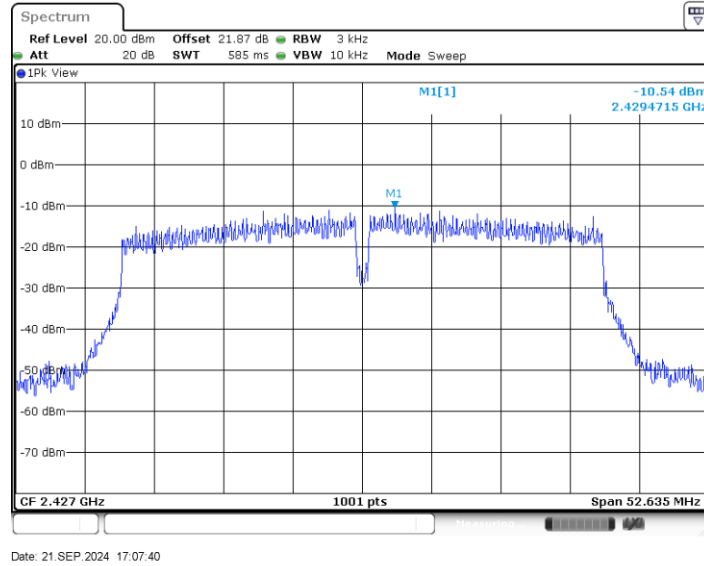


11N40SISO_Ant6_2437

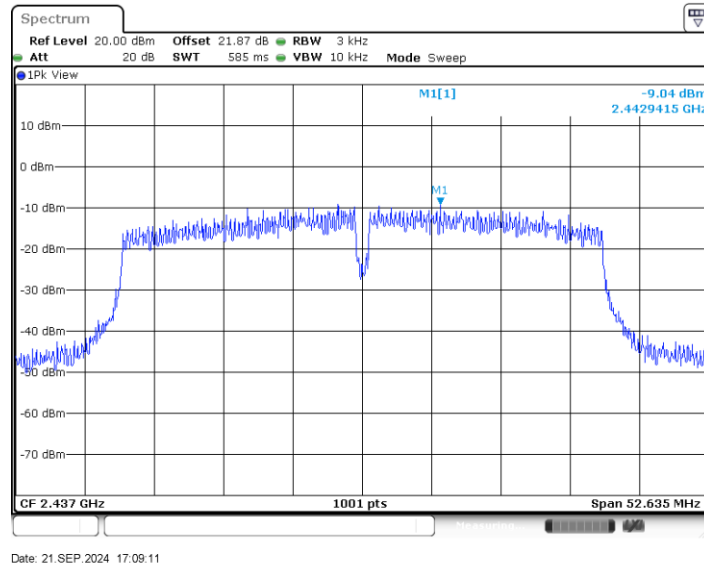




11N40SISO_Ant6_2447

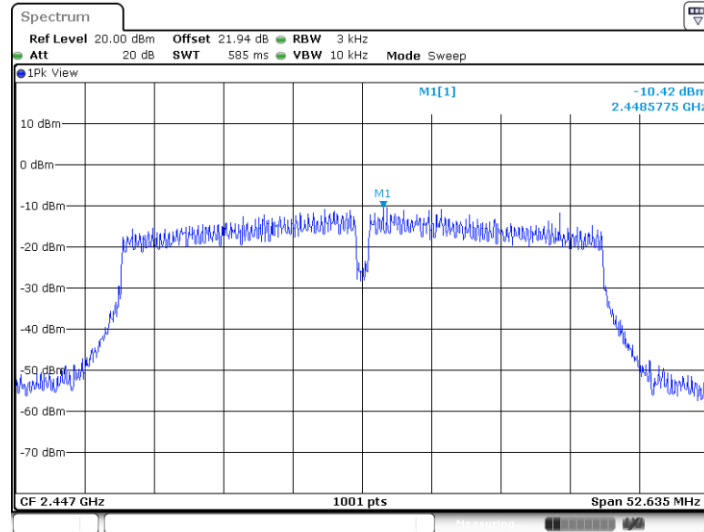

Date: 21.SEP.2024 17:10:27

11N40SISO_Ant6_2452

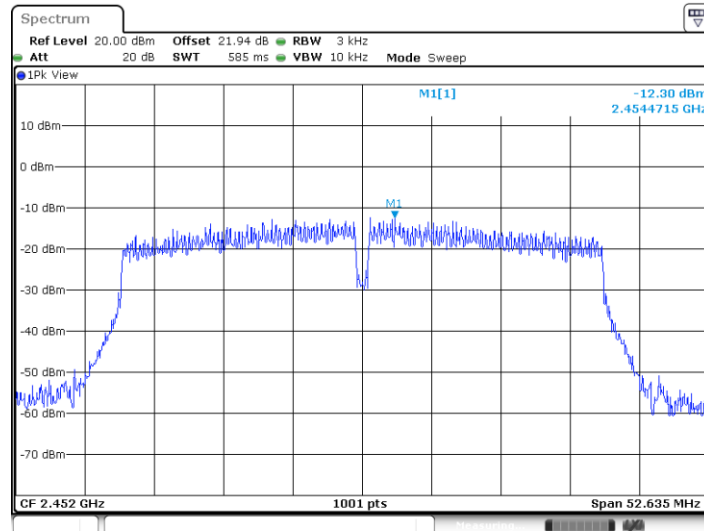

Date: 21.SEP.2024 17:11:53




Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	Ant6	2412	2413.00	12.27
		2437	2437.51	12.66
		2462	2461.51	13.13
11G	Ant6	2412	2413.27	8.92
		2437	2438.24	9.23
		2462	2463.27	9.32
11N20SISO	Ant6	2412	2410.74	8.79
		2437	2438.27	9.13
		2462	2460.72	9.09
11N40SISO	Ant6	2422	2419.49	3.07
		2427	2430.73	3.71
		2437	2440.73	5.65
		2447	2444.49	4.15
		2452	2449.49	2.52




Test Graphs

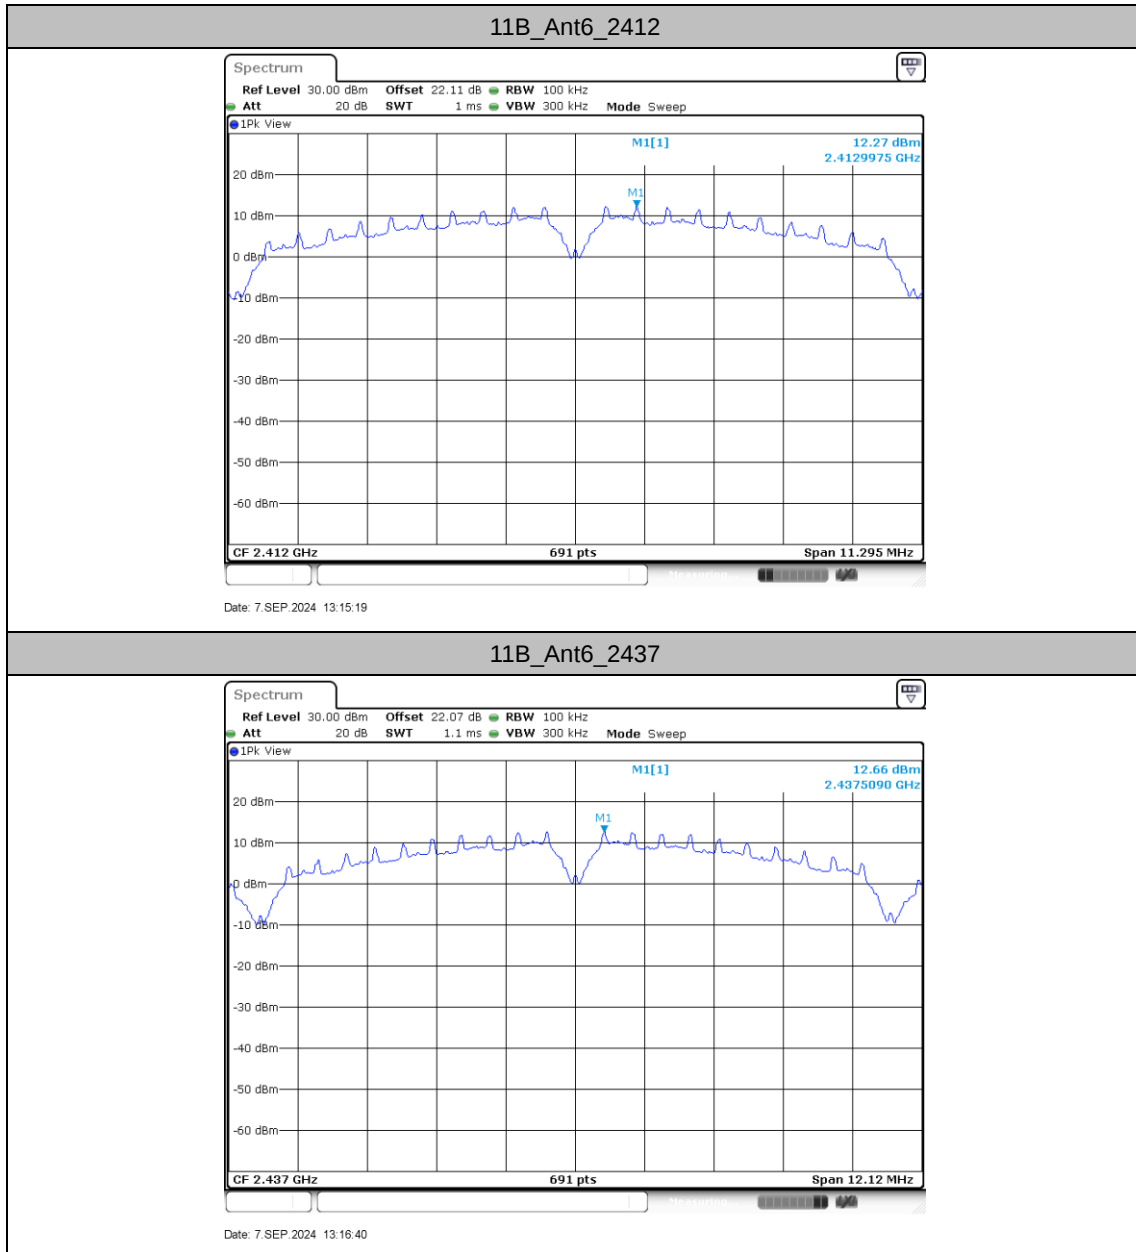




11B_Ant6_2462

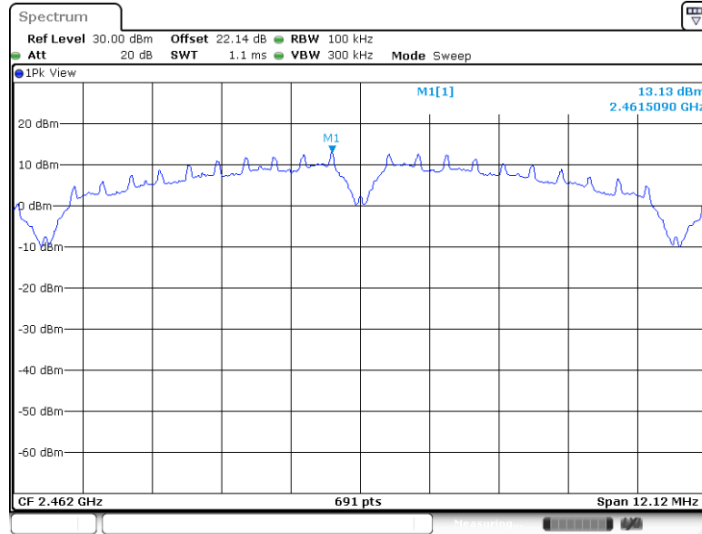

Date: 7.SEP.2024 13:17:54


11G_Ant6_2412

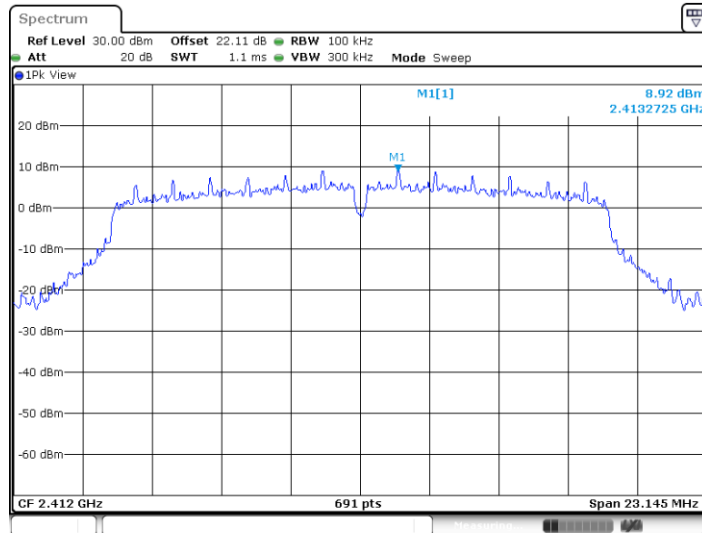

Date: 7.SEP.2024 13:19:22




11G_Ant6_2437

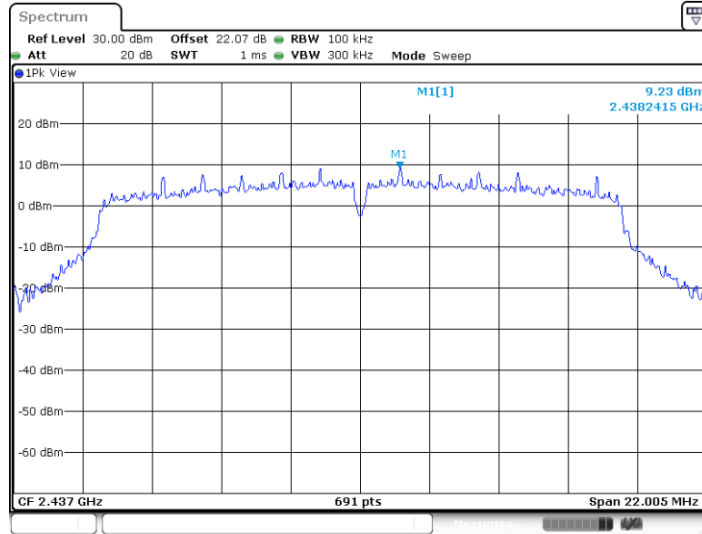

Date: 7.SEP.2024 13:20:47


11G_Ant6_2462

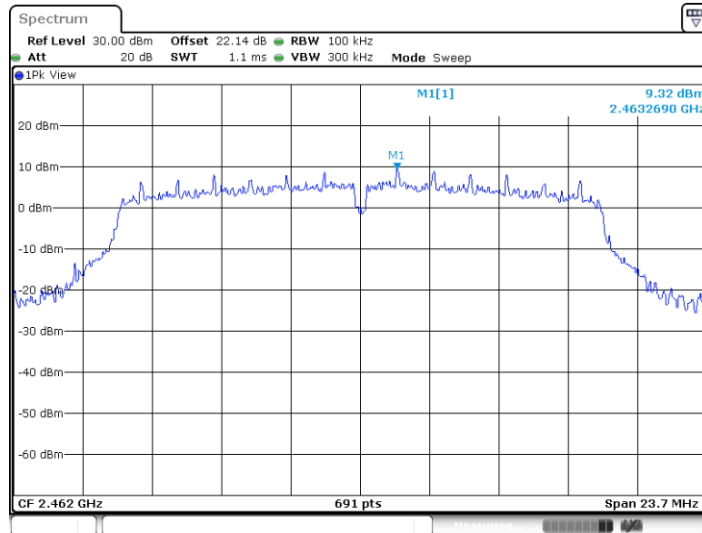

Date: 7.SEP.2024 13:22:03




11N20SISO_Ant6_2412

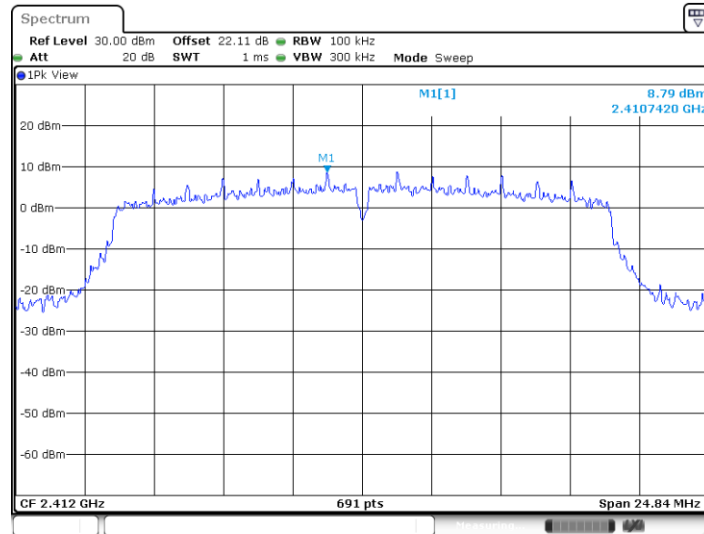

Date: 7.SEP.2024 13:23:55


11N20SISO_Ant6_2437

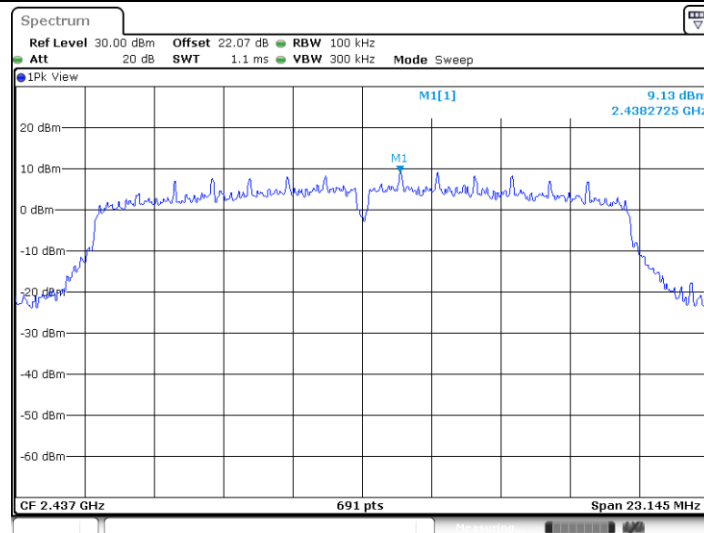

Date: 7.SEP.2024 13:25:44




11N20SISO_Ant6_2462

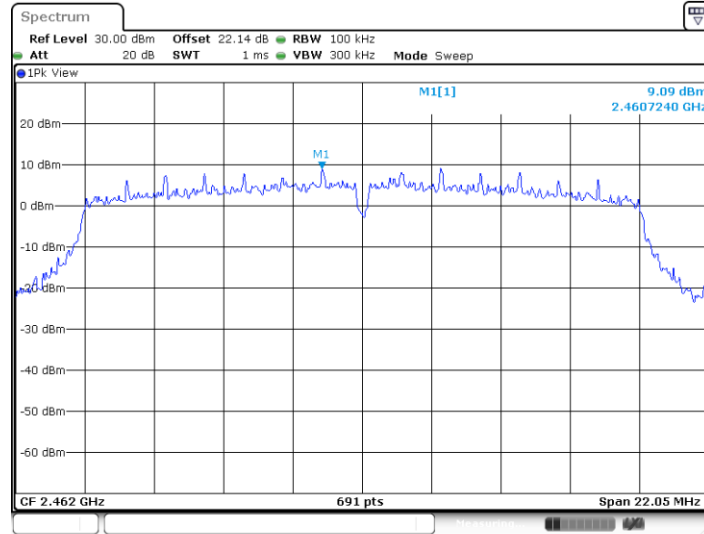

Date: 7 SEP 2024 13:27:09


11N40SISO_Ant6_2422

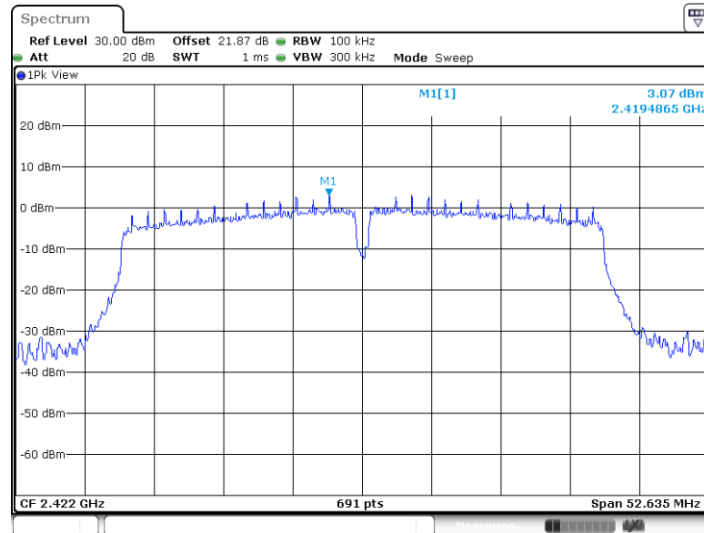

Date: 21 SEP 2024 17:05:44




11N40SISO_Ant6_2427

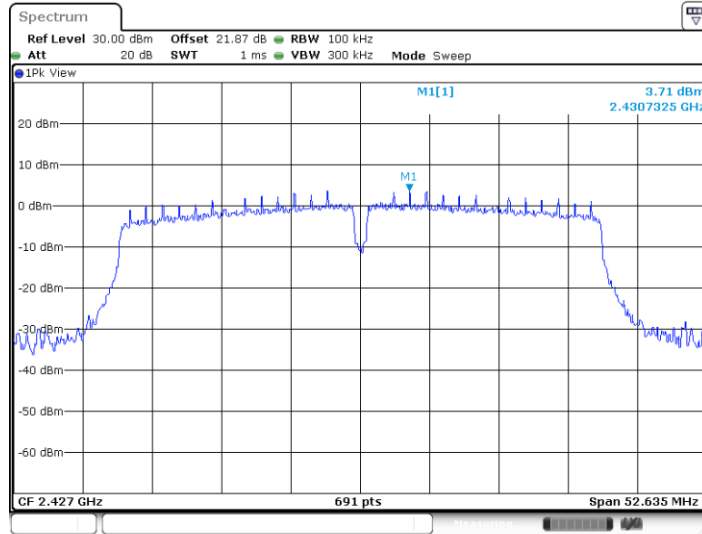

Date: 21.SEP.2024 17:07:48


11N40SISO_Ant6_2437

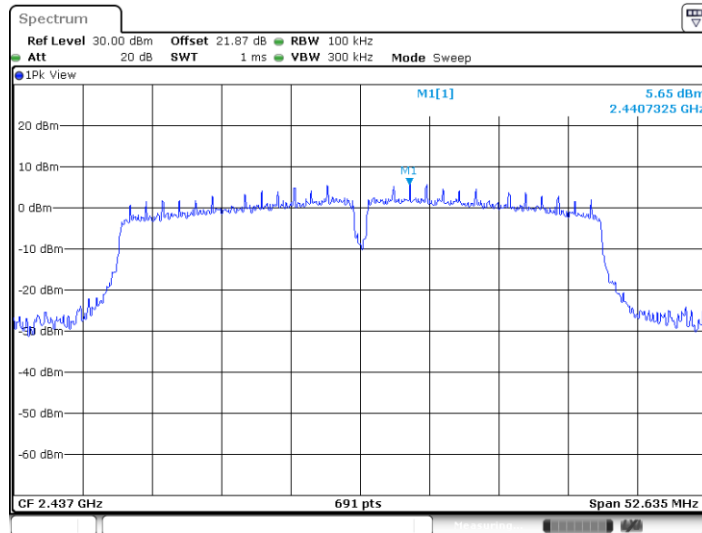

Date: 21.SEP.2024 17:09:18




11N40SISO_Ant6_2447

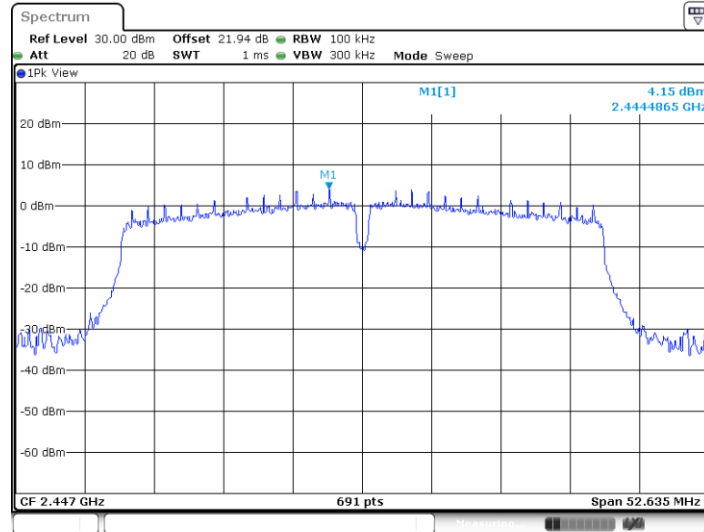

Date: 21.SEP.2024 17:10:34

11N40SISO_Ant6_2452

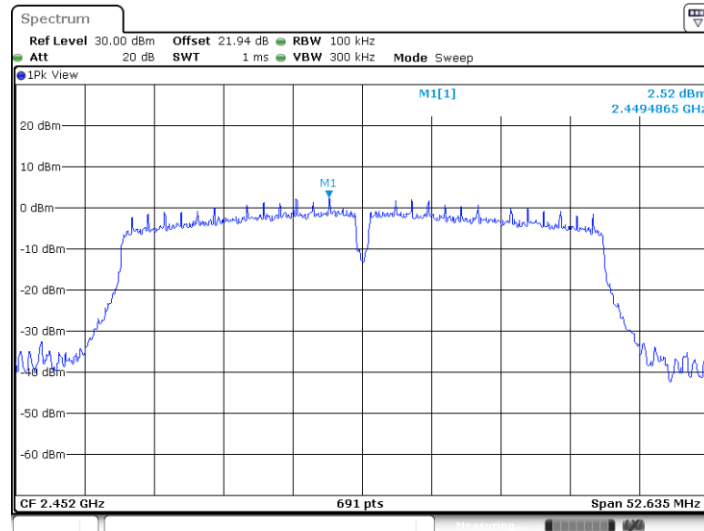

Date: 21.SEP.2024 17:12:01




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq (MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
11B	Ant6	Low	2412	12.27	-32.07	≤ -7.73	PASS
		High	2462	13.13	-44.97	≤ -6.87	PASS
11G	Ant6	Low	2412	8.92	-21.83	≤ -11.08	PASS
		High	2462	9.32	-33.4	≤ -10.68	PASS
11N20SISO	Ant6	Low	2412	8.79	-20.54	≤ -11.21	PASS
		High	2462	9.09	-33.71	≤ -10.91	PASS
11N40SISO	Ant6	Low	2422	3.07	-31.45	≤ -16.93	PASS
			2427	3.71	-30.3	≤ -16.29	PASS
		High	2447	4.15	-35.28	≤ -15.85	PASS
			2452	2.52	-36.97	≤ -17.48	PASS




Test Graphs

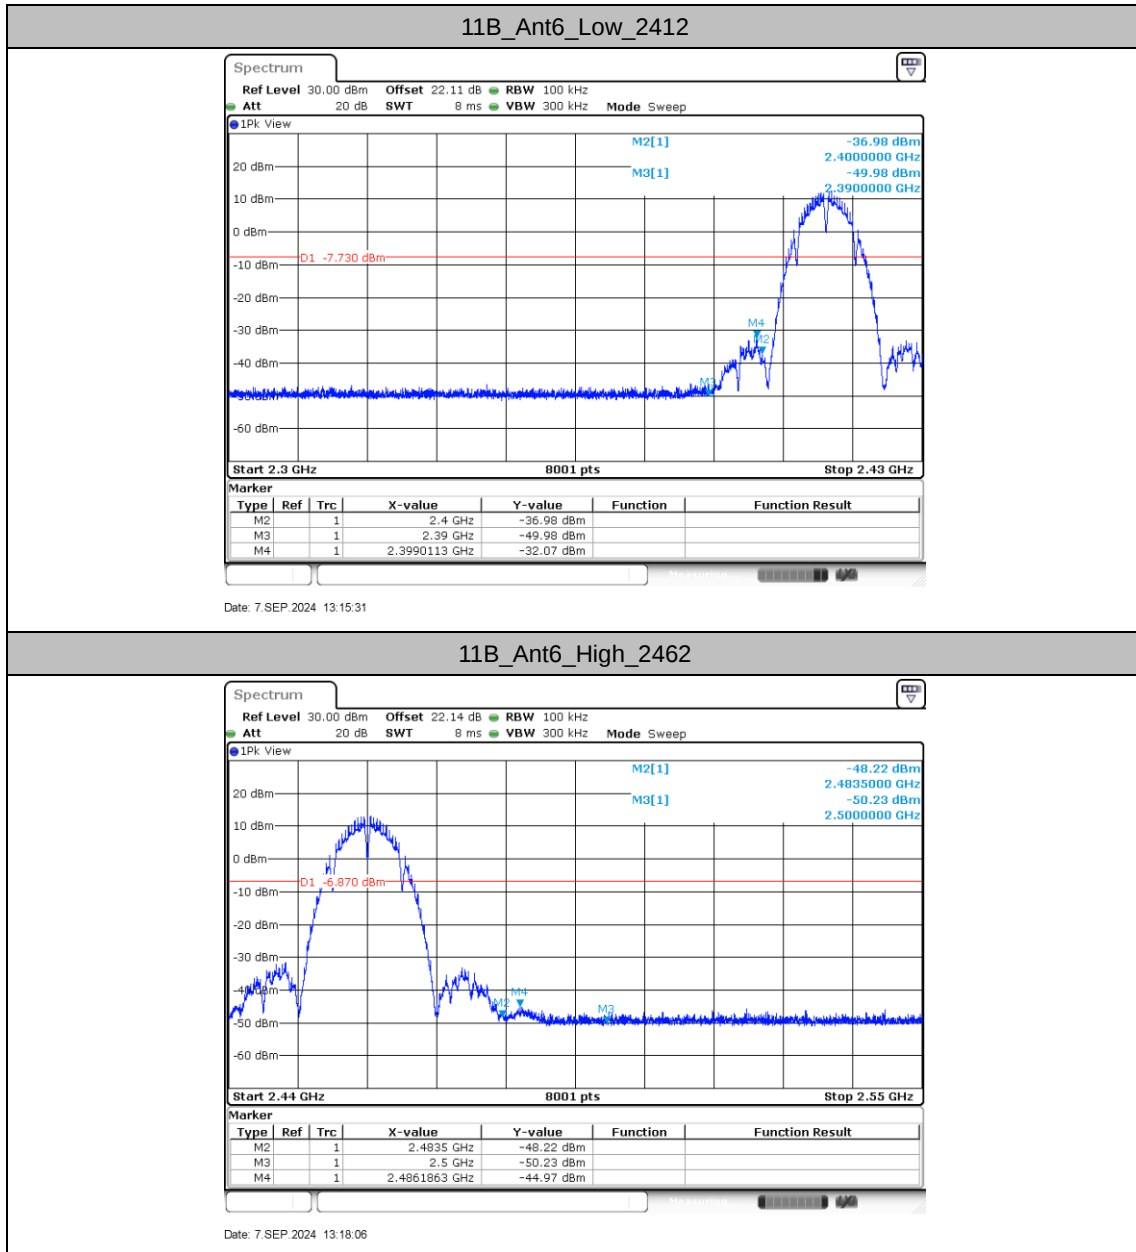




11G_Ant6_Low_2412

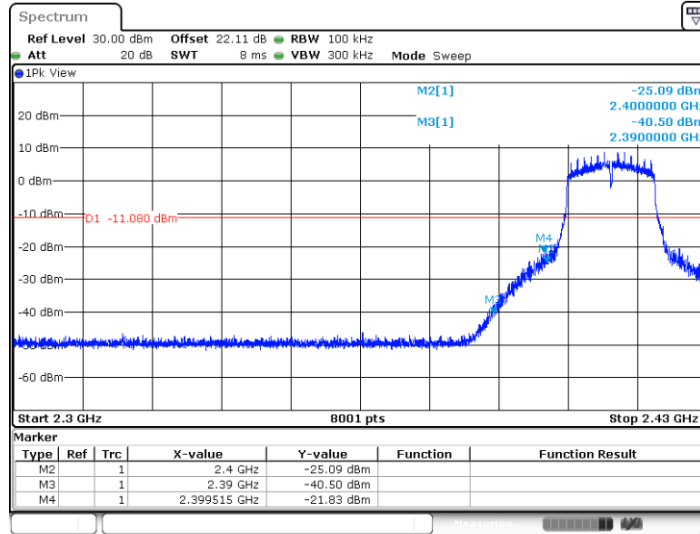

Date: 7.SEP.2024 13:19:34


11G_Ant6_High_2462

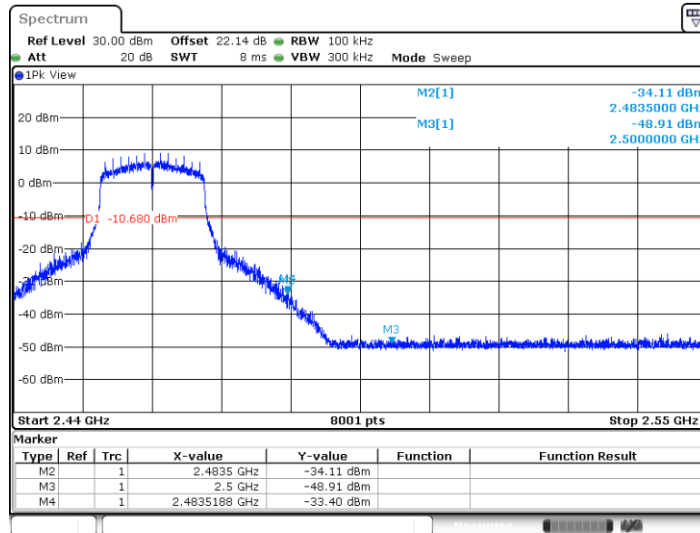

Date: 7.SEP.2024 13:22:16




11N20SISO_Ant6_Low_2412

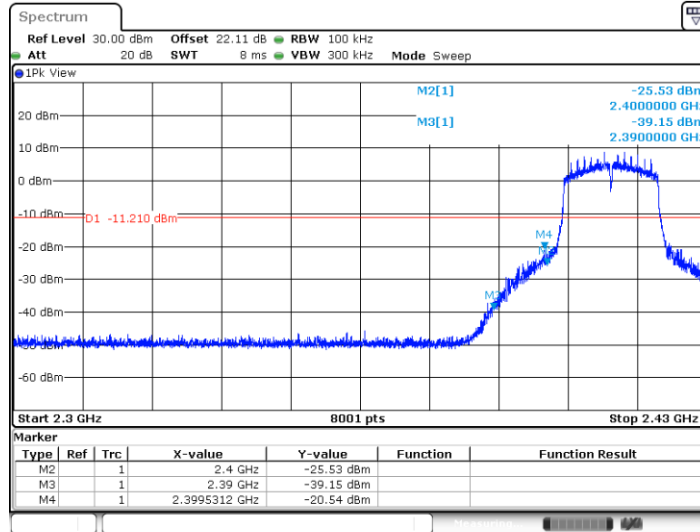

Date: 7.SEP.2024 13:24:07


11N20SISO_Ant6_High_2462

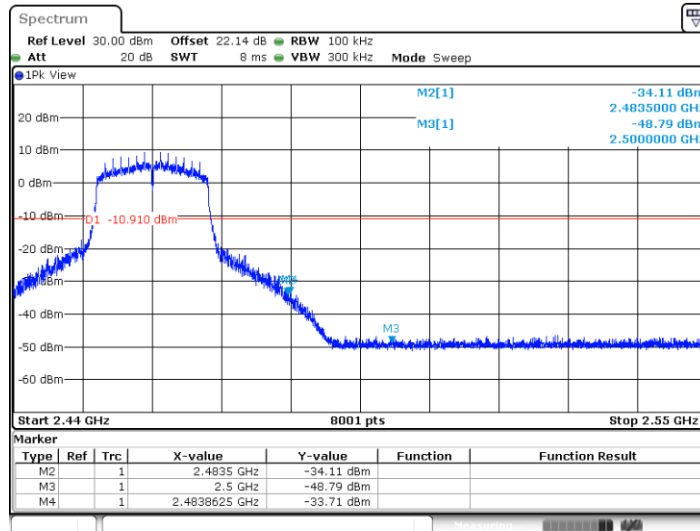


Date: 7.SEP.2024 13:27:21



11N40SISO_Ant6_Low_2422

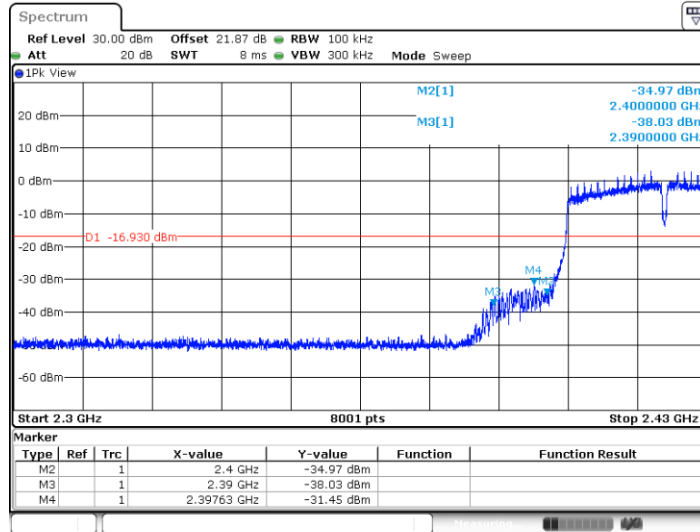


11N40SISO_Ant6_Low_2427

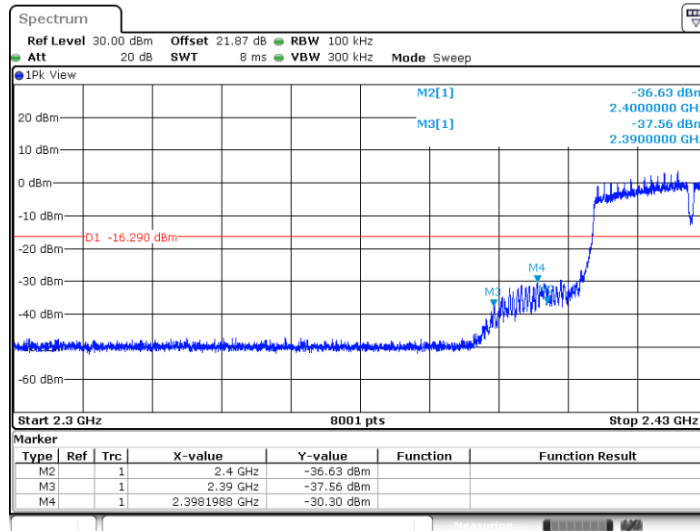




11N40SISO_Ant6_High_2447

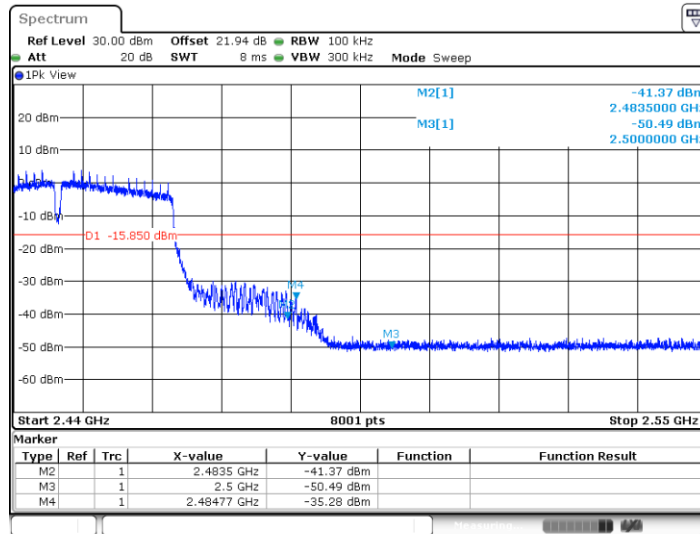

Date: 21.SEP.2024 17:10:47

11N40SISO_Ant6_High_2452

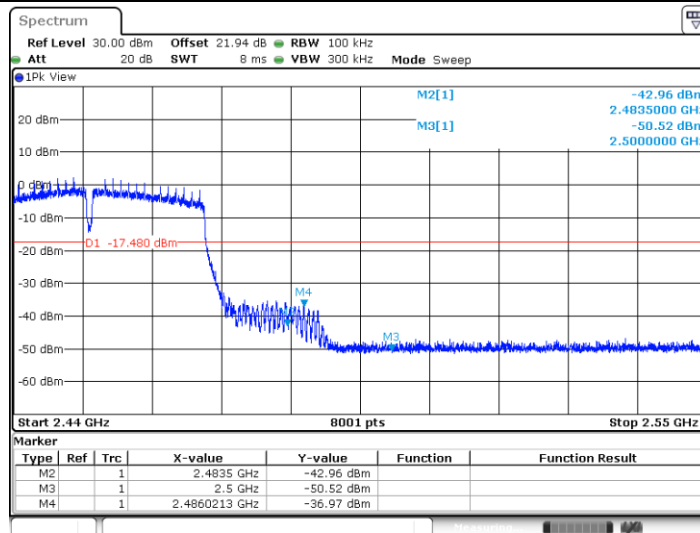

Date: 21.SEP.2024 17:12:14




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant6	2412	30~1000	12.27	-56.11	≤-7.73	PASS
			1000~26500	12.27	-46.36	≤-7.73	PASS
		2437	30~1000	12.66	-55.6	≤-7.34	PASS
			1000~26500	12.66	-45.63	≤-7.34	PASS
		2462	30~1000	13.13	-54.96	≤-6.87	PASS
			1000~26500	13.13	-43.81	≤-6.87	PASS
11G	Ant6	2412	30~1000	8.92	-56.23	≤-11.08	PASS
			1000~26500	8.92	-50.04	≤-11.08	PASS
		2437	30~1000	9.23	-55.91	≤-10.77	PASS
			1000~26500	9.23	-50.61	≤-10.77	PASS
		2462	30~1000	9.32	-55.59	≤-10.68	PASS
			1000~26500	9.32	-50.23	≤-10.68	PASS
11N20SISO	Ant6	2412	30~1000	8.79	-56.26	≤-11.21	PASS
			1000~26500	8.79	-50.5	≤-11.21	PASS
		2437	30~1000	9.13	-56.12	≤-10.87	PASS
			1000~26500	9.13	-50.53	≤-10.87	PASS
		2462	30~1000	9.09	-55.5	≤-10.91	PASS
			1000~26500	9.09	-50.38	≤-10.91	PASS
11N40SISO	Ant6	2422	30~1000	3.07	-56.81	≤-16.93	PASS
			1000~26500	3.07	-51.27	≤-16.93	PASS
		2427	30~1000	3.71	-56.2	≤-16.29	PASS
			1000~26500	3.71	-51.09	≤-16.29	PASS
		2437	30~1000	5.65	-56.52	≤-14.35	PASS
			1000~26500	5.65	-50.72	≤-14.35	PASS
		2447	30~1000	4.15	-56.82	≤-15.85	PASS
			1000~26500	4.15	-50.8	≤-15.85	PASS
		2452	30~1000	2.52	-56.26	≤-17.48	PASS
			1000~26500	2.52	-51.38	≤-17.48	PASS




Test Graphs

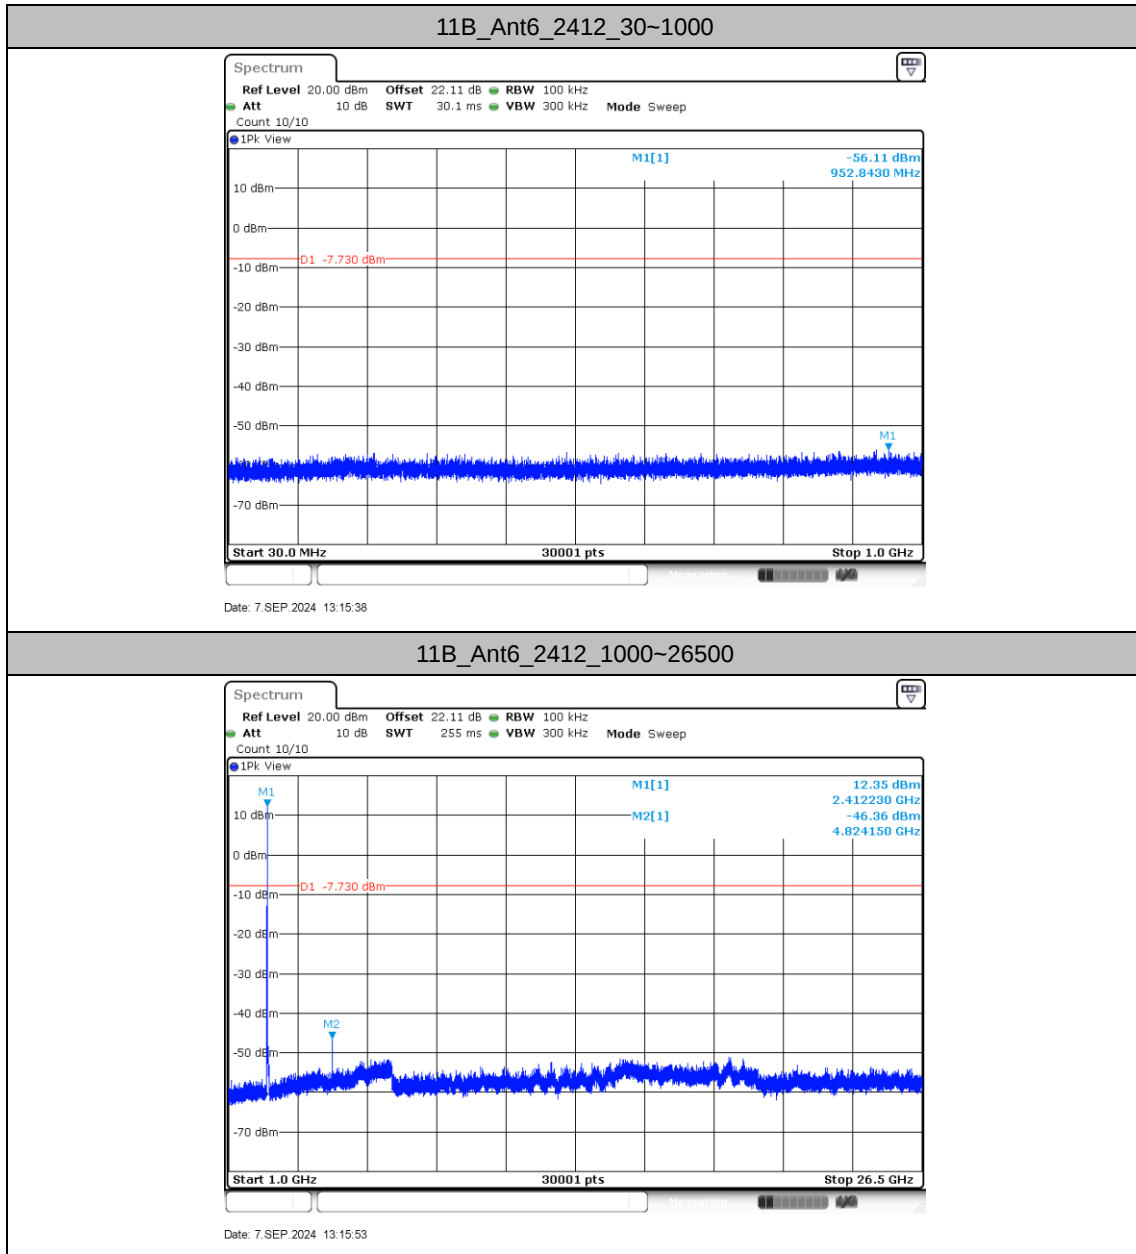




11B_Ant6_2437_30~1000

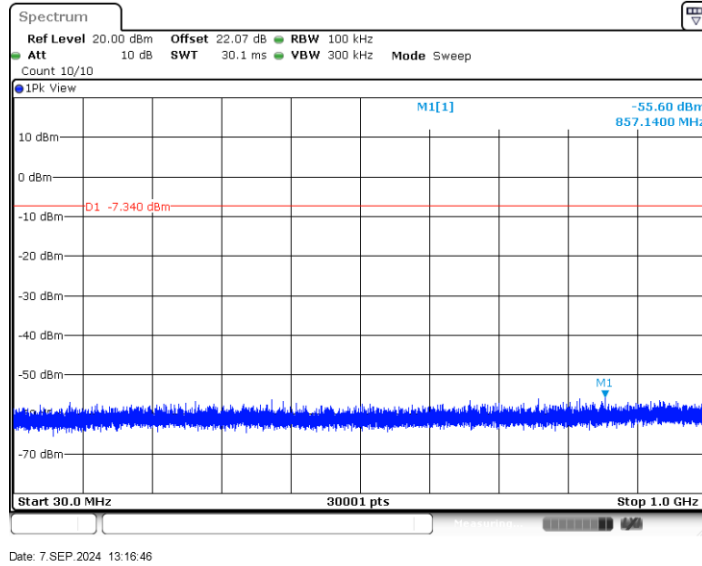


11B_Ant6_2437_1000~26500

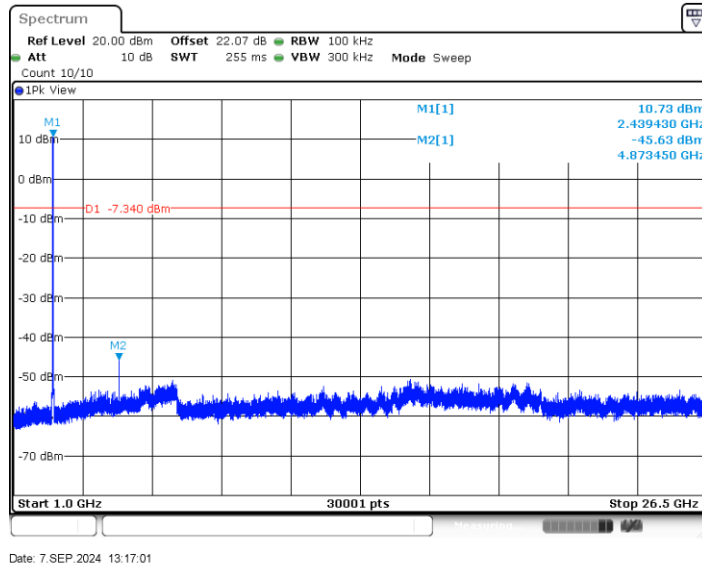




11B_Ant6_2462_30~1000

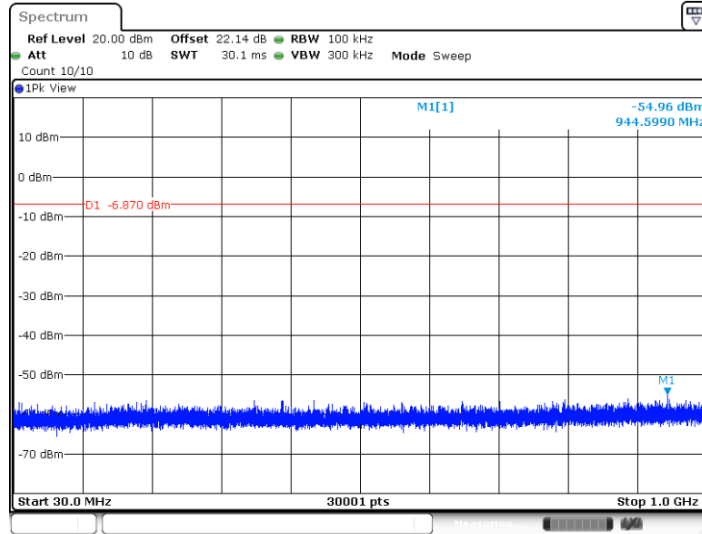

Date: 7.SEP.2024 13:18:13


11B_Ant6_2462_1000~26500

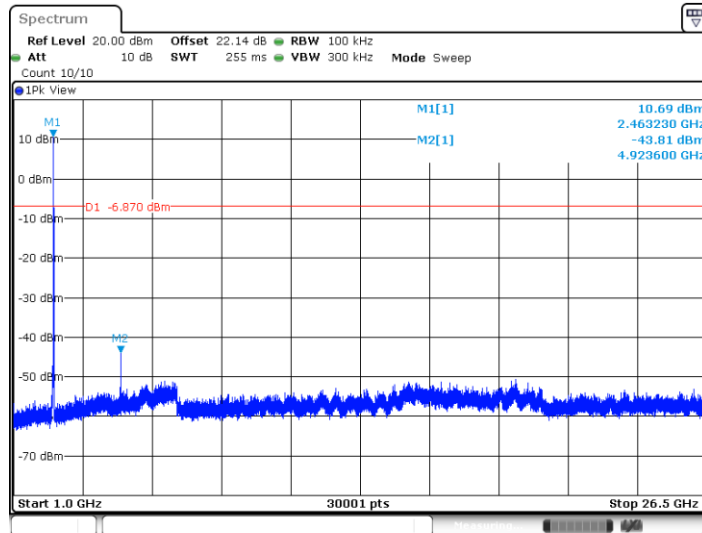

Date: 7.SEP.2024 13:18:29




11G_Ant6_2412_30~1000

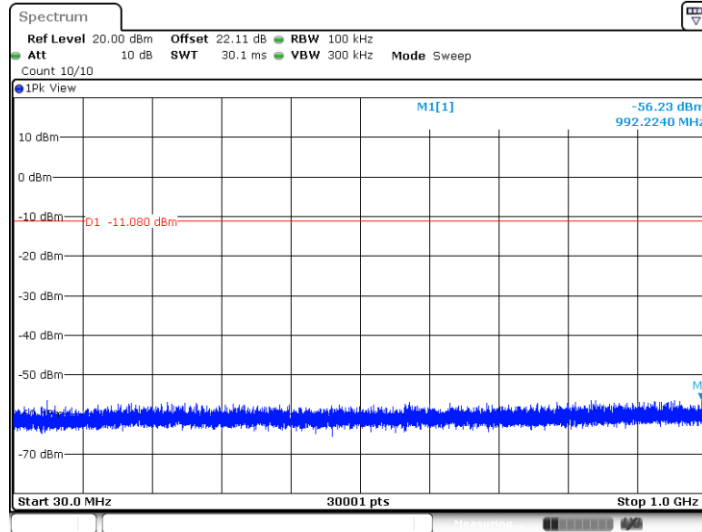

Date: 7.SEP.2024 13:19:41


11G_Ant6_2412_1000~26500

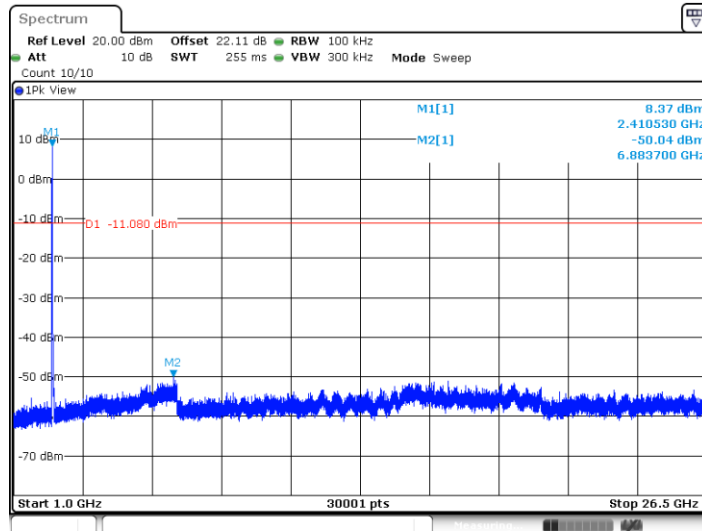


Date: 7.SEP.2024 13:19:56



11G_Ant6_2437_30~1000

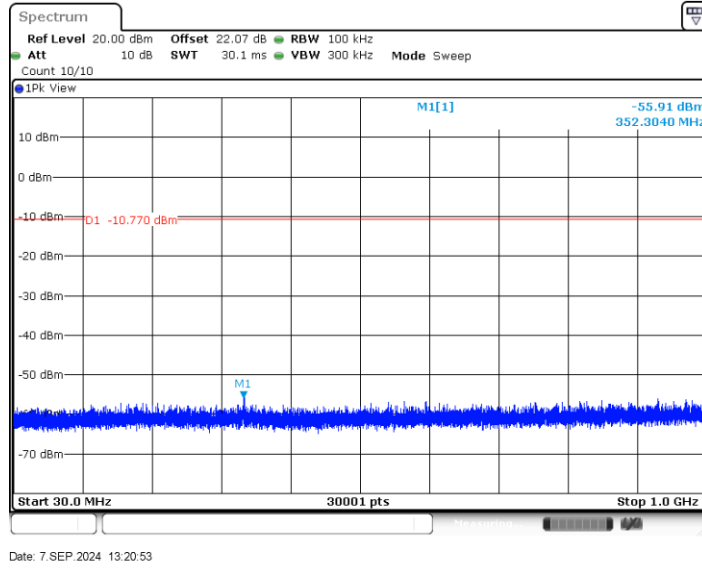


11G_Ant6_2437_1000~26500

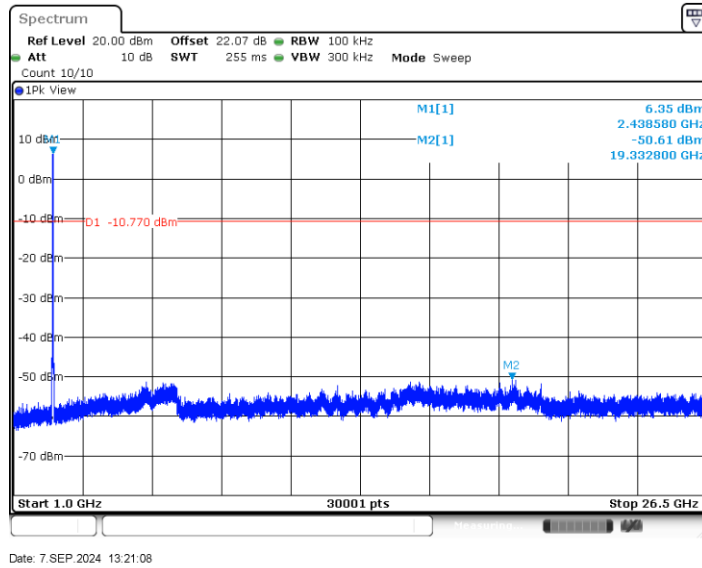




11G_Ant6_2462_30~1000

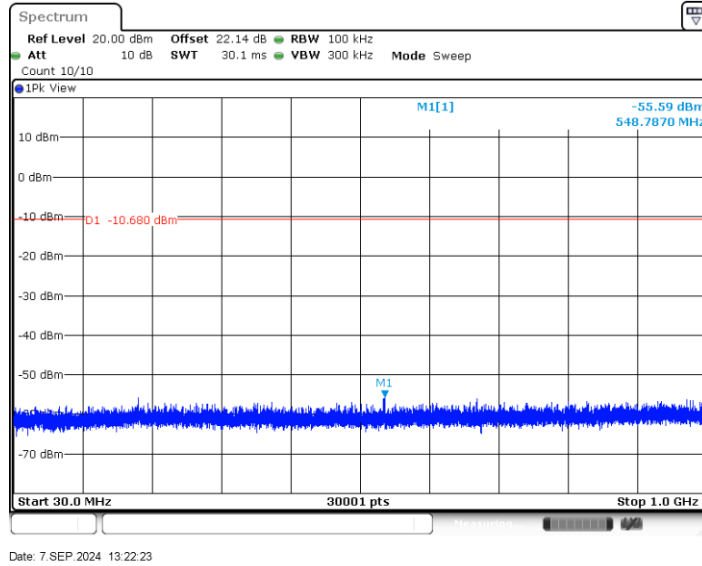


11G_Ant6_2462_1000~26500

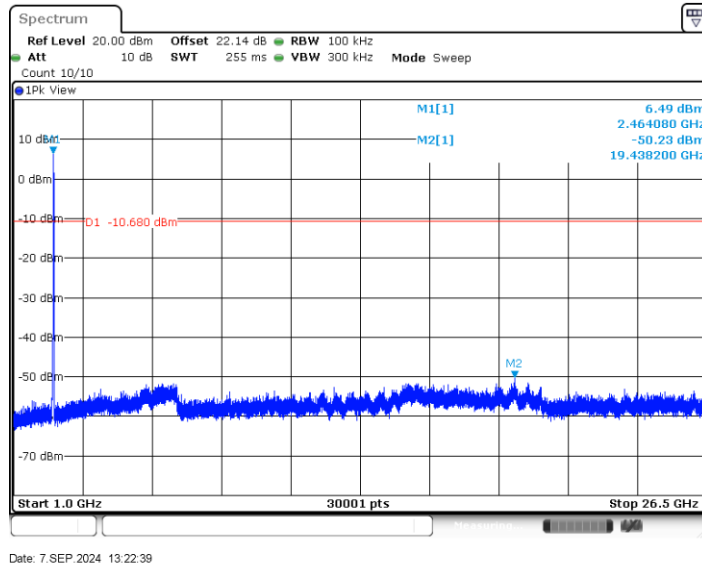




11N20SISO_Ant6_2412_30~1000

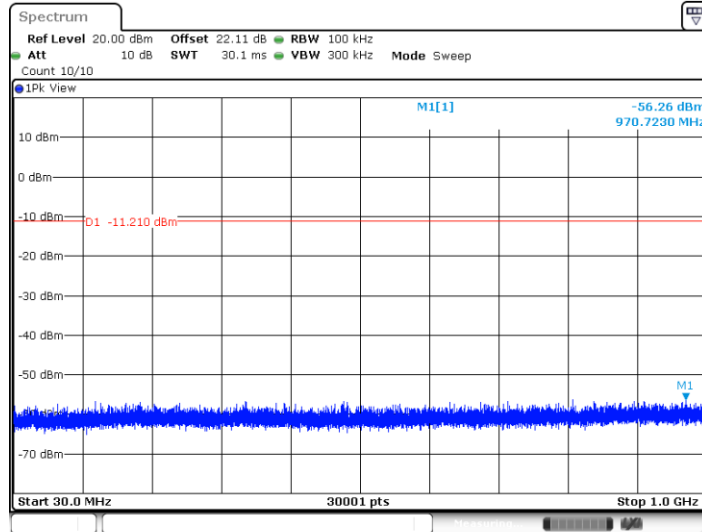

Date: 7.SEP.2024 13:24:14

11N20SISO_Ant6_2412_1000~26500

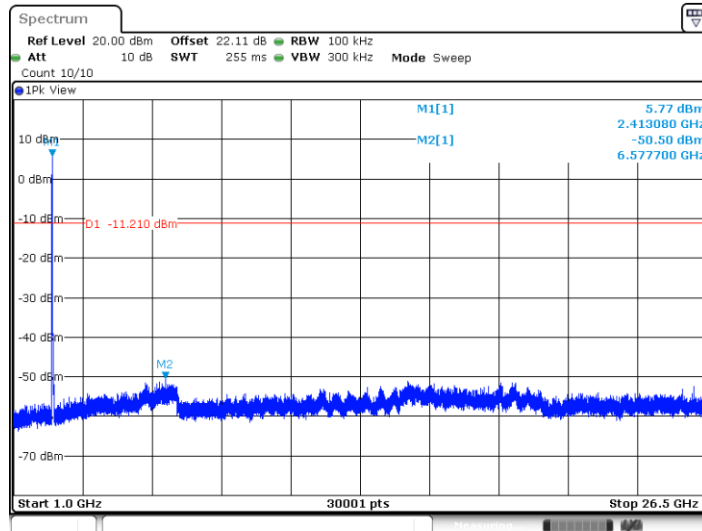

Date: 7.SEP.2024 13:24:29