FCC RF Test Report

APPLICANT	:	Motorola Mobility, LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola Mobility, LLC
MODEL NAME	:	3605
FCC ID	:	IHDT56QA2
STANDARD	:	FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 14, 2014 and testing was completed on Jun. 24, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TABLE OF CONTENTS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG451423A	Rev.01	Initial issue of report	Aug. 01, 2014
FG451423A	Rev. 02	Revised the Section 2.1, added CDMA test data, and added reference test procedure	Aug. 04, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< $43+10\log_{10}(P[Watts])$	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission	< $43+10\log_{10}(P[Watts])$	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< $43+10\log_{10}(P[Watts])$	PASS	Under limit 27.99 dB at 5639.000 MHz
3.8	§2.1055 §22.355 §24.235	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part22.355 Within authorized frequency band for 24.235	PASS	-

1 General Description

1.1 Applicant

Motorola Mobility, LLC
222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.2 Manufacturer

Motorola Mobility, LLC
222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola Mobility, LLC
Model Name	3605
FCC ID	IHDT56QA2
IMEI Code	990005080031074 990005080037626
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR Bluetooth v4.0 - LE
HW Version	P2A
SW Version	victara_verizon_userdebug_4.4.3_KXE21.110_73_intcfg_test-keys_verizon_US(MSM8974BP_201.56.04.29R)
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
AC Adapter	Brand Name : Motorola
	Model Name : SPN5788A
Earphone	Brand Name : Motorola
	Model Name : SJYN1305A

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	GSM850 : 33.03 dBm GSM1900 : 29.79 dBm WCDMA Band V : 23.08 dBm WCDMA Band II : 22.97 dBm CDMA2000 BC0 : 24.33 dBm CDMA2000 BC1 : 24.30 dBm
Antenna Type	Fixed Internal Antenna Type
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) CDMA2000 : QPSK CDMA2000 1xEV-DO : QPSK/8PSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	0.80	0.0108 ppm	250KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.22	0.0108 ppm	244KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.13	0.0167 ppm	4M18F9W
Part 22	CDMA2000 BC0 1xEV-DO Rev. 0	QPSK	0.10	0.0932 ppm	1M28F9W
Part 22	CDMA2000 BC0 1xRTT	QPSK	0.11	-	1M28F9W
Part 24	GSM1900 GPRS class 8	GMSK	1.97	0.0064 ppm	250KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.51	0.0064 ppm	248KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.31	0.0043 ppm	4M18F9W
Part 24	CDMA2000 BC1 1xEV-DO Rev. 0	QPSK	0.31	0.0053 ppm	1M28F9W
Part 24	CDMA2000 BC1 1xRTT	QPSK	0.58	-	1M28F9W

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	**Sporton Site No.**	
	TH02-HY	03CH07-HY

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V, and CDMA2000 BC0.
2. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II, and CDMA2000 BC1.

Test Modes		
Band	**Radiated TCs**	**Conducted TCs**
GSM 850	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
CDMA2000 BC0	■ 1xEV-DO Rev. 0 Link Mode ■ 1xRTT Link Mode	■ 1xEV-DO Rev. 0 Link Mode ■ 1xRTT Link Mode
CDMA2000 BC1	■ 1xEV-DO Rev. 0 Link Mode ■ 1xRTT Link Mode	■ 1xEV-DO Rev. 0 Link Mode ■ 1xRTT Link Mode

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GSM or GPRS multi-slot class 8 mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V and WCDMA band II,

1xEV-DO Rev. 0 153.6Kbps and 1xRTT mode for CDMA2000 BC0 and CDMA2000 BC1;

only these modes were used for all tests. In addition to above worst-case test, below investigating on all data rates, and all modes are compliance with each FCC test case which has specific test limits. For spurious emissions at antenna port, the EUT was invistigated the band edges on low and high channels, and the unwanted spourious emissions on middle channel for all modes, the results are pass, then only the worst-results were reported in the test report. The Radiated Spurioues emissions for GSM/GPRS/EGPRS/HSDPA/CDMA modes were investigated on the middle channel and the passed reuslts were were not worst than those data tested from the highest power channels.

Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	33.03	32.98	32.94	29.75	29.00	29.74
GPRS class 8	33.02	32.99	32.91	29.72	29.67	29.79
GPRS class 10	29.99	30.25	30.26	26.92	26.94	26.85
GPRS class 11	28.73	28.75	28.74	25.15	25.21	25.07
GPRS class 12	27.21	27.21	27.20	23.83	23.80	23.65
EGPRS class 8	26.90	26.96	27.03	25.82	25.81	25.70
EGPRS class 10	24.38	24.45	24.51	23.26	23.22	23.16
EGPRS class 11	23.09	23.34	23.39	21.79	21.77	21.74
EGPRS class 12	21.96	21.98	24.91	20.68	20.59	20.40

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	23.04	22.91	23.08	22.93	22.95	22.97
HSDPA Subtest-1	21.86	21.79	21.85	21.58	21.59	21.69
HSDPA Subtest-2	21.83	21.72	21.81	21.78	21.83	21.90
HSDPA Subtest-3	21.41	21.29	21.38	21.26	21.30	21.43
HSDPA Subtest-4	21.36	21.22	21.33	21.24	21.32	21.34
HSUPA Subtest-1	21.62	21.44	21.89	21.62	21.55	21.66
HSUPA Subtest-2	20.96	20.89	21.01	20.66	20.64	20.80
HSUPA Subtest-3	20.64	20.56	20.75	20.40	20.42	20.68
HSUPA Subtest-4	21.26	21.17	21.38	20.72	20.74	20.92
HSUPA Subtest-5	21.86	21.81	21.90	21.80	21.88	21.94

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	24.12	24.28	24.15	24.20	24.01	24.16
1xRTT RC3 SO55	24.16	24.31	24.17	24.27	24.03	24.20
1xRTT RC3 SO32(+ F-SCH)	24.15	24.28	24.14	22.24	24.02	24.18
1xRTT RC3 SO32(+SCH)	24.12	24.26	24.12	24.22	23.99	24.14
1xEV-DO RTAP 153.6kbps	24.18	24.33	24.20	24.30	24.08	24.25
1xEV-DO RETAP 4096Bits	24.15	24.26	24.16	24.26	24.05	24.22

2.2 Connection Diagram of Test System

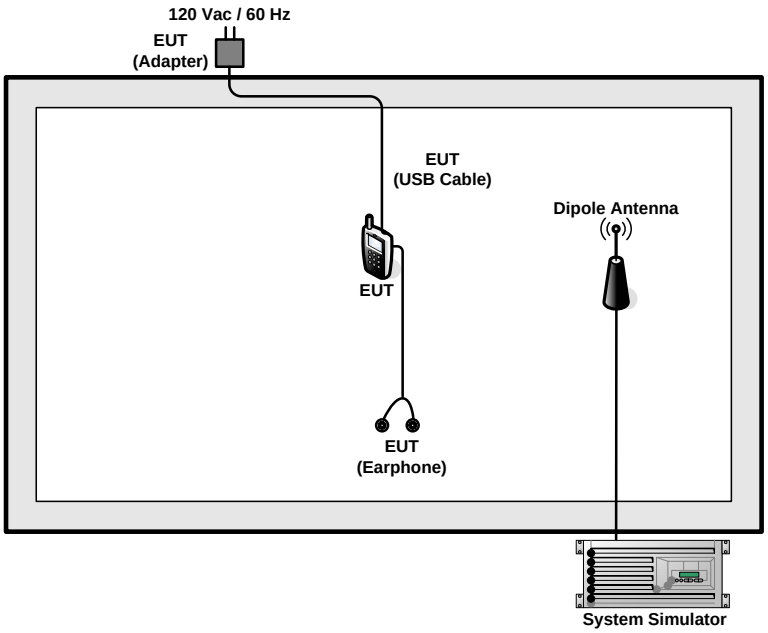

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

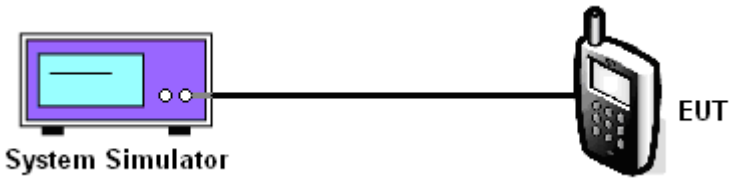

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	33.03	32.98	32.94	26.90	26.96	27.03	23.04	22.91	23.08

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.72	29.67	29.79	25.82	25.81	25.70	22.93	22.95	22.97

CDMA2000 BC0			
Modes	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	24.18	24.33	24.20

CDMA2000 BC0			
Modes	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	24.16	24.31	24.17

CDMA2000 BC1			
Modes	**CDMA 2000 1xEV-DO Rev. 0**		
Test Status	**RTAP 153.6K**		
Channel	**25 (Low)**	**600 (Mid)**	**1175 (High)**
Frequency (MHz)	**1851.25**	**1880.00**	**1908.75**
Conducted Power (dBm)	24.30	24.08	24.25

CDMA2000 BC1			
Modes	**CDMA 2000 1xRTT**		
Test Status	**RC3+SO55**		
Channel	**25 (Low)**	**600 (Mid)**	**1175 (High)**
Frequency (MHz)	**1851.25**	**1880.00**	**1908.75**
Conducted Power (dBm)	24.27	24.03	24.20

Note: maximum burst average power for GSM or GPRS, and maximum average power for WCDMA and CDMA2000.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The measurement procedure was followed in the KDB 971168 v02r01 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. For GSM/EGPRS operating modes, signal gating is implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

3.2.4 Test Setup

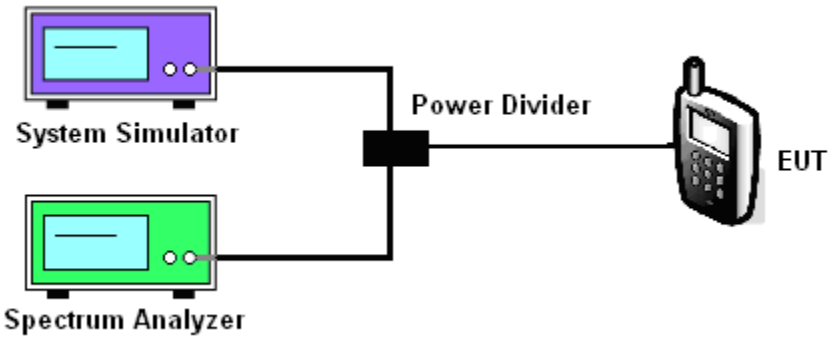

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.36	0.36	0.36	3.08	3.12	3.04	3.40	3.12	3.16

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.24	0.24	0.28	3.36	3.08	3.20	3.24	3.40	3.32

CDMA2000 BC0			
Modes	CDMA 2000 1xEV-DO Rev. 0		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Peak-to-Average Ratio (dB)	4.72	3.64	3.80
Modes	CDMA 2000 1xRTT		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Peak-to-Average Ratio (dB)	4.64	3.68	3.68

CDMA2000 BC1			
Modes	CDMA 2000 1xEV-DO Rev. 0		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Peak-to-Average Ratio (dB)	4.52	4.24	4.08
Modes	CDMA 2000 1xRTT		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Peak-to-Average Ratio (dB)	4.24	4.00	4.00

3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 850	Test Mode :	GSM Link (GMSK)

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

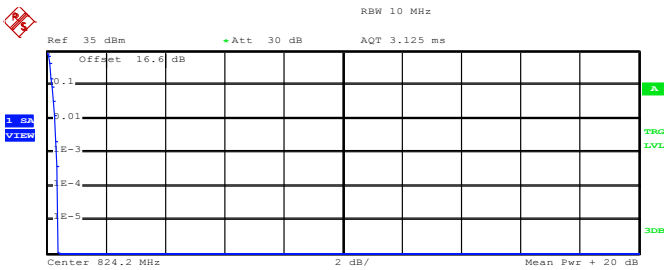

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	31.92 dBm
Peak	32.29 dBm
Crest	0.37 dB
10 %	0.20 dB
1 %	0.28 dB
.1 %	0.36 dB
.01 %	0.40 dB

Date: 29.MAY.2014 09:25:21

Peak-to-Average Ratio on Channel 189 (836.4 MHz)

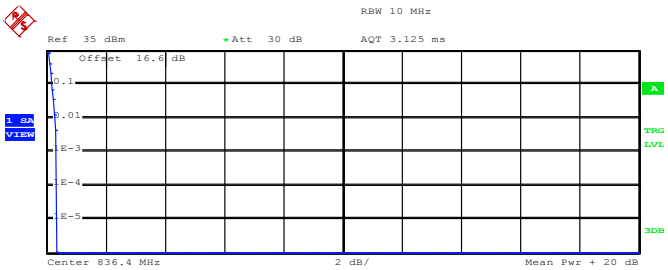

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	31.88 dBm
Peak	32.22 dBm
Crest	0.34 dB
10 %	0.20 dB
1 %	0.28 dB
.1 %	0.36 dB
.01 %	0.36 dB

Date: 29.MAY.2014 09:25:44

Peak-to-Average Ratio on Channel 251 (848.8 MHz)

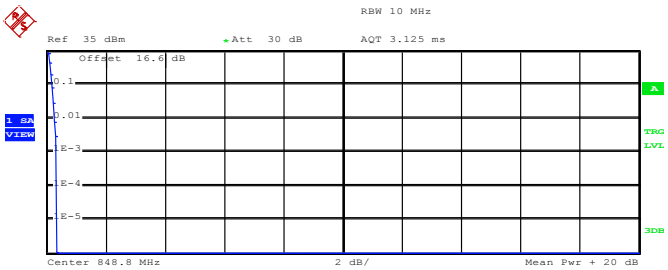

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	31.87 dBm
Peak	32.22 dBm
Crest	0.35 dB
10 %	0.20 dB
1 %	0.28 dB
.1 %	0.36 dB
.01 %	0.36 dB

Date: 29.MAY.2014 09:26:14

Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

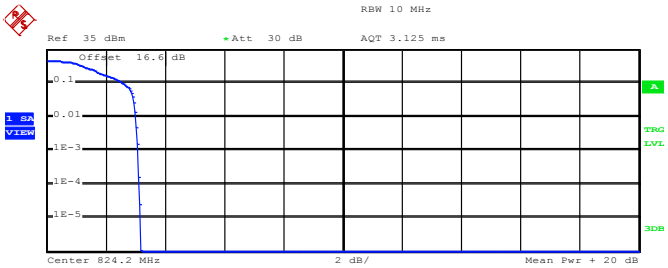

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	26.38 dBm
Peak	29.54 dBm
Crest	3.16 dB
10 %	2.60 dB
1 %	3.00 dB
.1 %	3.08 dB
.01 %	3.16 dB

Date: 29.MAY.2014 10:11:58

Peak-to-Average Ratio on Channel 189 (836.4 MHz)

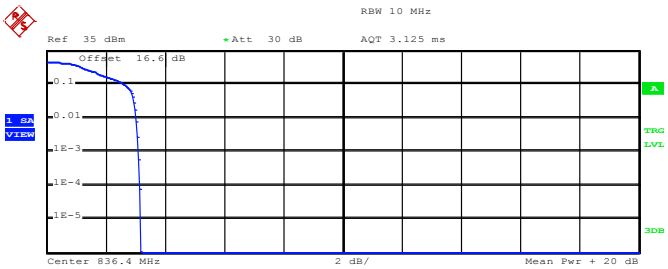

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	26.59 dBm
Peak	29.75 dBm
Crest	3.16 dB
10 %	2.64 dB
1 %	3.04 dB
.1 %	3.12 dB
.01 %	3.16 dB

Date: 29.MAY.2014 10:12:41

Peak-to-Average Ratio on Channel 251 (848.8 MHz)

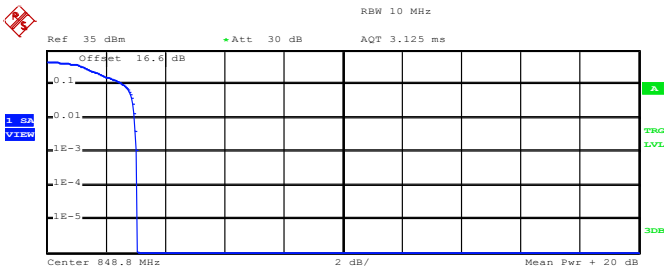

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	27.03 dBm
Peak	30.10 dBm
Crest	3.07 dB
10 %	2.60 dB
1 %	2.96 dB
.1 %	3.04 dB
.01 %	3.08 dB

Date: 29.MAY.2014 10:13:13

Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

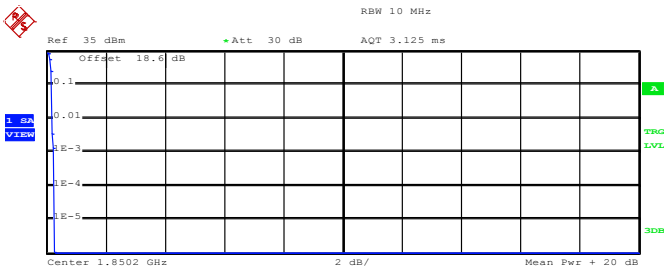

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	29.98 dBm
Peak	30.24 dBm
Crest	0.26 dB
10 %	0.20 dB
1 %	0.20 dB
.1 %	0.24 dB
.01 %	0.28 dB

Date: 29.MAY.2014 11:30:34

Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

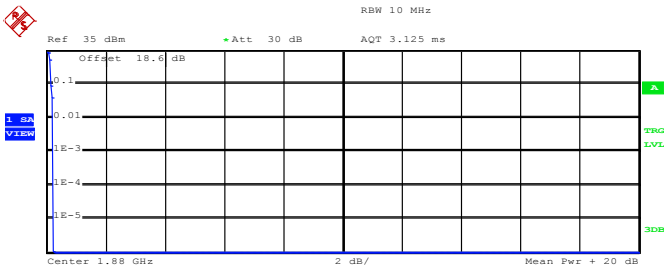

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	29.59 dBm
Peak	29.82 dBm
Crest	0.23 dB
10 %	0.16 dB
1 %	0.24 dB
.1 %	0.24 dB
.01 %	0.24 dB

Date: 29.MAY.2014 11:31:12

Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

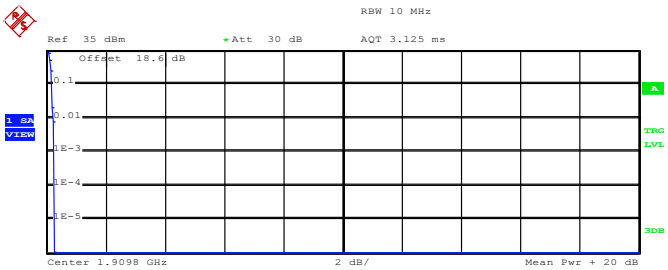

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	29.84 dBm
Peak	30.10 dBm
Crest	0.26 dB
10 %	0.20 dB
1 %	0.24 dB
.1 %	0.28 dB
.01 %	0.28 dB

Date: 29.MAY.2014 11:31:36

Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

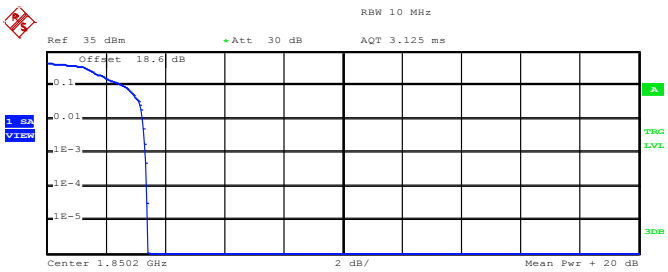

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	26.14 dBm
Peak	29.54 dBm
Crest	3.40 dB
10 %	2.60 dB
1 %	3.24 dB
.1 %	3.36 dB
.01 %	3.40 dB

Date: 29.MAY.2014 13:37:48

Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

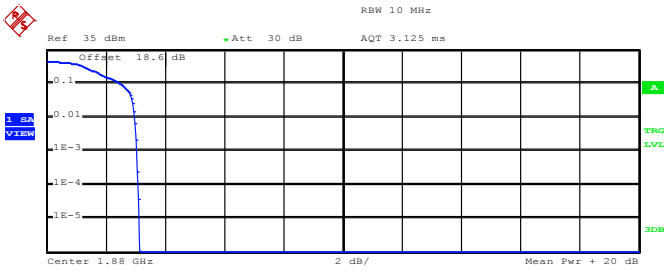

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	26.06 dBm
Peak	29.19 dBm
Crest	3.12 dB
10 %	2.52 dB
1 %	3.00 dB
.1 %	3.08 dB
.01 %	3.12 dB

Date: 29.MAY.2014 13:38:11

Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

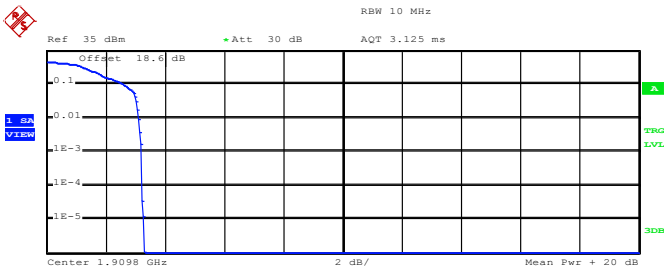

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	25.96 dBm
Peak	29.26 dBm
Crest	3.30 dB
10 %	2.64 dB
1 %	3.12 dB
.1 %	3.20 dB
.01 %	3.24 dB

Date: 29.MAY.2014 13:38:41

Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

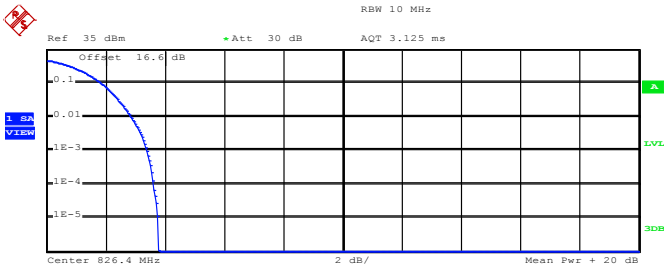

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	22.72 dBm
Peak	26.50 dBm
Crest	3.78 dB
10 %	1.88 dB
1 %	2.84 dB
.1 %	3.40 dB
.01 %	3.64 dB

Date: 29.MAY.2014 14:49:57

Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

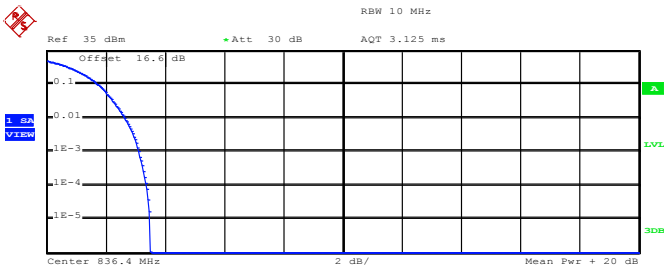

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	22.72 dBm
Peak	26.22 dBm
Crest	3.50 dB
10 %	1.76 dB
1 %	2.64 dB
.1 %	3.12 dB
.01 %	3.40 dB

Date: 29.MAY.2014 14:50:24

Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

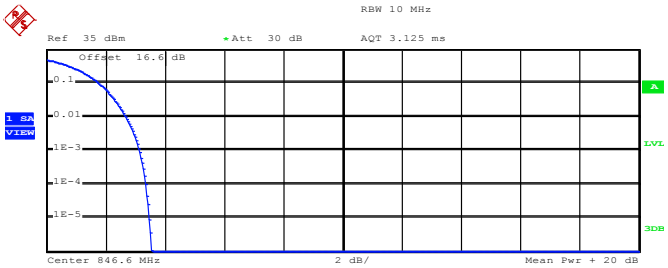

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	22.89 dBm
Peak	26.43 dBm
Crest	3.54 dB
10 %	1.76 dB
1 %	2.68 dB
.1 %	3.16 dB
.01 %	3.36 dB

Date: 29.MAY.2014 14:50:52

Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

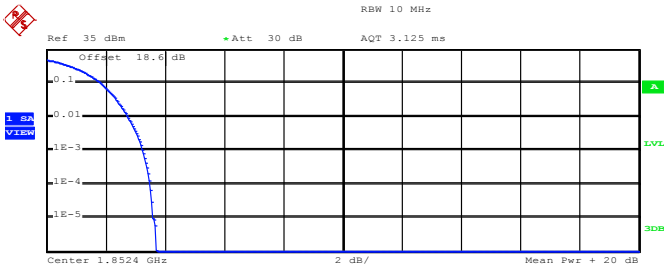

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	22.86 dBm
Peak	26.58 dBm
Crest	3.72 dB
10 %	1.84 dB
1 %	2.76 dB
.1 %	3.24 dB
.01 %	3.52 dB

Date: 29.MAY.2014 14:07:27

Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

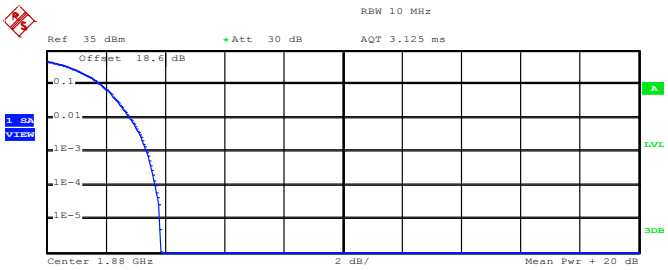

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	23.23 dBm
Peak	27.07 dBm
Crest	3.84 dB
10 %	1.84 dB
1 %	2.84 dB
.1 %	3.40 dB
.01 %	3.68 dB

Date: 29.MAY.2014 14:07:53

Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

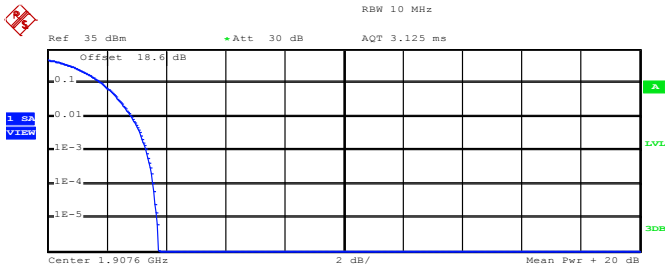

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	23.03 dBm
Peak	26.79 dBm
Crest	3.76 dB
10 %	1.84 dB
1 %	2.84 dB
.1 %	3.32 dB
.01 %	3.56 dB

Date: 29.MAY.2014 14:08:23

Band :	CDMA2000 BC0	Test Mode :	1xEV-DO Rev. 0 Link (QPSK)

Peak-to-Average Ratio on Channel 1013 (824.70 MHz)

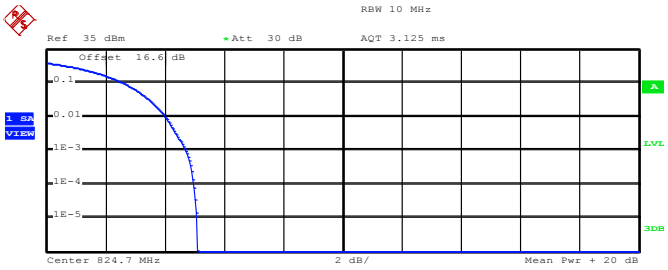

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	23.87 dBm
Peak	28.97 dBm
Crest	5.11 dB
10 %	2.64 dB
1 %	4.04 dB
.1 %	4.72 dB
.01 %	5.00 dB

Date: 29.MAY.2014 17:23:25

Peak-to-Average Ratio on Channel 384 (836.52 MHz)

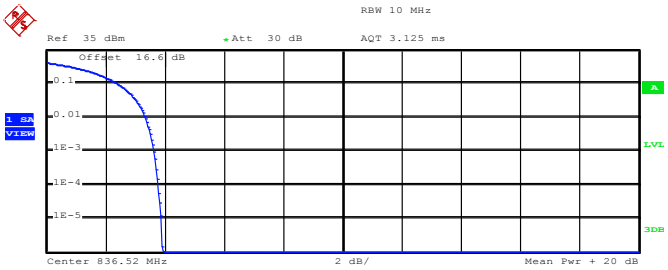

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	24.07 dBm
Peak	27.99 dBm
Crest	3.92 dB
10 %	2.44 dB
1 %	3.36 dB
.1 %	3.64 dB
.01 %	3.80 dB

Date: 29.MAY.2014 17:24:27

Peak-to-Average Ratio on Channel 777 (848.31 MHz)

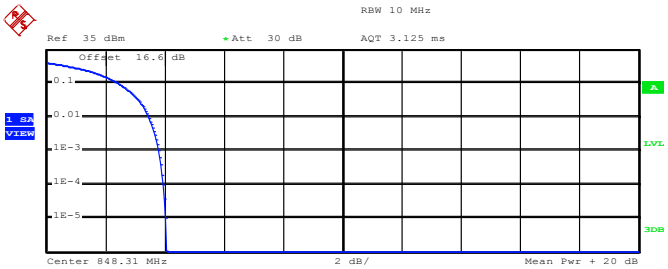

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	24.15 dBm
Peak	28.20 dBm
Crest	4.05 dB
10 %	2.48 dB
1 %	3.48 dB
.1 %	3.80 dB
.01 %	3.96 dB

Date: 29.MAY.2014 17:25:10

Band :	CDMA2000 BC0	Test Mode :	1xRTT Link (QPSK)

Peak-to-Average Ratio on Channel 1013 (824.70 MHz)

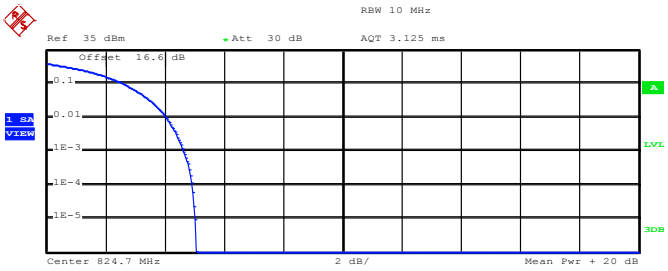

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	23.77 dBm
Peak	28.83 dBm
Crest	5.07 dB
10 %	2.64 dB
1 %	4.04 dB
.1 %	4.64 dB
.01 %	4.92 dB

Date: 30.MAY.2014 10:26:23

Peak-to-Average Ratio on Channel 384 (836.52 MHz)

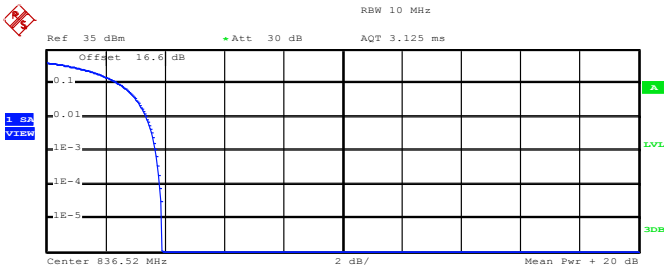

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	23.87 dBm
Peak	27.77 dBm
Crest	3.91 dB
10 %	2.44 dB
1 %	3.40 dB
.1 %	3.68 dB
.01 %	3.84 dB

Date: 30.MAY.2014 10:26:51

Peak-to-Average Ratio on Channel 777 (848.31 MHz)

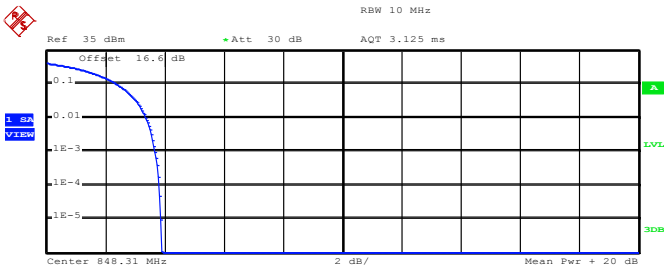

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	24.10 dBm
Peak	27.99 dBm
Crest	3.88 dB
10 %	2.40 dB
1 %	3.36 dB
.1 %	3.68 dB
.01 %	3.84 dB

Date: 30.MAY.2014 10:28:01

Band :	CDMA2000 BC1	Test Mode :	1xEV-DO Rev. 0 Link (QPSK)

Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

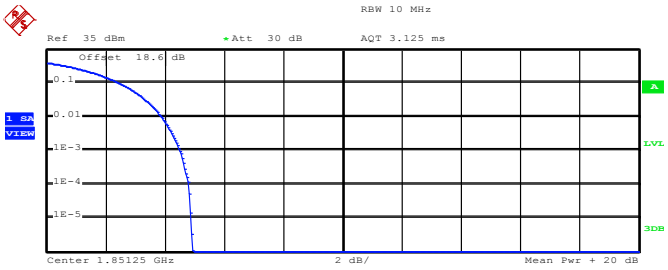

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	24.19 dBm
Peak	29.11 dBm
Crest	4.92 dB
10 %	2.52 dB
1 %	3.88 dB
.1 %	4.52 dB
.01 %	4.80 dB

Date: 29.MAY.2014 17:59:30

Peak-to-Average Ratio on Channel 600 (1880 MHz)

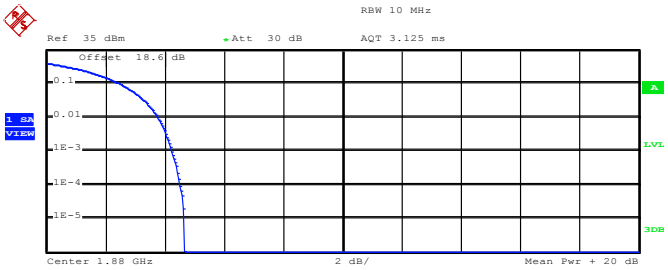

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	24.60 dBm
Peak	29.26 dBm
Crest	4.66 dB
10 %	2.52 dB
1 %	3.76 dB
.1 %	4.24 dB
.01 %	4.52 dB

Date: 29.MAY.2014 18:00:13

Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

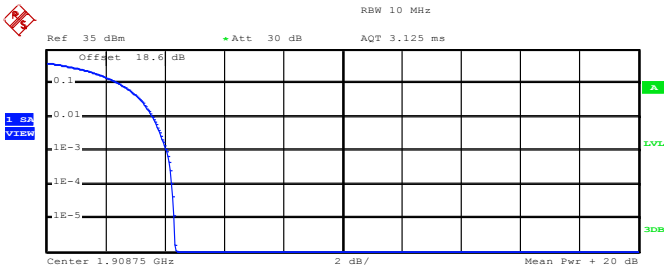

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	24.19 dBm
Peak	28.55 dBm
Crest	4.36 dB
10 %	2.48 dB
1 %	3.60 dB
.1 %	4.08 dB
.01 %	4.24 dB

Date: 29.MAY.2014 18:01:09

Band :	CDMA2000 BC1	Test Mode :	1xRTT Link (QPSK)

Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

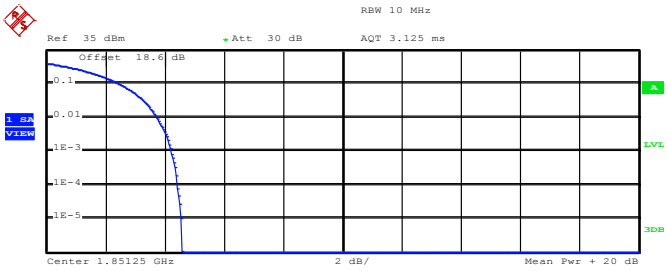

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	22.28 dBm
Peak	26.86 dBm
Crest	4.58 dB
10 %	2.52 dB
1 %	3.72 dB
.1 %	4.24 dB
.01 %	4.44 dB

Date: 30.MAY.2014 09:53:57

Peak-to-Average Ratio on Channel 600 (1880 MHz)

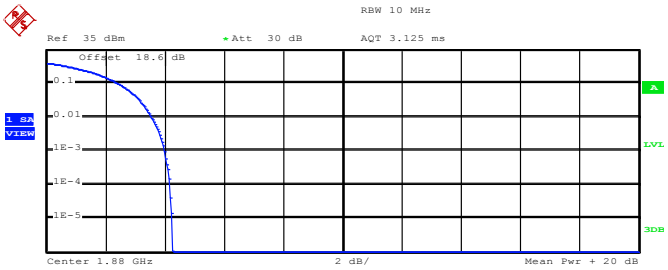

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	21.69 dBm
Peak	25.94 dBm
Crest	4.25 dB
10 %	2.44 dB
1 %	3.56 dB
.1 %	4.00 dB
.01 %	4.20 dB

Date: 30.MAY.2014 09:54:40

Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

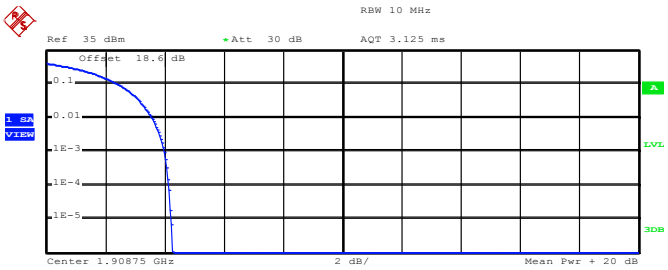

Complementary Cumulative Distribution Function (100000 samples)

	Trace 1
Mean	21.82 dBm
Peak	26.08 dBm
Crest	4.26 dB
10 %	2.44 dB
1 %	3.60 dB
.1 %	4.00 dB
.01 %	4.16 dB

Date: 30.MAY.2014 09:55:25

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The measurement procedures were followed in the KDB 971168 v02r01 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP= LVL + Correction factor and ERP = EIRP – 2.15 .

3.3.4 Test Setup

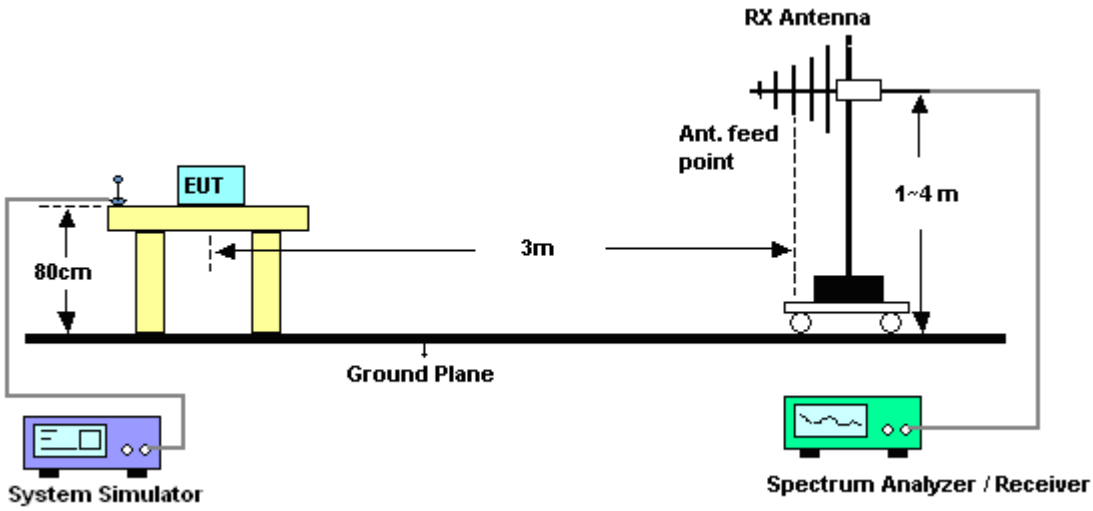

3.3.5 Test Result of ERP

GSM850 (GSM) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.20	-10.14	31.54	19.25	0.08
836.40	-10.76	32.04	19.13	0.08
848.80	-10.89	32.59	19.55	0.09
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.20	-1.76	32.93	29.02	0.80
836.40	-2.53	32.82	28.14	0.65
848.80	-3.14	33.62	28.33	0.68

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.20	-15.89	31.54	13.50	0.02
836.40	-16.73	32.04	13.16	0.02
848.80	-16.51	32.59	13.93	0.02
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.20	-7.32	32.93	23.46	0.22
836.40	-7.99	32.82	22.68	0.19
848.80	-9.13	33.62	22.34	0.17

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
826.40	-18.45	31.44	10.84	0.01
836.40	-19.68	32.04	10.21	0.01
846.60	-19.51	32.63	10.97	0.01
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
826.40	-9.56	32.78	21.07	0.13
836.40	-10.68	32.82	19.99	0.10
846.60	-11.00	33.40	20.25	0.11

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

CDMA2000 BC0 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.70	-19.01	31.35	10.19	0.01
836.52	-19.75	32.13	10.23	0.01
848.31	-19.61	32.64	10.88	0.01
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.70	-10.86	32.83	19.82	0.10
836.52	-11.62	32.81	19.04	0.08
848.31	-11.44	33.52	19.93	0.10

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

CDMA2000 BC0 1xRTT_RC3+SO55 Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.70	-17.86	31.35	11.34	0.01
836.52	-18.87	32.13	11.11	0.01
848.31	-18.12	32.64	12.37	0.02
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**ERP (dBm)**	**ERP (W)**
824.70	-10.18	32.83	20.50	0.11
836.52	-10.77	32.81	19.89	0.10
848.31	-10.85	33.52	20.52	0.11

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1850.20	-16.78	45.34	28.56	0.72
1880.00	-17.16	46.01	28.85	0.77
1909.80	-16.78	45.81	29.03	0.80
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1850.20	-17.67	49.22	31.55	1.43
1880.00	-18.95	50.42	31.47	1.40
1909.80	-16.06	49.00	32.94	1.97

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1850.20	-22.31	45.34	23.03	0.20
1880.00	-22.60	46.01	23.41	0.22
1909.80	-21.80	45.81	24.01	0.25
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1850.20	-23.41	49.22	25.81	0.38
1880.00	-24.41	50.42	26.01	0.40
1909.80	-21.95	49.00	27.05	0.51

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1852.40	-24.44	45.37	20.93	0.12
1880.00	-24.54	46.01	21.47	0.14
1907.60	-24.08	45.87	21.79	0.15
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1852.40	-25.38	49.23	23.85	0.24
1880.00	-26.74	50.42	23.68	0.23
1907.60	-24.15	49.04	24.89	0.31

* EIRP = LVL (dBm) + Correction Factor (dB)

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1851.25	-23.90	45.66	21.76	0.15
1880.00	-24.80	46.01	21.21	0.13
1908.75	-24.83	45.69	20.86	0.12
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1851.25	-26.08	50.99	24.91	0.31
1880.00	-26.12	50.42	24.30	0.27
1908.75	-24.90	48.92	24.02	0.25

* EIRP = LVL (dBm) + Correction Factor (dB)

CDMA2000 BC1 1xRTT_RC3+SO55 Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1851.25	-24.10	45.66	21.56	0.14
1880.00	-23.87	46.01	22.14	0.16
1908.75	-24.29	45.69	21.40	0.14
Vertical Polarization				
Frequency (MHz)	**LVL (dBm)**	**Correction Factor (dB)**	**EIRP (dBm)**	**EIRP (W)**
1851.25	-24.11	50.99	26.88	0.49
1880.00	-24.30	50.42	26.12	0.41
1908.75	-21.30	48.92	27.62	0.58

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The measurement procedures was followed in the KDB 971168 v02r01 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

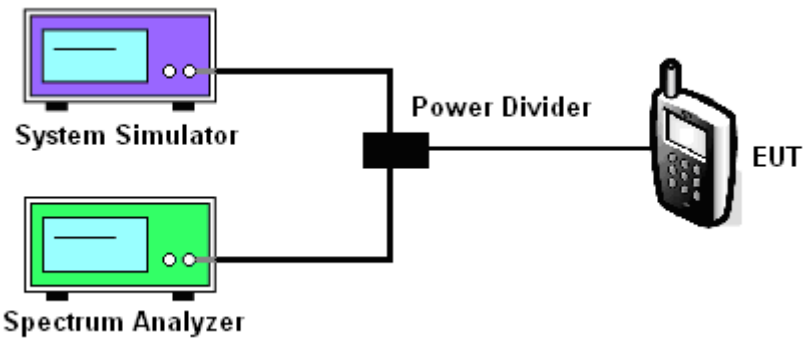

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	248.00	248.00	250.00	240.00	240.00	244.00
26dB BW (kHz)	316.00	312.00	318.00	284.00	284.00	286.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	244.00	246.00	250.00	248.00	238.00	242.00
26dB BW (kHz)	308.00	314.00	312.00	314.00	308.00	314.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.18	4.14	4.14
26dB BW (MHz)	4.68	4.68	4.68

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.18	4.14	4.16
26dB BW (MHz)	4.68	4.68	4.68

CDMA2000 BC0			
Test Mode	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
99% OBW (MHz)	1.28	1.28	1.28
26dB BW (MHz)	1.41	1.42	1.42

CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
99% OBW (MHz)	1.28	1.28	1.28
26dB BW (MHz)	1.40	1.42	1.42

CDMA2000 BC1			
Test Mode	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
99% OBW (MHz)	1.28	1.28	1.28
26dB BW (MHz)	1.42	1.42	1.42

CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
99% OBW (MHz)	1.28	1.28	1.28
26dB BW (MHz)	1.42	1.43	1.42

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth

Band :	GSM 850	Test Mode :	GSM Link (GMSK)

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

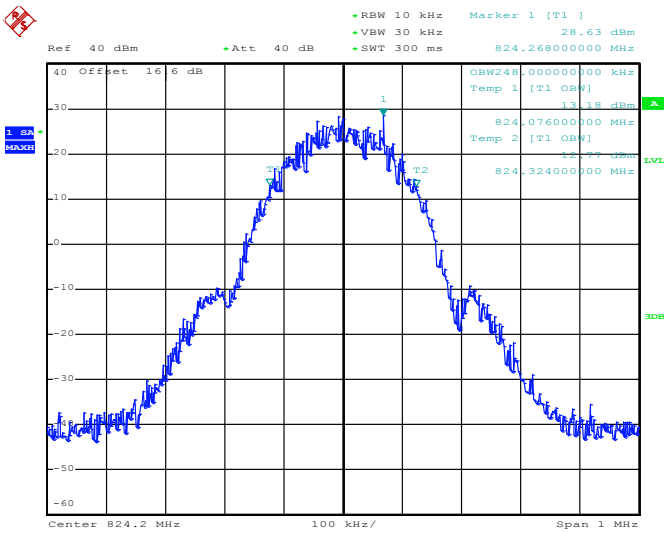

Date: 29.MAY.2014 09:32:29

26dB Bandwidth Plot on Channel 128 (824.2 MHz)

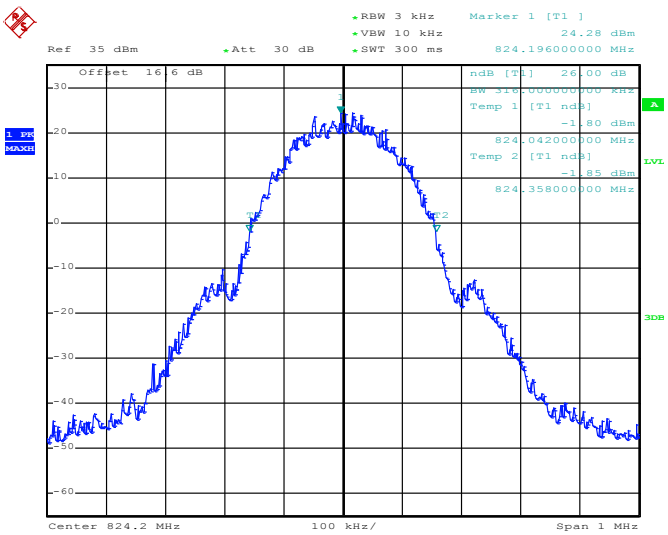

Date: 29.MAY.2014 09:27:13

99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

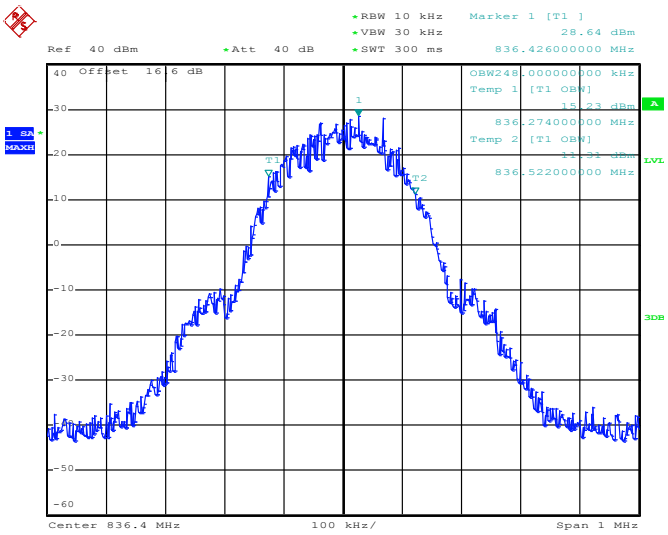

Date: 29.MAY.2014 09:32:57

26dB Bandwidth Plot on Channel 189 (836.4 MHz)

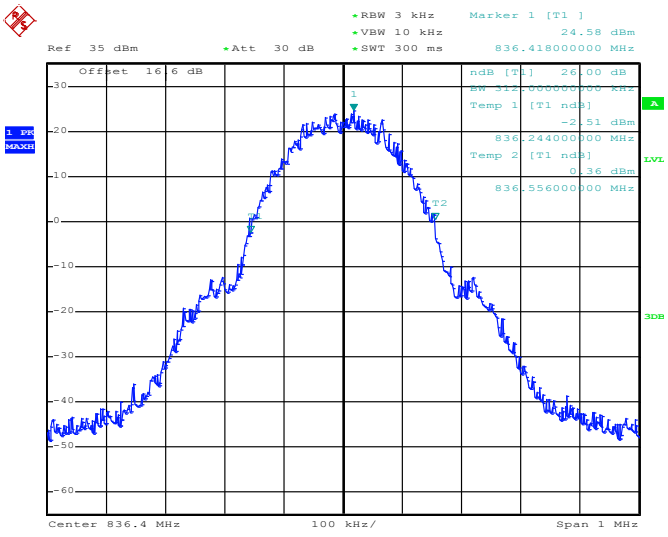

Date: 29.MAY.2014 09:27:42

99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

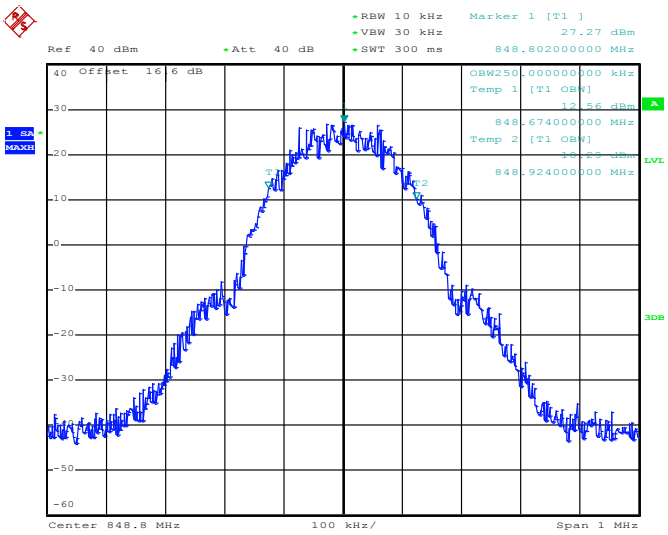

Date: 29.MAY.2014 09:33:26

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

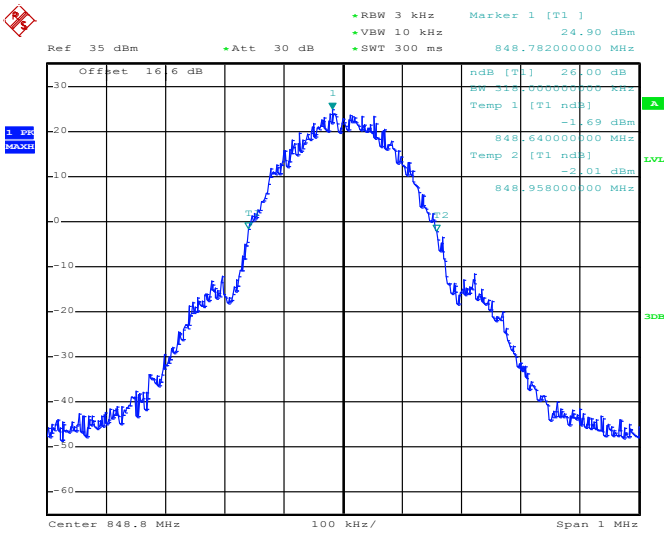

Date: 29.MAY.2014 09:28:11

Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

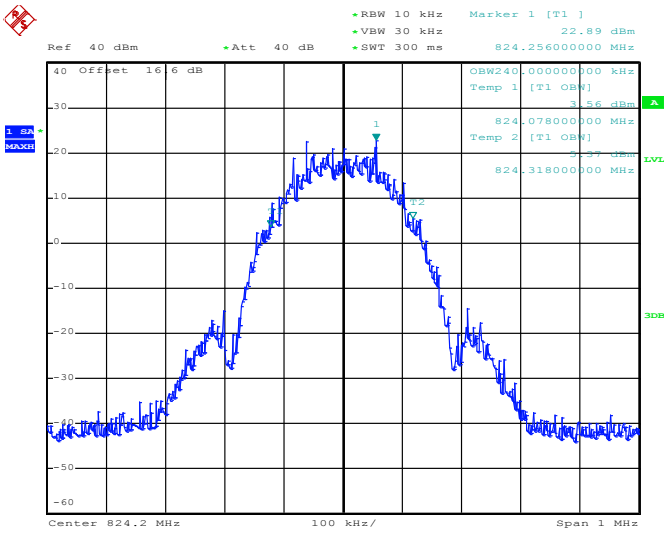

Date: 29.MAY.2014 10:21:44

26dB Bandwidth Plot on Channel 128 (824.2 MHz)

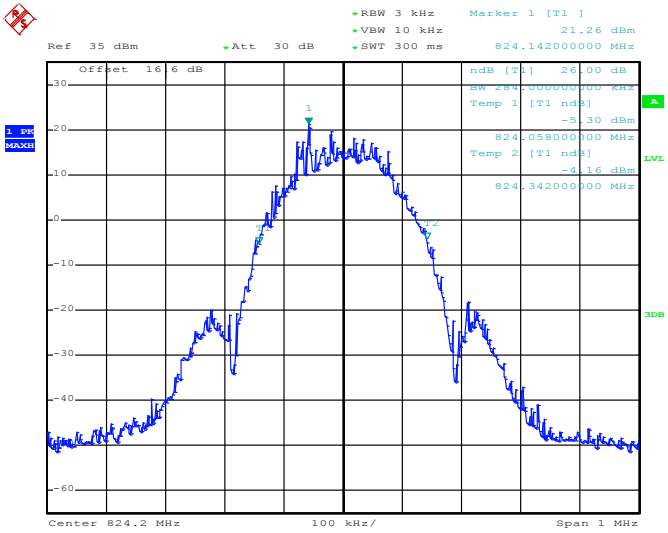

Date: 29.MAY.2014 10:14:03

99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

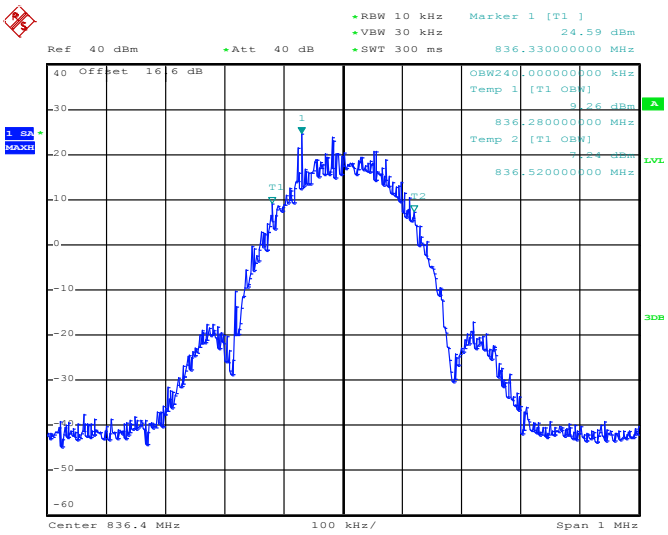

Date: 29.MAY.2014 10:22:13

26dB Bandwidth Plot on Channel 189 (836.4 MHz)

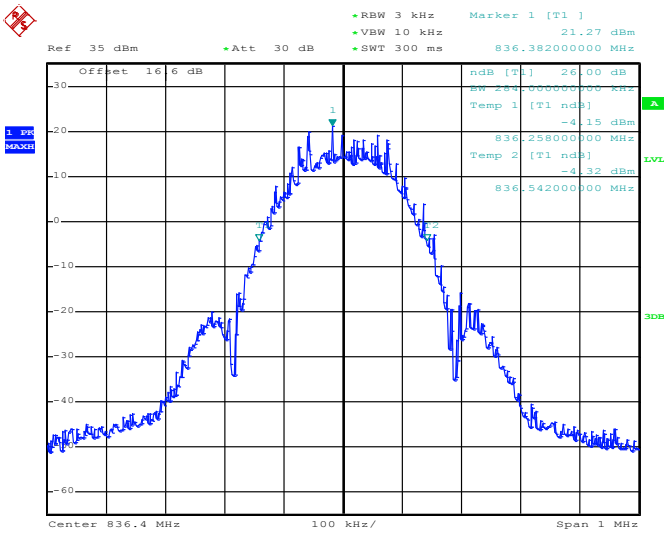

Date: 29.MAY.2014 10:16:44

99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

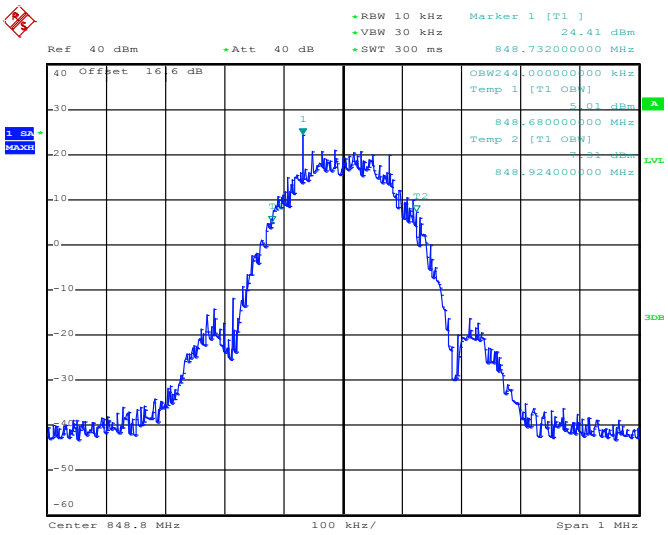

Date: 29.MAY.2014 10:22:41

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

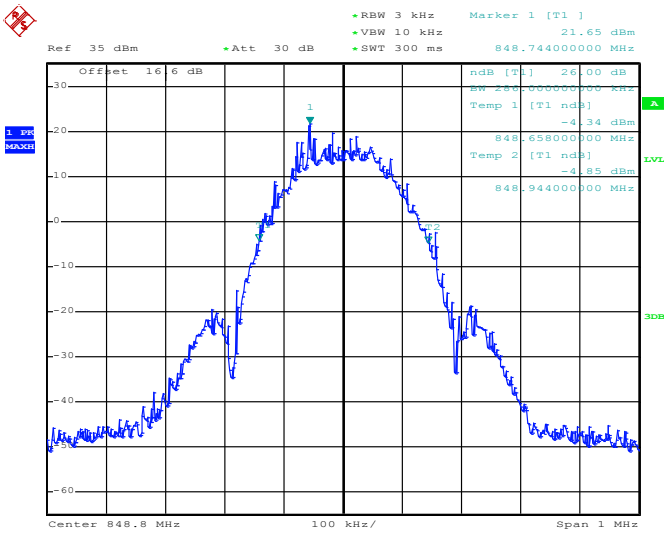

Date: 29.MAY.2014 10:15:00

Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

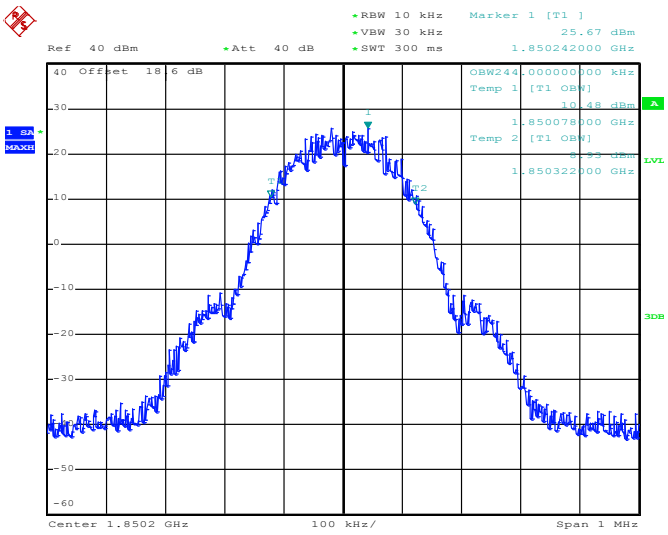

Date: 29.MAY.2014 11:41:27

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

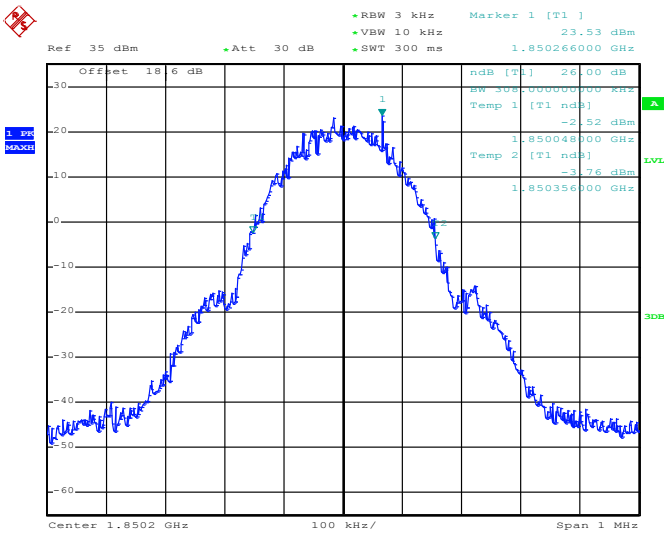

Date: 29.MAY.2014 11:39:40

99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

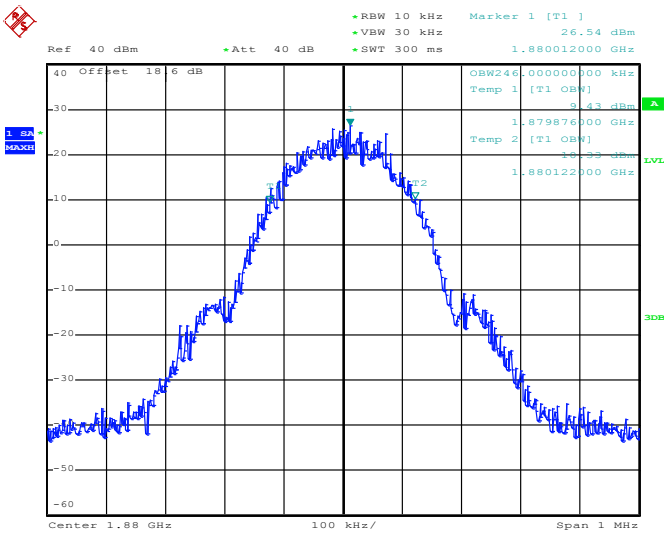

Date: 29.MAY.2014 11:41:55

26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

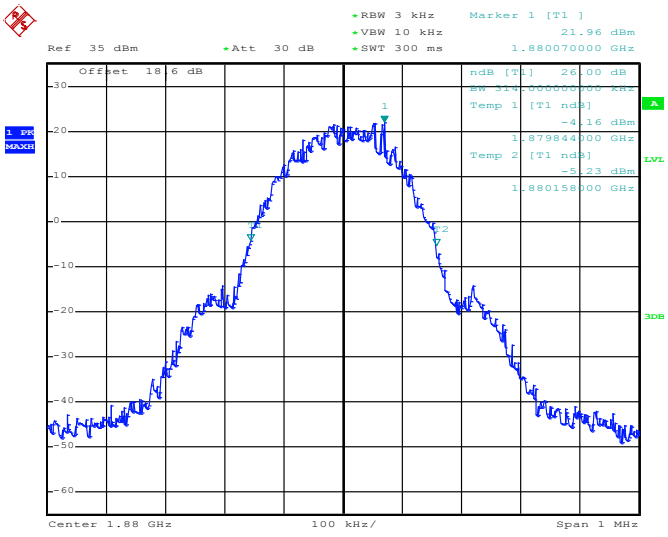

Date: 29.MAY.2014 11:40:08

99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

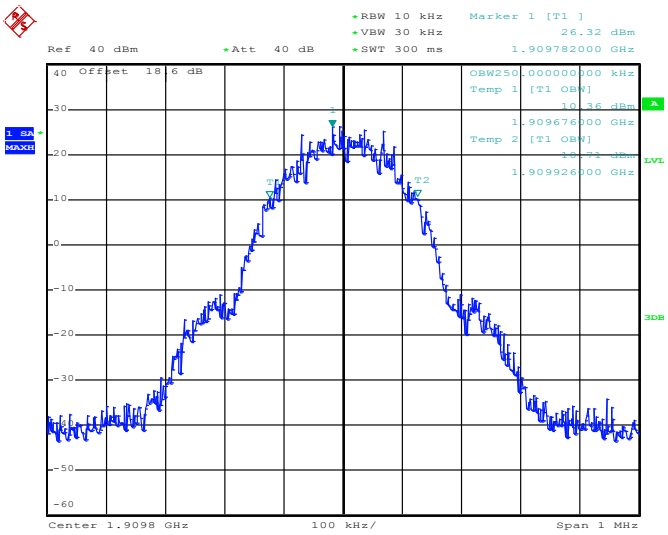

Date: 29.MAY.2014 11:42:24

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

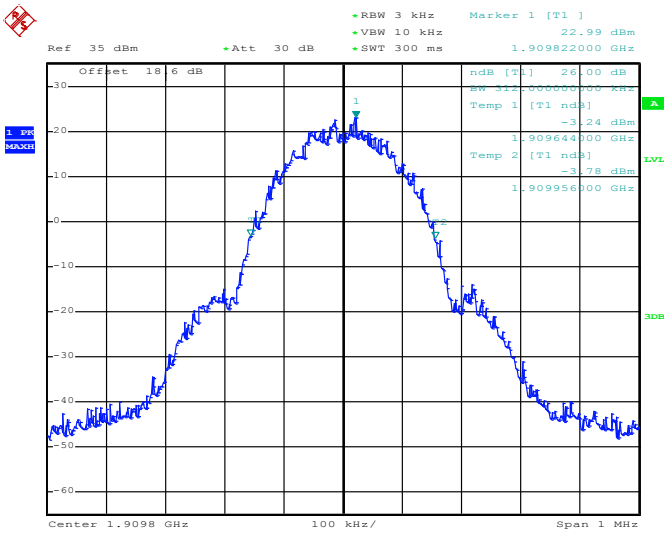

Date: 29.MAY.2014 11:40:37

Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

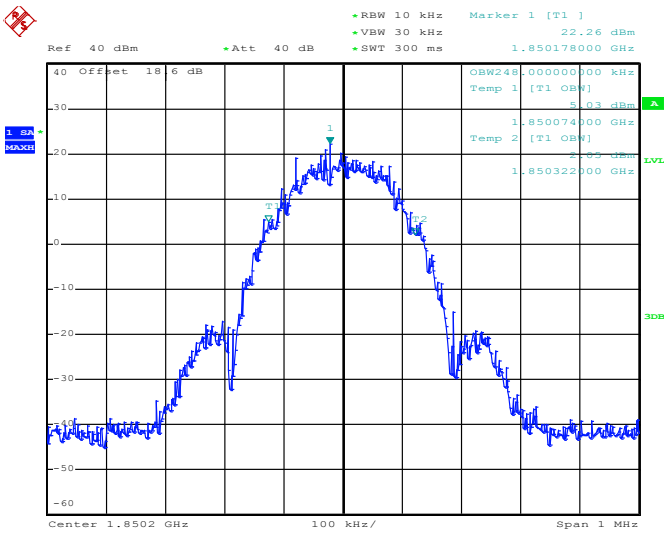

Date: 29.MAY.2014 13:41:22

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

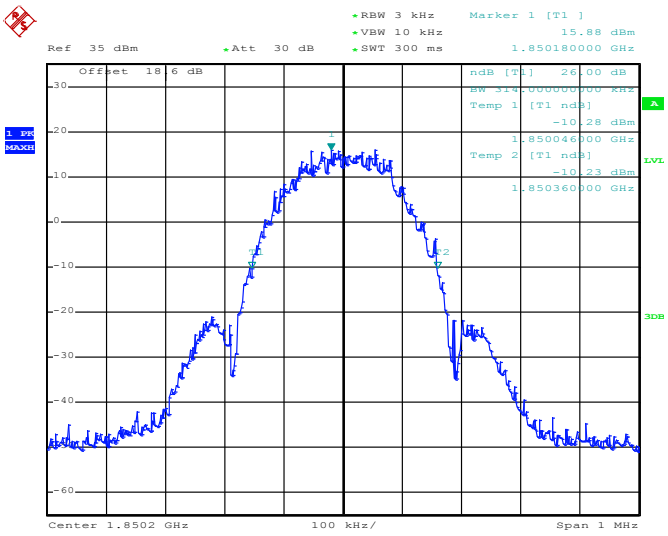

Date: 29.MAY.2014 13:39:20

99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

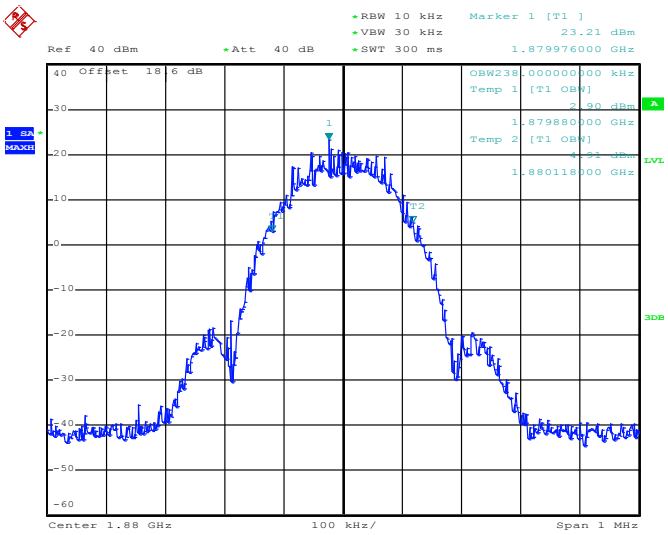

Date: 29.MAY.2014 13:41:50

26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

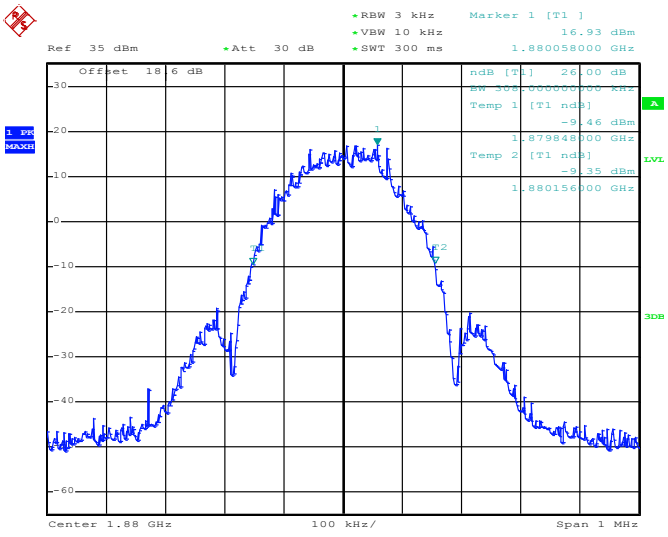

Date: 29.MAY.2014 13:39:49

99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

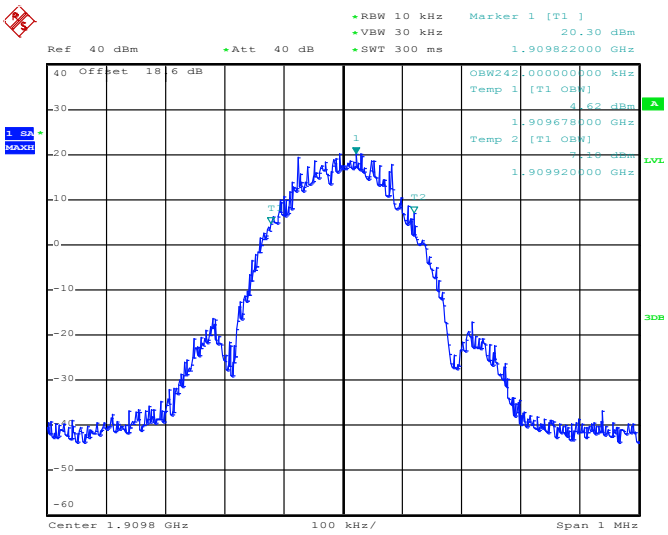

Date: 29.MAY.2014 13:42:19

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

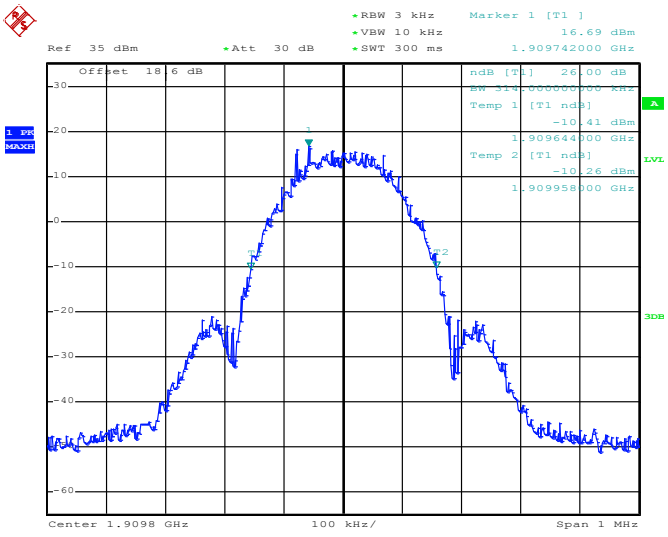

Date: 29.MAY.2014 13:40:18

Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

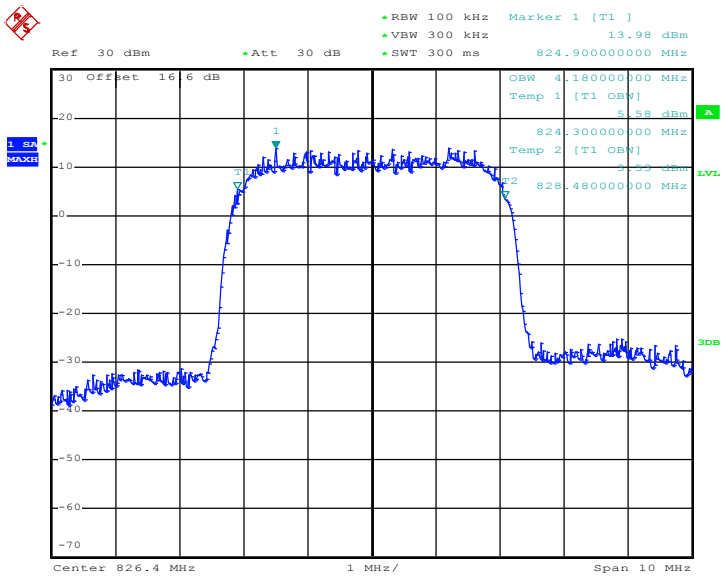

Date: 29.MAY.2014 15:00:21

26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

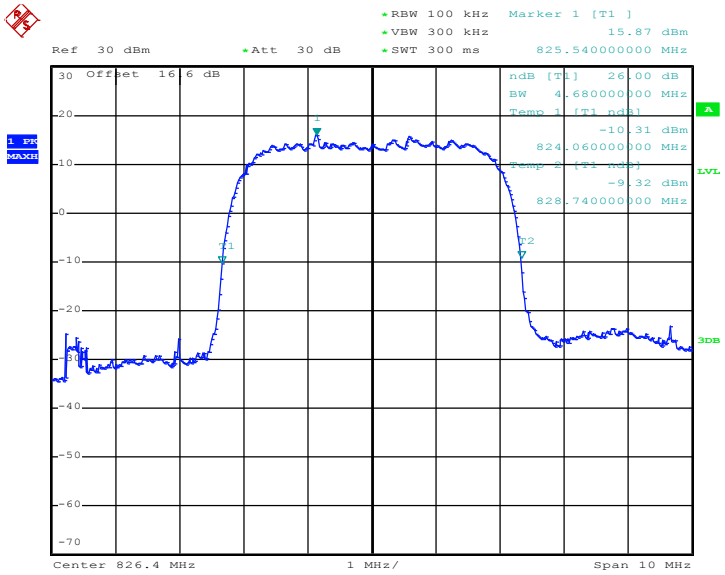

Date: 29.MAY.2014 14:55:43

99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

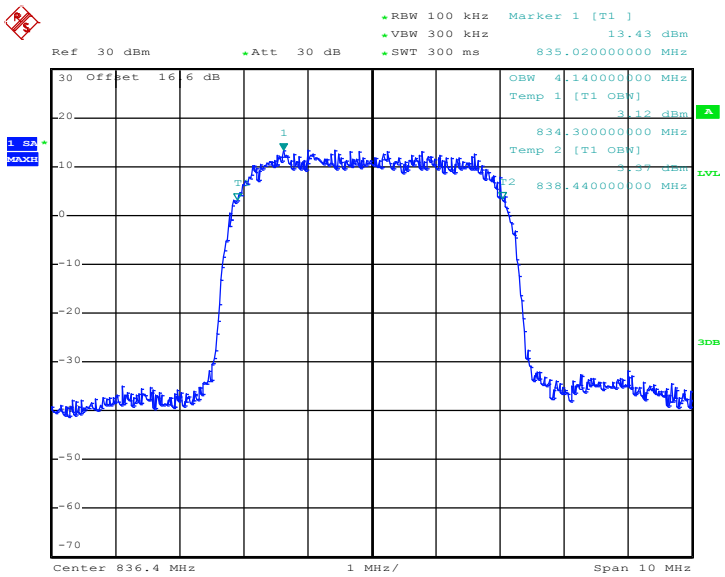

Date: 29.MAY.2014 15:00:49

26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

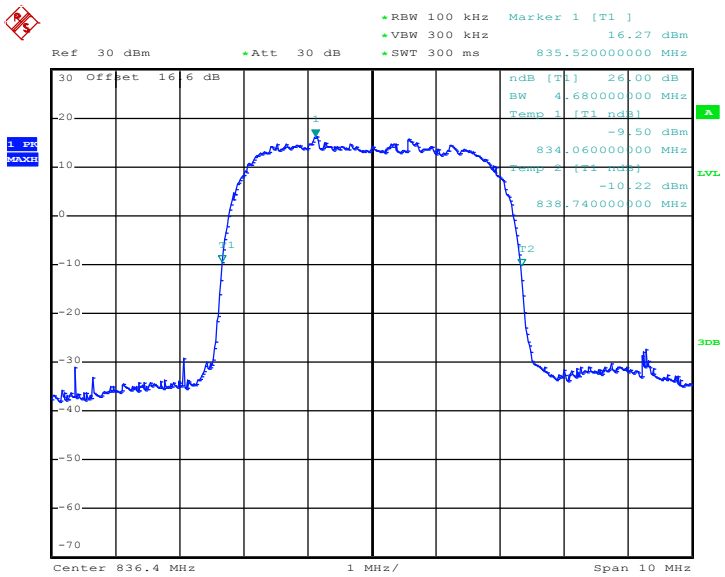

Date: 29.MAY.2014 14:51:57

99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

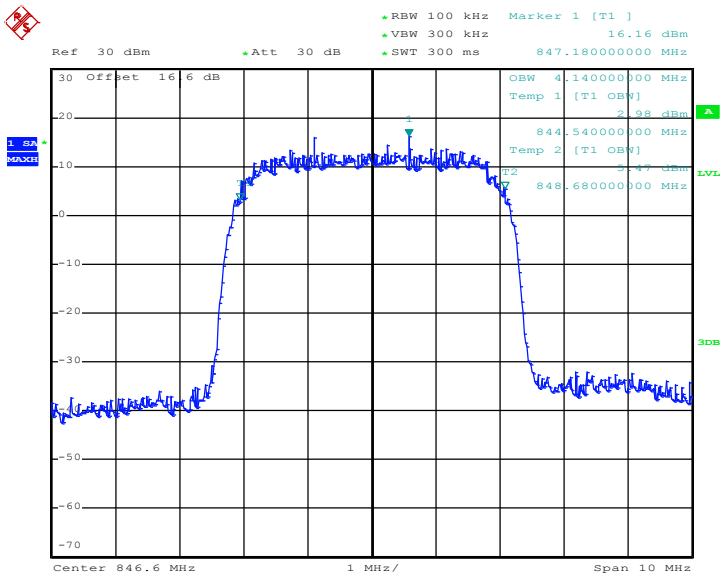

Date: 29.MAY.2014 15:01:18

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

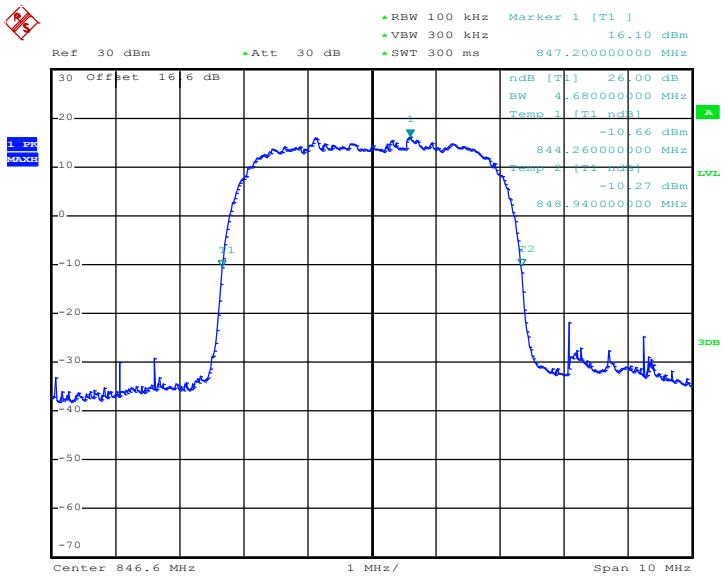

Date: 29.MAY.2014 14:52:26

Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

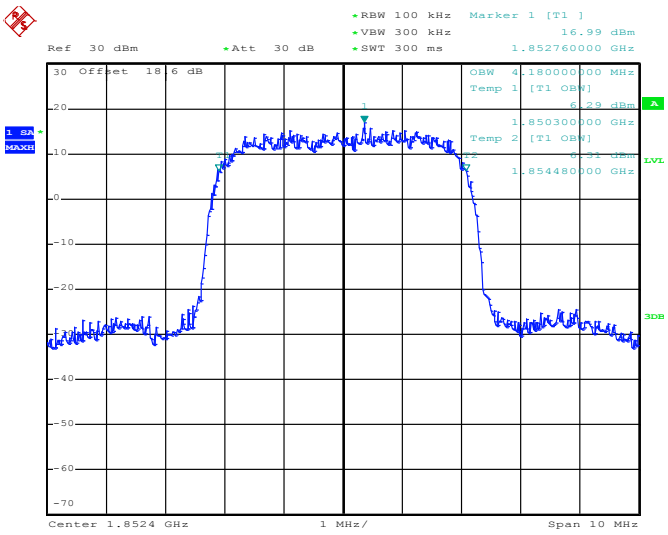

Date: 29.MAY.2014 14:18:45

26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

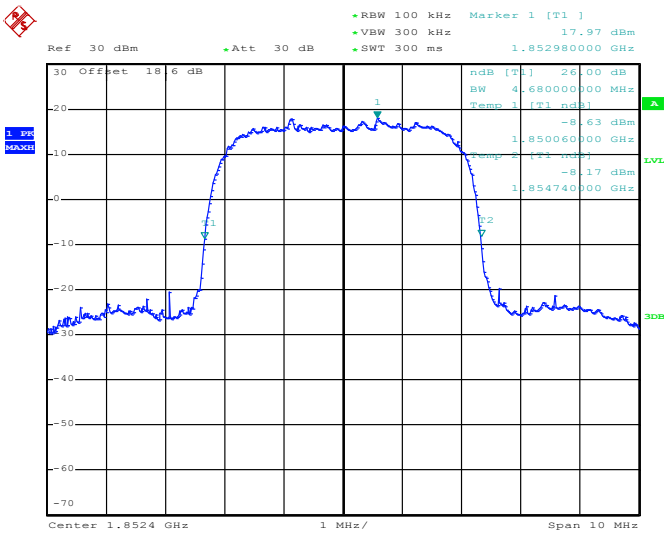

Date: 29.MAY.2014 14:12:40

99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

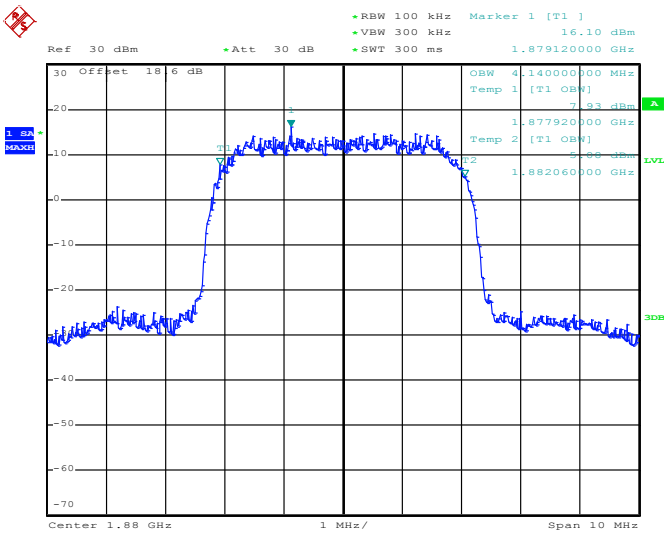

Date: 29.MAY.2014 14:19:13

26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

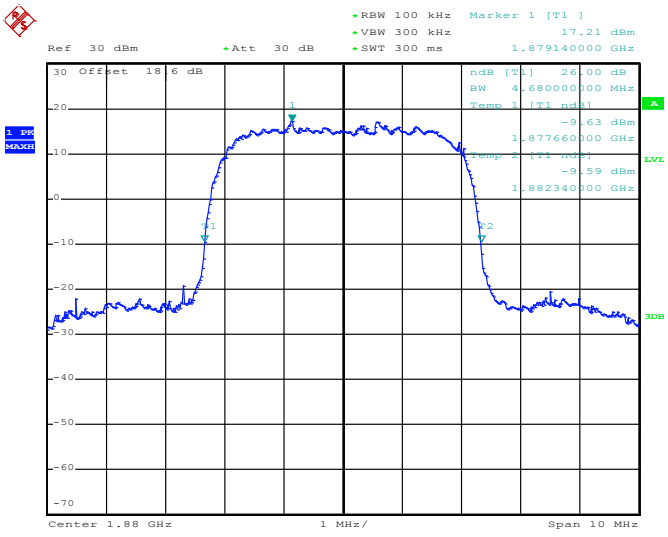

Date: 29.MAY.2014 14:13:08

99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

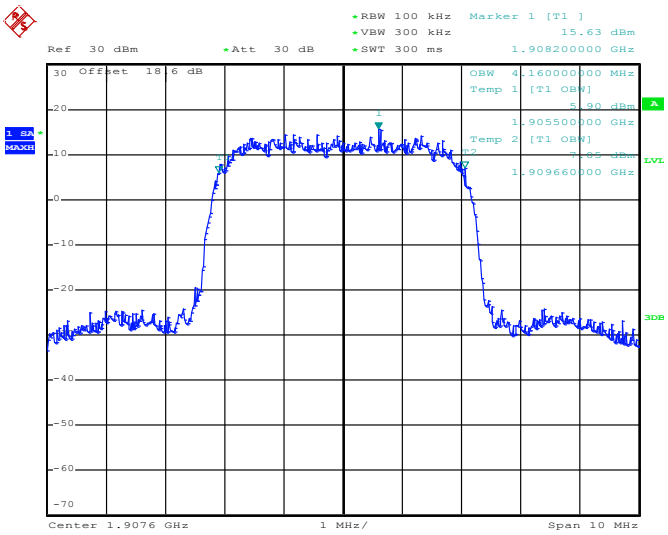

Date: 29.MAY.2014 14:19:42

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

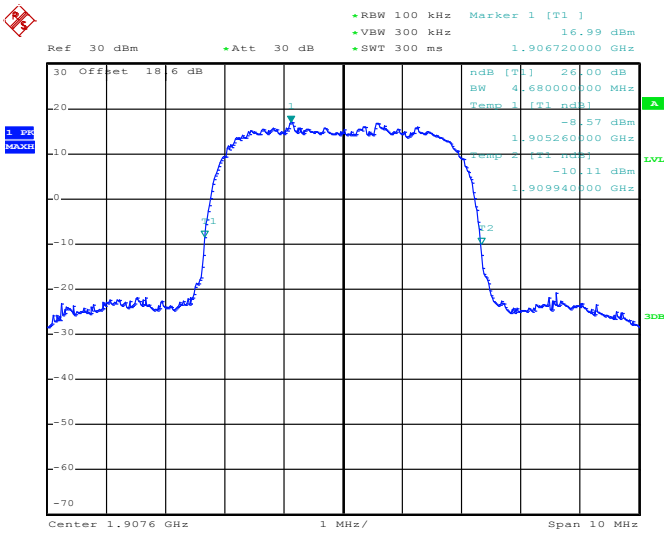

Date: 29.MAY.2014 14:13:37

Band :	CDMA2000 BC0	Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

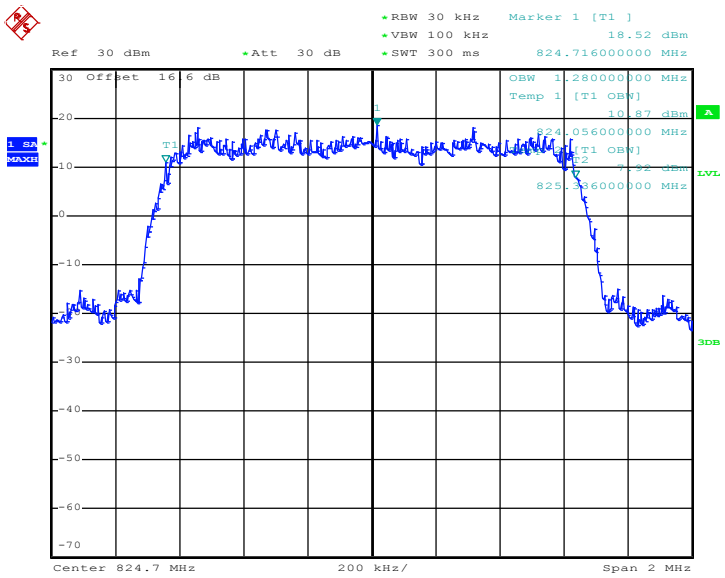

Date: 29.MAY.2014 17:50:06

26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

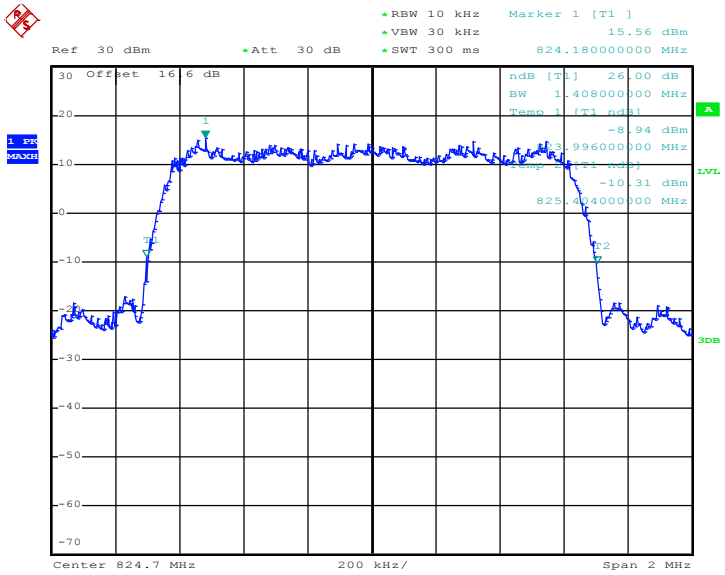

Date: 29.MAY.2014 17:48:00

99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)

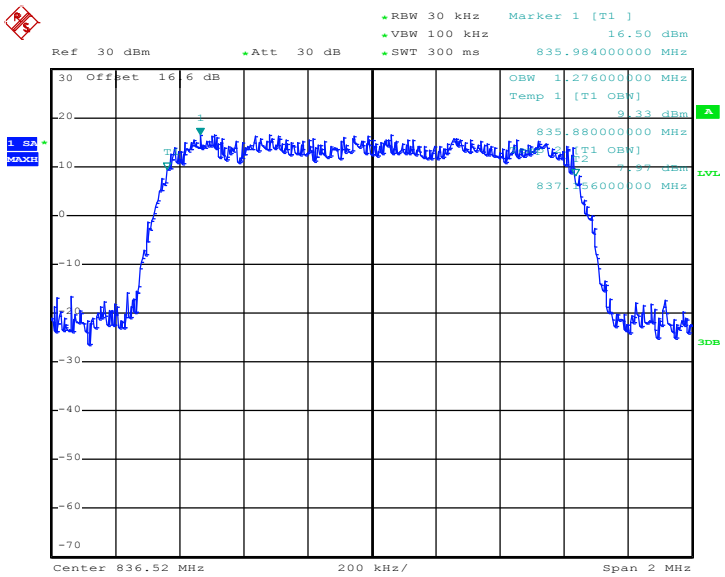

Date: 29.MAY.2014 17:50:35

26dB Bandwidth Plot on Channel 384 (836.52 MHz)

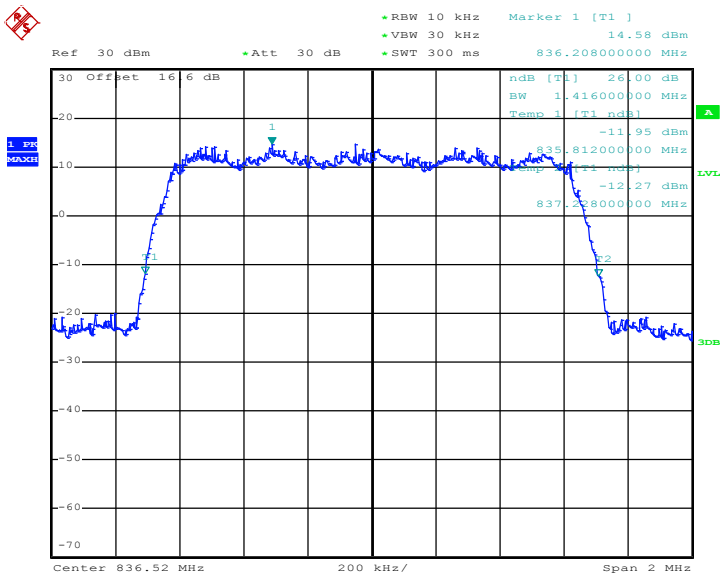

Date: 29.MAY.2014 17:48:29

99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

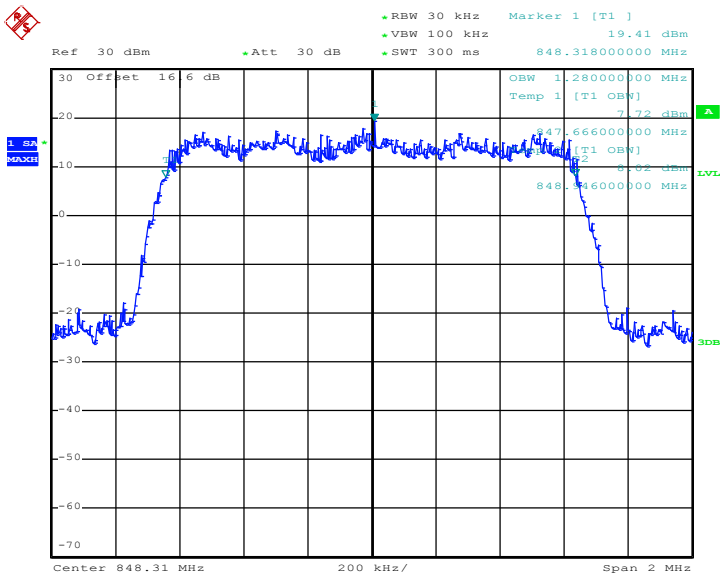

Date: 29.MAY.2014 17:51:04

26dB Bandwidth Plot on Channel 777 (848.31 MHz)

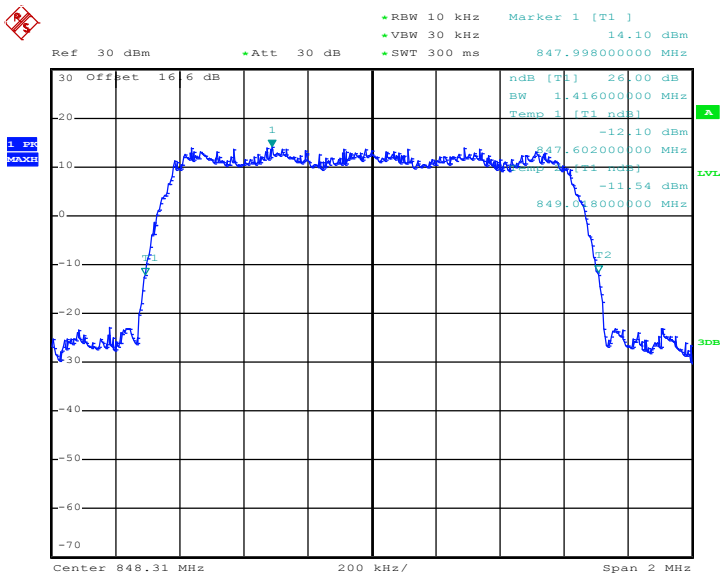

Date: 29.MAY.2014 17:48:58

Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO55 (QPSK)

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

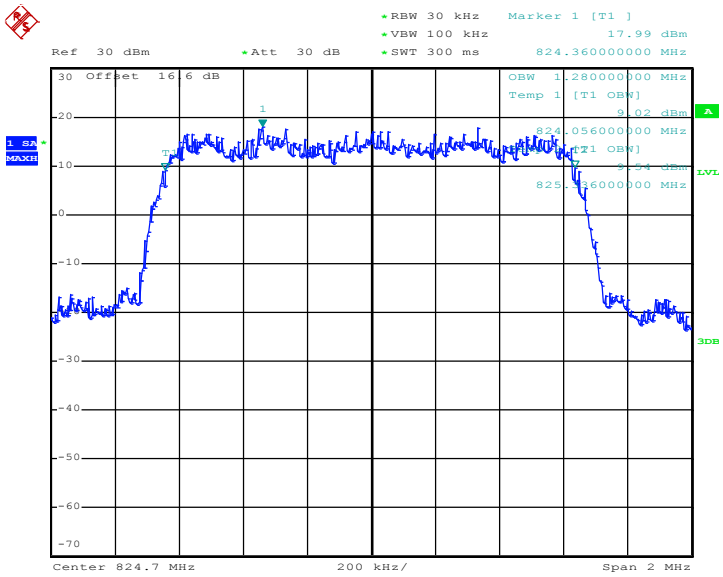

Date: 30.MAY.2014 11:09:45

26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

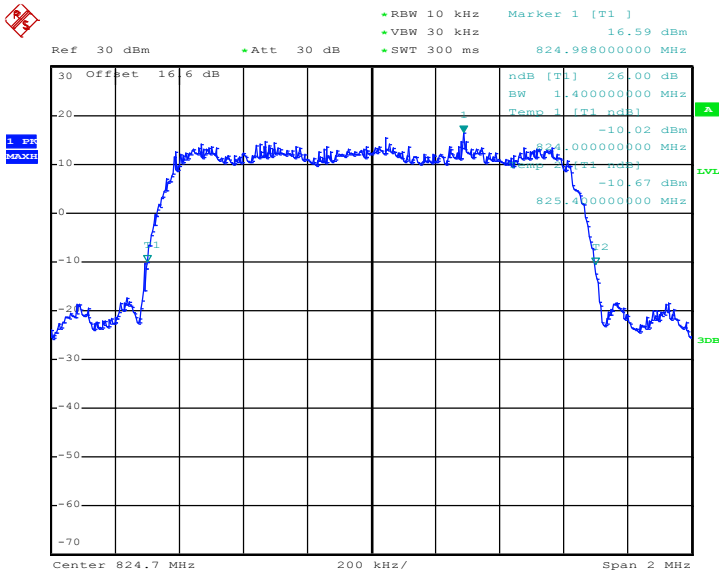

Date: 30.MAY.2014 11:06:30

99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)

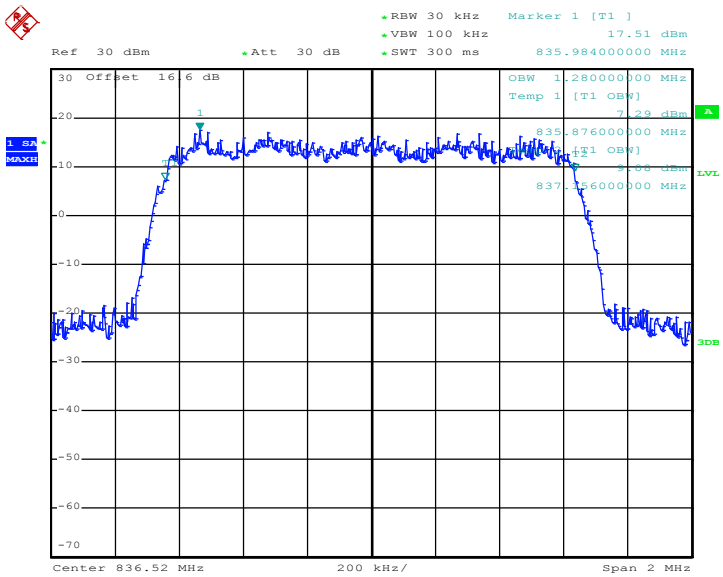

Date: 30.MAY.2014 11:10:13

26dB Bandwidth Plot on Channel 384 (836.52 MHz)

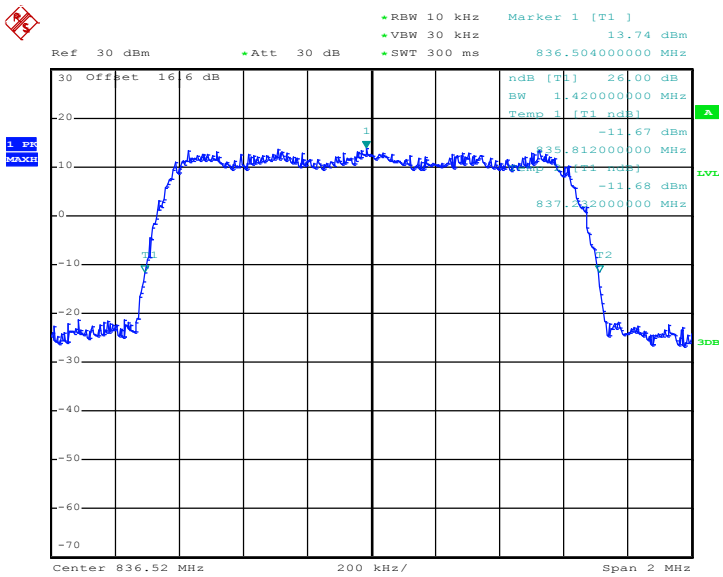

Date: 30.MAY.2014 11:06:59

99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

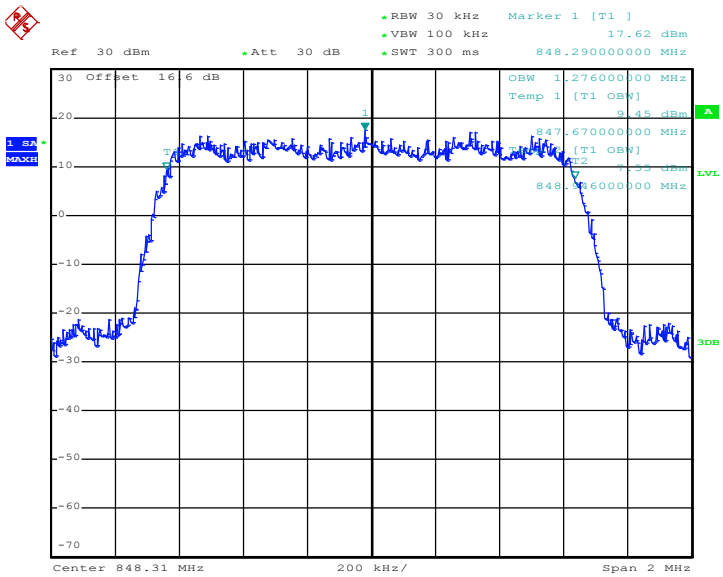

Date: 30.MAY.2014 11:10:42

26dB Bandwidth Plot on Channel 777 (848.31 MHz)

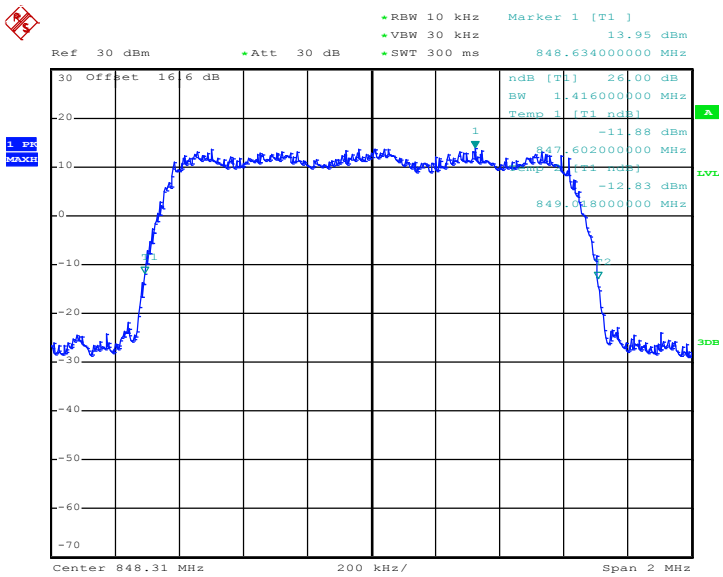

Date: 30.MAY.2014 11:07:27

Band :	CDMA2000 BC1	Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

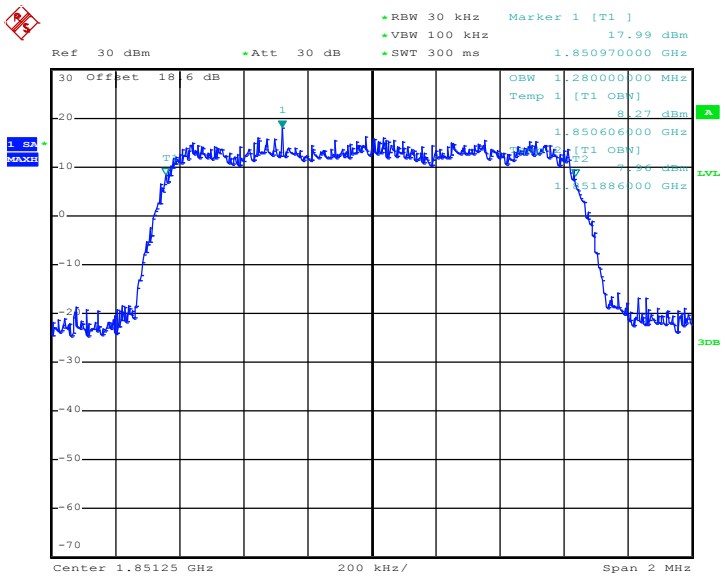

Date: 30.MAY.2014 09:16:01

26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

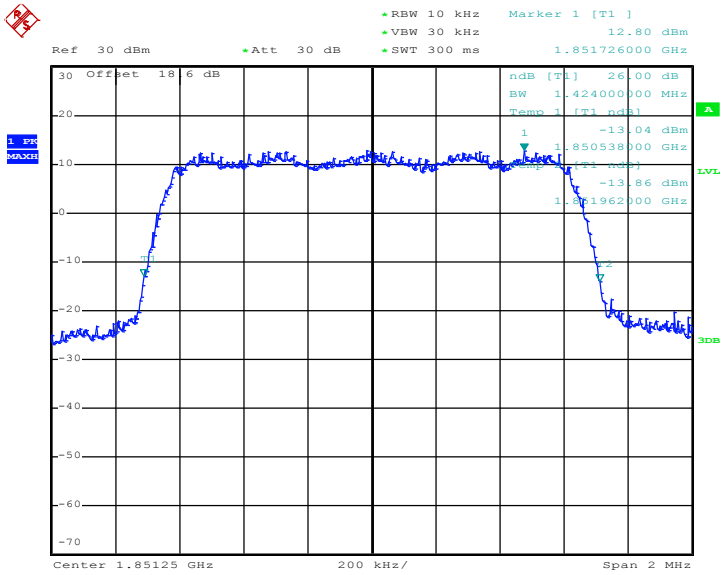

Date: 30.MAY.2014 09:11:06

99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

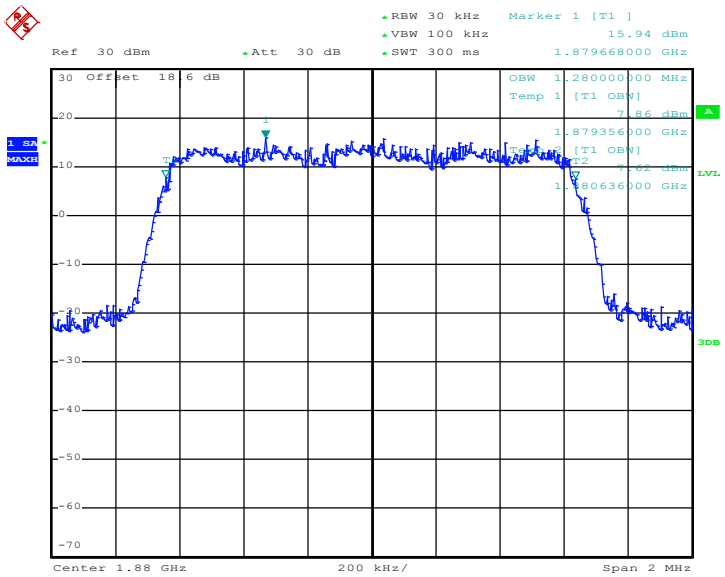

Date: 30.MAY.2014 09:16:30

26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

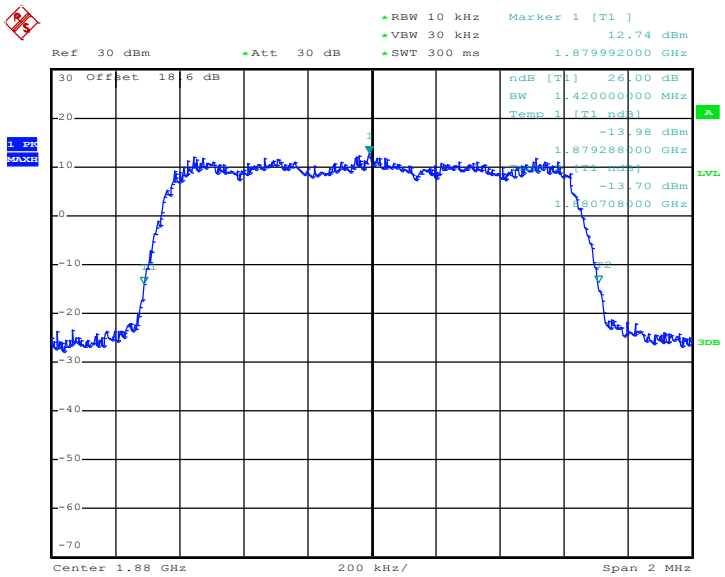

Date: 30.MAY.2014 09:09:44

99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

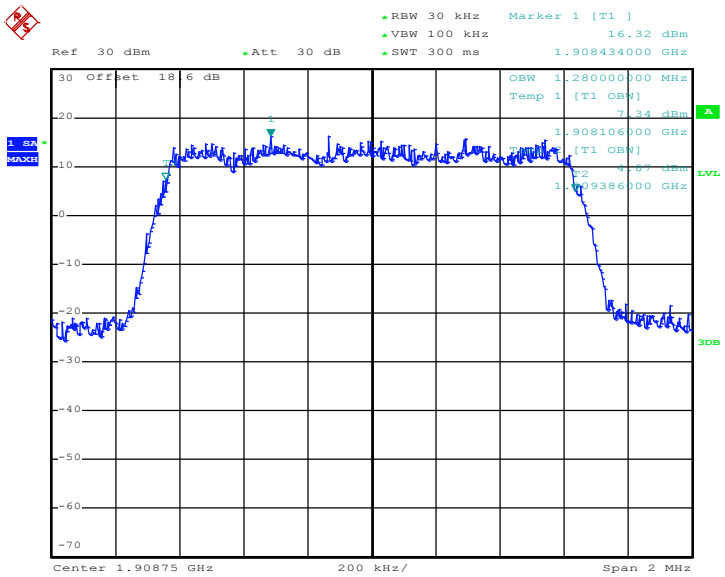

Date: 30.MAY.2014 09:15:09

26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

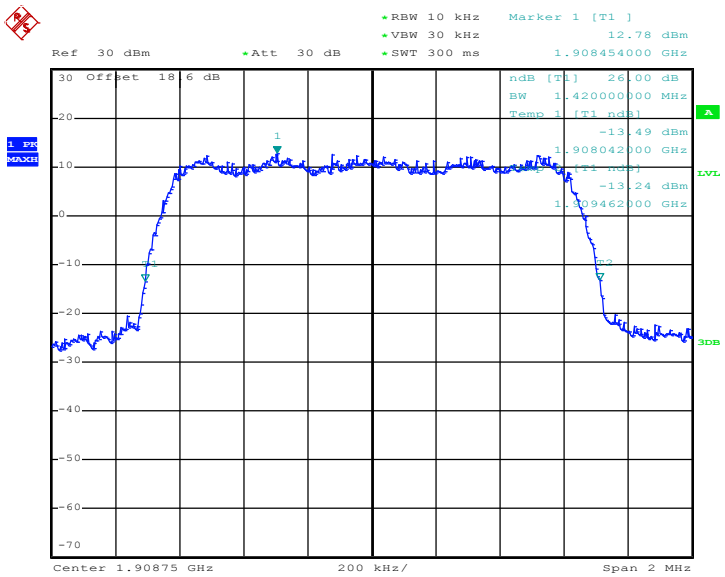

Date: 30.MAY.2014 09:10:13

Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC3+SO55 (QPSK)

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

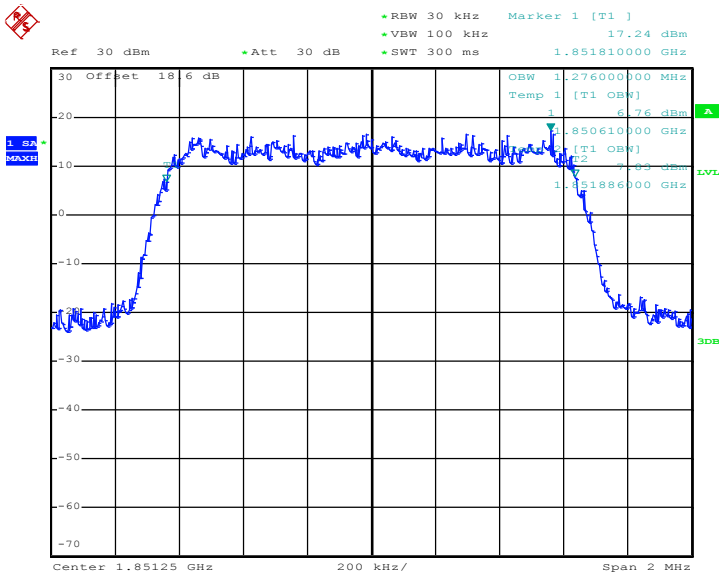

Date: 30.MAY.2014 10:17:24

26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

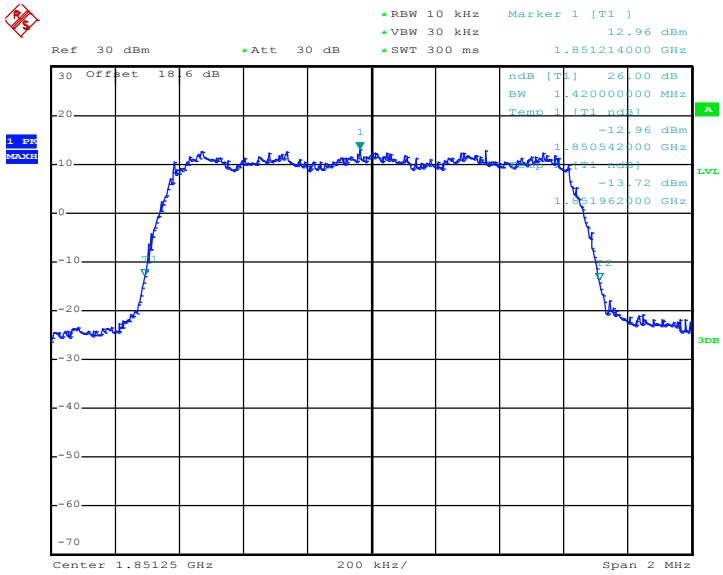

Date: 30.MAY.2014 10:15:42

99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

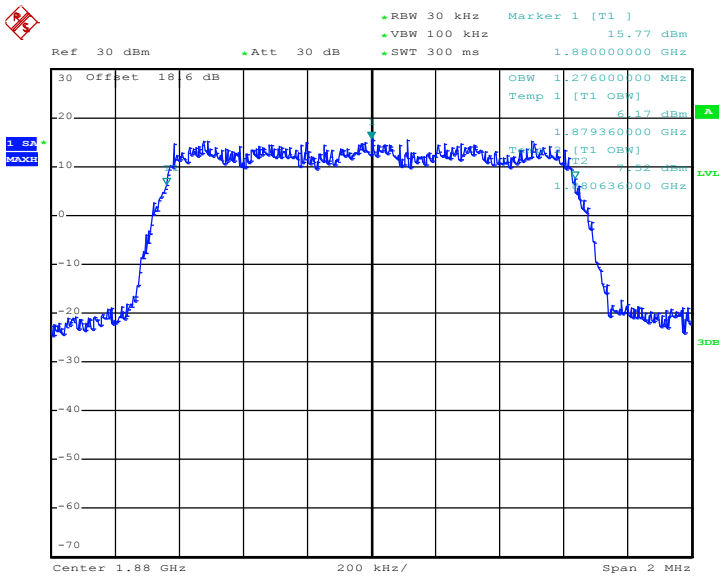

Date: 30.MAY.2014 10:17:53

26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

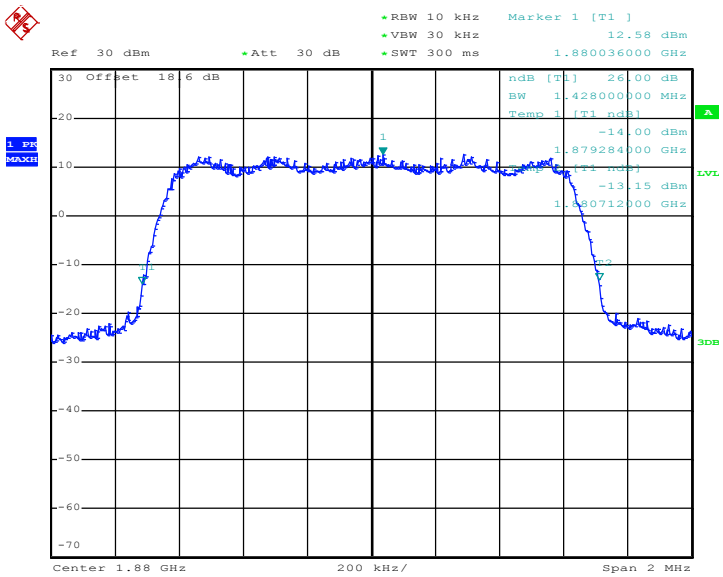

Date: 30.MAY.2014 10:16:10

99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

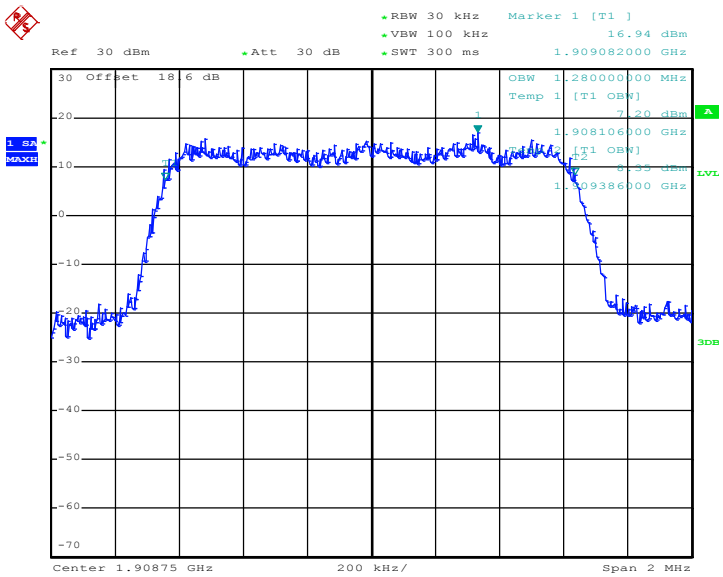

Date: 30.MAY.2014 10:18:21

26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

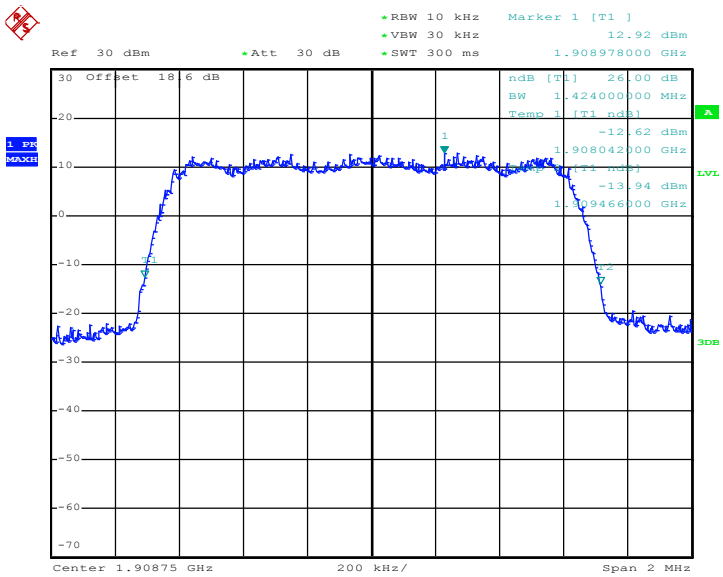

Date: 30.MAY.2014 10:16:39

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The measurement procedures was followed in the KDB 971168 v02r01 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
   = P(W) - [43 + 10log(P)] (dB)
   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
   = -13dBm.

3.5.4 Test Setup

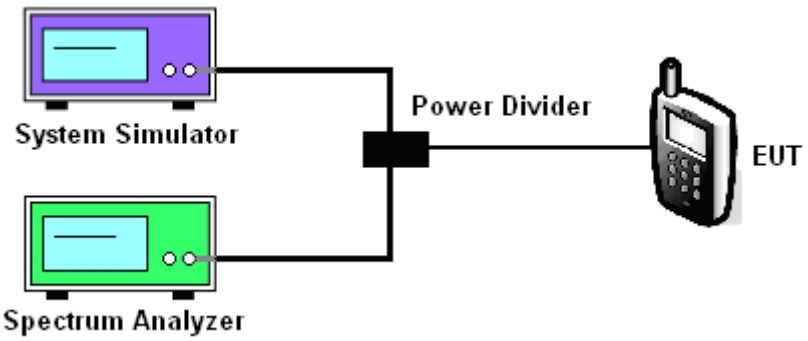

3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)

Lower Band Edge Plot on Channel 128 (824.2 MHz)

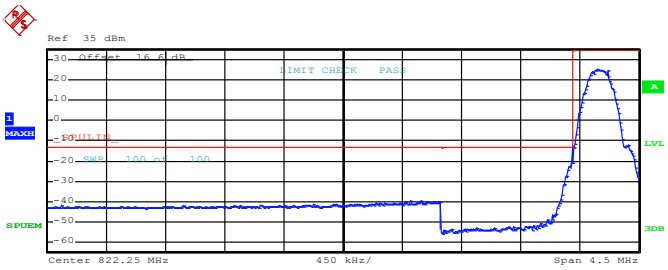

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
820.000 M	823.000 M	100.00 k	822.838000 M	-39.84	-26.84
823.000 M	824.000 M	3.00 k	823.980000 M	-21.14	-8.14
824.000 M	824.500 M	10.00 k	824.188000 M	25.58	-9.42

Date: 29.MAY.2014 09:39:49

Higher Band Edge Plot on Channel 251 (848.8 MHz)

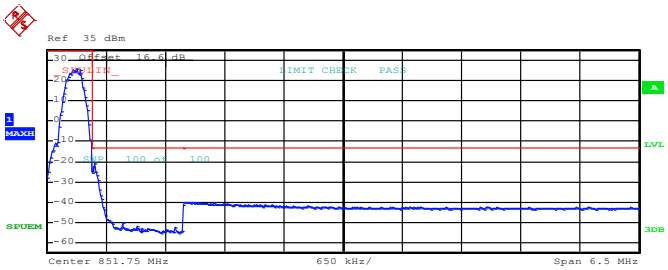

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
848.500 M	849.000 M	10.00 k	848.819000 M	25.68	-9.32
849.000 M	850.000 M	3.00 k	849.020000 M	-20.61	-7.61
850.000 M	855.000 M	100.00 k	850.035000 M	-39.86	-26.86

Date: 29.MAY.2014 09:36:35

Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)

Lower Band Edge Plot on Channel 128 (824.2 MHz)

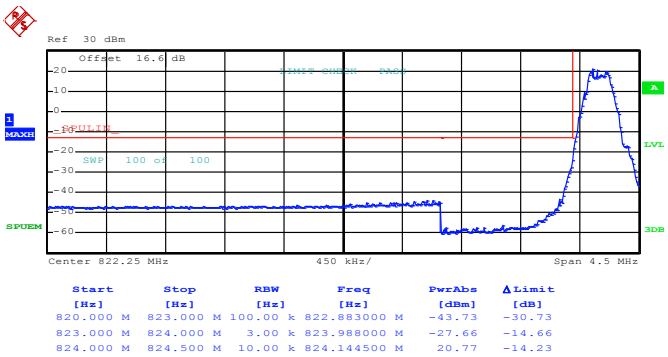

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
820.000 M	823.000 M	100.00 k	822.883000 M	-43.73	-30.73
823.000 M	824.000 M	3.00 k	823.988000 M	-27.66	-14.66
824.000 M	824.500 M	10.00 k	824.144500 M	20.77	-14.23

Date: 29.MAY.2014 10:30:44

Higher Band Edge Plot on Channel 251 (848.8 MHz)

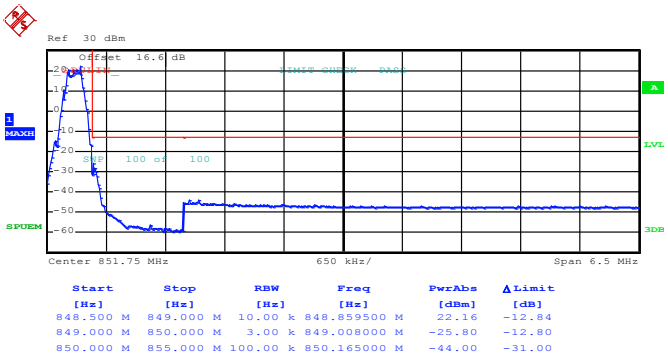

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
848.500 M	849.000 M	10.00 k	848.859500 M	22.16	-12.84
849.000 M	850.000 M	3.00 k	849.008000 M	-25.80	-12.80
850.000 M	855.000 M	100.00 k	850.165000 M	-44.00	-31.00

Date: 29.MAY.2014 10:27:02

Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

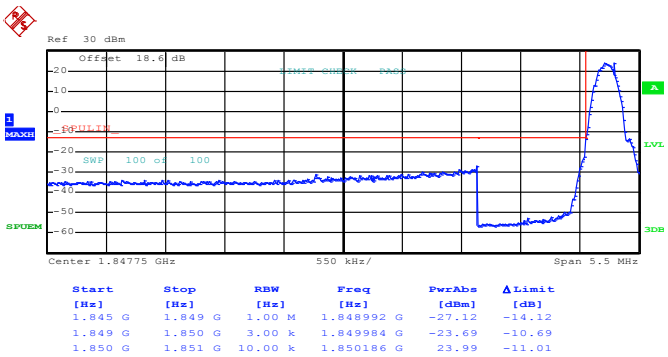

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.845 G	1.849 G	1.00 M	1.848992 G	-27.12	-14.12
1.849 G	1.850 G	3.00 k	1.849984 G	-23.69	-10.69
1.850 G	1.851 G	10.00 k	1.850186 G	23.99	-11.01

Date: 29.MAY.2014 11:55:19

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

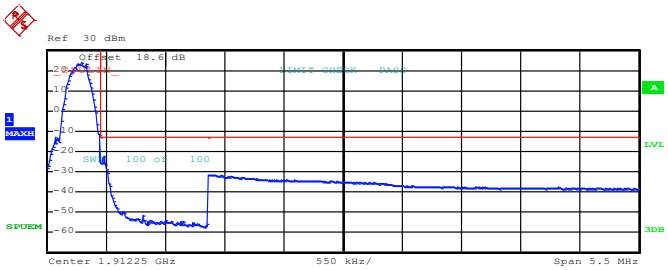

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.910 G	1.910 G	10.00 k	1.909814 G	23.87	-11.13
1.910 G	1.911 G	3.00 k	1.910020 G	-22.19	-9.19
1.911 G	1.915 G	1.00 M	1.911008 G	-31.53	-18.53

Date: 29.MAY.2014 11:52:58

Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

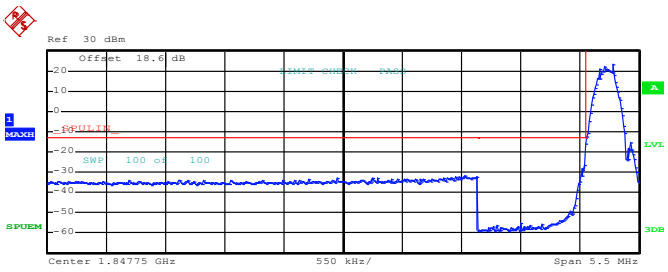

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.845 G	1.849 G	1.00 M	1.848884 G	-31.89	-18.89
1.849 G	1.850 G	3.00 k	1.849992 G	-26.34	-13.34
1.850 G	1.851 G	10.00 k	1.850260 G	23.01	-11.99

Date: 29.MAY.2014 13:49:54

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

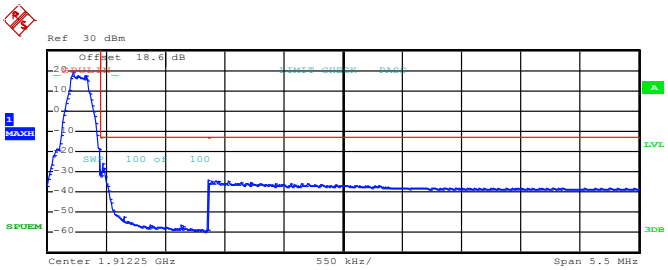

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.910 G	1.910 G	10.00 k	1.909742 G	19.08	-15.92
1.910 G	1.911 G	3.00 k	1.910012 G	-25.89	-12.89
1.911 G	1.915 G	1.00 M	1.911000 G	-34.22	-21.22

Date: 29.MAY.2014 13:46:57

Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

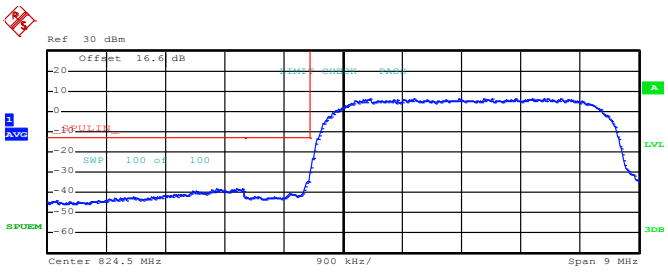

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
820.000 M	823.000 M	100.00 k	822.976000 M	-38.12	-25.12
823.000 M	824.000 M	50.00 k	823.968000 M	-34.53	-21.53
824.000 M	829.000 M	100.00 k	827.610000 M	6.45	-28.55

Date: 29.MAY.2014 15:07:43

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

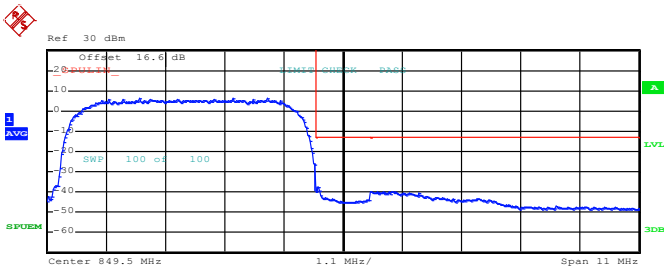

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
844.000 M	849.000 M	100.00 k	848.080000 M	6.55	-28.45
849.000 M	850.000 M	50.00 k	849.028000 M	-37.61	-24.61
850.000 M	855.000 M	100.00 k	850.010000 M	-39.63	-26.63

Date: 29.MAY.2014 15:04:53

Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

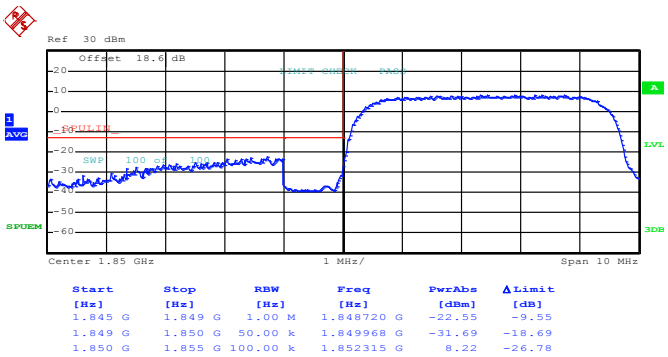

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.845 G	1.849 G	1.00 M	1.848720 G	-22.55	-9.55
1.849 G	1.850 G	50.00 k	1.849968 G	-31.69	-18.69
1.850 G	1.855 G	100.00 k	1.852315 G	8.22	-26.78

Date: 29.MAY.2014 14:26:42

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

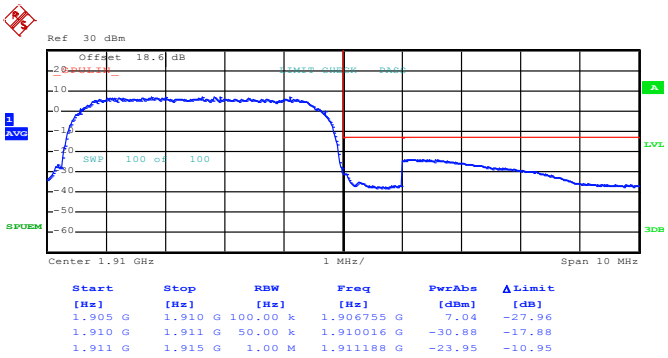

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.905 G	1.910 G	100.00 k	1.906755 G	7.04	-27.96
1.910 G	1.911 G	50.00 k	1.910016 G	-30.88	-17.88
1.911 G	1.915 G	1.00 M	1.911188 G	-23.95	-10.95

Date: 29.MAY.2014 14:24:03

Band :	CDMA2000 BC0	Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)

Lower Band Edge Plot on Channel 1013 (824.7 MHz)

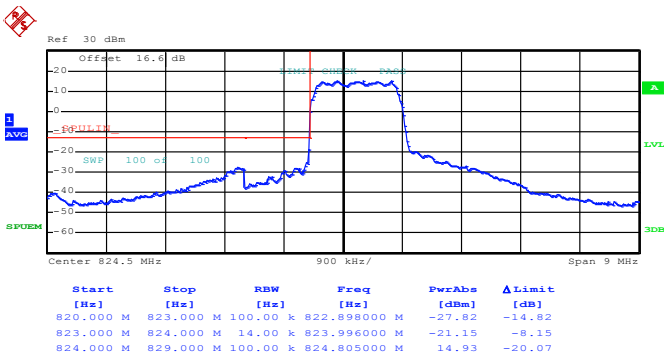

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
820.000 M	823.000 M	100.00 k	822.898000 M	-27.82	-14.82
823.000 M	824.000 M	14.00 k	823.996000 M	-21.15	-8.15
824.000 M	829.000 M	100.00 k	824.805000 M	14.93	-20.07

Date: 29.MAY.2014 17:32:37

Higher Band Edge Plot on Channel 777 (848.31 MHz)

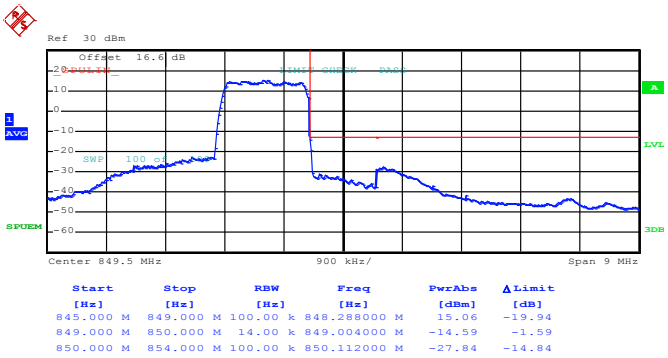

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
845.000 M	849.000 M	100.00 k	848.288000 M	15.06	-19.94
849.000 M	850.000 M	14.00 k	849.004000 M	-14.59	-1.59
850.000 M	854.000 M	100.00 k	850.112000 M	-27.84	-14.84

Date: 29.MAY.2014 17:28:56

Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO55 (QPSK)

Lower Band Edge Plot on Channel 1013 (824.7 MHz)

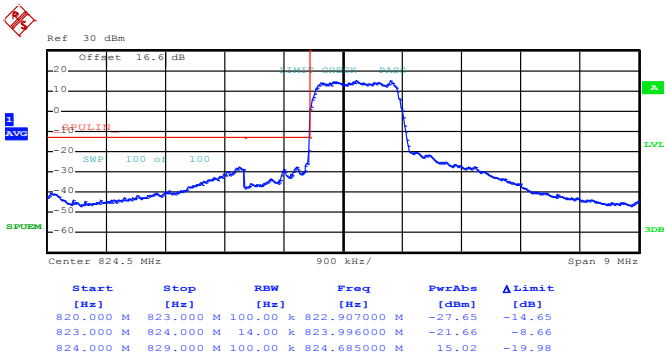

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
820.000 M	823.000 M	100.00 k	822.907000 M	-27.65	-14.65
823.000 M	824.000 M	14.00 k	823.996000 M	-21.66	-8.66
824.000 M	829.000 M	100.00 k	824.685000 M	15.02	-19.98

Date: 30.MAY.2014 10:43:15

Higher Band Edge Plot on Channel 777 (848.31 MHz)

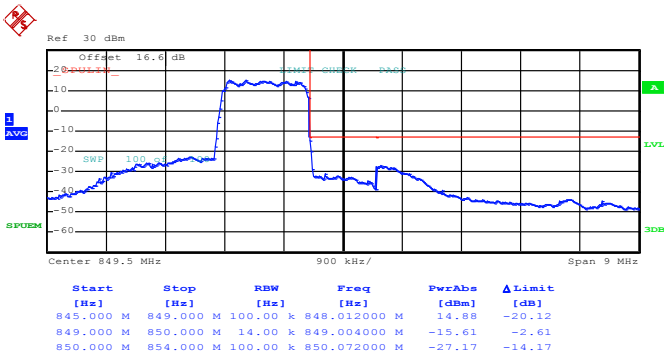

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
845.000 M	849.000 M	100.00 k	848.012000 M	14.88	-20.12
849.000 M	850.000 M	14.00 k	849.004000 M	-15.61	-2.61
850.000 M	854.000 M	100.00 k	850.072000 M	-27.17	-14.17

Date: 30.MAY.2014 10:34:09

Band :	CDMA2000 BC1	Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)

Lower Band Edge Plot on Channel 25 (1851.25 MHz)

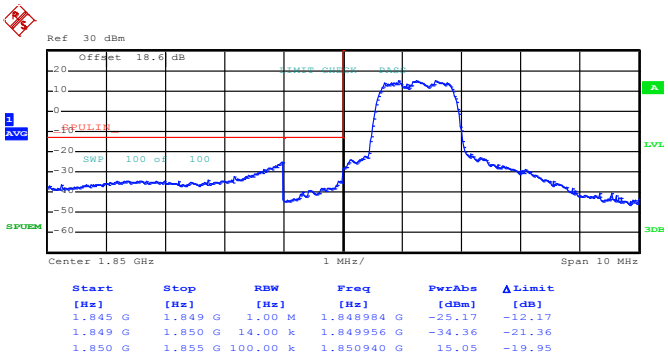

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.845 G	1.849 G	1.00 M	1.848984 G	-25.17	-12.17
1.849 G	1.850 G	14.00 k	1.849956 G	-34.36	-21.36
1.850 G	1.855 G	100.00 k	1.850940 G	15.05	-19.95

Date: 29.MAY.2014 18:08:26

Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

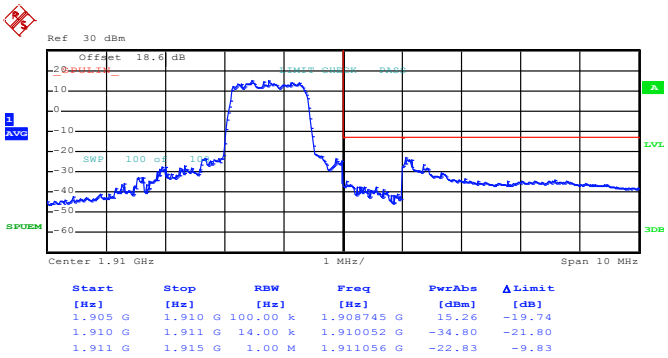

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
1.905 G	1.910 G	100.00 k	1.908745 G	15.26	-19.74
1.910 G	1.911 G	14.00 k	1.910052 G	-34.80	-21.80
1.911 G	1.915 G	1.00 M	1.911056 G	-22.83	-9.83

Date: 29.MAY.2014 18:11:21

Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC3+SO55 (QPSK)

Lower Band Edge Plot on Channel 25 (1851.25 MHz)

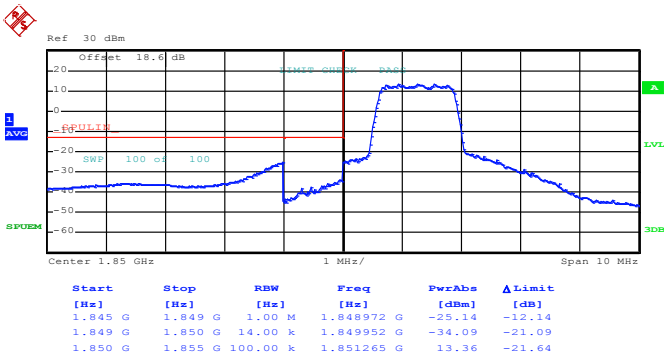

Date: 30.MAY.2014 10:09:54

Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

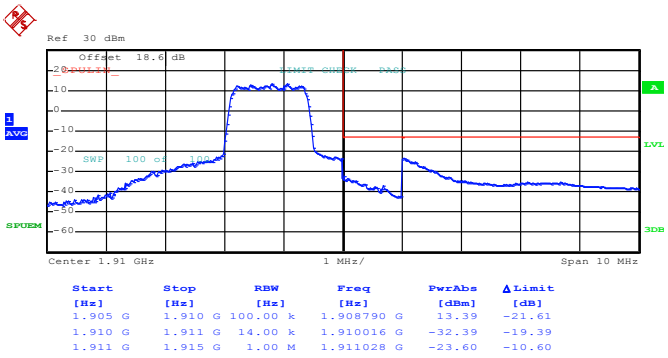

Date: 30.MAY.2014 10:01:29

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The measurement procedures was followed in the KDB 971168 v02r01 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
   = P(W) - [43 + 10log(P)] (dB)
   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
   = -13dBm.

3.6.4 Test Setup

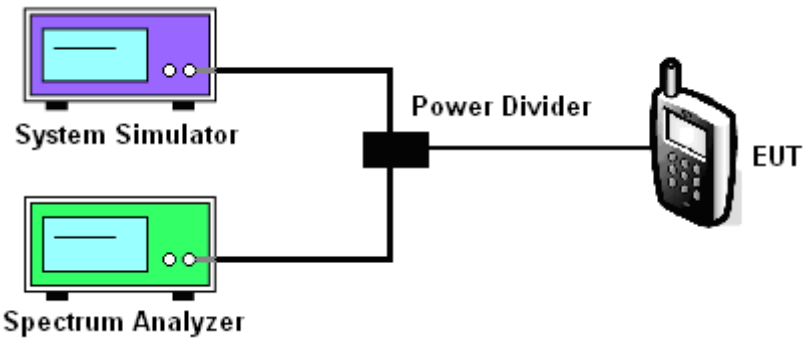

3.6.5 Test Result (Plots) of Conducted Spurious Emission

Band :	GSM850	Channel :	CH128
Test Mode :	GSM Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

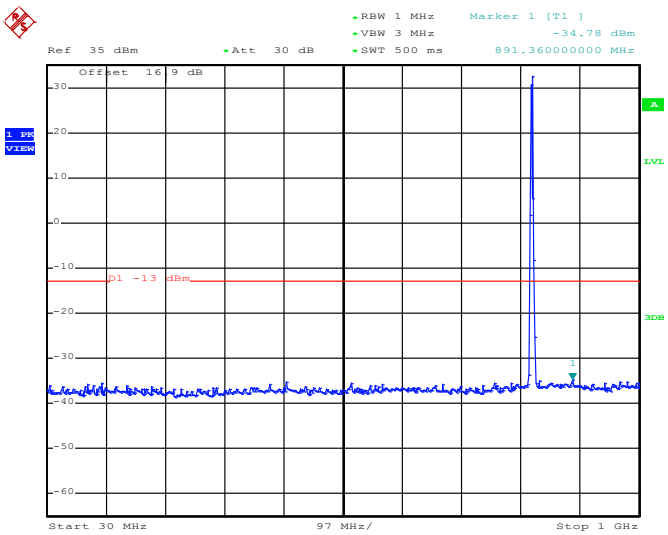

Date: 29.MAY.2014 09:51:38

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

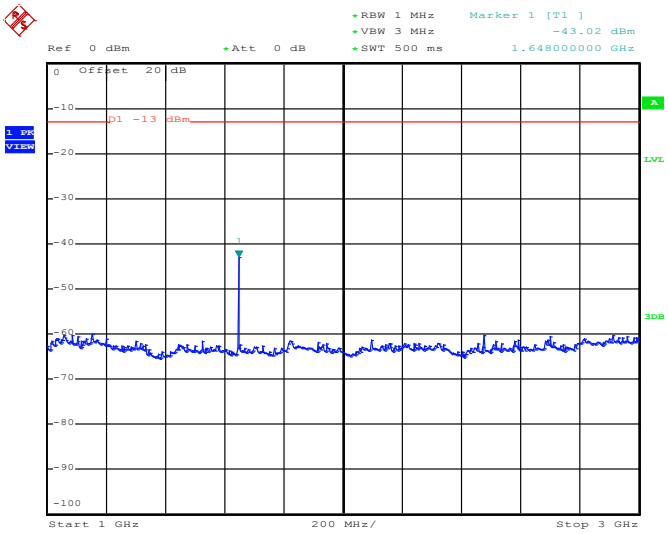

Date: 29.MAY.2014 09:50:41

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

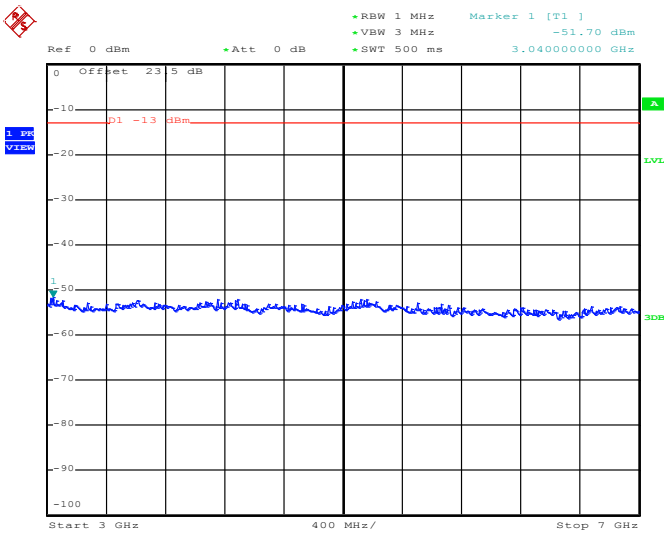

Date: 29.MAY.2014 09:50:50

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

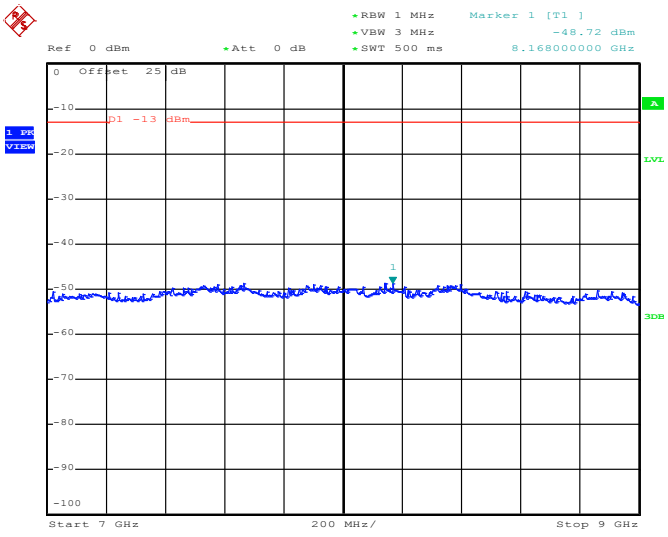

Date: 29.MAY.2014 09:50:58

Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

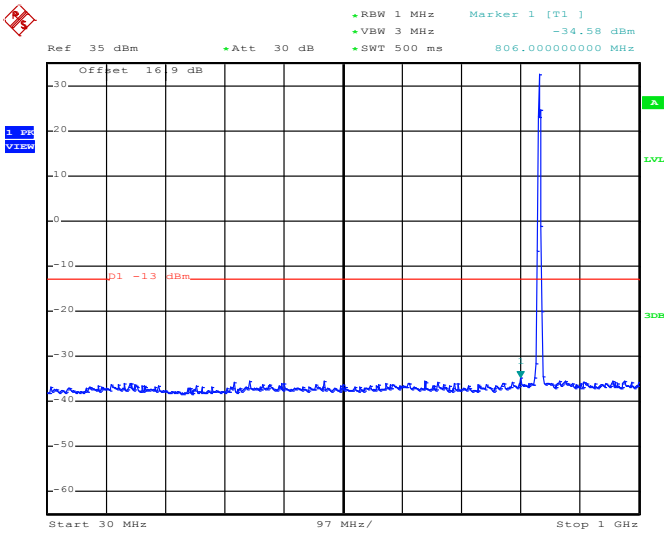

Date: 29.MAY.2014 09:47:57

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

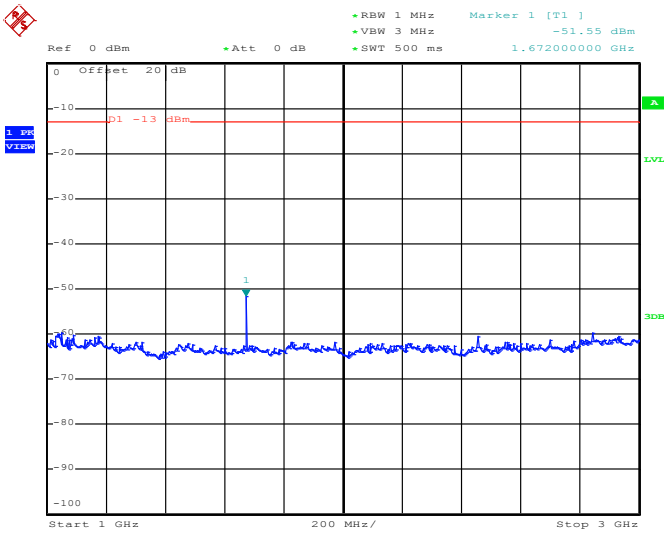

Date: 29.MAY.2014 09:48:07

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

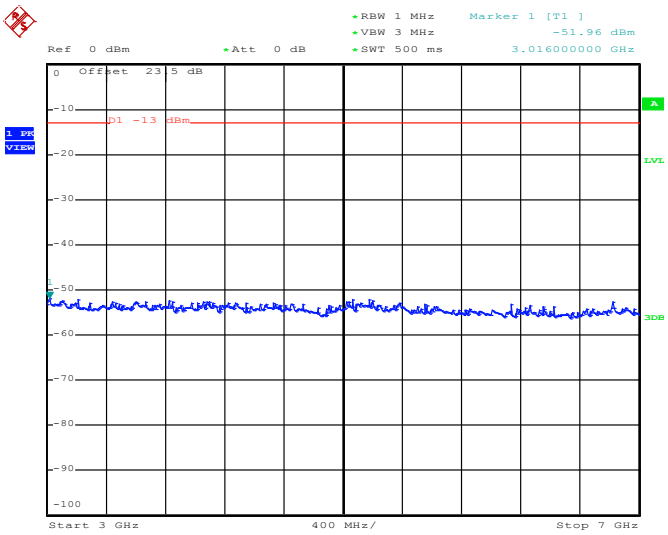

Date: 29.MAY.2014 09:48:16

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

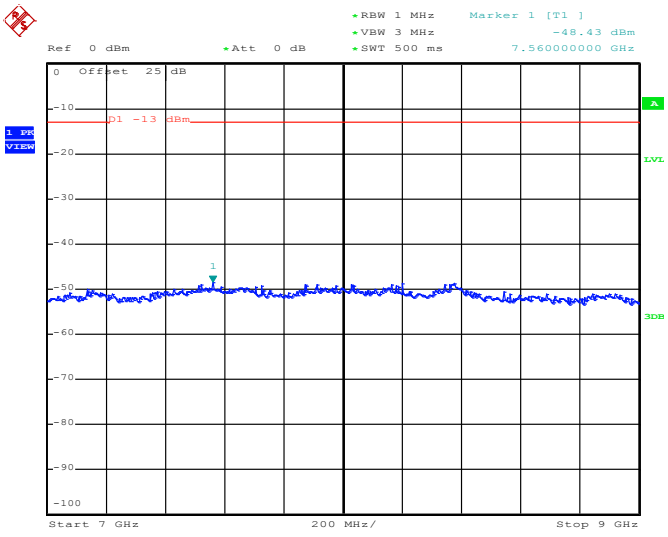

Date: 29.MAY.2014 09:48:24

Band :	GSM850	Channel :	CH251
Test Mode :	GSM Link (GMSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

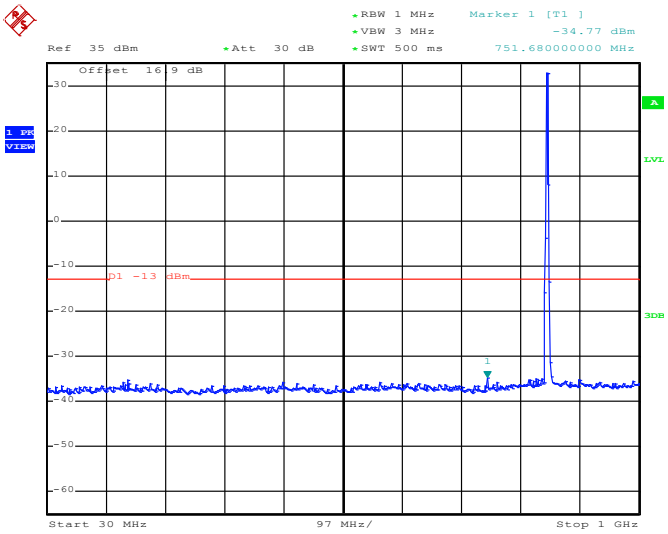

Date: 29.MAY.2014 09:57:18

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

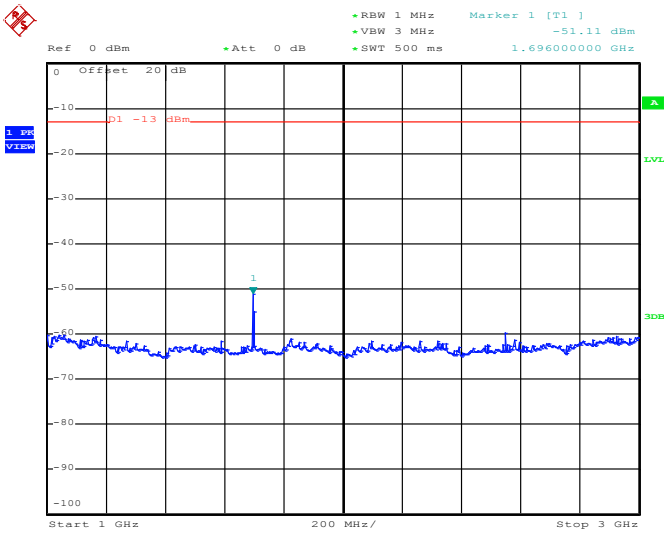

Date: 29.MAY.2014 09:57:28

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

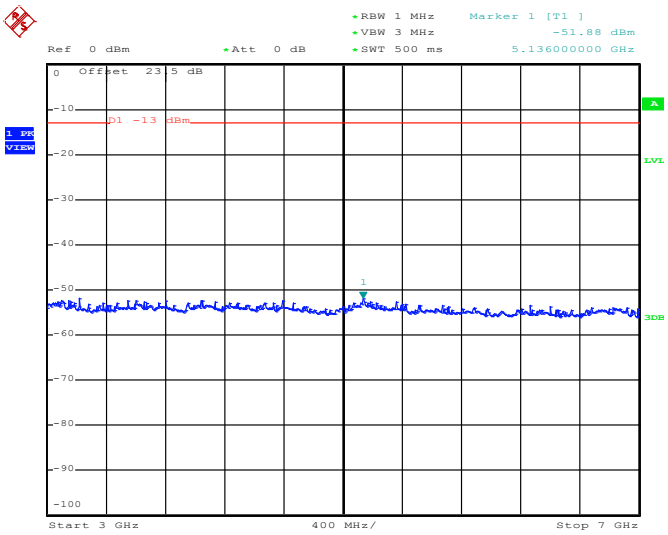

Date: 29.MAY.2014 09:57:37

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

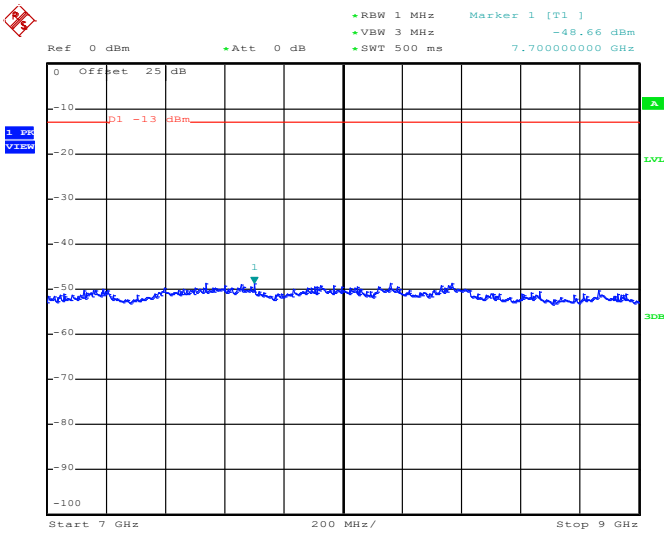

Date: 29.MAY.2014 09:57:45

Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

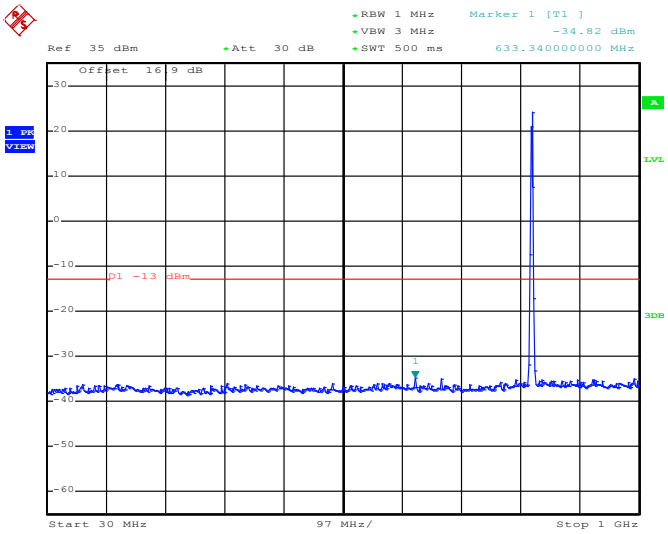

Date: 29.MAY.2014 10:39:02

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

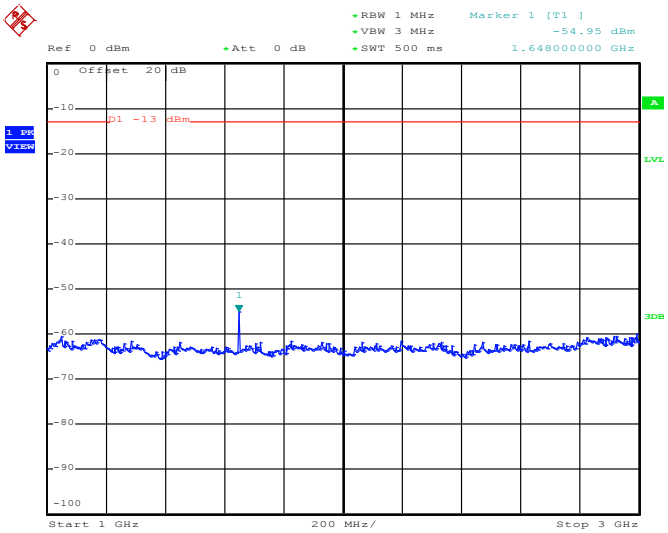

Date: 29.MAY.2014 10:39:13

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

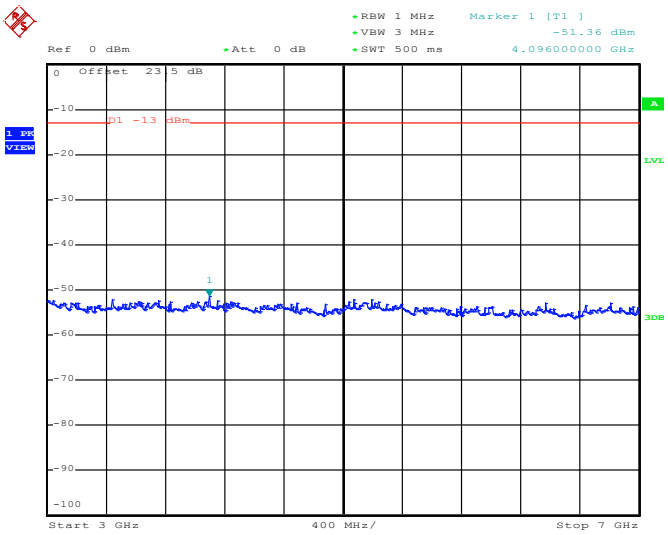

Date: 29.MAY.2014 10:39:22

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

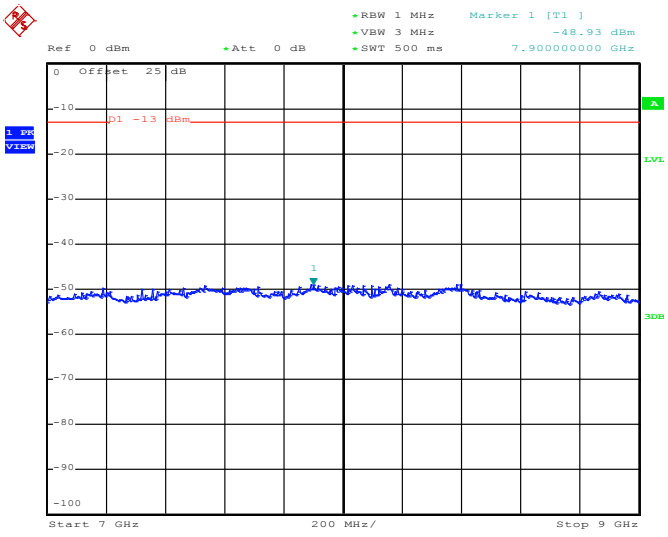

Date: 29.MAY.2014 10:39:30

Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

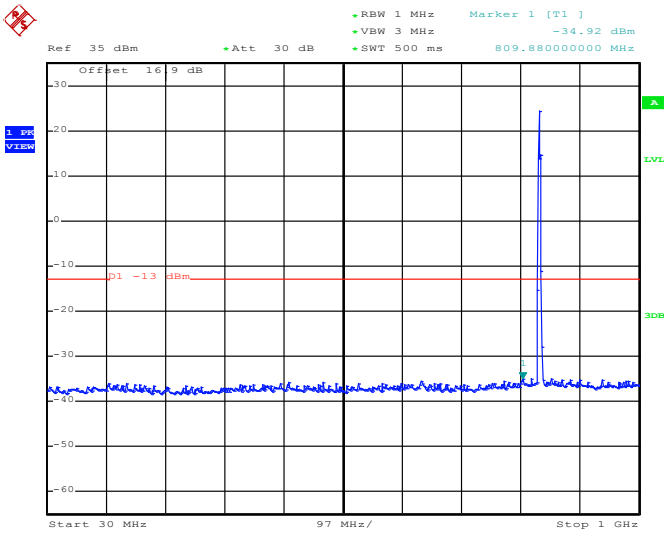

Date: 29.MAY.2014 10:37:50

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

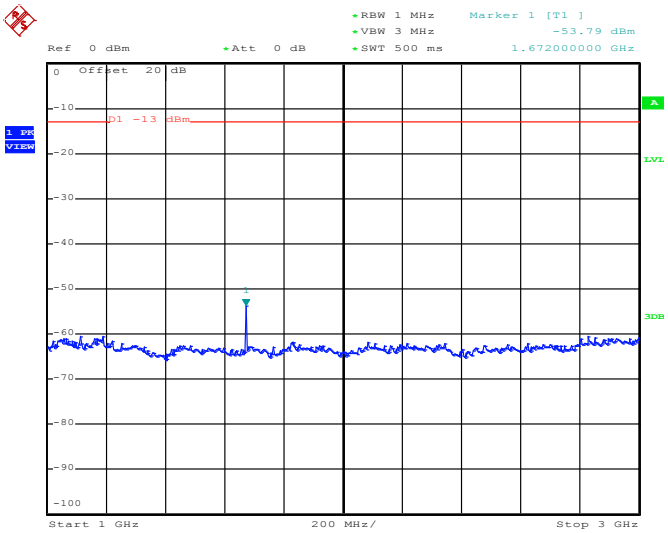

Date: 29.MAY.2014 10:38:01

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

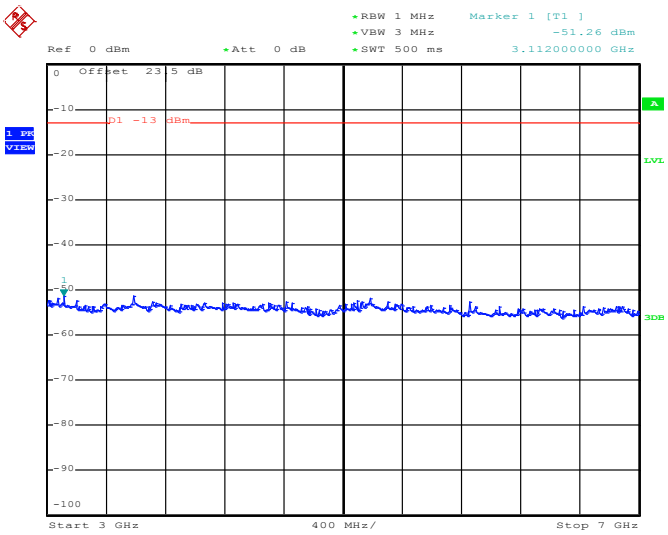

Date: 29.MAY.2014 10:38:10

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

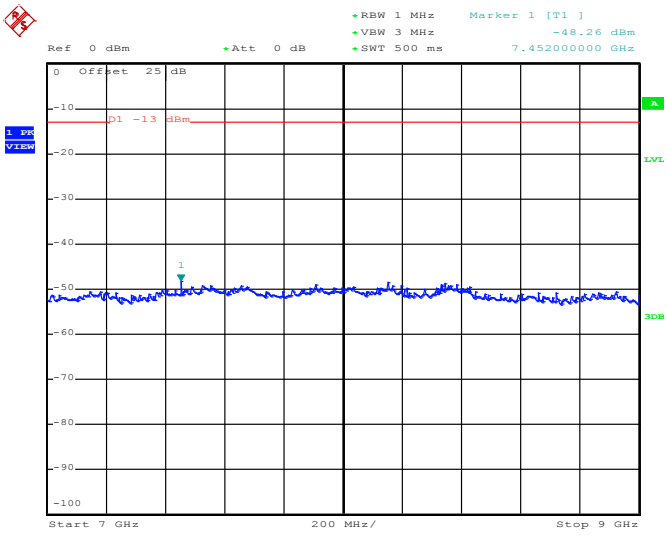

Date: 29.MAY.2014 10:38:18

Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

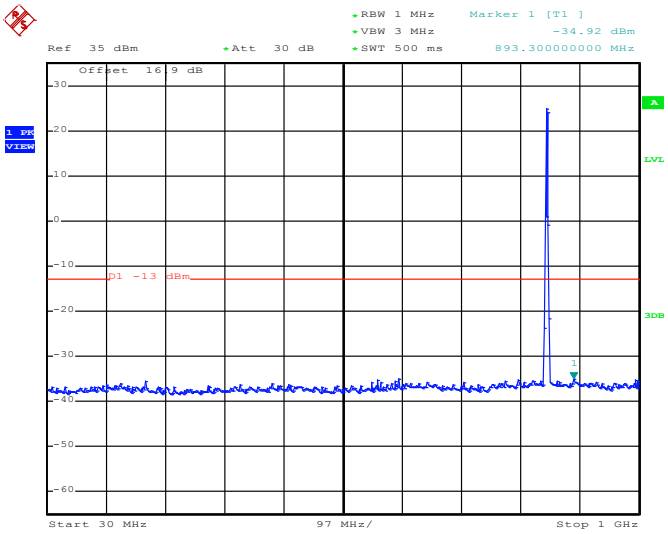

Date: 29.MAY.2014 10:40:46

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

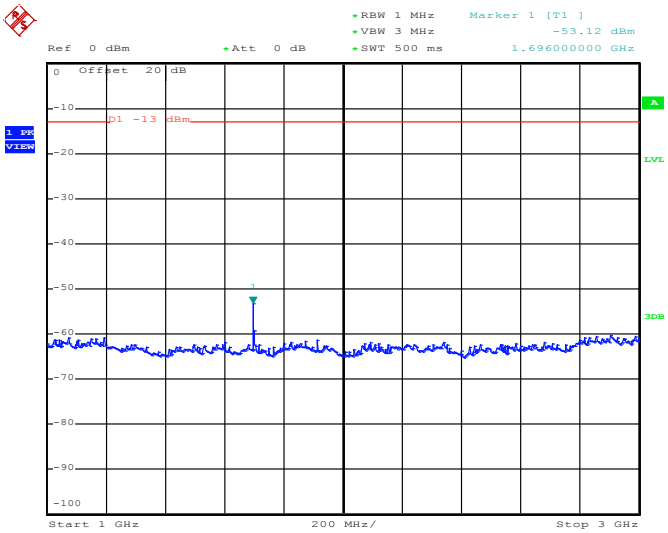

Date: 29.MAY.2014 10:40:56

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

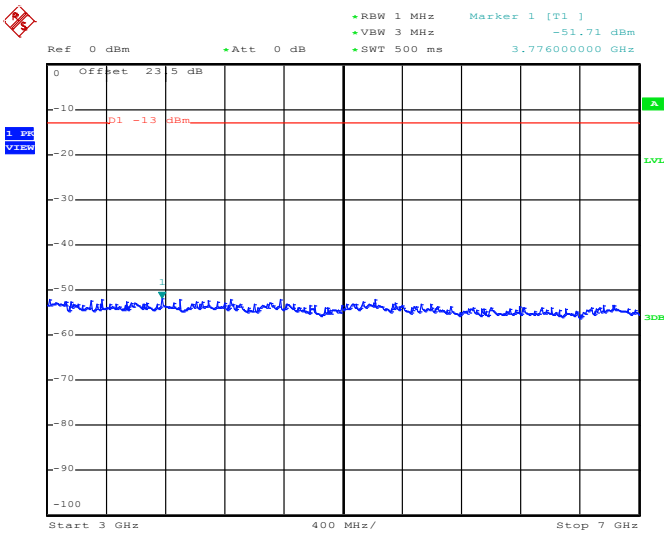

Date: 29.MAY.2014 10:41:05

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

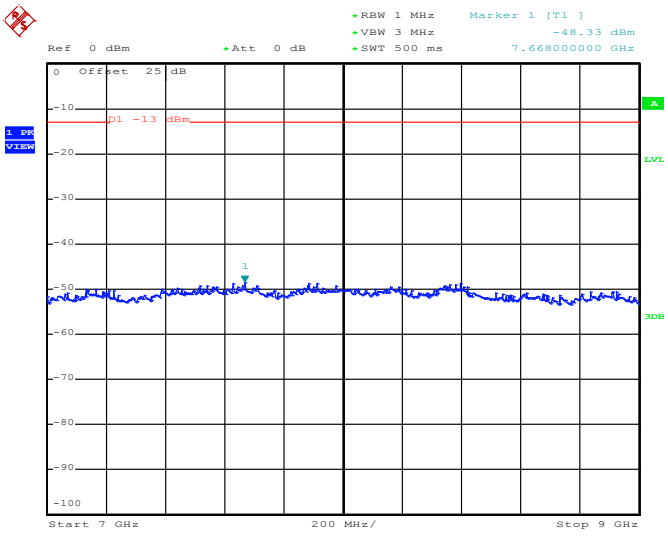

Date: 29.MAY.2014 10:41:13

Band :	GSM1900	Channel :	CH512
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

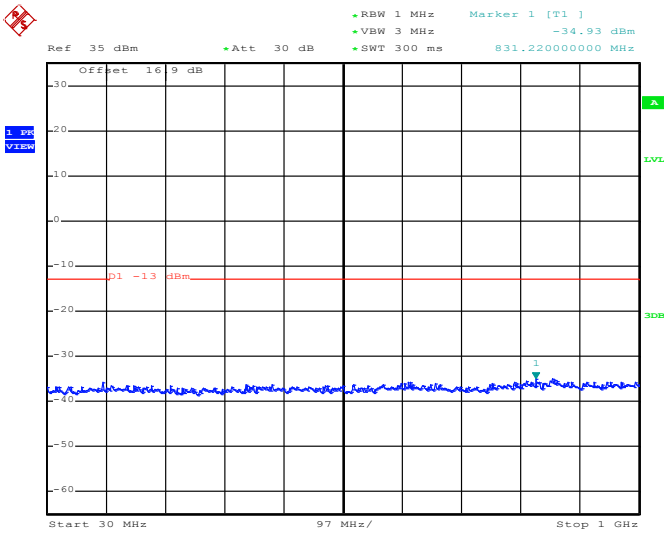

Date: 29.MAY.2014 12:00:37

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

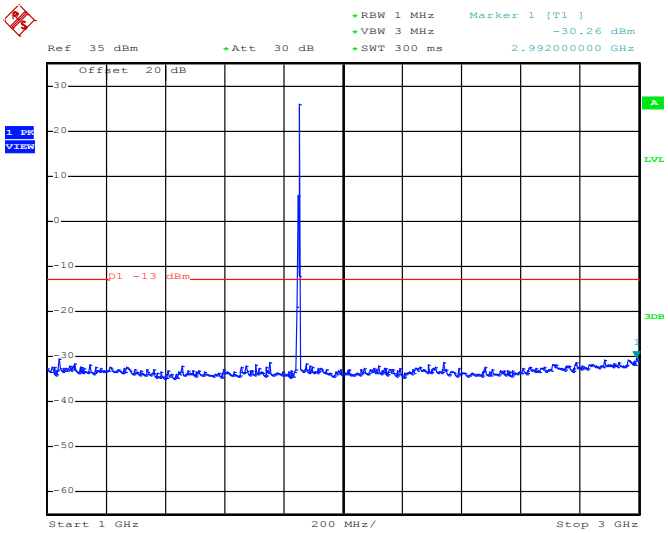

Date: 29.MAY.2014 12:00:46

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

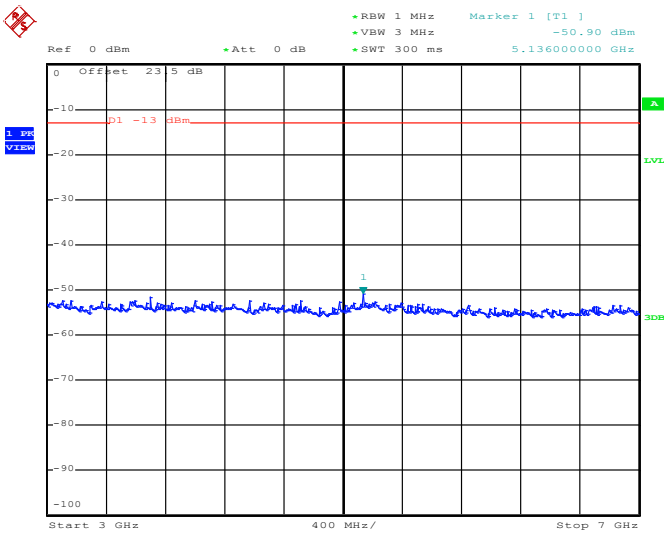

Date: 29.MAY.2014 12:00:56

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

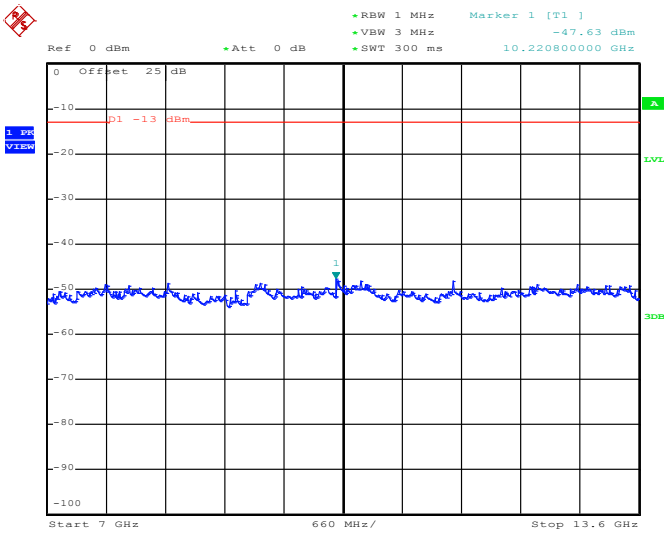

Date: 29.MAY.2014 12:01:05

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

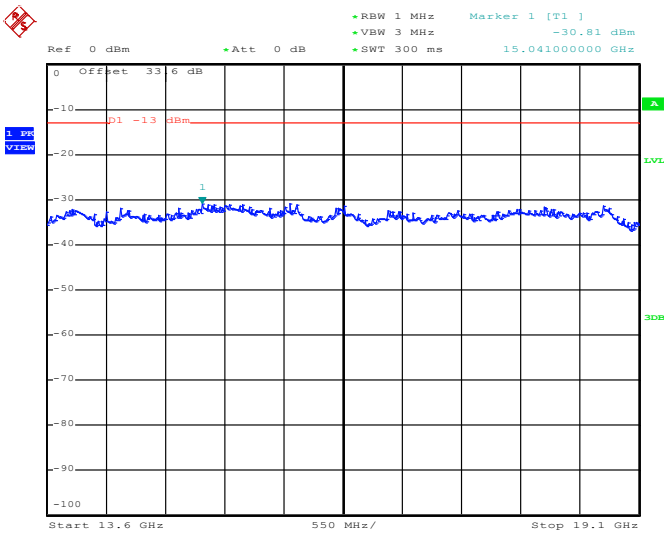

Date: 29.MAY.2014 12:01:13

Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

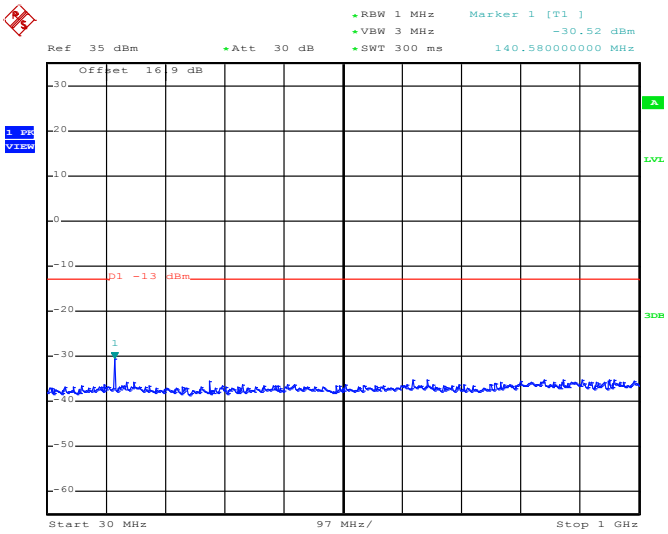

Date: 29.MAY.2014 11:58:31

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

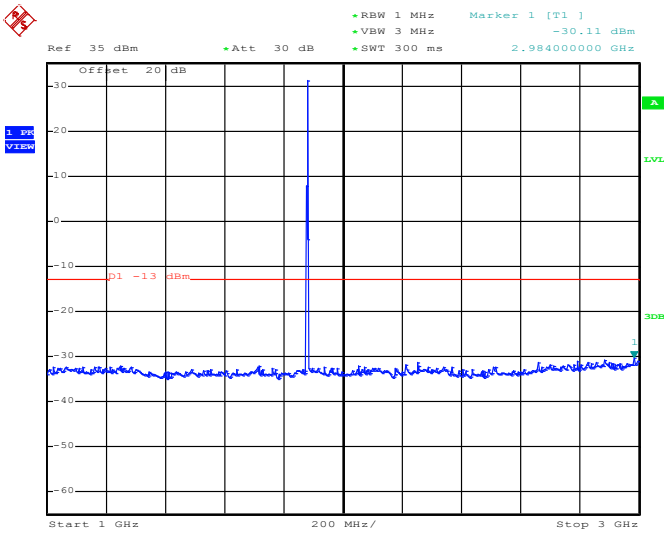

Date: 29.MAY.2014 11:58:39

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

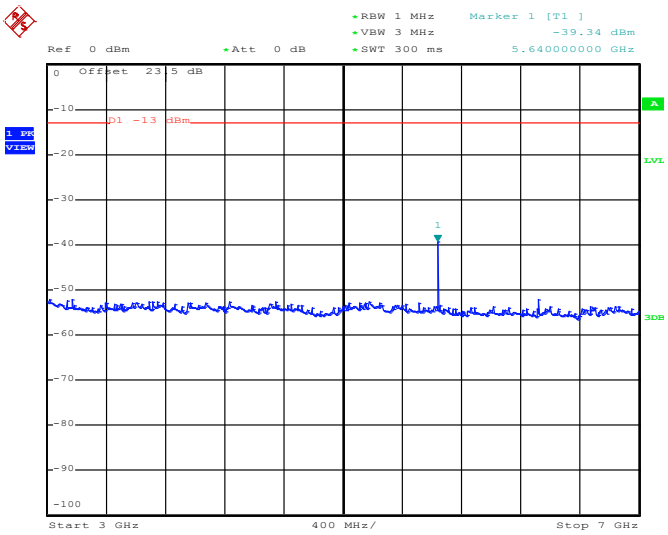

Date: 29.MAY.2014 11:58:50

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

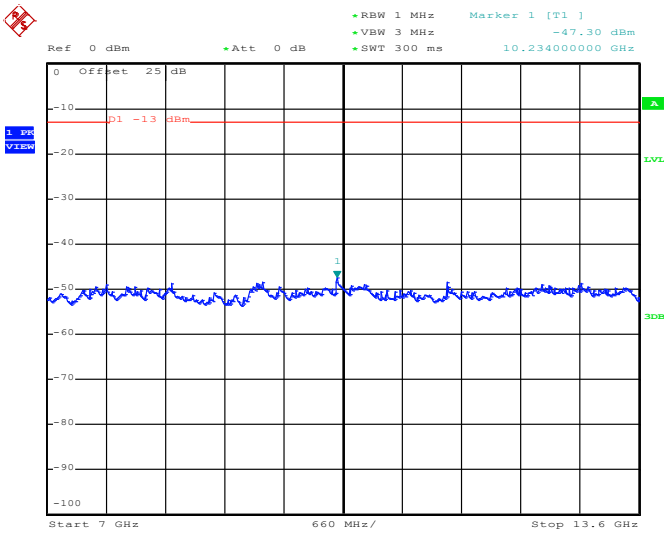

Date: 29.MAY.2014 11:58:58

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

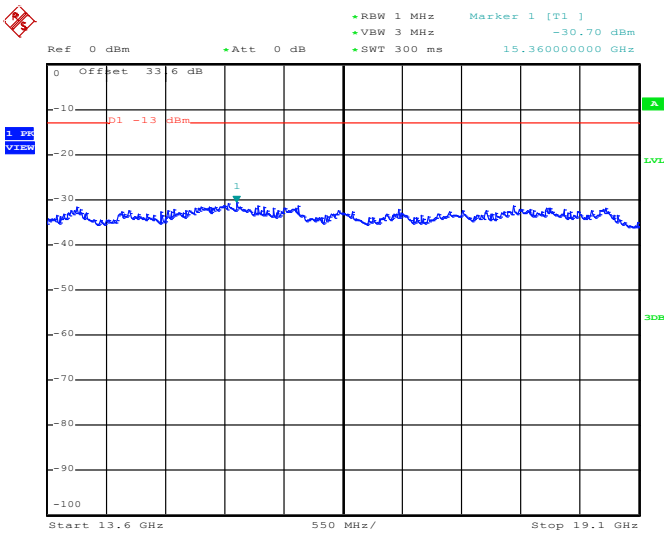

Date: 29.MAY.2014 11:59:07

Band :	GSM1900	Channel :	CH810
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

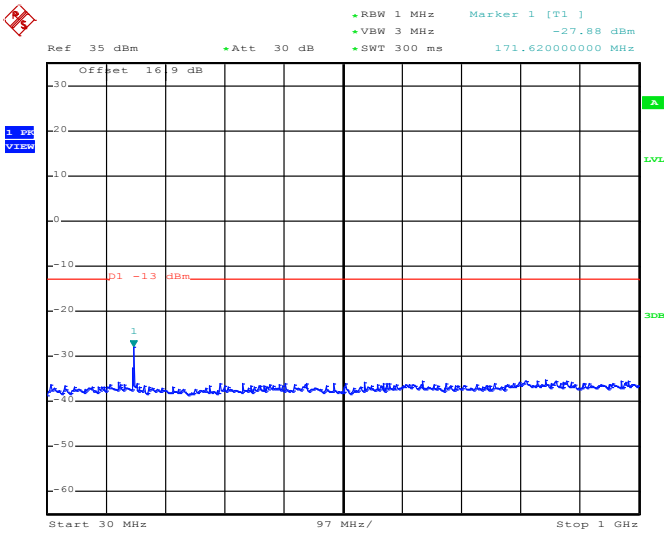

Date: 29.MAY.2014 12:51:18

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

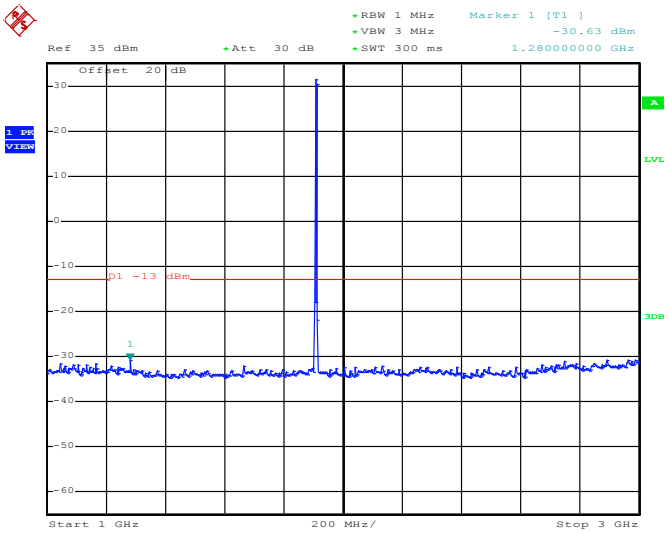

Date: 29.MAY.2014 12:51:26

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

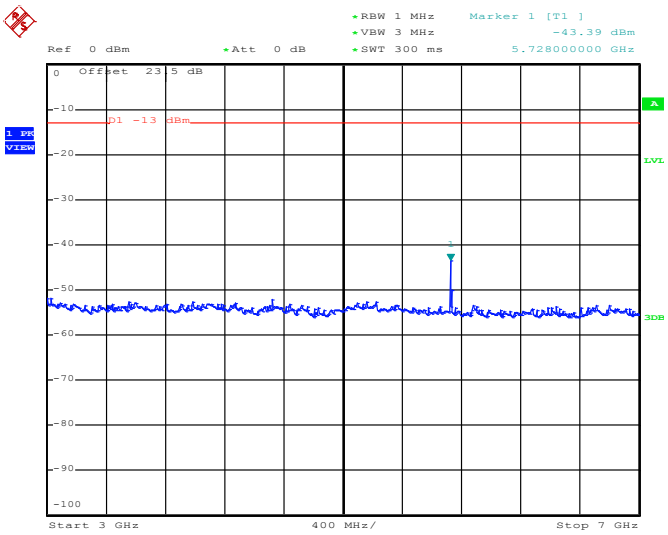

Date: 29.MAY.2014 12:51:38

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

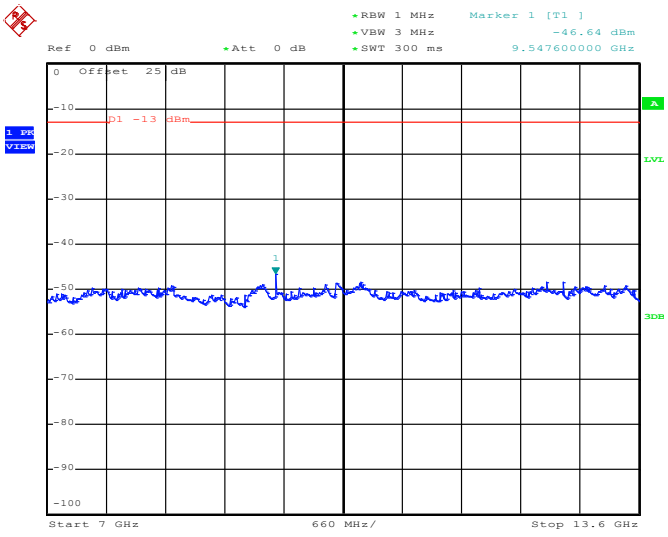

Date: 29.MAY.2014 12:51:46

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

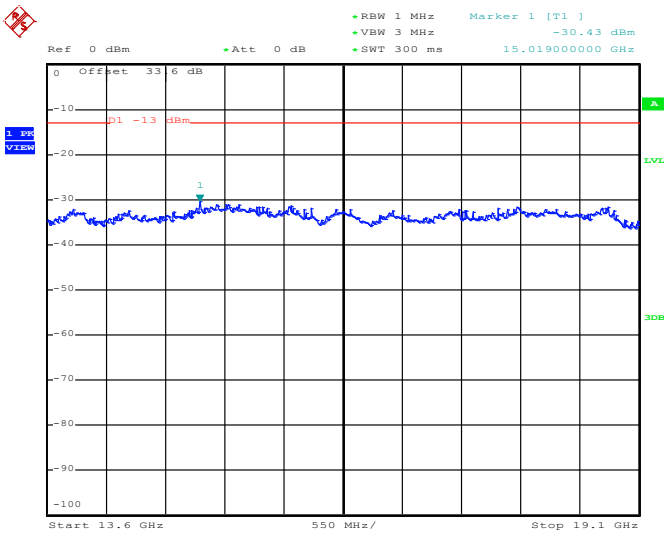

Date: 29.MAY.2014 12:51:55

Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

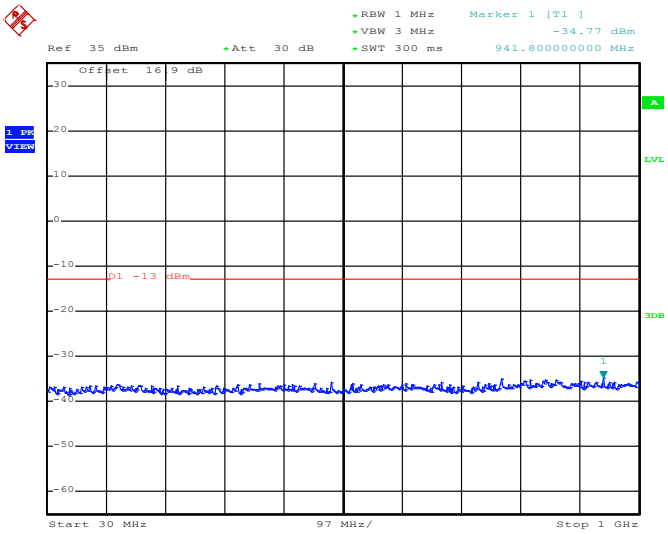

Date: 29.MAY.2014 13:54:06

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

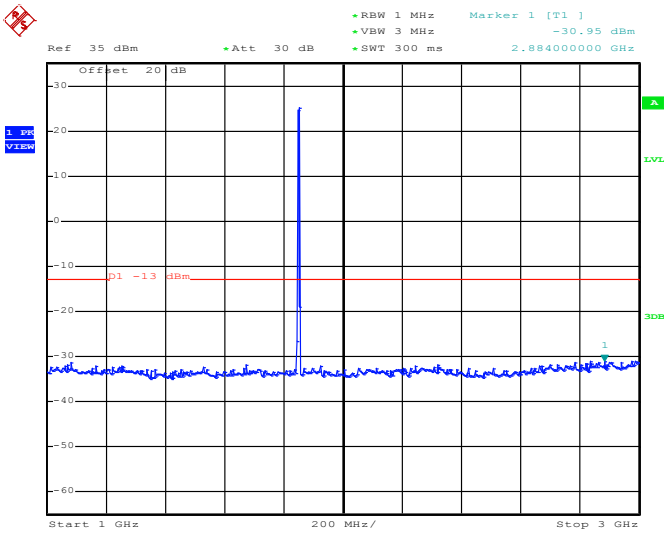

Date: 29.MAY.2014 13:54:14

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

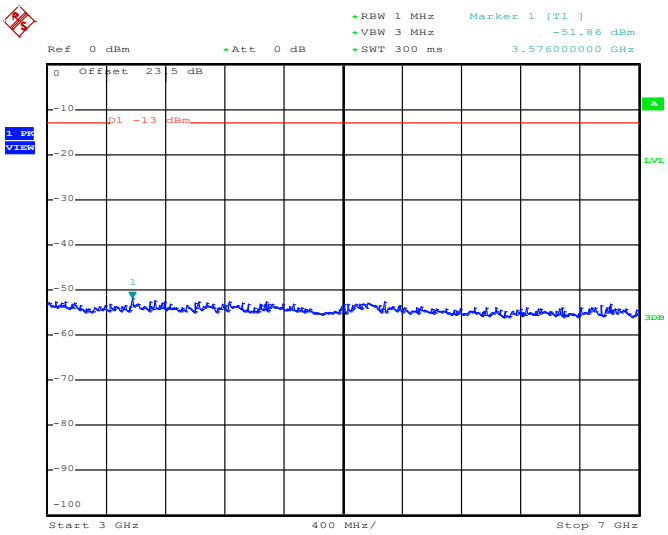

Date: 29.MAY.2014 13:54:26

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

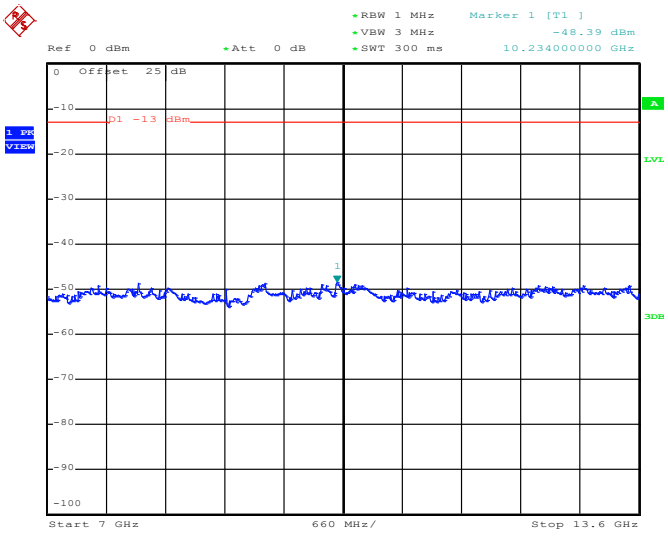

Date: 29.MAY.2014 13:54:34

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

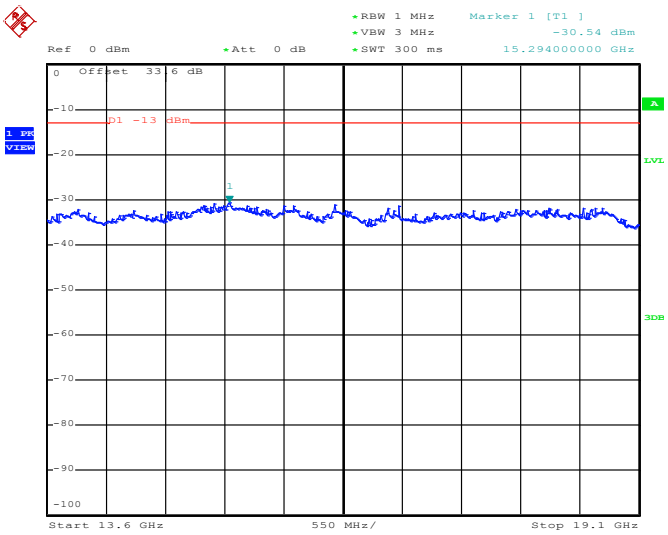

Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

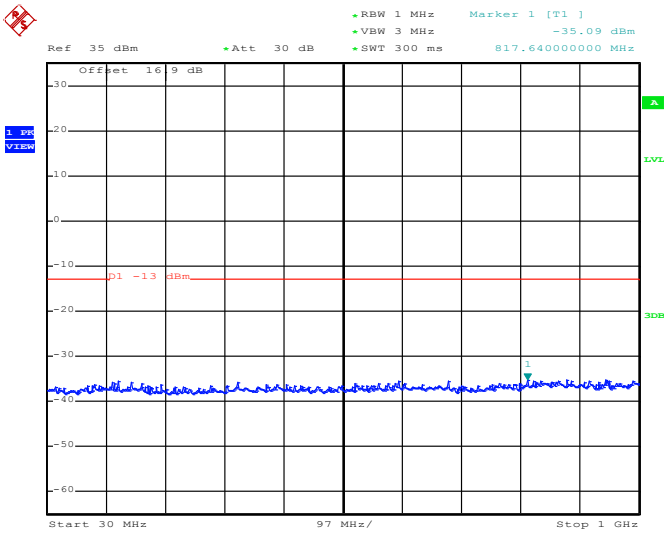

Date: 29.MAY.2014 13:52:51

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

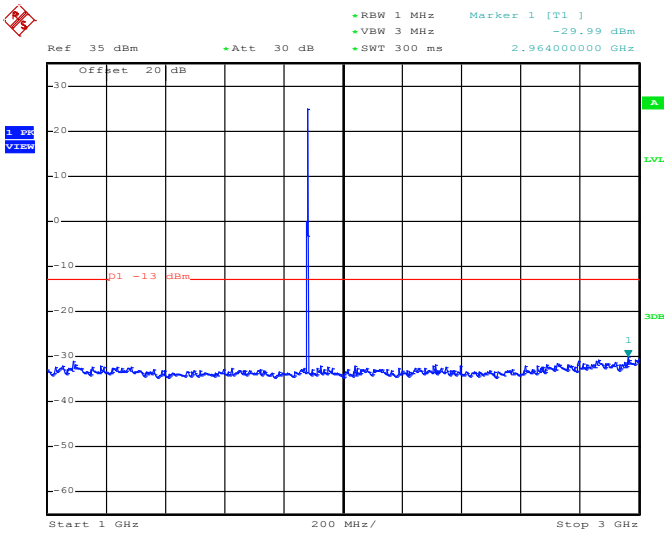

Date: 29.MAY.2014 13:52:59

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

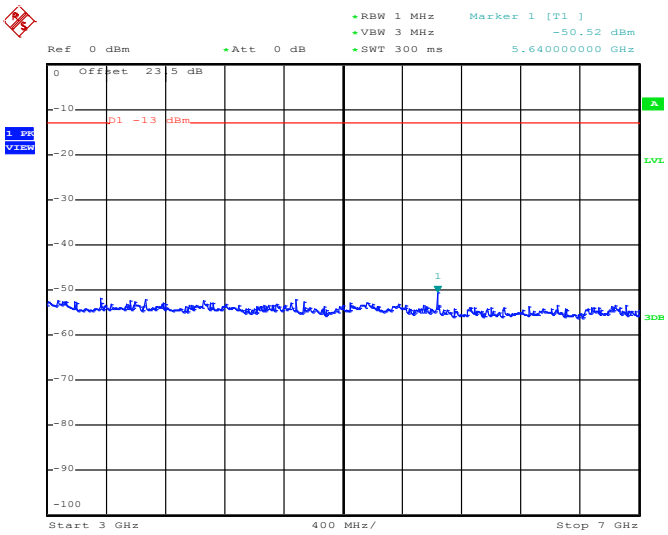

Date: 29.MAY.2014 13:53:10

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

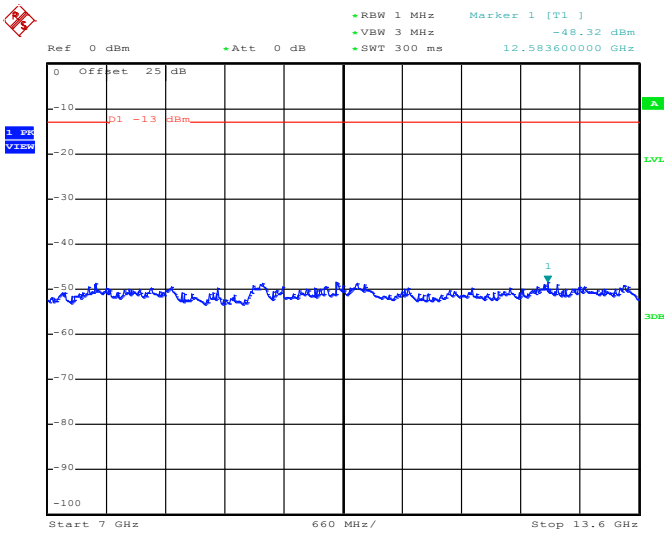

Date: 29.MAY.2014 13:53:18

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

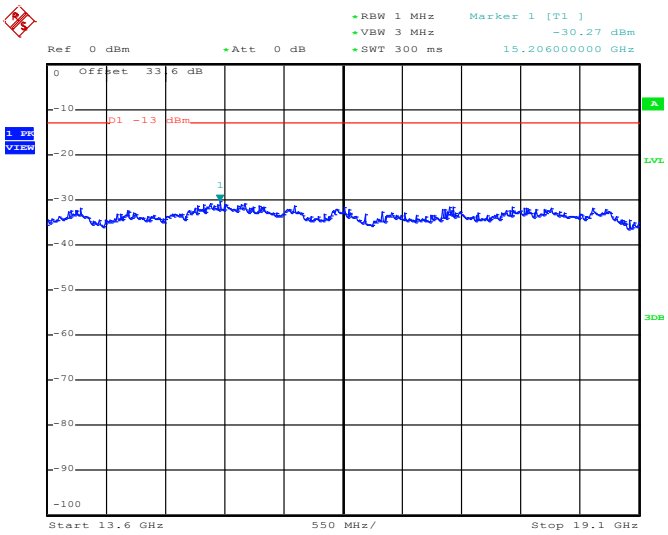

Date: 29.MAY.2014 13:53:26

Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

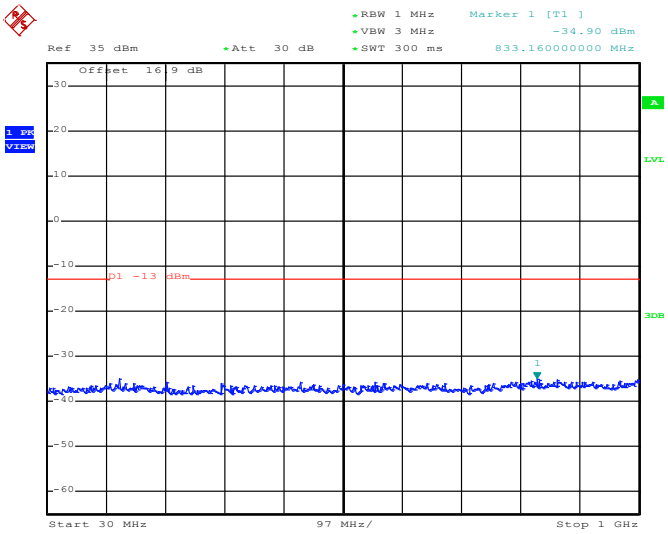

Date: 29.MAY.2014 13:55:50

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

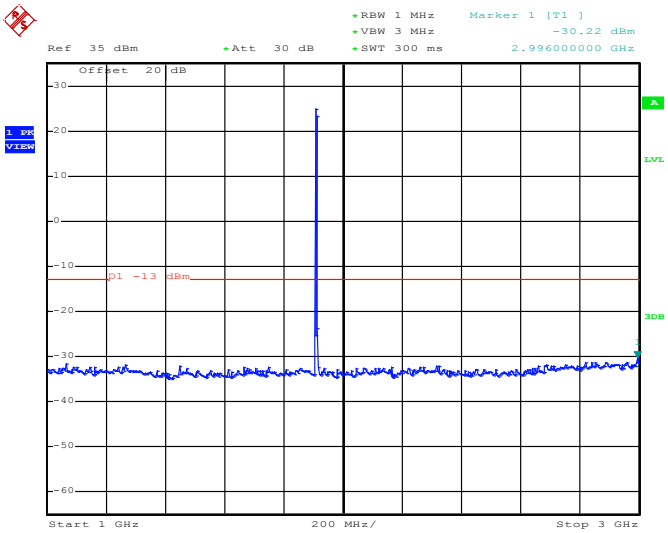

Date: 29.MAY.2014 13:55:58

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

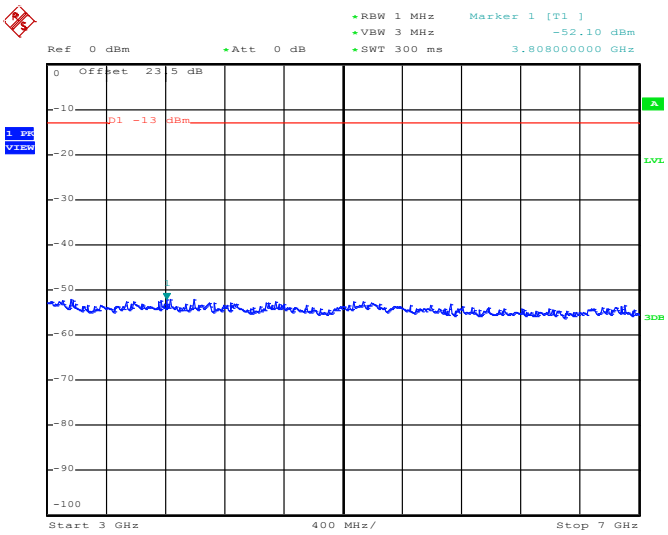

Date: 29.MAY.2014 13:56:09

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

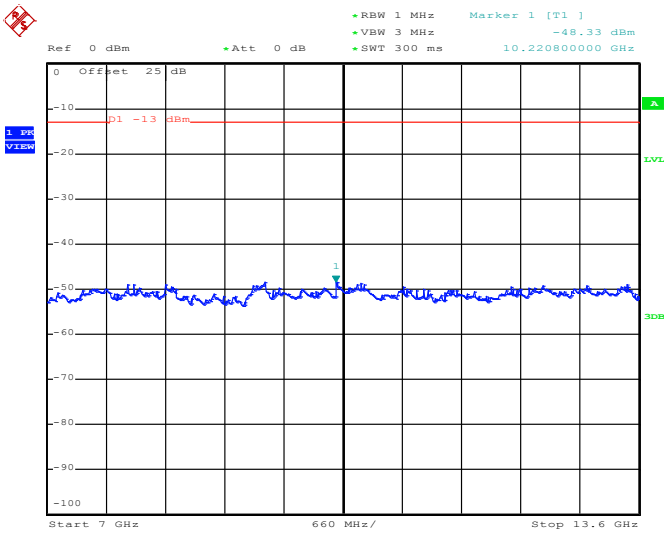

Date: 29.MAY.2014 13:56:17

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

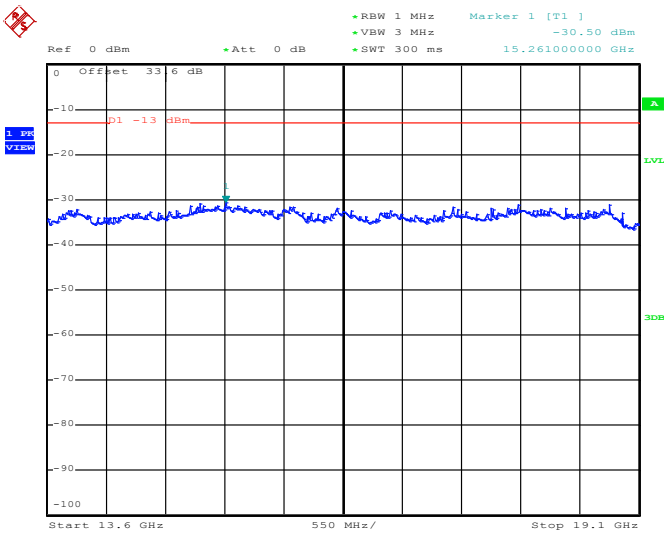

Date: 29.MAY.2014 13:56:25

Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

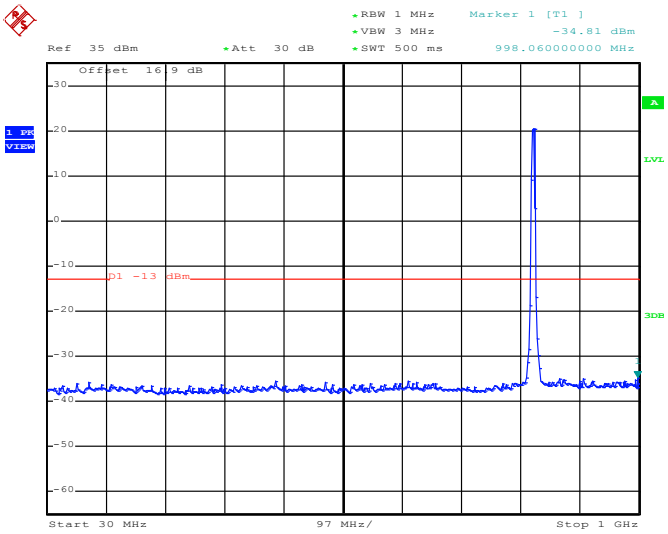

Date: 29.MAY.2014 15:18:26

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

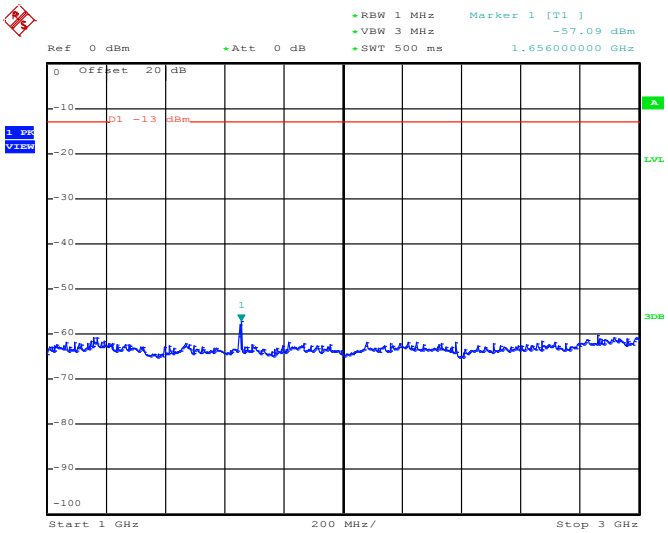

Date: 29.MAY.2014 15:18:37

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

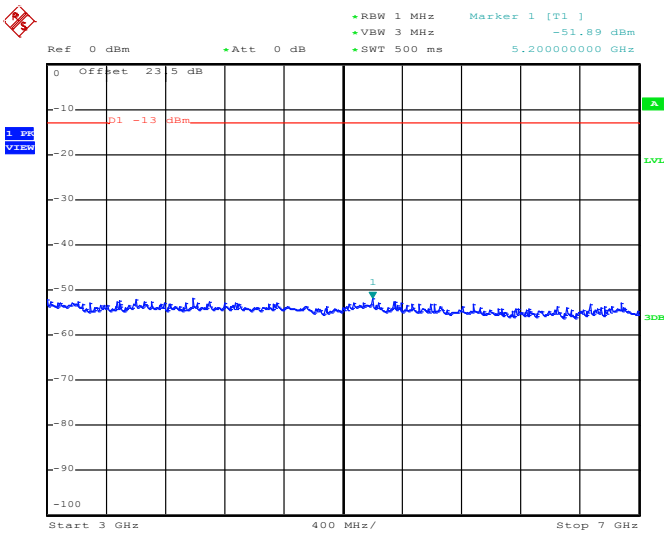

Date: 29.MAY.2014 15:18:45

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

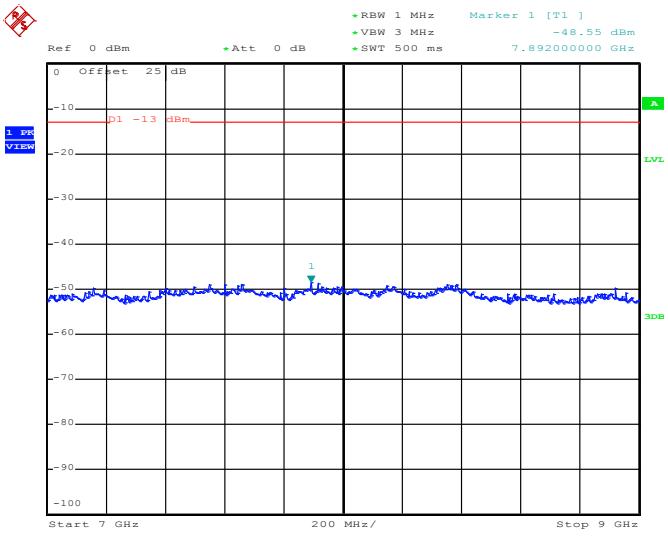

Date: 29.MAY.2014 15:18:53

Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

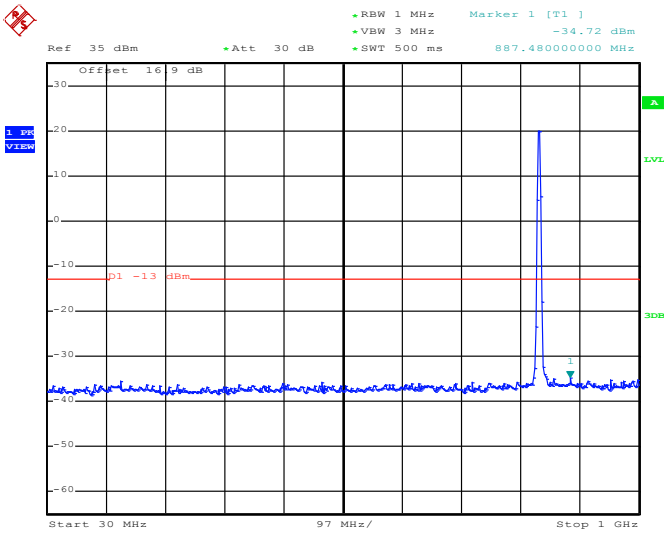

Date: 29.MAY.2014 15:14:55

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

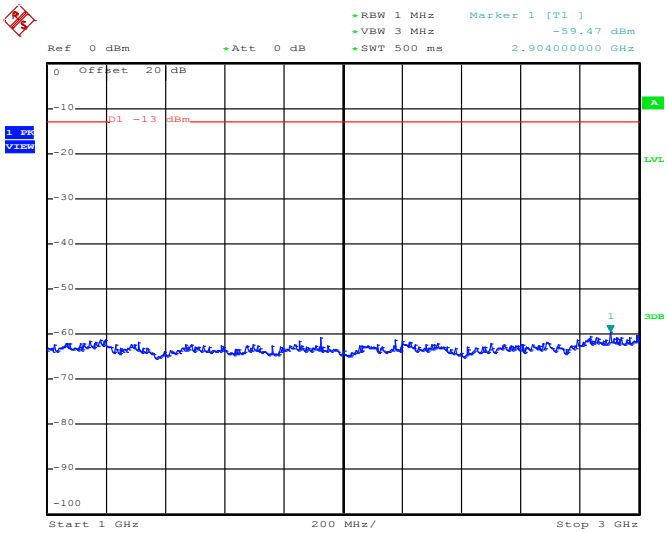

Date: 29.MAY.2014 15:15:05

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

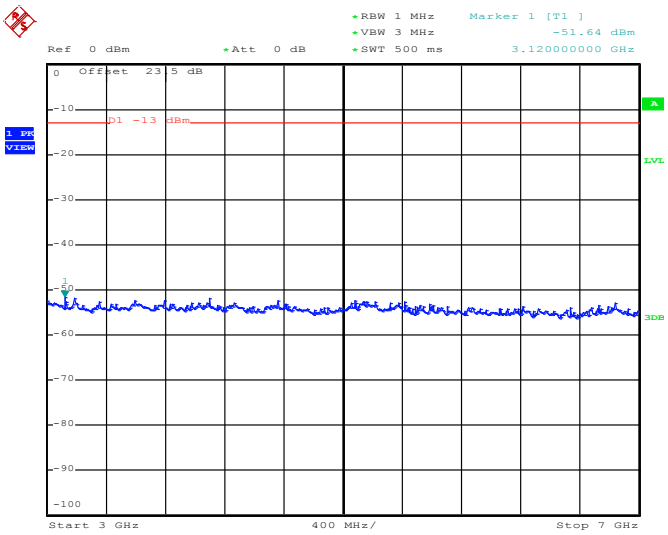

Date: 29.MAY.2014 15:15:14

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

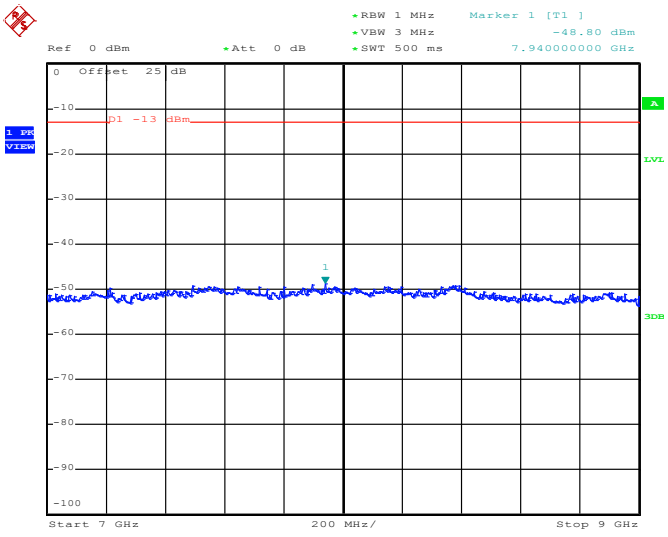

Date: 29.MAY.2014 15:15:22

Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

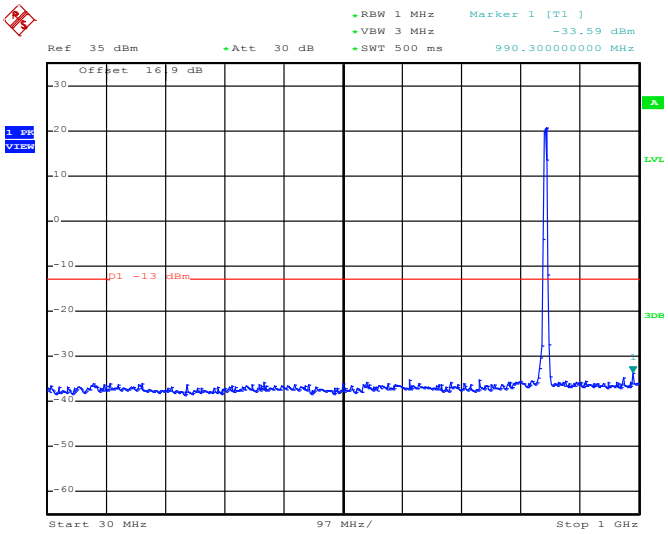

Date: 29.MAY.2014 15:17:04

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

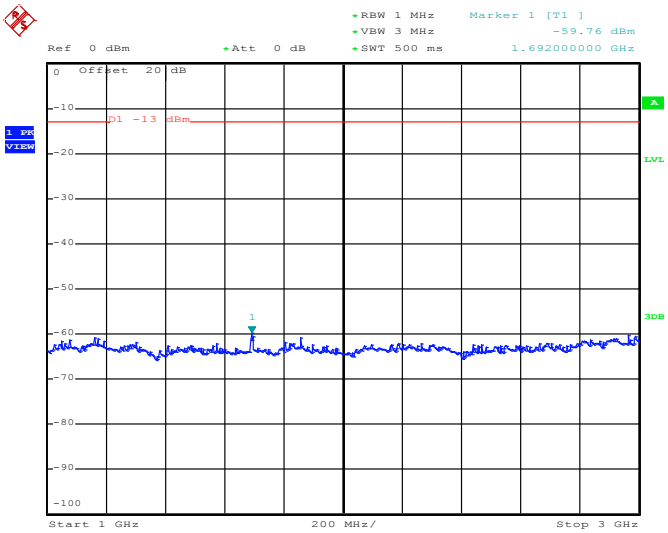

Date: 29.MAY.2014 15:17:14

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

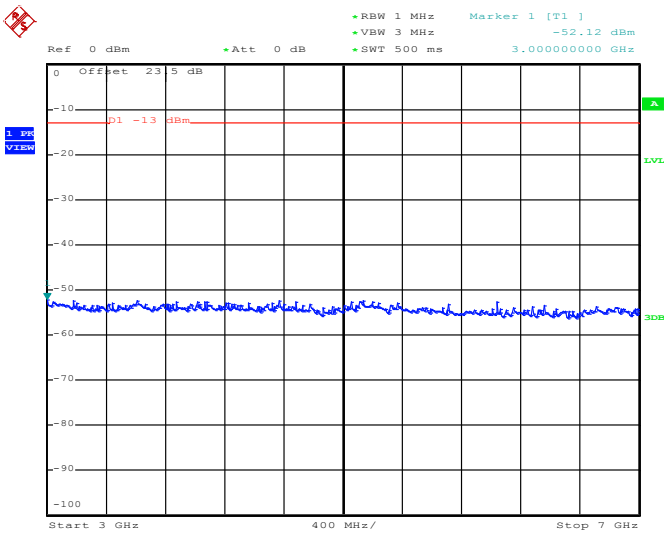

Date: 29.MAY.2014 15:17:23

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

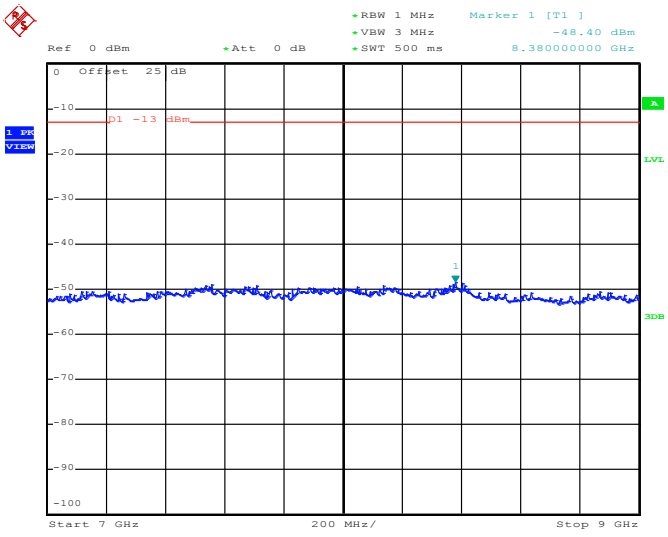

Date: 29.MAY.2014 15:17:31

Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

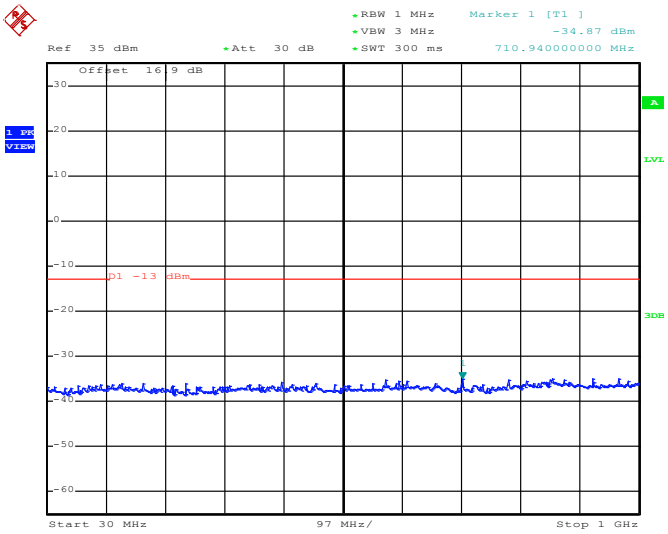

Date: 29.MAY.2014 14:34:04

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

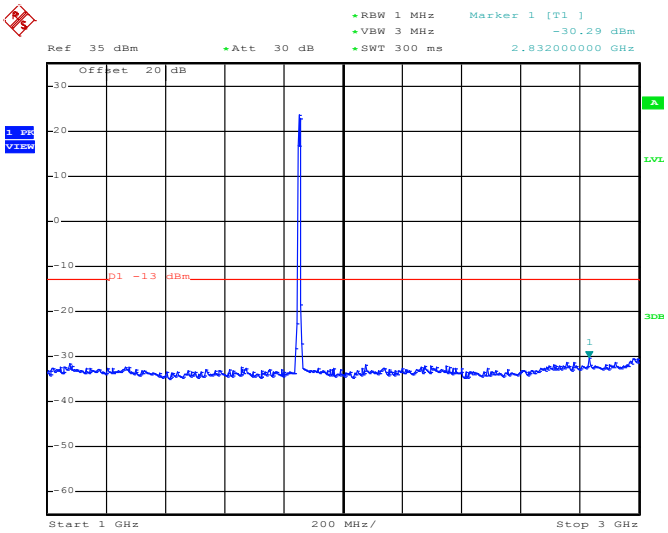

Date: 29.MAY.2014 14:34:12

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

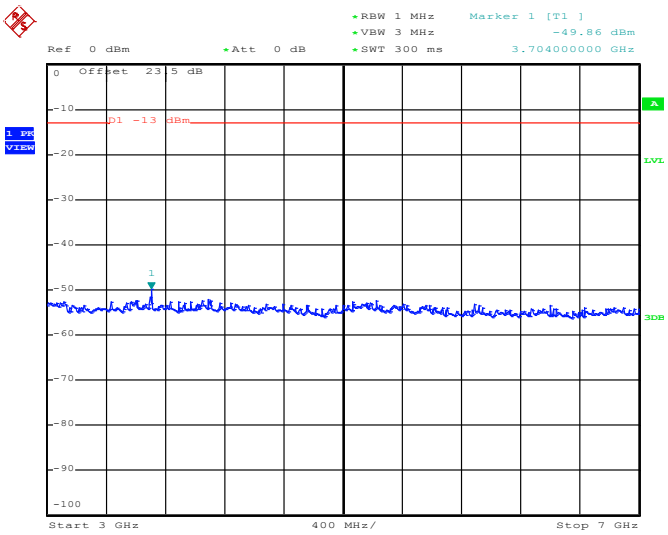

Date: 29.MAY.2014 14:34:23

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

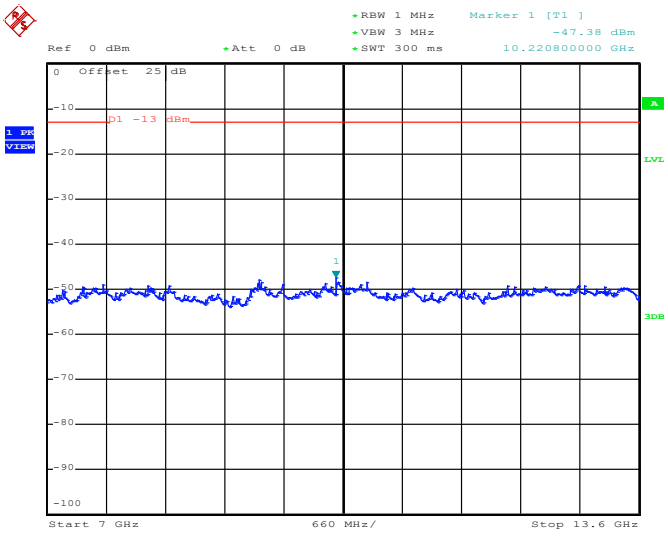

Date: 29.MAY.2014 14:34:31

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

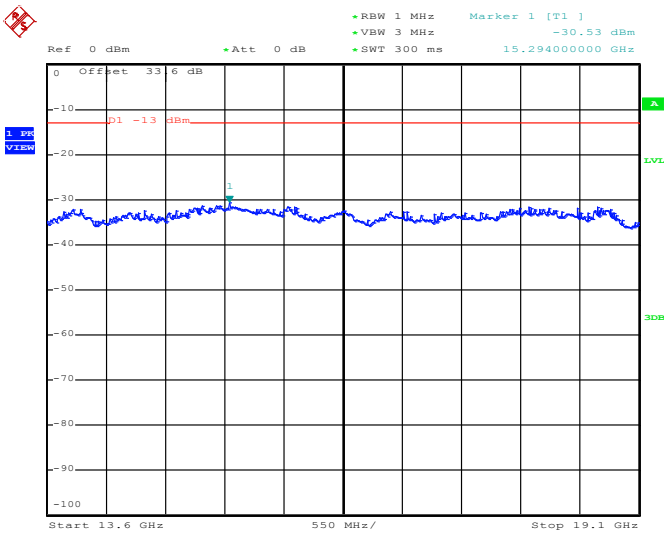

Date: 29.MAY.2014 14:34:40

Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

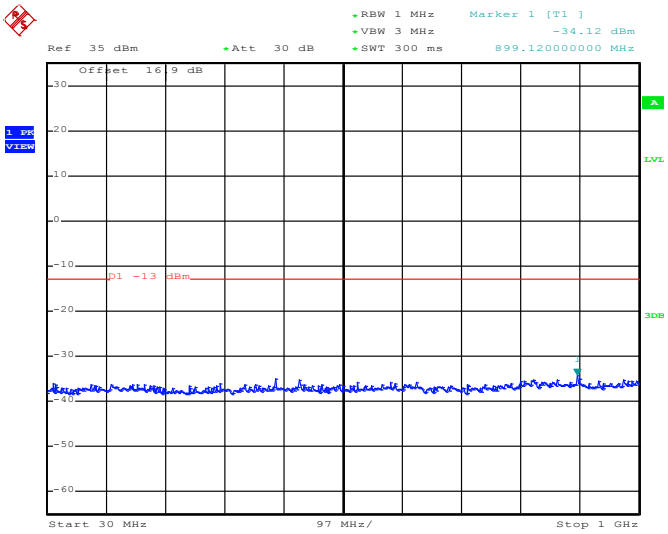

Date: 29.MAY.2014 14:32:46

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

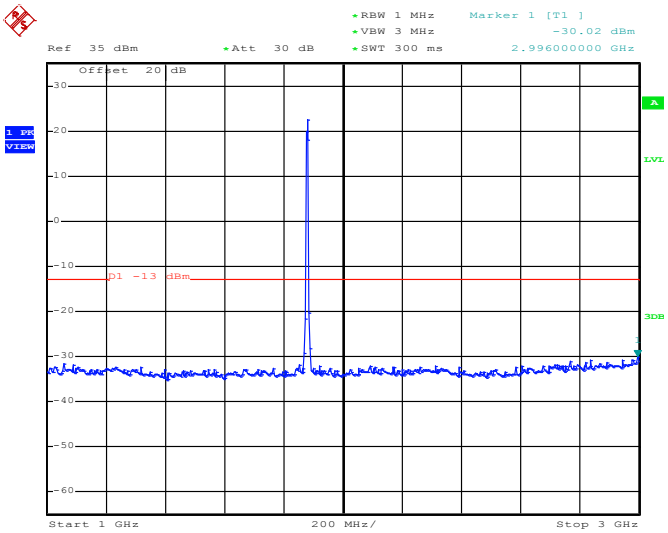

Date: 29.MAY.2014 14:32:54

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

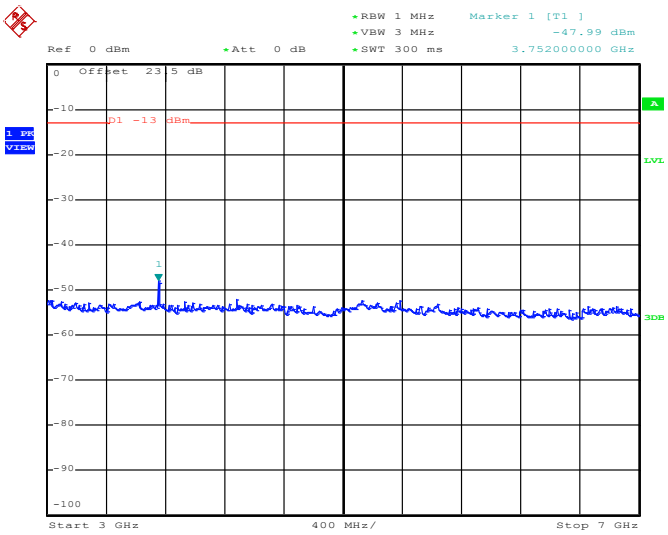

Date: 29.MAY.2014 14:33:06

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

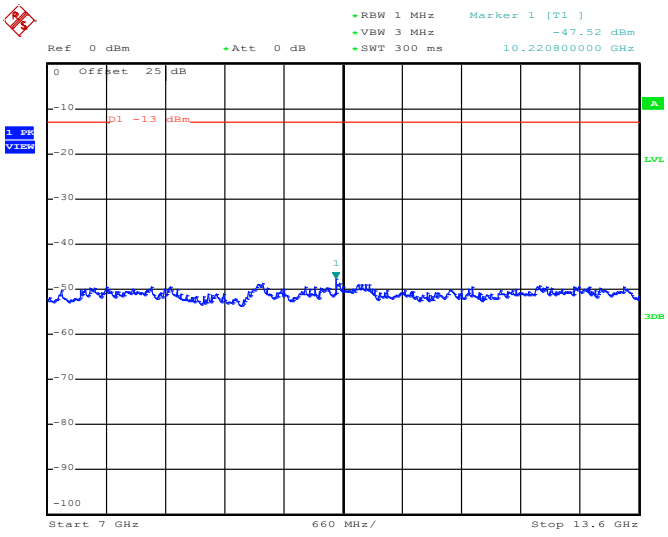

Date: 29.MAY.2014 14:33:14

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

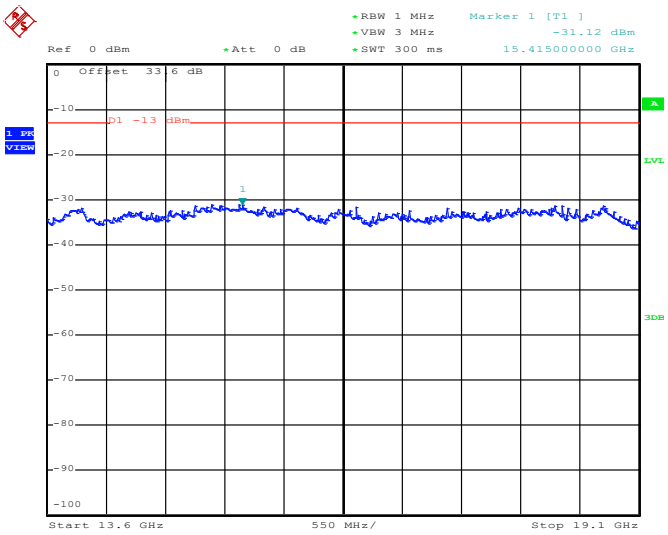

Date: 29.MAY.2014 14:33:23

Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

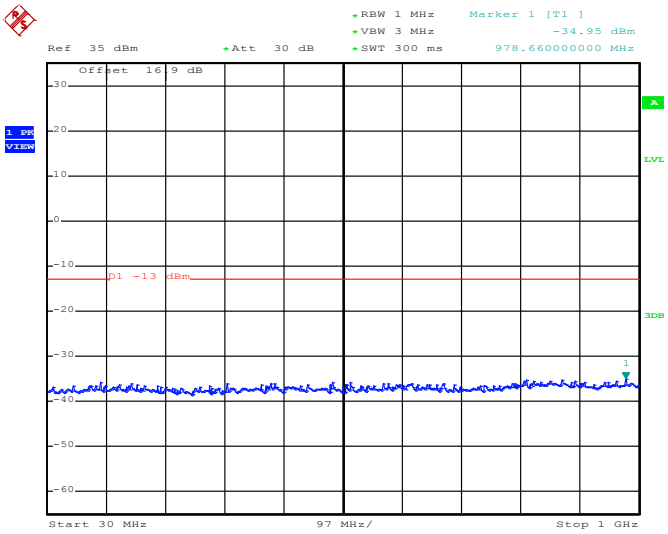

Date: 29.MAY.2014 14:35:49

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

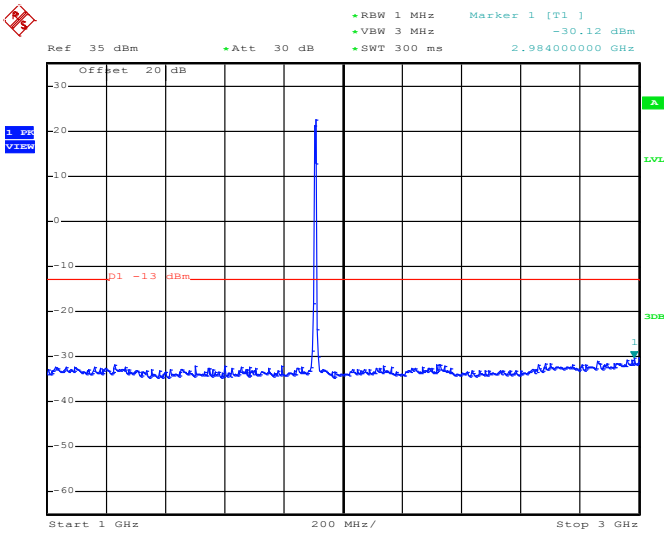

Date: 29.MAY.2014 14:35:57

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

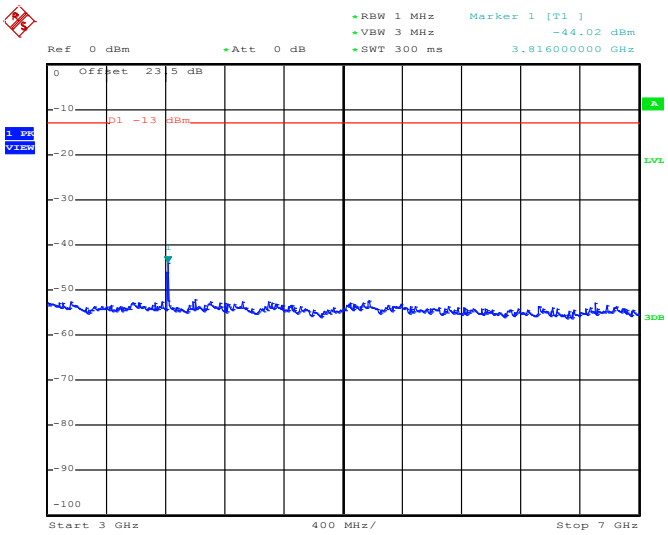

Date: 29.MAY.2014 14:36:10

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

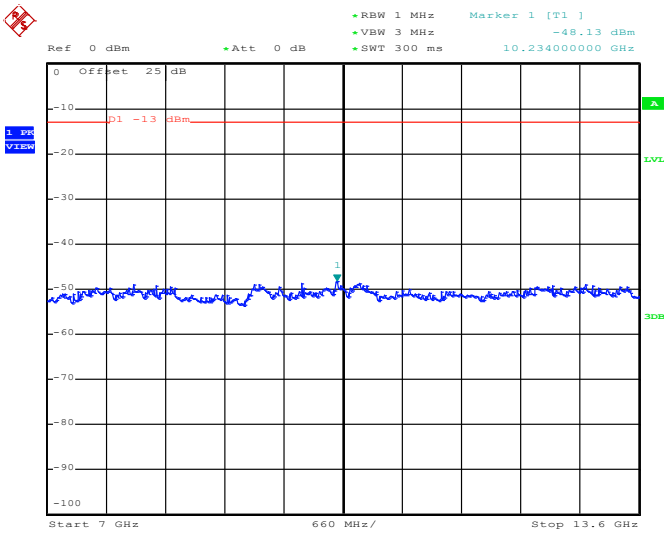

Date: 29.MAY.2014 14:36:18

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

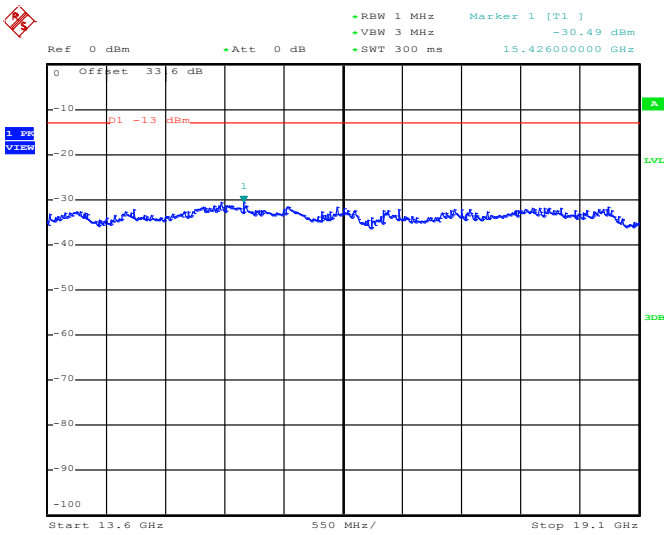

Band :	CDMA2000 BC0	Channel :	CH1013
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	824.7 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

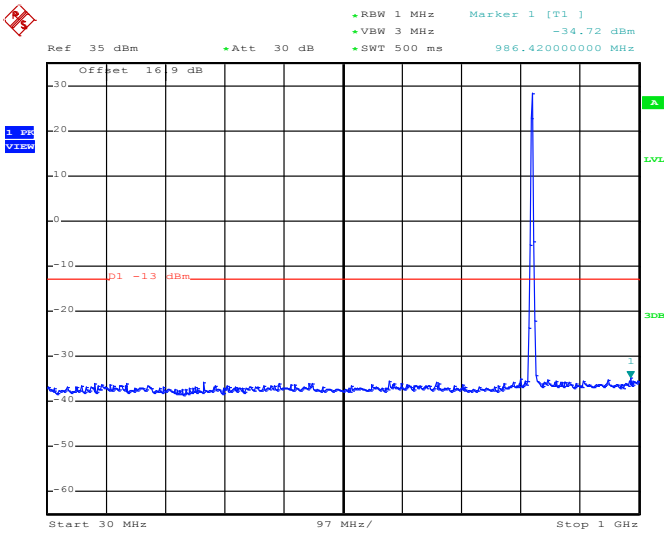

Date: 29.MAY.2014 17:55:10

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

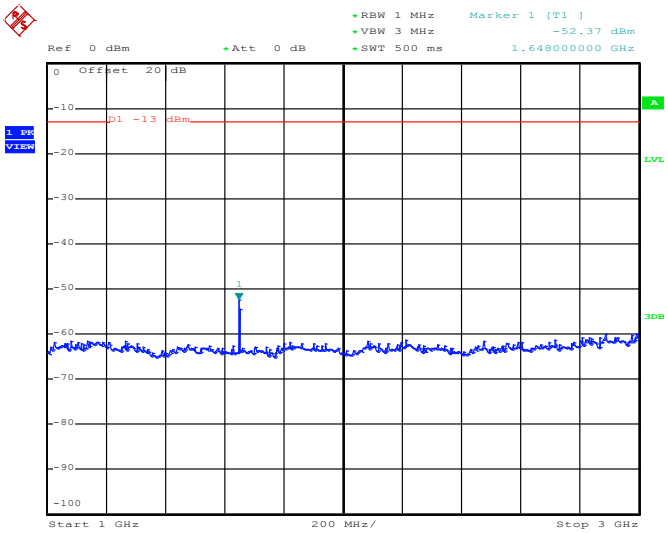

Date: 29.MAY.2014 17:57:10

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

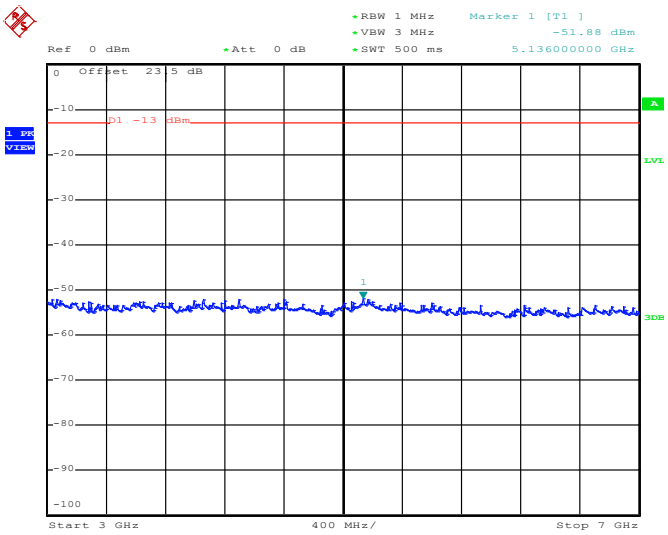

Date: 29.MAY.2014 17:57:18

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

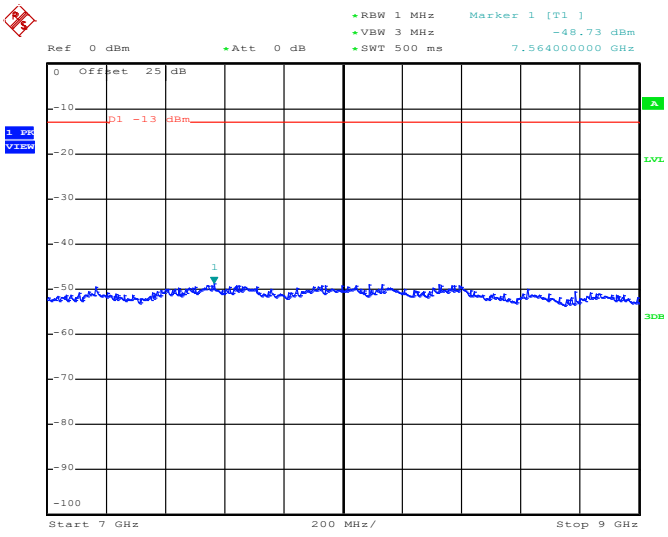

Date: 29.MAY.2014 17:57:27

Band :	CDMA2000 BC0	Channel :	CH384
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	836.52 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

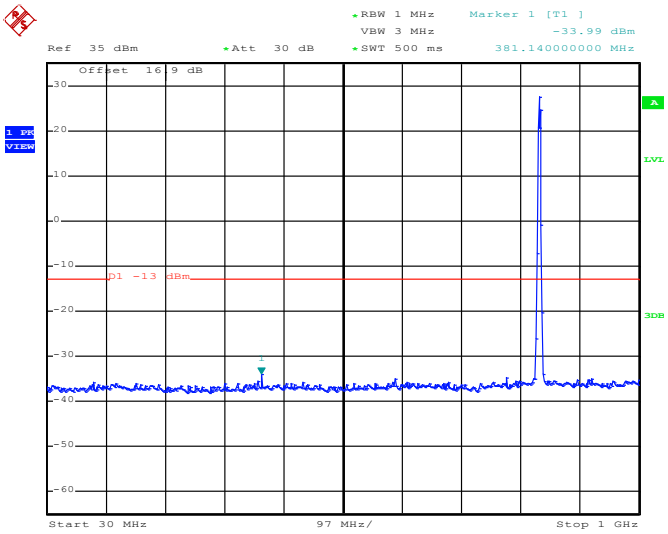

Date: 29.MAY.2014 17:52:19

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

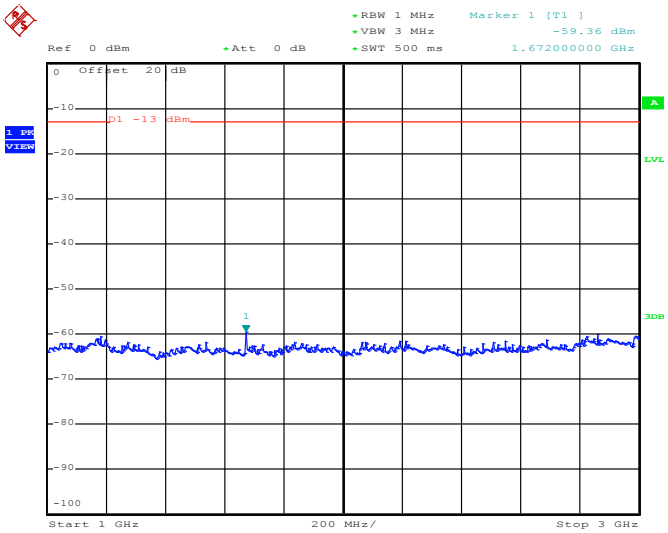

Date: 29.MAY.2014 17:53:02

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

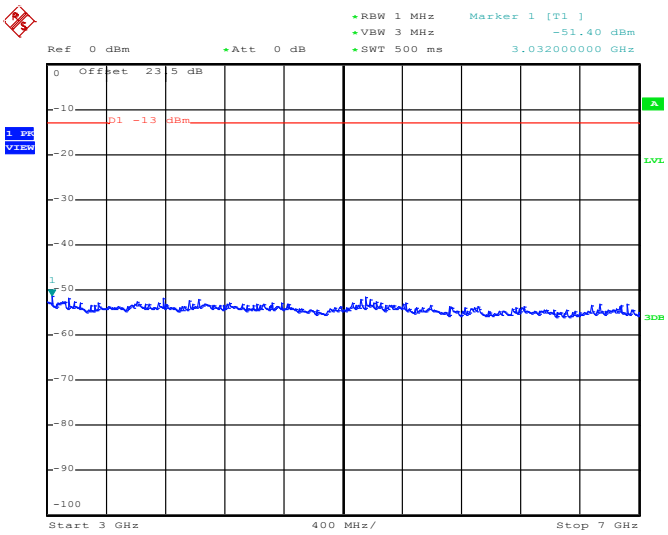

Date: 29.MAY.2014 17:53:10

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

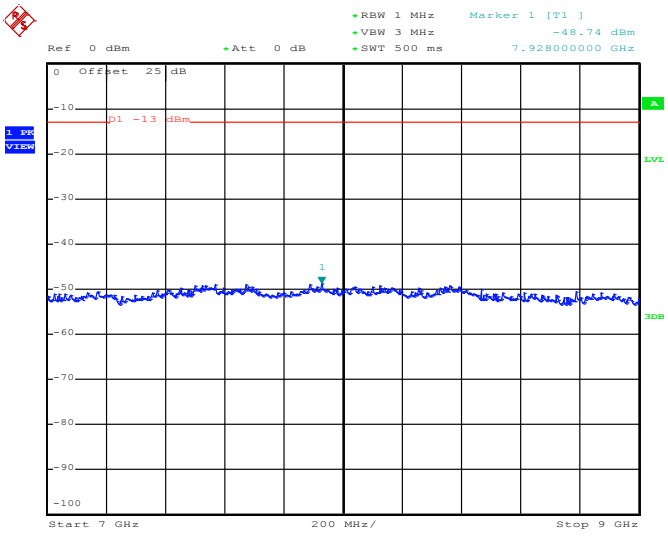

Date: 29.MAY.2014 17:53:19

Band :	CDMA2000 BC0	Channel :	CH777
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	848.31 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

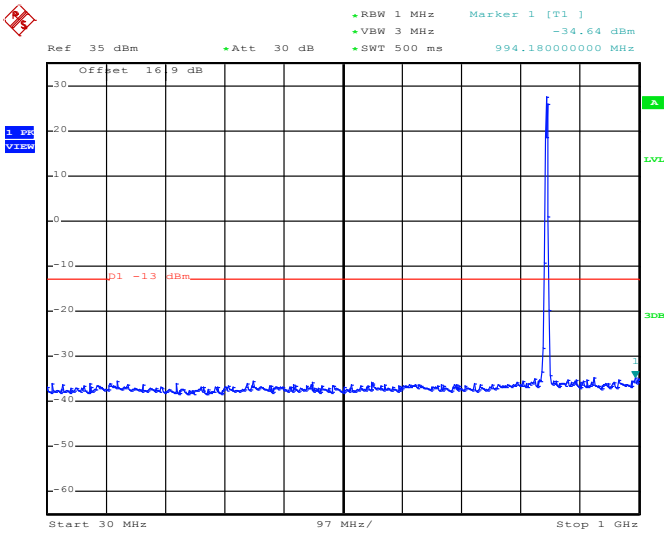

Date: 29.MAY.2014 18:01:05

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

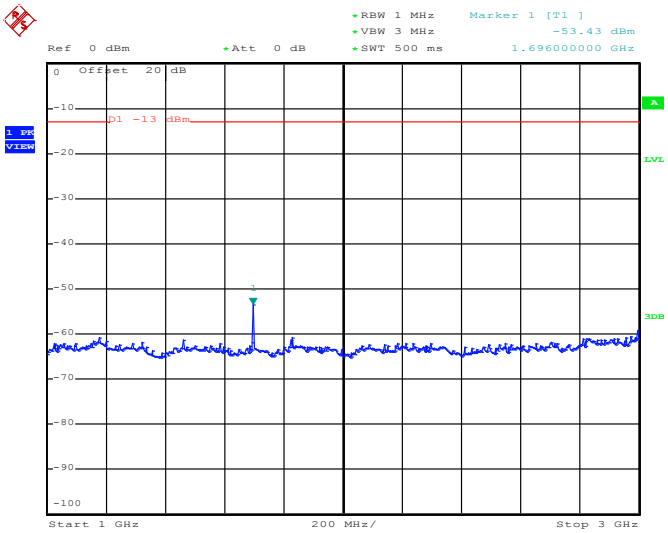

Date: 29.MAY.2014 18:01:16

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

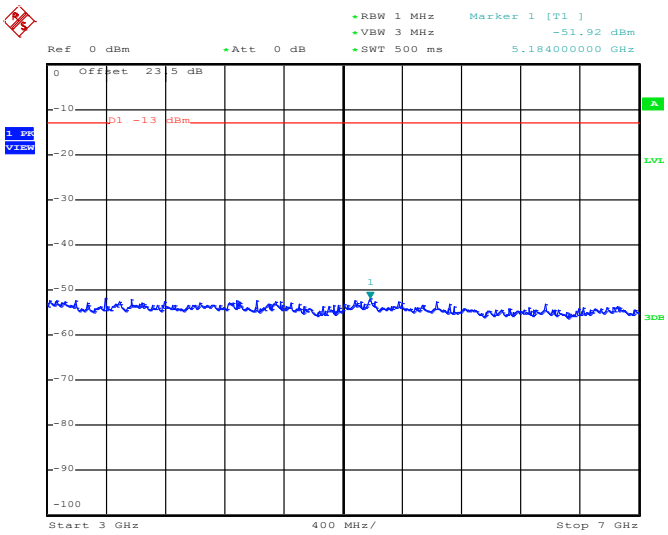

Date: 29.MAY.2014 18:01:24

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

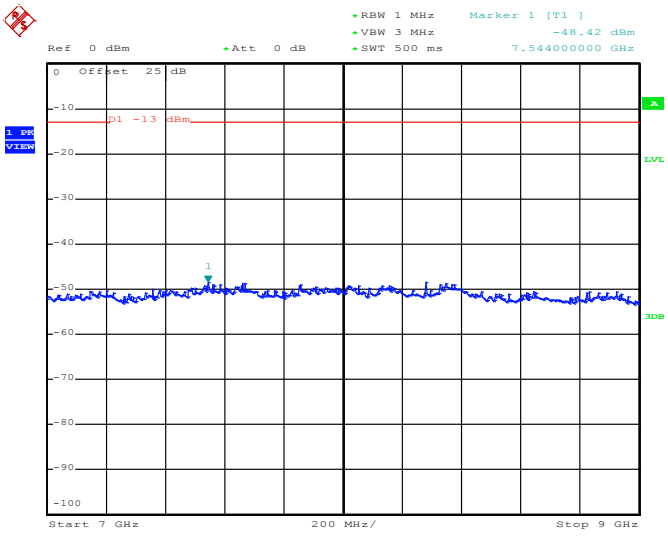

Date: 29.MAY.2014 18:01:32

Band :	CDMA2000 BC0	Channel :	CH1013
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	824.7 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

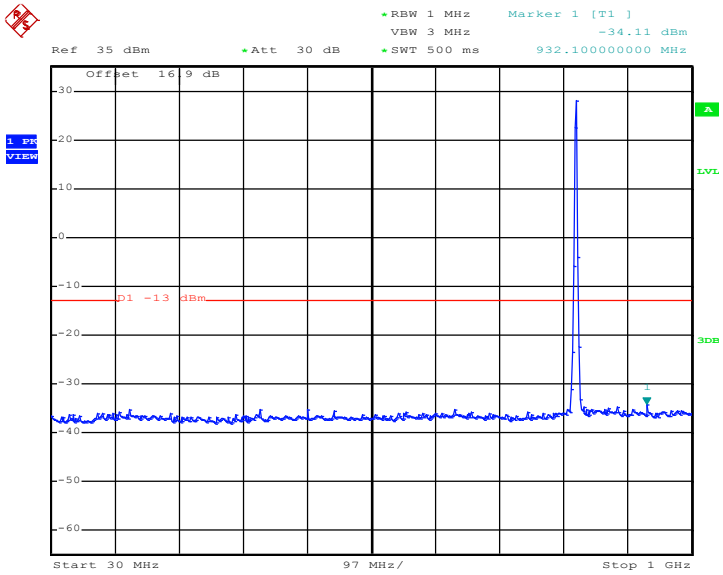

Date: 30.MAY.2014 11:17:23

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

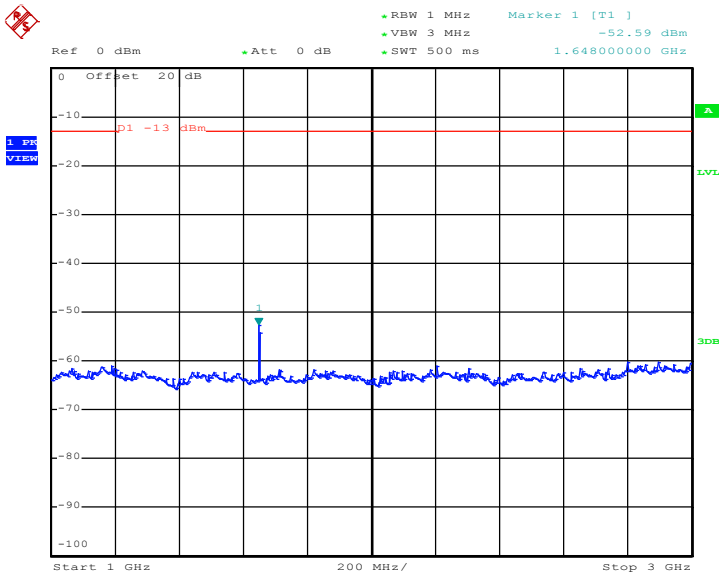

Date: 30.MAY.2014 11:17:30

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

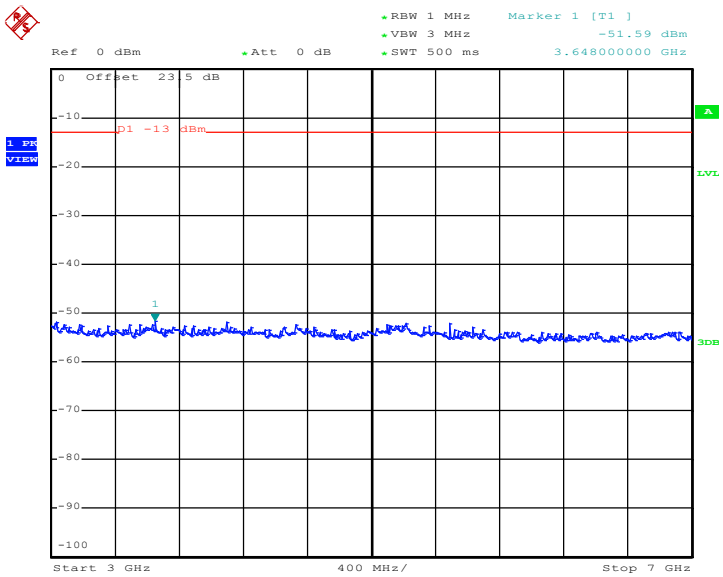

Date: 30.MAY.2014 11:17:39

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

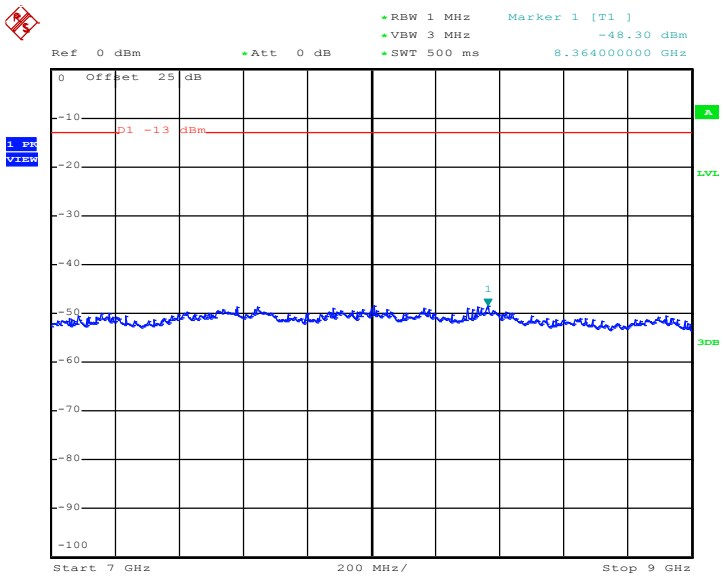

Date: 30.MAY.2014 11:17:47

Band :	CDMA2000 BC0	Channel :	CH384
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	836.52 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

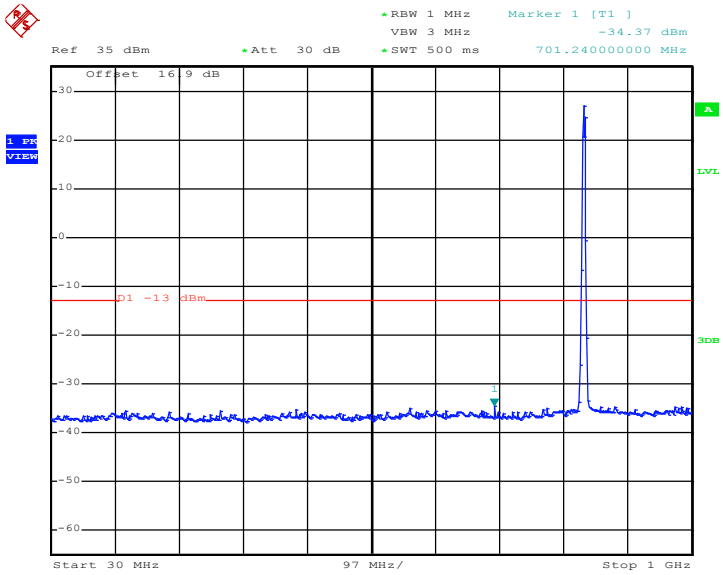

Date: 30.MAY.2014 11:14:57

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

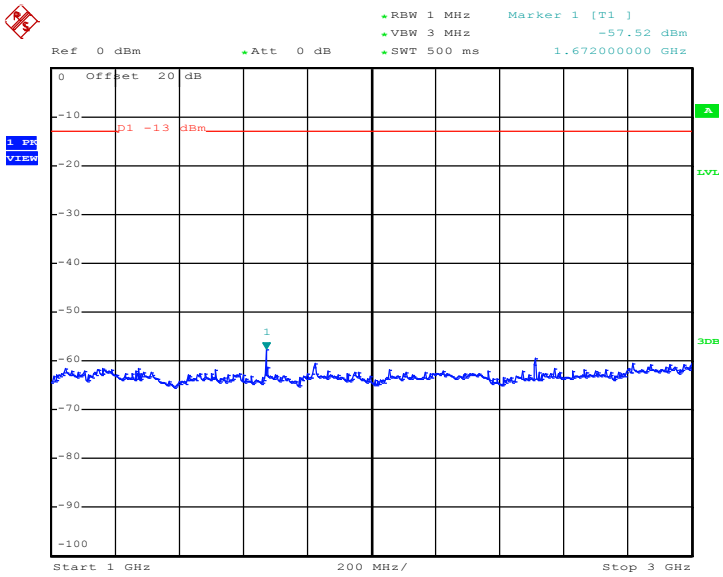

Date: 30.MAY.2014 11:14:59

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

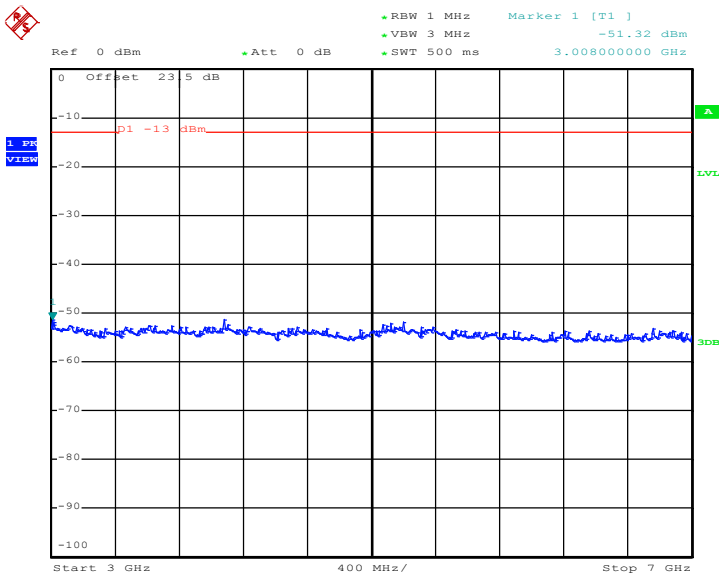

Date: 30.MAY.2014 11:15:08

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

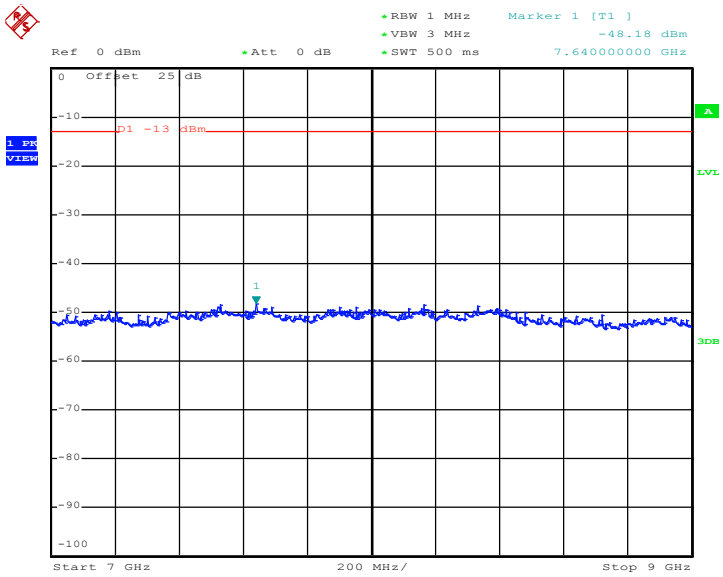

Date: 30.MAY.2014 11:15:16

Band :	CDMA2000 BC0	Channel :	CH777
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	848.31 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

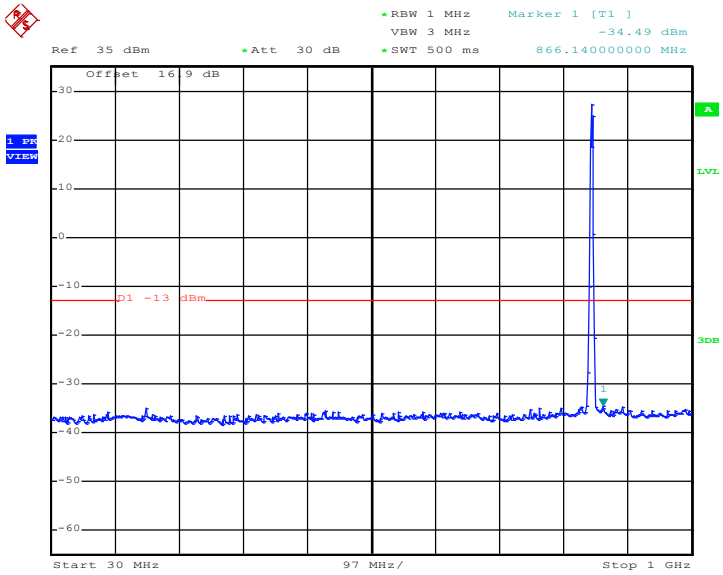

Date: 30.MAY.2014 11:20:18

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

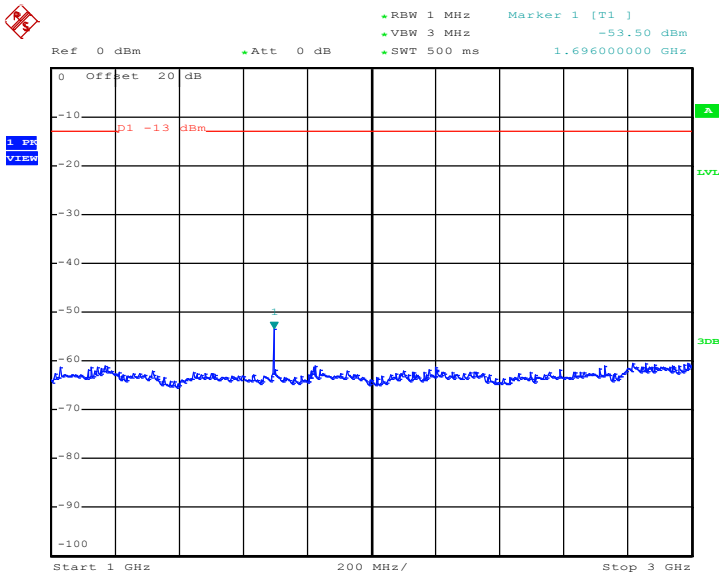

Date: 30.MAY.2014 11:20:20

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

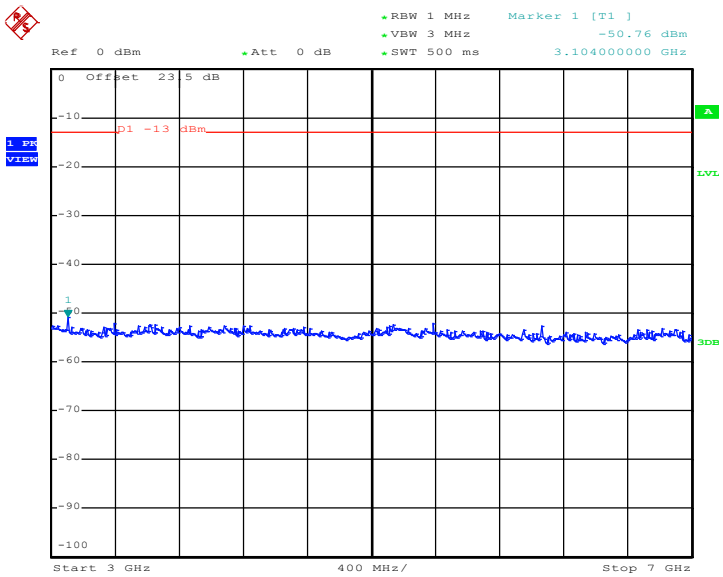

Date: 30.MAY.2014 11:20:29

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

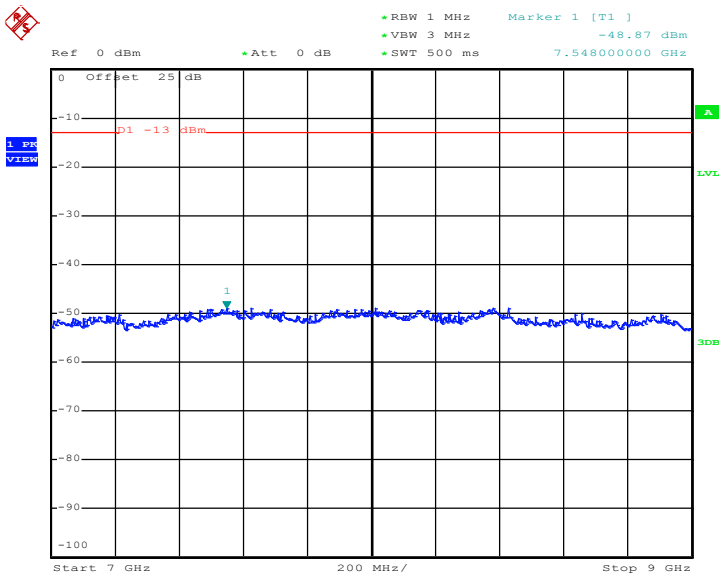

Date: 30.MAY.2014 11:20:37

Band :	CDMA2000 BC1	Channel :	CH25
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	1851.25MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

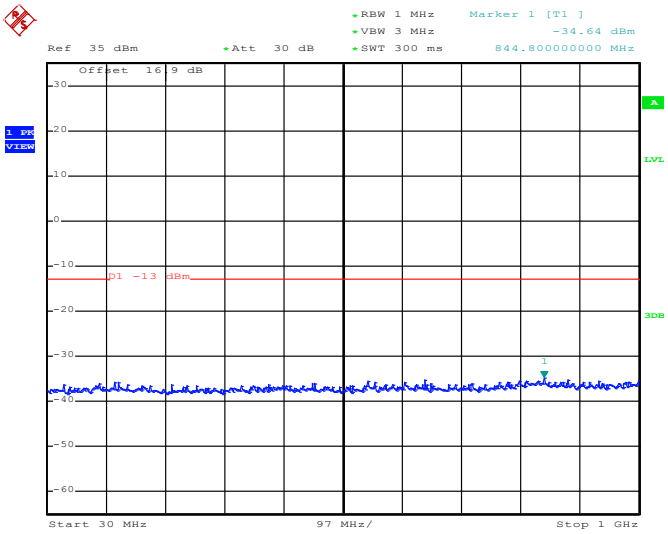

Date: 30.MAY.2014 09:44:08

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

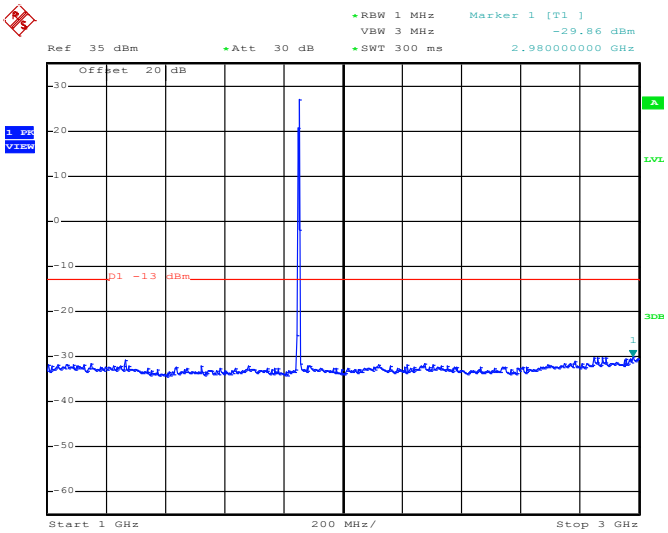

Date: 30.MAY.2014 09:45:02

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

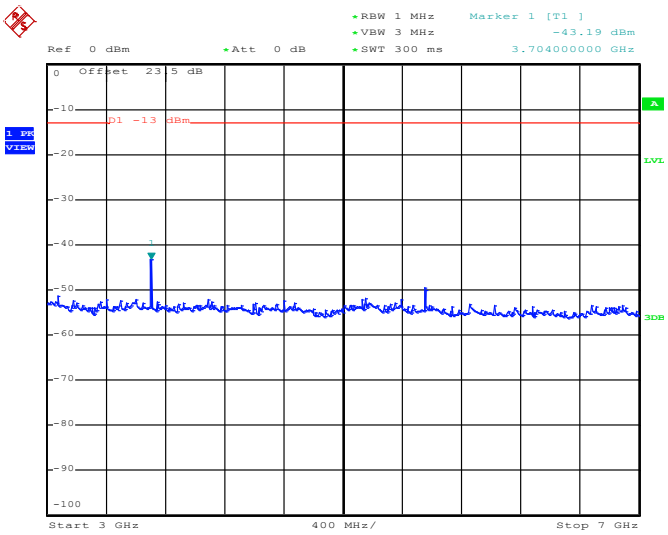

Date: 30.MAY.2014 09:44:28

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

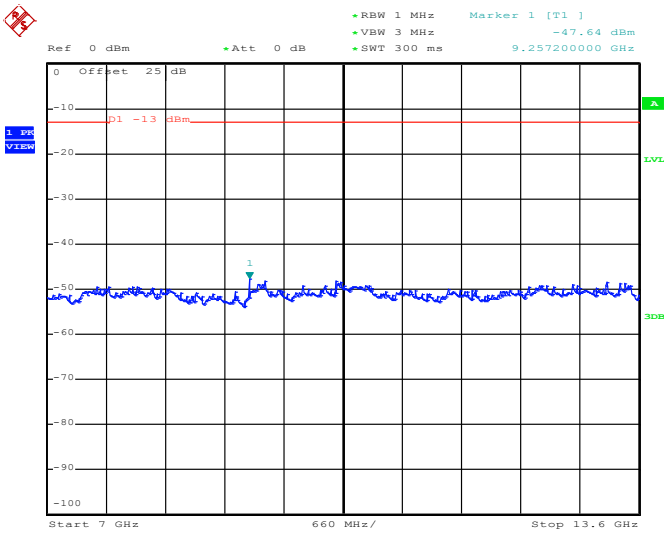

Date: 30.MAY.2014 09:44:36

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

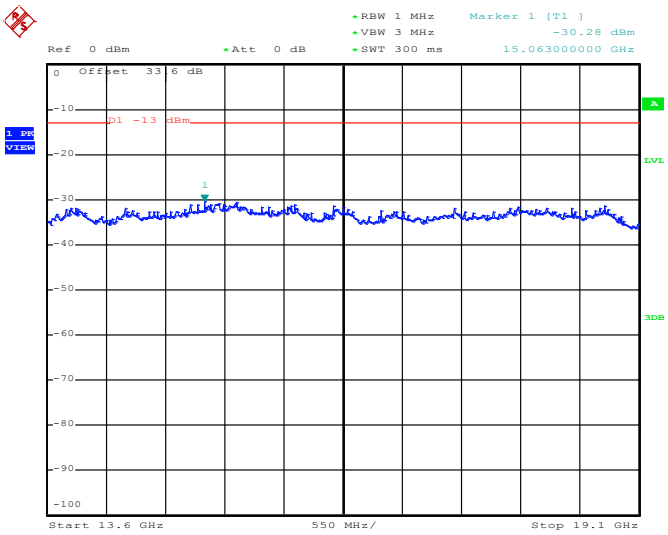

Band :	CDMA2000 BC1	Channel :	CH600
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

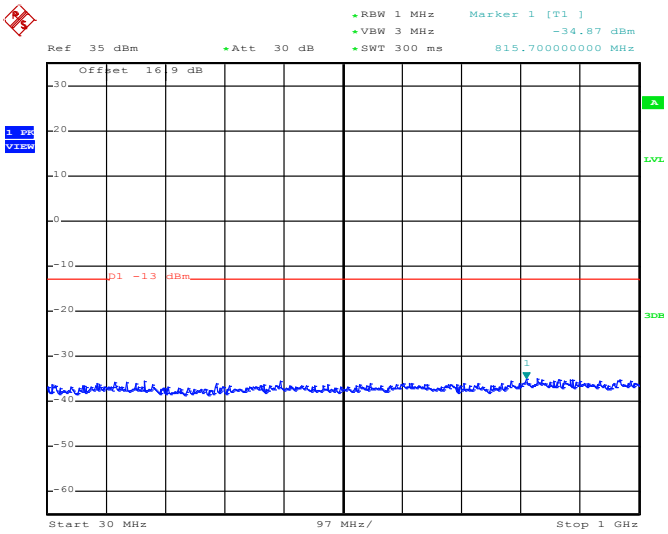

Date: 30.MAY.2014 09:42:42

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

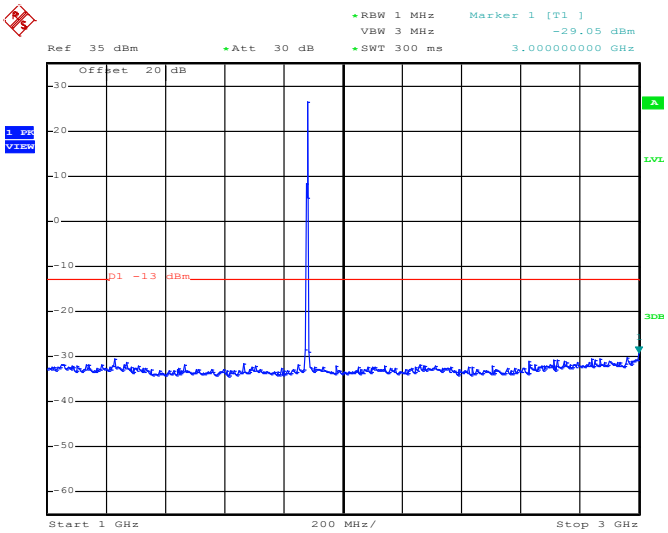

Date: 30.MAY.2014 09:42:14

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

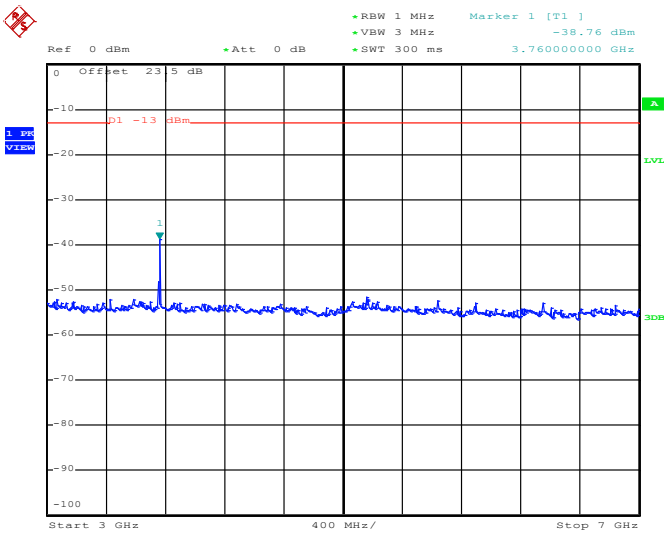

Date: 30.MAY.2014 09:43:03

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

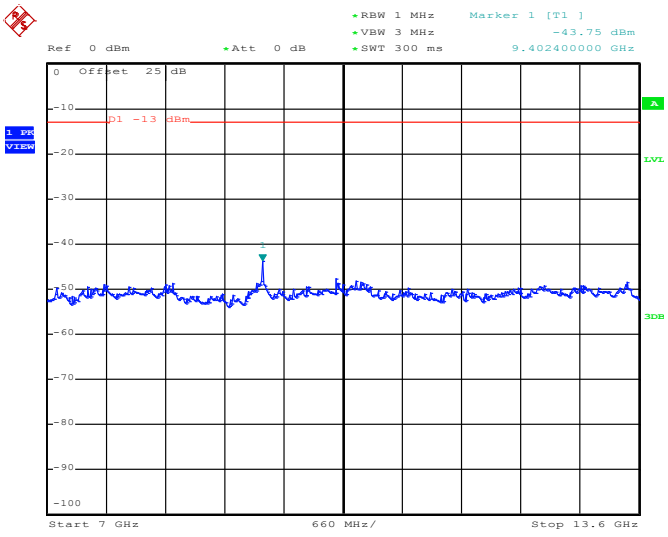

Date: 30.MAY.2014 09:43:11

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

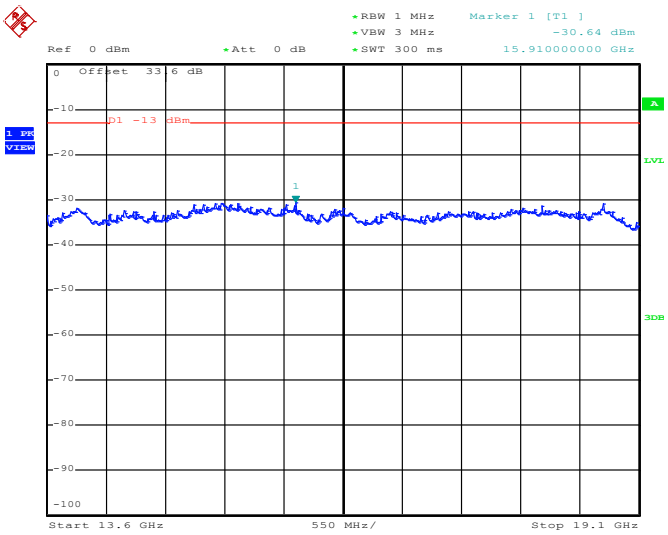

Date: 30.MAY.2014 09:43:19

Band :	CDMA2000 BC1	Channel :	CH1175
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	1908.75MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

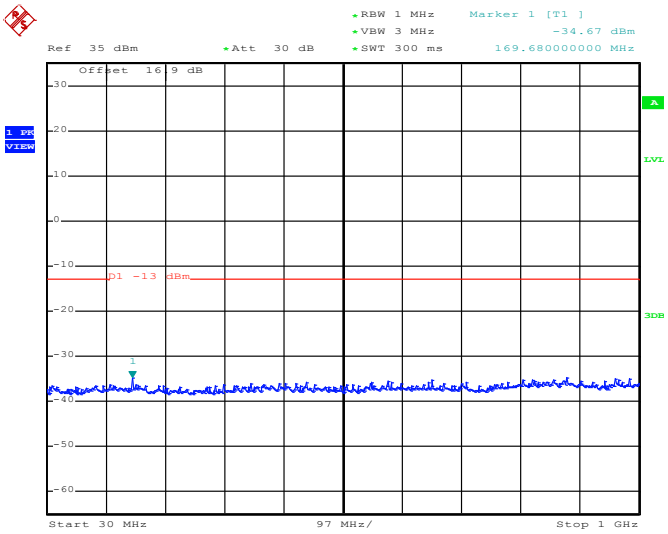

Date: 30.MAY.2014 09:47:41

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

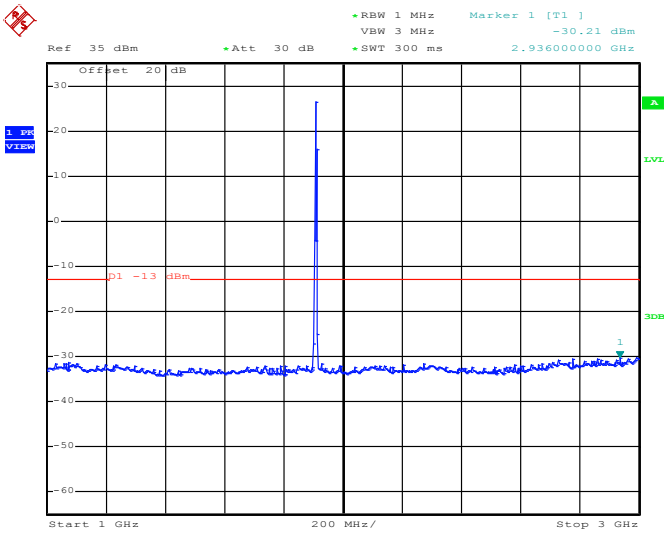

Date: 30.MAY.2014 09:47:37

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

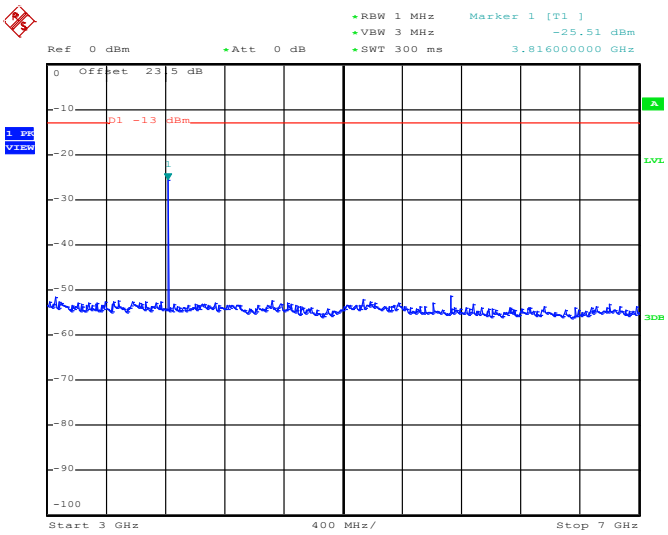

Date: 30.MAY.2014 09:48:04

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

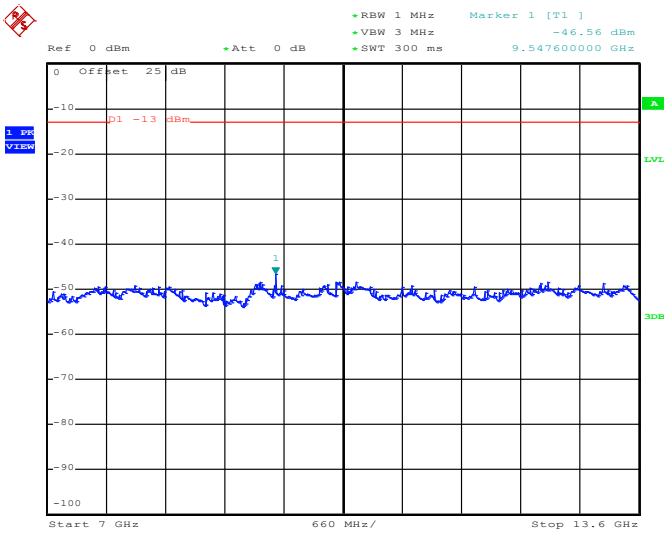

Date: 30.MAY.2014 09:48:13

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

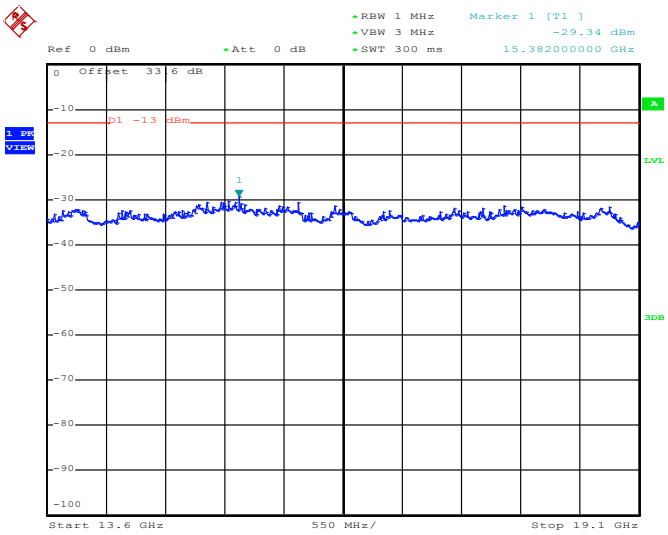

Date: 30.MAY.2014 09:48:21

Band :	CDMA2000 BC1	Channel :	CH25
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	1851.25MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

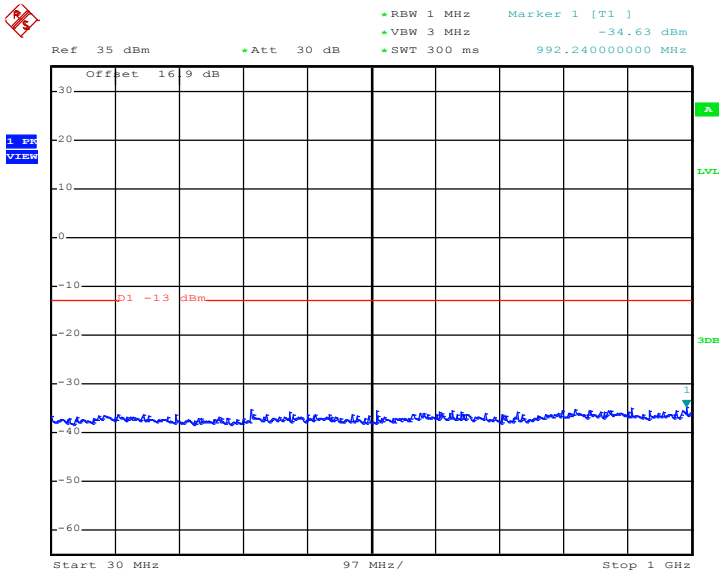

Date: 30.MAY.2014 10:22:27

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

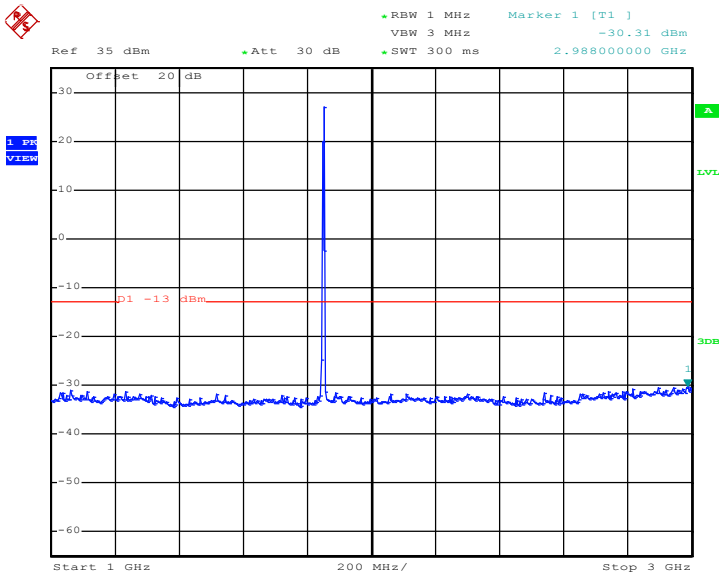

Date: 30.MAY.2014 10:22:08

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

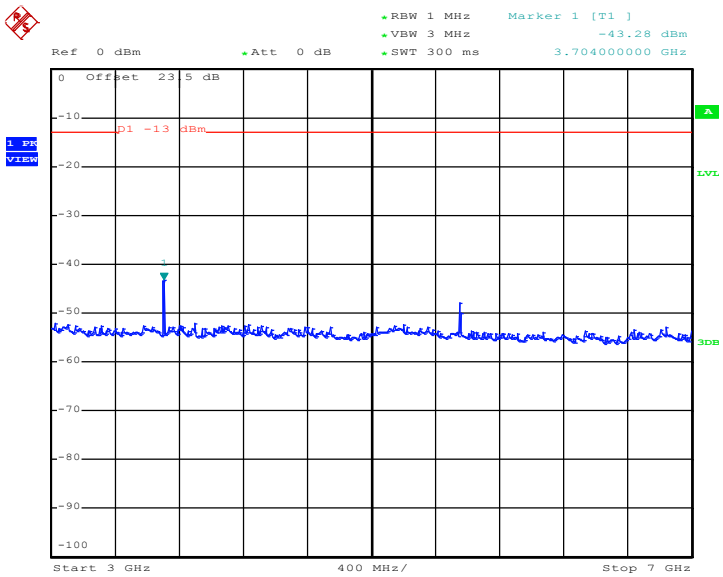

Date: 30.MAY.2014 10:22:48

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

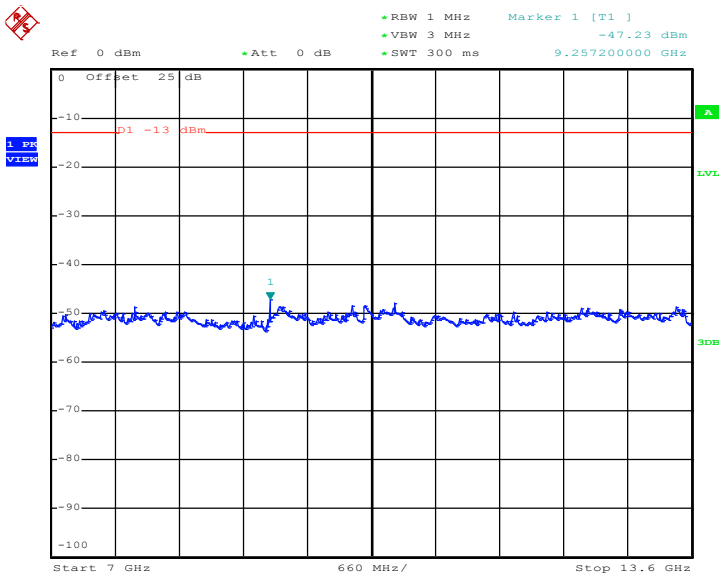

Date: 30.MAY.2014 10:22:56

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

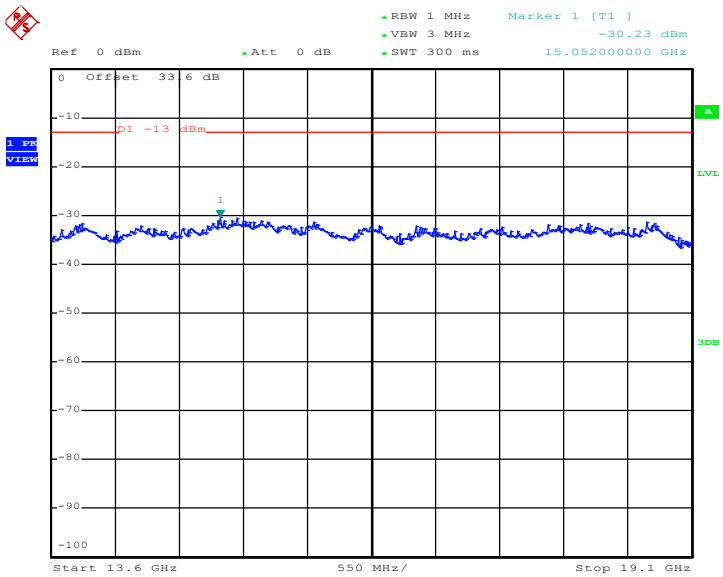

Date: 30.MAY.2014 10:23:04

Band :	CDMA2000 BC1	Channel :	CH600
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

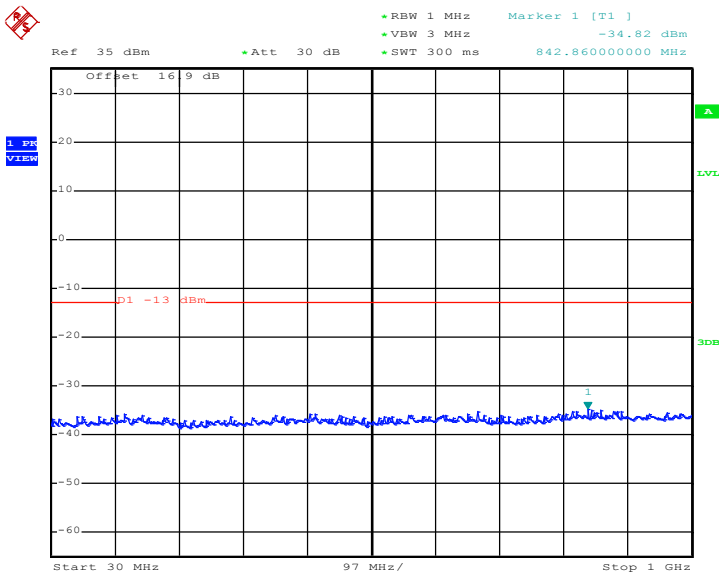

Date: 30.MAY.2014 10:20:44

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

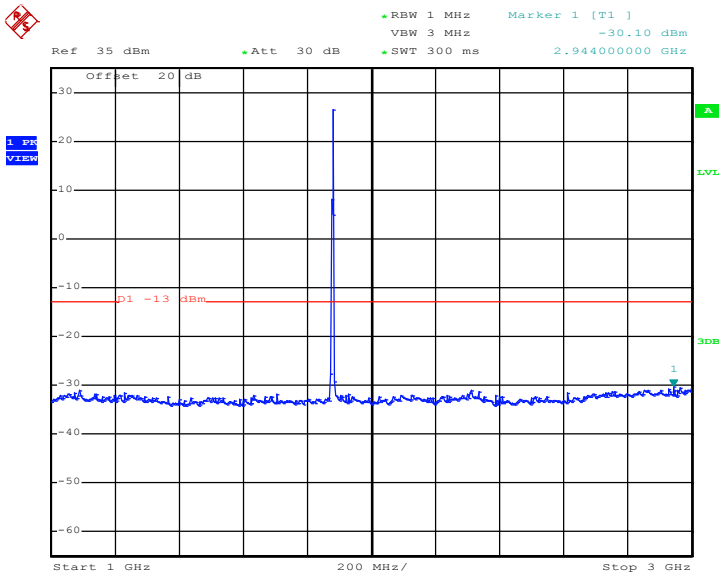

Date: 30.MAY.2014 10:20:36

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

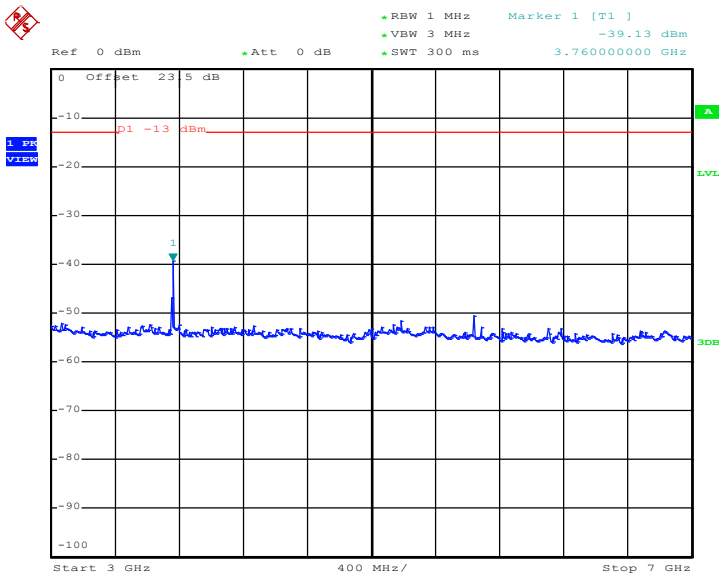

Date: 30.MAY.2014 10:21:03

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

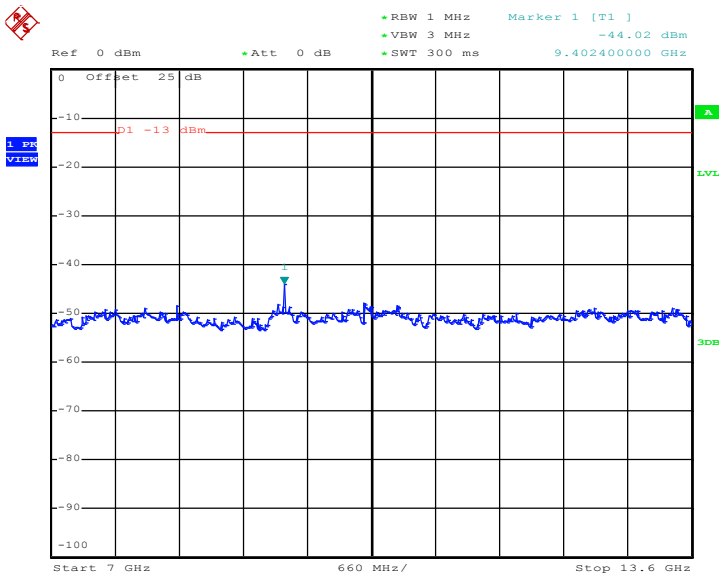

Date: 30.MAY.2014 10:21:11

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

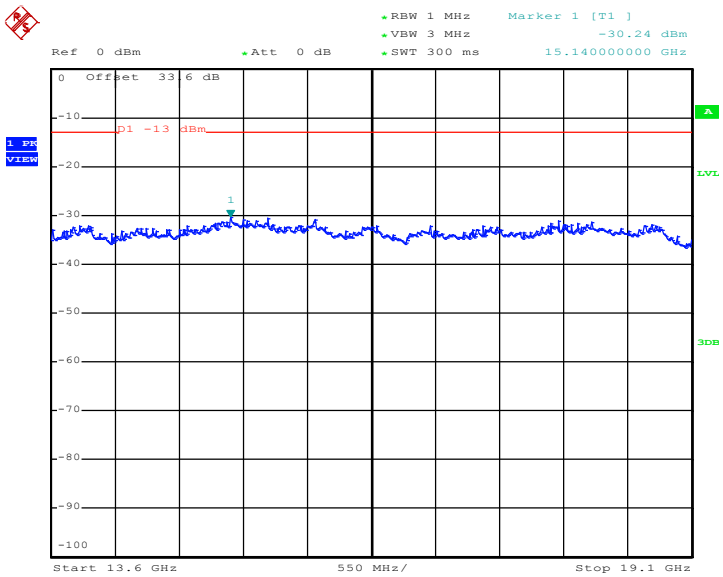

Date: 30.MAY.2014 10:21:20

Band :	CDMA2000 BC1	Channel :	CH1175
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	1908.75MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

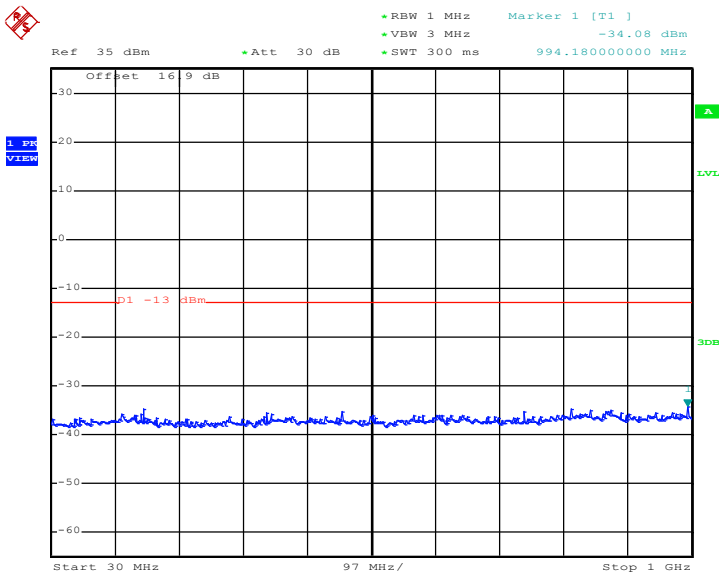

Date: 30.MAY.2014 10:26:32

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

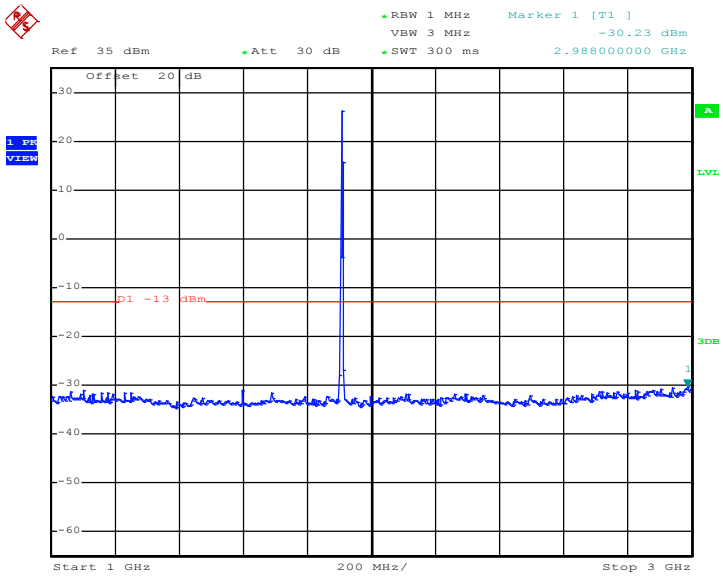

Date: 30.MAY.2014 10:26:59

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

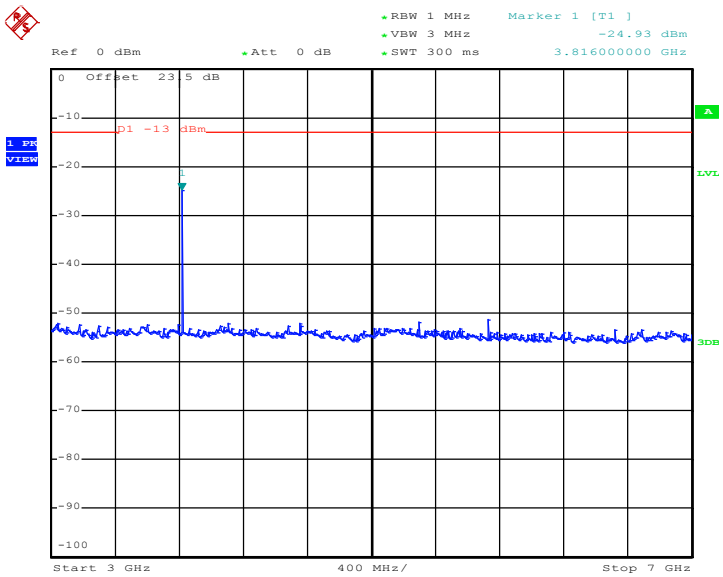

Date: 30.MAY.2014 10:26:51

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

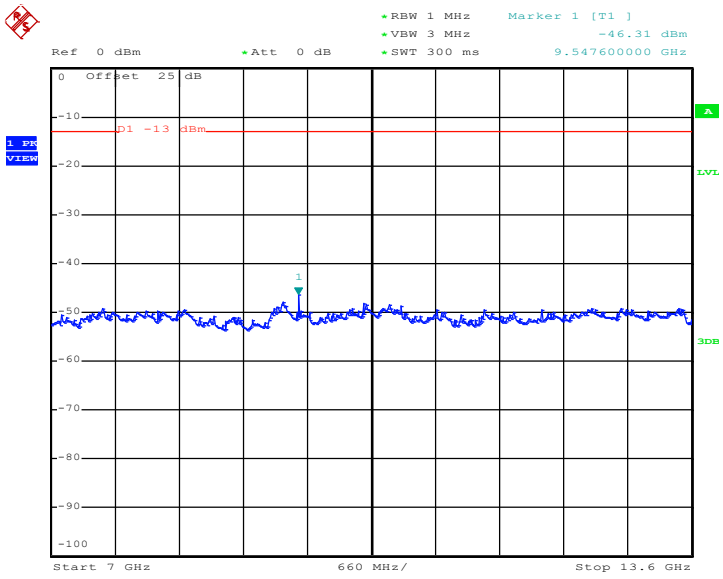

Date: 30.MAY.2014 10:27:00

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

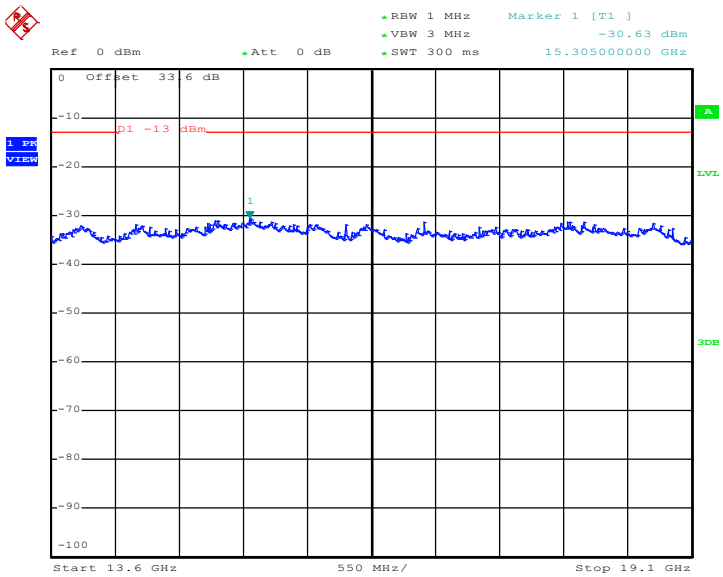

Date: 30.MAY.2014 10:27:08

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures

1. The measurement procedures was followed in the KDB 971168 v02r01 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
12. ERP (dBm) = EIRP - 2.15
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

    = P(W) - [43 + 10log(P)] (dB)

    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)

    = -13dBm.

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

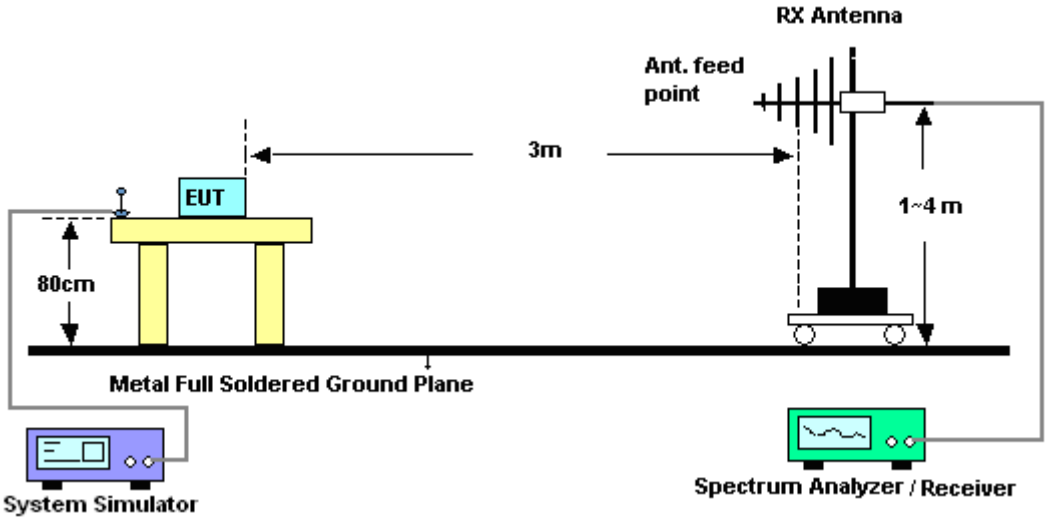

For radiated emissions above 1GHz

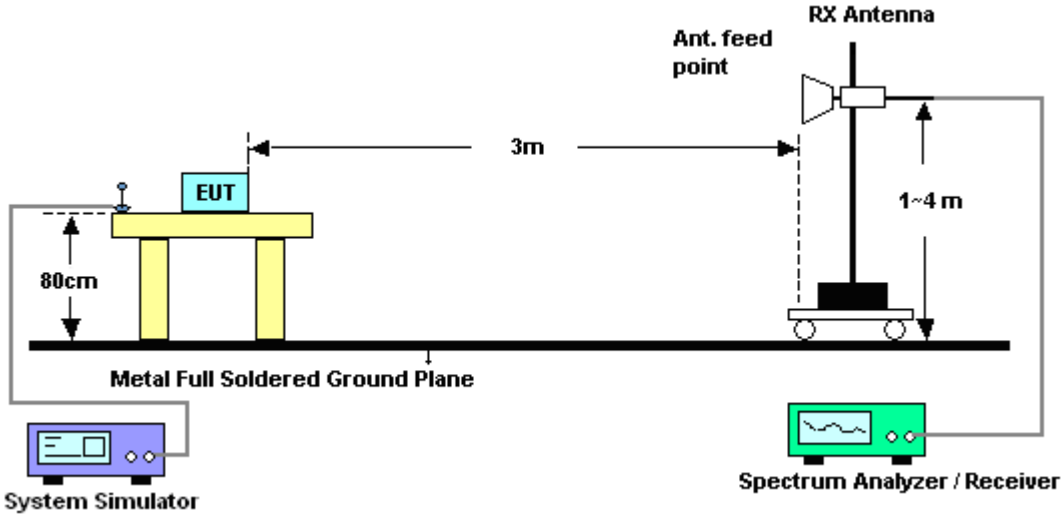

3.7.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	GSM Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-54.20	-13	-41.20	-63.2	-58.2	1.53	5.53	H	Pass
2473	-54.01	-13	-41.01	-67.38	-58.1	2.06	6.15	H	Pass
3297	-54.35	-13	-41.35	-68.37	-59.8	2.48	7.93	H	Pass

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	GSM Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-47.10	-13	-34.10	-58.07	-51.1	1.53	5.53	V	Pass
2473	-54.11	-13	-41.11	-67.96	-58.2	2.06	6.15	V	Pass
3297	-52.65	-13	-39.65	-68.33	-58.1	2.48	7.93	V	Pass

<Middle Channel>

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	GSM Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-50.23	-13	-37.23	-59.32	-54.1	1.62	5.49	H	Pass
2509	-54.38	-13	-41.38	-67.97	-58.5	2.1	6.22	H	Pass
3345	-53.56	-13	-40.56	-67.61	-58.6	3.03	8.07	H	Pass

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	GSM Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-42.33	-13	-29.33	-53.92	-46.2	1.62	5.49	V	Pass
2509	-53.98	-13	-40.98	-67.65	-58.1	2.1	6.22	V	Pass
3345	-52.46	-13	-39.46	-68.49	-57.5	3.03	8.07	V	Pass

<High Channel>

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	GSM Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-52.32	-13	-39.32	-61.69	-56.2	1.57	5.45	H	Pass
2546	-53.54	-13	-40.54	-66.62	-57.8	2.02	6.28	H	Pass
3395	-53.30	-13	-40.30	-68.07	-59.2	2.3	8.20	H	Pass

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	GSM Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-44.82	-13	-31.82	-56.33	-48.7	1.57	5.45	V	Pass
2546	-52.64	-13	-39.64	-66.45	-56.9	2.02	6.28	V	Pass
3395	-52.30	-13	-39.30	-67.99	-58.2	2.3	8.20	V	Pass

<Low Channel>

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-56.50	-13	-43.50	-65.53	-60.5	1.53	5.53	H	Pass
2473	-53.01	-13	-40.01	-66.24	-57.1	2.06	6.15	H	Pass
3297	-54.35	-13	-41.35	-68.57	-59.8	2.48	7.93	H	Pass

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-48.70	-13	-35.70	-59.42	-52.7	1.53	5.53	V	Pass
2473	-53.01	-13	-40.01	-66.23	-57.1	2.06	6.15	V	Pass
3297	-53.15	-13	-40.15	-68.56	-58.6	2.48	7.93	V	Pass

<Middle Channel>

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-55.33	-13	-42.33	-64.41	-59.2	1.62	5.49	H	1672
2509	-53.28	-13	-40.28	-67.19	-57.4	2.1	6.22	H	2509
3345	-54.56	-13	-41.56	-68.73	-59.6	3.03	8.07	H	3345

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-45.03	-13	-32.03	-56.42	-48.9	1.62	5.49	V	1672
2509	-54.28	-13	-41.28	-67.8	-58.4	2.1	6.22	V	2509
3345	-53.66	-13	-40.66	-68.79	-58.7	3.03	8.07	V	3345

<High Channel>

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-57.72	-13	-44.72	-67.07	-61.6	1.57	5.45	H	Pass
2546	-55.24	-13	-42.24	-68.3	-59.5	2.02	6.28	H	Pass
3395	-54.30	-13	-41.30	-68.3	-60.2	2.3	8.20	H	Pass

Band :	GSM850	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-50.92	-13	-37.92	-61.98	-54.8	1.57	5.45	V	Pass
2546	-54.44	-13	-41.44	-68.05	-58.7	2.02	6.28	V	Pass
3395	-52.60	-13	-39.60	-67.96	-58.5	2.3	8.20	V	Pass

<Low Channel>

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	GPRS class 8 Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-52.60	-13	-39.60	-68.15	-58.9	2.51	8.81	H	Pass
5639	-41.39	-13	-28.39	-62.62	-49.1	2.99	10.70	H	Pass
7520	-41.47	-13	-28.47	-68.36	-50	3.59	12.12	H	Pass

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	GPRS class 8 Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-51.70	-13	-38.70	-68.04	-58	2.51	8.81	V	Pass
5639	-40.99	-13	-27.99	-61.95	-48.7	2.99	10.70	V	Pass
7520	-42.27	-13	-29.27	-69.55	-50.8	3.59	12.12	V	Pass

<Middle Channel>

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	GPRS class 8 Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-52.65	-13	-39.65	-67.89	-58.8	2.59	8.74	H	Pass
5551	-41.74	-13	-28.74	-61.69	-49.4	3.04	10.70	H	Pass
7401	-42.86	-13	-29.86	-69.95	-51.6	3.28	12.02	H	Pass

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	GPRS class 8 Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-52.95	-13	-39.95	-69.1	-59.1	2.59	8.74	V	Pass
5551	-43.84	-13	-30.84	-64.36	-51.5	3.04	10.70	V	Pass
7401	-42.26	-13	-29.26	-69.17	-51	3.28	12.02	V	Pass

<High Channel>

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	GPRS class 8 Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-51.79	-13	-38.79	-67.52	-58.2	2.47	8.88	H	Pass
5729	-44.10	-13	-31.10	-65.57	-51.8	3	10.70	H	Pass
7639	-42.32	-13	-29.32	-68.67	-51.1	3.43	12.21	H	Pass

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	GPRS class 8 Link (GMSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-50.89	-13	-37.89	-67.43	-57.3	2.47	8.88	V	Pass
5729	-44.70	-13	-31.70	-65.53	-52.4	3	10.70	V	Pass
7639	-42.62	-13	-29.62	-68.58	-51.4	3.43	12.21	V	Pass

<Low Channel>

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-54.04	-13	-41.04	-69.16	-60.19	2.59	8.74	H	Pass
5548	-46.68	-13	-33.68	-67.23	-54.34	3.04	10.70	H	Pass
7403	-42.93	-13	-29.93	-70.25	-51.67	3.28	12.02	H	Pass

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-52.72	-13	-39.72	-69.08	-58.87	2.59	8.74	V	Pass
5548	-46.63	-13	-33.63	-66.99	-54.29	3.04	10.70	V	Pass
7403	-43.00	-13	-30.00	-69.96	-51.74	3.28	12.02	V	Pass

<Middle Channel>

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-53.58	-13	-40.58	-69.04	-59.88	2.51	8.81	H	Pass
5639	-43.56	-13	-30.56	-64.44	-51.27	2.99	10.70	H	Pass
7522	-42.47	-13	-29.47	-69.64	-51	3.59	12.12	H	Pass

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-52.90	-13	-39.90	-69.25	-59.2	2.51	8.81	V	Pass
5639	-46.35	-13	-33.35	-66.92	-54.06	2.99	10.70	V	Pass
7522	-43.05	-13	-30.05	-70.19	-51.58	3.59	12.12	V	Pass

<High Channel>

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-53.17	-13	-40.17	-68.67	-59.58	2.47	8.88	H	Pass
5730	-46.22	-13	-33.22	-67.32	-53.92	3	10.70	H	Pass
7641	-42.63	-13	-29.63	-68.97	-51.41	3.43	12.21	H	Pass

Band :	GSM1900	**Temperature :**	21~24°C
Test Mode :	EDGE class 8 Link (8PSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-52.35	-13	-39.35	-68.85	-58.76	2.47	8.88	V	Pass
5730	-48.55	-13	-35.55	-69.39	-56.25	3	10.70	V	Pass
7641	-43.23	-13	-30.23	-69.39	-52.01	3.43	12.21	V	Pass

<Low Channel>

Band :	WCDMA Band V	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1653	-57.70	-13	-44.70	-66.45	-61.7	1.53	5.53	H	Pass
2479	-54.21	-13	-41.21	-67.49	-58.3	2.06	6.15	H	Pass
3305	-54.65	-13	-41.65	-68.77	-60.1	2.48	7.93	H	Pass

Band :	WCDMA Band V	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1653	-52.20	-13	-39.20	-63.21	-56.2	1.53	5.53	V	Pass
2479	-53.11	-13	-40.11	-66.71	-57.2	2.06	6.15	V	Pass
3305	-53.05	-13	-40.05	-68.67	-58.5	2.48	7.93	V	Pass

<Middle Channel>

Band :	WCDMA Band V	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-58.43	-13	-45.43	-67.46	-62.3	1.62	5.49	H	Pass
2509	-54.78	-13	-41.78	-67.39	-58.9	2.1	6.22	H	Pass
3345	-54.66	-13	-41.66	-68.64	-59.7	3.03	8.07	H	Pass

Band :	WCDMA Band V	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-55.73	-13	-42.73	-66.6	-59.6	1.62	5.49	V	Pass
2509	-54.08	-13	-41.08	-67.57	-58.2	2.1	6.22	V	Pass
3345	-53.46	-13	-40.46	-68.72	-58.5	3.03	8.07	V	Pass

<High Channel>

Band :	WCDMA Band V	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-57.12	-13	-44.12	-66.46	-61	1.57	5.45	H	Pass
2540	-54.84	-13	-41.84	-68.09	-59.1	2.02	6.28	H	Pass
3386	-54.20	-13	-41.20	-68.65	-60.1	2.3	8.20	H	Pass

Band :	WCDMA Band V	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-54.32	-13	-41.32	-65.83	-58.2	1.57	5.45	V	Pass
2540	-54.24	-13	-41.24	-67.96	-58.5	2.02	6.28	V	Pass
3386	-52.30	-13	-39.30	-67.59	-58.2	2.3	8.20	V	Pass

<Low Channel>

Band :	WCDMA Band II	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3707	-54.29	-13	-41.29	-69.38	-60.44	2.59	8.74	H	Pass
5555	-49.03	-13	-36.03	-69.5	-56.69	3.04	10.70	H	Pass
7410	-42.88	-13	-29.88	-70.18	-51.62	3.28	12.02	H	Pass

Band :	WCDMA Band II	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3707	-53.64	-13	-40.64	-69.84	-59.79	2.59	8.74	V	Pass
5555	-48.68	-13	-35.68	-69.01	-56.34	3.04	10.70	V	Pass
7410	-42.98	-13	-29.98	-69.93	-51.72	3.28	12.02	V	Pass

<Middle Channel>

Band :	WCDMA Band II	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-53.33	-13	-40.33	-68.65	-59.63	2.51	8.81	H	Pass
5639	-49.14	-13	-36.14	-69.89	-56.85	2.99	10.70	H	Pass
7522	-42.05	-13	-29.05	-69.37	-50.58	3.59	12.12	H	Pass

Band :	WCDMA Band II	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-52.75	-13	-39.75	-69.1	-59.05	2.51	8.81	V	Pass
5639	-48.90	-13	-35.90	-69.5	-56.61	2.99	10.70	V	Pass
7522	-43.41	-13	-30.41	-70.44	-51.94	3.59	12.12	V	Pass

<High Channel>

Band :	WCDMA Band II	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-52.91	-13	-39.91	-68.47	-59.32	2.47	8.88	H	Pass
5730	-48.66	-13	-35.66	-69.75	-56.36	3	10.70	H	Pass
7627	-43.77	-13	-30.77	-70.33	-52.55	3.43	12.21	H	Pass

Band :	WCDMA Band II	**Temperature :**	21~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-51.99	-13	-38.99	-68.54	-58.4	2.47	8.88	V	Pass
5723	-49.30	-13	-36.30	-70.22	-57	3	10.70	V	Pass
7627	-42.75	-13	-29.75	-69.19	-51.53	3.43	12.21	V	Pass

<Low Channel>

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-56.90	-13	-43.90	-65.55	-58.75	1.53	5.53	H	Pass
2472	-53.71	-13	-40.71	-66.98	-55.65	2.06	6.15	H	Pass
3296	-53.88	-13	-40.88	-67.89	-57.18	2.48	7.93	H	Pass

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-50.21	-13	-37.21	-61.21	-52.06	1.53	5.53	V	Pass
2472	-53.60	-13	-40.60	-67.36	-55.54	2.06	6.15	V	Pass
3296	-52.39	-13	-39.39	-68.06	-55.69	2.48	7.93	V	Pass

<Middle Channel>

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-57.56	-13	-44.56	-66.49	-61.43	1.62	5.49	H	Pass
2512	-54.40	-13	-41.40	-67.63	-58.52	2.1	6.22	H	Pass
3344	-53.70	-13	-40.70	-67.79	-58.74	3.03	8.07	H	Pass

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.17	-13	-43.17	-67.35	-60.04	1.62	5.49	V	Pass
2512	-53.51	-13	-40.51	-67.11	-57.63	2.1	6.22	V	Pass
3344	-52.37	-13	-39.37	-67.98	-57.41	3.03	8.07	V	Pass

<High Channel>

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-58.14	-13	-45.14	-67.12	-62.02	1.57	5.45	H	Pass
2544	-54.10	-13	-41.10	-67.44	-58.36	2.02	6.28	H	Pass
3392	-53.64	-13	-40.64	-67.82	-59.54	2.3	8.20	H	Pass

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-56.27	-13	-43.27	-67.57	-60.15	1.57	5.45	V	Pass
2544	-54.32	-13	-41.32	-68.11	-58.58	2.02	6.28	V	Pass
3392	-52.84	-13	-39.84	-68.44	-58.74	2.3	8.20	V	Pass

<Low Channel>

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1649	-56.80	-13	-43.80	-65.4	-60.8	1.53	5.53	H	Pass
2474	-55.01	-13	-42.01	-67.59	-59.1	2.06	6.15	H	Pass
3298	-53.85	-13	-40.85	-67.71	-59.3	2.48	7.93	H	Pass

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1649	-55.10	-13	-42.10	-65.95	-59.1	1.53	5.53	V	Pass
2474	-53.41	-13	-40.41	-67.4	-57.5	2.06	6.15	V	Pass
3298	-52.95	-13	-39.95	-68.12	-58.4	2.48	7.93	V	Pass

<Middle Channel>

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-56.63	-13	-43.63	-65.86	-60.5	1.62	5.49	H	Pass
2509	-53.88	-13	-40.88	-67.15	-58	2.1	6.22	H	Pass
3346	-54.46	-13	-41.46	-68.67	-59.5	3.03	8.07	H	Pass

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-52.03	-13	-39.03	-63.23	-55.9	1.62	5.49	V	Pass
2509	-54.08	-13	-41.08	-67.56	-58.2	2.1	6.22	V	Pass
3346	-53.46	-13	-40.46	-68.75	-58.5	3.03	8.07	V	Pass

<High Channel>

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-57.62	-13	-44.62	-66.45	-61.5	1.57	5.45	H	Pass
2544	-54.64	-13	-41.64	-67.44	-58.9	2.02	6.28	H	Pass
3393	-53.30	-13	-40.30	-67.55	-59.2	2.3	8.20	H	Pass

Band :	CDMA2000 BC0	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-54.32	-13	-41.32	-65.31	-58.2	1.57	5.45	V	Pass
2544	-53.44	-13	-40.44	-67.53	-57.7	2.02	6.28	V	Pass
3393	-53.10	-13	-40.10	-68.23	-59	2.3	8.20	V	Pass

<Low Channel>

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-54.01	-13	-41.01	-69.21	-60.16	2.59	8.74	H	Pass
5555	-49.52	-13	-36.52	-69.87	-57.18	3.04	10.70	H	Pass
7403	-41.92	-13	-28.92	-69.07	-50.66	3.28	12.02	H	Pass

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-53.37	-13	-40.37	-69.44	-59.52	2.59	8.74	V	Pass
5555	-49.27	-13	-36.27	-69.51	-56.93	3.04	10.70	V	Pass
7403	-42.26	-13	-29.26	-69.27	-51	3.28	12.02	V	Pass

<Middle Channel>

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-52.94	-13	-39.94	-68.36	-59.24	2.51	8.81	H	Pass
5639	-48.57	-13	-35.57	-69.33	-56.28	2.99	10.70	H	Pass
7522	-42.33	-13	-29.33	-69.47	-50.86	3.59	12.12	H	Pass

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-52.44	-13	-39.44	-68.84	-58.74	2.51	8.81	V	Pass
5639	-49.00	-13	-36.00	-69.66	-56.71	2.99	10.70	V	Pass
7522	-43.13	-13	-30.13	-70.16	-51.66	3.59	12.12	V	Pass

<High Channel>

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-52.37	-13	-39.37	-67.9	-58.78	2.47	8.88	H	Pass
5723	-49.30	-13	-36.30	-70.36	-57	3	10.70	H	Pass
7634	-43.83	-13	-30.83	-70.18	-52.61	3.43	12.21	H	Pass

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-51.61	-13	-38.61	-68.01	-58.02	2.47	8.88	V	Pass
5723	-49.09	-13	-36.09	-69.98	-56.79	3	10.70	V	Pass
7634	-43.23	-13	-30.23	-69.52	-52.01	3.43	12.21	V	Pass

<Low Channel>

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-54.54	-13	-41.54	-69.65	-60.69	2.59	8.74	H	Pass
5555	-49.05	-13	-36.05	-69.44	-56.71	3.04	10.70	H	Pass
7403	-42.53	-13	-29.53	-69.93	-51.27	3.28	12.02	H	Pass

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-53.00	-13	-40.00	-69.21	-59.15	2.59	8.74	V	Pass
5555	-49.15	-13	-36.15	-69.27	-56.81	3.04	10.70	V	Pass
7403	-43.19	-13	-30.19	-70.16	-51.93	3.28	12.02	V	Pass

<Middle Channel>

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-53.35	-13	-40.35	-68.77	-59.65	2.51	8.81	H	Pass
5639	-48.39	-13	-35.39	-69.12	-56.1	2.99	10.70	H	Pass
7522	-42.47	-13	-29.47	-69.69	-51	3.59	12.12	H	Pass

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-52.40	-13	-39.40	-68.98	-58.7	2.51	8.81	V	Pass
5639	-48.91	-13	-35.91	-69.46	-56.62	2.99	10.70	V	Pass
7522	-42.80	-13	-29.80	-69.93	-51.33	3.59	12.12	V	Pass

<High Channel>

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-51.71	-13	-38.71	-67.39	-58.12	2.47	8.88	H	Pass
5723	-48.12	-13	-35.12	-69.22	-55.82	3	10.70	H	Pass
7634	-42.92	-13	-29.92	-69.45	-51.7	3.43	12.21	H	Pass

Band :	CDMA2000 BC1	**Temperature :**	21~24°C
Test Mode :	1xRTT_RC3+SO55 (QPSK)	**Relative Humidity :**	44~48%
Test Engineer :	Kai Wang, Stan Hsieh, and Ken Wu	**Polarization :**	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-51.40	-13	-38.40	-67.83	-57.81	2.47	8.88	V	Pass
5723	-48.38	-13	-35.38	-69.24	-56.08	3	10.70	V	Pass
7634	-42.77	-13	-29.77	-69.06	-51.55	3.43	12.21	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block for FCC Part 24 and the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency for FCC Part 22.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures for Temperature Variation

1. The measurement procedures was followed in the §2.1055 and KDB 971168 v02r01 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The measurement procedures was followed in the §2.1055 and KDB 971168 v02r01 Section 9.0.
2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

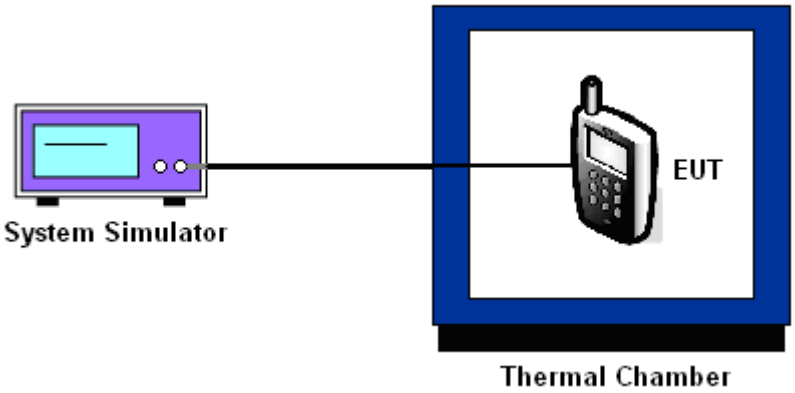

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0108	0.0108	PASS
40	0.0024	0.0084	
30	0.0048	0.0096	
20(Ref.)	0.0000	0.0000	
10	0.0012	0.0024	
0	0.0036	0.0012	
-10	0.0012	0.0012	
-20	0.0060	0.0048	
-30	0.0000	0.0072	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	within authourized band	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0064	0.0064	PASS
40	0.0037	0.0048	
30	0.0021	0.0032	
20(Ref.)	0.0000	0.0000	
10	0.0011	0.0005	
0	0.0016	0.0005	
-10	0.0027	0.0027	
-20	0.0053	0.0011	
-30	0.0043	0.0027	

Note: The frequency fundamental emissions stay within the authorized frequency block from the derivation based on the frequency deviations measured on the center channel are small.

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps Deviation (ppm)	Result
50	0.0155	PASS
40	0.0012	
30	0.0024	
20(Ref.)	0.0000	
10	0.0108	
0	0.0132	
-10	0.0143	
-20	0.0060	
-30	0.0167	

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	within authourized band	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps Deviation (ppm)	Result
50	0.0043	PASS
40	0.0016	
30	0.0011	
20(Ref.)	0.0000	
10	0.0005	
0	0.0011	
-10	0.0021	
-20	0.0032	
-30	0.0027	

Note: The frequency fundamental emissions stay within the authorized frequency block from the derivation based on the frequency deviations measured on the center channel are small.

Band :	CDMA2000 BC0 1xEV-DO Rev. 0_RTAP 153.6K	Channel :	384
Limit (ppm) :	2.5	Frequency :	836.52 MHz

Temperature (°C)	Deviation (ppm)	Result
50	0.0932	PASS
40	0.0873	
30	0.0825	
20(Ref.)	0.0000	
10	0.0012	
0	0.0048	
-10	0.0801	
-20	0.0825	
-30	0.0813	

Band :	CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K	Channel :	600
Limit (ppm) :	within authourized band	Frequency :	1880.0 MHz

Temperature (°C)	Deviation (ppm)	Result
50	0.0027	PASS
40	0.0005	
30	0.0011	
20(Ref.)	0.0000	
10	0.0016	
0	0.0005	
-10	0.0043	
-20	0.0021	
-30	0.0053	

Note: The frequency fundamental emissions stay within the authorized frequency block from the derivation based on the frequency deviations measured on the center channel are small.

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	4.35	0.0012	2.5 for Part 22/ Within authorized band for Part 24	PASS
		3.90	0.0000		
		BEP	0.0024		
	EDGE class 8	4.35	0.0072		
		3.90	0.0000		
		BEP	0.0048		
GSM 1900 CH661	GPRS class 8	4.35	0.0037		
		3.90	0.0021		
		BEP	0.0048		
	EDGE class 8	4.35	0.0027		
		3.90	0.0021		
		BEP	0.0016		
WCDMA Band V CH4182	RMC 12.2Kbps	4.35	0.0000		
		3.90	0.0120		
		BEP	0.0132		
WCDMA Band II CH9400	RMC 12.2Kbps	4.35	0.0005		
		3.90	0.0000		
		BEP	0.0011		
CDMA2000 BC0 CH384	1xEV-DO Rev. 0 RTAP 153.6K	4.35	0.0789		
		3.90	0.0825		
		BEP	0.0777		
CDMA2000 BC1 CH600	1xEV-DO Rev. 0 RTAP 153.6K	4.35	0.0005		
		3.90	0.0000		
		BEP	0.0011		

Note:

1. Normal Voltage = 3.90V.
2. Battery End Point (BEP) = 3.40 V.
3. For Part 24, the frequency fundamental emissions stay within the authorized frequency block from the derivation based on the frequency deviations measured on the center channel are small.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	May 29, 2014~ May 30, 2014	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	May 29, 2014~ May 30, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	May 29, 2014~ May 30, 2014	Jul. 18, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Jun. 05, 2014~ Jun. 24, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Jun. 05, 2014~ Jun. 24, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Jun. 05, 2014~ Jun. 24, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00066583	1GHz~18GHz	Aug. 02, 2013	Jun. 05, 2014~ Jun. 24, 2014	Aug. 01, 2014	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 23, 2014	Jun. 05, 2014~ Jun. 24, 2014	May 22, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Jun. 05, 2014~ Jun. 24, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Jun. 05, 2014~ Jun. 24, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jun. 05, 2014~ Jun. 24, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604 /L	N/A	N/A	Jun. 05, 2014~ Jun. 24, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 03, 2013	Jun. 05, 2014~ Jun. 24, 2014	Oct. 02, 2014	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**4.50**