

40_LTE Band 66_20M_QPSK_50RB_0offset_Front_5mm_Ch132072


Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: MSL_1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 53.096$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.15, 8.15, 8.15); Calibrated: 2018.5.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2018.5.28
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132072/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.48 W/kg

Ch132072/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 34.14 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.91 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.570 W/kg
Maximum value of SAR (measured) = 1.65 W/kg

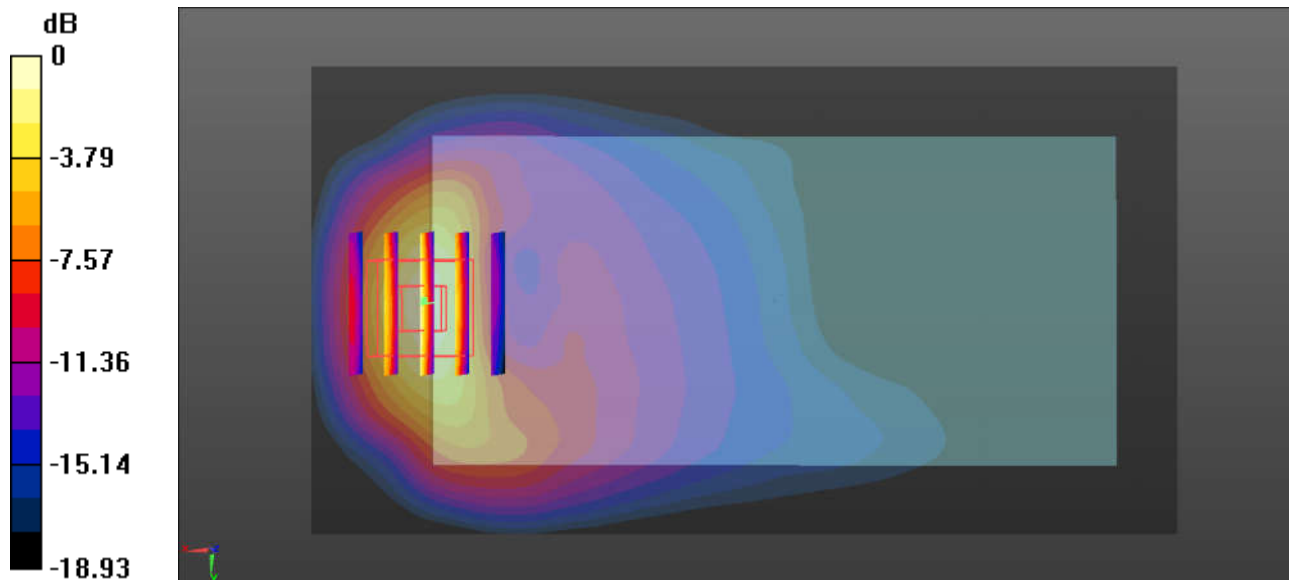

0 dB = 1.65 W/kg = 2.17 dBW/kg

41_LTE Band 2_20M_QPSK_1RB_0Offset_Back_5mm_Ch18700


Communication System: UID 0, FDD_LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: MSL_1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 53.636$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.82, 7.82, 7.82); Calibrated: 2018.5.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2018.5.28
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch18700/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.14 W/kg

Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.862 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 0.904 W/kg; SAR(10 g) = 0.463 W/kg
Maximum value of SAR (measured) = 1.28 W/kg

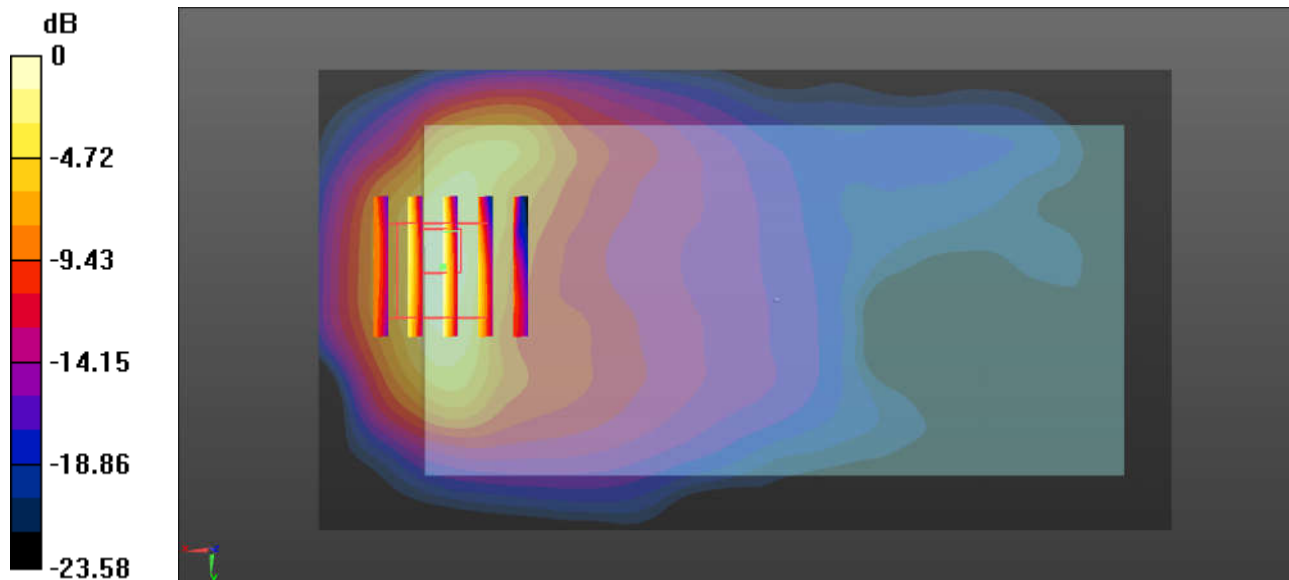

0 dB = 1.28 W/kg = 1.07 dBW/kg

42_LTE Band 7_20M_QPSK_50RB_0Offset_Back_5mm_Ch20850


Communication System: UID 0, FDD_LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: MSL_2600 Medium parameters used: $f = 2510$ MHz; $\sigma = 2.061$ S/m; $\epsilon_r = 53.228$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(6.92, 6.92, 6.92); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.877 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.977 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.255 W/kg
Maximum value of SAR (measured) = 0.775 W/kg

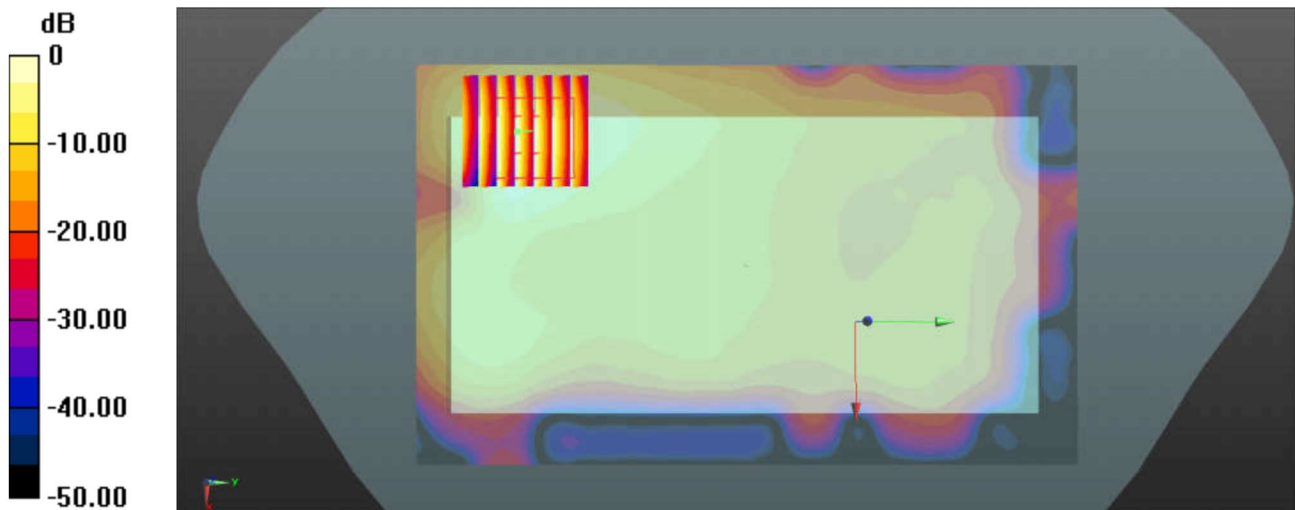

0 dB = 0.877 W/kg = -0.57 dBW/kg

43_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 53.398$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.53, 7.53, 7.53); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.674 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.973 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.729 W/kg
SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.181 W/kg
Maximum value of SAR (measured) = 0.523 W/kg

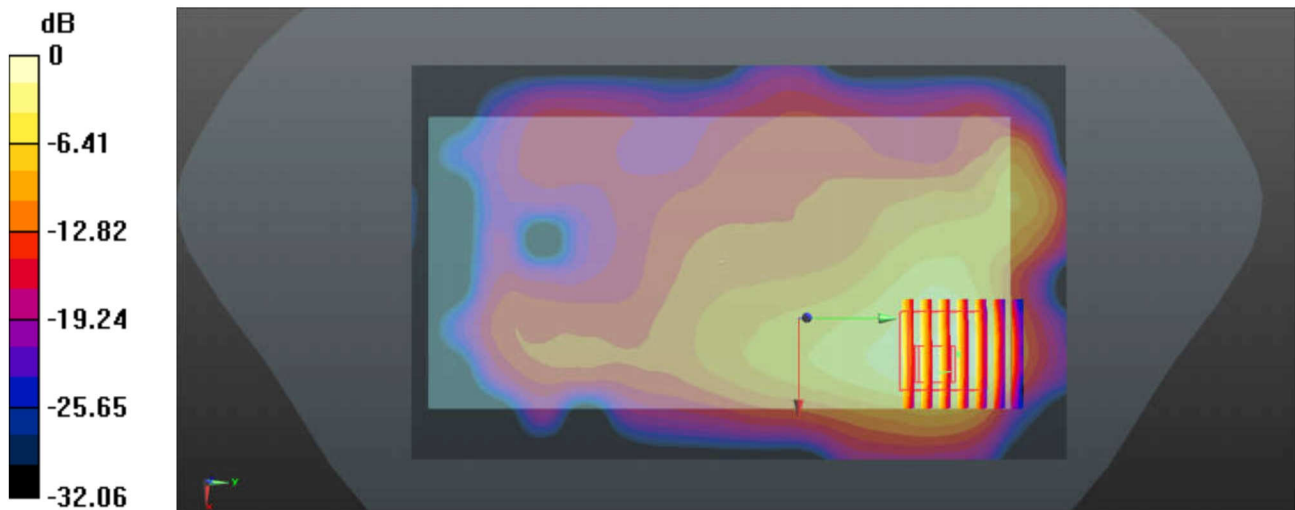

0 dB = 0.674 W/kg = -1.71 dBW/kg

44_WLAN5.3GHz_802.11a_6Mbps_Back_5mm_Ch64


Communication System: UID 0, WIFI (0); Frequency: 5320 MHz; Duty Cycle: 1:1.018
Medium: MSL_5000 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.59$ S/m; $\epsilon_r = 47.835$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.62, 4.62, 4.62); Calibrated: 2018.1.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch64/Area Scan (101x171x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.09 W/kg

Ch64/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.810 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.86 W/kg
SAR(1 g) = 0.898 W/kg; SAR(10 g) = 0.262 W/kg
Maximum value of SAR (measured) = 2.17 W/kg

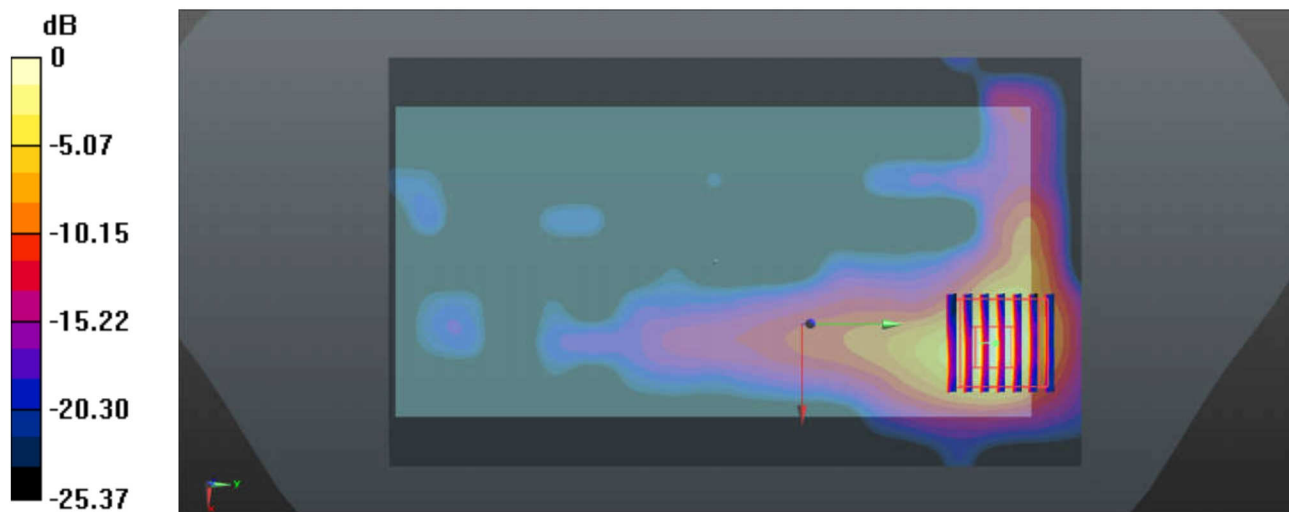

0 dB = 2.09 W/kg = 3.20 dBW/kg

45_WLAN5.5GHz_802.11a 6Mbps_Back_5mm_Ch100


Communication System: UID 0, WIFI (0); Frequency: 5500 MHz; Duty Cycle: 1:1.018
 Medium: MSL_5000 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.823$ S/m; $\epsilon_r = 47.531$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.05, 4.05, 4.05); Calibrated: 2018.1.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch100/Area Scan (101x171x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 2.38 W/kg

Ch100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 2.064 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 4.48 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.298 W/kg
 Maximum value of SAR (measured) = 2.59 W/kg

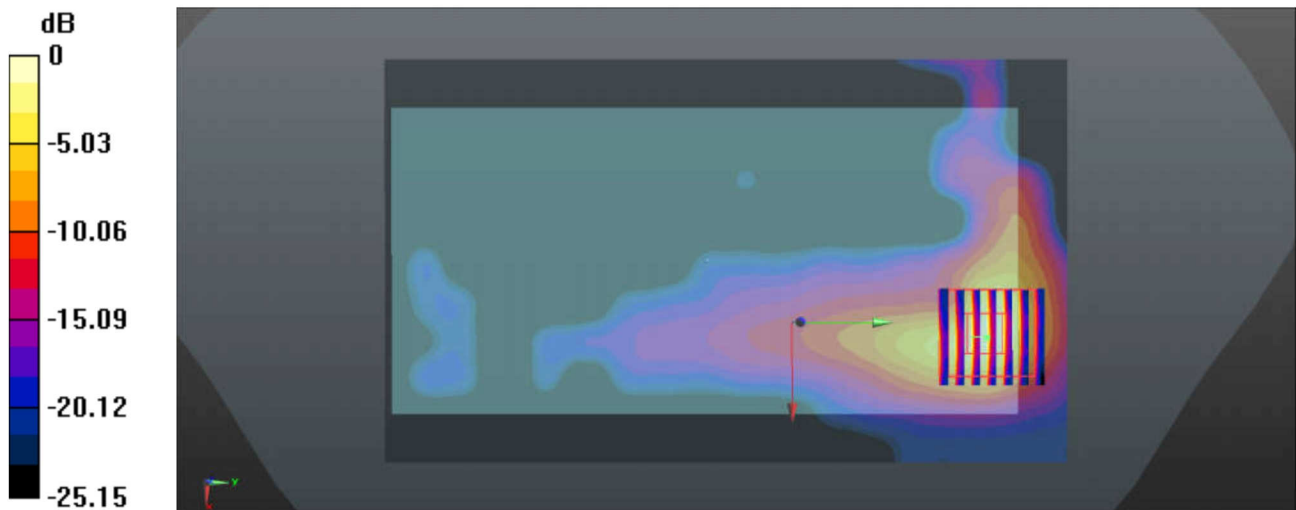

0 dB = 2.38 W/kg = 3.77 dBW/kg

46_WLAN5.8GHz_802.11a 6Mbps_Back_5mm_Ch157

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.018
 Medium: MSL_5000 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.206 \text{ S/m}$; $\epsilon_r = 47.073$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.18, 4.18, 4.18); Calibrated: 2018.1.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch157/Area Scan (101x181x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.52 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 1.763 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 2.94 W/kg
SAR(1 g) = 0.631 W/kg ; SAR(10 g) = 0.183 W/kg
 Maximum value of SAR (measured) = 1.67 W/kg



0 dB = $1.52 \text{ W/kg} = 1.82 \text{ dBW/kg}$

47_Bluetooth_1Mbps_Back_5mm_Ch0

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.298
Medium: MSL_2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 53.608$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.53, 7.53, 7.53); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch0/Area Scan (151x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.595 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.730 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.435 W/kg

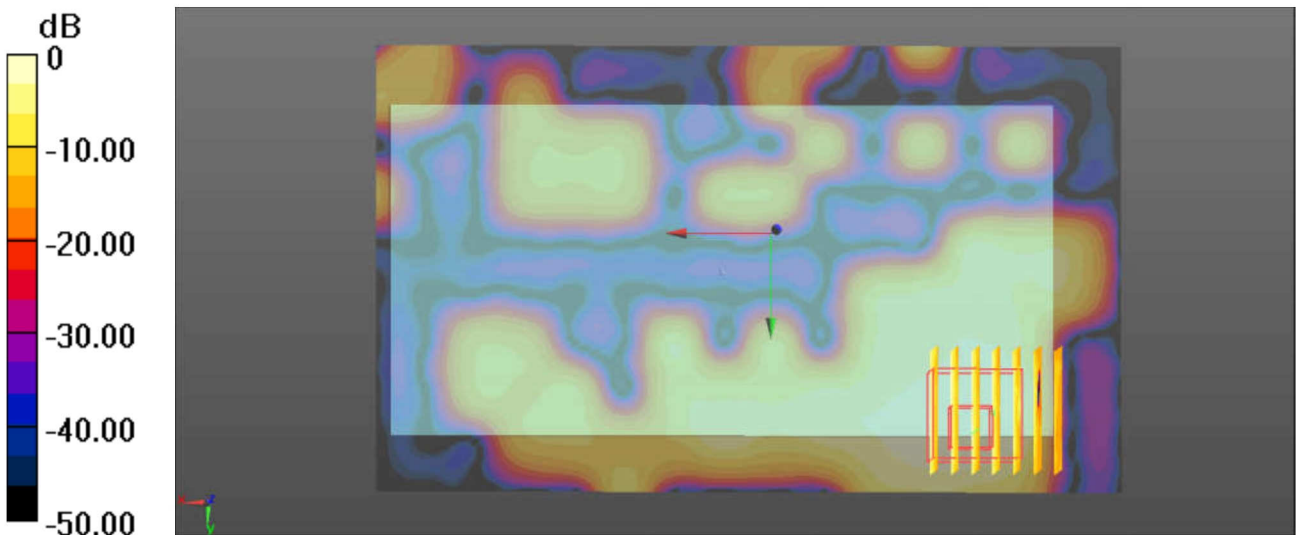

0 dB = 0.435 W/kg = -3.62 dBW/kg

48_GSM850_GPRS 3 Tx slots_Back_0mm_Ch251

Communication System: UID 0, GPRS/EDGE (3 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.77
 Medium: MSL_835 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 55.026$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.83 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.541 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 1.48 W/kg; SAR(10 g) = 0.711 W/kg

Maximum value of SAR (measured) = 2.64 W/kg

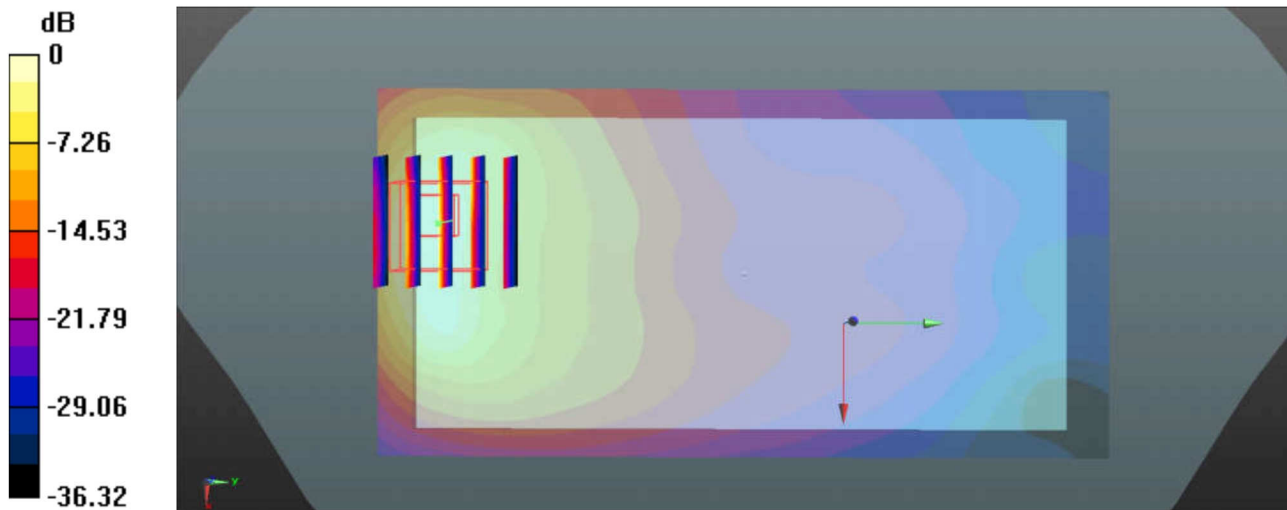

0 dB = 2.83 W/kg = 4.52 dBW/kg

49_GSM1900_GPRS 3 Tx slots_Back_0mm_Ch512

Communication System: UID 0, GPRS/EDGE (3 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
 Medium: MSL_1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.445$ S/m; $\epsilon_r = 52.959$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.03, 8.03, 8.03); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch512/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.52 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.071 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.01 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 6.99 W/kg

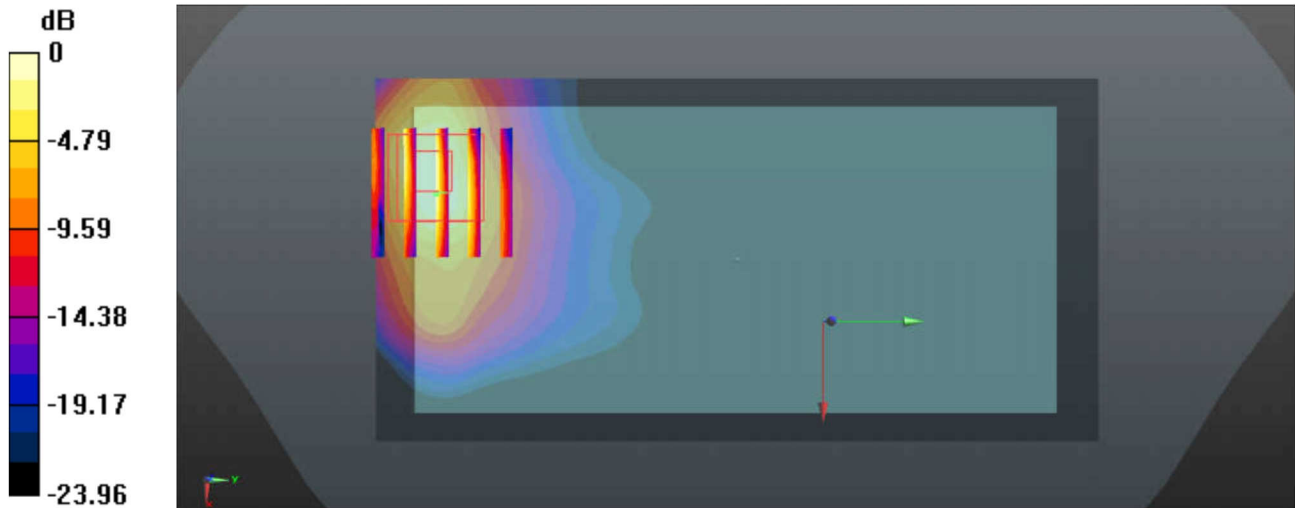

0 dB = 6.52 W/kg = 8.14 dBW/kg

50_WCDMA Band V_RMC12.2Kbps_Back_0mm_Ch4182


Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: MSL_835 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 55.149$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4182/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 2.27 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.074 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 3.17 W/kg
SAR(1 g) = 1.19 W/kg ; SAR(10 g) = 0.566 W/kg
 Maximum value of SAR (measured) = 2.15 W/kg

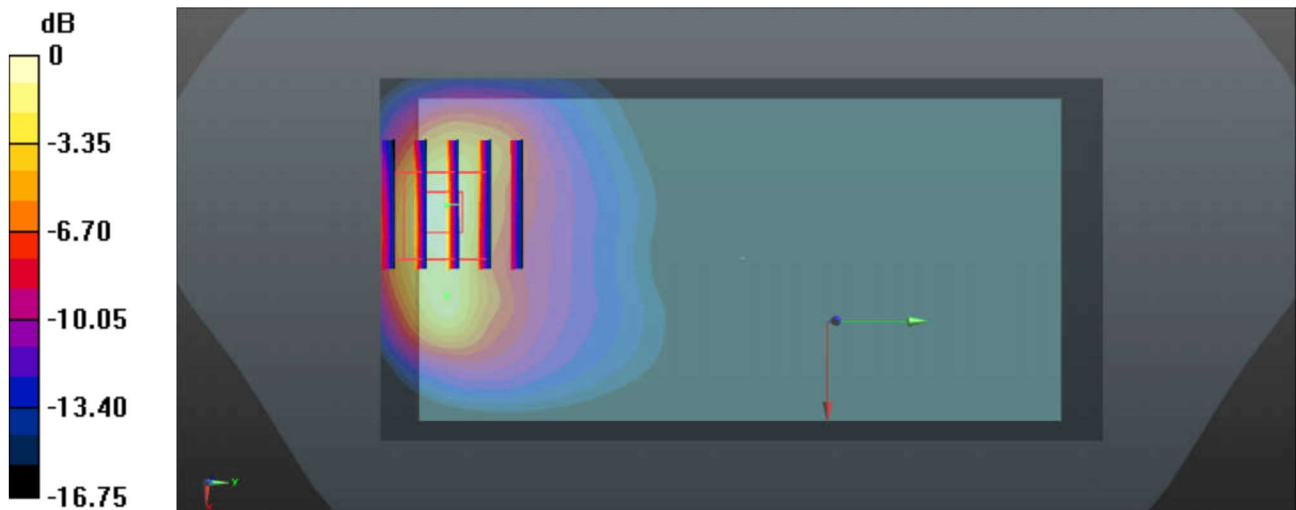

$0 \text{ dB} = 2.27 \text{ W/kg} = 3.56 \text{ dBW/kg}$

51_WCDMA Band II_RMC12.2Kbps_Back_0mm_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: MSL_1900 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 52.95$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.03, 8.03, 8.03); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 6.96 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.925 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 13.1 W/kg
SAR(1 g) = 5.99 W/kg; SAR(10 g) = 2.47 W/kg
 Maximum value of SAR (measured) = 8.13 W/kg

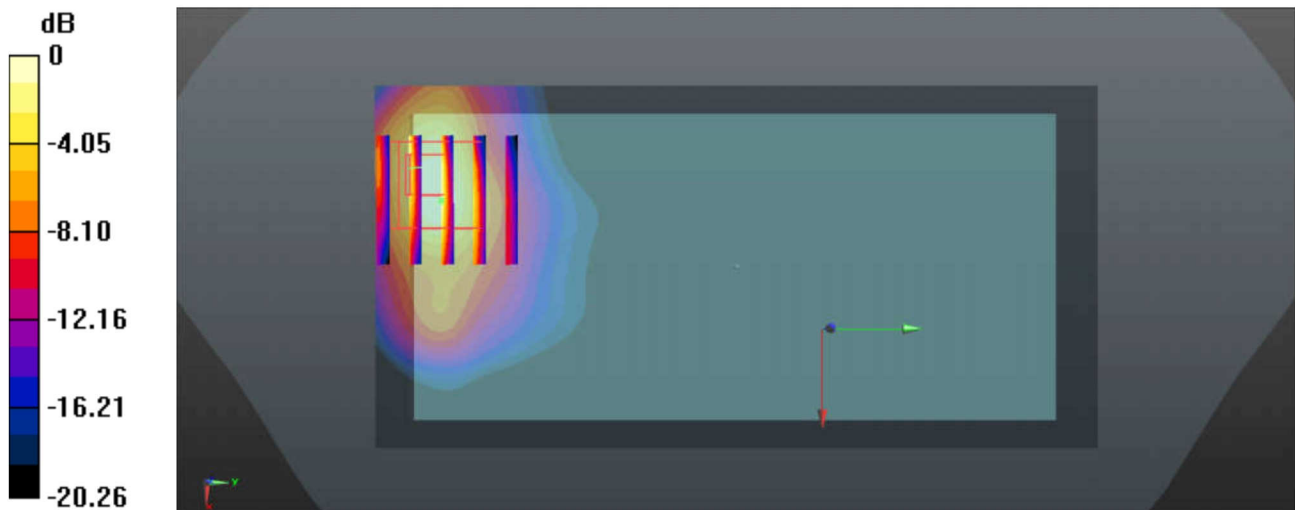

0 dB = 6.96 W/kg = 8.43 dBW/kg

52_CDMA2000 BC0_RTAP153.6bps_Back_0mm_Ch777


Communication System: UID 0, CDMA2000 (0); Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium: MSL_835 Medium parameters used : $f = 848.31$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 55.029$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch777/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 11.6 W/kg

Ch777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.83 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 15.1 W/kg
SAR(1 g) = 5.5 W/kg; SAR(10 g) = 2.65 W/kg
Maximum value of SAR (measured) = 9.67 W/kg

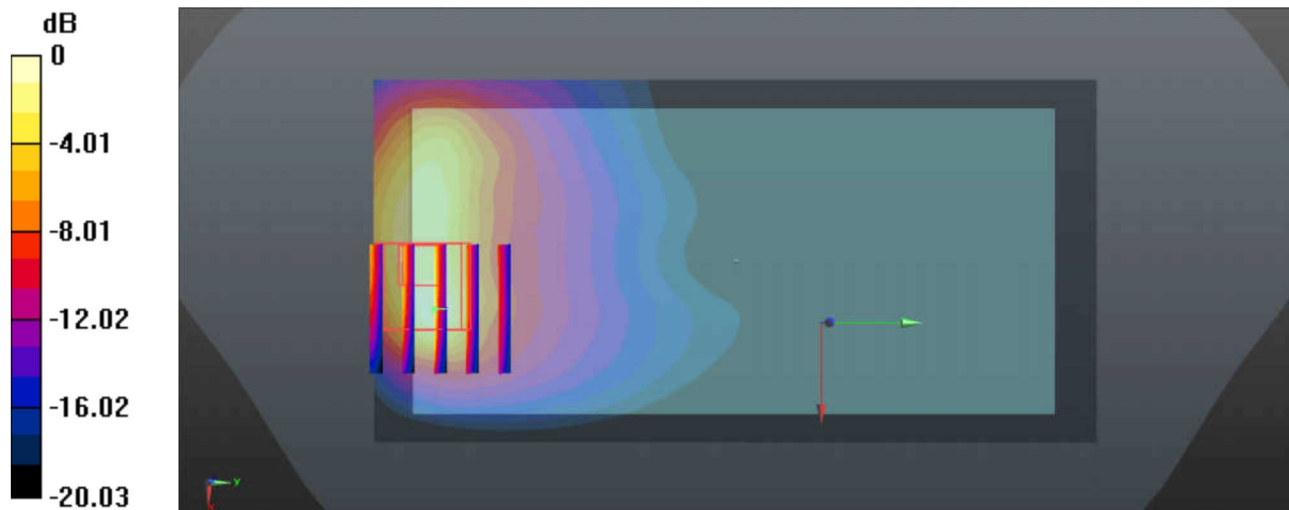

0 dB = 11.6 W/kg = 10.64 dBW/kg

53_CDMA2000 BC1_RTAP153.6bps_Back_0mm_Ch1175


Communication System: UID 0, CDMA2000 (0); Frequency: 1908.75 MHz; Duty Cycle: 1:1
 Medium: MSL_1900 Medium parameters used: $f = 1908.75$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.799$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.03, 8.03, 8.03); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1175/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 6.78 W/kg

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 2.663 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 9.98 W/kg
SAR(1 g) = 4.92 W/kg; SAR(10 g) = 2.12 W/kg
 Maximum value of SAR (measured) = 7.55 W/kg

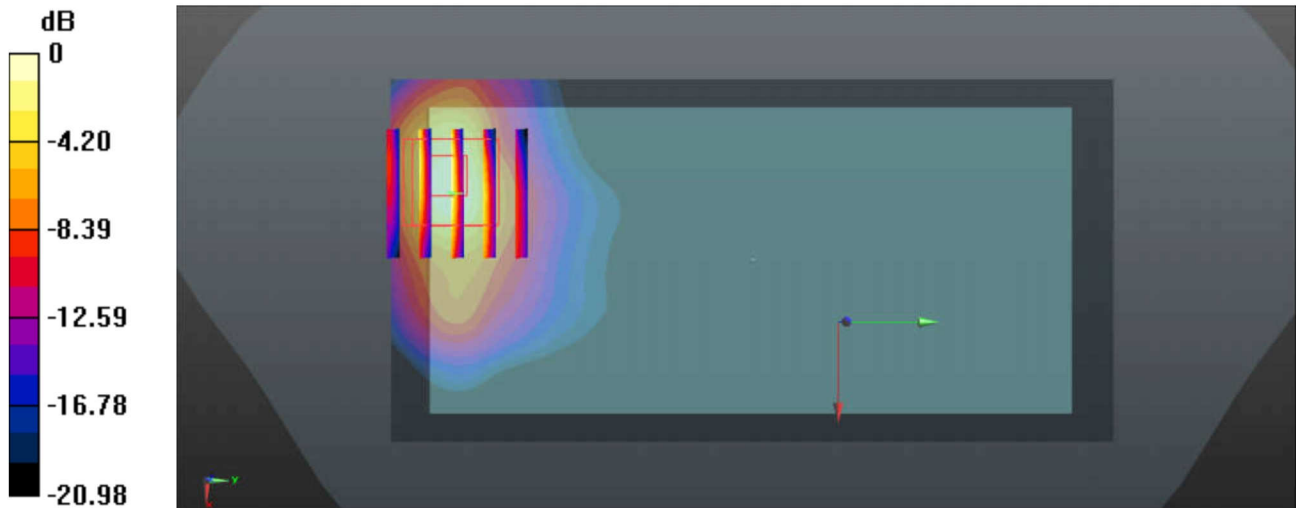

0 dB = 6.78 W/kg = 8.31 dBW/kg