



FCC RADIO TEST REPORT

FCC ID : IHDT56XN2
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT1965-2
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL
60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL
60654 USA
Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Sep. 04, 2018 and testing was started from Sep. 16, 2018 and completed on Sep. 28, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Joseph Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report3

Summary of Test Result4

1 General Description5

 1.1 Product Feature of Equipment Under Test5

 1.2 Modification of EUT6

 1.3 Product Specification of Equipment Under Test7

 1.4 Modification of EUT7

 1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator8

 1.6 Testing Location9

 1.7 Applicable Standards9

2 Test Configuration of Equipment Under Test10

 2.1 Test Mode10

 2.2 Connection Diagram of Test System11

 2.3 Support Unit used in test configuration11

 2.4 Measurement Results Explanation Example11

 2.5 Frequency List of Low/Middle/High Channels12

3 Conducted Test Result13

 3.1 Measuring Instruments13

 3.2 Conducted Output Power and ERP/EIRP14

 3.3 Peak-to-Average Ratio15

 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement16

 3.5 Conducted Band Edge17

 3.6 Conducted Spurious Emission18

 3.7 Frequency Stability19

4 Radiated Test Items20

 4.1 Measuring Instruments20

 4.2 Test Setup20

 4.3 Test Result of Radiated Test20

 4.4 Field Strength of Spurious Radiation Measurement21

5 List of Measuring Equipment22

6 Uncertainty of Evaluation24

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of ERP/EIRP and Radiated Test



History of this test report

Report No.	Version	Description	Issued Date
FG890437A	01	Initial issue of report	Oct. 04, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power		
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
3.7	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
	§2.1055 §24.235 §27.54			-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation	Pass	Under limit 20.98 dB at 5640.000 MHz

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1965-2
Sample 1	Dual SIM
Sample 2	Single SIM
FCC ID	IHDT56XN2
IMEI Code	Conducted : IMEI 1: 355577090032572 IMEI 2: 355577090032580 Radiation : IMEI 1: 355577090033513 IMEI 2: 355577090033521
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/GNSS/NFC/FM WLAN 11b/g/n/ac HT20/VHT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DVT1-B
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.



Accessory List	
AC Adapter 1	Brand Name : Motorola
	Model Name : SC-31
	Manufacturer : Salom
AC Adapter 1	Brand Name : Motorola
	Model Name : SC-32
	Manufacturer : Salom
AC Adapter 1	Brand Name : Motorola
	Model Name : SC-37
	Manufacturer : Salom
AC Adapter 1	Brand Name : Motorola
	Model Name : SC-36
	Manufacturer : Salom
AC Adapter 1	Brand Name : Motorola
	Model Name : SC-32
	Manufacturer : Salom
AC Adapter 2	Brand Name : Motorola
	Model Name : SC-31
	Manufacturer : Acbel
AC Adapter 2	Brand Name : Motorola
	Model Name : SC-32
	Manufacturer : Acbel
AC Adapter 2	Brand Name : Motorola
	Model Name : SC-36
	Manufacturer : Acbel
AC Adapter 2	Brand Name : Motorola
	Model Name : SC-37
	Manufacturer : Acbel
Battery	Brand Name : Motorola
	Model Name : JG40
	Manufacturer : Amperex
Earphone	Brand Name : Motorola
	Model Name : SH38C37773
	Manufacturer : Lyand
USB Cable 1	Brand Name : Cabletech
	Model Name : SC18C37155
USB Cable 2	Brand Name : Luxshare
	Model Name : SC18C37156
USB Cable 3	Brand Name : Saibao
	Model Name : SC18C37157

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8 MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 33.22 dBm 1900: 29.89 dBm WCDMA: Band V: 24.29 dBm Band II: 22.87 dBm Band IV: 23.05 dBm
Antenna Type	Fixed Internal Antenna
Antenna Gain	Cellular Band: -3.4 dBi PCS Band: -2.4 dBi AWS Band: -1.7 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GSM	GMSK	0.5848	0.0191 ppm	245KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1294	0.0191 ppm	246KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0748	0.0155 ppm	4M16F9W
Part 24	1850.2 ~1909.8	GSM1900 GSM	GMSK	0.5610	0.0048 ppm	244KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.2168	0.0064 ppm	249KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.1114	0.0059 ppm	4M14F9W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.1365	0.0260 ppm	4M14F9W



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Cellular Band and AWS Band, and Z plane for PCS Band) were recorded in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE Class 8 Link	■ GSM Link ■ EDGE Class 8 Link
GSM 1900	■ GSM Link ■ EDGE Class 8 Link	■ GSM Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Adapter 1, USB Cable 1 Type C, and Sample 1.

2.2 Connection Diagram of Test System

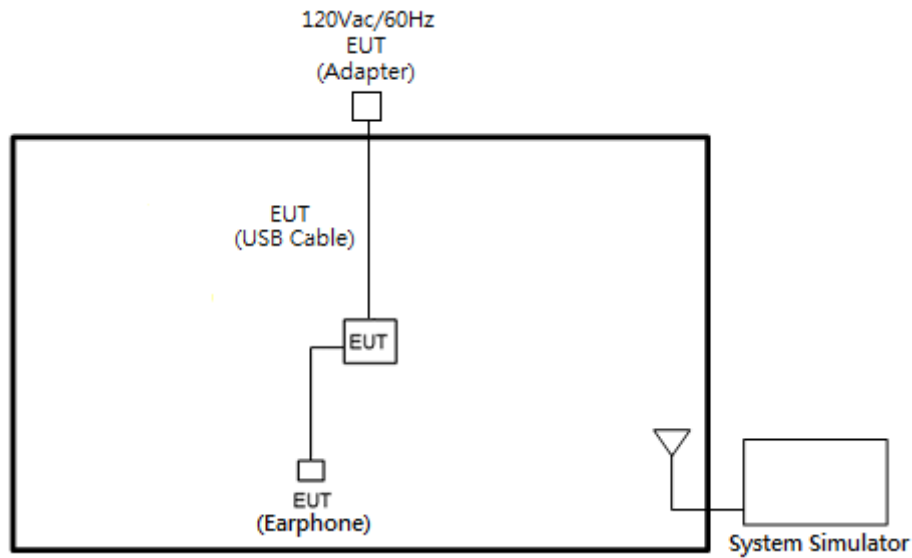

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

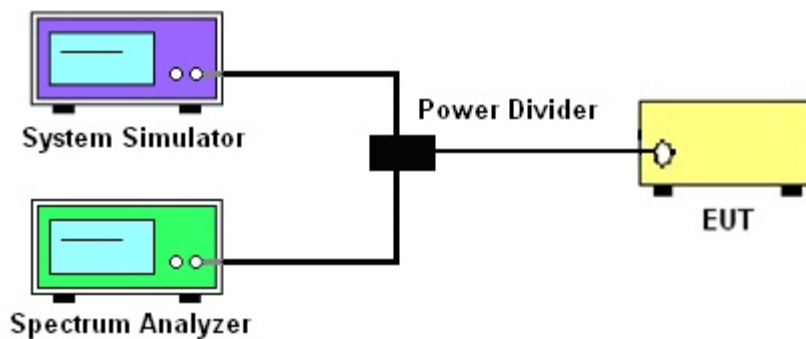

3.1.4 Frequency Stability

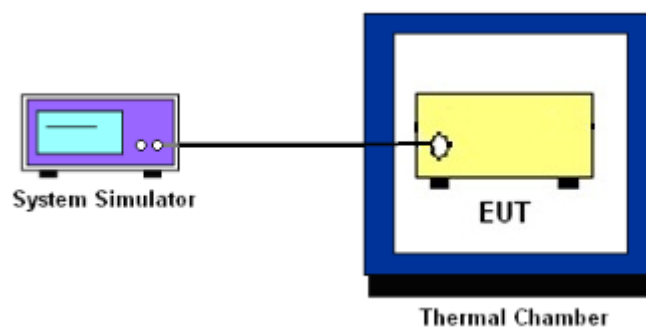

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated test from 30MHz to 1GHz

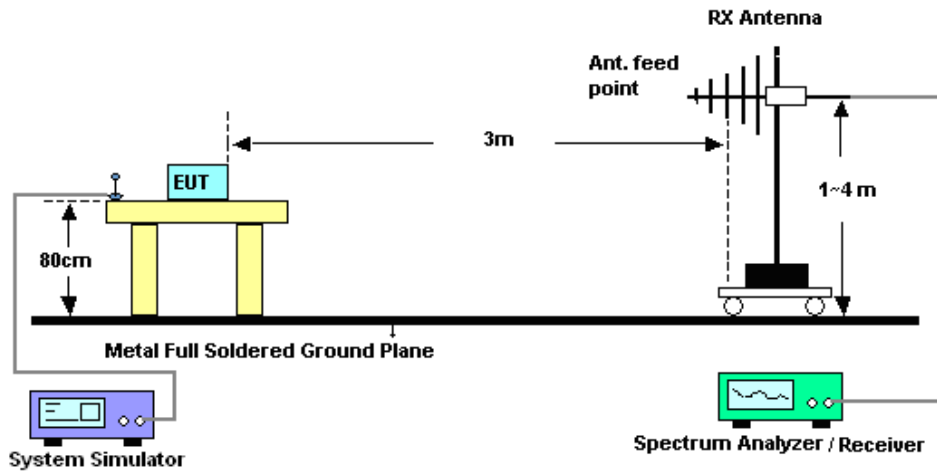

For radiated test above 1GHz

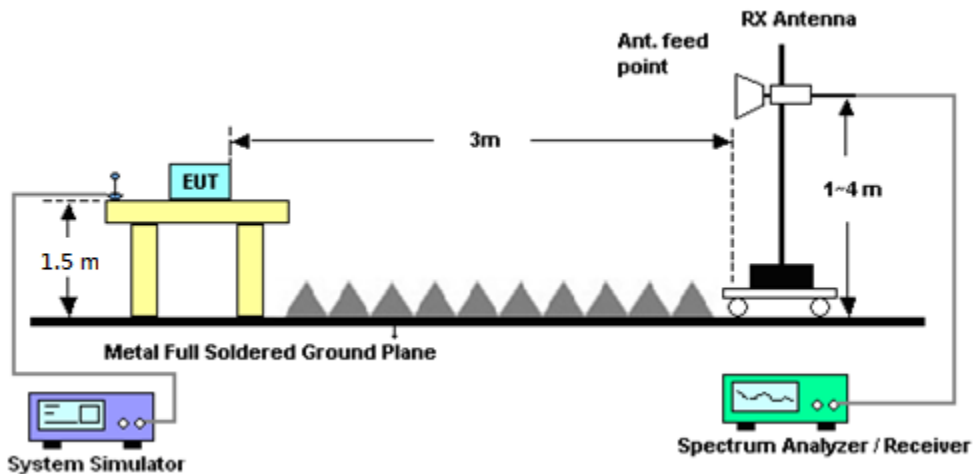

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 13, 2017	Sep. 16, 2018~ Sep. 28, 2018	Oct. 12, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 07, 2017	Sep. 16, 2018~ Sep. 28, 2018	Nov. 06, 2018	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃~90℃	Aug. 29, 2018	Sep. 16, 2018~ Sep. 28, 2018	Aug. 28, 2019	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 06, 2017	Sep. 16, 2018~ Sep. 28, 2018	Oct. 05, 2018	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20 dB 25WSM A Directional Coupler	#B	1G~18GHz	Dec. 04, 2017	Sep. 16, 2018~ Sep. 28, 2018	Dec. 03, 2018	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Sep. 18, 2018~ Sep. 20, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00211469	1GHz ~ 18GHz	Aug. 06, 2018	Sep. 18, 2018~ Sep. 20, 2018	Aug. 05, 2019	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00066583	1GHz ~ 18GHz	Aug. 06, 2018	Sep. 18, 2018~ Sep. 20, 2018	Aug. 05, 2019	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Sep. 18, 2018~ Sep. 20, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	Sep. 18, 2018~ Sep. 20, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2018	Sep. 18, 2018~ Sep. 20, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9KHz~30MHz	Jan. 02, 2018	Sep. 18, 2018~ Sep. 20, 2018	Jan. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 27, 2018	Sep. 18, 2018~ Sep. 20, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 27, 2018	Sep. 18, 2018~ Sep. 20, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 27, 2018	Sep. 18, 2018~ Sep. 20, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Sep. 18, 2018~ Sep. 20, 2018	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF78020836 8	Control Ant Mast	N/A	Sep. 18, 2018~ Sep. 20, 2018	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Sep. 18, 2018~ Sep. 20, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Sep. 18, 2018~ Sep. 20, 2018	N/A	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Sep. 18, 2018~ Sep. 20, 2018	Jul. 15, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917025 1	18GHz- 40GHz	Nov. 10, 2017	Sep. 18, 2018~ Sep. 20, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MX E)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Sep. 18, 2018~ Sep. 20, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May. 22, 2018	Sep. 18, 2018~ Sep. 20, 2018	May. 21, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8 -24	8050400465 6H	N/A	N/A	Sep. 18, 2018~ Sep. 20, 2018	N/A	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 07, 2017	Sep. 18, 2018~ Sep. 20, 2018	Dec. 06, 2018	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 21, 2017	Sep. 18, 2018~ Sep. 20, 2018	Nov. 20, 2018	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.05
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.95
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.03	32.62	33.22	29.80	29.86	29.89
GPRS class 8	32.01	32.61	33.21	29.79	29.85	29.88
GPRS class 10	28.64	29.27	29.87	26.39	26.33	26.30
GPRS class 11	26.71	27.30	27.82	24.43	24.32	24.22
GPRS class 12	25.19	25.77	26.30	23.08	22.92	22.90
EGPRS class 8	26.36	26.15	26.24	25.14	25.17	25.33
EGPRS class 10	26.67	26.52	26.55	25.60	25.63	25.76
EGPRS class 11	25.23	25.17	25.24	24.22	24.28	24.41
EGPRS class 12	23.78	23.72	23.75	22.93	22.91	23.06

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	24.29	24.18	24.07	22.82	22.83	22.87
HSDPA Subtest-1	22.95	22.81	22.69	21.63	21.60	21.60
HSDPA Subtest-2	22.95	22.88	22.71	21.62	21.64	21.62
HSDPA Subtest-3	22.48	22.36	22.27	21.11	21.14	21.14
HSDPA Subtest-4	22.44	22.36	22.21	21.15	21.18	21.15
HSUPA Subtest-1	22.93	22.81	22.85	21.59	21.61	21.58
HSUPA Subtest-2	20.88	20.82	20.86	19.58	19.59	19.62
HSUPA Subtest-3	21.91	21.78	21.80	20.64	20.63	20.57
HSUPA Subtest-4	20.89	20.81	20.85	19.56	19.58	19.57
HSUPA Subtest-5	22.90	22.80	22.86	21.60	21.60	21.60

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.05	22.96	22.87
HSDPA Subtest-1	21.80	21.68	21.56
HSDPA Subtest-2	21.79	21.72	21.58
HSDPA Subtest-3	21.28	21.21	21.02
HSDPA Subtest-4	21.30	21.21	21.07
HSUPA Subtest-1	21.62	21.65	21.59
HSUPA Subtest-2	19.70	19.78	19.54
HSUPA Subtest-3	20.60	20.65	20.43
HSUPA Subtest-4	19.64	19.59	19.63
HSUPA Subtest-5	21.67	21.63	21.60









A1. GSM

Peak-to-Average Ratio


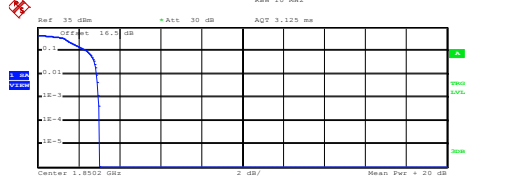
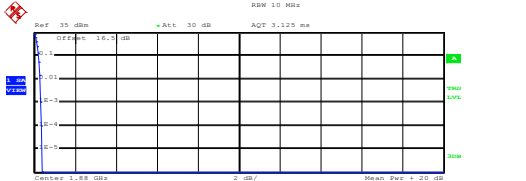
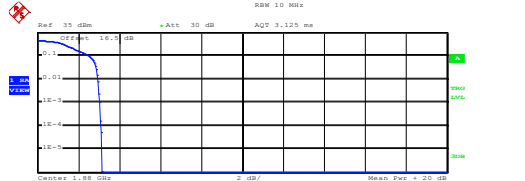
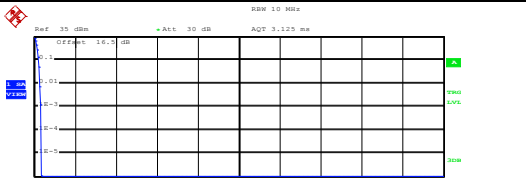
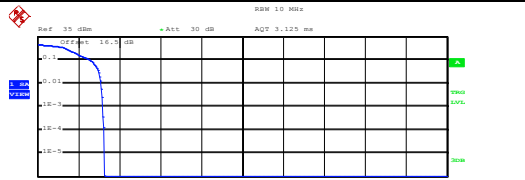
Mode	GSM850	GSM850	Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.44	3.32	PASS
Middle CH	0.44	3.32	
Highest CH	0.44	3.20	

Mode	GSM1900	GSM1900	Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.32	2.96	PASS
Middle CH	0.32	3.04	
Highest CH	0.32	3.20	

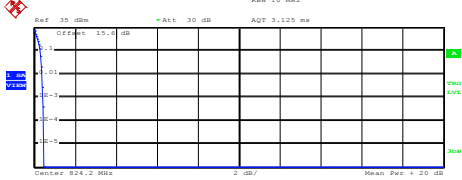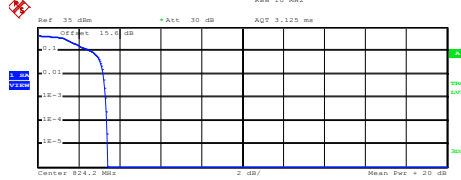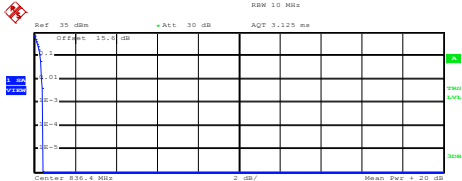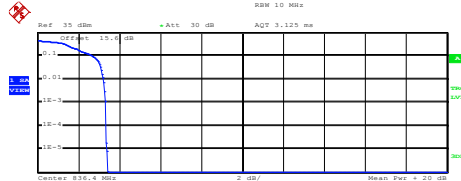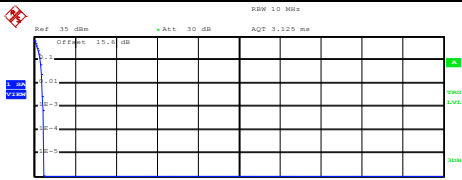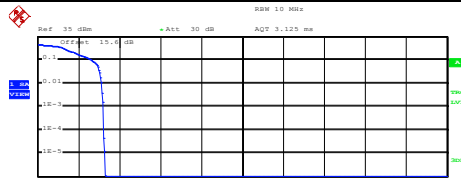

GSM850 (GSM)	GSM850 (EDGE class 8)																
<p align="center">Lowest Channel</p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Center: 824.2 MHz, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 27.75 dBm Peak: 28.20 dBm Crest: 0.45 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.40 dB</td></tr> <tr><td>.1 %</td><td>0.44 dB</td></tr> <tr><td>.01 %</td><td>0.48 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:52:39</p>	10 %	0.28 dB	1 %	0.40 dB	.1 %	0.44 dB	.01 %	0.48 dB	<p align="center">Lowest Channel</p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Center: 824.2 MHz, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 23.46 dBm Peak: 26.86 dBm Crest: 3.40 dB</p> <table border="1"> <tr><td>10 %</td><td>2.64 dB</td></tr> <tr><td>1 %</td><td>3.20 dB</td></tr> <tr><td>.1 %</td><td>3.32 dB</td></tr> <tr><td>.01 %</td><td>3.40 dB</td></tr> </table> <p>Date: 22.SEP.2018 09:06:07</p>	10 %	2.64 dB	1 %	3.20 dB	.1 %	3.32 dB	.01 %	3.40 dB
10 %	0.28 dB																
1 %	0.40 dB																
.1 %	0.44 dB																
.01 %	0.48 dB																
10 %	2.64 dB																
1 %	3.20 dB																
.1 %	3.32 dB																
.01 %	3.40 dB																
<p align="center">Middle Channel</p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Center: 836.4 MHz, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 28.34 dBm Peak: 28.76 dBm Crest: 0.43 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.36 dB</td></tr> <tr><td>.1 %</td><td>0.44 dB</td></tr> <tr><td>.01 %</td><td>0.44 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:53:03</p>	10 %	0.28 dB	1 %	0.36 dB	.1 %	0.44 dB	.01 %	0.44 dB	<p align="center">Middle Channel</p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Center: 836.4 MHz, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 23.93 dBm Peak: 27.35 dBm Crest: 3.42 dB</p> <table border="1"> <tr><td>10 %</td><td>2.72 dB</td></tr> <tr><td>1 %</td><td>3.24 dB</td></tr> <tr><td>.1 %</td><td>3.32 dB</td></tr> <tr><td>.01 %</td><td>3.36 dB</td></tr> </table> <p>Date: 22.SEP.2018 09:06:28</p>	10 %	2.72 dB	1 %	3.24 dB	.1 %	3.32 dB	.01 %	3.36 dB
10 %	0.28 dB																
1 %	0.36 dB																
.1 %	0.44 dB																
.01 %	0.44 dB																
10 %	2.72 dB																
1 %	3.24 dB																
.1 %	3.32 dB																
.01 %	3.36 dB																
<p align="center">Highest Channel</p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Center: 848.8 MHz, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 29.51 dBm Peak: 29.96 dBm Crest: 0.45 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.40 dB</td></tr> <tr><td>.1 %</td><td>0.44 dB</td></tr> <tr><td>.01 %</td><td>0.48 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:53:17</p>	10 %	0.28 dB	1 %	0.40 dB	.1 %	0.44 dB	.01 %	0.48 dB	<p align="center">Highest Channel</p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Center: 848.8 MHz, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.84 dBm Peak: 28.13 dBm Crest: 3.29 dB</p> <table border="1"> <tr><td>10 %</td><td>2.64 dB</td></tr> <tr><td>1 %</td><td>3.12 dB</td></tr> <tr><td>.1 %</td><td>3.20 dB</td></tr> <tr><td>.01 %</td><td>3.24 dB</td></tr> </table> <p>Date: 22.SEP.2018 09:06:46</p>	10 %	2.64 dB	1 %	3.12 dB	.1 %	3.20 dB	.01 %	3.24 dB
10 %	0.28 dB																
1 %	0.40 dB																
.1 %	0.44 dB																
.01 %	0.48 dB																
10 %	2.64 dB																
1 %	3.12 dB																
.1 %	3.20 dB																
.01 %	3.24 dB																




GSM1900 (GSM)	GSM1900 (EDGE class 8)																
<p align="center">Lowest Channel</p>  <p>Center 1.8502 GHz 2 dB/ Mean Pwr = 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.72 dBm Peak 20.08 dBm Crest 0.36 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.28 dB</td></tr> <tr><td>.1 %</td><td>0.32 dB</td></tr> <tr><td>.01 %</td><td>0.36 dB</td></tr> </table> <p>Date: 22.SEP.2018 09:34:39</p>	10 %	0.20 dB	1 %	0.28 dB	.1 %	0.32 dB	.01 %	0.36 dB	<p align="center">Lowest Channel</p>  <p>Center 1.8502 GHz 2 dB/ Mean Pwr = 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 15.22 dBm Peak 18.25 dBm Crest 3.03 dB</p> <table border="1"> <tr><td>10 %</td><td>2.40 dB</td></tr> <tr><td>1 %</td><td>2.88 dB</td></tr> <tr><td>.1 %</td><td>2.96 dB</td></tr> <tr><td>.01 %</td><td>3.04 dB</td></tr> </table> <p>Date: 22.SEP.2018 10:03:57</p>	10 %	2.40 dB	1 %	2.88 dB	.1 %	2.96 dB	.01 %	3.04 dB
10 %	0.20 dB																
1 %	0.28 dB																
.1 %	0.32 dB																
.01 %	0.36 dB																
10 %	2.40 dB																
1 %	2.88 dB																
.1 %	2.96 dB																
.01 %	3.04 dB																
<p align="center">Middle Channel</p>  <p>Center 1.88 GHz 2 dB/ Mean Pwr = 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.54 dBm Peak 22.91 dBm Crest 0.36 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.28 dB</td></tr> <tr><td>.1 %</td><td>0.32 dB</td></tr> <tr><td>.01 %</td><td>0.36 dB</td></tr> </table> <p>Date: 22.SEP.2018 09:34:58</p>	10 %	0.20 dB	1 %	0.28 dB	.1 %	0.32 dB	.01 %	0.36 dB	<p align="center">Middle Channel</p>  <p>Center 1.88 GHz 2 dB/ Mean Pwr = 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 17.30 dBm Peak 20.44 dBm Crest 3.13 dB</p> <table border="1"> <tr><td>10 %</td><td>2.52 dB</td></tr> <tr><td>1 %</td><td>2.96 dB</td></tr> <tr><td>.1 %</td><td>3.04 dB</td></tr> <tr><td>.01 %</td><td>3.12 dB</td></tr> </table> <p>Date: 22.SEP.2018 10:04:16</p>	10 %	2.52 dB	1 %	2.96 dB	.1 %	3.04 dB	.01 %	3.12 dB
10 %	0.20 dB																
1 %	0.28 dB																
.1 %	0.32 dB																
.01 %	0.36 dB																
10 %	2.52 dB																
1 %	2.96 dB																
.1 %	3.04 dB																
.01 %	3.12 dB																
<p align="center">Highest Channel</p>  <p>Center 1.9098 GHz 2 dB/ Mean Pwr = 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.91 dBm Peak 25.23 dBm Crest 0.33 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.28 dB</td></tr> <tr><td>.1 %</td><td>0.32 dB</td></tr> <tr><td>.01 %</td><td>0.36 dB</td></tr> </table> <p>Date: 22.SEP.2018 09:35:15</p>	10 %	0.20 dB	1 %	0.28 dB	.1 %	0.32 dB	.01 %	0.36 dB	<p align="center">Highest Channel</p>  <p>Center 1.9098 GHz 2 dB/ Mean Pwr = 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.64 dBm Peak 22.91 dBm Crest 3.27 dB</p> <table border="1"> <tr><td>10 %</td><td>2.56 dB</td></tr> <tr><td>1 %</td><td>3.08 dB</td></tr> <tr><td>.1 %</td><td>3.20 dB</td></tr> <tr><td>.01 %</td><td>3.24 dB</td></tr> </table> <p>Date: 22.SEP.2018 10:04:34</p>	10 %	2.56 dB	1 %	3.08 dB	.1 %	3.20 dB	.01 %	3.24 dB
10 %	0.20 dB																
1 %	0.28 dB																
.1 %	0.32 dB																
.01 %	0.36 dB																
10 %	2.56 dB																
1 %	3.08 dB																
.1 %	3.20 dB																
.01 %	3.24 dB																




26dB Bandwidth

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.314	0.305
Middle CH	0.306	0.292
Highest CH	0.307	0.304

Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.311	0.303
Middle CH	0.290	0.300
Highest CH	0.313	0.301

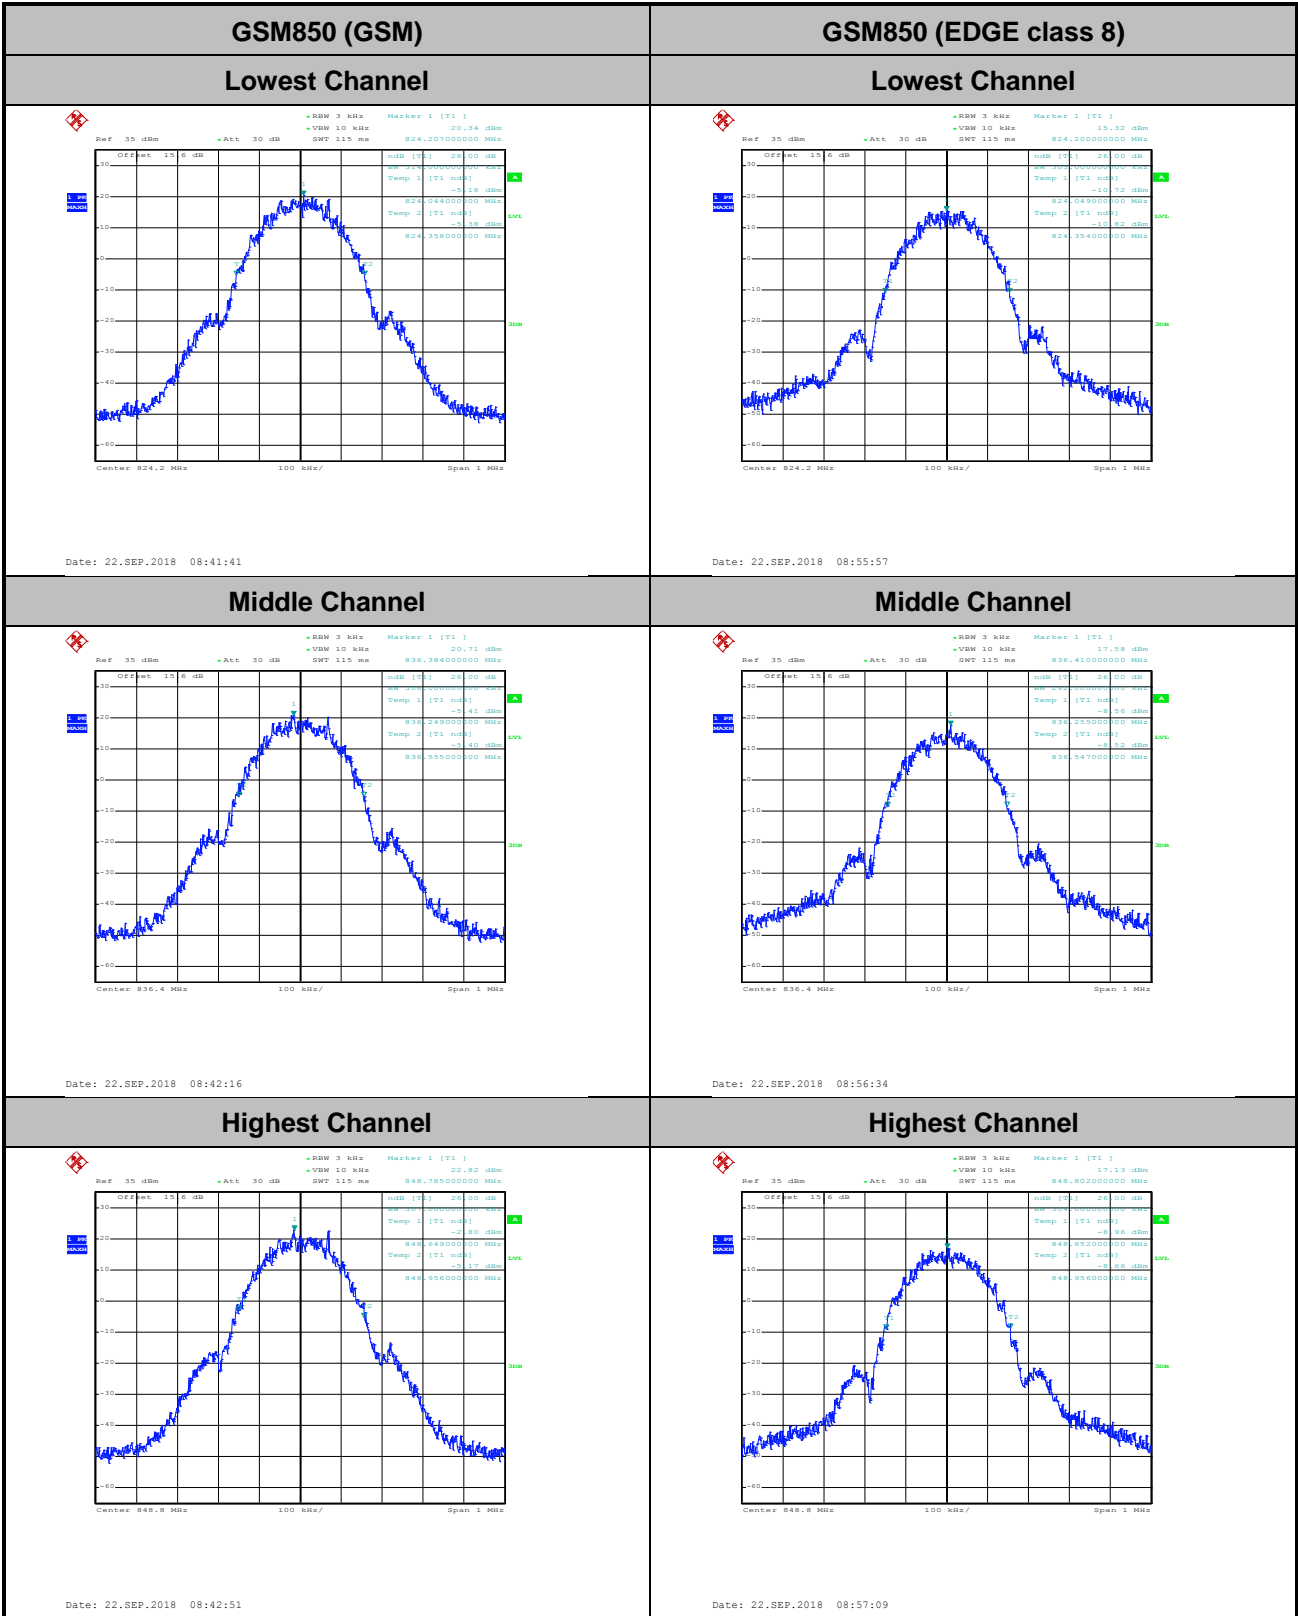

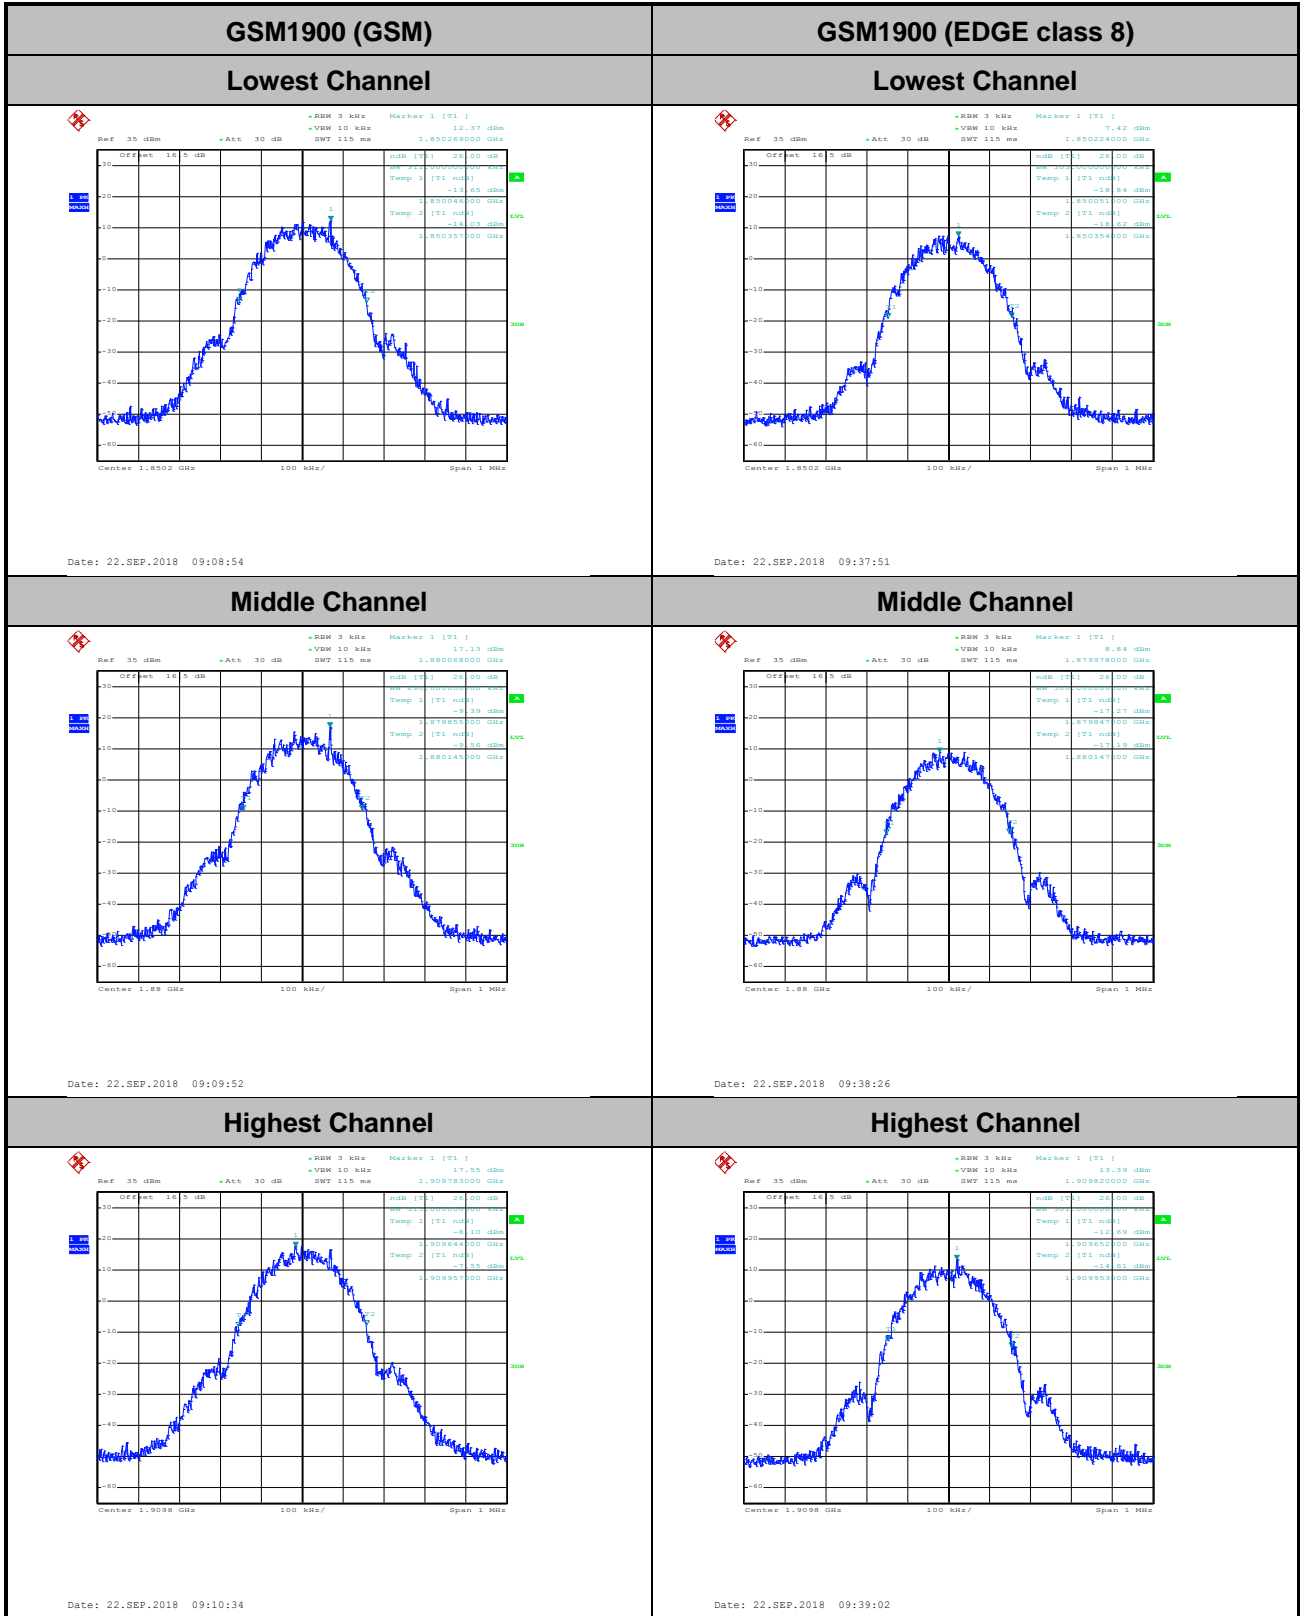





Occupied Bandwidth

Mode	GSM850 : 99% OBW(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.243	0.246
Middle CH	0.243	0.244
Highest CH	0.245	0.245


Mode	GSM1900 : 99% OBW(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.243	0.249
Middle CH	0.244	0.245
Highest CH	0.244	0.245

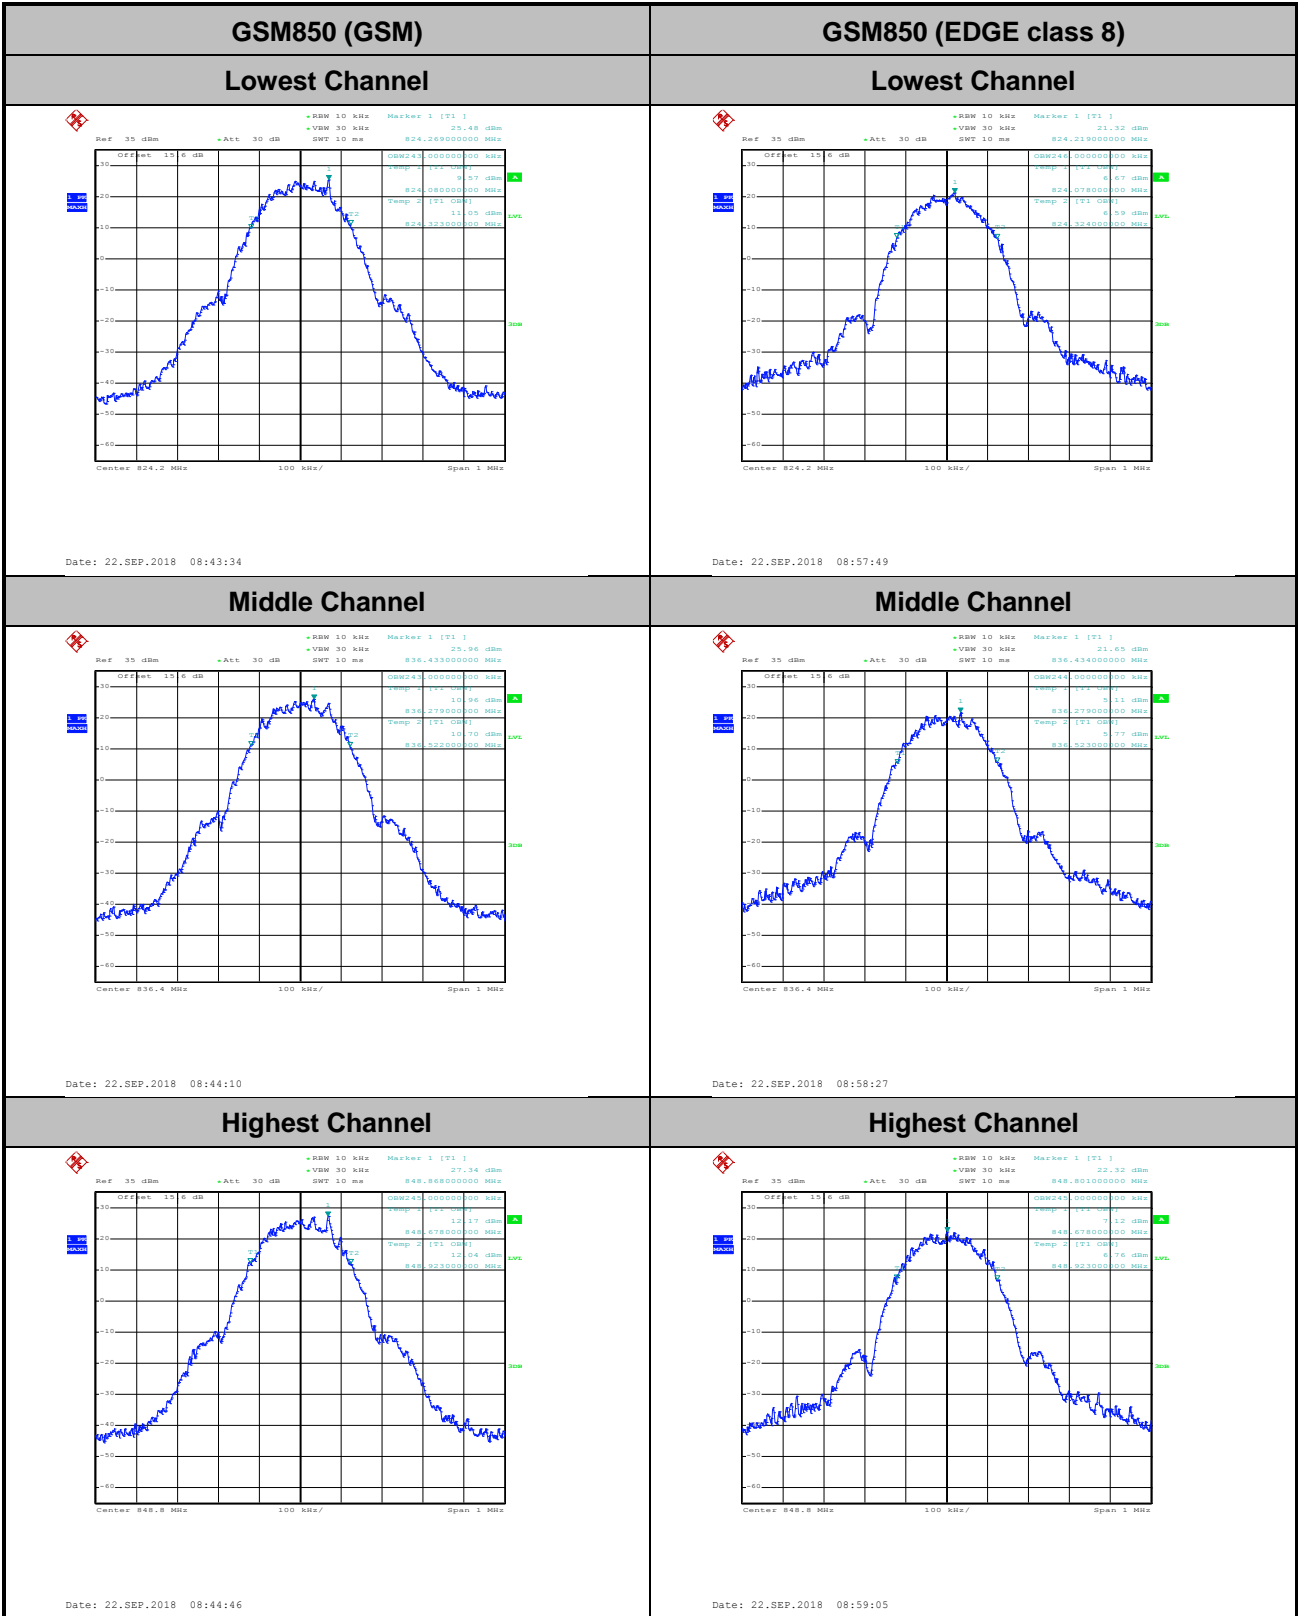

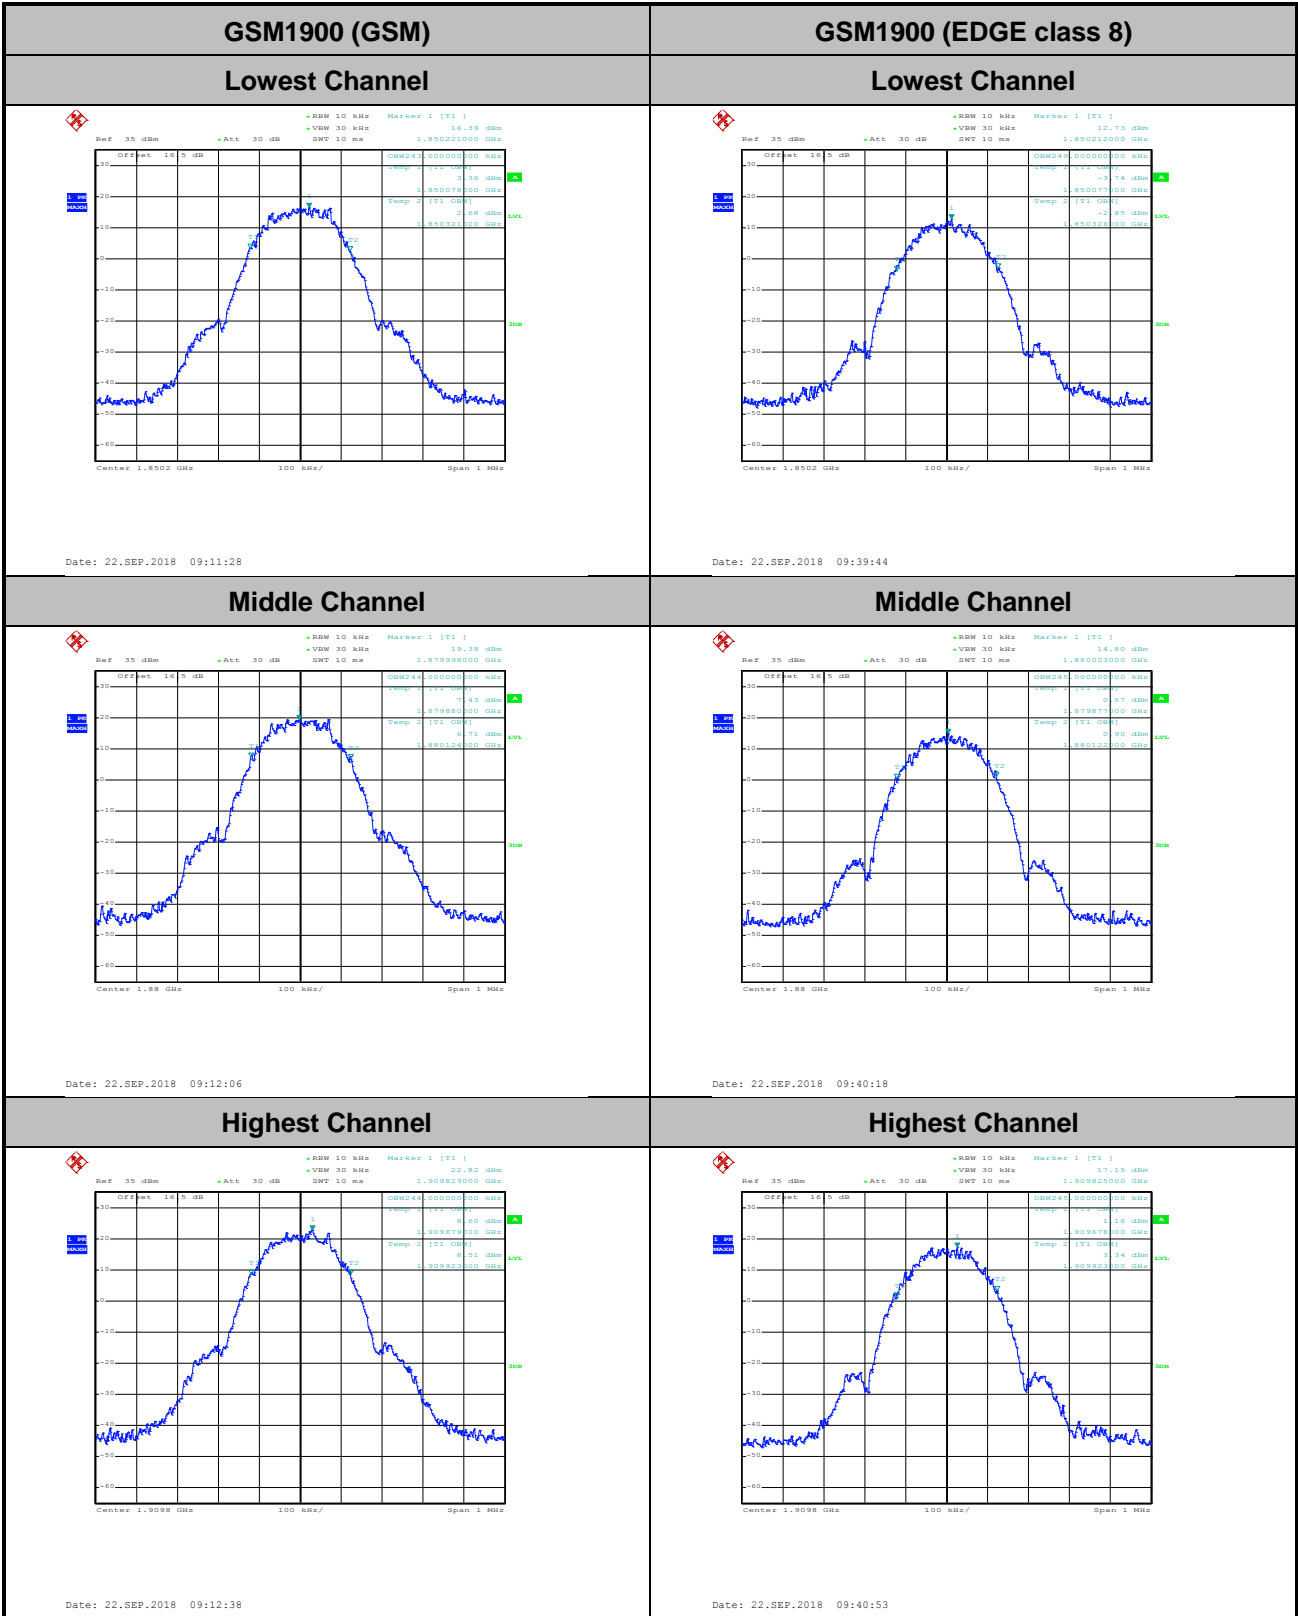



Conducted Band Edge


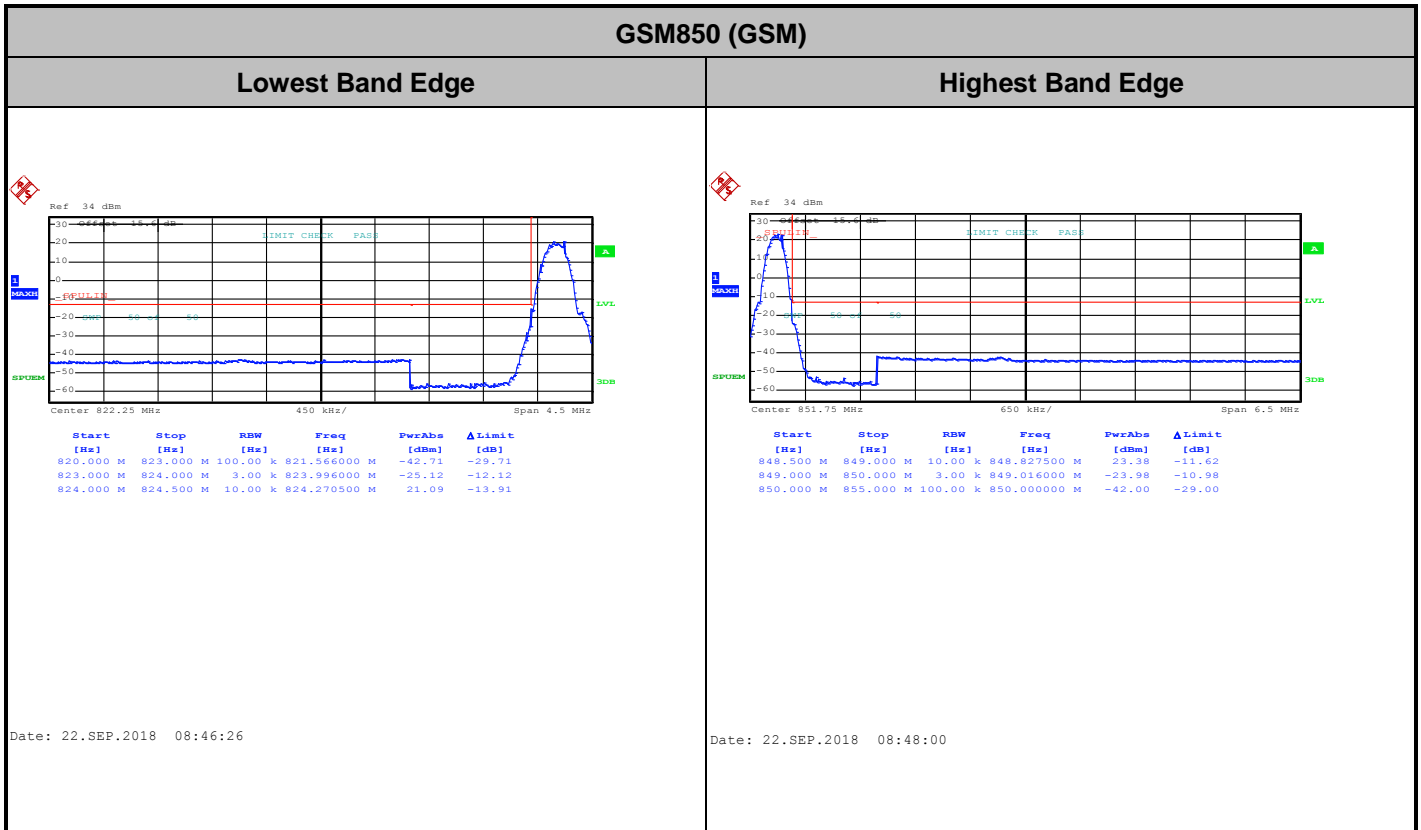




GSM850 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

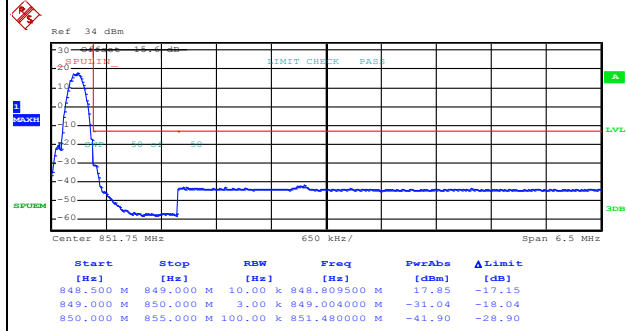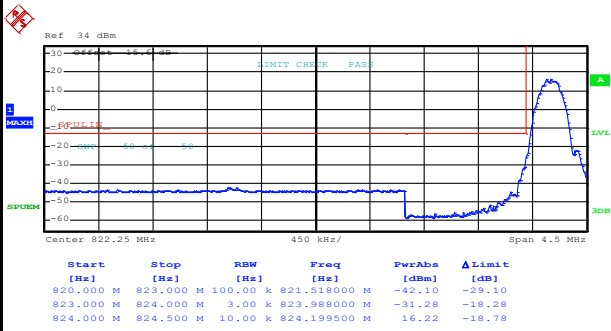

Date: 22.SEP.2018 09:00:46



Date: 22.SEP.2018 09:02:46



GSM1900 (GSM)

Lowest Band Edge

Highest Band Edge

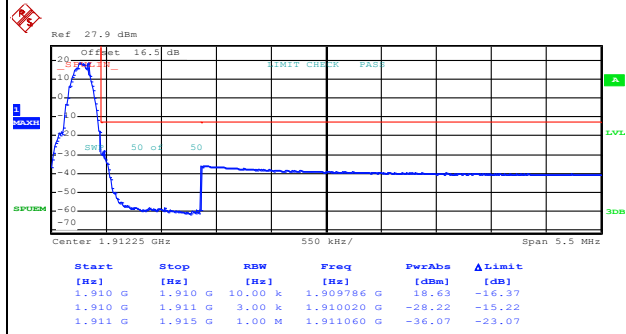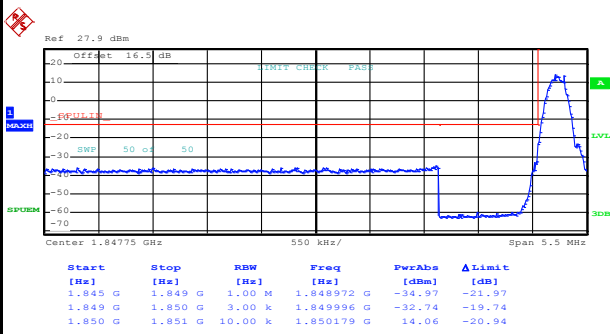

Date: 22.SEP.2018 09:14:19



Date: 22.SEP.2018 09:30:47



GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge





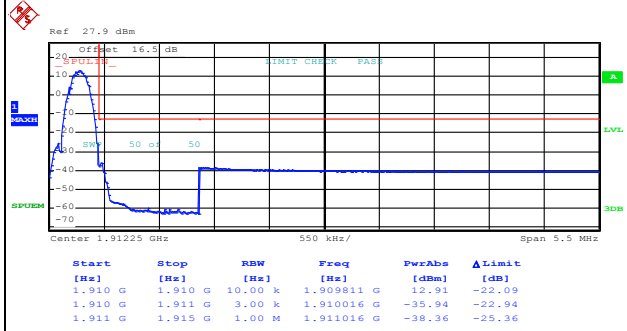
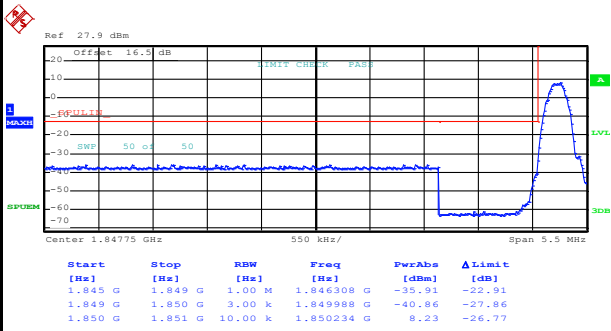


Date: 22.SEP.2018 09:42:47

Date: 22.SEP.2018 09:44:21




Conducted Spurious Emission

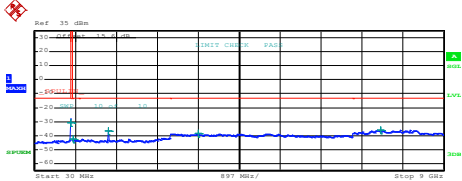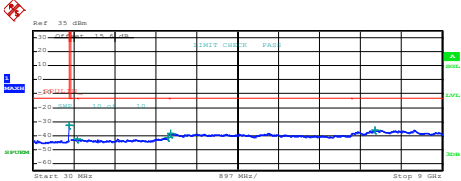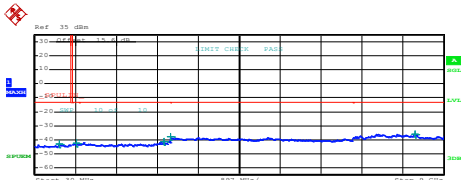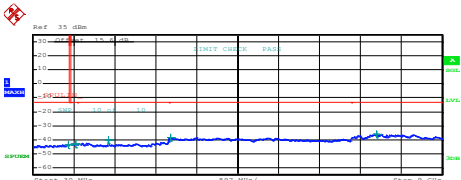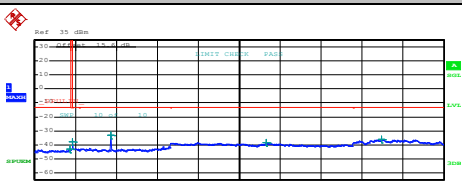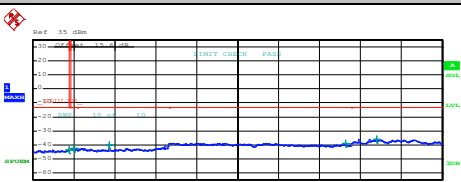GSM850 (GSM)	GSM850 (EDGE class 8)																																																																								
Lowest Channel	Lowest Channel																																																																								
 <table border="1" data-bbox="207 660 670 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>816,802500 M</td> <td>-30.87</td> <td>-17.87</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>876,387500 M</td> <td>-42.29</td> <td>-29.29</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,648500 G</td> <td>-36.61</td> <td>-23.61</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,610000 G</td> <td>-38.56</td> <td>-25.56</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,618000 G</td> <td>-36.31</td> <td>-23.31</td> </tr> </tbody> </table> <p>Date: 22.SEP.2018 08:49:06</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35,000 M	820,000 M	1,000 M	816,802500 M	-30.87	-17.87	855,000 M	1,000 G	1,000 M	876,387500 M	-42.29	-29.29	1,000 G	3,000 G	1,000 M	1,648500 G	-36.61	-23.61	3,000 G	7,000 G	1,000 M	3,610000 G	-38.56	-25.56	7,000 G	9,000 G	1,000 M	7,618000 G	-36.31	-23.31	 <table border="1" data-bbox="858 660 1321 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>816,802500 M</td> <td>-32.75</td> <td>-19.75</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>876,695010 M</td> <td>-42.70</td> <td>-29.70</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,996000 G</td> <td>-41.11</td> <td>-28.11</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,040000 G</td> <td>-38.19</td> <td>-25.19</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,530000 G</td> <td>-35.93</td> <td>-22.93</td> </tr> </tbody> </table> <p>Date: 22.SEP.2018 09:03:55</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35,000 M	820,000 M	1,000 M	816,802500 M	-32.75	-19.75	855,000 M	1,000 G	1,000 M	876,695010 M	-42.70	-29.70	1,000 G	3,000 G	1,000 M	2,996000 G	-41.11	-28.11	3,000 G	7,000 G	1,000 M	3,040000 G	-38.19	-25.19	7,000 G	9,000 G	1,000 M	7,530000 G	-35.93	-22.93
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35,000 M	820,000 M	1,000 M	816,802500 M	-30.87	-17.87																																																																				
855,000 M	1,000 G	1,000 M	876,387500 M	-42.29	-29.29																																																																				
1,000 G	3,000 G	1,000 M	1,648500 G	-36.61	-23.61																																																																				
3,000 G	7,000 G	1,000 M	3,610000 G	-38.56	-25.56																																																																				
7,000 G	9,000 G	1,000 M	7,618000 G	-36.31	-23.31																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35,000 M	820,000 M	1,000 M	816,802500 M	-32.75	-19.75																																																																				
855,000 M	1,000 G	1,000 M	876,695010 M	-42.70	-29.70																																																																				
1,000 G	3,000 G	1,000 M	2,996000 G	-41.11	-28.11																																																																				
3,000 G	7,000 G	1,000 M	3,040000 G	-38.19	-25.19																																																																				
7,000 G	9,000 G	1,000 M	7,530000 G	-35.93	-22.93																																																																				
Middle Channel	Middle Channel																																																																								
 <table border="1" data-bbox="207 1176 670 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>568,977500 M</td> <td>-43.20</td> <td>-30.20</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>940,006250 M</td> <td>-42.25</td> <td>-29.25</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,857500 G</td> <td>-41.37</td> <td>-28.37</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,016000 G</td> <td>-37.75</td> <td>-24.75</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>6,368000 G</td> <td>-35.98</td> <td>-22.98</td> </tr> </tbody> </table> <p>Date: 22.SEP.2018 08:49:59</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35,000 M	820,000 M	1,000 M	568,977500 M	-43.20	-30.20	855,000 M	1,000 G	1,000 M	940,006250 M	-42.25	-29.25	1,000 G	3,000 G	1,000 M	2,857500 G	-41.37	-28.37	3,000 G	7,000 G	1,000 M	3,016000 G	-37.75	-24.75	7,000 G	9,000 G	1,000 M	6,368000 G	-35.98	-22.98	 <table border="1" data-bbox="858 1176 1321 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>805,187500 M</td> <td>-43.40</td> <td>-30.40</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>870,037500 M</td> <td>-42.19</td> <td>-29.19</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,673000 G</td> <td>-40.44</td> <td>-27.44</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,037000 G</td> <td>-38.42</td> <td>-25.42</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,563500 G</td> <td>-35.97</td> <td>-22.97</td> </tr> </tbody> </table> <p>Date: 22.SEP.2018 09:04:49</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35,000 M	820,000 M	1,000 M	805,187500 M	-43.40	-30.40	855,000 M	1,000 G	1,000 M	870,037500 M	-42.19	-29.19	1,000 G	3,000 G	1,000 M	1,673000 G	-40.44	-27.44	3,000 G	7,000 G	1,000 M	3,037000 G	-38.42	-25.42	7,000 G	9,000 G	1,000 M	7,563500 G	-35.97	-22.97
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35,000 M	820,000 M	1,000 M	568,977500 M	-43.20	-30.20																																																																				
855,000 M	1,000 G	1,000 M	940,006250 M	-42.25	-29.25																																																																				
1,000 G	3,000 G	1,000 M	2,857500 G	-41.37	-28.37																																																																				
3,000 G	7,000 G	1,000 M	3,016000 G	-37.75	-24.75																																																																				
7,000 G	9,000 G	1,000 M	6,368000 G	-35.98	-22.98																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35,000 M	820,000 M	1,000 M	805,187500 M	-43.40	-30.40																																																																				
855,000 M	1,000 G	1,000 M	870,037500 M	-42.19	-29.19																																																																				
1,000 G	3,000 G	1,000 M	1,673000 G	-40.44	-27.44																																																																				
3,000 G	7,000 G	1,000 M	3,037000 G	-38.42	-25.42																																																																				
7,000 G	9,000 G	1,000 M	7,563500 G	-35.97	-22.97																																																																				
Highest Channel	Highest Channel																																																																								
 <table border="1" data-bbox="207 1691 670 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>807,950000 M</td> <td>-43.24</td> <td>-30.24</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>855,036250 M</td> <td>-39.00</td> <td>-26.00</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,697500 G</td> <td>-32.91</td> <td>-19.91</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>5,112000 G</td> <td>-38.34</td> <td>-25.34</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,641000 G</td> <td>-35.87</td> <td>-22.87</td> </tr> </tbody> </table> <p>Date: 22.SEP.2018 08:50:51</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35,000 M	820,000 M	1,000 M	807,950000 M	-43.24	-30.24	855,000 M	1,000 G	1,000 M	855,036250 M	-39.00	-26.00	1,000 G	3,000 G	1,000 M	1,697500 G	-32.91	-19.91	3,000 G	7,000 G	1,000 M	5,112000 G	-38.34	-25.34	7,000 G	9,000 G	1,000 M	7,641000 G	-35.87	-22.87	 <table border="1" data-bbox="858 1691 1321 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>817,037500 M</td> <td>-43.70</td> <td>-30.70</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>923,005005 M</td> <td>-42.77</td> <td>-29.77</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,639000 G</td> <td>-39.93</td> <td>-26.93</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>6,890000 G</td> <td>-38.72</td> <td>-25.72</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,562000 G</td> <td>-35.81</td> <td>-22.81</td> </tr> </tbody> </table> <p>Date: 22.SEP.2018 09:05:41</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35,000 M	820,000 M	1,000 M	817,037500 M	-43.70	-30.70	855,000 M	1,000 G	1,000 M	923,005005 M	-42.77	-29.77	1,000 G	3,000 G	1,000 M	1,639000 G	-39.93	-26.93	3,000 G	7,000 G	1,000 M	6,890000 G	-38.72	-25.72	7,000 G	9,000 G	1,000 M	7,562000 G	-35.81	-22.81
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35,000 M	820,000 M	1,000 M	807,950000 M	-43.24	-30.24																																																																				
855,000 M	1,000 G	1,000 M	855,036250 M	-39.00	-26.00																																																																				
1,000 G	3,000 G	1,000 M	1,697500 G	-32.91	-19.91																																																																				
3,000 G	7,000 G	1,000 M	5,112000 G	-38.34	-25.34																																																																				
7,000 G	9,000 G	1,000 M	7,641000 G	-35.87	-22.87																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35,000 M	820,000 M	1,000 M	817,037500 M	-43.70	-30.70																																																																				
855,000 M	1,000 G	1,000 M	923,005005 M	-42.77	-29.77																																																																				
1,000 G	3,000 G	1,000 M	1,639000 G	-39.93	-26.93																																																																				
3,000 G	7,000 G	1,000 M	6,890000 G	-38.72	-25.72																																																																				
7,000 G	9,000 G	1,000 M	7,562000 G	-35.81	-22.81																																																																				



GSM1900 (GSM)


Lowest Channel

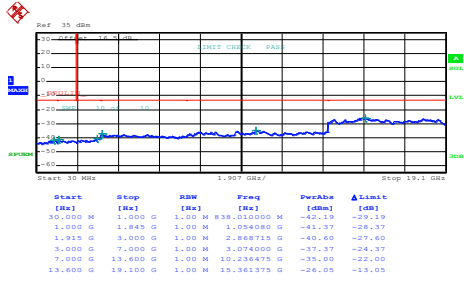

Date: 22.SEP.2018 09:32:08


GSM1900 (EDGE class 8)

Lowest Channel

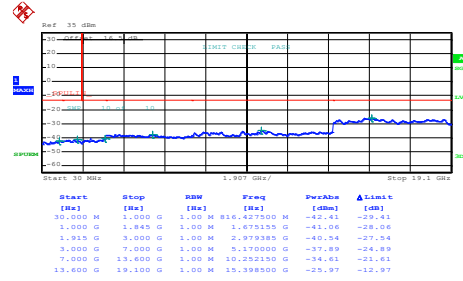


Date: 22.SEP.2018 09:45:20

Middle Channel

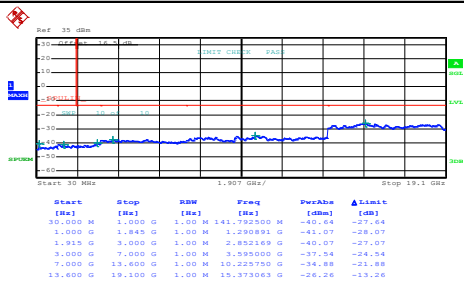


Date: 22.SEP.2018 09:33:07

Middle Channel

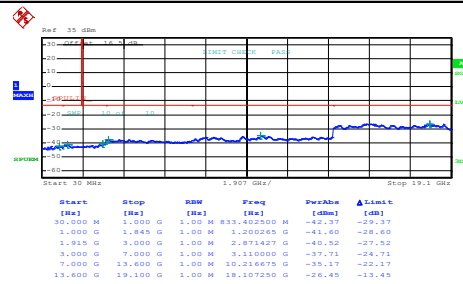


Date: 22.SEP.2018 09:46:24

Highest Channel

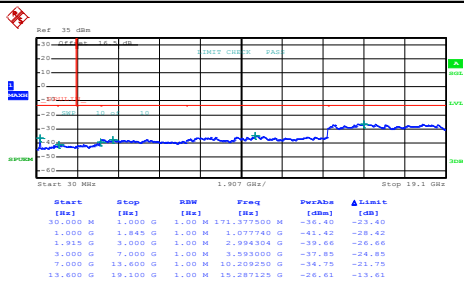

Date: 22.SEP.2018 09:34:01

Highest Channel

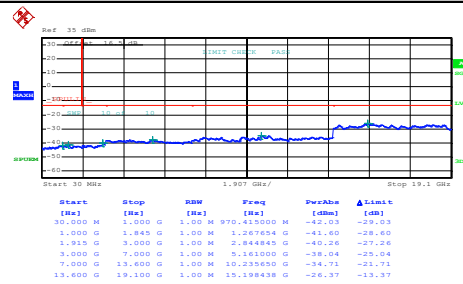

Date: 22.SEP.2018 09:47:15



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0024	0.0084	PASS
40	Normal Voltage	0.0012	0.0072	
30	Normal Voltage	0.0012	0.0036	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0036	0.0048	
0	Normal Voltage	0.0036	0.0096	
-10	Normal Voltage	0.0096	0.0120	
-20	Normal Voltage	0.0155	0.0155	
-30	Normal Voltage	0.0191	0.0191	
20	Maximum Voltage	0.0000	0.0024	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0024	0.0012	



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0016	0.0064	PASS
40	Normal Voltage	0.0016	0.0043	
30	Normal Voltage	0.0005	0.0027	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0005	0.0000	
0	Normal Voltage	0.0021	0.0000	
-10	Normal Voltage	0.0032	0.0016	
-20	Normal Voltage	0.0032	0.0021	
-30	Normal Voltage	0.0048	0.0027	
20	Maximum Voltage	0.0005	0.0000	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0005	0.0005	

Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.4 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.









A2. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.20	2.84	3.00	PASS
Middle CH	3.12	2.92	3.08	
Highest CH	3.12	2.84	2.96	

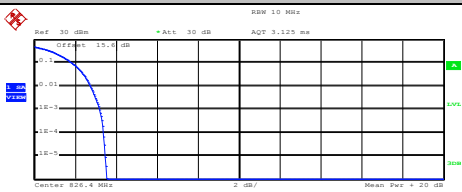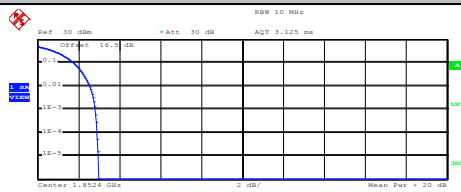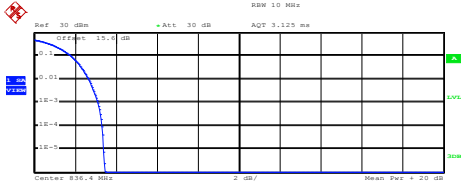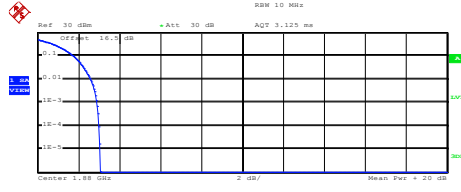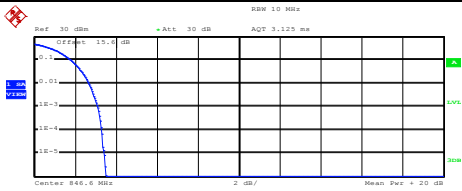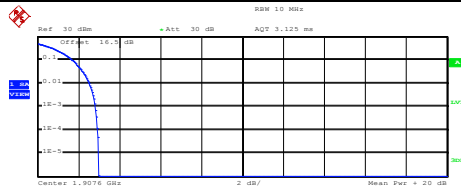


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																
<p style="text-align: center;">Lowest Channel</p>  <p>Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 18.81 dBm Peak 22.35 dBm Crest 3.54 dB</p> <table border="1"> <tr><td>10 %</td><td>1.84 dB</td></tr> <tr><td>1 %</td><td>2.76 dB</td></tr> <tr><td>.1 %</td><td>3.20 dB</td></tr> <tr><td>.01 %</td><td>3.40 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:14:30</p>	10 %	1.84 dB	1 %	2.76 dB	.1 %	3.20 dB	.01 %	3.40 dB	<p style="text-align: center;">Lowest Channel</p>  <p>Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 16.84 dBm Peak 19.81 dBm Crest 2.97 dB</p> <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.56 dB</td></tr> <tr><td>.1 %</td><td>2.84 dB</td></tr> <tr><td>.01 %</td><td>2.92 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:34:08</p>	10 %	1.76 dB	1 %	2.56 dB	.1 %	2.84 dB	.01 %	2.92 dB
10 %	1.84 dB																
1 %	2.76 dB																
.1 %	3.20 dB																
.01 %	3.40 dB																
10 %	1.76 dB																
1 %	2.56 dB																
.1 %	2.84 dB																
.01 %	2.92 dB																
<p style="text-align: center;">Middle Channel</p>  <p>Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.04 dBm Peak 22.49 dBm Crest 3.45 dB</p> <table border="1"> <tr><td>10 %</td><td>1.80 dB</td></tr> <tr><td>1 %</td><td>2.68 dB</td></tr> <tr><td>.1 %</td><td>3.12 dB</td></tr> <tr><td>.01 %</td><td>3.32 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:14:49</p>	10 %	1.80 dB	1 %	2.68 dB	.1 %	3.12 dB	.01 %	3.32 dB	<p style="text-align: center;">Middle Channel</p>  <p>Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 16.81 dBm Peak 19.88 dBm Crest 3.07 dB</p> <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.60 dB</td></tr> <tr><td>.1 %</td><td>2.92 dB</td></tr> <tr><td>.01 %</td><td>3.00 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:34:22</p>	10 %	1.76 dB	1 %	2.60 dB	.1 %	2.92 dB	.01 %	3.00 dB
10 %	1.80 dB																
1 %	2.68 dB																
.1 %	3.12 dB																
.01 %	3.32 dB																
10 %	1.76 dB																
1 %	2.60 dB																
.1 %	2.92 dB																
.01 %	3.00 dB																
<p style="text-align: center;">Highest Channel</p>  <p>Center 846.6 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.00 dBm Peak 22.49 dBm Crest 3.49 dB</p> <table border="1"> <tr><td>10 %</td><td>1.80 dB</td></tr> <tr><td>1 %</td><td>2.68 dB</td></tr> <tr><td>.1 %</td><td>3.12 dB</td></tr> <tr><td>.01 %</td><td>3.28 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:15:08</p>	10 %	1.80 dB	1 %	2.68 dB	.1 %	3.12 dB	.01 %	3.28 dB	<p style="text-align: center;">Highest Channel</p>  <p>Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 17.46 dBm Peak 20.45 dBm Crest 2.98 dB</p> <table border="1"> <tr><td>10 %</td><td>1.72 dB</td></tr> <tr><td>1 %</td><td>2.52 dB</td></tr> <tr><td>.1 %</td><td>2.84 dB</td></tr> <tr><td>.01 %</td><td>2.92 dB</td></tr> </table> <p>Date: 22.SEP.2018 08:34:38</p>	10 %	1.72 dB	1 %	2.52 dB	.1 %	2.84 dB	.01 %	2.92 dB
10 %	1.80 dB																
1 %	2.68 dB																
.1 %	3.12 dB																
.01 %	3.28 dB																
10 %	1.72 dB																
1 %	2.52 dB																
.1 %	2.84 dB																
.01 %	2.92 dB																



WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

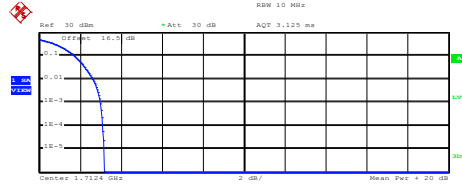


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 17.83 dBm
Peak 21.01 dBm
Crest 3.18 dB

10 % 1.72 dB
1 % 2.64 dB
.1 % 3.00 dB
.01 % 3.12 dB

Date: 22.SEP.2018 08:00:13

Middle Channel

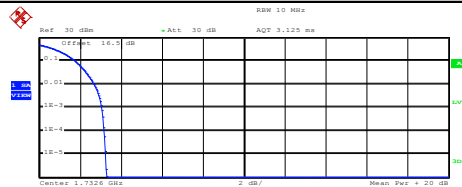


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 18.29 dBm
Peak 21.57 dBm
Crest 3.28 dB

10 % 1.76 dB
1 % 2.68 dB
.1 % 3.08 dB
.01 % 3.16 dB

Date: 22.SEP.2018 08:00:29

Highest Channel

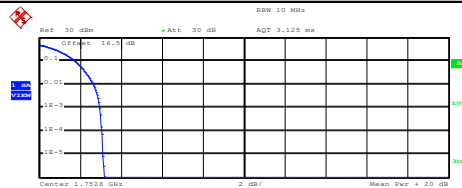

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 17.55 dBm
Peak 20.73 dBm
Crest 3.18 dB

10 % 1.76 dB
1 % 2.64 dB
.1 % 2.96 dB
.01 % 3.08 dB







Date: 22.SEP.2018 08:00:47



26dB Bandwidth

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.67	4.70	4.71
Middle CH	4.71	4.72	4.70
Highest CH	4.71	4.71	4.71

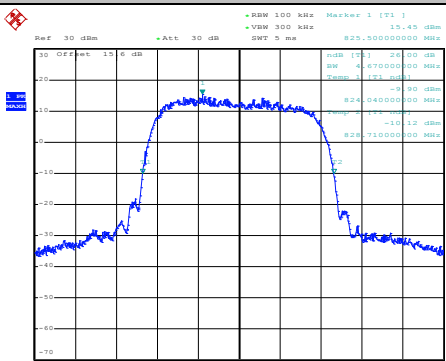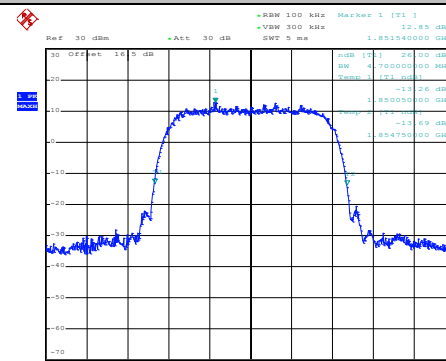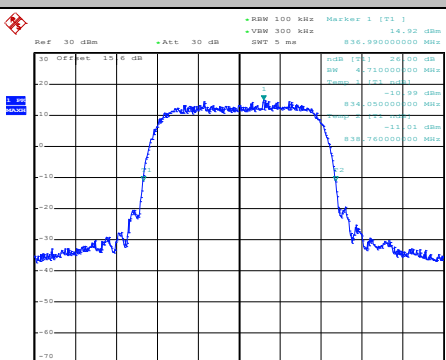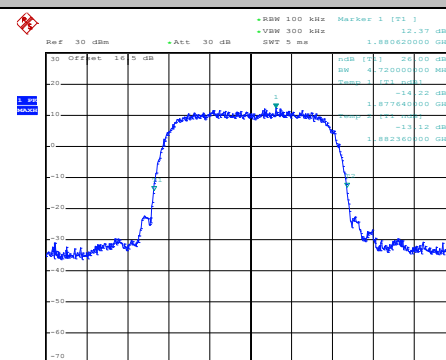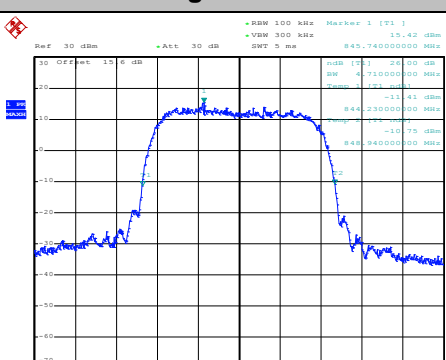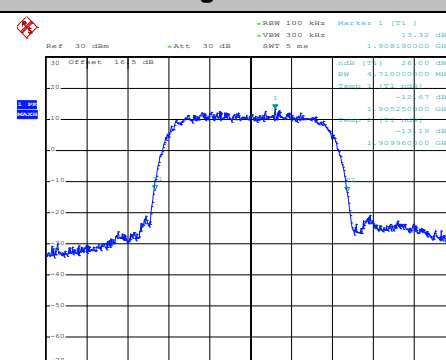


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
<p style="text-align: center;">Lowest Channel</p>  <p>Date: 22.SEP.2018 08:02:21</p>	<p style="text-align: center;">Lowest Channel</p>  <p>Date: 22.SEP.2018 08:21:00</p>
<p style="text-align: center;">Middle Channel</p>  <p>Date: 22.SEP.2018 08:03:02</p>	<p style="text-align: center;">Middle Channel</p>  <p>Date: 22.SEP.2018 08:21:56</p>
<p style="text-align: center;">Highest Channel</p>  <p>Date: 22.SEP.2018 08:03:40</p>	<p style="text-align: center;">Highest Channel</p>  <p>Date: 22.SEP.2018 08:22:36</p>




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

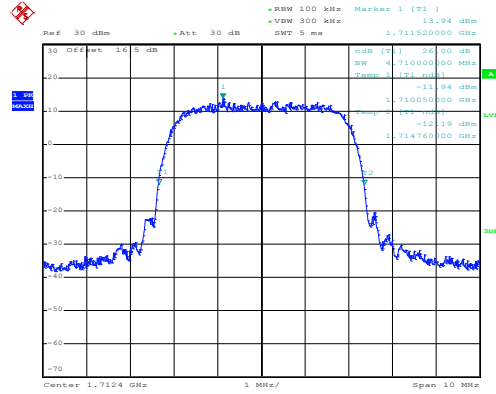

Middle Channel

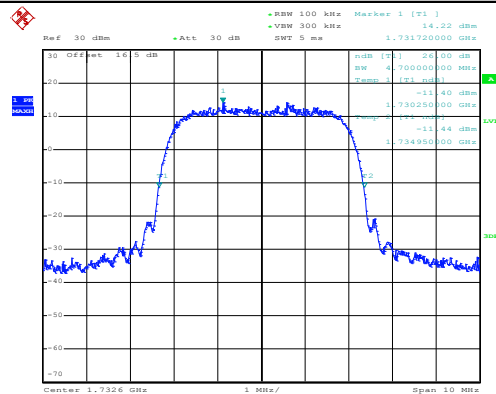


Highest Channel

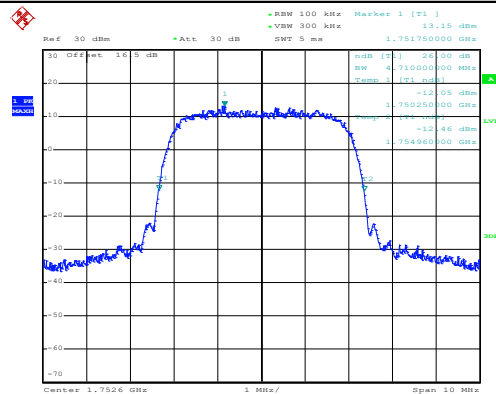



Occupied Bandwidth


Mode	WCDMA Band V 99% OBW(MHz)	WCDMA Band II 99% OBW(MHz)	WCDMA Band IV 99% OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.12	4.13	4.14
Middle CH	4.16	4.14	4.13
Highest CH	4.15	4.13	4.14

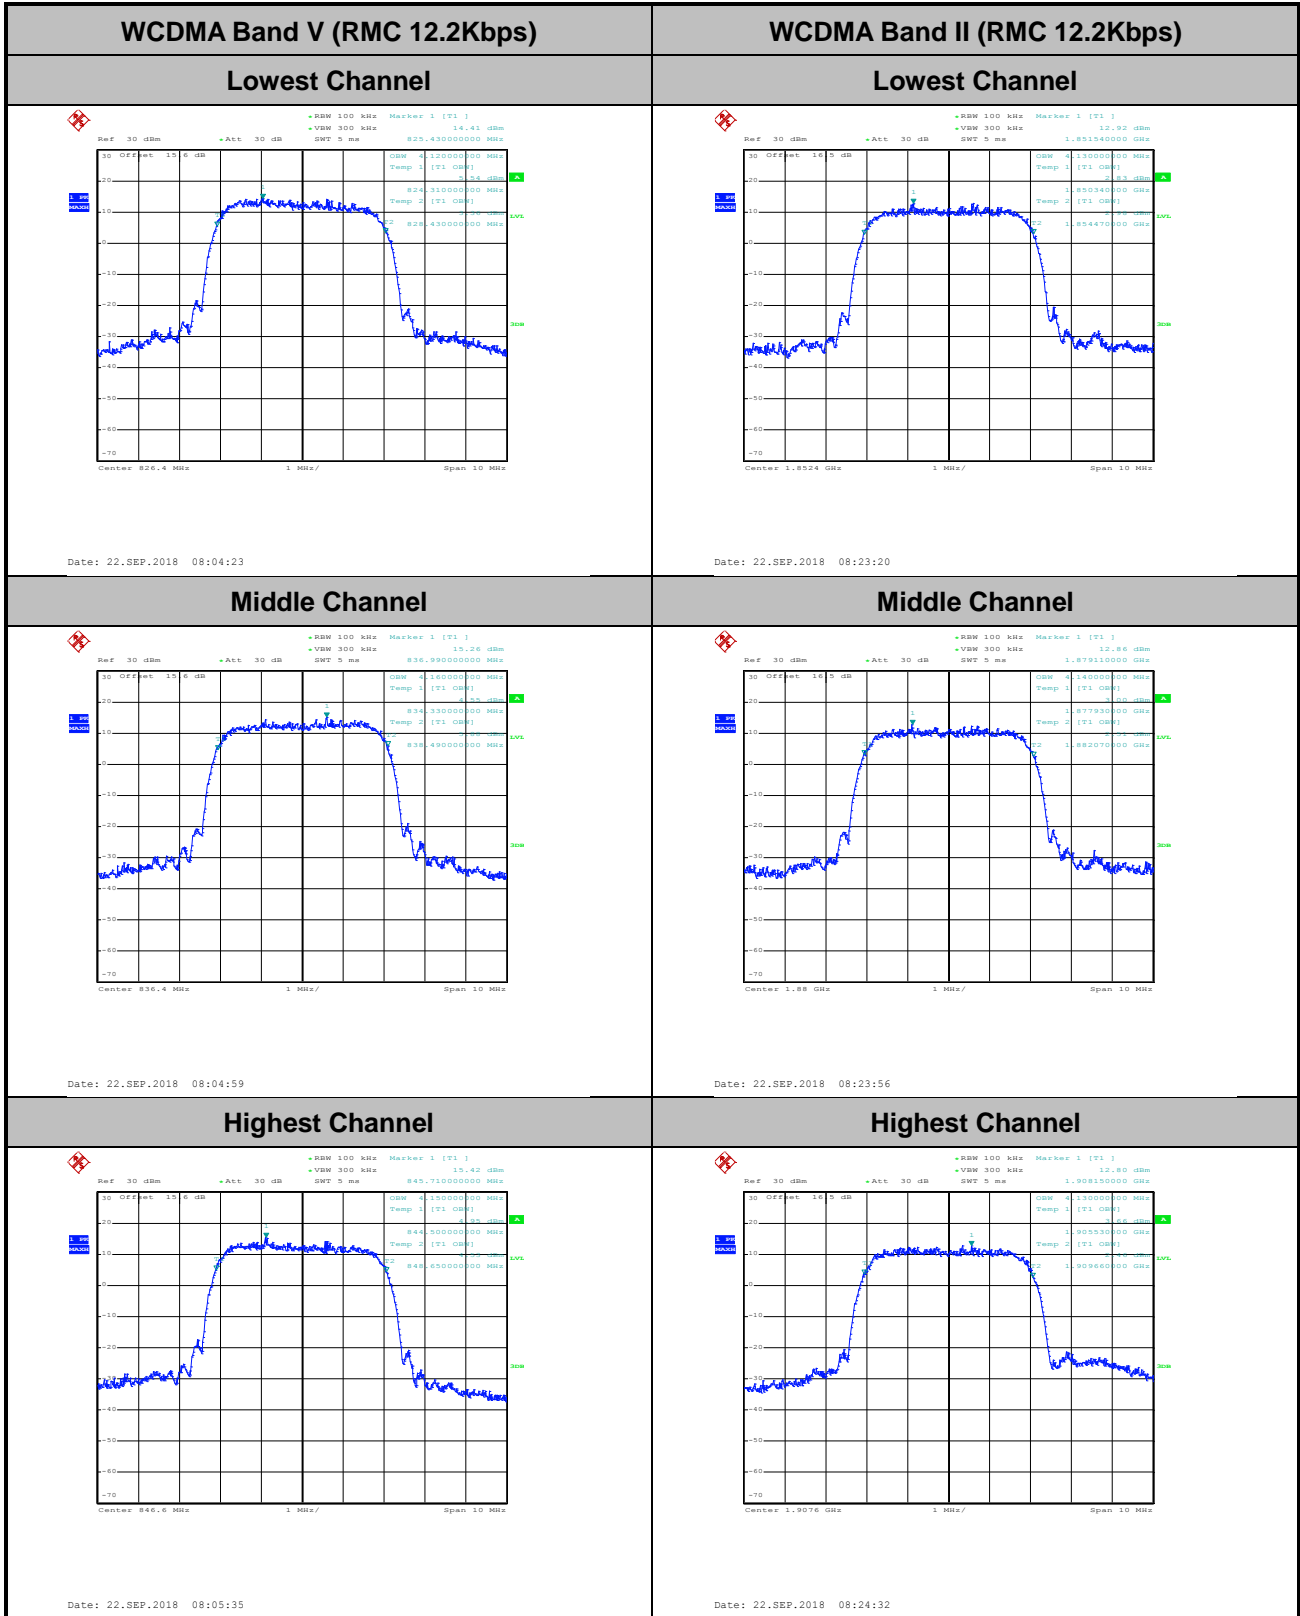




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

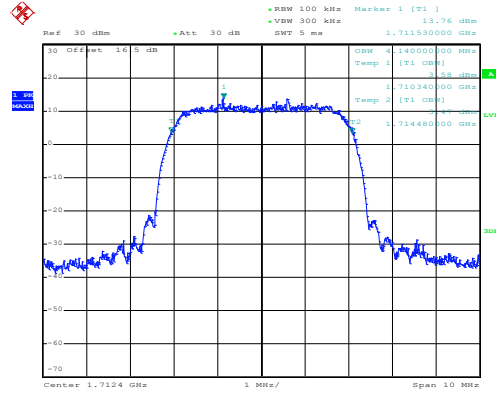


Date: 22.SEP.2018 07:48:56

Middle Channel

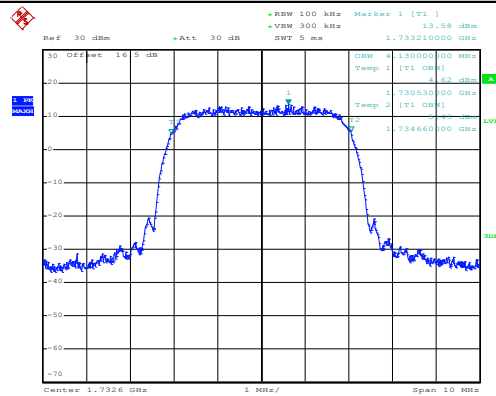

Date: 22.SEP.2018 07:49:35

Highest Channel

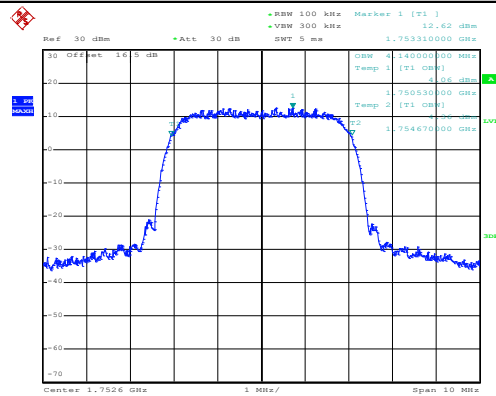


Date: 22.SEP.2018 07:50:10



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

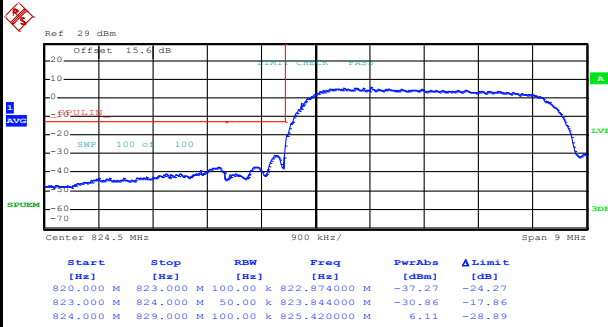

Date: 22.SEP.2018 08:08:29

Highest Band Edge

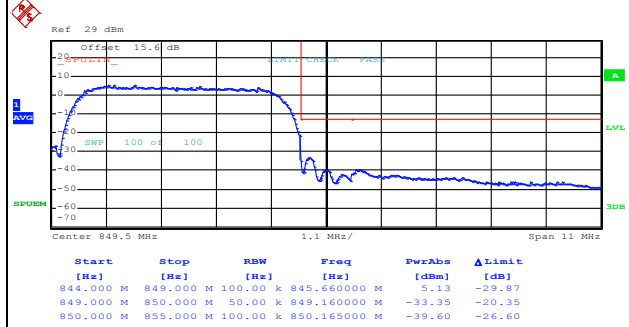



Date: 22.SEP.2018 08:11:22



WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

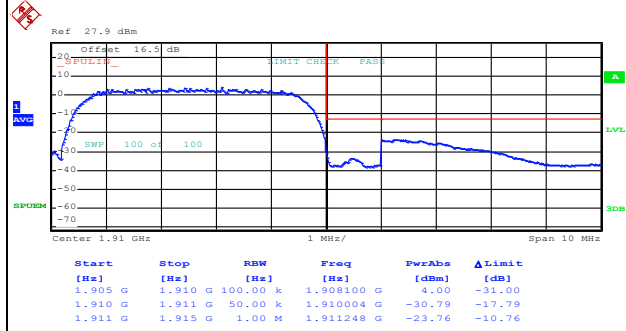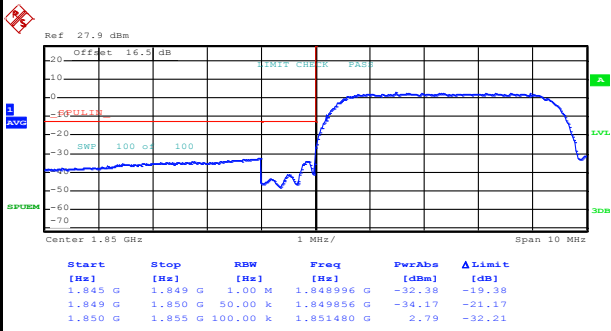

Date: 22.SEP.2018 08:28:06


Date: 22.SEP.2018 08:30:58




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

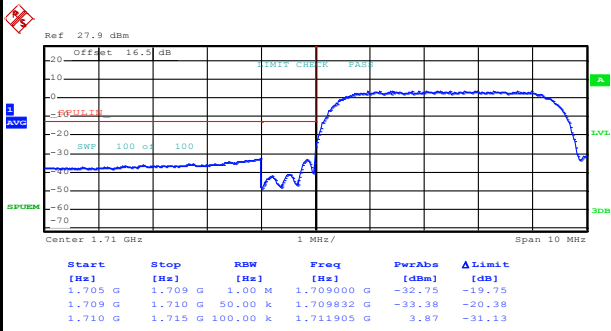


Date: 22.SEP.2018 07:53:11

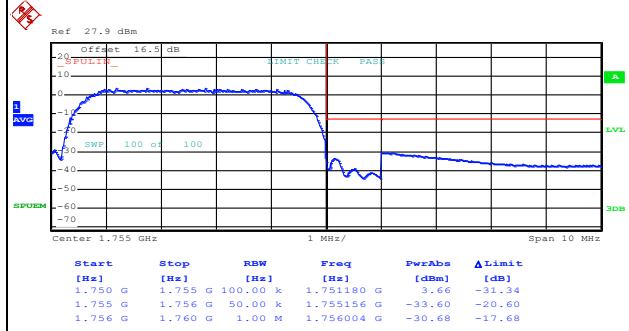

Date: 22.SEP.2018 07:56:03




Conducted Spurious Emission

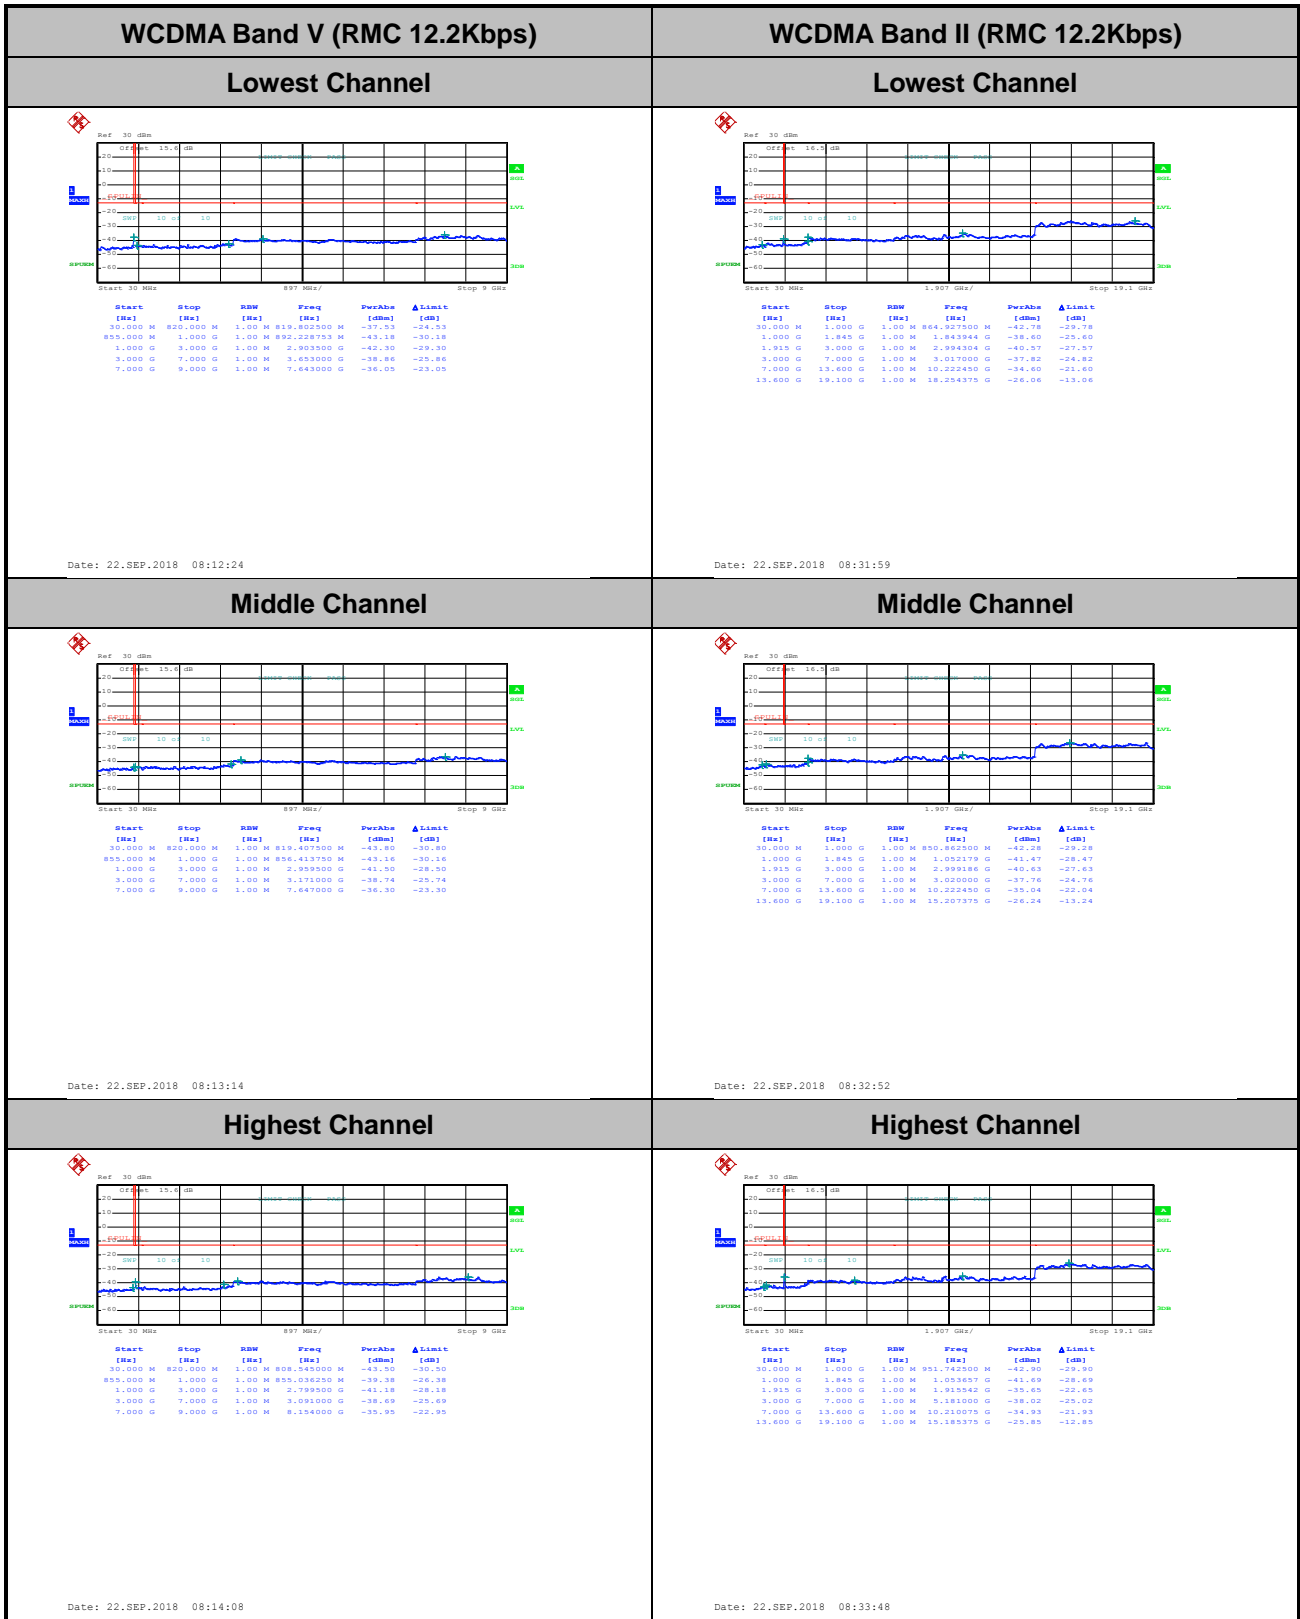




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

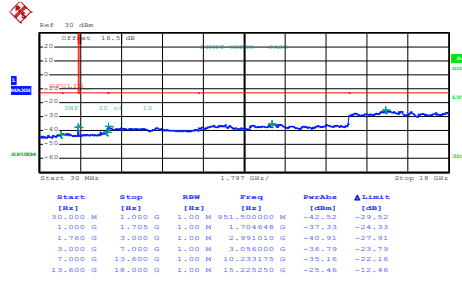


Date: 22.SEP.2018 07:57:30

Middle Channel

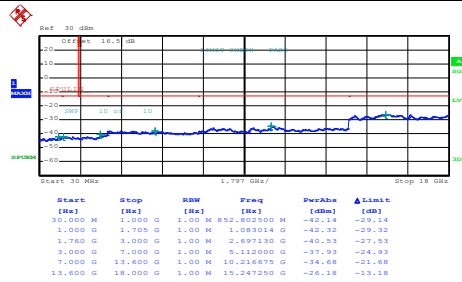

Date: 22.SEP.2018 07:58:51

Highest Channel

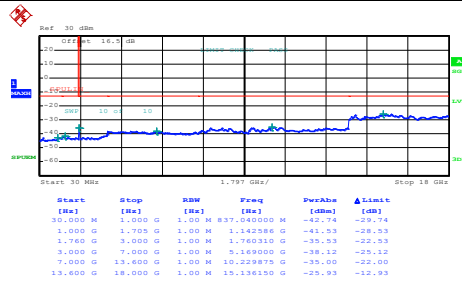

Date: 22.SEP.2018 07:59:49



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	PASS
40	Normal Voltage	0.0036	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0036	
0	Normal Voltage	0.0072	
-10	Normal Voltage	0.0096	
-20	Normal Voltage	0.0132	
-30	Normal Voltage	0.0155	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0021	PASS
40	Normal Voltage	0.0011	
30	Normal Voltage	0.0000	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0011	
-10	Normal Voltage	0.0037	
-20	Normal Voltage	0.0059	
-30	Normal Voltage	0.0059	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0127	PASS
40	Normal Voltage	0.0063	
30	Normal Voltage	0.0029	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0029	
0	Normal Voltage	0.0063	
-10	Normal Voltage	0.0127	
-20	Normal Voltage	0.0150	
-30	Normal Voltage	0.0260	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850 GSM (GT - LC = -3.4 dB)	32.03	1.5959	26.48	0.4446
Middle		32.62	1.8281	27.07	0.5093
Highest		33.22	2.0989	27.67	0.5848
Lowest	GSM850 EDGE class 10 (GT - LC = -3.4 dB)	26.67	0.4645	21.12	0.1294
Middle		26.52	0.4487	20.97	0.1250
Highest		26.55	0.4519	21.00	0.1259
Lowest	WCDMA Band V RMC 12.2Kbps (GT - LC = -3.4 dB)	24.29	0.2685	18.74	0.0748
Middle		24.18	0.2618	18.63	0.0729
Highest		24.07	0.2553	18.52	0.0711
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GSM (GT - LC = -2.4 dB)	29.80	0.9550	27.40	0.5495
Middle		29.86	0.9683	27.46	0.5572
Highest		29.89	0.9750	27.49	0.5610
Lowest	GSM1900 EDGE class 10 (GT - LC = -2.4 dB)	25.60	0.3631	23.20	0.2089
Middle		25.63	0.3656	23.23	0.2104
Highest		25.76	0.3767	23.36	0.2168
Lowest	WCDMA Band II RMC 12.2Kbps (GT - LC = -2.4 dB)	22.82	0.1914	20.42	0.1102
Middle		22.83	0.1919	20.43	0.1104
Highest		22.87	0.1936	20.47	0.1114
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV RMC 12.2Kbps (GT - LC = -1.7 dB)	23.05	0.2018	21.35	0.1365
Middle		22.96	0.1977	21.26	0.1337
Highest		22.87	0.1936	21.17	0.1309
Limit	EIRP < 1W	Result		PASS	



Radiated Spurious Emission

GSM850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-59.24	-13	-46.24	-71.56	-61	0.98	4.89	H
	2472	-48.04	-13	-35.04	-65.55	-49.92	1.28	5.32	H
	3296	-58.32	-13	-45.32	-77.83	-61.73	1.54	7.10	H
									H
									H
									H
	1648	-61.08	-13	-48.08	-73.86	-62.84	0.98	4.89	V
	2472	-50.79	-13	-37.79	-68.81	-52.67	1.28	5.32	V
	3296	-57.81	-13	-44.81	-77.78	-61.22	1.54	7.10	V
									V
									V
									V
Middle	1672	-49.83	-13	-36.83	-62.45	-51.51	0.99	4.82	H
	2512	-40.06	-13	-27.06	-57.65	-42.03	1.29	5.41	H
	3344	-57.81	-13	-44.81	-77.84	-61.42	1.56	7.31	H
									H
									H
									H
	1672	-59.34	-13	-46.34	-62.31	-61.02	0.99	4.82	V
	2512	-46.56	-13	-33.56	-64.65	-48.53	1.29	5.41	V
	3344	-57.91	-13	-44.91	-78	-61.52	1.56	7.31	V
									V
									V
									V



Highest	1696	-60.83	-13	-47.83	-73.6	-62.43	1.00	4.75	H
	2544	-37.64	-13	-24.64	-55.33	-39.62	1.30	5.44	H
	3392	-57.63	-13	-44.63	-77.75	-61.43	1.57	7.52	H
									H
									H
									H
									H
	1696	-62.29	-13	-49.29	-75.55	-63.89	1.00	4.75	V
	2544	-42.37	-13	-29.37	-60.49	-44.35	1.30	5.44	V
	3392	-58.04	-13	-45.04	-78.25	-61.84	1.57	7.52	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EDGE 850

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-63.13	-13	-50.13	-75.46	-64.89	0.98	4.89	H
	2472	-57.20	-13	-44.20	-74.73	-59.08	1.28	5.32	H
	3296	-57.80	-13	-44.80	-77.4	-61.21	1.54	7.10	H
									H
									H
									H
									H
	1648	-62.32	-13	-49.32	-75.12	-64.08	0.98	4.89	V
	2472	-58.46	-13	-45.46	-76.43	-60.34	1.28	5.32	V
	3296	-57.72	-13	-44.72	-77.65	-61.13	1.54	7.10	V
									V
									V
									V
									V
Middle	1672	-63.20	-13	-50.20	-75.82	-64.88	0.99	4.82	H
	2509	-47.50	-13	-34.50	-65.12	-49.46	1.29	5.41	H
	3344	-57.87	-13	-44.87	-77.73	-61.48	1.56	7.31	H
									H
									H
									H
									H
	1672	-62.88	-13	-49.88	-75.96	-64.56	0.99	4.82	V
	2509	-49.08	-13	-36.08	-67.16	-51.04	1.29	5.41	V
	3344	-57.98	-13	-44.98	-78.05	-61.59	1.56	7.31	V
									V
									V
									V
									V



Highest	1696	-63.14	-13	-50.14	-75.91	-64.74	1.00	4.75	H
	2544	-45.07	-13	-32.07	-62.71	-47.05	1.30	5.44	H
	3392	-57.60	-13	-44.60	-77.72	-61.4	1.57	7.52	H
									H
									H
									H
									H
	1696	-63.09	-13	-50.09	-76.3	-64.69	1.00	4.75	V
	2544	-49.09	-13	-36.09	-67.23	-51.07	1.30	5.44	V
	3392	-57.95	-13	-44.95	-78.16	-61.75	1.57	7.52	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-63.26	-13	-50.26	-75.74	-64.99	0.98	4.86	H
	2480	-52.02	-13	-39.02	-69.55	-53.93	1.28	5.34	H
	3304	-57.82	-13	-44.82	-77.52	-61.26	1.54	7.14	H
									H
									H
									H
									H
	1656	-62.66	-13	-49.66	-75.61	-64.39	0.98	4.86	V
	2480	-52.87	-13	-39.87	-70.84	-54.78	1.28	5.34	V
	3304	-57.53	-13	-44.53	-77.51	-60.97	1.54	7.14	V
									V
									V
									V
									V
Middle	1672	-63.04	-13	-50.04	-75.66	-64.72	0.99	4.82	H
	2512	-48.79	-13	-35.79	-66.41	-50.76	1.29	5.41	H
	3344	-58.33	-13	-45.33	-78.19	-61.94	1.56	7.31	H
									H
									H
									H
									H
	1672	-62.38	-13	-49.38	-75.46	-64.06	0.99	4.82	V
	2512	-49.78	-13	-36.78	-67.86	-51.75	1.29	5.41	V
	3344	-57.97	-13	-44.97	-78.04	-61.58	1.56	7.31	V
									V
									V
									V
									V



Highest	1696	-63.41	-13	-50.41	-76.18	-65.01	1.00	4.75	H
	2536	-48.21	-13	-35.21	-65.83	-50.19	1.30	5.43	H
	3384	-57.77	-13	-44.77	-77.81	-61.54	1.57	7.49	H
									H
									H
									H
									H
	1696	-62.63	-13	-49.63	-75.84	-64.23	1.00	4.75	V
	2536	-50.87	-13	-37.87	-68.98	-52.85	1.30	5.43	V
	3384	-57.43	-13	-44.43	-77.6	-61.2	1.57	7.49	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1700

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-54.43	-13	-41.43	-75.36	-60.52	1.58	7.67	H
	5136	-54.11	-13	-41.11	-78.27	-61.39	2.42	9.70	H
	6852	-51.43	-13	-38.43	-78.24	-59.41	2.64	10.62	H
									H
									H
									H
									H
	3426	-54.78	-13	-41.78	-75.62	-60.87	1.58	7.67	V
	5136	-53.75	-13	-40.75	-77.83	-61.03	2.42	9.70	V
	6852	-51.71	-13	-38.71	-78.49	-59.69	2.64	10.62	V
									V
									V
									V
									V
Middle	3468	-54.02	-13	-41.02	-75.07	-60.28	1.59	7.86	H
	5196	-50.64	-13	-37.64	-75.09	-57.89	2.45	9.70	H
	6930	-51.46	-13	-38.46	-78.37	-59.56	2.61	10.72	H
									H
									H
									H
									H
	3468	-54.96	-13	-41.96	-75.83	-61.22	1.59	7.86	V
	5196	-48.48	-13	-35.48	-72.72	-55.73	2.45	9.70	V
	6930	-51.24	-13	-38.24	-78.26	-59.34	2.61	10.72	V
									V
									V
									V
									V



Highest	3504	-54.75	-13	-41.75	-75.9	-61.15	1.61	8.00	H
	5256	-53.15	-13	-40.15	-77.64	-60.37	2.48	9.70	H
	7008	-50.91	-13	-37.91	-77.95	-59.14	2.59	10.82	H
									H
									H
									H
									H
	3504	-55.98	-13	-42.98	-76.98	-62.38	1.61	8.00	V
	5256	-52.19	-13	-39.19	-76.65	-59.41	2.48	9.70	V
	7008	-50.88	-13	-37.88	-77.85	-59.11	2.59	10.82	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GPRS 1900

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-53.55	-13	-40.55	-74.52	-60.12	1.67	8.24	H
	5550	-39.09	-13	-26.09	-64.43	-46.16	2.65	9.72	H
	7398	-51.31	-13	-38.31	-78.39	-60.44	2.46	11.60	H
									H
									H
									H
									H
	3702	-54.86	-13	-41.86	-75.85	-61.43	1.67	8.24	V
	5550	-39.01	-13	-26.01	-64.36	-46.08	2.65	9.72	V
	7398	-49.89	-13	-36.89	-78.26	-59.02	2.46	11.60	V
									V
									V
									V
									V
Middle	3762	-55.37	-13	-42.37	-76.24	-62	1.69	8.31	H
	5640	-37.93	-13	-24.93	-63.42	-44.98	2.71	9.76	H
	7518	-50.49	-13	-37.49	-77.75	-59.88	2.42	11.81	H
									H
									H
									H
									H
	3762	-55.19	-13	-42.19	-76.16	-61.82	1.69	8.31	V
	5640	-33.98	-13	-20.98	-59.4	-41.03	2.71	9.76	V
	7518	-50.73	-13	-37.73	-78.27	-60.12	2.42	11.81	V
									V
									V
									V
									V



Highest	3822	-56.18	-13	-43.18	-76.85	-62.86	1.71	8.39	H
	5730	-44.24	-13	-31.24	-69.89	-51.27	2.76	9.79	H
	7638	-49.59	-13	-36.59	-77.18	-59.09	2.38	11.88	H
									H
									H
									H
									H
	3822	-57.09	-13	-44.09	-77.95	-63.77	1.71	8.39	V
	5730	-43.69	-13	-30.69	-69.43	-50.72	2.76	9.79	V
	7638	-49.13	-13	-36.13	-76.97	-58.63	2.38	11.88	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EDGE1900

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-55.96	-13	-42.96	-76.94	-62.53	1.67	8.24	H
	5550	-48.33	-13	-35.33	-73.54	-55.4	2.65	9.72	H
	7398	-51.26	-13	-38.26	-78.4	-60.39	2.46	11.60	H
									H
									H
									H
									H
	3702	-56.29	-13	-43.29	-77.32	-62.86	1.67	8.24	V
	5550	-43.27	-13	-30.27	-68.62	-50.34	2.65	9.72	V
	7398	-50.83	-13	-37.83	-78.1	-59.96	2.46	11.60	V
									V
									V
									V
									V
Middle	3762	-57.23	-13	-44.23	-78.17	-63.86	1.69	8.31	H
	5640	-46.33	-13	-33.33	-71.84	-53.38	2.71	9.76	H
	7518	-50.64	-13	-37.64	-77.91	-60.03	2.42	11.81	H
									H
									H
									H
									H
	3762	-57.24	-13	-44.24	-78.13	-63.87	1.69	8.31	V
	5640	-42.92	-13	-29.92	-68.36	-49.97	2.71	9.76	V
	7518	-50.69	-13	-37.69	-78.23	-60.08	2.42	11.81	V
									V
									V
									V
									V



Highest	3822	-57.33	-13	-44.33	-78.14	-64.01	1.71	8.39	H
	5730	-49.02	-13	-36.02	-74.71	-56.05	2.76	9.79	H
	7638	-49.56	-13	-36.56	-77.14	-59.06	2.38	11.88	H
									H
									H
									H
									H
	3822	-57.18	-13	-44.18	-78.12	-63.86	1.71	8.39	V
	5730	-48.71	-13	-35.71	-74.44	-55.74	2.76	9.79	V
	7638	-49.19	-13	-36.19	-77.04	-58.69	2.38	11.88	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-56.61	-13	-43.61	-77.62	-63.18	1.67	8.24	H
	5556	-52.48	-13	-39.48	-77.86	-59.55	2.66	9.72	H
	7410	-51.25	-13	-38.25	-78.42	-60.41	2.46	11.62	H
									H
									H
									H
									H
	3702	-56.48	-13	-43.48	-77.44	-63.05	1.67	8.24	V
	5556	-52.71	-13	-39.71	-77.92	-59.78	2.66	9.72	V
	7410	-50.81	-13	-37.81	-78.12	-59.97	2.46	11.62	V
									V
									V
									V
									V
Middle	3762	-56.98	-13	-43.98	-77.9	-63.61	1.69	8.31	H
	5640	-52.33	-13	-39.33	-77.8	-59.38	2.71	9.76	H
	7518	-50.61	-13	-37.61	-77.87	-60	2.42	11.81	H
									H
									H
									H
									H
	3762	-57.18	-13	-44.18	-78.02	-63.81	1.69	8.31	V
	5640	-52.18	-13	-39.18	-77.66	-59.23	2.71	9.76	V
	7518	-50.55	-13	-37.55	-78.03	-59.94	2.42	11.81	V
									V
									V
									V
									V



Highest	3816	-57.53	-13	-44.53	-78.36	-64.21	1.70	8.38	H
	5724	-51.72	-13	-38.72	-77.47	-58.76	2.75	9.79	H
	7632	-49.92	-13	-36.92	-77.49	-59.41	2.39	11.88	H
									H
									H
									H
									H
	3816	-57.14	-13	-44.14	-78.01	-63.82	1.70	8.38	V
	5724	-51.53	-13	-38.53	-77.27	-58.57	2.75	9.79	V
	7632	-49.51	-13	-36.51	-77.33	-59	2.39	11.88	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

————THE END————