



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1955-7
FCC ID : IHDT56XQ4
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DXX) Low Power Communication Device Transmitter

The product was received on Sep. 06, 2018 and testing was completed on Nov. 08, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

TABLE OF CONTENTS2

REVISION HISTORY3

SUMMARY OF THE TEST RESULT4

1. GENERAL DESCRIPTION5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Specification of Accessory..... 6

 1.6 Modification of EUT 7

 1.7 Testing Location 7

 1.8 Applicable Standards..... 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST8

 2.1 Descriptions of Test Mode 8

 2.2 Connection Diagram of Test System 9

 2.3 Table for Supporting Units 9

 2.4 EUT Operation Test Setup 9

3. TEST RESULTS10

 3.1 AC Power Line Conducted Emissions Measurement 10

 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement..... 12

 3.3 Frequency Stability Measurement 13

 3.4 Field Strength of Fundamental Emissions and Mask Measurement..... 14

 3.5 Radiated Emissions Measurement 16

 3.6 Antenna Requirements..... 19

4. LIST OF MEASURING EQUIPMENT20

5. UNCERTAINTY OF EVALUATION21

APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

 B1. Test Result of 20dB Spectrum Bandwidth

 B2. Test Result of Frequency Stability

APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

 C1. Test Result of Field Strength of Fundamental Emissions

 C2. Results of Radiated Emissions (9 kHz~30MHz)

 C3. Results of Radiated Emissions (30MHz~1GHz)

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR890604-01D	Rev. 01	Initial issue of report	Nov. 09, 2018



SUMMARY OF THE TEST RESULT

Report Section	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 3.73 dB at 0.208MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 59.95 dB μ V/m at 13.560 MHz
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Complies	Under limit 3.11 dB at 94.990MHz for Quasi-Peak
3.6	15.203	Antenna Requirements	Complies	-



1. General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1955-7
FCC ID	IHDT56XQ4
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/ HSPA+(16QAM not support uplink)/ LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
IMEI Code	Comducted: 359508090022293/32200905953A08 Conduction: 359508090022558/359508090022566 Radiation: 359508090022376/359508090022384
HW Version	DVT2
SW Version	fastboot_ocean_oem_userdebug_9_PPO29.36_b671_i ntcfg-test-keys_oem.tar
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the differences between two samples are only for SIM slot, the sample 1 is dual SIM slot, the sample 2 is single SIM slot. According to the difference, we evaluate the sample 1 to perform full test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.504 KHz
99%OBW	2.113 KHz
Antenna Type	Loop Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola(Salom)	Model Name	SC-51
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 1 (EU)	Brand Name	Motorola(Salom)	Model Name	SC-52
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 1 (UK)	Brand Name	Motorola(Salom)	Model Name	SC-53
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 1 (AU)	Brand Name	Motorola(Salom)	Model Name	SC-55
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 2 (US)	Brand Name	Motorola(Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 2 (EU)	Brand Name	Motorola(Chenyang)	Model Name	SC-52
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 2 (UK)	Brand Name	Motorola(Chenyang)	Model Name	SC-53
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
AC Adapter 2 (AU)	Brand Name	Motorola(Chenyang)	Model Name	SC-55
	Power Rating	I/P: 100 - 240 Vac, 0.6A, O/P: 5Vdc -3000mA; 9Vdc -2000mA;12Vdc -1500mA		
Earphone	Brand Name	Motorola(Lianyun)	Model Name	LYM500B-36C-003
	Signal Line	1.2 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola(Saibao)	Model Name	711310002491
	Signal Line	1.0 meter, shielded cable, without ferrite core		
Battery	Brand Name	Motorola (SCUD)	Model Name	JK50
	Power Rating	3.8Vdc,5000mAh	Type	Li-ion



1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

Test Site	Sporton International (Kunshan) Inc.			
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958			
Test Site No.	Sporton Site No.			FCC Registration No. 630927
	TH01-KS	03CH06-KS	CO01-KS	
Test Engineer	Silent Hai	Carl Ni	Amos Zhang	
Temperature	49~51	22~23	23.3~24.2	
Relative Humidity	51~55	41~44	48~50	

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- ANSI C63.10-2013



2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type A) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.

Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable(Charging from Adapter 2) + Earphone + NFC Tx
Remark: For Radiated Test Cases, The tests were performed with Adapter 1, Earphone and USB Cable.	

2.2 Connection Diagram of Test System

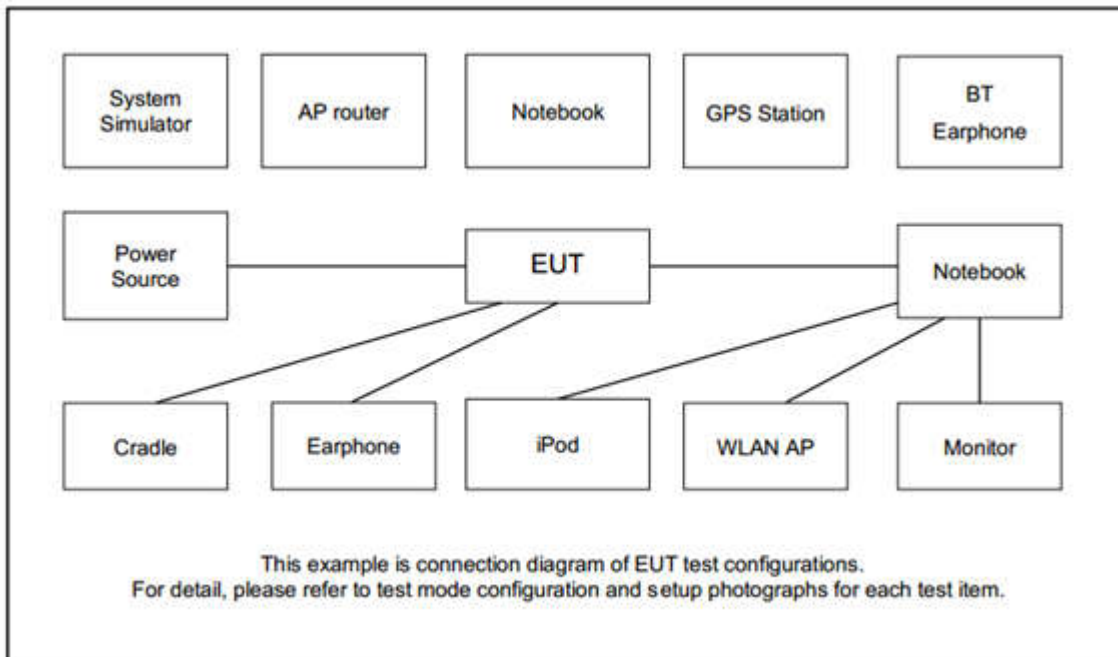

2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	NFC card	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

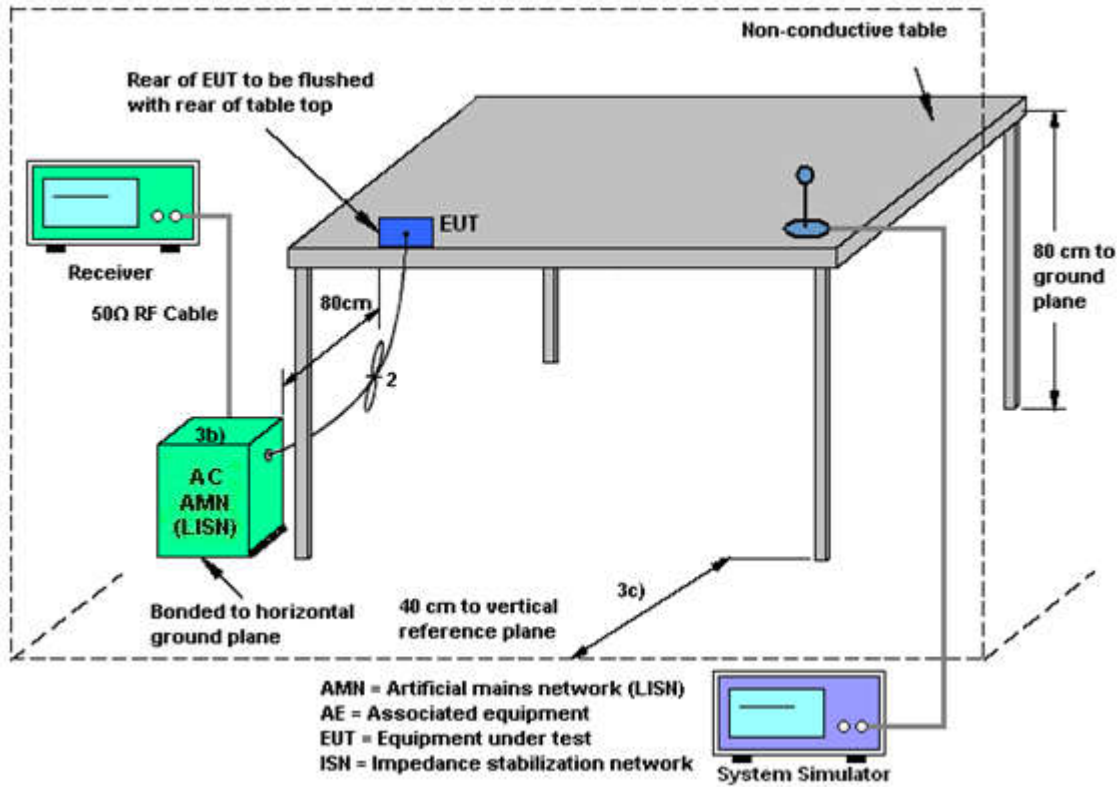

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

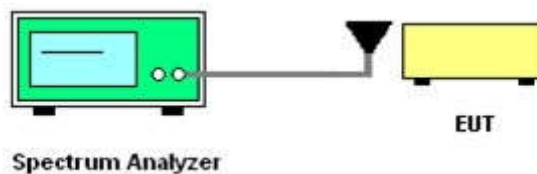

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

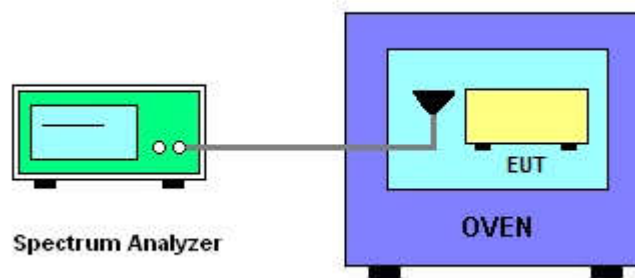

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μV/m) at 30m	Field Strength (dBμV/m) at 30m	Field Strength (dBμV/m) at 10m	Field Strength (dBμV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

3.4.2 Measuring Instruments


See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.
Note: Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

3.4.4 Test Setup

For radiated emissions below 30MHz

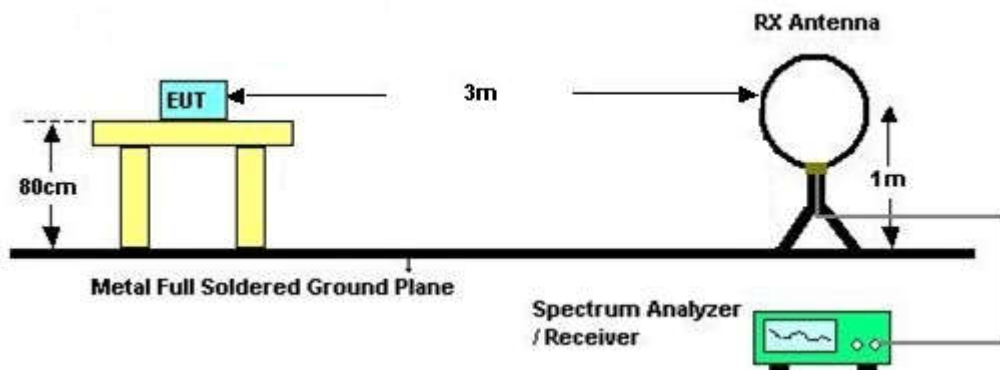

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μV/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

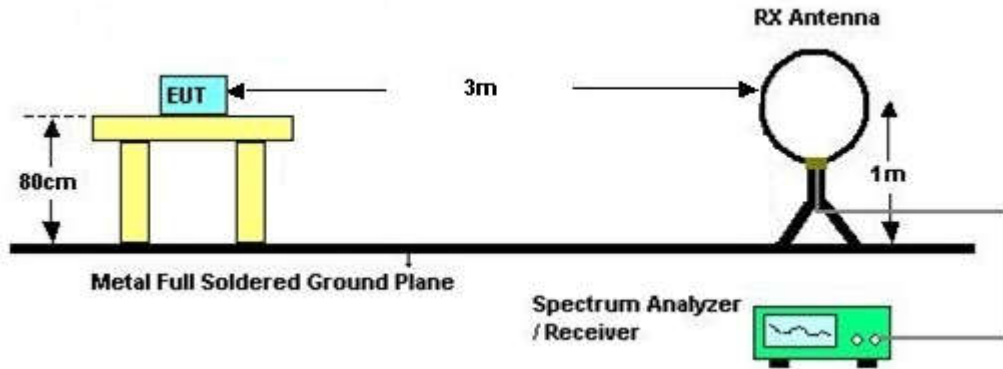

For radiated emissions above 30MHz

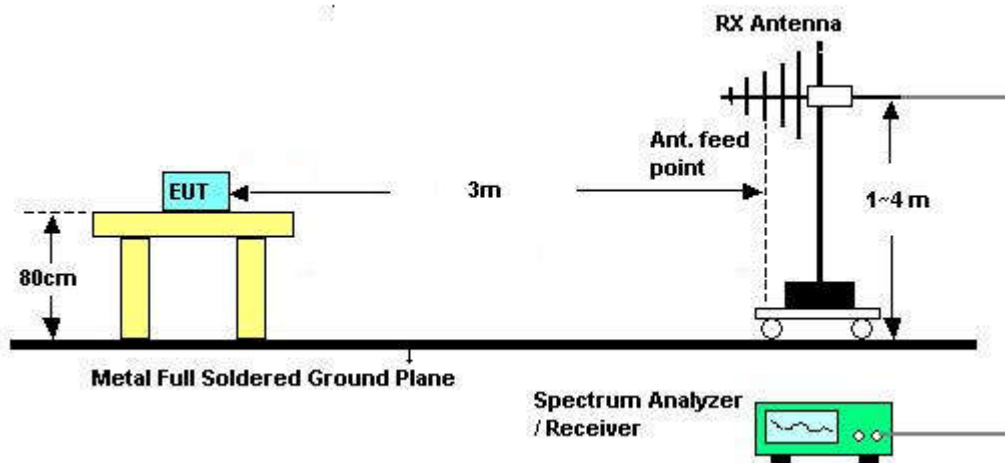

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Nov. 08, 2018	Aug. 06, 2019	Conducted (TH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 08, 2018	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Nov. 08, 2018	Jun. 26, 2019	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 19, 2018	Oct. 22, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Oct. 22, 2018	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 23, 2017	Oct. 22, 2018	Nov. 22, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Oct. 22, 2018	Oct. 11, 2019	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Oct. 12, 2018	Nov. 02, 2018	Oct. 11, 2019	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz-44GHz	Jun. 25, 2018	Nov. 02, 2018	Jun. 24, 2019	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Nov. 02, 2018	Oct. 18, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 29, 2018	Nov. 02, 2018	Jan. 28, 2019	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Nov. 02, 2018	Aug. 05, 2019	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 02, 2018	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 02, 2018	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 02, 2018	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------


Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------



Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

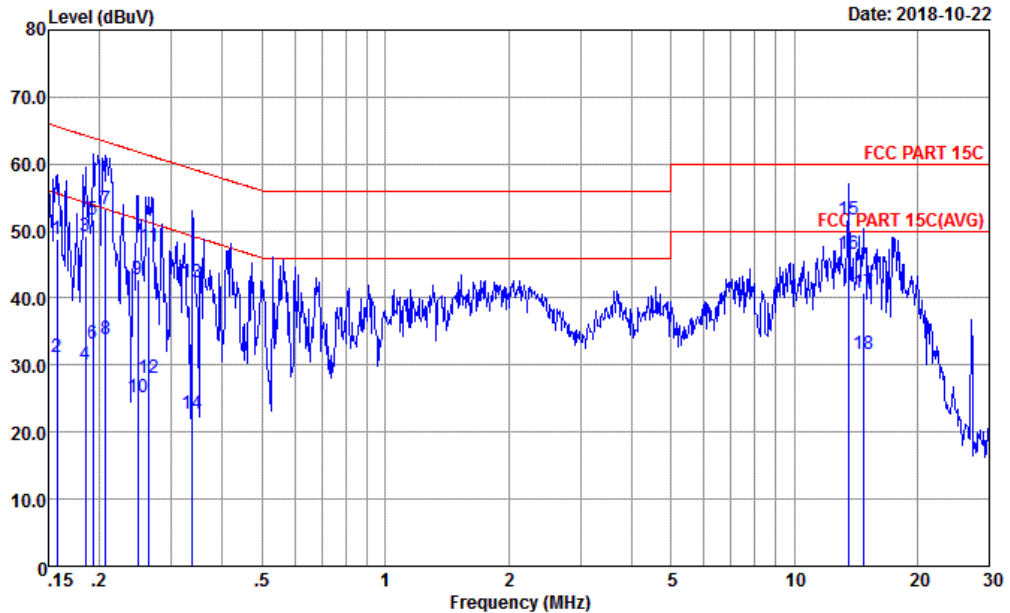

Site : CO01-KS
 Condition : FCC PART 15C LISN-L-171013-060103 LINE


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.157	48.83	-16.77	65.60	38.20	0.17	10.46	QP
2	0.157	31.23	-24.37	55.60	20.60	0.17	10.46	Average
3	0.184	49.19	-15.09	64.28	38.60	0.19	10.40	QP
4	0.184	30.19	-24.09	54.28	19.60	0.19	10.40	Average
5	0.192	51.77	-12.16	63.93	41.19	0.20	10.38	QP
6	0.192	33.17	-20.76	53.93	22.59	0.20	10.38	Average
7	0.207	53.16	-10.16	63.32	42.60	0.20	10.36	QP
8	0.207	33.86	-19.46	53.32	23.30	0.20	10.36	Average
9	0.248	42.85	-18.97	61.82	32.31	0.21	10.33	QP
10	0.248	25.15	-26.67	51.82	14.61	0.21	10.33	Average
11	0.264	47.74	-13.55	61.29	37.20	0.22	10.32	QP
12	0.264	28.14	-23.15	51.29	17.60	0.22	10.32	Average
13	0.337	42.42	-16.85	59.27	31.90	0.23	10.29	QP
14	0.337	22.82	-26.45	49.27	12.30	0.23	10.29	Average
15	13.560	51.77	-8.23	60.00	41.11	0.28	10.38	QP
16 *	13.560	46.57	-3.43	50.00	35.91	0.28	10.38	Average
17	14.750	40.86	-19.14	60.00	30.20	0.27	10.39	QP
18	14.750	31.56	-18.44	50.00	20.90	0.27	10.39	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

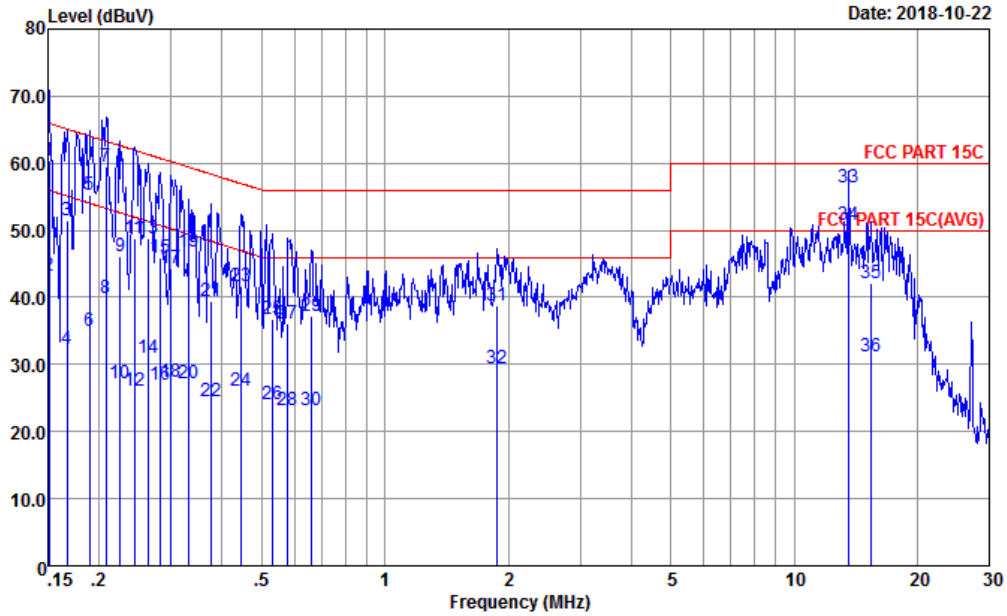


Site : CO01-KS
 Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	60.36	-5.60	65.96	49.60	0.28	10.48	QP
2	0.151	43.26	-12.70	55.96	32.50	0.28	10.48	Average
3	0.167	51.52	-13.60	65.12	40.80	0.28	10.44	QP
4	0.167	32.32	-22.80	55.12	21.60	0.28	10.44	Average
5	0.189	55.16	-8.90	64.06	44.50	0.28	10.38	QP
6	0.189	34.96	-19.10	54.06	24.30	0.28	10.38	Average
7	0.208	59.54	-3.73	63.27	48.90	0.28	10.36	QP
8	0.208	39.94	-13.33	53.27	29.30	0.28	10.36	Average
9	0.226	46.23	-16.38	62.61	35.60	0.28	10.35	QP
10	0.226	27.23	-25.38	52.61	16.60	0.28	10.35	Average
11	0.244	48.82	-13.13	61.95	38.20	0.28	10.34	QP
12	0.244	26.12	-25.83	51.95	15.50	0.28	10.34	Average
13	0.263	48.81	-12.53	61.34	38.20	0.28	10.33	QP
14	0.263	30.91	-20.43	51.34	20.30	0.28	10.33	Average
15	0.282	45.80	-14.96	60.76	35.20	0.28	10.32	QP
16	0.282	26.90	-23.86	50.76	16.30	0.28	10.32	Average
17	0.300	44.39	-15.85	60.24	33.80	0.28	10.31	QP



Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

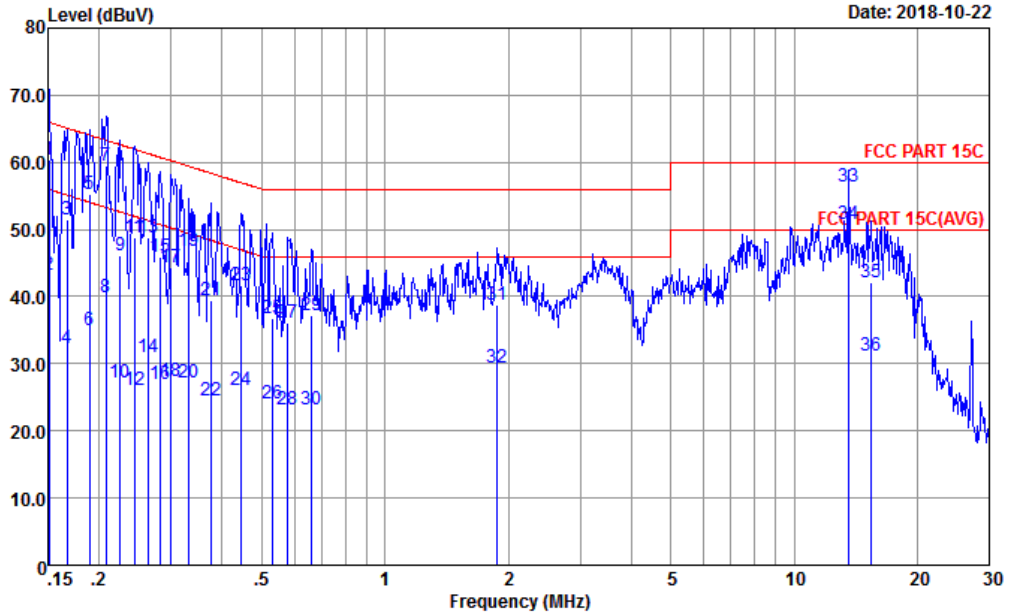

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	0.300	27.49	-22.75	50.24	16.90	0.28	10.31	Average
19	0.332	46.78	-12.62	59.40	36.20	0.29	10.29	QP
20	0.332	27.18	-22.22	49.40	16.60	0.29	10.29	Average
21	0.375	39.36	-19.03	58.39	28.79	0.29	10.28	QP
22	0.375	24.46	-23.93	48.39	13.89	0.29	10.28	Average
23	0.444	41.74	-15.24	56.98	31.20	0.29	10.25	QP
24	0.444	26.04	-20.94	46.98	15.50	0.29	10.25	Average
25	0.532	36.73	-19.27	56.00	26.20	0.29	10.24	QP
26	0.532	24.03	-21.97	46.00	13.50	0.29	10.24	Average
27	0.579	36.03	-19.97	56.00	25.50	0.29	10.24	QP
28	0.579	23.13	-22.87	46.00	12.60	0.29	10.24	Average
29	0.661	37.14	-18.86	56.00	26.60	0.30	10.24	QP
30	0.661	23.14	-22.86	46.00	12.60	0.30	10.24	Average
31	1.878	38.75	-17.25	56.00	28.20	0.32	10.23	QP
32	1.878	29.51	-16.49	46.00	18.96	0.32	10.23	Average
33	13.560	56.42	-3.58	60.00	45.81	0.23	10.38	QP
34 *	13.560	50.92	0.92	50.00	40.31	0.23	10.38	Average
35	15.470	42.21	-17.79	60.00	31.61	0.20	10.40	QP
36	15.470	31.21	-18.79	50.00	20.61	0.20	10.40	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

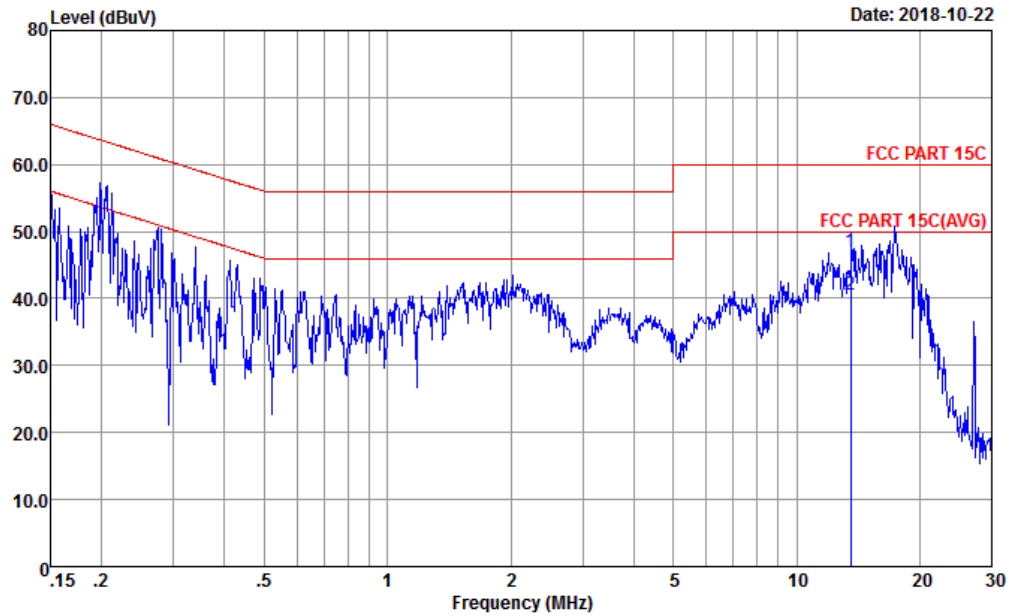

Site : CO01-KS
 Condition : FCC PART 15C LISN-L-171013-060103 LINE


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	13.560	46.97	-13.03	60.00	36.31	0.28	10.38	QP
2 *	13.560	40.67	-9.33	50.00	30.01	0.28	10.38	Average

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.



Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

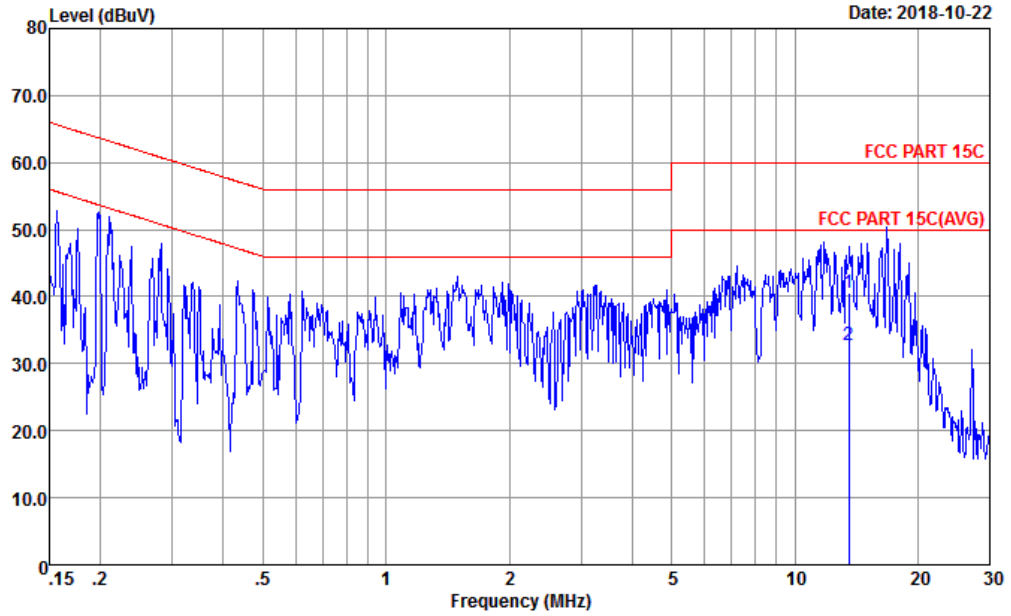

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	13.560	40.52	-19.48	60.00	29.91	0.23	10.38	QP
2 *	13.560	32.82	-17.18	50.00	22.21	0.23	10.38	Average

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56																																																										
<p>Ref Level 0.00 dBm Att 30 dB RBW 1 kHz VBW 3 kHz Mode Auto FFT</p> <p>CF 13.56 MHz 691 pts Span 10.0 kHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td>1</td> <td>13.560492 MHz</td> <td>-17.88 dBm</td> <td>ndB down</td> <td>2.504 kHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td>1</td> <td>13.559233 MHz</td> <td>-38.07 dBm</td> <td>ndB</td> <td>20.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td>1</td> <td>13.561737 MHz</td> <td>-37.99 dBm</td> <td>Q factor</td> <td>5416.4</td> </tr> </tbody> </table> <p>Date: 8 NOV.2018 15:18:16</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	13.560492 MHz	-17.88 dBm	ndB down	2.504 kHz	T1	1	1	13.559233 MHz	-38.07 dBm	ndB	20.00 dB	T2	1	1	13.561737 MHz	-37.99 dBm	Q factor	5416.4	<p>Ref Level 0.00 dBm Att 30 dB RBW 1 kHz VBW 3 kHz Mode Auto FFT</p> <p>CF 13.56 MHz 691 pts Span 10.0 kHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td>1</td> <td>13.560492 MHz</td> <td>-15.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td>1</td> <td>13.5594356 MHz</td> <td>-29.91 dBm</td> <td>Occ Bw</td> <td>2.112879884 kHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td>1</td> <td>13.5615485 MHz</td> <td>-30.01 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 8 NOV.2018 15:08:14</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	13.560492 MHz	-15.91 dBm			T1	1	1	13.5594356 MHz	-29.91 dBm	Occ Bw	2.112879884 kHz	T2	1	1	13.5615485 MHz	-30.01 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																						
M1	1	1	13.560492 MHz	-17.88 dBm	ndB down	2.504 kHz																																																							
T1	1	1	13.559233 MHz	-38.07 dBm	ndB	20.00 dB																																																							
T2	1	1	13.561737 MHz	-37.99 dBm	Q factor	5416.4																																																							
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																						
M1	1	1	13.560492 MHz	-15.91 dBm																																																									
T1	1	1	13.5594356 MHz	-29.91 dBm	Occ Bw	2.112879884 kHz																																																							
T2	1	1	13.5615485 MHz	-30.01 dBm																																																									
20dB Bandwidth (kHz)	2.504	99% Occupied BW(kHz)	2.113																																																										
Frequency range (MHz)	$f_L > 13.553$		Test Result																																																										
	$f_H < 13.567$		Complies																																																										




B2. Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
120	13.560478	-20	13.560485
102	13.560478	-10	13.560485
138	13.560478	0	13.560485
		10	13.560485
		20	13.560478
		30	13.560485
		40	13.560485
		50	13.560478
Max.Deviation (MHz)	0.000478	Max.Deviation (MHz)	0.000485
Max.Deviation (ppm)	35.2139	Max.Deviation (ppm)	35.7670
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

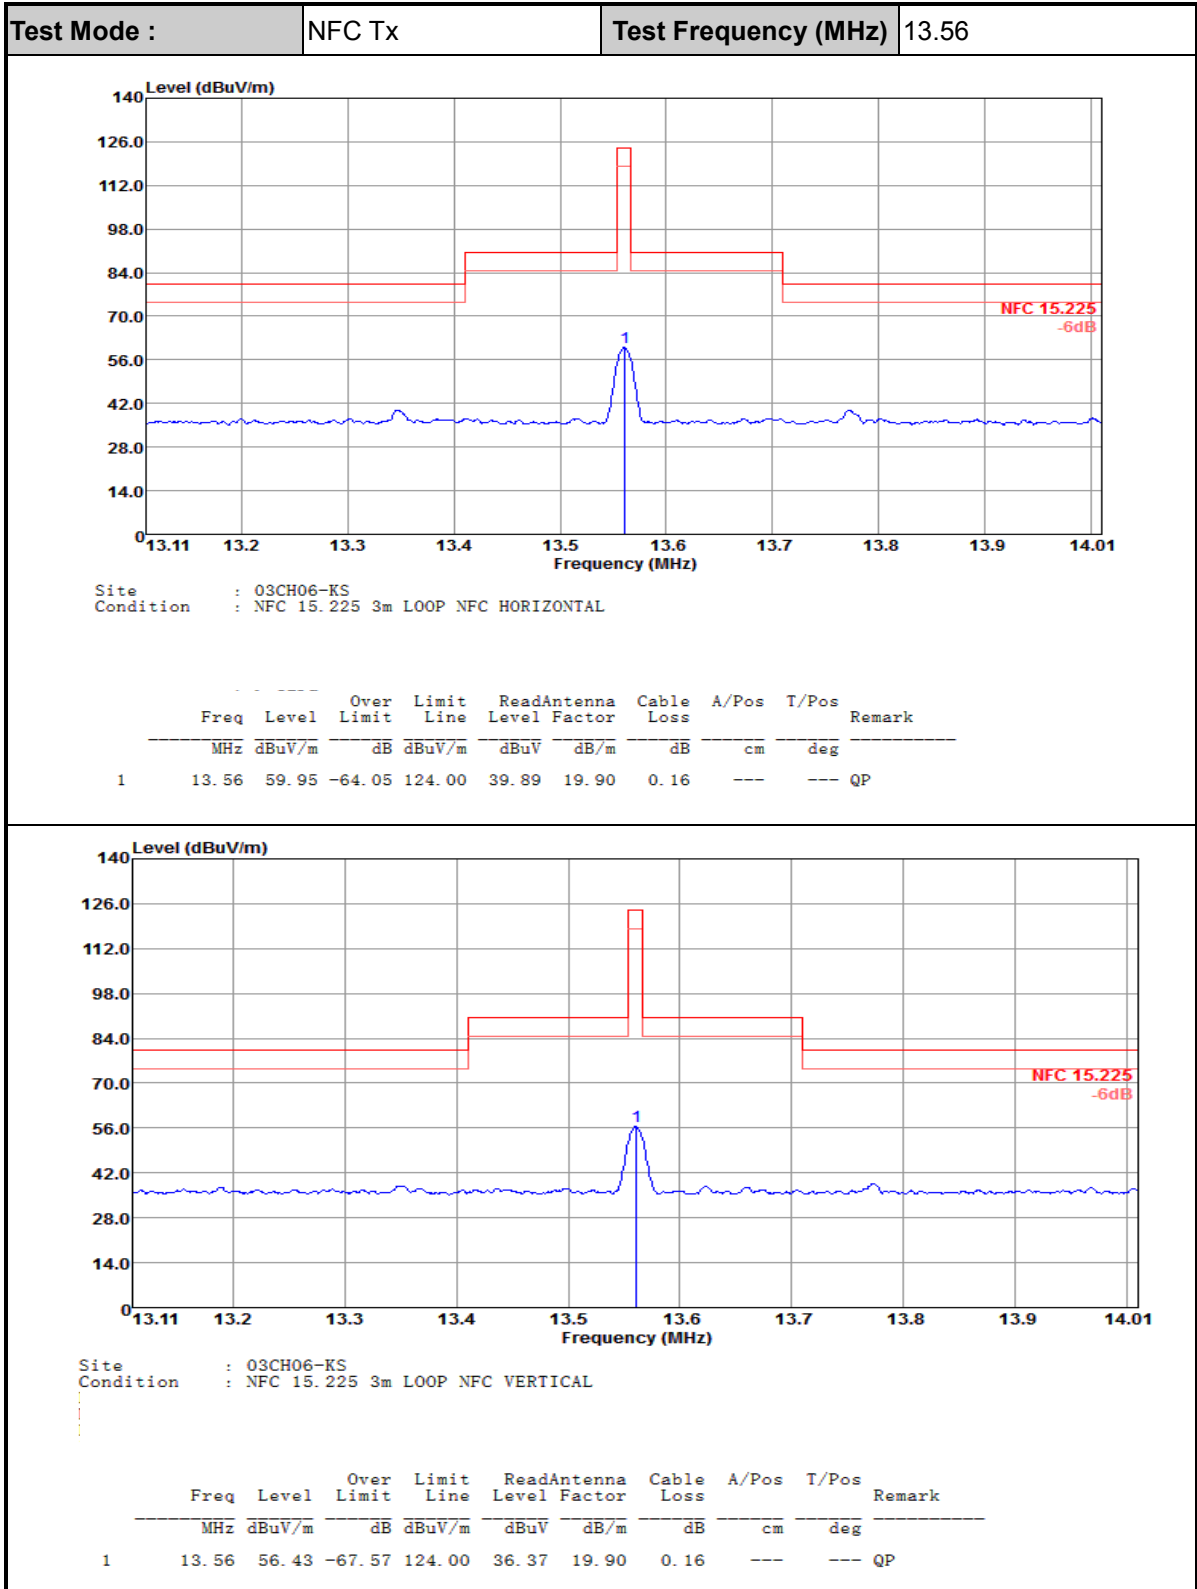



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :		NFC Tx			Polarization :		Horizontal		
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.01915	50.12	-71.84	121.96	29.51	20.6	0.01	-	-	Average
0.06794	54.99	-55.96	110.95	34.63	20.35	0.01	-	-	Average
0.32575	52.5	-44.83	97.33	31.99	20.5	0.01	-	-	Average
0.3831	51.06	-44.86	95.92	30.65	20.4	0.01	-	-	Average
2.99	44.18	-25.36	69.54	24.34	19.8	0.04	-	-	QP
22.96	35.19	-34.35	69.54	14.88	20.05	0.26	-	-	QP

Test Mode :		NFC Tx			Polarization :		Vertical		
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.01915	48.99	-72.97	121.96	28.38	20.6	0.01	-	-	Average
0.07189	50.26	-60.2	110.46	29.9	20.35	0.01	-	-	Average
0.3276	49.21	-48.07	97.28	28.7	20.5	0.01	-	-	Average
0.3831	48.75	-47.17	95.92	28.34	20.4	0.01	-	-	Average
2.984	42.48	-27.06	69.54	22.64	19.8	0.04	-	-	QP
25.314	36.54	-33	69.54	15.92	20.33	0.29	-	-	QP

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. Limit line = specific limits (dBμV) + distance extrapolation factor.



C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

Test Mode :		NFC Tx			Polarization :			Horizontal			
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark	
40.67	23.7	-16.3	40	37.67	17.9	0.61	32.48	-	-	Peak	
81.41	20.14	-19.86	40	38.71	12.91	0.92	32.4	-	-	Peak	
94.99	40.39	-3.11	43.5	55.74	15.85	1	32.2	100	0	QP	
474.26	27.25	-18.75	46	33.57	23.03	2.3	31.65	-	-	Peak	
881.66	32.53	-13.47	46	34.55	26.43	3.19	31.64	-	-	Peak	
908.82	32.81	-13.19	46	34.54	26.59	3.26	31.58	-	-	Peak	

Test Mode :		NFC Tx			Polarization :			Vertical			
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark	
40.67	36.44	-3.56	40	50.41	17.9	0.61	32.48	100	0	QP	
67.83	35.06	-4.94	40	53.82	12.66	0.82	32.24	-	-	Peak	
94.99	35.4	-8.1	43.5	50.75	15.85	1	32.2	-	-	Peak	
176.47	27.84	-15.66	43.5	43.11	15.4	1.38	32.05	-	-	Peak	
230.79	24.12	-21.88	46	37.89	16.45	1.66	31.88	-	-	Peak	
908.82	28.35	-17.65	46	30.08	26.59	3.26	31.58	-	-	Peak	

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.