



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1980-4
FCC ID : IHDT56XS1
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Dec. 28, 2018 and testing was completed on Jan. 26, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Specification of Accessory 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 16

 3.4 Unwanted Emissions Measurement 18

 3.5 AC Conducted Emission Measurement..... 23

 3.6 Automatically Discontinue Transmission 25

 3.7 Antenna Requirements 26

4 LIST OF MEASURING EQUIPMENT 27

5 UNCERTAINTY OF EVALUATION 28

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR8D2801-01F	Rev. 01	Initial issue of report	Mar. 12, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 13.44 dB at 30.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.84 dB at 0.200 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1980-4
FCC ID	IHDT56XS1
EUT supports Radios application	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+(16QAM is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR / LE NFC/GNSS/FM Receiver
IMEI Code	Conducted: N/A Conduction: 352157100008103 Radiation: 352157100004805
HW Version	DVT2
SW Version	PDF29.58
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 17.21 dBm / 0.0526 W 802.11n HT20 : 15.95 dBm / 0.0394 W 802.11n HT40 : 16.22 dBm / 0.0419 W 802.11ac VHT20: 15.01 dBm / 0.0317 W 802.11ac VHT40: 15.28 dBm / 0.0337 W 802.11ac VHT80: 15.14 dBm / 0.0327 W
99% Occupied Bandwidth	802.11a : 17.73 MHz 802.11n HT20 : 18.68 MHz 802.11n HT40 : 36.86 MHz 802.11ac VHT80 : 75.76 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	Loop Antenna with gain -8.00 dBi

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11an HT20/ HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH06-KS	CN5013	630927

1.7 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola (Salom)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 0.6A O/P: 5Vdc,3A or 9Vdc,2A or 12Vdc,1.5A		
AC Adapter 2	Brand Name	Motorola (Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 0.6A O/P: 5Vdc,3A or 9Vdc,2A or 12Vdc,1.5A		
Battery	Brand Name	Amperex (Motorola)	Model Name	KZ40
	Power Rating	3.8Vdc,3600mAh	Type	Li-ion Polymer
USB Cable 1	Brand Name	Motorola (Cabletech)	Model Name	SC18C49697
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	SC18C24367
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (Luxshare)	Model Name	SC18C24368
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 2 (Charging from Adapter 2) + Earphone
Remark: The accessories are from Part 15B worst case.	

Ch. #		Band IV : 5745-5825 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.8 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

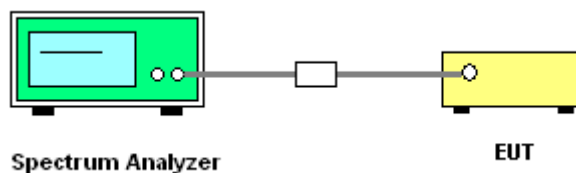

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

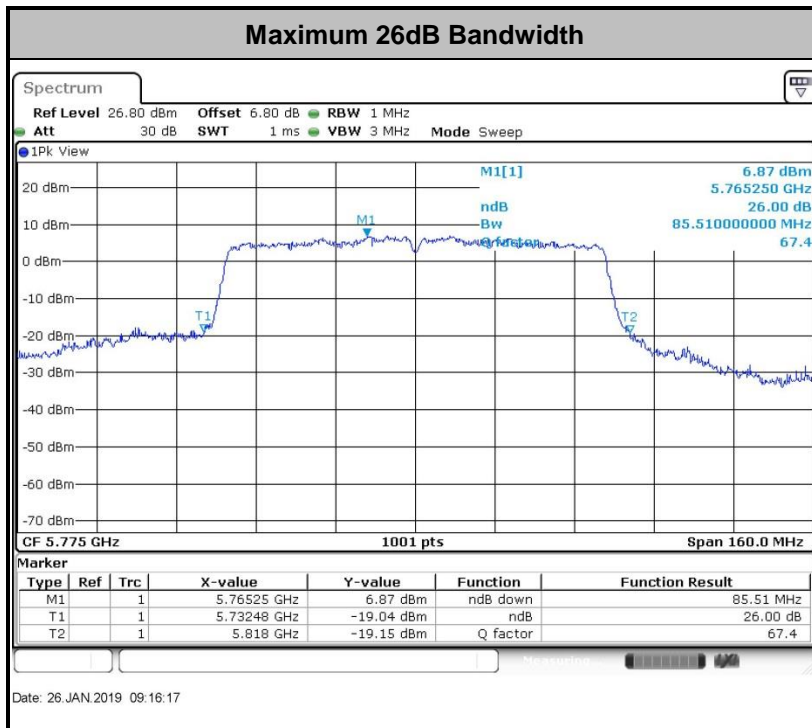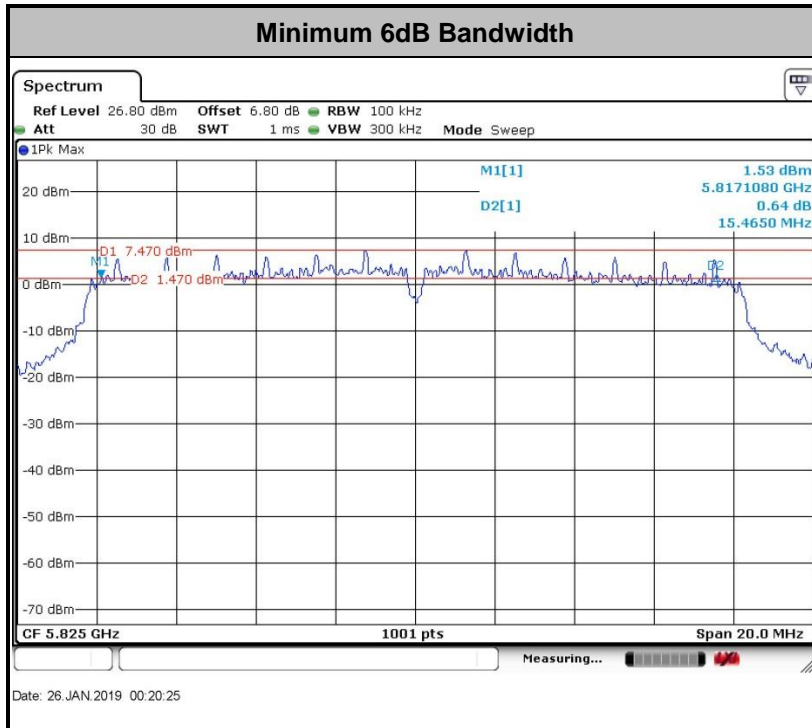

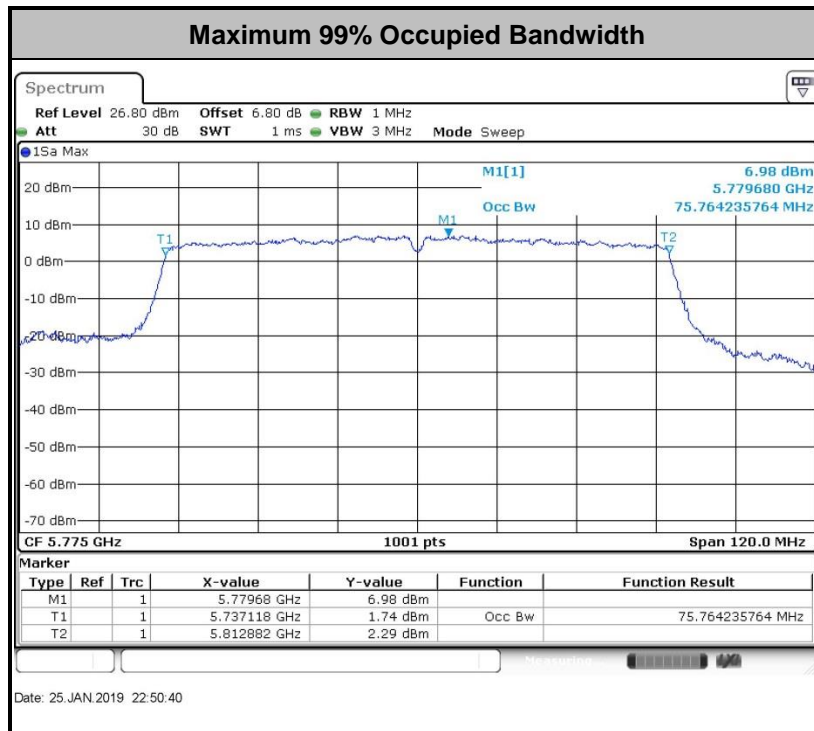

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

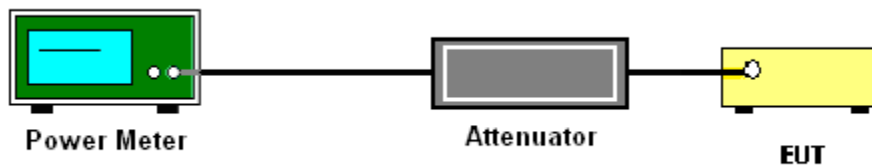

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

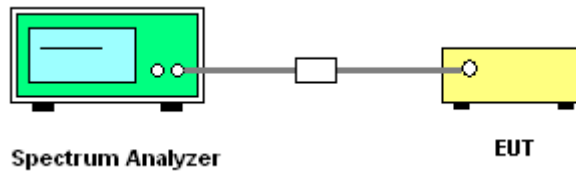

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

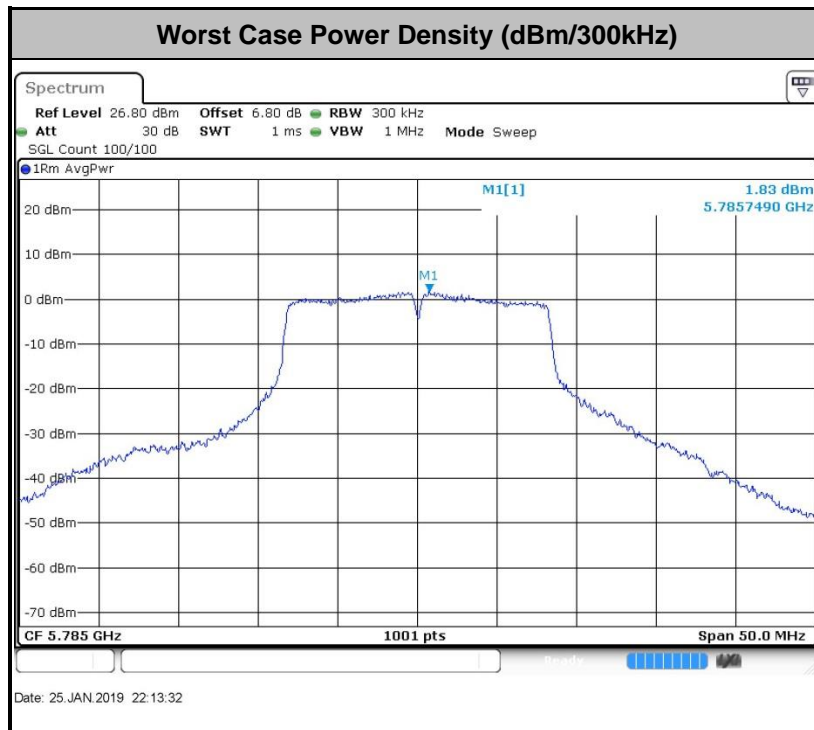



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

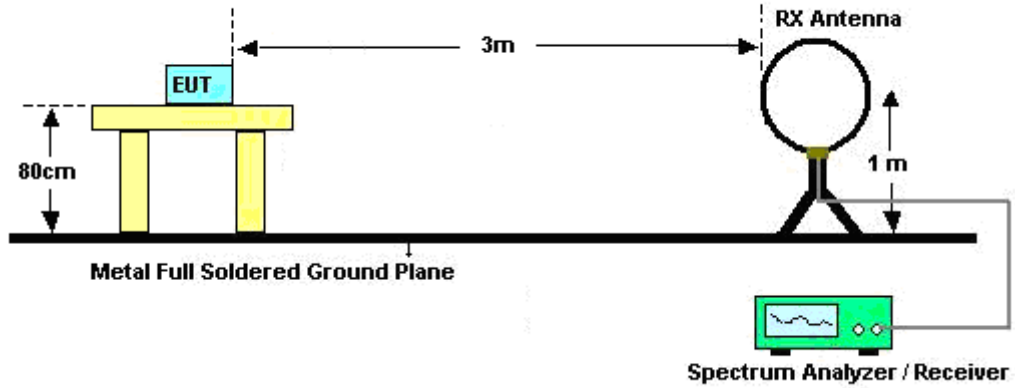

For radiated emissions from 30MHz to 1GHz

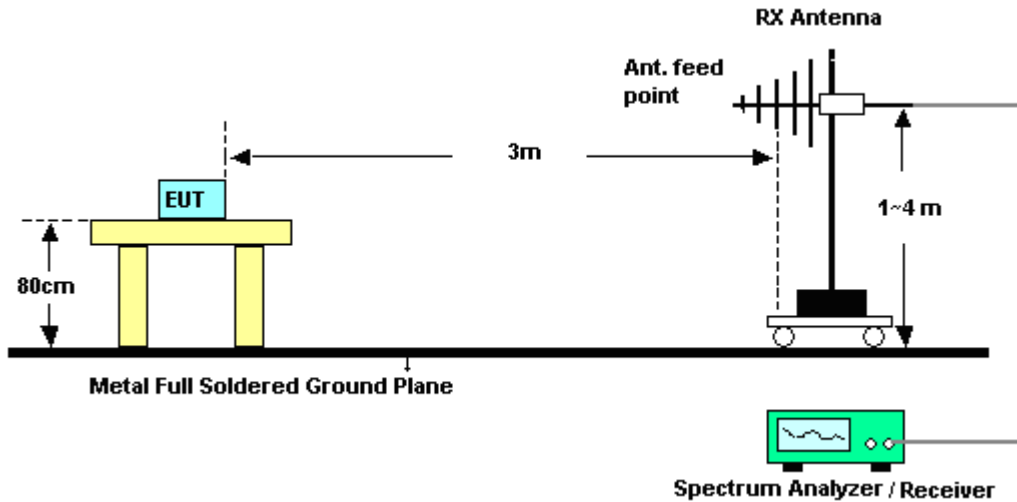

For radiated emissions above 1GHz

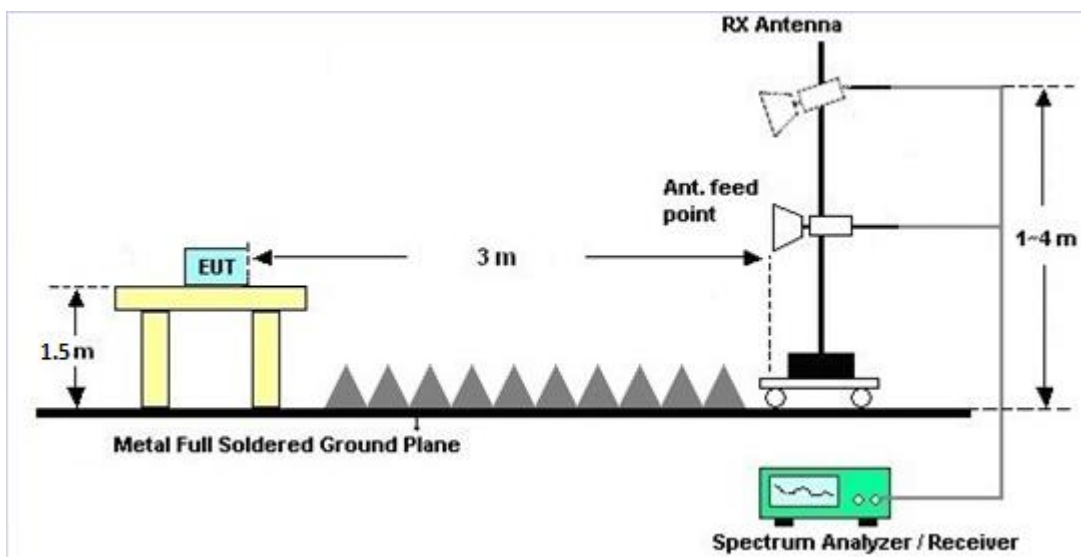



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup



3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Jan. 25, 2019~ Jan. 26, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Jan. 25, 2019~ Jan. 26, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Jan. 25, 2019~ Jan. 26, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 23	3Hz~8.5GHz;Max 30dBm	Oct.12, 2018	Jan. 26, 2019	Oct. 11, 2019	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY574710 84	10Hz~44GHz	Jun. 25, 2018	Jan. 26, 2019	Jun. 24, 2019	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Jan. 26, 2019	Oct. 18, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Jan. 29, 2018	Jan. 26, 2019	Jan. 28, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	Jan. 26, 2019	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Feb. 07, 2018	Jan. 26, 2019	Feb. 06, 2019	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Jan. 26, 2019	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 08, 2018	Jan. 26, 2019	Feb. 07, 2019	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Jan. 26, 2019	Apr. 16, 2019	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532702 03	500MHz~26.5GHz	Apr. 18, 2018	Jan. 26, 2019	Apr. 17, 2019	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jan. 26, 2019	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 26, 2019	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 26, 2019	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Jan. 20, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Jan. 20, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Jan. 20, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Jan. 20, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	IRON YAO	Temperature:	21~25	°C
Test Date:	2019/01/25~2019/1/26	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.73	24.725	15.524	0.5	Pass
11a	6Mbps	1	157	5785	17.38	24.126	15.524	0.5	Pass
11a	6Mbps	1	165	5825	17.63	24.525	15.465	0.5	Pass
HT20	MCS 0	1	149	5745	18.68	25.524	15.964	0.5	Pass
HT20	MCS 0	1	157	5785	18.63	25.075	15.644	0.5	Pass
HT20	MCS 0	1	165	5825	18.58	24.426	15.964	0.5	Pass
HT40	MCS 0	1	151	5755	36.86	42.527	35.524	0.5	Pass
HT40	MCS 0	1	159	5795	36.56	42.078	35.325	0.5	Pass
VHT80	MCS 0	1	155	5775	75.76	85.51	75.125	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.08	16.51	30.00	-8.00		Pass
11a	6Mbps	1	157	5785	0.08	17.00	30.00	-8.00		Pass
11a	6Mbps	1	165	5825	0.08	17.21	30.00	-8.00		Pass
HT20	MCS 0	1	149	5745	0.08	14.93	30.00	-8.00		Pass
HT20	MCS 0	1	157	5785	0.08	15.81	30.00	-8.00		Pass
HT20	MCS 0	1	165	5825	0.08	15.95	30.00	-8.00		Pass
HT40	MCS 0	1	151	5755	0.16	15.51	30.00	-8.00		Pass
HT40	MCS 0	1	159	5795	0.16	16.22	30.00	-8.00		Pass
VHT20	MCS 0	1	149	5745	0.08	14.11	30.00	-8.00		Pass
VHT20	MCS 0	1	157	5785	0.08	14.86	30.00	-8.00		Pass
VHT20	MCS 0	1	165	5825	0.08	15.01	30.00	-8.00		Pass
VHT40	MCS 0	1	151	5755	0.16	14.57	30.00	-8.00		Pass
VHT40	MCS 0	1	159	5795	0.16	15.28	30.00	-8.00		Pass
VHT80	MCS 0	1	155	5775	0.33	15.14	30.00	-8.00		Pass


TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.08	2.22	3.41	30.00	-8.00	Pass
11a	6Mbps	1	157	5785	0.08	2.22	4.12	30.00	-8.00	Pass
11a	6Mbps	1	165	5825	0.08	2.22	3.88	30.00	-8.00	Pass
HT20	MCS 0	1	149	5745	0.08	2.22	1.55	30.00	-8.00	Pass
HT20	MCS 0	1	157	5785	0.08	2.22	2.40	30.00	-8.00	Pass
HT20	MCS 0	1	165	5825	0.08	2.22	2.41	30.00	-8.00	Pass
HT40	MCS 0	1	151	5755	0.16	2.22	-1.40	30.00	-8.00	Pass
HT40	MCS 0	1	159	5795	0.16	2.22	-0.43	30.00	-8.00	Pass
VHT80	MCS 0	1	155	5775	0.33	2.22	-4.41	30.00	-8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

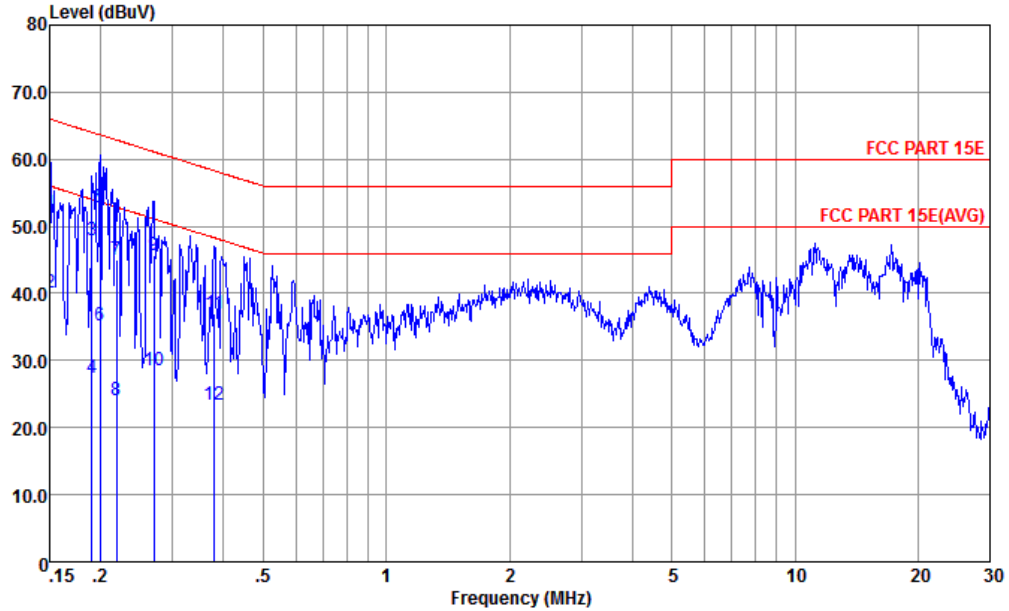


Site : CO01-KS
 Condition : FCC PART 15E LISN-L-181013-060103 LINE

mode : Mode 1
 : 352157100008103 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	51.91	-14.09	66.00	41.20	0.23	10.48	QP
2	0.150	40.01	-15.99	56.00	29.30	0.23	10.48	Average
3	0.190	47.91	-16.11	64.02	37.31	0.22	10.38	QP
4	0.190	27.51	-26.51	54.02	16.91	0.22	10.38	Average
5 *	0.200	52.78	-10.84	63.62	42.20	0.22	10.36	QP
6	0.200	35.19	-18.43	53.62	24.61	0.22	10.36	Average
7	0.219	45.07	-17.81	62.88	34.50	0.22	10.35	QP
8	0.219	24.07	-28.81	52.88	13.50	0.22	10.35	Average
9	0.270	45.75	-15.37	61.12	35.21	0.22	10.32	QP
10	0.270	28.45	-22.67	51.12	17.91	0.22	10.32	Average
11	0.379	37.10	-21.20	58.30	26.60	0.23	10.27	QP
12	0.379	23.40	-24.90	48.30	12.90	0.23	10.27	Average



Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

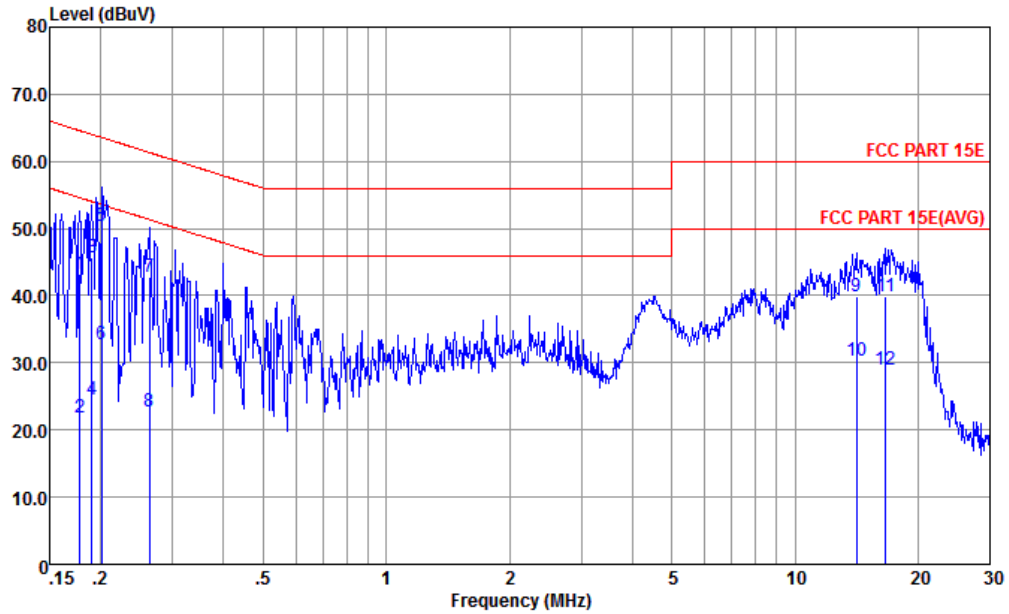

Site : CO01-KS
 Condition : FCC PART 15E LISN-N-181013-060103 NEUTRAL
 mode : Mode 1
 : 352157100008103 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.178	43.21	-21.38	64.59	32.60	0.20	10.41	QP
2	0.178	21.91	-32.68	54.59	11.30	0.20	10.41	Average
3	0.190	45.79	-18.23	64.02	35.21	0.20	10.38	QP
4	0.190	24.49	-29.53	54.02	13.91	0.20	10.38	Average
5 *	0.201	50.46	-13.12	63.58	39.90	0.20	10.36	QP
6	0.201	32.66	-20.92	53.58	22.10	0.20	10.36	Average
7	0.263	42.72	-18.62	61.34	32.19	0.20	10.33	QP
8	0.263	22.72	-28.62	51.34	12.19	0.20	10.33	Average
9	14.138	39.95	-20.05	60.00	29.29	0.27	10.39	QP
10	14.138	30.25	-19.75	50.00	19.59	0.27	10.39	Average
11	16.661	39.93	-20.07	60.00	29.20	0.30	10.43	QP
12	16.661	28.93	-21.07	50.00	18.20	0.30	10.43	Average



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5624.4	48.29	-20.01	68.3	40.47	30.33	8.92	31.43	100	114	P	H
		5695.6	48.55	-53.51	102.06	40.34	30.72	8.98	31.49	100	114	P	H
		5720	55.12	-55.78	110.9	46.64	30.99	9.01	31.52	100	114	P	H
		5724.8	65.5	-56.34	121.84	57.02	30.99	9.01	31.52	100	114	P	H
	*	5744	98.35	-	-	89.74	31.13	9.03	31.55	100	144	P	H
	*	5744	91.22	-	-	82.61	31.13	9.03	31.55	100	114	A	H
		5609.2	48.25	-20.05	68.3	40.42	30.36	8.9	31.43	100	16	P	V
		5692.4	50.67	-49.03	99.7	42.46	30.72	8.98	31.49	100	16	P	V
		5720	59.28	-51.62	110.9	50.8	30.99	9.01	31.52	100	16	P	V
		5724	68.36	-51.66	120.02	59.88	30.99	9.01	31.52	100	16	P	V
	*	5744	102.71	-	-	94.1	31.13	9.03	31.55	100	16	P	V
	*	5744	95.12	-	-	86.51	31.13	9.03	31.55	100	16	A	V



WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5852	50.76	-66.98	117.74	41.42	31.96	9.06	31.68	107	121	P	H
		5857.6	49.97	-60.20	110.17	40.49	32.1	9.06	31.68	107	121	P	H
		5892.4	49.88	-42.51	92.39	40.33	32.21	9.05	31.71	107	121	P	H
		5935.2	49.4	-18.90	68.3	39.8	32.31	9.03	31.74	107	121	P	H
	*	5822	98.5	-	-	89.26	31.82	9.07	31.65	107	121	P	H
	*	5822	91.09	-	-	81.85	31.82	9.07	31.65	107	121	A	H
		5850	53.57	-68.73	122.3	44.23	31.96	9.06	31.68	100	20	P	V
		5873.6	52.68	-53.01	105.69	43.18	32.15	9.05	31.7	100	20	P	V
		5883.6	51.05	-47.86	98.91	41.56	32.15	9.05	31.71	100	20	P	V
		5958.8	49.8	-18.50	68.3	40.1	32.42	9.02	31.74	100	20	P	V
	*	5824	103.47	-	-	94.23	31.82	9.07	31.65	100	20	P	V
	*	5824	95.55	-	-	86.31	31.82	9.07	31.65	100	20	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149		11490	44.15	-29.85	74	56.52	39.68	13.36	65.41	150	360	P	H
5745MHz		11490	42.4	-31.60	74	54.77	39.68	13.36	65.41	150	0	P	V
802.11a CH 157		11570	43.63	-30.37	74	56.09	39.49	13.44	65.39	150	360	P	H
5785MHz		11570	43.61	-30.39	74	56.07	39.49	13.44	65.39	150	0	P	V
802.11a CH 165		11650	43.76	-30.24	74	56.33	39.29	13.5	65.36	150	360	P	H
5825MHz		11650	43.67	-30.33	74	56.24	39.29	13.5	65.36	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5632	48.12	-20.18	68.3	40.29	30.33	8.92	31.42	100	121	P	H
		5696.8	49.44	-53.50	102.94	41.23	30.72	8.98	31.49	100	121	P	H
		5720	55.05	-55.85	110.9	46.57	30.99	9.01	31.52	100	121	P	H
		5724	64.53	-55.49	120.02	56.05	30.99	9.01	31.52	100	121	P	H
	*	5746	96.8	-	-	88.19	31.13	9.03	31.55	100	121	P	H
	*	5746	90.13	-	-	81.52	31.13	9.03	31.55	100	121	A	H
		5605.6	48.87	-19.43	68.3	41.04	30.36	8.9	31.43	100	19	P	V
		5699.2	54.22	-50.49	104.71	46.01	30.72	8.98	31.49	100	19	P	V
		5720	57.9	-53.00	110.9	49.42	30.99	9.01	31.52	100	19	P	V
		5724.4	69.18	-51.75	120.93	60.7	30.99	9.01	31.52	100	19	P	V
	*	5746	101.99	-	-	93.38	31.13	9.03	31.55	100	19	P	V
	*	5746	94.66	-	-	86.05	31.13	9.03	31.55	100	19	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5850	51.38	-70.92	122.3	42.04	31.96	9.06	31.68	349	120	P	H
		5856.8	51.18	-59.22	110.4	41.7	32.1	9.06	31.68	349	120	P	H
		5894.8	50.19	-40.42	90.61	40.64	32.21	9.05	31.71	349	120	P	H
		5964.8	50.49	-17.81	68.3	40.81	32.42	9.02	31.76	349	120	P	H
	*	5826	97.99	-	-	88.75	31.82	9.07	31.65	349	120	P	H
	*	5826	90.66	-	-	81.42	31.82	9.07	31.65	349	120	A	H
		5850.4	55.5	-65.89	121.39	46.16	31.96	9.06	31.68	100	18	P	V
		5863.2	53.84	-54.76	108.6	44.38	32.1	9.06	31.7	100	18	P	V
		5879.2	51.16	-51.02	102.18	41.66	32.15	9.05	31.7	100	18	P	V
		5938	49.95	-18.35	68.3	40.35	32.31	9.03	31.74	100	18	P	V
	*	5824	102.01	-	-	92.77	31.82	9.07	31.65	100	18	P	V
	*	5824	93.99	-	-	84.75	31.82	9.07	31.65	100	18	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11490	44.16	-29.84	74	56.53	39.68	13.36	65.41	150	360	P	H
CH 149 5745MHz		11490	44.4	-29.6	74	56.77	39.68	13.36	65.41	150	0	P	V
802.11n HT20		11570	44.3	-29.7	74	56.76	39.49	13.44	65.39	150	0	P	H
CH 157 5785MHz		11570	43.12	-30.88	74	55.58	39.49	13.44	65.39	150	0	P	V
802.11n HT20		11650	43.77	-30.23	74	56.34	39.29	13.5	65.36	150	360	P	H
CH 165 5825MHz		11650	43.81	-30.19	74	56.38	39.29	13.5	65.36	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5648.8	48.02	-20.28	68.3	40.21	30.3	8.93	31.42	100	122	P	H
		5699.2	51.77	-52.94	104.71	43.56	30.72	8.98	31.49	100	122	P	H
		5717.2	64.72	-45.40	110.12	56.39	30.85	9	31.52	100	122	P	H
		5724.8	66.73	-55.11	121.84	58.25	30.99	9.01	31.52	100	122	P	H
	*	5752	93.56	-	-	84.79	31.27	9.05	31.55	100	122	P	H
	*	5752	85.88	-	-	77.11	31.27	9.05	31.55	100	122	A	H
		5850.4	48.22	-73.17	121.39	38.88	31.96	9.06	31.68	100	122	P	H
		5861.6	49.22	-59.83	109.05	39.76	32.1	9.06	31.7	100	122	P	H
802.11n		5887.2	50.13	-46.11	96.24	40.64	32.15	9.05	31.71	100	122	P	H
HT40		5937.6	49.43	-18.87	68.3	39.83	32.31	9.03	31.74	100	122	P	H
CH 151		5646.4	48.76	-19.54	68.3	40.95	30.3	8.93	31.42	100	12	P	V
5755MHz		5691.6	53.7	-45.41	99.11	45.49	30.72	8.98	31.49	100	12	P	V
		5718.4	69.09	-41.36	110.45	60.61	30.99	9.01	31.52	100	12	P	V
		5723.6	70.24	-48.87	119.11	61.76	30.99	9.01	31.52	100	12	P	V
	*	5744	97.84	-	-	89.23	31.13	9.03	31.55	100	12	P	V
	*	5744	90.17	-	-	81.56	31.13	9.03	31.55	100	12	A	V
		5852.4	49.79	-67.04	116.83	40.45	31.96	9.06	31.68	100	12	P	V
		5858.4	50.91	-59.04	109.95	41.45	32.1	9.06	31.7	100	12	P	V
		5913.2	51.32	-25.68	77	41.75	32.26	9.04	31.73	100	12	P	V
		5935.2	50.01	-18.29	68.3	40.41	32.31	9.03	31.74	100	12	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5632.8	48.94	-19.36	68.3	41.13	30.3	8.93	31.42	100	117	P	H
		5691.6	49.5	-49.61	99.11	41.29	30.72	8.98	31.49	100	117	P	H
		5712.8	49.75	-59.14	108.89	41.42	30.85	9	31.52	100	117	P	H
		5724	49.89	-70.13	120.02	41.41	30.99	9.01	31.52	100	117	P	H
	*	5798	94.23	-	-	85.21	31.55	9.08	31.61	100	117	P	H
	*	5798	87.06	-	-	78.04	31.55	9.08	31.61	100	117	A	H
		5850.4	50.92	-70.47	121.39	41.58	31.96	9.06	31.68	100	117	P	H
		5857.6	53.31	-56.86	110.17	43.83	32.1	9.06	31.68	100	117	P	H
		5890.8	49.74	-43.83	93.57	40.19	32.21	9.05	31.71	100	117	P	H
		5943.2	50	-18.30	68.3	40.34	32.37	9.03	31.74	100	117	P	H
802.11n HT40 CH 159 5795MHz		5649.99	48.66	-19.64	68.3	40.69	30.44	8.95	31.42	110	26	P	V
		5650.1	48.66	-19.71	68.37	40.69	30.44	8.95	31.42	110	26	P	V
		5714.8	50.81	-58.64	109.45	42.48	30.85	9	31.52	110	26	P	V
		5722	51.85	-63.61	115.46	43.37	30.99	9.01	31.52	110	26	P	V
	*	5792	97.59	-	-	88.57	31.55	9.08	31.61	110	26	P	V
	*	5792	90.35	-	-	81.33	31.55	9.08	31.61	110	26	A	V
		5851.2	53	-66.56	119.56	43.66	31.96	9.06	31.68	110	26	P	V
		5856	53.26	-57.36	110.62	43.78	32.1	9.06	31.68	110	26	P	V
		5876	51.98	-52.58	104.56	42.48	32.15	9.05	31.7	110	26	P	V
		5960	50.36	-17.94	68.3	40.68	32.42	9.02	31.76	110	26	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 151 at 5755MHz and 5795MHz.



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5617.6	47.91	-20.39	68.3	40	30.42	8.92	31.43	100	123	P	H
		5700	56.32	-48.98	105.3	48.18	30.65	8.98	31.49	100	123	P	H
		5720	63.35	-47.55	110.9	55.04	30.82	9.01	31.52	100	123	P	H
		5721.2	63.96	-49.68	113.64	55.65	30.82	9.01	31.52	100	123	P	H
	*	5772	91.2	-	-	82.64	31.08	9.06	31.58	100	123	P	H
	*	5772	83.85	-	-	75.29	31.08	9.06	31.58	100	123	A	H
		5853.2	53.04	-61.96	115	44.24	31.42	9.06	31.68	100	123	P	H
		5870.8	56.7	-49.77	106.47	47.8	31.55	9.05	31.7	100	123	P	H
		5874.8	55.1	-50.26	105.36	46.2	31.55	9.05	31.7	100	123	P	H
		5928.4	48.95	-19.35	68.3	39.95	31.7	9.03	31.73	100	123	P	H
		5643.2	48.76	-19.54	68.3	40.85	30.4	8.93	31.42	100	21	P	V
		5696.4	59.15	-43.50	102.65	51.01	30.65	8.98	31.49	100	21	P	V
		5718.8	68.2	-42.36	110.56	59.89	30.82	9.01	31.52	100	21	P	V
		5723.6	64.85	-54.26	119.11	56.54	30.82	9.01	31.52	100	21	P	V
	*	5760	93.05	-	-	84.59	30.99	9.05	31.58	100	21	P	V
	*	5760	85.85	-	-	77.39	30.99	9.05	31.58	100	21	A	V
		5853.6	56.38	-57.71	114.09	47.5	31.5	9.06	31.68	100	21	P	V
		5862	59.18	-49.76	108.94	50.32	31.5	9.06	31.7	100	21	P	V
		5877.2	57.2	-46.47	103.67	48.3	31.55	9.05	31.7	100	21	P	V
	5926.8	48.96	-19.34	68.3	39.96	31.7	9.03	31.73	100	21	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11550	42.41	-31.59	74	56.81	37.58	13.42	65.4	150	360	P	H
CH 155 5775MHz		11550	41.33	-32.67	74	55.73	37.58	13.42	65.4	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT20 LF		30	20.44	-19.56	40	28.76	24.2	0.46	32.98	100	0	P	H
		95.96	14.38	-29.12	43.5	30.46	15.9	0.95	32.93	-	-	P	H
		326.82	16.61	-29.39	46	27.92	19.85	1.9	33.06	-	-	P	H
		519.85	21.15	-24.85	46	28.39	23.63	2.4	33.27	-	-	P	H
		784.66	24.71	-21.29	46	28.73	25.91	3.1	33.03	-	-	P	H
		951.5	25.08	-20.92	46	26.36	26.96	3.45	31.69	-	-	P	H
		30.00	26.56	-13.44	40	34.88	24.2	0.46	32.98	100	0	P	V
		64.92	15.26	-24.74	40	34.86	12.6	0.74	32.94	-	-	P	V
		165.8	16.7	-26.80	43.5	32.63	15.7	1.31	32.94	-	-	P	V
		412.18	19.86	-26.14	46	29.03	21.83	2.15	33.15	-	-	P	V
		604.24	23	-23.00	46	29.13	24.61	2.61	33.35	-	-	P	V
	931.13	24.84	-21.16	46	26.59	26.78	3.41	31.94	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	-	-	10Hz
5GHz 802.11n HT20	98.16	-	-	10Hz
5GHz 802.11n HT40	96.32	0.949	1.053	1.1kHz
5GHz 802.11acVHT80	92.75	0.464	2.156	2.2kHz



802.11a

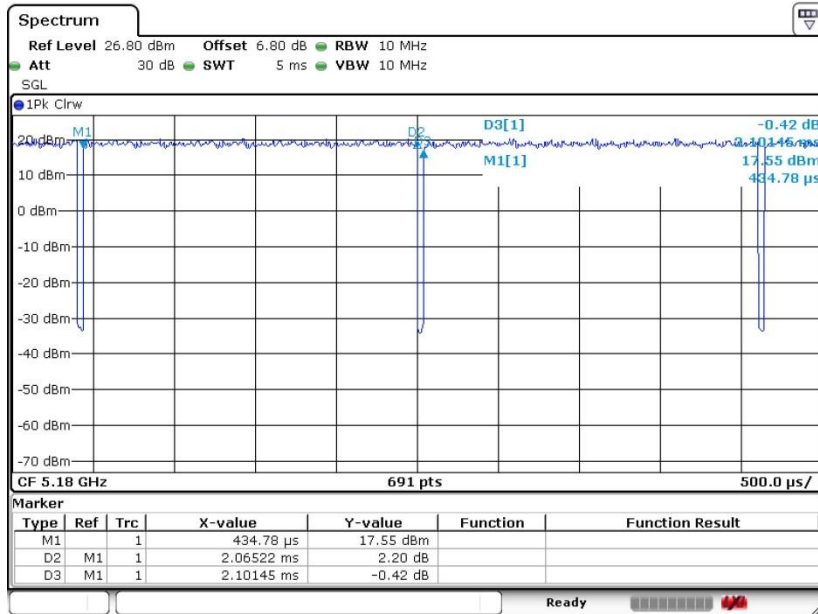


802.11n HT20

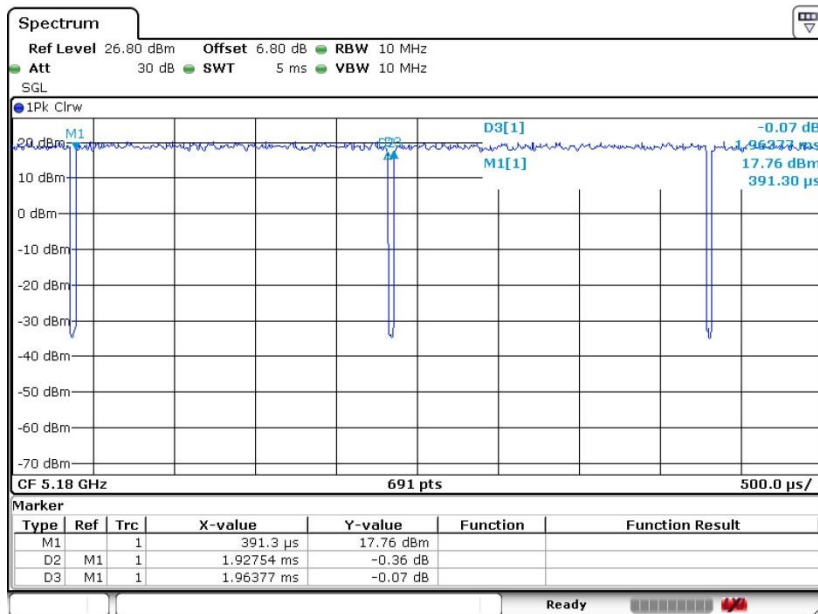



802.11n HT40

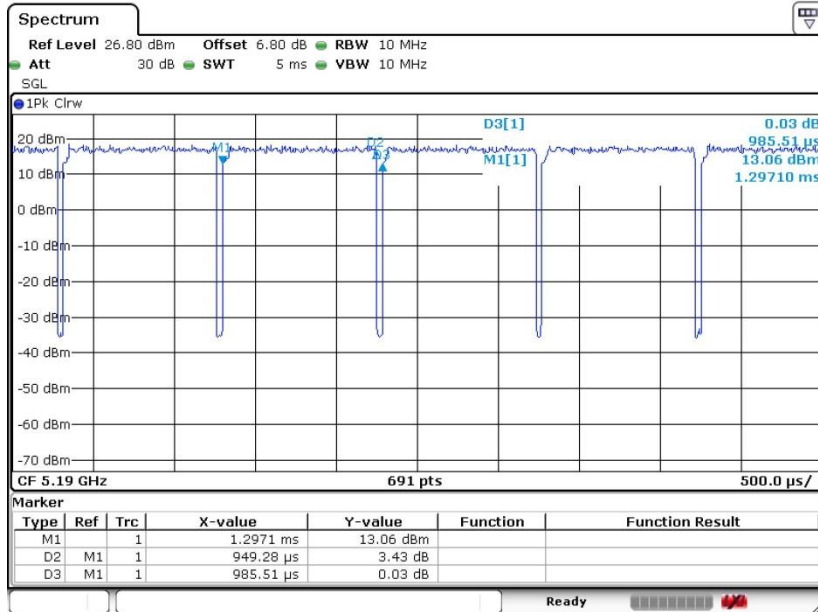

802.11ac VHT80

