



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2013-4
FCC ID : IHDT56YD3
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Jul. 24, 2019 and testing was completed on Aug. 21, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION..... 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 6
1.5 Specification of Accessory 6
1.6 Modification of EUT 6
1.7 Re-use of Measured Data 7
1.8 Testing Location 8
1.9 Applicable Standards 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 9
2.1 Carrier Frequency Channel 9
2.2 Test Mode 10
2.3 Connection Diagram of Test System 11
2.4 EUT Operation Test Setup 12
2.5 Measurement Results Explanation Example 12
3 TEST RESULT 13
3.1 Number of Channel Measurement 13
3.2 Hopping Channel Separation Measurement 15
3.3 Dwell Time Measurement 22
3.4 20dB and 99% Bandwidth Measurement 24
3.5 Output Power Measurement 37
3.6 Conducted Band Edges Measurement 39
3.7 Conducted Spurious Emission Measurement 46
3.8 Radiated Band Edges and Spurious Emission Measurement 56
3.9 Antenna Requirements 60
4 LIST OF MEASURING EQUIPMENT 61
5 UNCERTAINTY OF EVALUATION 62
APPENDIX A. RADIATED SPURIOUS EMISSION
APPENDIX B. DUTY CYCLE PLOTS
APPENDIX C. SETUP PHOTOGRAPHS
APPENDIX D. REFERENCE REPORT



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR932901-02A	Rev. 01	Initial issue of report	Sep. 05, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 14.41 dB at 34.850 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	-
3.9	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Remark: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2013-4
FCC ID	IHDT56YD3
EUT supports Radios application	CDMA/GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR / LE FM Receiver and GNSS
IMEI Code	Conducted: 357235100010413/357235100010403 Radiation: 357235100011064
HW Version	DVT2
SW Version	PPI29.80
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 9.71 dBm (0.0094 W) Bluetooth EDR (2Mbps) : 9.39 dBm (0.0087 W) Bluetooth EDR (3Mbps) : 10.12 dBm (0.0103 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.865MHz Bluetooth EDR (2Mbps) : 1.175MHz Bluetooth EDR (3Mbps) : 1.161MHz
Antenna Type / Gain	Fixed Internal PIFA Antenna with gain -0.50 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Specification of Accessory

Specification of Accessory			
AC Adapter 1	Brand Name	Motorola (Salom)	Model Name SC-41
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA	
AC Adapter 2	Brand Name	Motorola (Acbel)	Model Name SC-41
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA	
Battery	Brand Name	Motorola (ATL)	Model Name KR40
	Power Rating	3.8Vdc, 3500mAh (Typ)	Type Li-ion, Polymer
USB Cable 1	Brand Name	Motorola (LiQi)	Model Name L32B-053000100/ L32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	
USB Cable 2	Brand Name	Motorola (SaiBao)	Model Name S32B-053000100/ S32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Re-use of Measured Data

1.6.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2013-4, FCC ID: IHDT56YD3) is electrically identical to the reference device (Model: XT2013-1, FCC ID: IHDT56YD1) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01

1.6.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FR932901A for the reference device Model: XT2013-1, FCC ID: IHDT56YD1).

1.6.3 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test	Report Title/Section
DSS (BR/EDR)	IHDT56YD1	Part15C(FR932901A)	Conduction sections applicable; Other test item for full test

1.6.4 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, all test item for full test except conduction.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.



1.8 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adapter 1, Earphone and USB Cable 1 .			

2.3 Connection Diagram of Test System

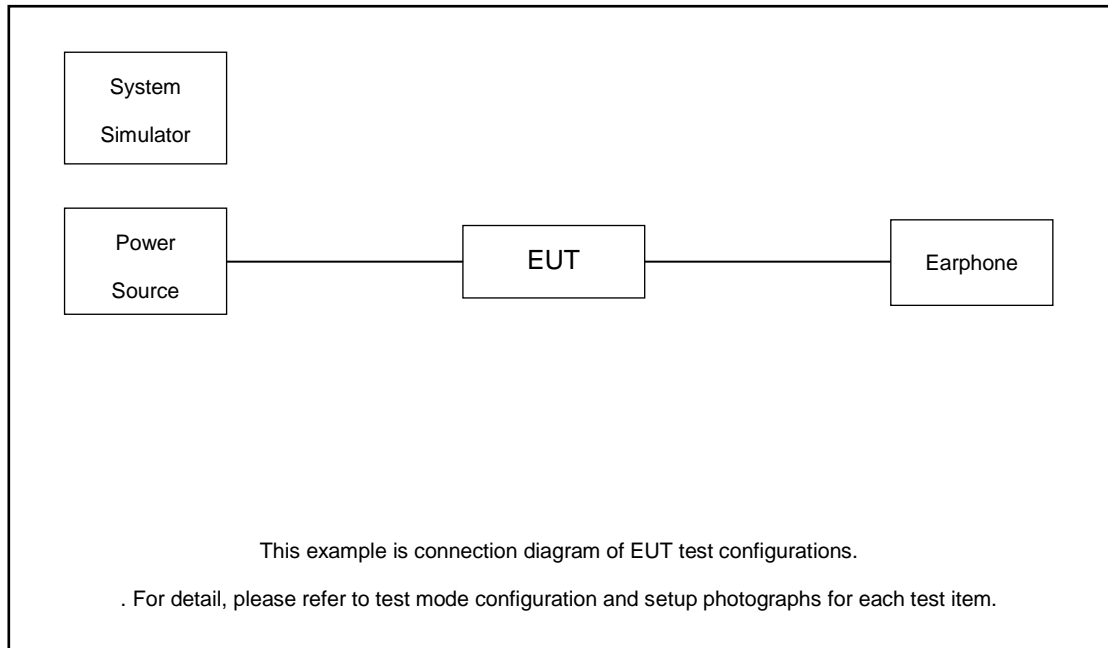



2.4 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 6.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup






3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

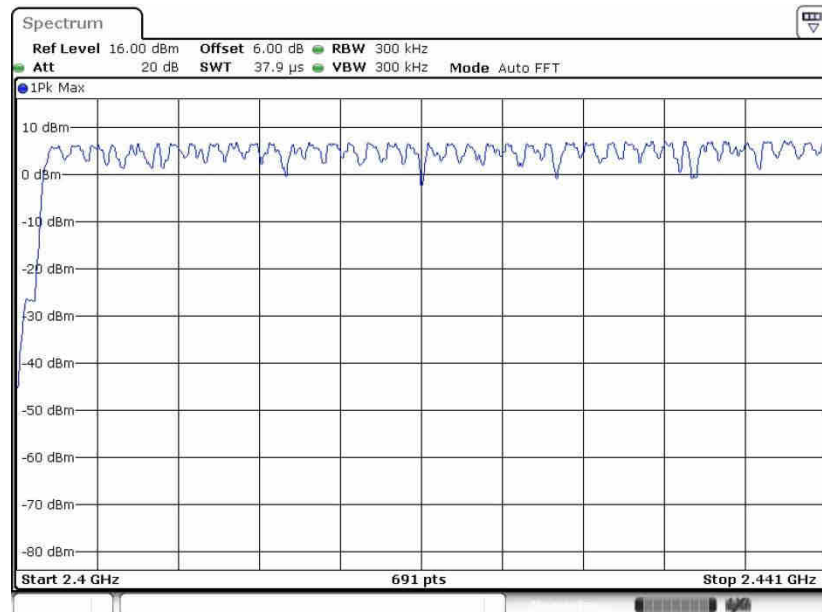

Date: 20.AUG.2019 15:07:34

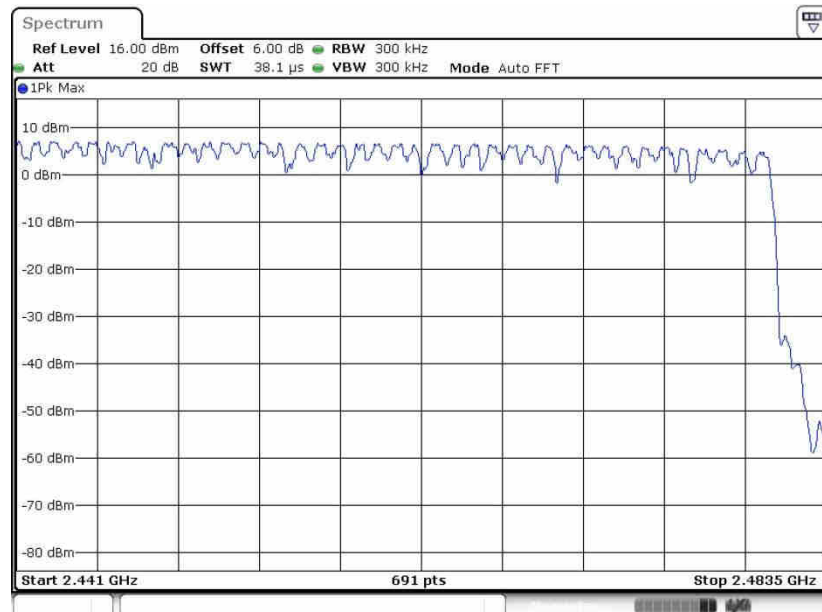

Date: 20.AUG.2019 15:08:23

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup






3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	0.9986	0.6233	Pass
39	2441	0.9986	0.6310	Pass
78	2480	1.0029	0.6291	Pass


Channel Separation Plot on Channel 00 - 01

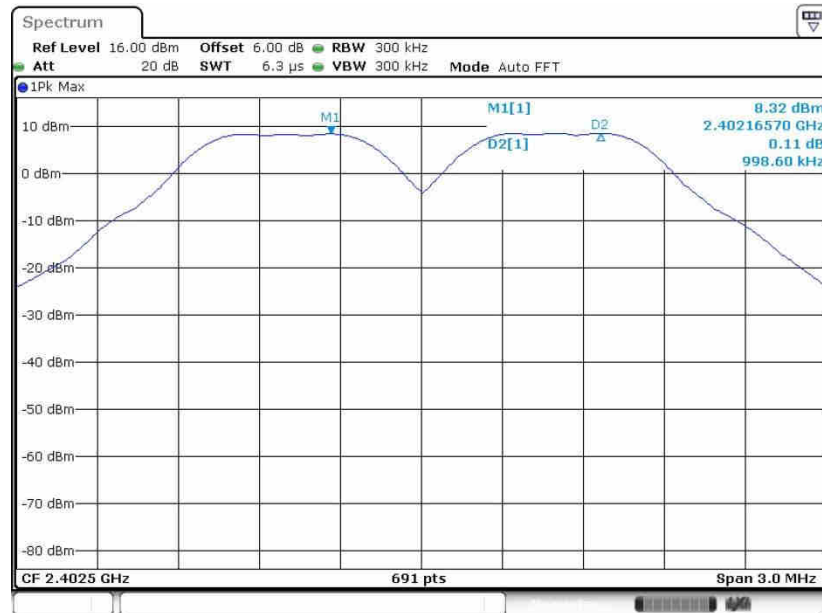

Date: 20.AUG.2019 14:41:05




Channel Separation Plot on Channel 39 - 40

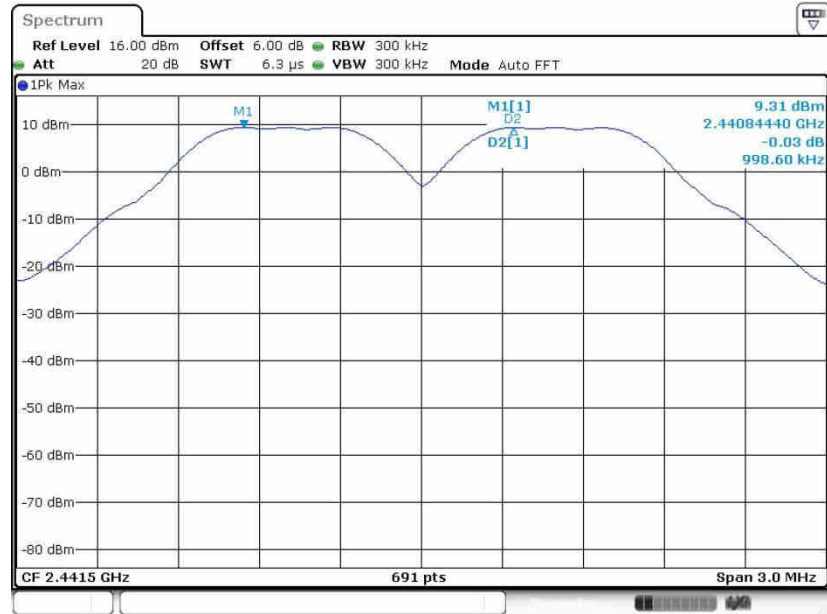

Date: 20.AUG.2019 14:45:11

Channel Separation Plot on Channel 77 - 78

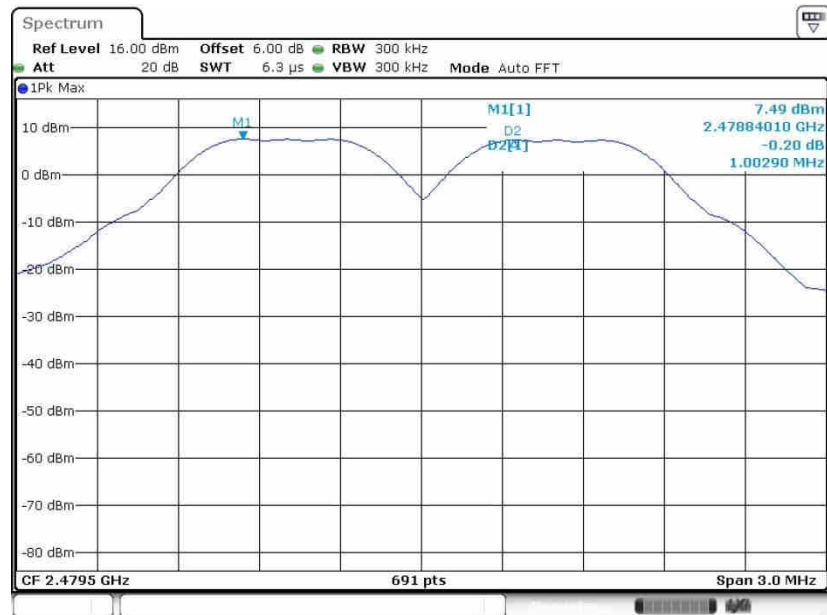


Date: 20.AUG.2019 14:50:27



Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.0029	0.8712	Pass
39	2441	0.9986	0.8712	Pass
78	2480	0.9986	0.8712	Pass


Channel Separation Plot on Channel 00 - 01

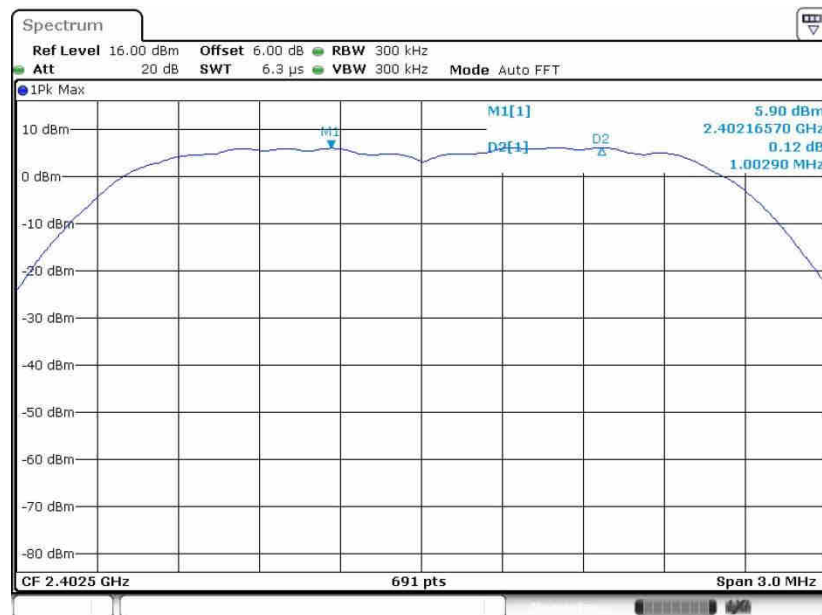

Date: 20.AUG.2019 14:54:58




Channel Separation Plot on Channel 39 - 40

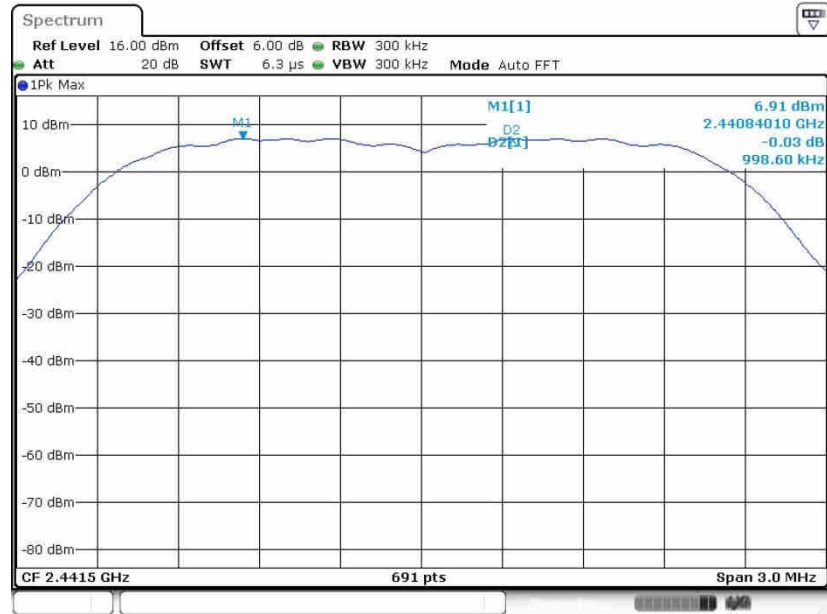

Date: 20.AUG.2019 14:58:19

Channel Separation Plot on Channel 77 - 78

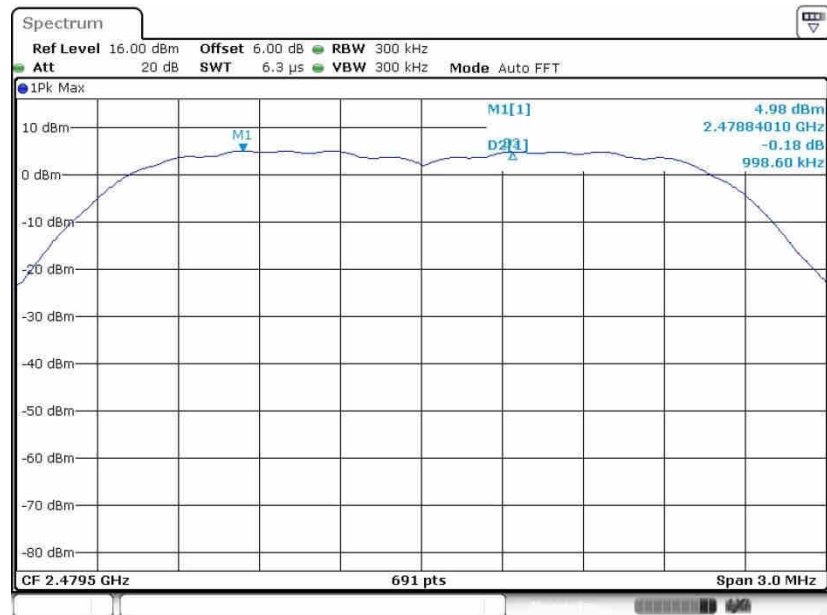


Date: 20.AUG.2019 15:02:33



Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.0029	0.8393	Pass
39	2441	0.9986	0.8423	Pass
78	2480	0.9986	0.8423	Pass


Channel Separation Plot on Channel 00 - 01

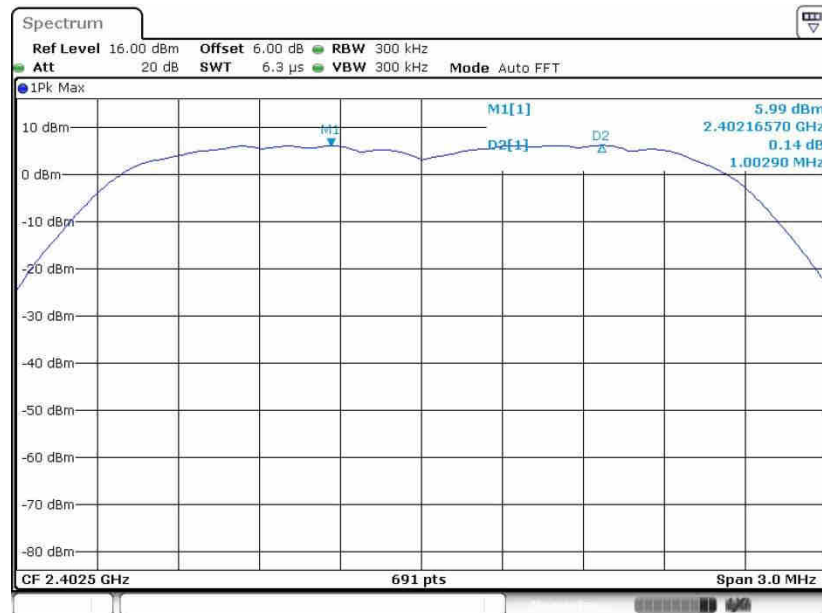

Date: 20.AUG.2019 15:06:47




Channel Separation Plot on Channel 39 - 40

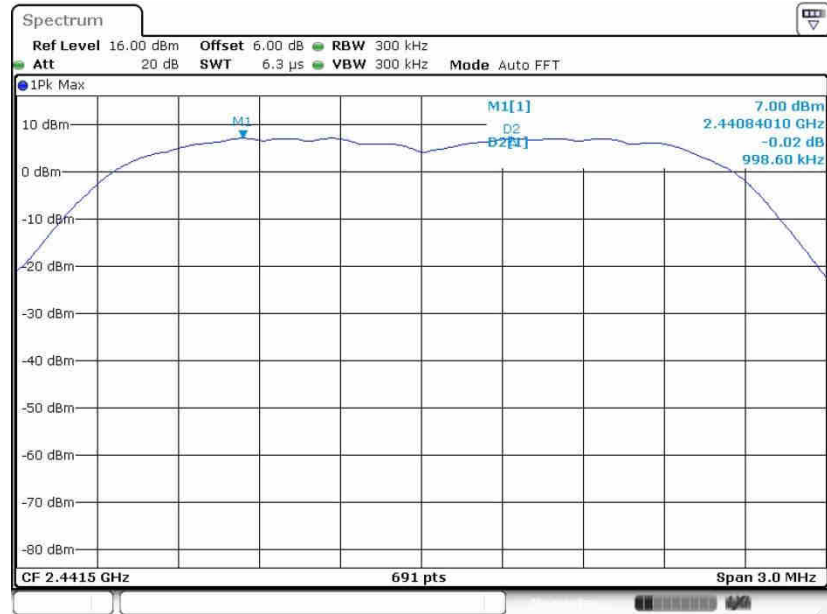

Date: 20.AUG.2019 15:11:55

Channel Separation Plot on Channel 77 - 78

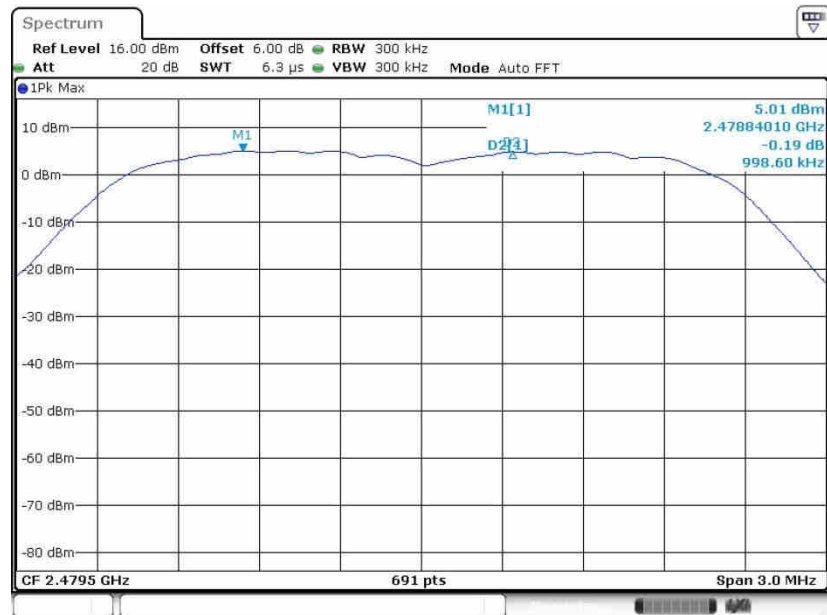

Date: 20.AUG.2019 15:17:08

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup






3.3.5 Test Result of Dwell Time

Test Mode :	3DH5	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.8942	0.31	0.4	Pass
AFH	20	53.34	2.8942	0.15	0.4	Pass

Package Transfer Time Plot

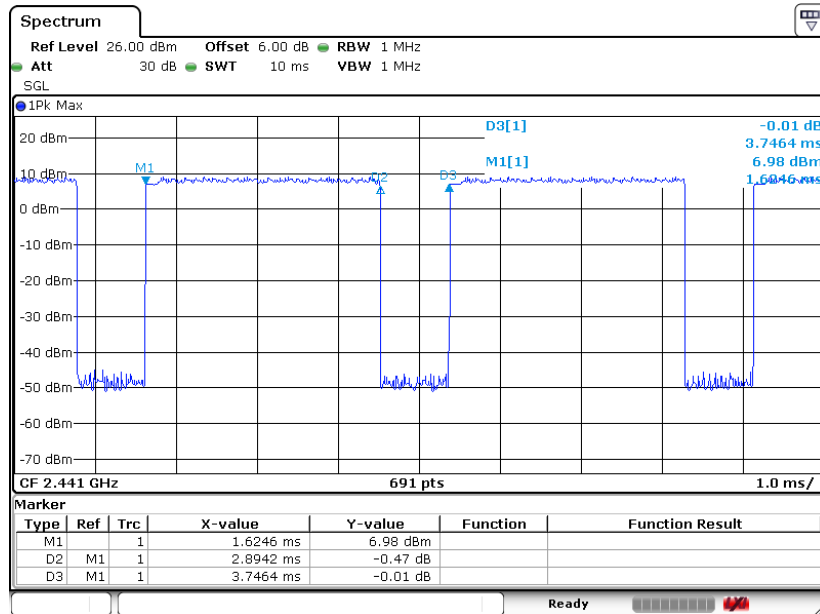

Date: 31 JUL 2019 08:59:07

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1% of the 99% bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

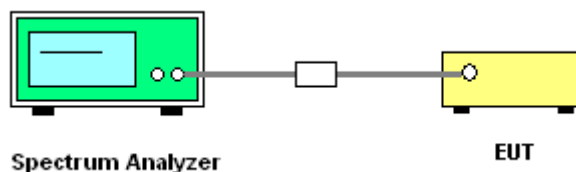




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.935
39	2441	0.947
78	2480	0.944


20 dB Bandwidth Plot on Channel 00

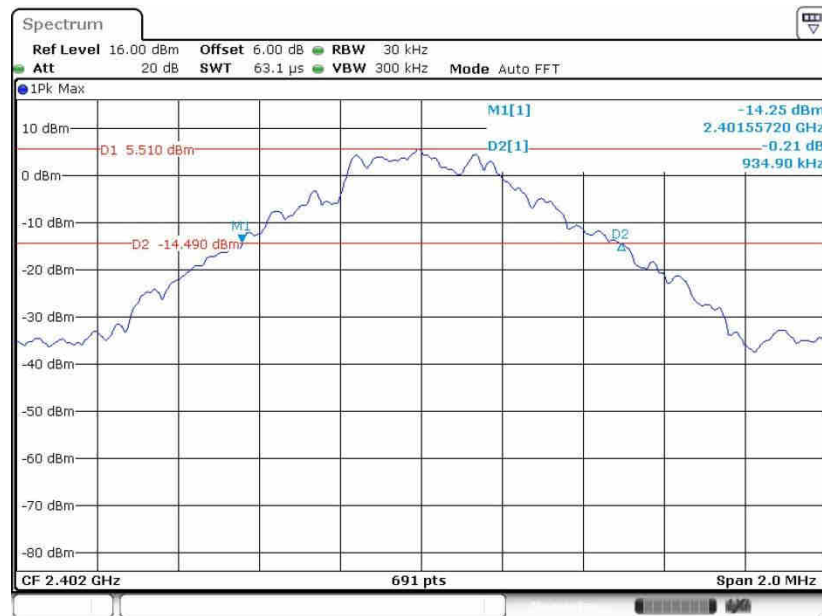

Date: 20.AUG.2019 14:36:44




20 dB Bandwidth Plot on Channel 39

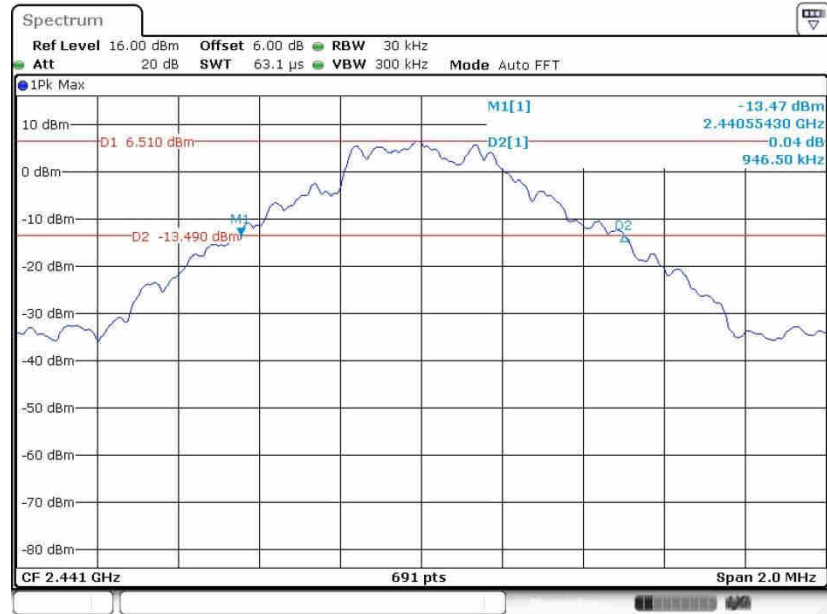

Date: 20.AUG.2019 14:42:30

20 dB Bandwidth Plot on Channel 78

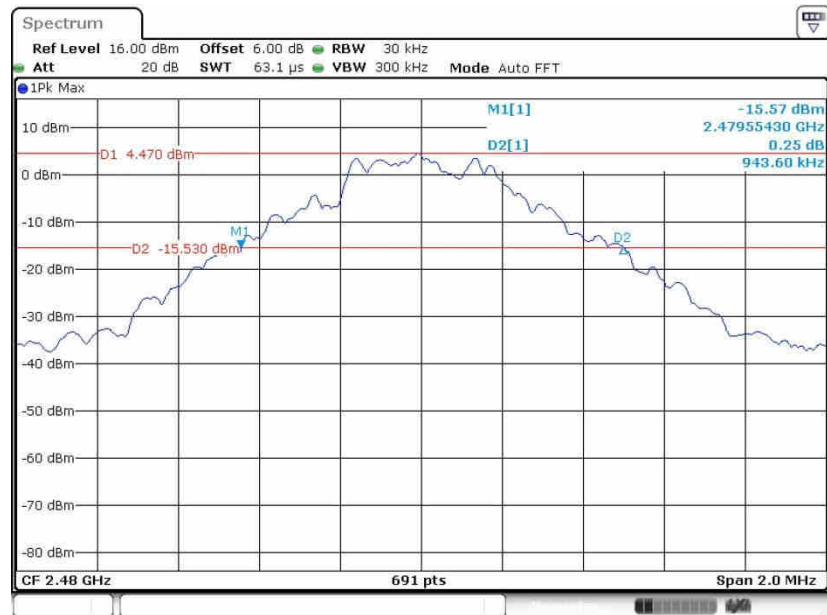


Date: 20.AUG.2019 14:46:27



Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.307
39	2441	1.307
78	2480	1.307

20 dB Bandwidth Plot on Channel 00

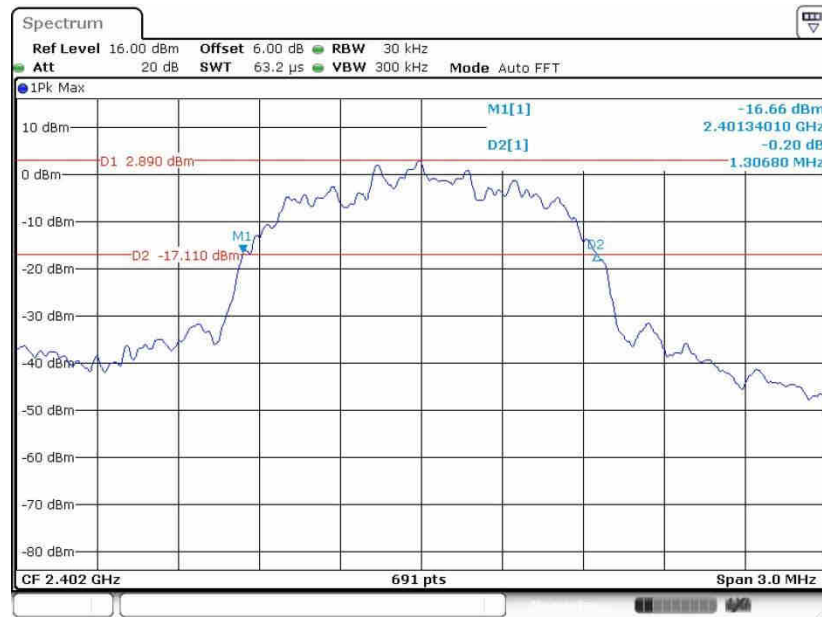

Date: 20.AUG.2019 14:51:49




20 dB Bandwidth Plot on Channel 39



Date: 20.AUG.2019 14:55:59

20 dB Bandwidth Plot on Channel 78

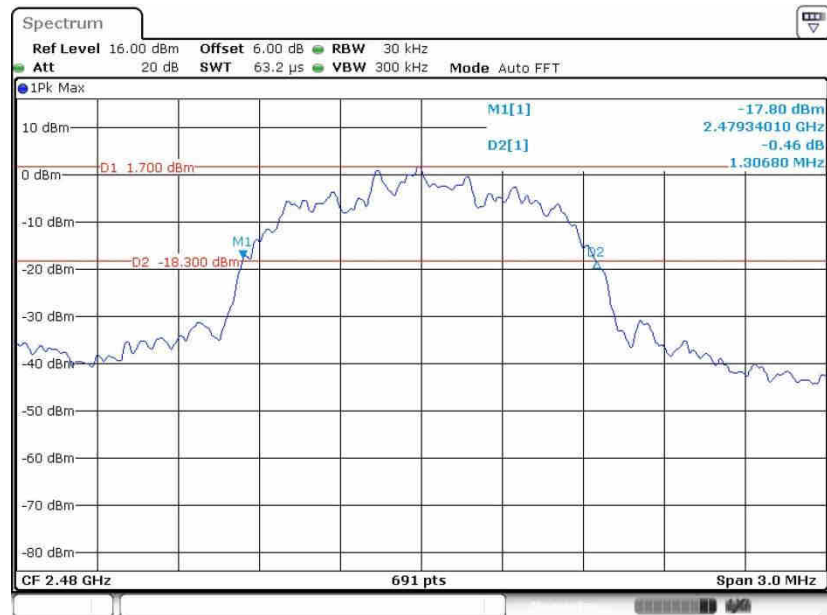


Date: 20.AUG.2019 14:59:28



Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.259
39	2441	1.263
78	2480	1.263

20 dB Bandwidth Plot on Channel 00

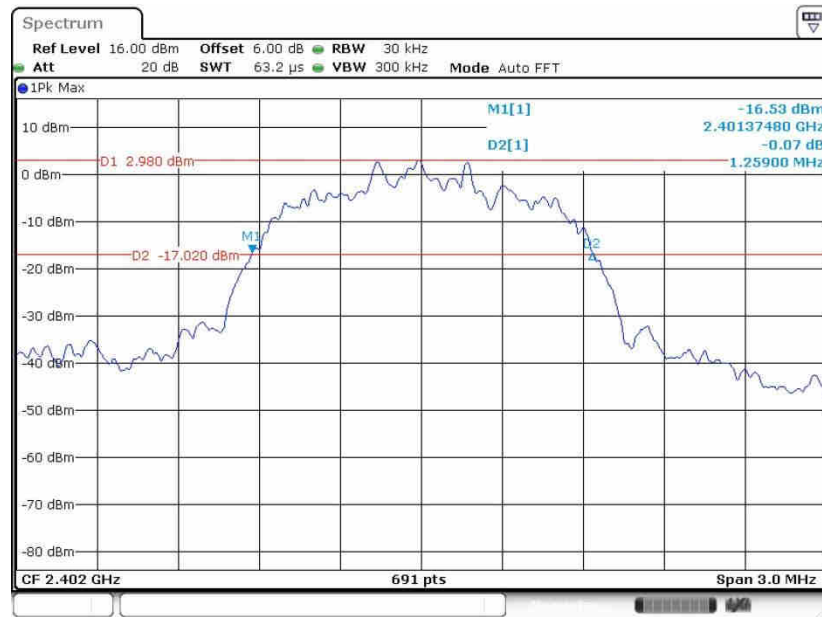

Date: 20.AUG.2019 15:03:51




20 dB Bandwidth Plot on Channel 39



Date: 20.AUG.2019 15:09:24

20 dB Bandwidth Plot on Channel 78

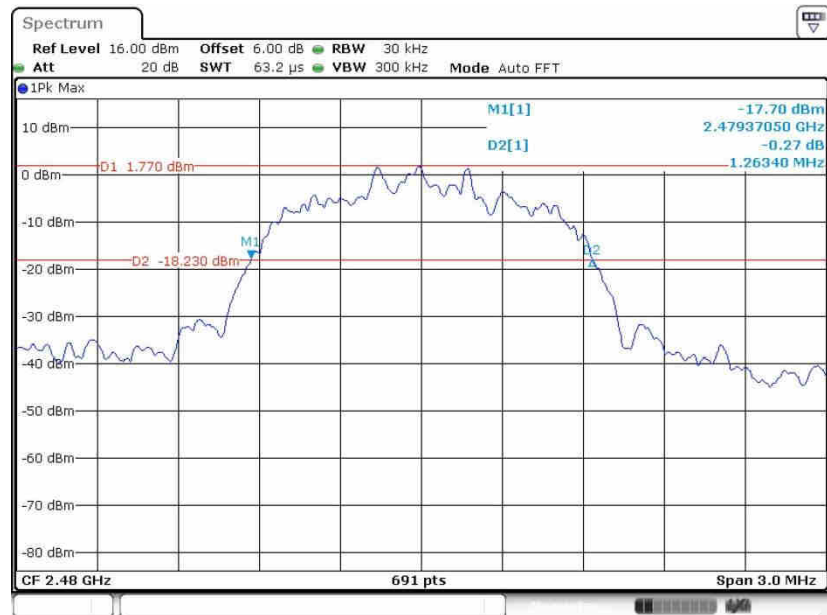

Date: 20.AUG.2019 15:12:54




3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.863
39	2441	0.863
78	2480	0.865

99% Occupied Bandwidth Plot on Channel 00

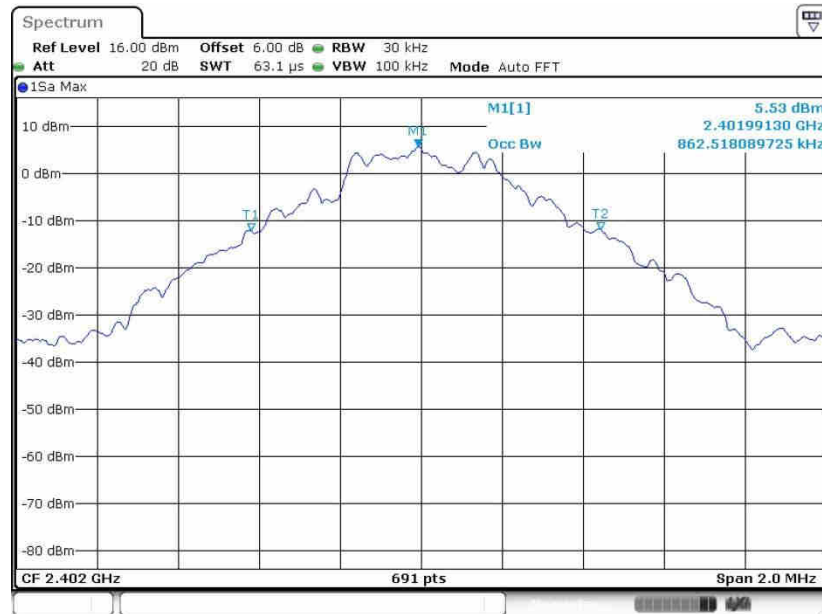

Date: 20.AUG.2019 14:37:57



99% Occupied Bandwidth Plot on Channel 39



Date: 20.AUG.2019 14:43:08

99% Occupied Bandwidth Plot on Channel 78




Date: 20.AUG.2019 14:48:11



Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.172
39	2441	1.172
78	2480	1.175


99% Occupied Bandwidth Plot on Channel 00

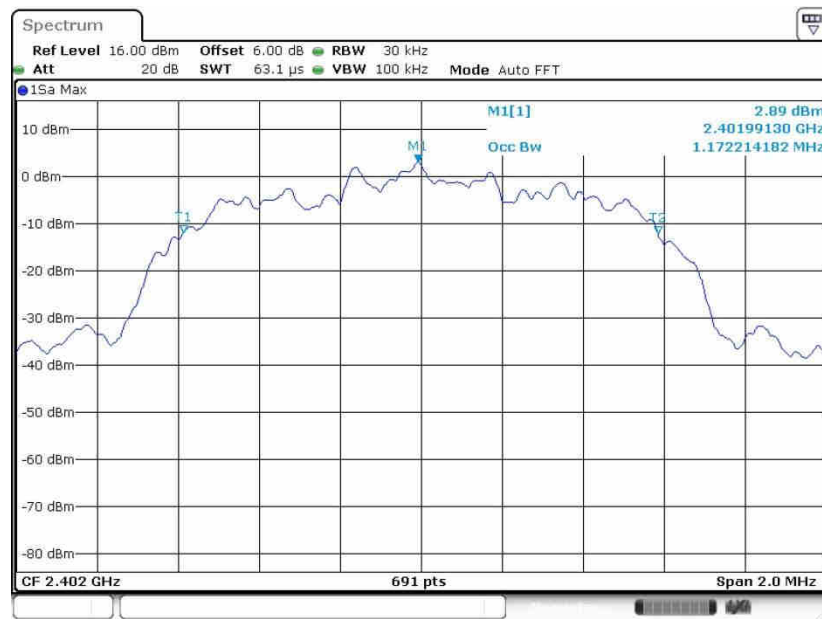

Date: 20.AUG.2019 14:53:07




99% Occupied Bandwidth Plot on Channel 39

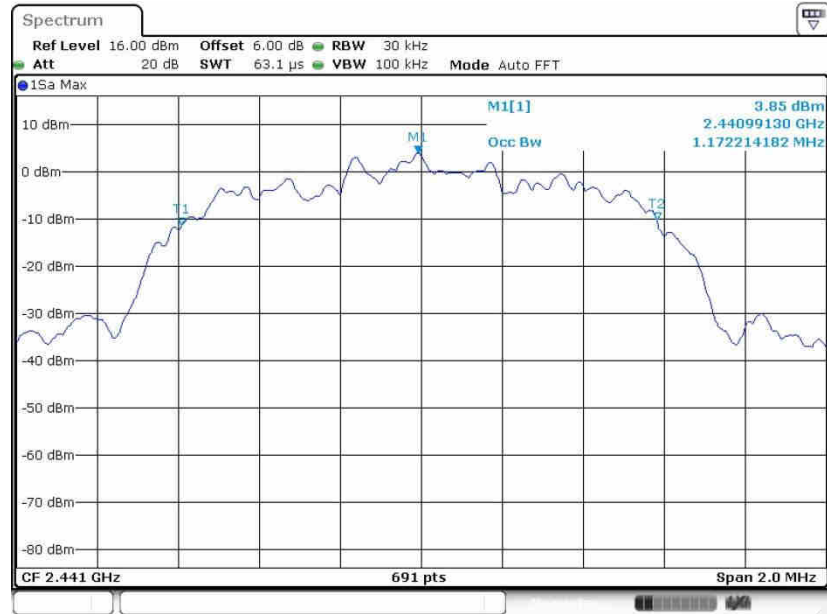

Date: 20.AUG.2019 14:56:33

99% Occupied Bandwidth Plot on Channel 78

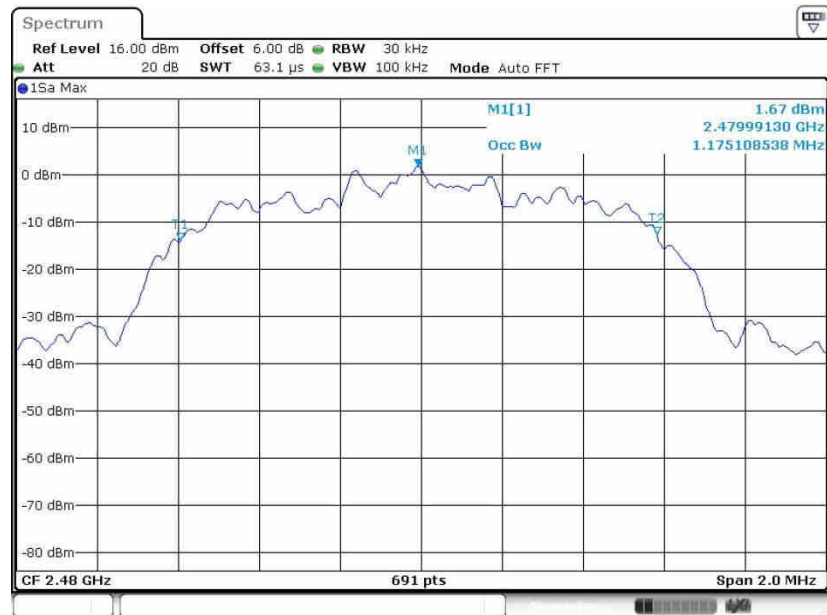


Date: 20.AUG.2019 15:00:48



Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.158
39	2441	1.161
78	2480	1.161


99% Occupied Bandwidth Plot on Channel 00

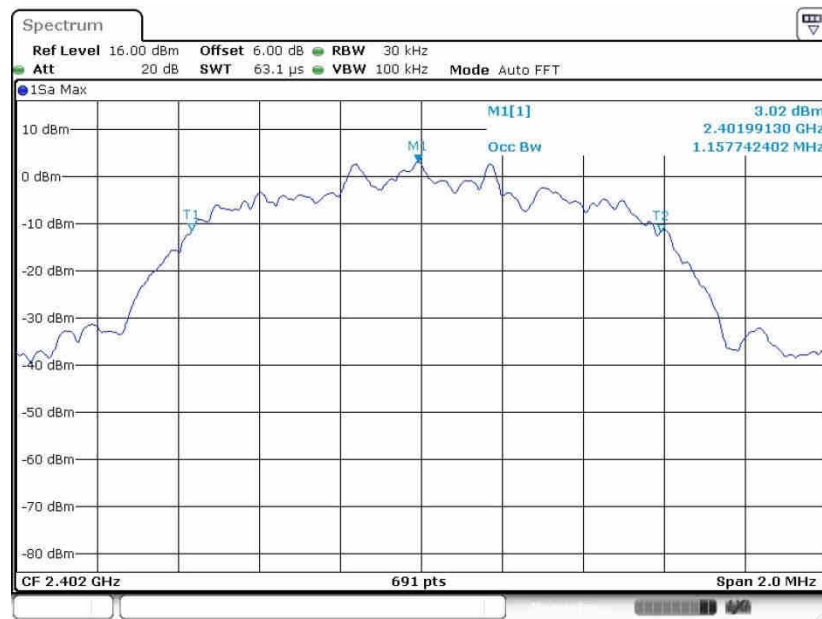

Date: 20.AUG.2019 15:05:00




99% Occupied Bandwidth Plot on Channel 39

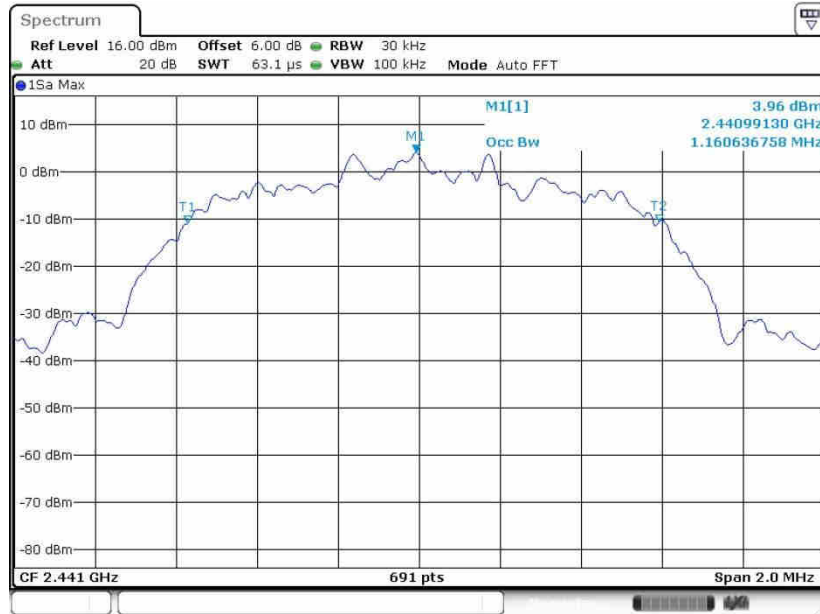

Date: 20.AUG.2019 15:10:00

99% Occupied Bandwidth Plot on Channel 78

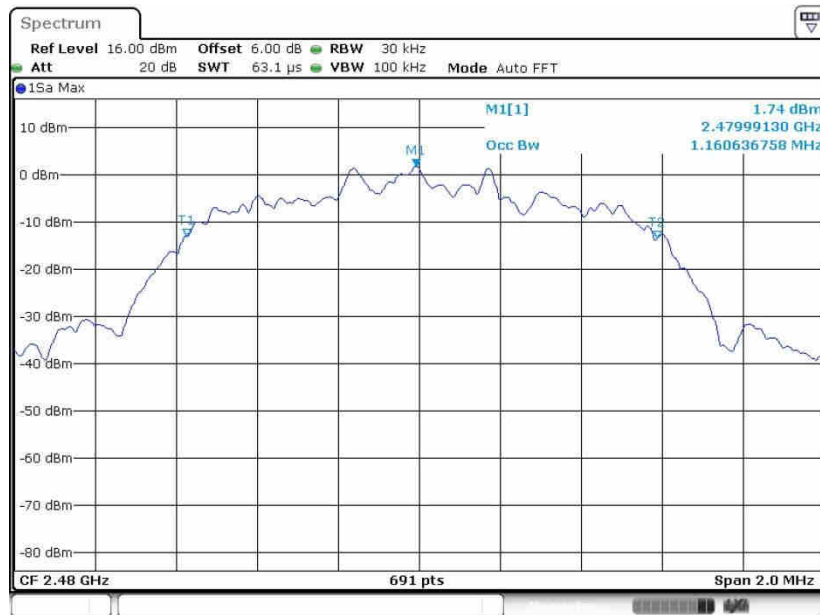

Date: 20.AUG.2019 15:14:10

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

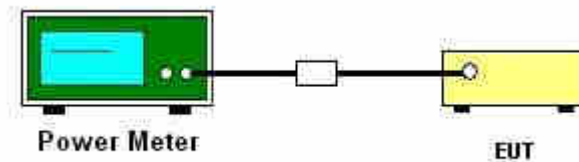



3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	8.84	20.97	Pass
39	2441	9.71	20.97	Pass
78	2480	7.63	20.97	Pass

Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	8.56	20.97	Pass
39	2441	9.39	20.97	Pass
78	2480	7.21	20.97	Pass

Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	9.12	20.97	Pass
39	2441	10.12	20.97	Pass
78	2480	8.06	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup






3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	21~25°C
Test Channel :	00 and 78	Relative Humidity :	51~54%
		Test Engineer :	Weller Liu

Low Band Edge Plot on Channel 00

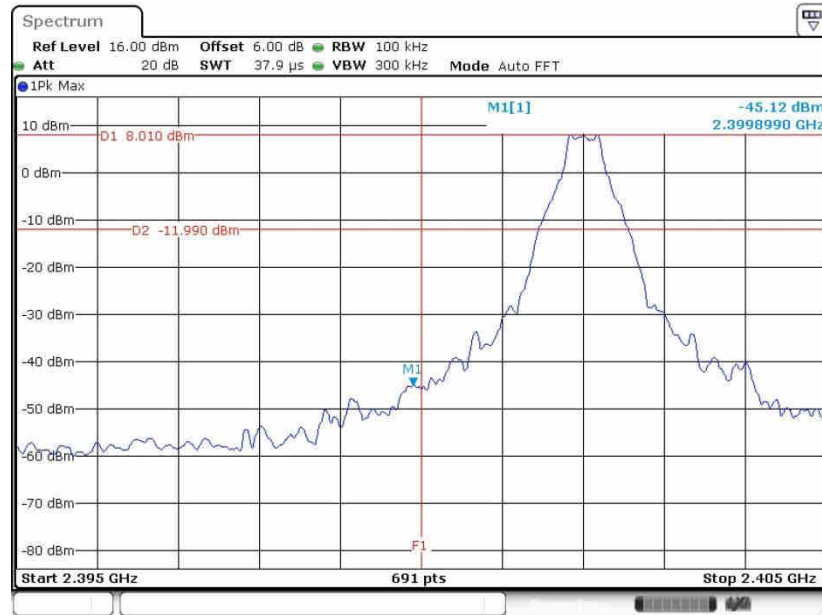

Date: 20.AUG.2019 14:37:11

High Band Edge Plot on Channel 78

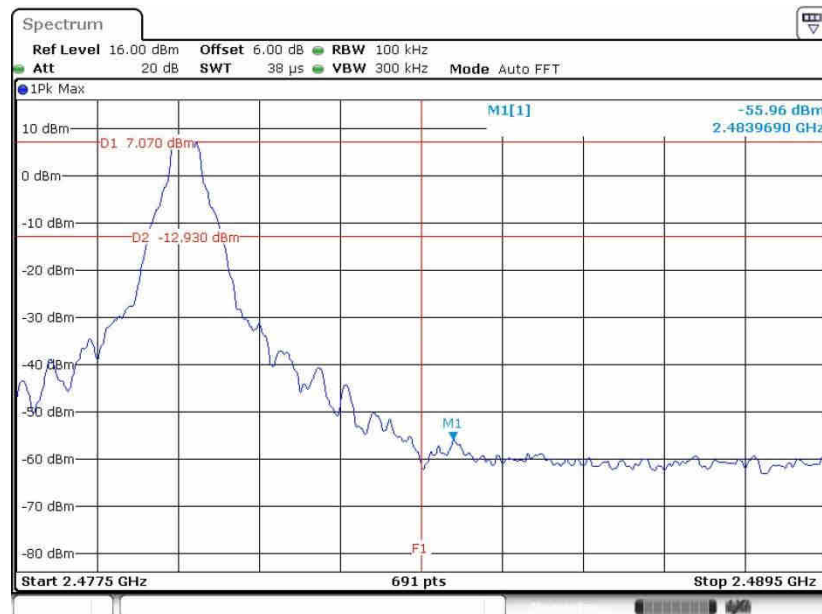


Date: 20.AUG.2019 14:46:50




Test Mode :	2Mbps	Temperature :	21~25°C
Test Channel :	00 and 78	Relative Humidity :	51~54%
		Test Engineer :	Weller Liu

Low Band Edge Plot on Channel 00

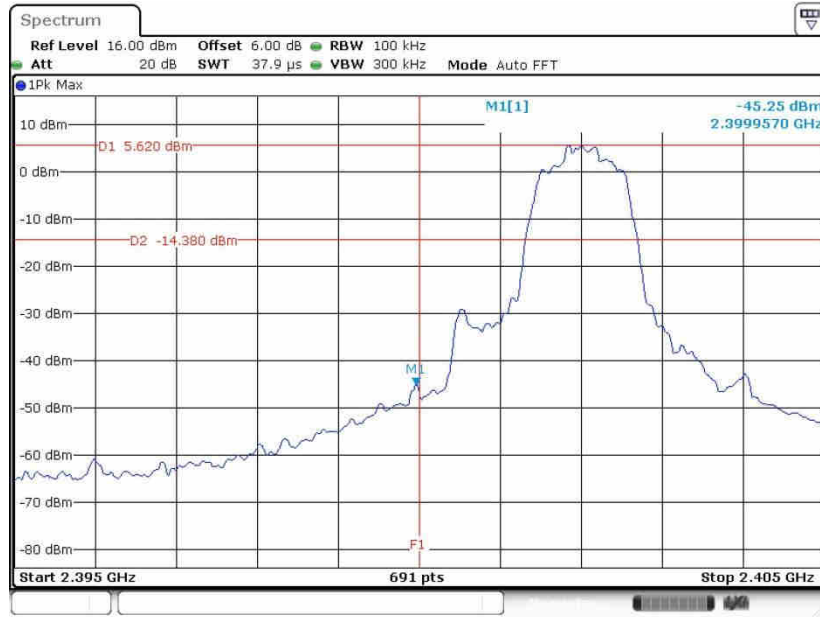

Date: 20.AUG.2019 14:52:11

High Band Edge Plot on Channel 78

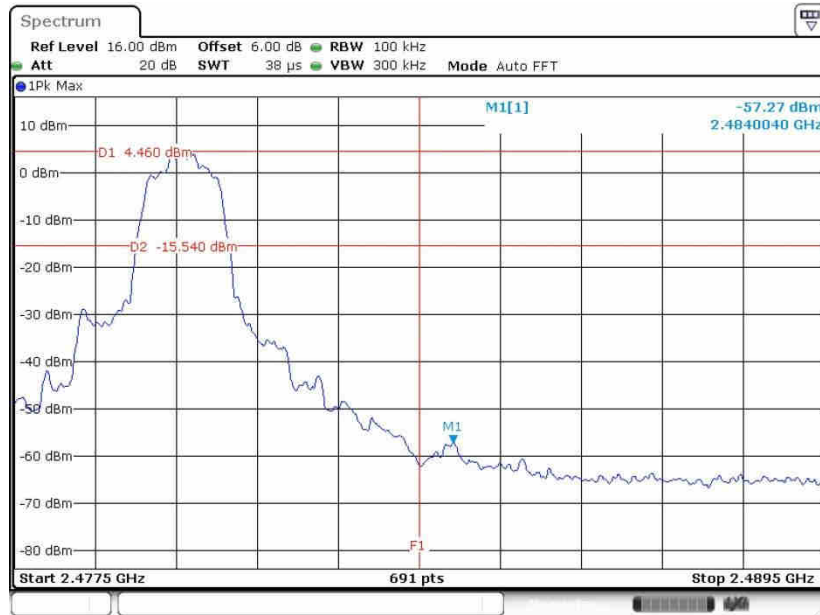


Date: 20.AUG.2019 14:59:46




Test Mode :	3Mbps	Temperature :	21~25°C
Test Channel :	00 and 78	Relative Humidity :	51~54%
		Test Engineer :	Weller Liu

Low Band Edge Plot on Channel 00

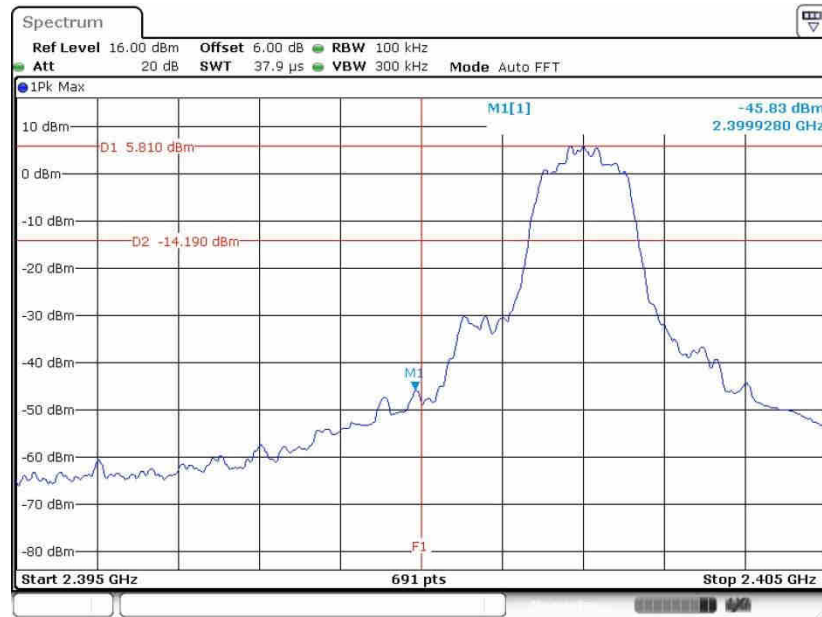

Date: 20.AUG.2019 15:04:08

High Band Edge Plot on Channel 78

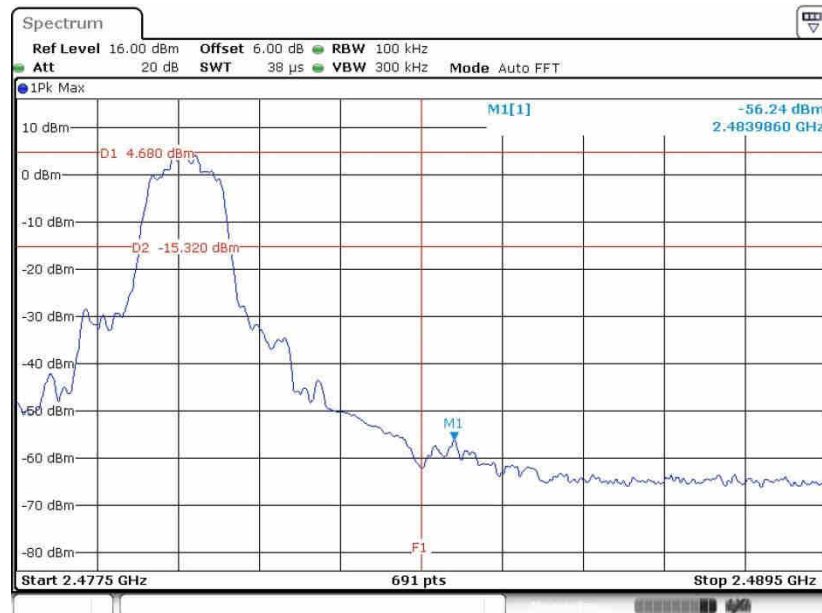


Date: 20.AUG.2019 15:13:13



3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Hopping Mode Low Band Edge Plot

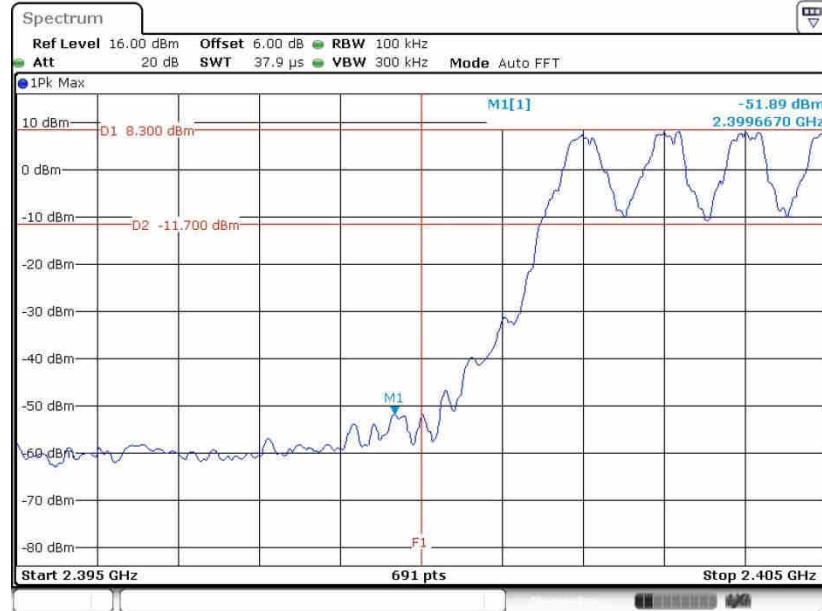

Date: 20.AUG.2019 14:39:52

Hopping Mode High Band Edge Plot

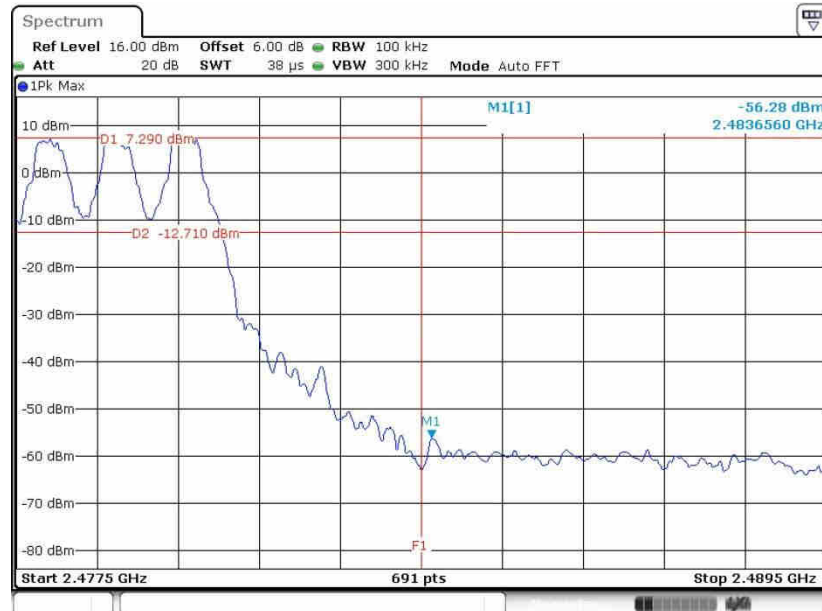

Date: 20.AUG.2019 14:47:34




Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Hopping Mode Low Band Edge Plot



Date: 20.AUG.2019 14:52:29

Hopping Mode High Band Edge Plot

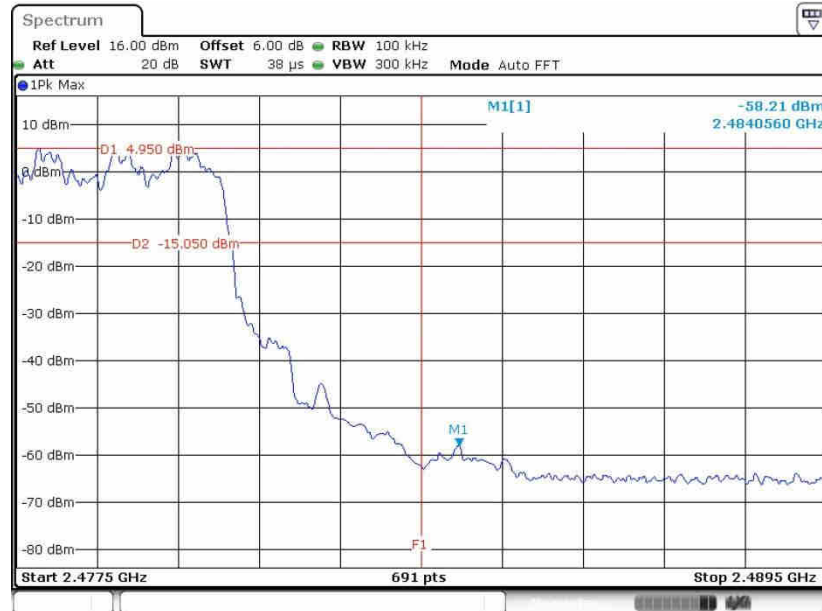


Date: 20.AUG.2019 15:00:09




Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Weller Liu	Relative Humidity :	51~54%

Hopping Mode Low Band Edge Plot

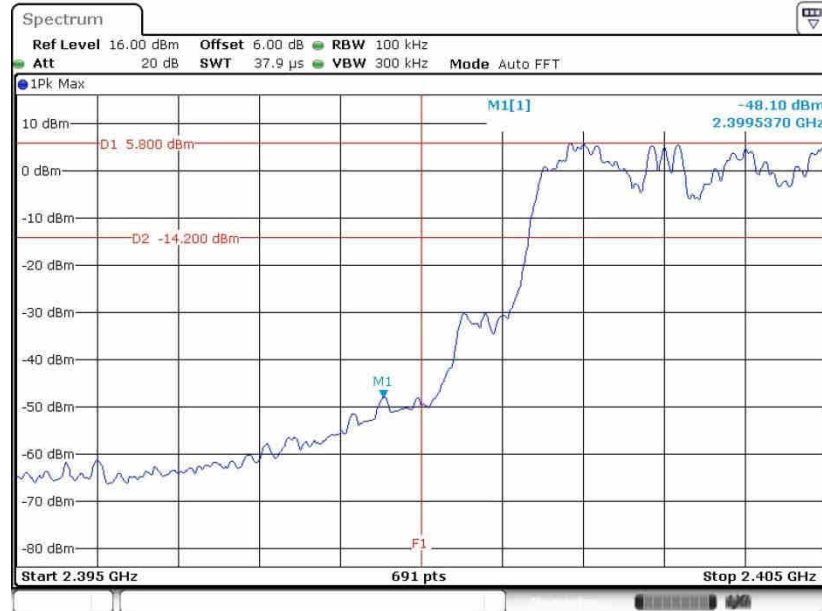

Date: 20.AUG.2019 15:04:23

Hopping Mode High Band Edge Plot

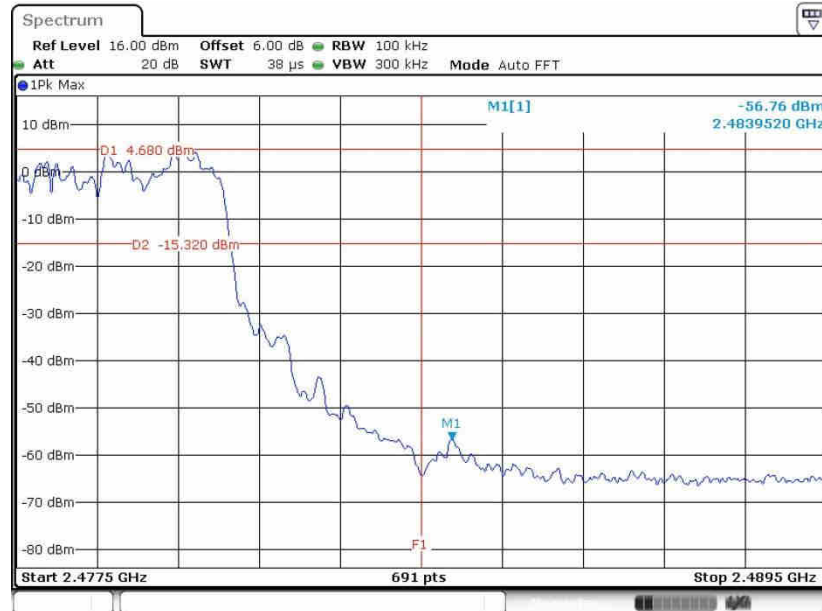

Date: 20.AUG.2019 15:13:32

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup






3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	21~25°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Weller Liu

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

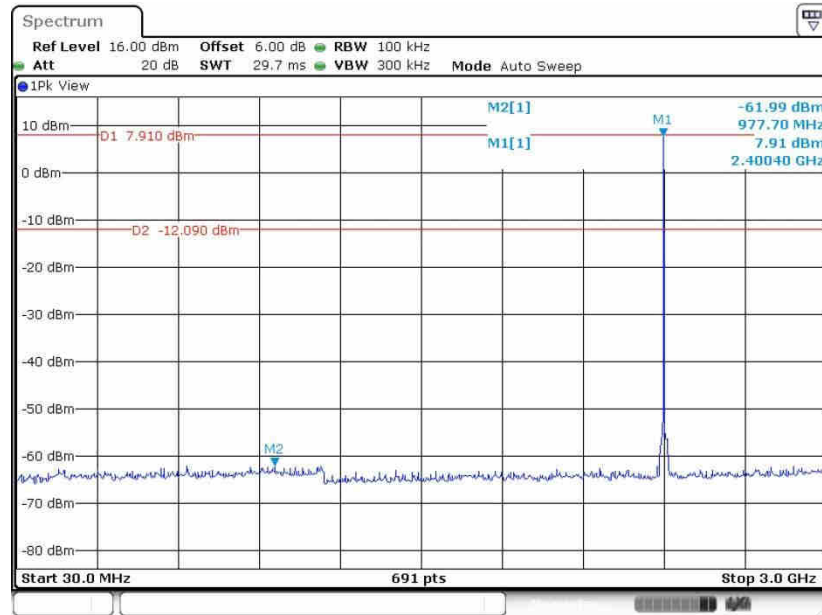

Date: 20.AUG.2019 14:38:45


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

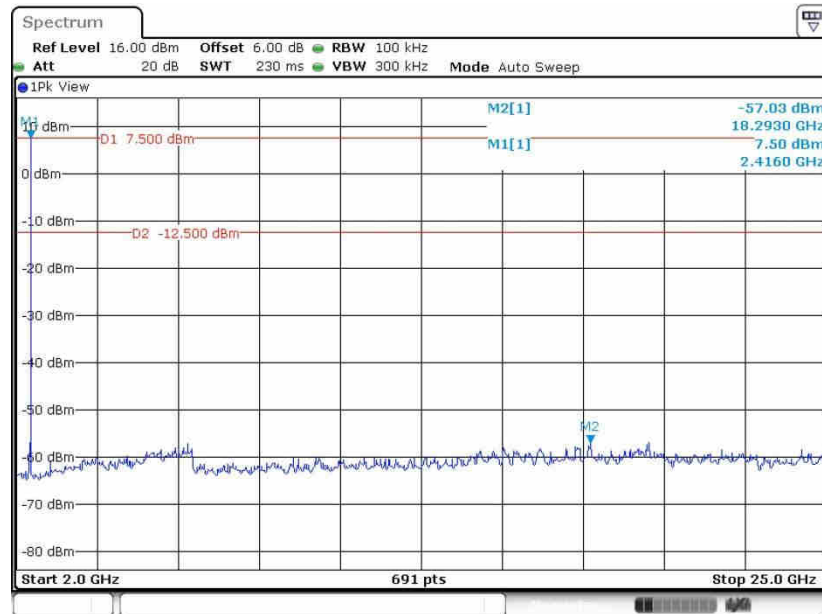

Date: 20.AUG.2019 14:39:19




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

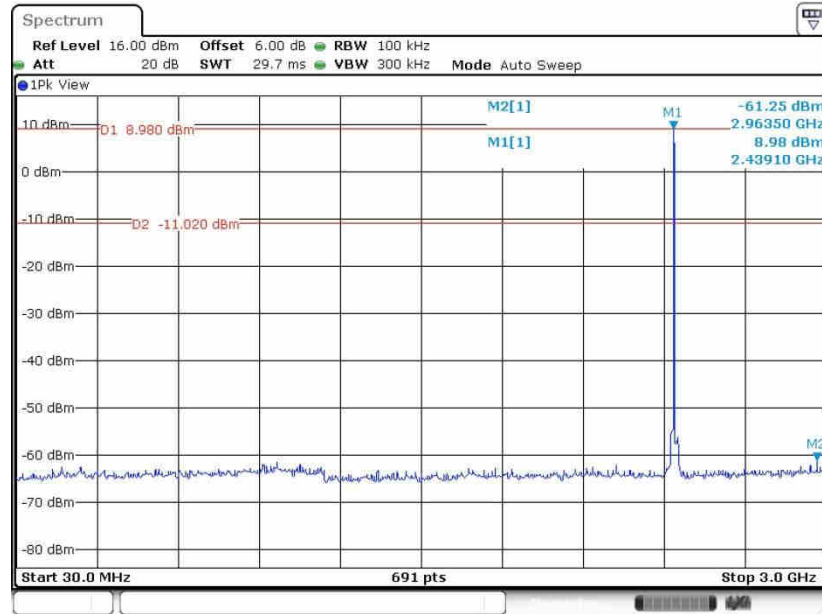

Date: 20.AUG.2019 14:43:54


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

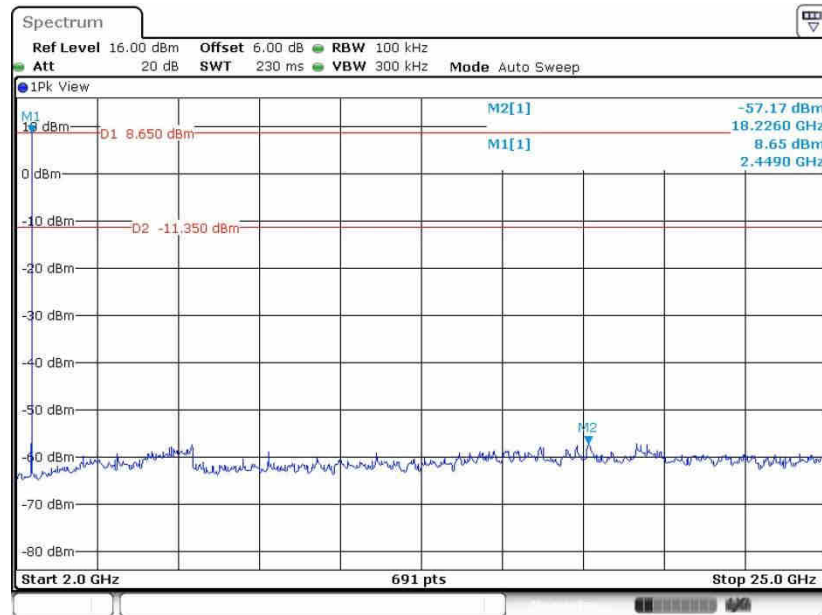

Date: 20.AUG.2019 14:44:22




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

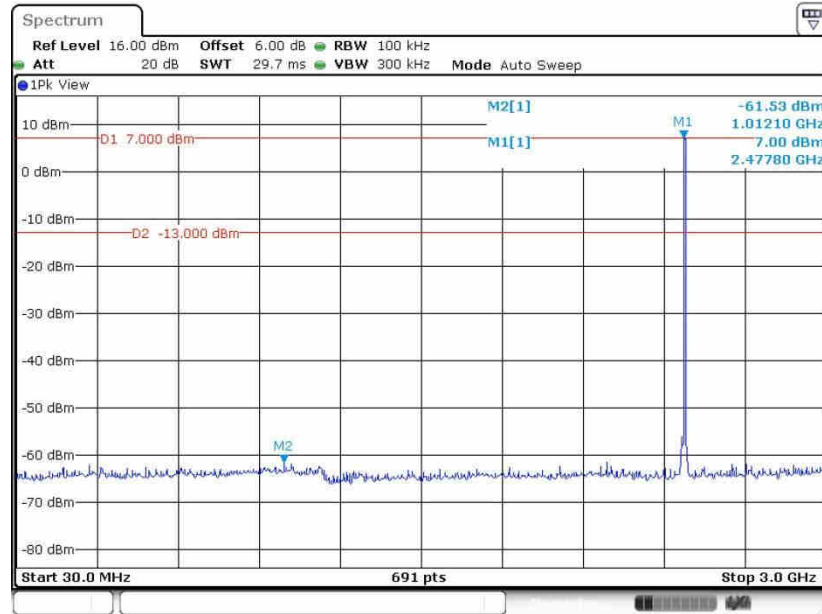

Date: 20.AUG.2019 14:48:55

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

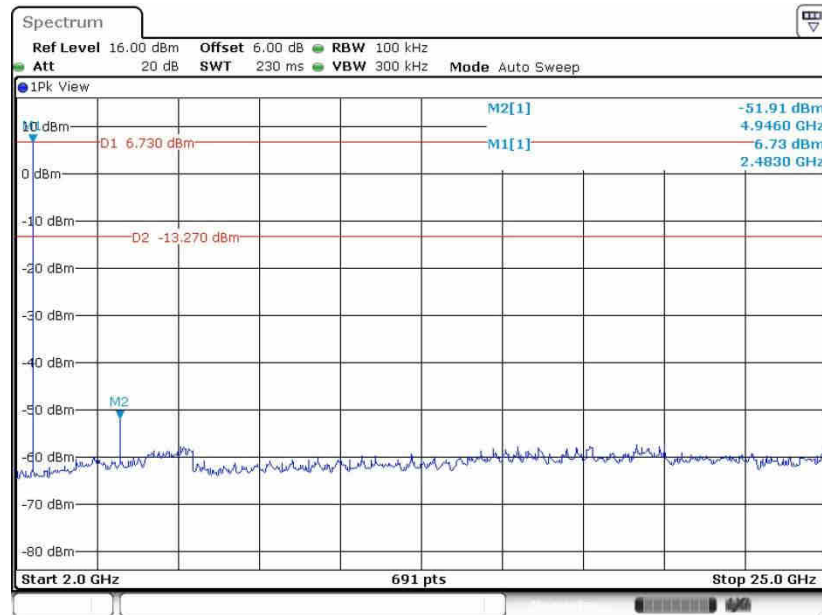


Date: 20.AUG.2019 14:49:23




Test Mode :	2Mbps	Temperature :	21~25°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Weller Liu

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

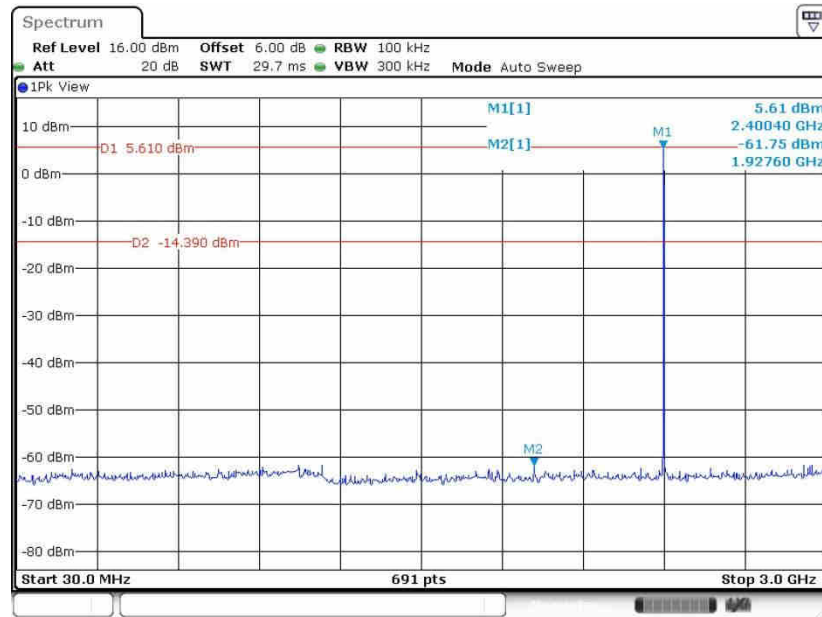

Date: 20.AUG.2019 14:53:41


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

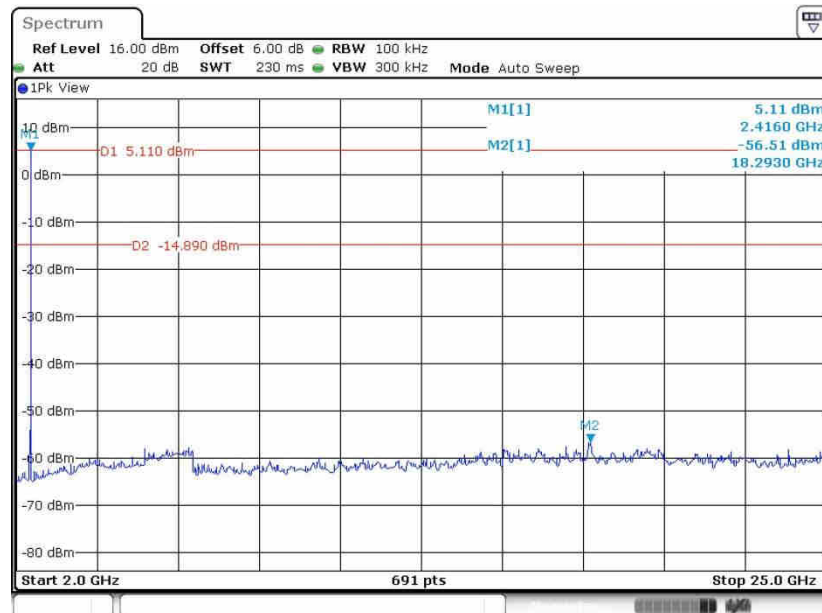

Date: 20.AUG.2019 14:54:09




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

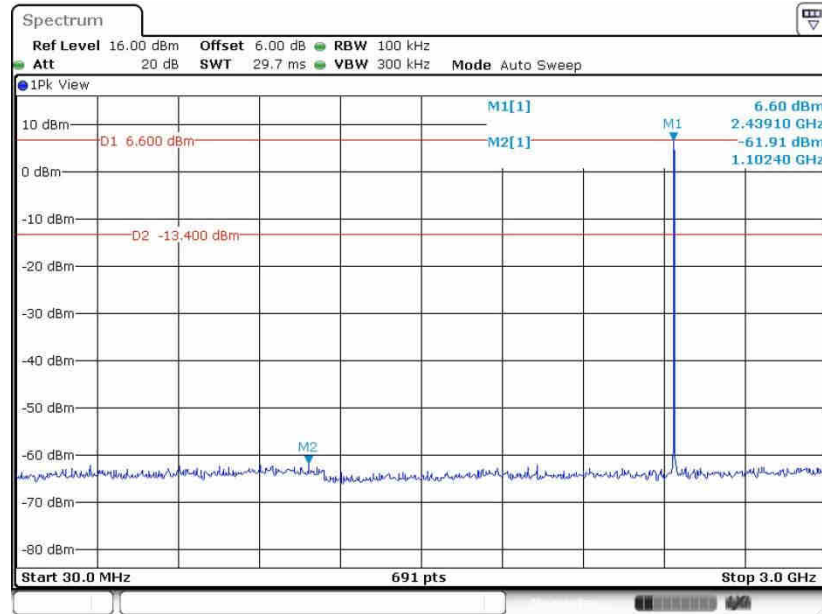

Date: 20.AUG.2019 14:57:04


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

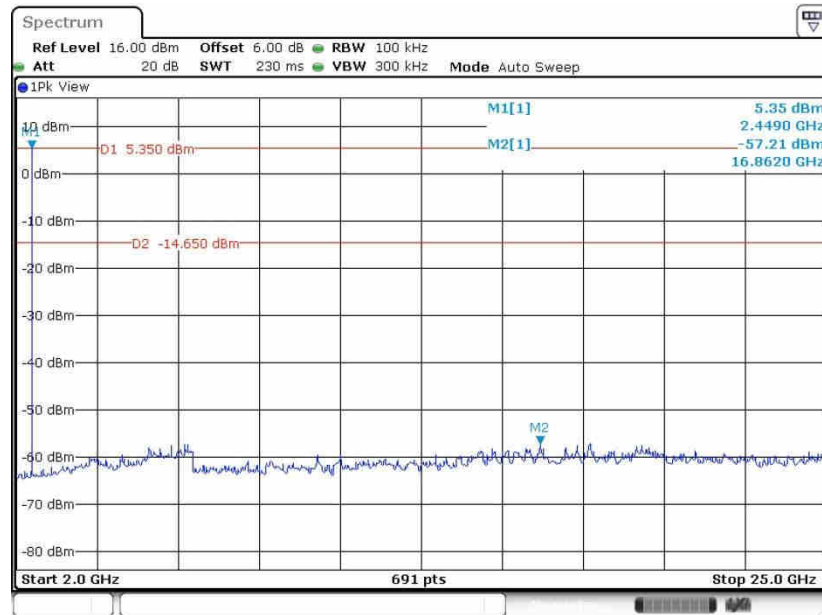

Date: 20.AUG.2019 14:57:32




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

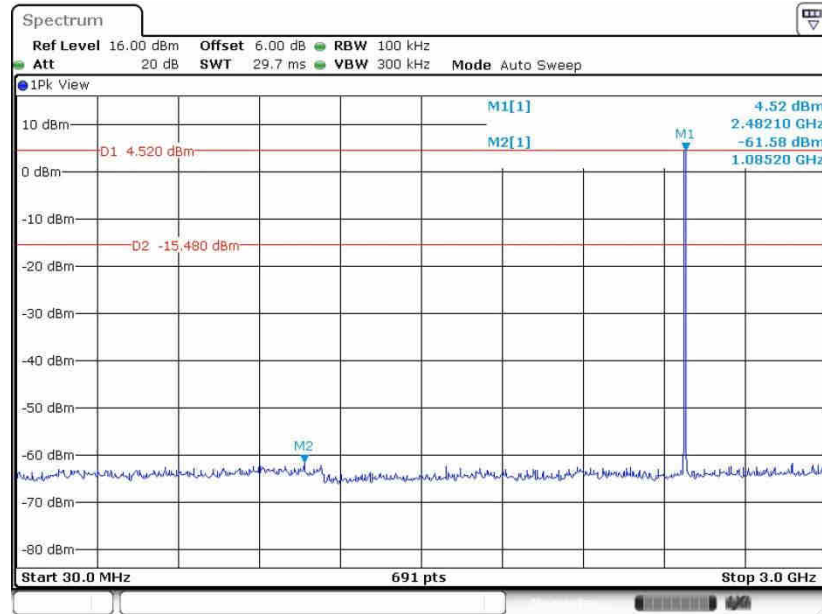

Date: 20.AUG.2019 15:01:19

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

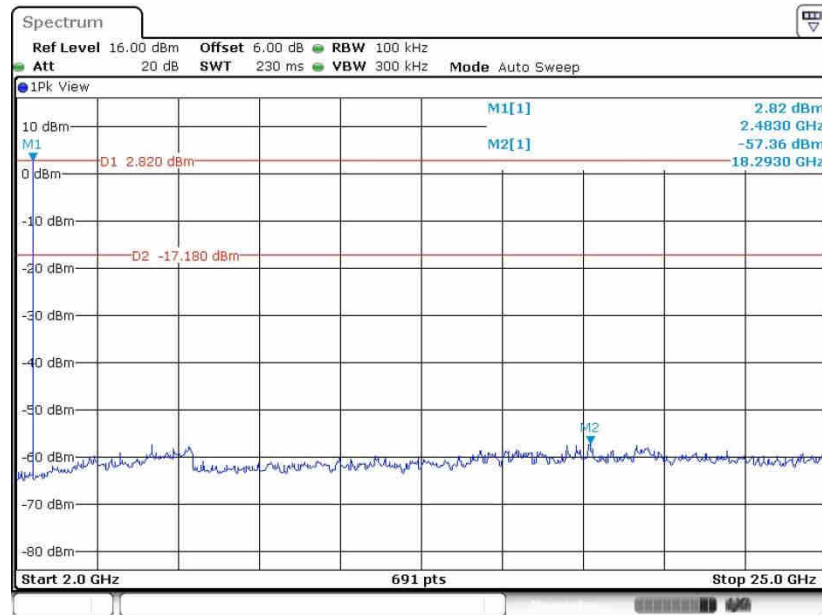


Date: 20.AUG.2019 15:01:47




Test Mode :	3Mbps	Temperature :	21~25°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Weller Liu

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

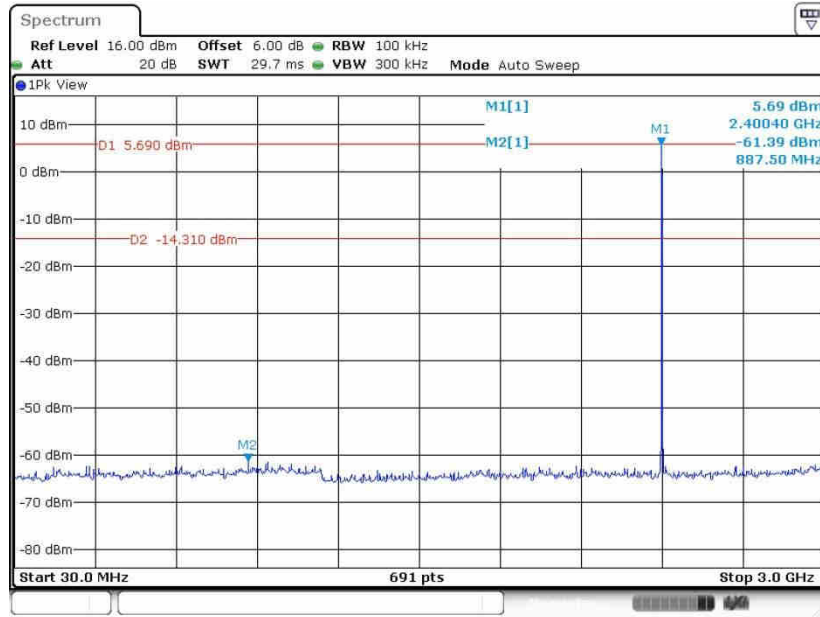

Date: 20.AUG.2019 15:05:30


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

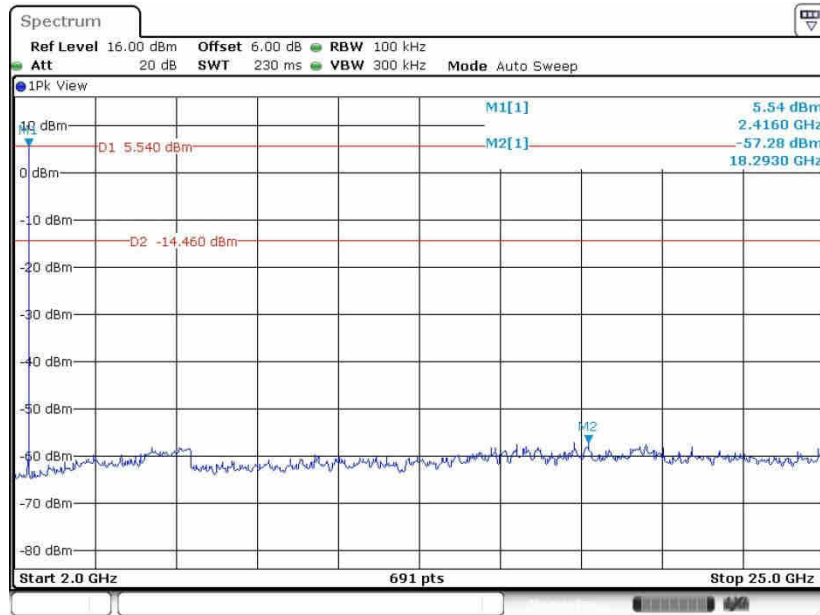

Date: 20.AUG.2019 15:05:58




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

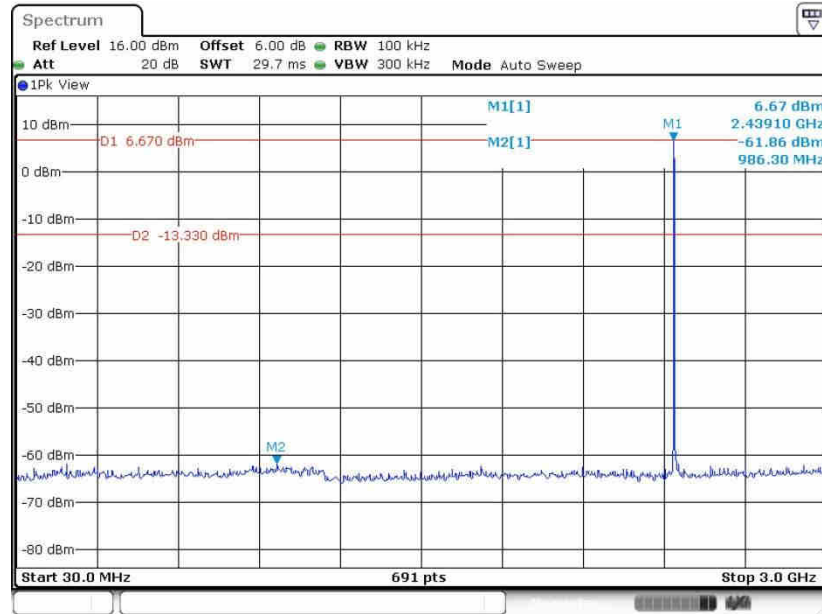

Date: 20.AUG.2019 15:10:40


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

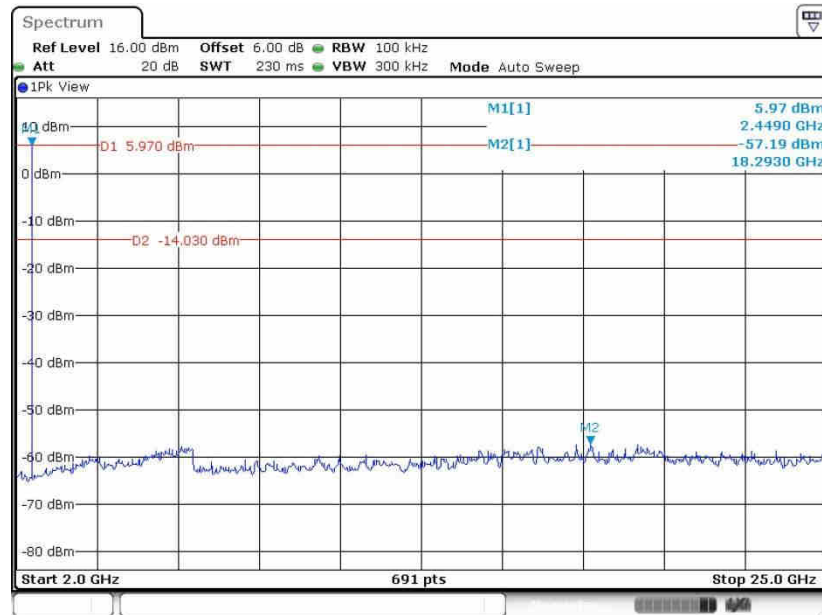

Date: 20.AUG.2019 15:11:07




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

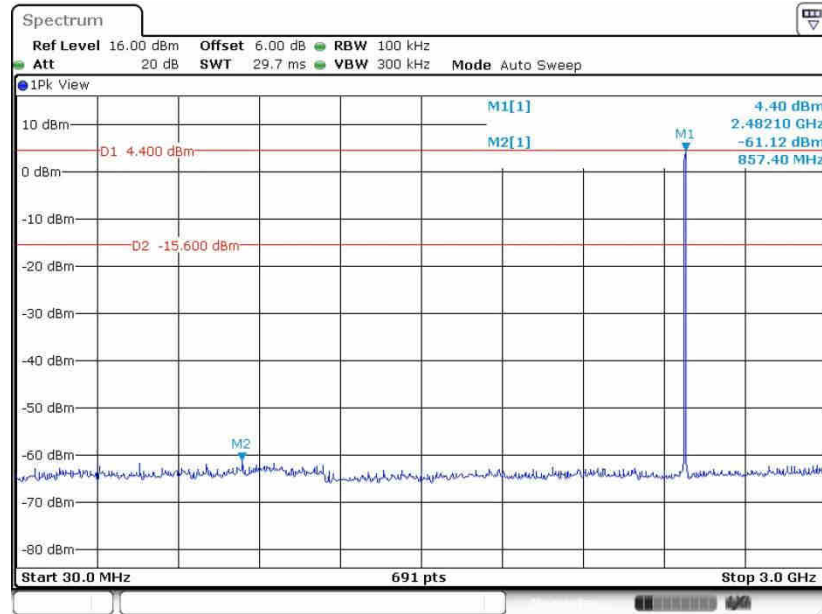

Date: 20.AUG.2019 15:15:42

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

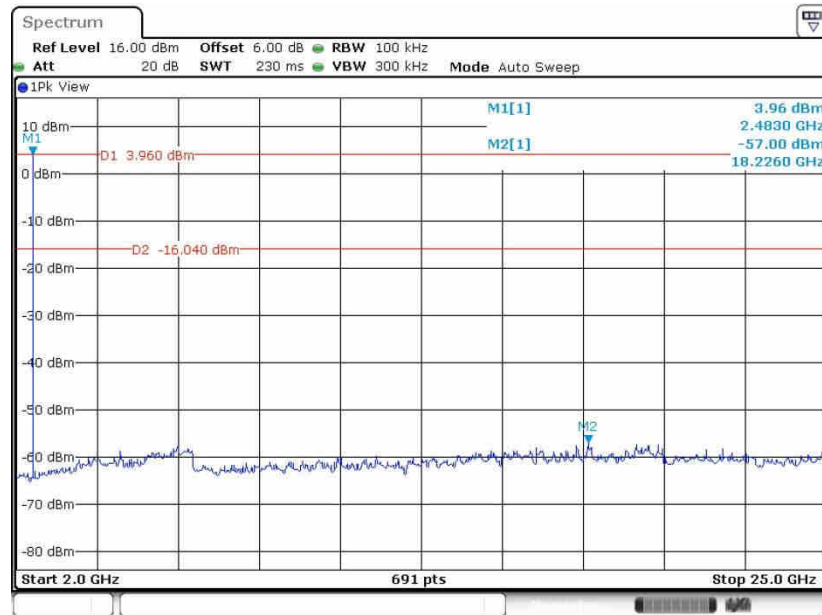

Date: 20.AUG.2019 15:16:10



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.91dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

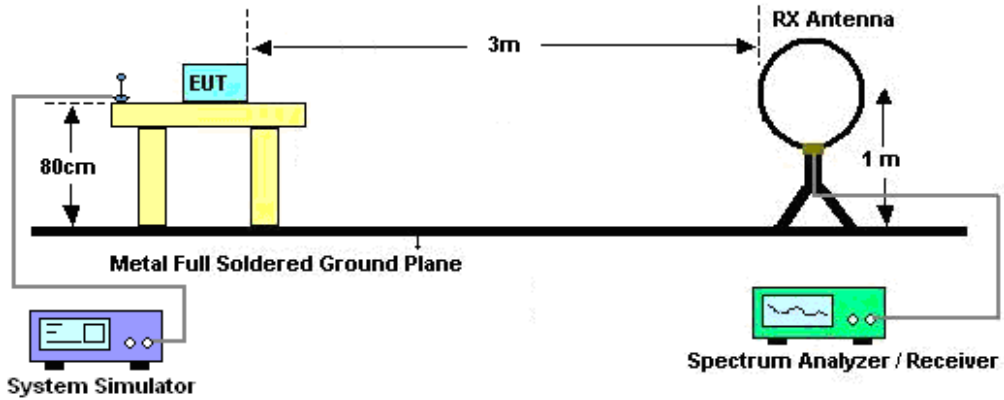

For radiated emissions from 30MHz to 1GHz

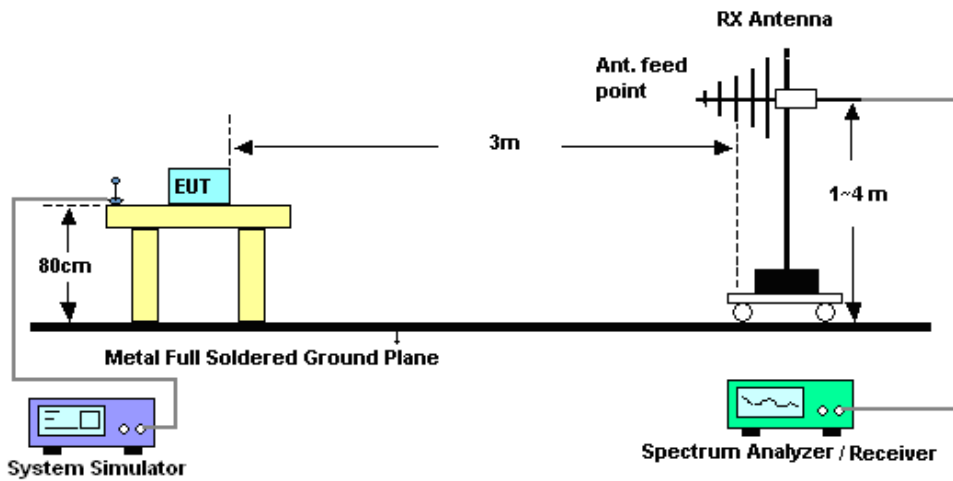

For radiated emissions above 1GHz

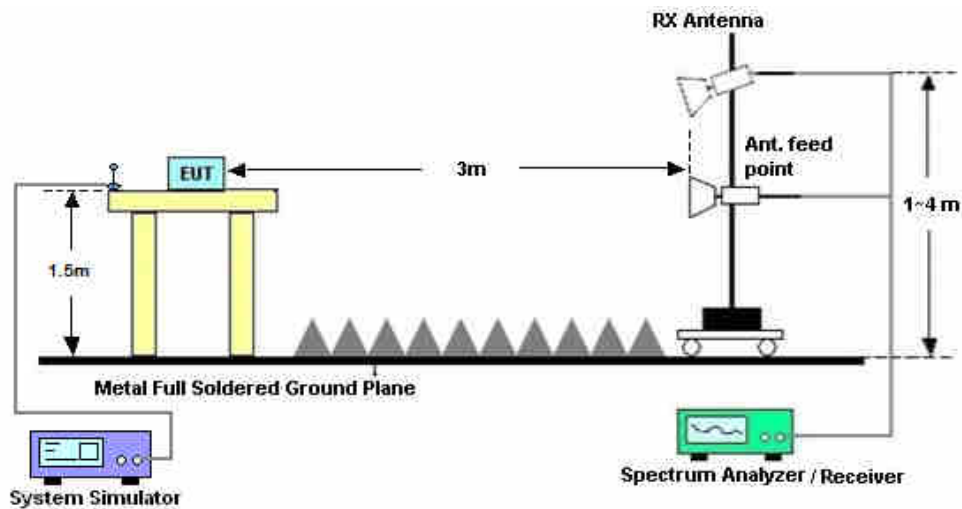



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix B.



3.9 Antenna Requirements

3.9.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.9.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.9.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2019	Aug. 20, 2019	Aug. 06, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Aug. 20, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Aug. 20, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 12, 2018	Aug. 21, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr. 16, 2019	Aug. 21, 2019	Apr. 15, 2020	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Aug. 21, 2019	Oct. 17, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 28, 2018	Aug. 21, 2019	Dec. 27, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Jan. 27, 2019	Aug. 21, 2019	Jan. 26, 2020	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Aug. 21, 2019	Jan. 04, 2020	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 19, 2018	Aug. 21, 2019	Nov. 18, 2019	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Aug. 21, 2019	Jan. 13, 2020	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Aug. 16, 2019	Aug. 21, 2019	Aug. 15, 2020	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2018	Aug. 21, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 21, 2019	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 21, 2019	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 21, 2019	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------



Appendix A. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2,386.57	44.67	-29.33	74	50.4	25.6	5.63	36.96	100	142	P	H
	*	2,386.57	19.76	-34.24	54	-	-	-	-	-	-	A	H
		2,402	95.89	-	-	101.62	25.6	5.63	36.96	100	142	P	H
		2,402	70.98	-	-	-	-	-	-	-	-	A	H
		2,347.05	44.48	-29.52	74	50.41	25.44	5.57	36.94	100	191	P	V
	*	2,347.05	19.57	-34.43	54	-	-	-	-	-	-	A	V
		2,402	91.07	-	-	96.8	25.6	5.63	36.96	100	191	P	V
		2,402	66.16	-	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz	*	2480	98.15	-	-	102.87	26.53	5.72	36.97	100	37	P	H
		2480	73.24	-	-	-	-	-	-	-	-	A	H
		2483.83	50.49	-23.51	74	55.21	26.53	5.72	36.97	100	37	P	H
		2483.83	25.58	-28.42	54	-	-	-	-	-	-	A	H
	*	2480	91.46	-	-	96.18	26.53	5.72	36.97	100	159	P	V
		2480	66.55	-	-	-	-	-	-	-	-	A	V
		2483.5	47.2	-26.8	74	51.92	26.53	5.72	36.97	100	159	P	V
		2483.5	22.29	-31.71	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

Table with 14 columns: BT, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for BT CH 00 (2402MHz) and BT CH 39 (2441MHz) and BT CH 78 (2480MHz). A Remark section at the bottom states: 1. No other spurious found. 2. All results are PASS against Peak and Average limit line.



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		50.37	22.98	-17.02	40	41.22	14.1	0.62	32.96	100	0	P	H
		96.93	22.78	-20.72	43.5	38.65	16.1	0.96	32.93	-	-	P	H
		225.94	21.56	-24.44	46	37.07	15.89	1.55	32.95	-	-	P	H
		290.93	22.18	-23.82	46	34.34	19.07	1.78	33.01	-	-	P	H
		767.2	24.37	-21.63	46	28.69	25.7	3.05	33.07	-	-	P	H
		927.25	25.15	-20.85	46	27	26.74	3.4	31.99	-	-	P	H
		34.85	25.59	-14.41	40	36.64	21.4	0.5	32.95	100	0	P	V
		96.93	26.82	-16.68	43.5	42.69	16.1	0.96	32.93	-	-	P	V
		217.21	16.23	-29.77	46	32.39	15.26	1.52	32.94	-	-	P	V
		556.71	18.17	-27.83	46	24.91	24.08	2.5	33.32	-	-	P	V
		849.65	19.71	-26.29	46	22.73	26.3	3.27	32.59	-	-	P	V
		959.26	20.78	-25.22	46	21.91	27.03	3.47	31.63	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)


For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix B. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

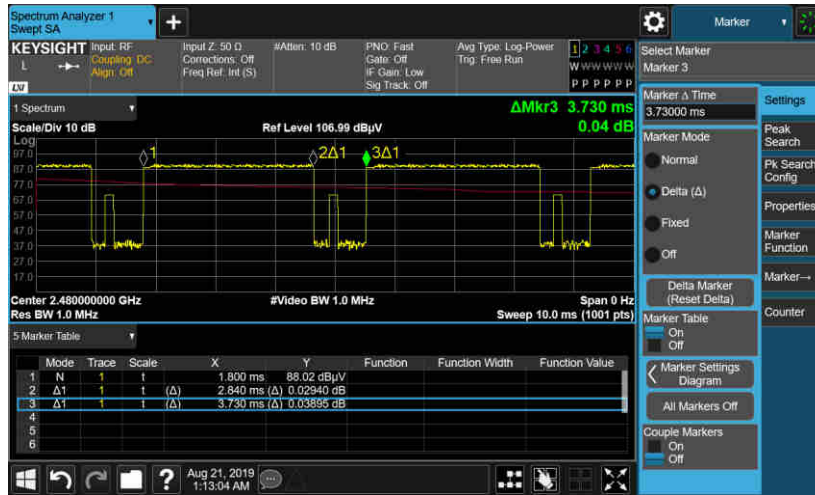

3DH5 on time (Count Pulses) Plot on Channel 39

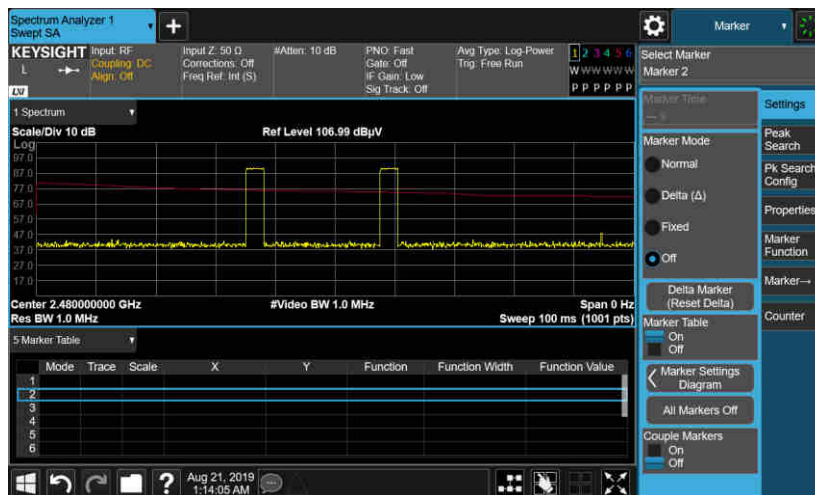

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.84 / 100 = 5.68 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.91 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.



Appendix D. Reference Report

Please refer to Sporton report number FR932901A which is issued separately.