



# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2075-2  
FCC ID : IHDT56ZC2  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on May 27, 2020 and testing was completed on Jun. 20, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



# TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

1. GENERAL DESCRIPTION ..... 5

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 8

    1.6. Specification of Accessory ..... 8

    1.7. Test Location ..... 9

    1.8. Test Software ..... 9

    1.9. Applicable Standards ..... 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 13

    2.4. EUT Operation Test Setup ..... 14

3. TEST RESULT ..... 15

    3.1. Test of AC Conducted Emission Measurement ..... 15

    3.2. Test of Radiated Emission Measurement ..... 19

4. LIST OF MEASURING EQUIPMENT ..... 24

5. UNCERTAINTY OF EVALUATION ..... 25

APPENDIX A. SETUP PHOTOGRAPHS



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC051103-02	Rev. 01	Initial issue of report	Jul. 17, 2020



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.48 dB at 14.907 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 8.46 dB at 38.730 MHz for peak

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2075-2
FCC ID	IHDT56ZC2
EUT supports Radios application	GSM/CDMA/WCDMA/LTE/NFC/5G NR WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conduction: 353613110012542 Radiation: 353613110013532
HW Version	DVT2
SW Version	QPN30.37
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 14 : 790.5 MHz ~ 795.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5MHz 5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n25: 1852.5 MHz ~ 1912.5 MHz 5G NR n41: 2506 MHz ~ 2680 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 665.5 MHz ~ 695.5MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA2000 BC10: 817.9 MHz ~ 823.1 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 14 : 760.5 MHz ~ 765.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz



	<p>LTE Band 26 : 859.7 MHz ~ 893.3 MHz          LTE Band 29 : 718.5 MHz ~ 726.5 MHz          LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz          LTE Band 38: 2572.5 MHz ~ 2617.5 MHz          LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz          LTE Band 66 : 2110.7 MHz~ 2199.3 MHz          LTE Band 71: 619.5 MHz ~ 649.5MHz          5G NR n2: 1932.5 MHz ~ 1987.5 MHz          5G NR n5: 871.5 MHz ~ 891.5 MHz          5G NR n25: 1932.5 MHz ~ 1992.5 MHz          5G NR n41: 2506 MHz ~ 2680 MHz          5G NR n66: 2112.5 MHz~ 2197.5 MHz          5G NR n71: 619.5 MHz ~ 649.5MHz          CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz          CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz          CDMA2000 BC10: 862.9 MHz ~ 868.1 MHz          802.11b/g/n: 2412 MHz ~ 2462 MHz          802.11a/n/ac: 5180 MHz ~ 5240 MHz;                            5260 MHz ~ 5320 MHz;                            5500 MHz ~ 5700 MHz                            5745 MHz ~ 5825 MHz          Bluetooth: 2402 MHz ~ 2480 MHz          GNSS : 1559 MHz ~ 1610 MHz                    1164MHz ~ 1215MHz          NFC : 13.56 MHz          FM : 88 MHz ~ 108 MHz</p>
<b>Antenna Type</b>	<p>WWAN : PIFA Antenna          WLAN 2.4GHz : LOOP Antenna / IFA Antenna          WLAN 5GHz : IFA Antenna          Bluetooth : IFA Antenna          GNSS: LOOP Antenna          NFC : Ferrite+FPC Antenna          FM : External Handset Antenna</p>
<b>Type of Modulation</b>	<p>GSM: GMSK          GPRS: GMSK          EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK          WCDMA : BPSK (Uplink)          HSDPA/DC-HSDPA : QPSK (Uplink)          HSUPA : QPSK (Uplink)          HSPA+ : 16QAM (16QAM uplink is not supported)          DC-HSDPA : 64QAM          LTE: QPSK / 16QAM / 64QAM          5G NR:          DFT-s-OFDM (Pi/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM)          CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)          CDMA2000 1xRTT: QPSK          CDMA2000 1xEV-DO: QPSK/8PSK          802.11b : DSSS (DBPSK / DQPSK / CCK)          802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM /256QAM)          Bluetooth LE : GFSK          Bluetooth (1Mbps) : GFSK          Bluetooth (2Mbps) :π/4-DQPSK</p>



	Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM: FM
--	---

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-201
AC Adapter 2	Brand Name	Motorola(Acbel)	Model Name	MC-201
Battery	Brand Name	Motorola(Amperex)	Model Name	LZ50
USB Cable 1	Brand Name	Motorola(Luxshare)	Model Name	SC18C24368
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	SC18C24367





### 1.7. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

### 1.8. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT uses a USB interface and microprocessor operating 800MHz which is the maximum frequency used.

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + Camera(Rear) + USB Cable1(Charging from Adapter1)
	Mode 2: WCDMA 1900 Rx + Bluetooth Idle + Earphone + WLAN Idle(5G) + Camera(Front) + USB Cable2(Charging from Adapter2)
	Mode 3: CDMA BC10 Rx(Low) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + MPEG4 + USB Cable1(Charging from Adapter1)
	Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + Earphone + WLAN Idle(5G) + NFC On + USB Cable1(Charging from Adapter1)
	Mode 5: LTE Band 14 Rx(High) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + FM Rx(98MHZ) + USB Cable1(Charging from Adapter1)
	Mode 6: LTE Band 26 Rx(Low) + Bluetooth Idle + Earphone + WLAN Idle(5G) + GNSS Rx + USB Cable1(Data Link with Notebook)
	Mode 7: LTE Band 12 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + GNSS Rx + USB Cable2(Data Link with Notebook)
	Mode 8: LTE Band 71 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + FM Rx(98MHZ) + USB Cable1(Charging from Adapter1)
	Mode 9: LTE Band 29 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + FM Rx(98MHZ) + USB Cable1(Charging from Adapter1)
	Mode 10: EN-DC 2A_n5A Rx (Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + FM Rx(98MHZ) + USB Cable1(Charging from Adapter1)
Radiated Emissions	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + Camera(Rear) + USB Cable1(Charging from Adapter1)
	Mode 2: WCDMA 1900 RX + Bluetooth Idle + Earphone + WLAN Idle(5G) + Camera(Front) + USB Cable2(Charging from Adapter2)
	Mode 3: CDMA BC10 Rx(Low) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + MPEG4 + USB Cable2(Charging from Adapter2)
	Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + Earphone + WLAN Idle(5G) + NFC On + USB Cable2(Charging from Adapter2)
	Mode 5: LTE Band 14 Rx(High) + Bluetooth Idle + Earphone + WLAN Idle(2.4G)




	<p>+ FM Rx(88MHZ) + USB Cable2(Charging from Adapter2)</p> <p>Mode 6: LTE Band 26 Rx(Low) + Bluetooth Idle + Earphone + WLAN Idle(5G) + GNSS Rx + USB Cable1(Data Link with Notebook)</p> <p>Mode 7: LTE Band 12 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(2.4G) + GNSS Rx + USB Cable2(Data Link with Notebook)</p> <p>Mode 8: LTE Band 71 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(5G) + NFC On + USB Cable2(Charging from Adapter2)</p> <p>Mode 9: LTE Band 29 Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(5G) + NFC On + USB Cable2(Charging from Adapter2)</p> <p>Mode 10 : EN-DC 2A_n5A Rx(Middle) + Bluetooth Idle + Earphone + WLAN Idle(5G) + Earphone1 + USB Cable2(Charging from Adapter2)</p>
--	---

**Remark:**

1. The worst case of AC is mode 9; only the test data of this mode is reported.
2. The worst case of RE is mode 4; only the test data of this mode is reported.
3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.
4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA B5/CDMA BC 0/BC10/5G NR n5/n71/LTE Band 12/13/14/26/29/71 and FM Rx, the worst channel was recorded in this report.

## 2.2.Connection Diagram of Test System

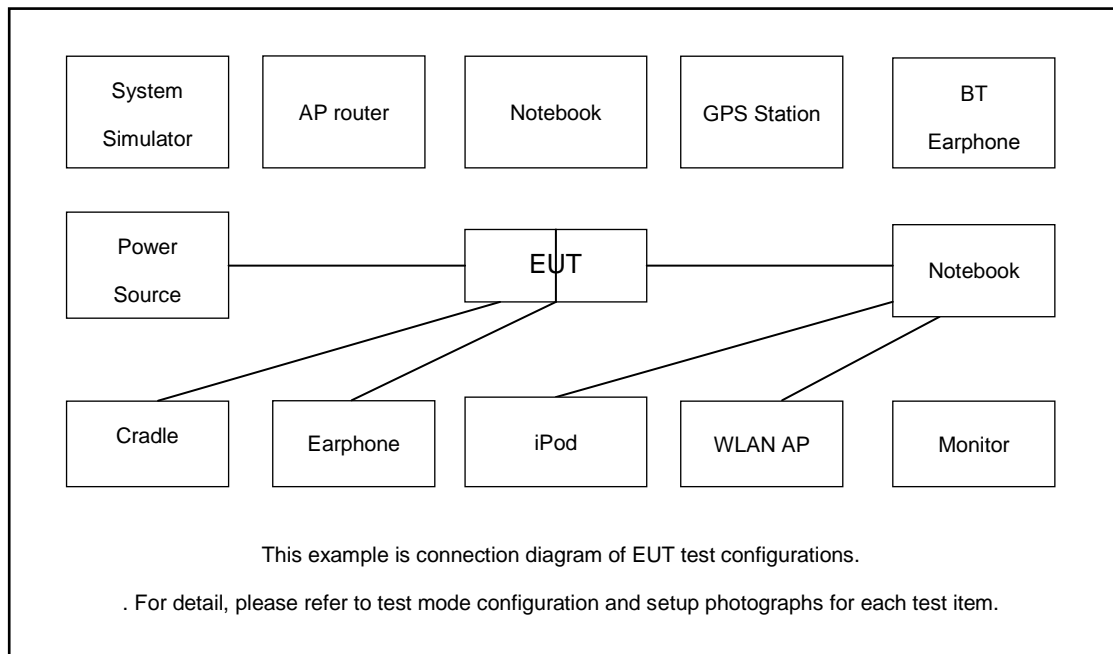

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude3440	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	Hard disk	KINGSHARE	KSP6120G	Fcc DoC	Shielded, 1.2m	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A
6.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
7.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
8.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
9.	phone	N/A	N/A	N/A	N/A	N/A
10.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded,1.8m
11.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
12.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
13.	5G NR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
14.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
15.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
16.	Vector Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on NFC Function.
4. Turn on MPEG4 function.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on FM function to make the EUT receive continuous signals from FM station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

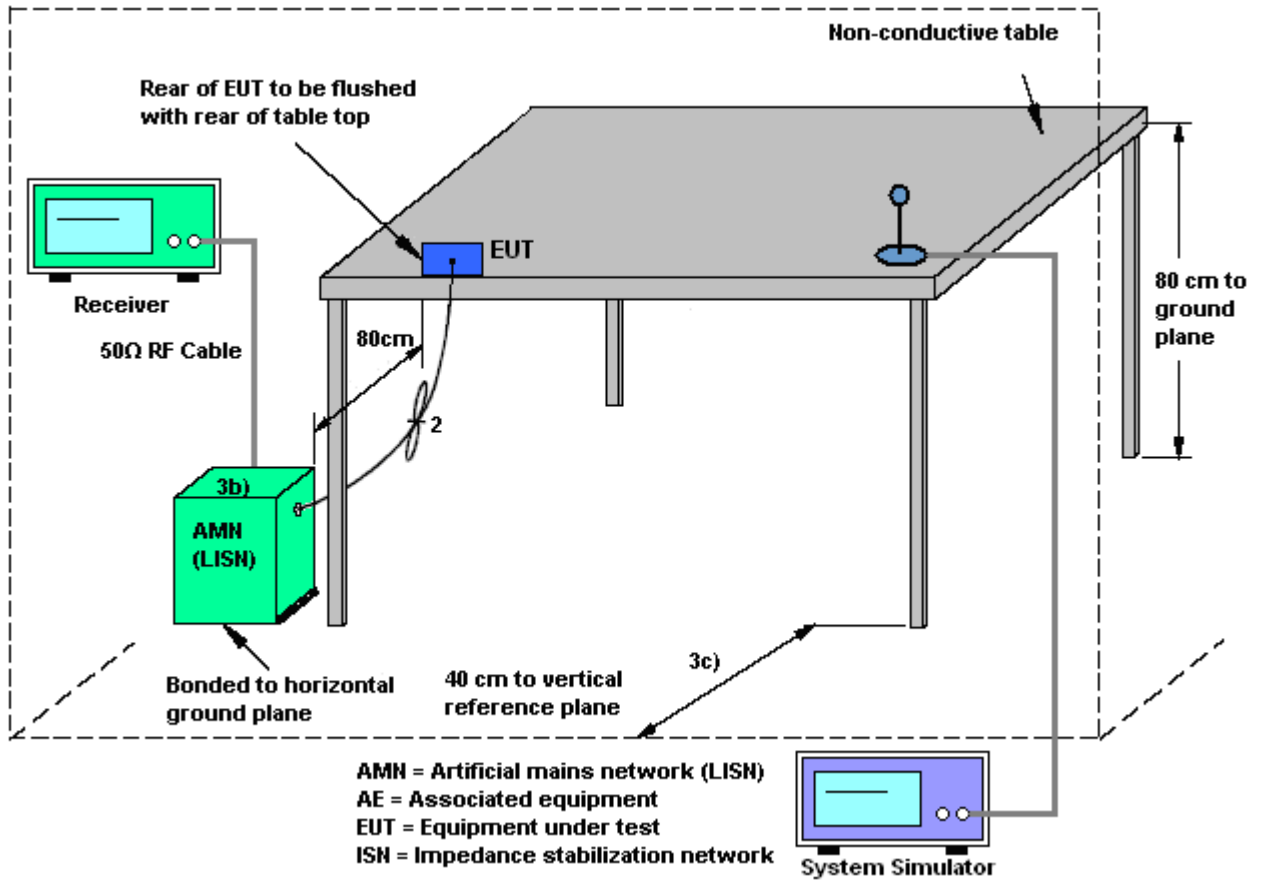






3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

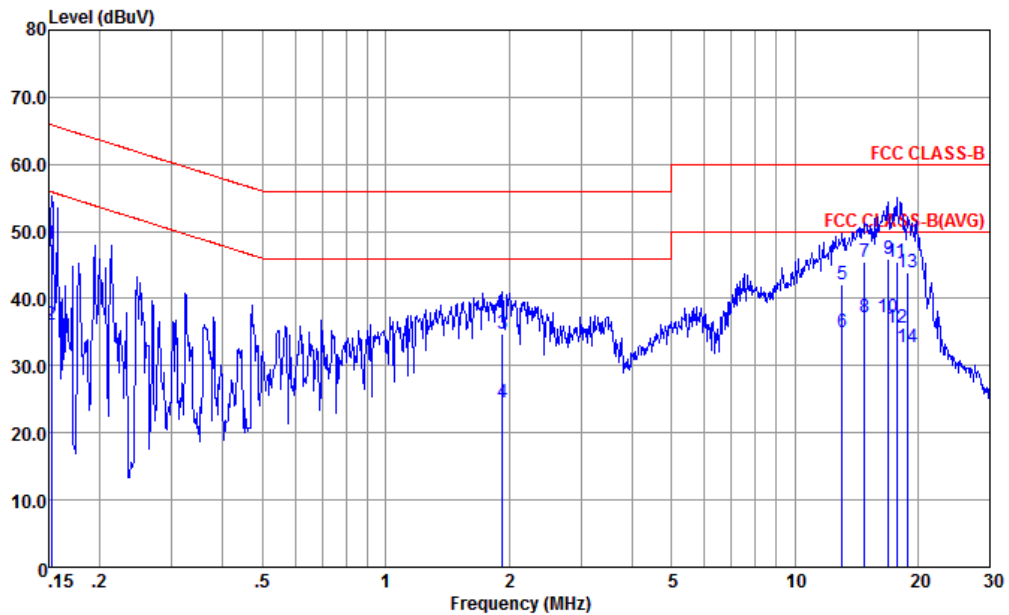


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-191028-CN02 LINE  
 Project : (FC) 051103-02  
 mode : Mode 9  
 : 353613110012542 #8

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	48.04	-17.83	65.87	37.50	0.07	10.47	QP
2	0.152	36.04	-19.83	55.87	25.50	0.07	10.47	Average
3	1.928	34.81	-21.19	56.00	24.20	0.38	10.23	QP
4	1.928	24.81	-21.49	46.00	13.90	0.38	10.23	Average
5	13.057	42.22	-17.78	60.00	30.50	1.34	10.38	QP
6	13.057	34.92	-15.08	50.00	23.20	1.34	10.38	Average
7	14.828	45.43	-14.57	60.00	33.50	1.54	10.39	QP
8	14.828	37.13	-12.87	50.00	25.20	1.54	10.39	Average
9	16.928	45.83	-14.17	60.00	33.59	1.80	10.44	QP
10 *	16.928	37.13	-12.87	50.00	24.89	1.80	10.44	Average
11	17.755	45.55	-14.45	60.00	33.20	1.90	10.45	QP
12	17.755	35.65	-14.35	50.00	23.30	1.90	10.45	Average
13	18.920	44.01	-15.99	60.00	31.51	2.03	10.47	QP
14	18.920	32.81	-17.19	50.00	20.31	2.03	10.47	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

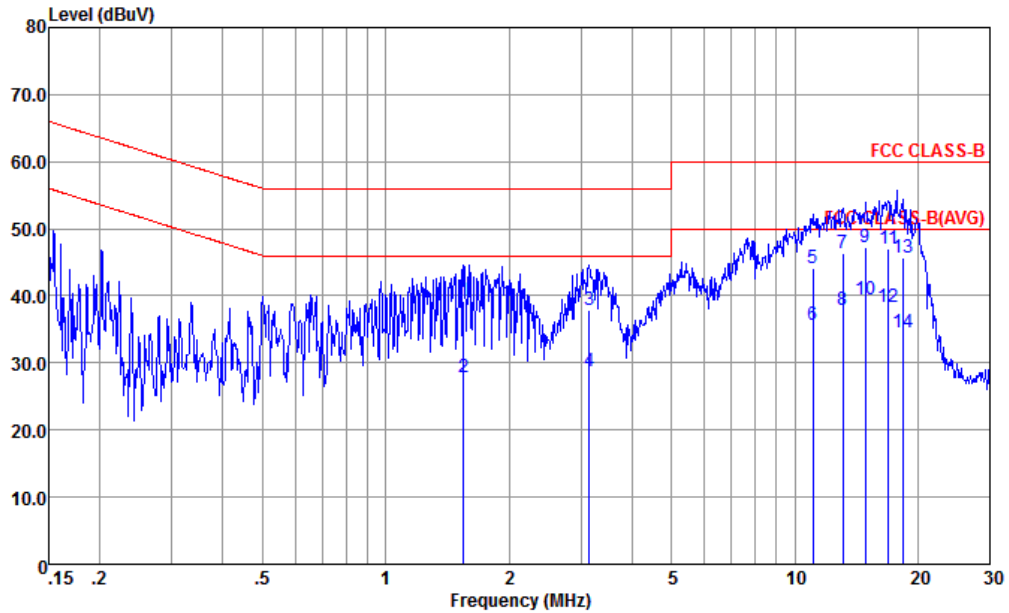

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-191028-CN02 NEUTRAL  
 Project : (FC) 051103-02  
 mode : Mode 9  
 : 353613110012542 #8

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	1.552	39.17	-16.83	56.00	28.50	0.44	10.23	QP
2	1.552	27.87	-18.13	46.00	17.20	0.44	10.23	Average
3	3.140	37.82	-18.18	56.00	26.91	0.67	10.24	QP
4	3.140	28.72	-17.28	46.00	17.81	0.67	10.24	Average
5	11.080	44.03	-15.97	60.00	32.30	1.38	10.35	QP
6	11.080	35.63	-14.37	50.00	23.90	1.38	10.35	Average
7	13.127	46.27	-13.73	60.00	34.20	1.69	10.38	QP
8	13.127	37.97	-12.03	50.00	25.90	1.69	10.38	Average
9	14.907	47.22	-12.78	60.00	34.90	1.93	10.39	QP
10 *	14.907	39.52	-10.48	50.00	27.20	1.93	10.39	Average
11	16.928	46.91	-13.09	60.00	34.19	2.28	10.44	QP
12	16.928	38.31	-11.69	50.00	25.59	2.28	10.44	Average
13	18.328	45.78	-14.22	60.00	32.80	2.52	10.46	QP
14	18.328	34.58	-15.42	50.00	21.60	2.52	10.46	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

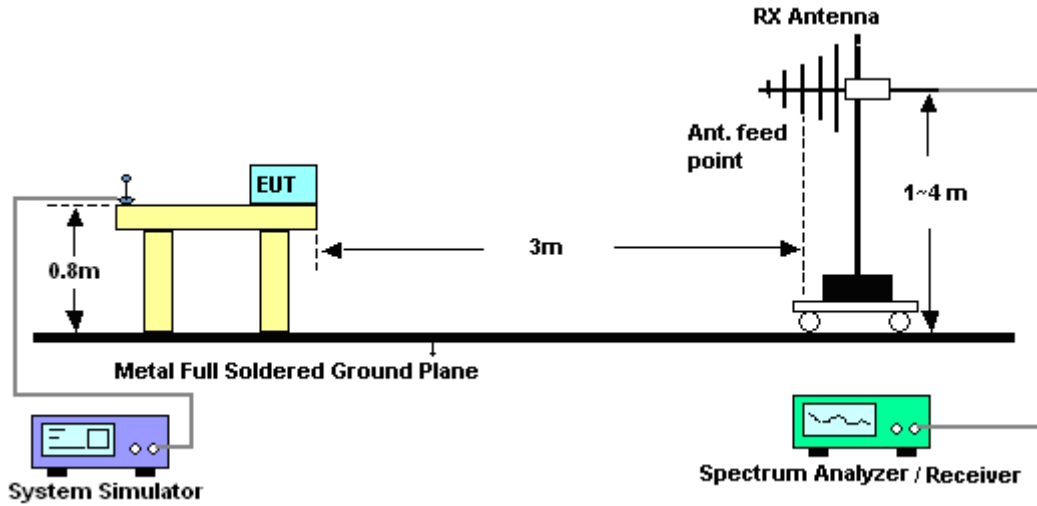


For radiated emissions above 1GHz

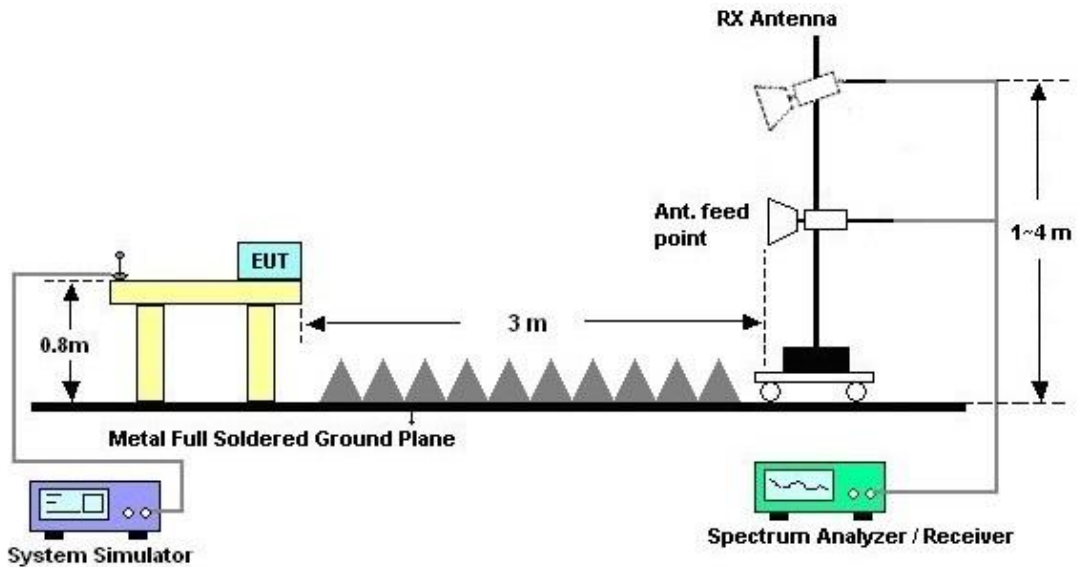



3.2.5. Test Result of Radiated Emission

Test Engineer :	Carl NI	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

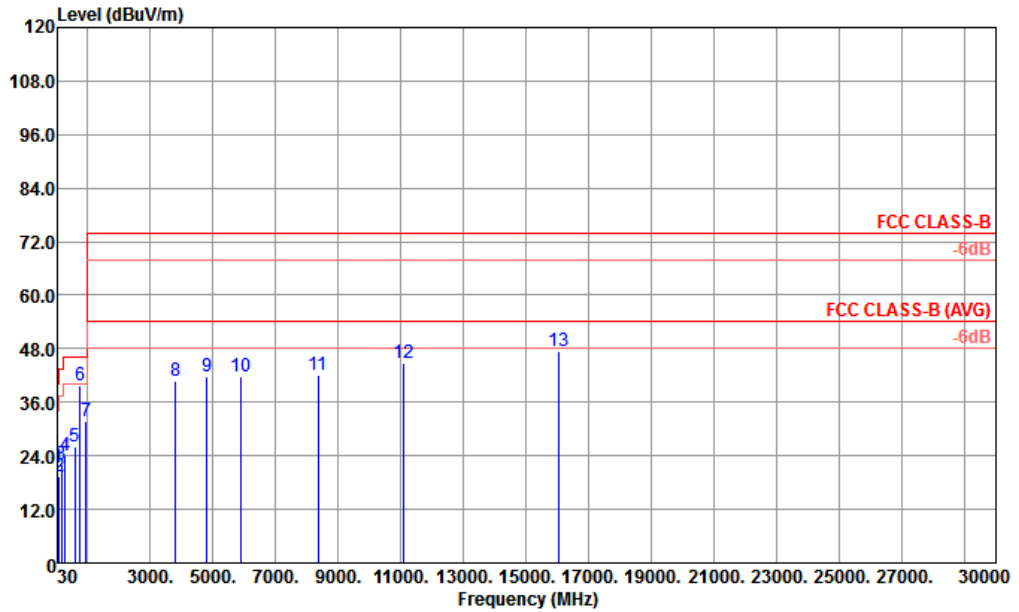


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 44483-3M HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	21.29	-18.71	40.00	27.23	25.10	0.94	31.98	---	---	Peak
2	86.26	19.53	-20.47	40.00	35.35	14.32	1.79	31.93	---	---	Peak
3	157.07	22.12	-21.38	43.50	34.88	16.68	2.49	31.93	---	---	Peak
4	271.53	24.15	-21.85	46.00	33.29	19.60	3.27	32.01	---	---	Peak
5	593.57	26.21	-19.79	46.00	28.03	25.75	4.83	32.40	---	---	Peak
6	752.65	39.61			38.21	28.20	5.44	32.24	---	---	Peak
7	950.53	31.80	-14.20	46.00	25.68	30.99	6.11	30.98	100	0	Peak
8	3800.00	40.67	-33.33	74.00	57.73	33.62	9.28	59.96	---	---	Peak
9	4800.00	41.72	-32.28	74.00	57.42	33.70	10.56	59.96	---	---	Peak
10	5912.00	41.77	-32.23	74.00	54.95	34.92	11.88	59.98	---	---	Peak
11	8368.00	42.08	-31.92	74.00	52.88	36.39	13.98	61.17	---	---	Peak
12	11061.00	44.80	-29.20	74.00	51.93	37.44	16.33	60.90	---	---	Peak
13	16029.00	47.52	-26.48	74.00	45.84	41.28	20.53	60.13	---	---	Peak



Test Engineer :	Carl NI	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#5 is system simulator signal which can be ignored.		

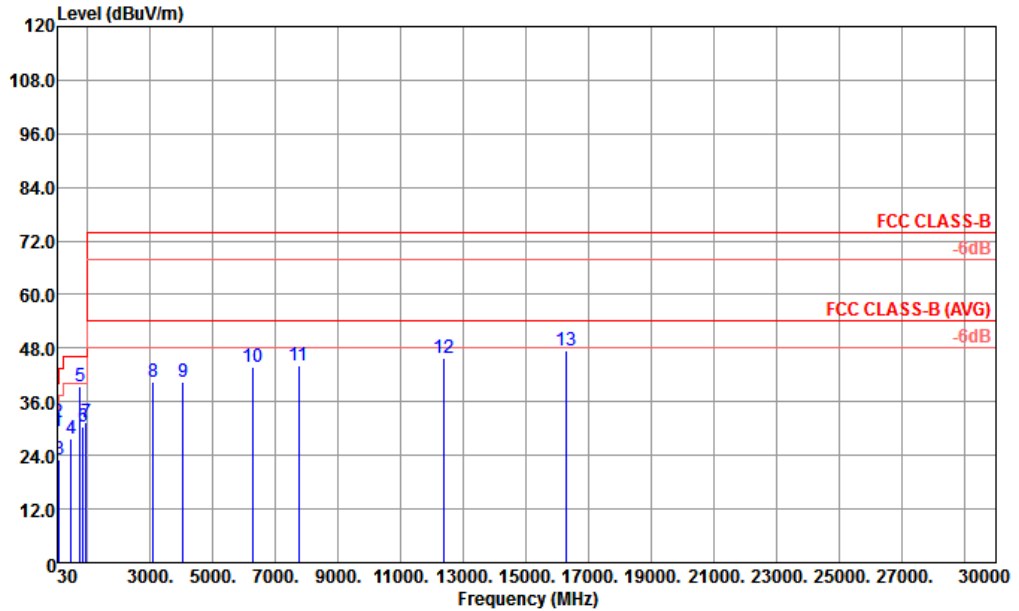

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 44483-3M VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	29.52	-10.48	40.00	35.46	25.10	0.94	31.98	---	---	Peak
2	38.73	31.54	-8.46	40.00	42.10	20.33	1.07	31.96	100	0	Peak
3	93.05	23.15	-20.35	43.50	37.99	15.19	1.90	31.93	---	---	Peak
4	481.05	27.61	-18.39	46.00	31.86	23.65	4.35	32.25	---	---	Peak
5	751.68	39.40			38.01	28.20	5.44	32.25	---	---	Peak
6	857.41	30.46	-15.54	46.00	27.12	29.27	5.81	31.74	---	---	Peak
7	946.65	31.58	-14.42	46.00	25.61	30.89	6.10	31.02	---	---	Peak
8	3088.00	40.47	-33.53	74.00	59.42	32.98	8.38	60.31	---	---	Peak
9	4048.00	40.57	-33.43	74.00	57.01	33.74	9.78	59.96	---	---	Peak
10	6288.00	43.69	-30.31	74.00	56.89	35.10	12.08	60.38	---	---	Peak
11	7736.00	44.11	-29.89	74.00	55.48	36.15	13.54	61.06	---	---	Peak
12	12348.00	45.68	-28.32	74.00	49.71	38.65	17.96	60.64	---	---	Peak
13	16281.00	47.54	-26.46	74.00	45.39	41.10	20.69	59.64	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 14, 2020	Jun. 12, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jun. 12, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jun. 12, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jun. 12, 2020	Oct. 17, 2020	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 18, 2019	Jun. 20, 2020	Oct. 17,2020	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct.18, 2019	Jun. 20, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 30, 2019	Jun. 20, 2020	Dec. 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 10, 2019	Jun. 20, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jun. 20, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jun. 20, 2020	Jan. 07, 2021	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Jun. 20, 2020	Aug. 05, 2020	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5G Hz	Oct. 18, 2019	Jun. 20, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Jun. 20, 2020	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 20, 2020	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 20, 2020	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required





## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------