



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2075-3
FCC ID : IHDT56ZC3
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on May 11, 2020 and testing was completed on Jun. 01, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Specification of Accessory 7

 1.6 Modification of EUT 7

 1.7 Testing Location 8

 1.8 Test Software 8

 1.9 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 12

 2.4 Support Unit used in test configuration and system 13

 2.5 EUT Operation Test Setup 13

 2.6 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 26dB & 99% Occupied Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 16

 3.3 Power Spectral Density Measurement 18

 3.4 Unwanted Emissions Measurement 21

 3.5 AC Conducted Emission Measurement 26

 3.6 Automatically Discontinue Transmission 28

 3.7 Antenna Requirements 29

4 LIST OF MEASURING EQUIPMENT 30

5 UNCERTAINTY OF EVALUATION 31

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.02 dB at 5447.280 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.85 dB at 0.197 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2075-3
FCC ID	IHDT56ZC3
EUT supports Radios application	CDMA/GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/FM Receiver
IMEI Code	Conducted: 353617110019738/353617110019746 Conduction: 353617110020330/353617110020348 Radiation: N/A
HW Version	DVT2
SW Version	QPN30.33-9
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<p><MIMO Ant. 1+2></p> <p><5180 MHz ~ 5240 MHz> 802.11a : 20.15 dBm / 0.1035 W 802.11n HT20 : 19.88 dBm / 0.0973 W 802.11n HT40 : 18.17 dBm / 0.0656 W 802.11ac VHT20 : 19.50 dBm / 0.0891 W 802.11ac VHT40 : 19.12 dBm / 0.0817 W 802.11ac VHT80 : 10.54 dBm / 0.0113 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 20.20 dBm / 0.1047 W 802.11n HT20 : 19.99 dBm / 0.0998 W 802.11n HT40 : 17.96 dBm / 0.0625 W 802.11ac VHT20 : 19.63 dBm / 0.0918 W 802.11ac VHT40 : 18.66 dBm / 0.0735 W 802.11ac VHT80 : 11.59 dBm / 0.0144 W</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 19.77 dBm / 0.0948 W 802.11n HT20 : 19.44 dBm / 0.0879 W 802.11n HT40 : 18.24 dBm / 0.0667 W 802.11ac VHT20 : 19.32 dBm / 0.0855 W 802.11ac VHT40 : 19.19 dBm / 0.0830 W 802.11ac VHT80 : 11.15 dBm / 0.0130 W</p>
99% Occupied Bandwidth	<p><5180 MHz ~ 5240 MHz> 802.11a : 17.98 MHz 802.11n HT20 : 19.13 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.88 MHz</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 17.88 MHz 802.11n HT20 : 18.98 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.76 MHz</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 17.68 MHz 802.11n HT20 : 18.88 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.64 MHz</p>
Antenna Type / Gain	<p><5180 MHz ~ 5240 MHz> <Ant. 1> : IFA Antenna with gain -6.0 dBi <Ant. 2> : IFA Antenna with gain -6.0 dBi</p> <p><5260 MHz ~ 5320 MHz> <Ant. 1> : IFA Antenna with gain -6.0 dBi <Ant. 2> : IFA Antenna with gain -6.0 dBi</p> <p><5500 MHz ~ 5700 MHz> <Ant. 1> : IFA Antenna with gain -6.0 dBi <Ant. 2> : IFA Antenna with gain -6.0 dBi</p>
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

	802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac MIMO	V	V

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ ac VHT40 by referring to the higher output power.
2. The EUT supports for MIMO mode only.
3. WLAN operation in 5600 MHz ~ 5650 MHz is notched.

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-202
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-203
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-205
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-202
AC Adapter 2(UK)	Brand Name	Motorola (Acbel)	Model Name	MC-203
AC Adapter 2(AU)	Brand Name	Motorola (Acbel)	Model Name	MC-205
Battery	Brand Name	Motorola(Amperex)	Model Name	LZ50
Earphone	Brand Name	Motorola(Lyand)	Model Name	MH191(SH38C81577)
USB Cable 1	Brand Name	Motorola (Luxshare)	Model Name	SC18C24368
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	SC18C24367

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + BT Link + WLAN Link(5G) + Earphone + USB Cable 1(Charging from Adapter 1)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Battery, Earphone and USB Cable 1.	



Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134


Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	-
M	Middle	42	58	106
H	High	-	-	-

2.3 Connection Diagram of Test System

For Radiation

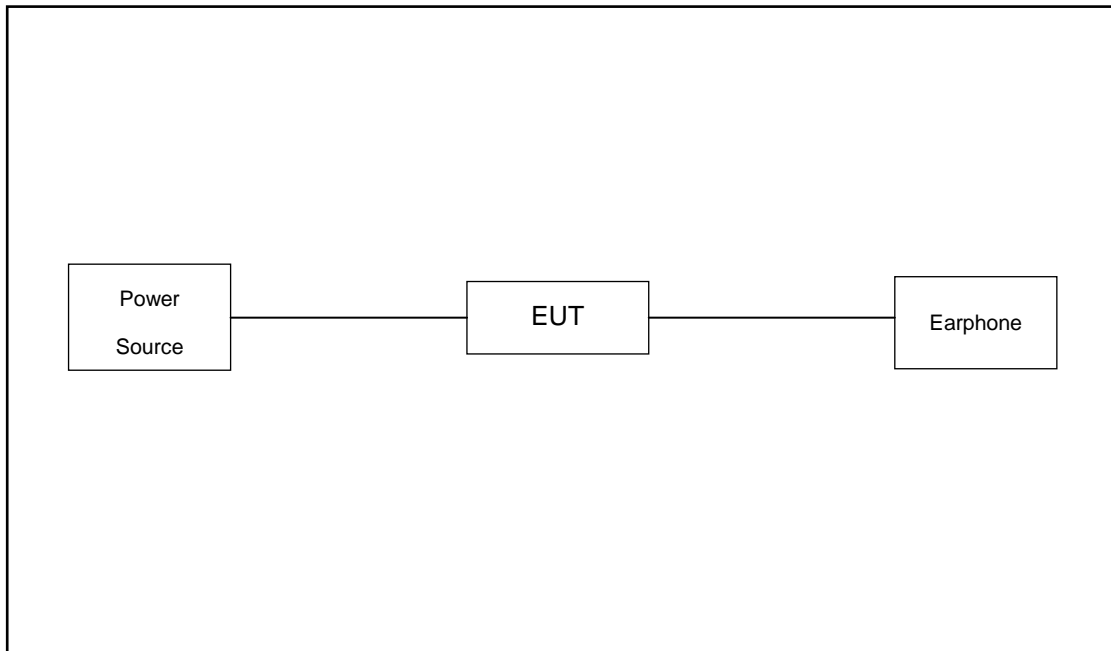

For Conduction

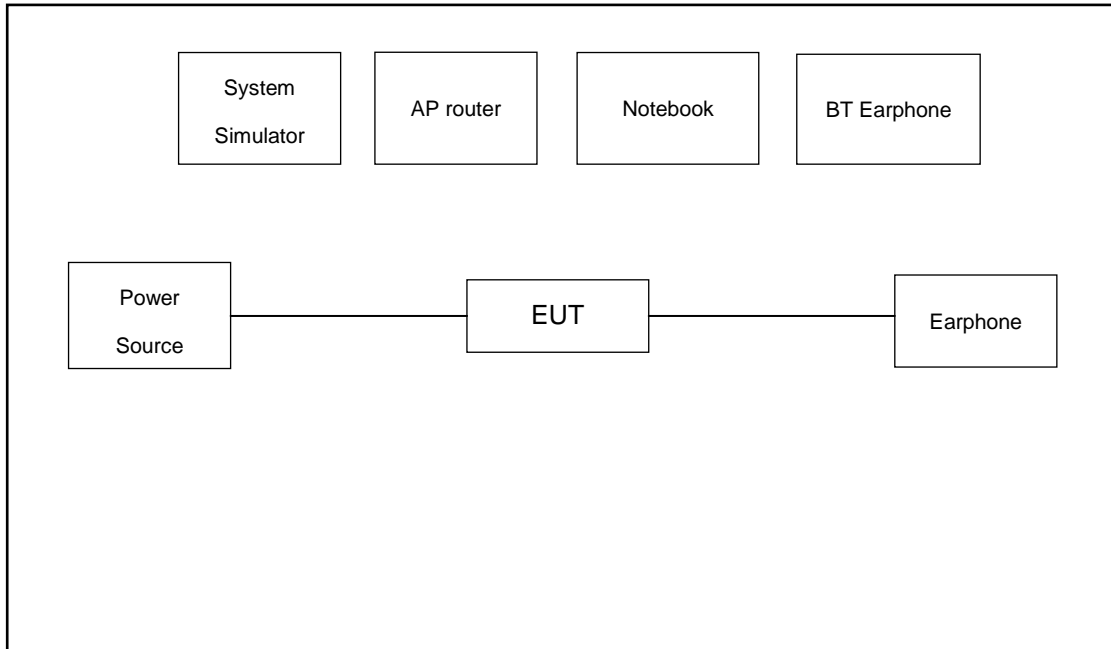



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

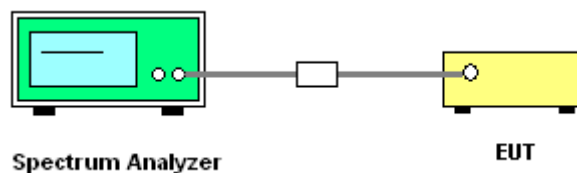

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

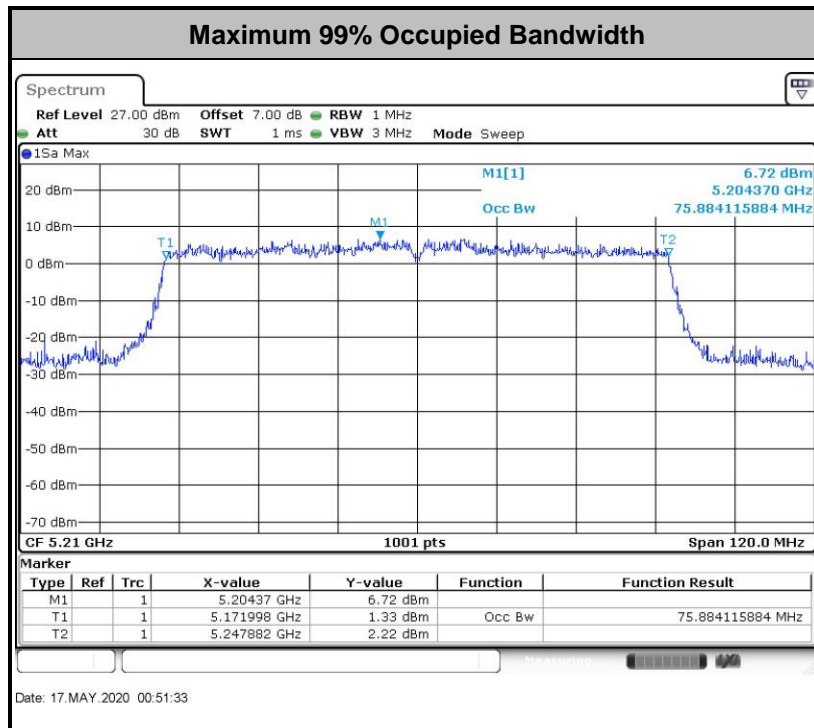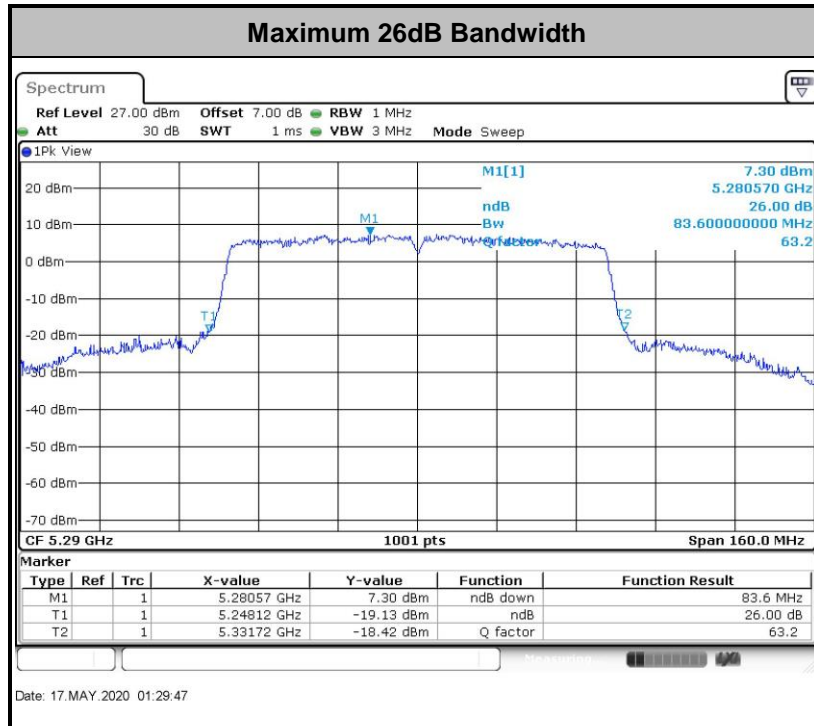

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

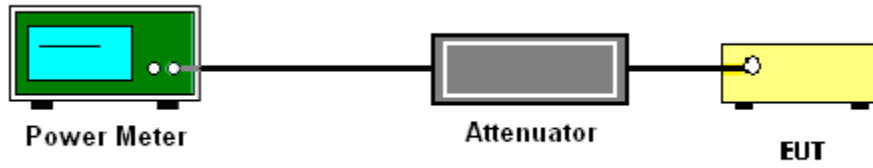

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


3.3.4 Test Setup

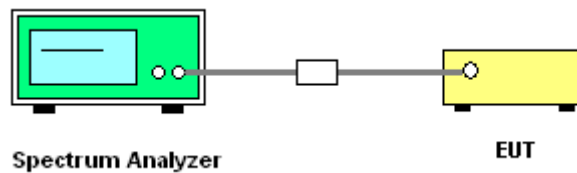



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

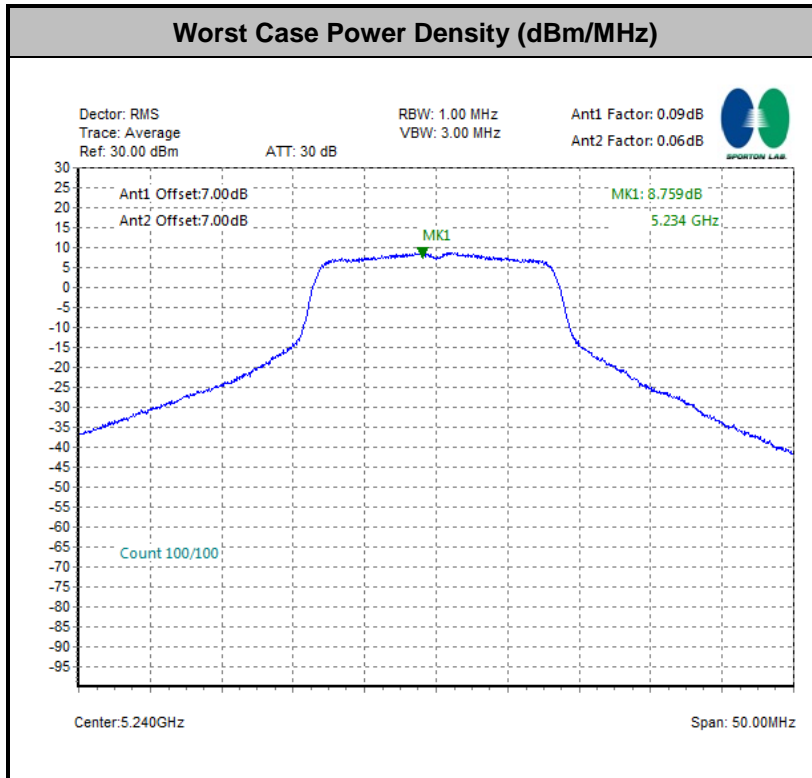



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

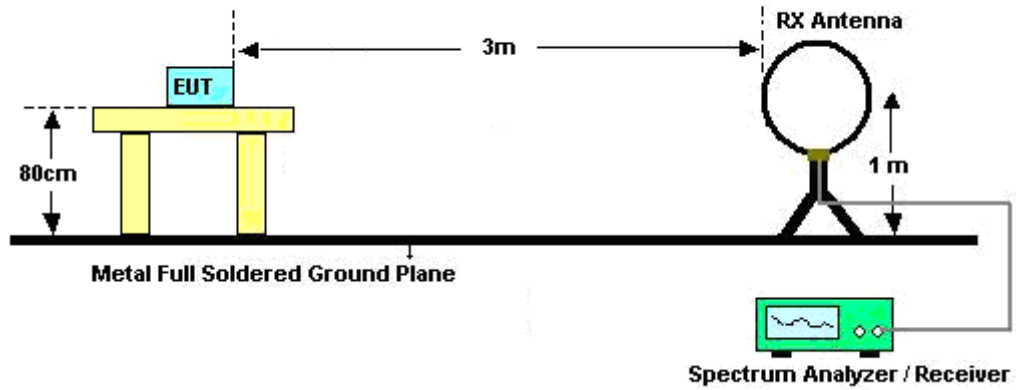

For radiated emissions from 30MHz to 1GHz

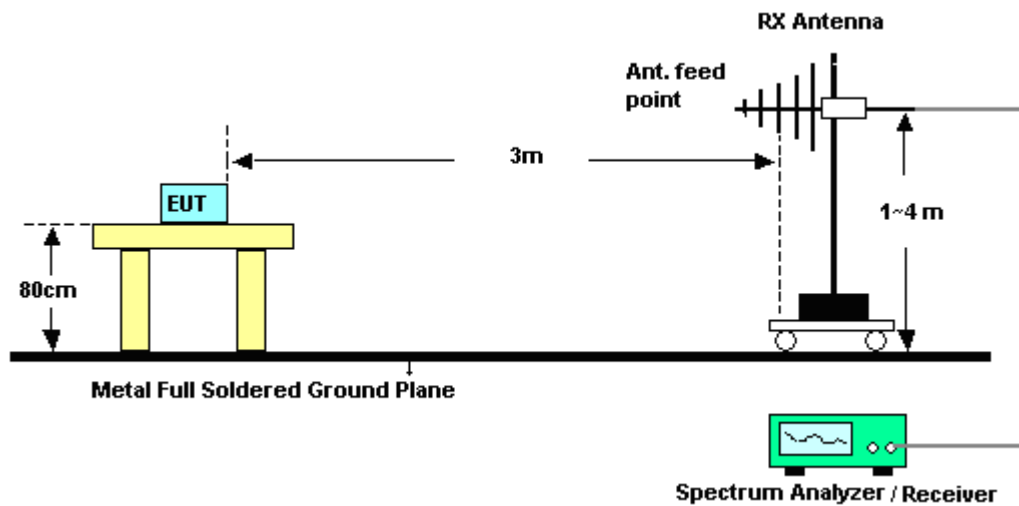

For radiated emissions above 1GHz

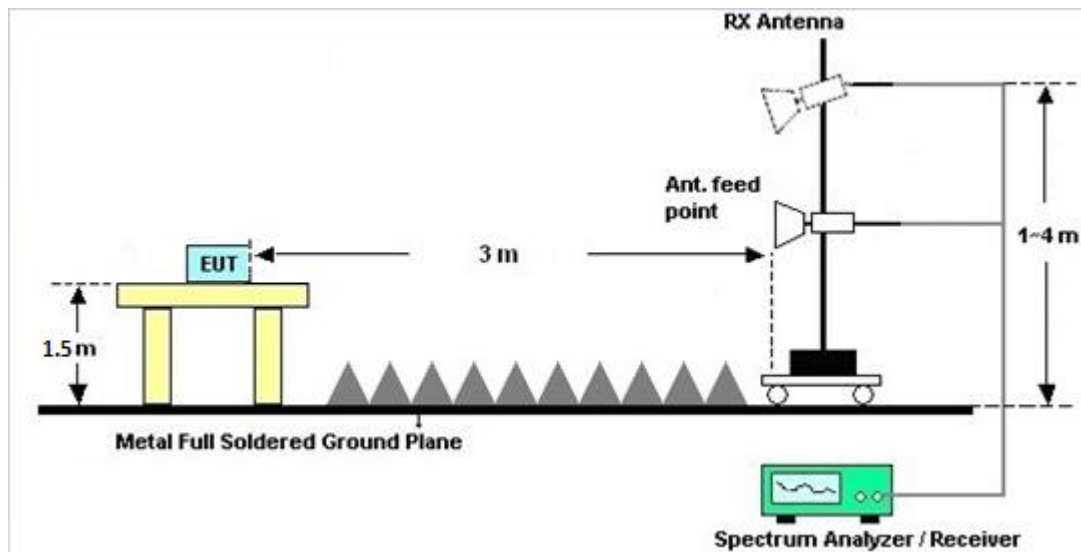

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

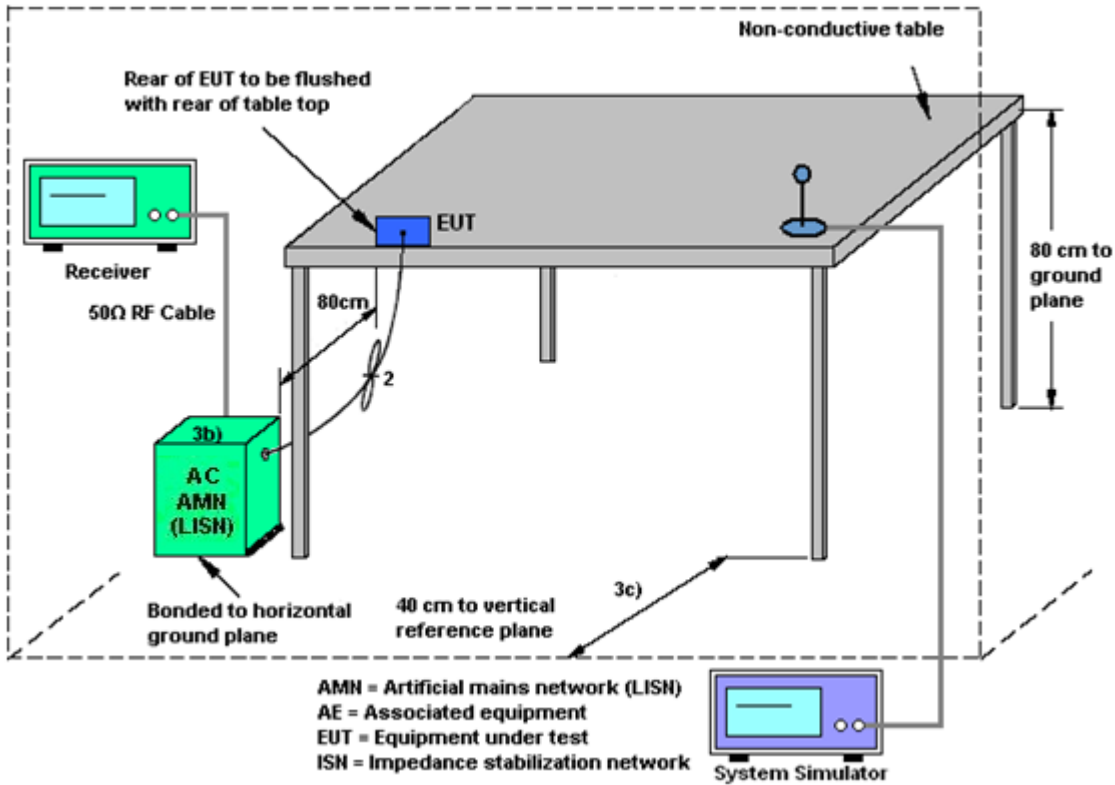

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

MIMO mode does not support Nss = 1.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band I	-6.00	-6.00	-6.00	-6.00	0.00	0.00
Band II	-6.00	-6.00	-6.00	-6.00	0.00	0.00
Band III	-6.00	-6.00	-6.00	-6.00	0.00	0.00

$Power\ limit\ reduction = Composite\ gain - 6dBi, (min = 0)$

$PSD\ limit\ reduction = Composite\ gain + PSD\ Array\ gain - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	May 17, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	May 17, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	May 17, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 18, 2019	Jun. 01, 2020	Jul. 17, 2020	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr. 15, 2020	Jun. 01, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Jun. 01, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 29, 2020	Jun. 01, 2020	May 28, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Jun. 01, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jun. 01, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 06, 2019	Jun. 01, 2020	Aug. 05, 2020	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jun. 01, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1GHz~18Ghz	Aug. 17, 2019	Jun. 01, 2020	Aug. 16, 2020	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Jun. 01, 2020	Oct. 17, 2020	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 01, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 01, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 01, 2020	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	May 16, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	May 16, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	May 16, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	May 16, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	weller liu	Temperature:	21~25	°C
Test Date:	2020/5/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	36	5180	17.43	17.43	22.93	22.63
11a	6Mbps	2	44	5220	17.58	17.98	24.78	27.27
11a	6Mbps	2	48	5240	17.63	17.88	24.43	26.27
HT20	MCS0	2	36	5180	18.63	18.58	24.58	24.23
HT20	MCS0	2	44	5220	18.68	19.13	25.03	27.37
HT20	MCS0	2	48	5240	18.78	19.03	25.33	26.47
VHT40	MCS0	2	38	5190	36.56	36.46	41.81	41.54
VHT40	MCS0	2	46	5230	36.46	36.36	41.72	41.63
VHT80	MCS0	2	42	5210	75.88	75.64	82.80	82.32

TEST RESULTS DATA
Average Power Table

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.09	0.06	16.16	15.23	18.73	24.00		-6.00		Pass
11a	6Mbps	2	44	5220	0.09	0.06	17.01	17.27	20.15	24.00		-6.00		Pass
11a	6Mbps	2	48	5240	0.09	0.06	17.34	16.81	20.09	24.00		-6.00		Pass
HT20	MCS0	2	36	5180	0.10	0.10	15.91	15.18	18.57	24.00		-6.00		Pass
HT20	MCS0	2	44	5220	0.10	0.10	16.60	17.13	19.88	24.00		-6.00		Pass
HT20	MCS0	2	48	5240	0.10	0.10	17.09	16.62	19.87	24.00		-6.00		Pass
HT40	MCS0	2	38	5190	0.16	0.16	10.20	9.67	12.96	24.00		-6.00		Pass
HT40	MCS0	2	46	5230	0.16	0.16	14.69	15.57	18.17	24.00		-6.00		Pass
VHT20	MCS0	2	36	5180	0.05	0.08	15.77	15.11	18.46	24.00		-6.00		Pass
VHT20	MCS0	2	44	5220	0.05	0.08	16.22	16.74	19.50	24.00		-6.00		Pass
VHT20	MCS0	2	48	5240	0.05	0.08	16.57	16.21	19.40	24.00		-6.00		Pass
VHT40	MCS0	2	38	5190	0.16	0.16	10.26	9.71	13.00	24.00		-6.00		Pass
VHT40	MCS0	2	46	5230	0.16	0.16	16.15	16.07	19.12	24.00		-6.00		Pass
VHT80	MCS0	2	42	5210	0.31	0.31	9.86	2.13	10.54	24.00		-6.00		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail	
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	5180	0.09	0.06			7.43		11.00			-6.00	Pass
11a	6Mbps	2	44	5220	0.09	0.06			8.69		11.00			-6.00	Pass
11a	6Mbps	2	48	5240	0.09	0.06			8.76		11.00			-6.00	Pass
HT20	MCS0	2	36	5180	0.10	0.10			6.94		11.00			-6.00	Pass
HT20	MCS0	2	44	5220	0.10	0.10			8.02		11.00			-6.00	Pass
HT20	MCS0	2	48	5240	0.10	0.10			8.09		11.00			-6.00	Pass
VHT40	MCS0	2	38	5190	0.16	0.16			-1.38		11.00			-6.00	Pass
VHT40	MCS0	2	46	5230	0.16	0.16			4.20		11.00			-6.00	Pass
VHT80	MCS0	2	42	5210	0.31	0.31			-4.89		11.00			-6.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	52	5260	17.63	17.88	24.13	25.87
11a	6Mbps	2	60	5300	17.68	17.73	24.98	25.92
11a	6Mbps	2	64	5320	17.63	17.73	25.28	25.57
HT20	MCS0	2	52	5260	18.73	18.98	25.18	26.82
HT20	MCS0	2	60	5300	18.73	18.93	25.62	26.32
HT20	MCS0	2	64	5320	18.73	18.93	25.23	25.43
VHT40	MCS0	2	54	5270	36.46	36.56	41.72	41.72
VHT40	MCS0	2	62	5310	36.46	36.36	41.18	41.45
VHT80	MCS0	2	58	5290	75.76	75.52	83.60	82.32

TEST RESULTS DATA
Average Power Table

FCC Band II															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	0.09	0.06	17.36	17.02	20.20	23.98		-6.00	26.99	Pass	
11a	6Mbps	2	60	5300	0.09	0.06	17.43	16.77	20.12	23.98		-6.00	26.99	Pass	
11a	6Mbps	2	64	5320	0.09	0.06	17.82	16.21	20.10	23.98		-6.00	26.99	Pass	
HT20	MCS0	2	52	5260	0.10	0.10	16.96	16.44	19.72	23.98		-6.00	26.99	Pass	
HT20	MCS0	2	60	5300	0.10	0.10	17.23	16.68	19.97	23.98		-6.00	26.99	Pass	
HT20	MCS0	2	64	5320	0.10	0.10	17.69	16.13	19.99	23.98		-6.00	26.99	Pass	
HT40	MCS0	2	54	5270	0.16	0.16	14.77	15.11	17.96	23.98		-6.00	26.99	Pass	
HT40	MCS0	2	62	5310	0.16	0.16	10.70	9.78	13.28	23.98		-6.00	26.99	Pass	
VHT20	MCS0	2	52	5260	0.05	0.08	16.54	15.97	19.27	23.98		-6.00	26.99	Pass	
VHT20	MCS0	2	60	5300	0.05	0.08	16.64	16.60	19.63	23.98		-6.00	26.99	Pass	
VHT20	MCS0	2	64	5320	0.05	0.08	17.00	15.85	19.47	23.98		-6.00	26.99	Pass	
VHT40	MCS0	2	54	5270	0.16	0.16	15.71	15.60	18.66	23.98		-6.00	26.99	Pass	
VHT40	MCS0	2	62	5310	0.16	0.16	10.67	9.87	13.29	23.98		-6.00	26.99	Pass	
VHT80	MCS0	2	58	5290	0.31	0.31	10.88	3.32	11.59	23.98		-6.00	26.99	Pass	

TEST RESULTS DATA
Power Spectral Density

Band II														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	0.09	0.06			8.60		11.00			Pass
11a	6Mbps	2	60	5300	0.09	0.06			8.69		11.00			Pass
11a	6Mbps	2	64	5320	0.09	0.06			8.62		11.00			Pass
HT20	MCS0	2	52	5260	0.10	0.10			7.94		11.00			Pass
HT20	MCS0	2	60	5300	0.10	0.10			8.46		11.00			Pass
HT20	MCS0	2	64	5320	0.10	0.10			8.30		11.00			Pass
VHT40	MCS0	2	54	5270	0.16	0.16			4.10		11.00			Pass
VHT40	MCS0	2	62	5310	0.16	0.16			-1.37		11.00			Pass
VHT80	MCS0	2	58	5290	0.31	0.31			-3.78		11.00			Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	100	5500	17.63	17.68	24.68	24.88
11a	6Mbps	2	116	5580	17.68	17.58	24.63	24.93
11a	6Mbps	2	140	5700	17.63	17.68	24.88	25.18
HT20	MCS0	2	100	5500	18.78	18.88	25.33	25.48
HT20	MCS0	2	116	5580	18.83	18.78	25.18	25.18
HT20	MCS0	2	140	5700	18.58	18.63	25.18	24.18
VHT40	MCS0	2	102	5510	36.56	36.46	41.81	41.81
VHT40	MCS0	2	110	5550	36.56	36.46	41.81	41.63
VHT40	MCS0	2	134	5670	36.56	36.46	41.90	41.72
VHT80	MCS0	2	106	5530	75.64	75.40	83.12	82.96

TEST RESULTS DATA
Average Power Table

FCC Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	0.09	0.06	16.29	16.21	19.26	23.98		-6.00	26.99	Pass	
11a	6Mbps	2	116	5580	0.09	0.06	17.10	16.08	19.63	23.98		-6.00	26.99	Pass	
11a	6Mbps	2	140	5700	0.09	0.06	17.11	16.37	19.77	23.98		-6.00	26.99	Pass	
HT20	MCS0	2	100	5500	0.10	0.10	15.92	16.07	19.00	23.98		-6.00	26.99	Pass	
HT20	MCS0	2	116	5580	0.10	0.10	16.86	15.95	19.44	23.98		-6.00	26.99	Pass	
HT20	MCS0	2	140	5700	0.10	0.10	14.64	14.35	17.50	23.98		-6.00	26.99	Pass	
HT40	MCS0	2	102	5510	0.16	0.16	12.12	12.28	15.21	23.98		-6.00	26.99	Pass	
HT40	MCS0	2	110	5550	0.16	0.16	15.67	14.55	18.16	23.98		-6.00	26.99	Pass	
HT40	MCS0	2	134	5670	0.16	0.16	15.32	15.13	18.24	23.98		-6.00	26.99	Pass	
VHT20	MCS0	2	100	5500	0.05	0.08	16.01	15.94	18.98	23.98		-6.00	26.99	Pass	
VHT20	MCS0	2	116	5580	0.05	0.08	16.81	15.75	19.32	23.98		-6.00	26.99	Pass	
VHT20	MCS0	2	140	5700	0.05	0.08	14.57	14.32	17.46	23.98		-6.00	26.99	Pass	
VHT40	MCS0	2	102	5510	0.16	0.16	12.17	12.29	15.24	23.98		-6.00	26.99	Pass	
VHT40	MCS0	2	110	5550	0.16	0.16	16.58	15.52	19.09	23.98		-6.00	26.99	Pass	
VHT40	MCS0	2	134	5670	0.16	0.16	16.18	16.18	19.19	23.98		-6.00	26.99	Pass	
VHT80	MCS0	2	106	5530	0.31	0.31	10.47	2.74	11.15	23.98		-6.00	26.99	Pass	


TEST RESULTS DATA
Power Spectral Density

Band III														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	0.09	0.06			8.03		11.00			Pass
11a	6Mbps	2	116	5580	0.09	0.06			7.98		11.00			Pass
11a	6Mbps	2	140	5700	0.09	0.06			8.32		11.00			Pass
HT20	MCS0	2	100	5500	0.10	0.10			7.56		11.00			Pass
HT20	MCS0	2	116	5580	0.10	0.10			7.52		11.00			Pass
HT20	MCS0	2	140	5700	0.10	0.10			6.08		11.00			Pass
VHT40	MCS0	2	102	5510	0.16	0.16			0.81		11.00			Pass
VHT40	MCS0	2	110	5550	0.16	0.16			4.97		11.00			Pass
VHT40	MCS0	2	134	5670	0.16	0.16			4.86		11.00			Pass
VHT80	MCS0	2	106	5530	0.31	0.31			-4.19		11.00			Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line

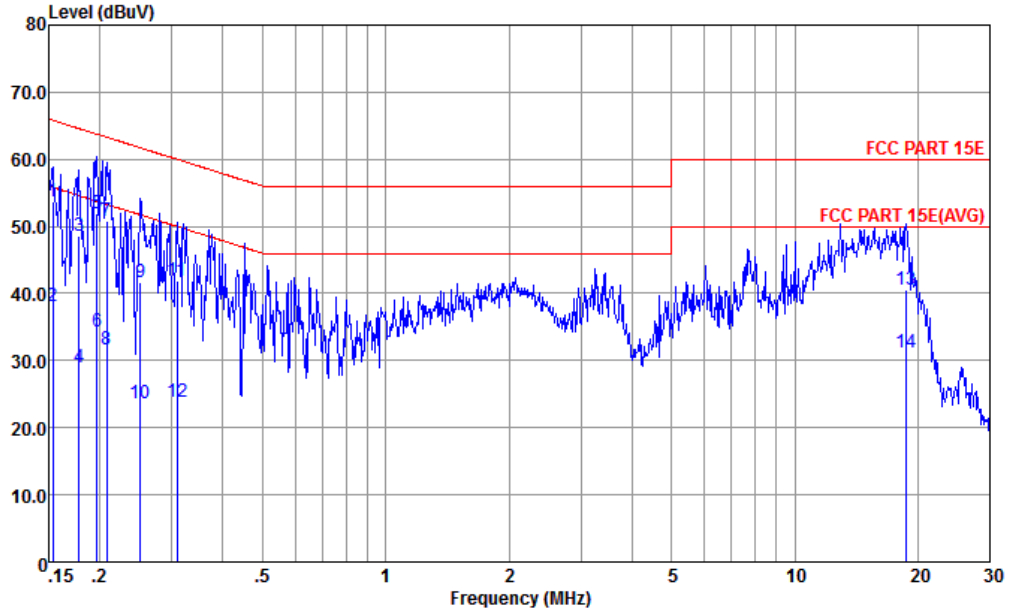


Site : CO01-KS
 Condition : FCC PART 15E LISN-L-191028-060105 LINE

: 353617110020330/353617110020348 #23

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	53.80	-12.02	65.82	43.30	0.03	10.47	QP
2	0.153	38.00	-17.82	55.82	27.50	0.03	10.47	Average
3	0.178	48.65	-15.94	64.59	38.20	0.04	10.41	QP
4	0.178	29.05	-25.54	54.59	18.60	0.04	10.41	Average
5 *	0.197	51.91	-11.85	63.76	41.50	0.04	10.37	QP
6	0.197	34.31	-19.45	53.76	23.90	0.04	10.37	Average
7	0.208	50.70	-12.57	63.27	40.30	0.04	10.36	QP
8	0.208	31.60	-21.67	53.27	21.20	0.04	10.36	Average
9	0.251	41.58	-20.15	61.73	31.21	0.04	10.33	QP
10	0.251	23.68	-28.05	51.73	13.31	0.04	10.33	Average
11	0.308	41.95	-18.07	60.02	31.60	0.05	10.30	QP
12	0.308	23.95	-26.07	50.02	13.60	0.05	10.30	Average
13	18.721	40.55	-19.45	60.00	29.50	0.58	10.47	QP
14	18.721	31.25	-18.75	50.00	20.20	0.58	10.47	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

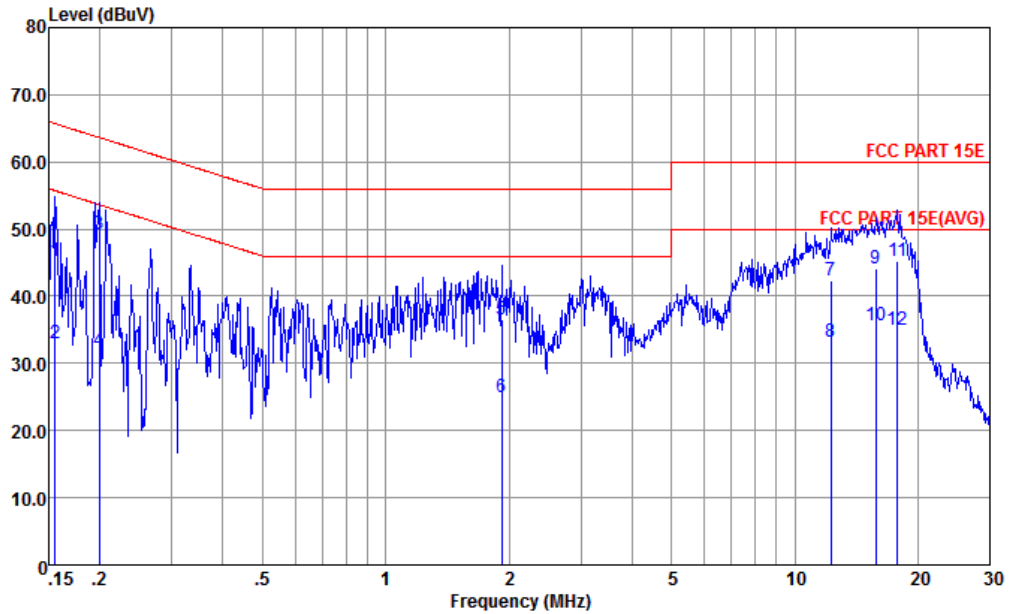

Site : CO01-KS
 Condition : FCC PART 15E LISN-N-191028-060105 NEUTRAL

: 353617110020330/353617110020348 #23

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	45.15	-20.54	65.69	34.60	0.08	10.47	QP
2	0.156	33.05	-22.64	55.69	22.50	0.08	10.47	Average
3	0.200	49.35	-14.27	63.62	38.91	0.08	10.36	QP
4	0.200	31.94	-21.68	53.62	21.50	0.08	10.36	Average
5	1.918	36.56	-19.44	56.00	26.20	0.13	10.23	QP
6	1.918	24.96	-21.04	46.00	14.60	0.13	10.23	Average
7	12.253	42.28	-17.72	60.00	31.60	0.31	10.37	QP
8	12.253	33.28	-16.72	50.00	22.60	0.31	10.37	Average
9	15.801	44.04	-15.96	60.00	33.21	0.42	10.41	QP
10 *	15.801	35.74	-14.26	50.00	24.91	0.42	10.41	Average
11	17.849	45.18	-14.82	60.00	34.20	0.53	10.45	QP
12	17.849	34.94	-15.06	50.00	23.96	0.53	10.45	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.28	62.29	-11.71	74	48.4	34.07	10.43	30.61	215	182	P	H
		5149.98	50.79	-3.21	54	36.9	34.07	10.43	30.61	215	182	A	H
	*	5182	108.67	-	-	94.69	34.12	10.48	30.62	215	182	P	H
		5182	101.91	-	-	87.93	34.12	10.48	30.62	215	182	A	H
		5149.12	57.79	-16.21	74	43.9	34.07	10.43	30.61	387	168	P	V
		5149.76	48.06	-5.94	54	34.17	34.07	10.43	30.61	387	168	A	V
	*	5176	106.55	-	-	92.57	34.12	10.48	30.62	387	168	P	V
		5176	99.62	-	-	85.64	34.12	10.48	30.62	387	168	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	46.38	-21.92	68.3	54.77	37.02	15.27	60.68	300	0	P	H
		10360	43.28	-25.02	68.3	51.67	37.02	15.27	60.68	300	360	P	V
802.11a CH 44 5220MHz		10440	48.83	-19.47	68.3	57.11	37.06	15.32	60.66	300	360	P	H
		10440	46.18	-22.12	68.3	54.46	37.06	15.32	60.66	100	360	P	V
802.11a CH 48 5240MHz		10480	48.67	-19.63	68.3	56.87	37.09	15.36	60.65	100	360	P	H
		10480	44.33	-23.97	68.3	52.53	37.09	15.36	60.65	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 36 5180MHz and a Remark section.



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10358.36	43.06	-25.24	68.3	51.48	37.01	15.25	60.68	100	360	P	H
CH 36 5180MHz		10358.36	41.87	-26.43	68.3	50.29	37.01	15.25	60.68	100	360	P	V
802.11n HT20		10438.44	47.99	-20.31	68.3	56.27	37.06	15.32	60.66	100	360	P	H
CH 44 5220MHz		10438.44	43.05	-25.25	68.3	51.33	37.06	15.32	60.66	100	360	P	V
802.11n HT20		10478.47	46.63	-21.67	68.3	54.83	37.09	15.36	60.65	100	360	P	H
CH 48 5240MHz		10478.47	42.77	-25.53	68.3	50.97	37.09	15.36	60.65	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz		5150.08	60.27	-8.03	68.3	46.38	34.07	10.43	30.61	100	202	P	H
		5149.76	50.64	-3.36	54	36.75	34.07	10.43	30.61	100	202	A	H
	*	5194	100.47	-	-	86.45	34.14	10.51	30.63	100	202	P	H
		5194	92.67	-	-	78.65	34.14	10.51	30.63	100	202	A	H
		5396.94	54.26	-19.74	74	39.78	34.4	10.77	30.69	100	202	P	H
		5378.76	45.07	-8.93	54	30.63	34.38	10.75	30.69	100	202	A	H
		5148.32	58.29	-15.71	74	44.4	34.07	10.43	30.61	384	171	P	V
		5148.64	48.62	-5.38	54	34.73	34.07	10.43	30.61	384	171	A	V
	*	5188	97.72	-	-	83.74	34.12	10.48	30.62	384	171	P	V
		5188	90.08	-	-	76.1	34.12	10.48	30.62	384	171	A	V
		5381.64	53.86	-20.14	74	39.42	34.38	10.75	30.69	384	171	P	V
		5382.9	44.94	-9.06	54	30.5	34.38	10.75	30.69	384	171	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		10378.38	41.01	-27.29	68.3	49.37	37.03	15.28	60.67	100	360	P	H
CH 38 5190MHz		10378.38	41.77	-26.53	68.3	50.13	37.03	15.28	60.67	100	360	P	V
802.11ac VHT40		10458.46	42.9	-25.4	68.3	51.16	37.07	15.33	60.66	100	360	P	H
CH 46 5230MHz		10458.46	41.42	-26.88	68.3	49.68	37.07	15.33	60.66	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11ac VHT80 CH 42 5210MHz and a Remark section.



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10418.42	41.85	-26.45	68.3	50.16	37.05	15.31	60.67	100	360	P	H
CH 42 5210MHz		10418.42	42.44	-25.86	68.3	50.75	37.05	15.31	60.67	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 64 5320MHz	*	5320	109.62	-	-	95.34	34.29	10.66	30.67	100	189	P	H
		5320	102.18	-	-	87.9	34.29	10.66	30.67	100	189	A	H
		5351.1	58.76	-15.24	74	44.4	34.33	10.71	30.68	100	189	P	H
		5350	49.28	-4.72	54	34.92	34.33	10.71	30.68	100	189	A	H
	*	5326	108.96	-	-	94.68	34.29	10.66	30.67	385	167	P	V
		5326	102.14	-	-	87.86	34.29	10.66	30.67	385	167	A	V
		5354.2	56.28	-17.72	74	41.92	34.33	10.71	30.68	385	167	P	V
		5350	47.9	-6.1	54	33.54	34.33	10.71	30.68	385	167	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	43.94	-24.36	68.3	52.09	37.11	15.39	60.65	100	0	P	H
		10520	43.11	-25.19	68.3	51.26	37.11	15.39	60.65	300	0	P	V
802.11a CH 60 5300MHz		10600	48.17	-25.83	74	56.19	37.16	15.45	60.63	300	360	P	H
		10600	45.7	-28.3	74	53.72	37.16	15.45	60.63	100	0	P	V
802.11a CH 64 5320MHz		10645	47.03	-26.97	74	54.99	37.18	15.48	60.62	300	0	P	H
		10640	44.74	-29.26	74	52.7	37.18	15.48	60.62	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz	*	5326	108.7	-	-	94.42	34.29	10.66	30.67	100	200	P	H
		5326	101.44	-	-	87.16	34.29	10.66	30.67	100	200	A	H
		5354.5	59.36	-14.64	74	45	34.33	10.71	30.68	100	200	P	H
		5350	48.72	-5.28	54	34.36	34.33	10.71	30.68	100	200	A	H
	*	5320	109.16	-	-	94.88	34.29	10.66	30.67	238	174	P	V
		5320	101.97	-	-	87.69	34.29	10.66	30.67	238	174	A	V
		5357.2	57.13	-16.87	74	42.77	34.33	10.71	30.68	238	174	P	V
		5358.5	47.62	-6.38	54	33.26	34.33	10.71	30.68	238	174	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for channels 52, 60, and 64 at various frequencies.



Band 2 5250~5350MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11ac VHT40 CH 62 5310MHz and a Remark section.



Band 2 5250~5350MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ac VHT40 CH 54 5270MHz and CH 62 5310MHz, plus a Remark section.



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ac VHT80 CH 58 5290MHz and a Remark section.



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10578.58	41.29	-27.01	68.3	49.35	37.14	15.43	60.63	100	360	P	H
CH 58 5290MHz		10578.58	42.36	-25.94	68.3	50.42	37.14	15.43	60.63	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5459.6	56.99	-17.01	74	42.48	34.46	10.77	30.72	197	201	P	H
		5469.52	64.08	-4.22	68.3	49.55	34.48	10.77	30.72	197	201	P	H
		5459.92	47.62	-6.38	54	33.11	34.46	10.77	30.72	197	201	A	H
	*	5500	109.08	-	-	94.51	34.53	10.77	30.73	197	201	P	H
		5500	103.49	-	-	88.92	34.53	10.77	30.73	197	201	A	H
		5403.12	55.48	-18.52	74	41.01	34.4	10.77	30.7	294	155	P	V
		5469.2	62.97	-5.33	68.3	48.44	34.48	10.77	30.72	294	155	P	V
		5459.92	47	-7	54	32.49	34.46	10.77	30.72	294	155	A	V
	*	5500	109.68	-	-	95.11	34.53	10.77	30.73	294	155	P	V
		5500	103.21	-	-	88.64	34.53	10.77	30.73	294	155	A	V
802.11a CH 140 5700MHz	*	5698	111.26	-	-	96.52	34.75	10.79	30.8	100	110	P	H
		5698	103.68	-	-	88.94	34.75	10.79	30.8	100	110	A	H
		5725.16	63.64	-4.66	68.3	48.88	34.78	10.8	30.82	100	110	P	H
	*	5698	113.18	-	-	98.44	34.75	10.79	30.8	228	177	P	V
		5698	106.64	-	-	91.9	34.75	10.79	30.8	228	177	A	V
		5726.84	65.1	-3.2	68.3	50.34	34.78	10.8	30.82	228	177	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	46.66	-27.34	74	54.04	37.4	15.76	60.54	300	0	P	H
		11000	45.55	-28.45	74	52.93	37.4	15.76	60.54	100	0	P	V
802.11a CH 116 5580MHz		11160	47.36	-26.64	74	54.48	37.5	15.88	60.5	100	0	P	H
		11160	44.91	-29.09	74	52.03	37.5	15.88	60.5	300	0	P	V
802.11a CH 140 5700MHz		11400	47.45	-26.55	74	54.21	37.64	16.05	60.45	300	0	P	H
		11400	45.79	-28.21	74	52.55	37.64	16.05	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5459.44	60.37	-13.63	74	45.86	34.46	10.77	30.72	104	110	P	H
		5459.98	50.08	-3.92	54	35.57	34.46	10.77	30.72	104	110	A	H
		5469.36	64.75	-3.55	68.3	50.22	34.48	10.77	30.72	104	110	P	H
	*	5500	109.68	-	-	95.11	34.53	10.77	30.73	104	110	P	H
		5500	102.7	-	-	88.13	34.53	10.77	30.73	104	110	A	H
		5459.76	55.93	-18.07	74	41.42	34.46	10.77	30.72	379	154	P	V
		5459.98	47.07	-6.93	54	32.56	34.46	10.77	30.72	379	154	A	V
		5470	57.54	-10.76	68.3	43.01	34.48	10.77	30.72	379	154	P	V
	*	5500	110.43	-	-	95.86	34.53	10.77	30.73	379	154	P	V
	5500	102.41	-	-	87.84	34.53	10.77	30.73	379	154	A	V	
802.11n HT20 CH 140 5700MHz	*	5704	108.19	-	-	93.44	34.76	10.8	30.81	100	109	P	H
		5704	100.89	-	-	86.14	34.76	10.8	30.81	100	109	A	H
		5725.08	61.64	-6.66	68.3	46.88	34.78	10.8	30.82	100	109	P	H
	*	5704	109.89	-	-	95.14	34.76	10.8	30.81	204	186	P	V
		5704	102.06	-	-	87.31	34.76	10.8	30.81	204	186	A	V
	5725.08	64.39	-3.91	68.3	49.63	34.78	10.8	30.82	204	186	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10999	44.25	-29.75	74	51.63	37.4	15.76	60.54	100	360	P	H
CH 100		10999	43.18	-30.82	74	50.56	37.4	15.76	60.54	100	360	P	V
5500MHz													
802.11n HT20		11159.16	43.47	-30.53	74	50.59	37.5	15.88	60.5	100	360	P	H
CH 116		11159.16	45.05	-28.95	74	52.17	37.5	15.88	60.5	100	360	P	V
5580MHz													
802.11n HT20		11399.39	43.64	-30.36	74	50.4	37.64	16.05	60.45	100	360	P	H
CH 140		11399.39	42.69	-31.31	74	49.45	37.64	16.05	60.45	100	360	P	V
5700MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 102 5510MHz		5459.44	57.34	-16.66	74	42.83	34.46	10.77	30.72	108	204	P	H
		5470	64.12	-4.18	68.3	49.59	34.48	10.77	30.72	108	204	P	H
		5459.98	48.9	-5.1	54	34.39	34.46	10.77	30.72	108	204	A	H
	*	5512	103.05	-	-	88.48	34.53	10.77	30.73	108	204	P	H
		5512	95.5	-	-	80.93	34.53	10.77	30.73	108	204	A	H
		5733.64	57.69	-10.61	68.3	42.93	34.78	10.8	30.82	108	204	P	H
		5388.56	54.9	-19.1	74	40.46	34.38	10.75	30.69	209	177	P	V
		5470	63.99	-4.31	68.3	49.46	34.48	10.77	30.72	209	177	P	V
		5458.96	46.04	-7.96	54	31.53	34.46	10.77	30.72	209	177	A	V
	*	5506	101.72	-	-	87.15	34.53	10.77	30.73	209	177	P	V
		5506	94.95	-	-	80.38	34.53	10.77	30.73	209	177	A	V
		5732.84	57.92	-10.38	68.3	43.16	34.78	10.8	30.82	209	177	P	V
802.11ac VHT40 CH 134 5670MHz		5446.96	56.15	-17.85	74	41.63	34.46	10.77	30.71	101	197	P	H
		5465.52	53.11	-15.19	68.3	38.58	34.48	10.77	30.72	101	197	P	H
		5447.28	49.61	-4.39	54	35.09	34.46	10.77	30.71	101	197	A	H
	*	5674	106.68	-	-	91.95	34.73	10.79	30.79	101	197	P	H
		5674	98.43	-	-	83.7	34.73	10.79	30.79	101	197	A	H
		5729.32	58.25	-10.05	68.3	43.49	34.78	10.8	30.82	101	197	P	H
		5447.44	57.72	-16.28	74	43.2	34.46	10.77	30.71	249	177	P	V
		5464.88	54.09	-14.21	68.3	39.56	34.48	10.77	30.72	249	177	P	V
		5447.28	50.98	-3.02	54	36.46	34.46	10.77	30.71	249	177	A	V
	*	5674	109.74	-	-	95.01	34.73	10.79	30.79	249	177	P	V
	5674	102.68	-	-	87.95	34.73	10.79	30.79	249	177	A	V	
	5732.36	61.87	-6.43	68.3	47.11	34.78	10.8	30.82	249	177	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include channels 102, 110, and 134 with their respective test results.



Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ac VHT80 CH 106 5530MHz and a Remark section.



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11059.05	42.17	-31.83	74	49.45	37.44	15.81	60.53	100	360	P	H
CH 106 5530MHz		11059.05	41.65	-32.35	74	48.93	37.44	15.81	60.53	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

WIFI 802.11ac VHT80 (LF @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 LF		34.85	19.18	-20.82	40	28.22	22.1	0.82	31.96	-	-	P	H
		60.07	13.11	-26.89	40	31.63	12.3	1.1	31.92	-	-	P	H
		159.01	23.11	-20.39	43.5	36.31	16.83	1.9	31.93	-	-	P	H
		240.49	26.68	-19.32	46	38.28	18.01	2.34	31.95	100	0	P	H
		307.42	22.41	-23.59	46	32.28	19.5	2.64	32.01	-	-	P	H
		976.72	29.84	-24.16	54	25.26	30.68	4.64	30.74	-	-	P	H
		36.79	20.54	-19.46	40	30.52	21.14	0.84	31.96	-	-	P	V
		40.67	19.5	-20.5	40	31.42	19.16	0.88	31.96	-	-	P	V
		158.04	23.44	-20.06	43.5	36.6	16.87	1.9	31.93	-	-	P	V
		236.61	25.96	-20.04	46	37.85	17.73	2.32	31.94	-	-	P	V
		844.8	28.1	-17.9	46	26.41	29.19	4.32	31.82	100	0	P	V
	983.51	29.31	-24.69	54	24.7	30.63	4.65	30.67	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For Co-location:

Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5380.24 to 5756.6 MHz.



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11059.05	41.76	-32.24	74	49.04	37.44	15.81	60.53	100	360	P	H
CH 106 5530MHz		11059.05	42.66	-31.34	74	49.94	37.44	15.81	60.53	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		2498.68	56.16	-17.84	74	48.65	31.89	7.18	31.56	333	204	P	H
		2483.5	46.43	-7.57	54	39.08	31.77	7.16	31.58	333	204	A	H
	*	2480	91.89	-	-	84.54	31.77	7.16	31.58	333	204	P	H
	*	2480	90.17	-	-	82.82	31.77	7.16	31.58	333	204	A	H
		2491.54	55.4	-18.6	74	47.89	31.89	7.18	31.56	250	310	P	V
		2492.86	46.22	-7.78	54	38.71	31.89	7.18	31.56	250	310	A	V
	*	2480	83.34	-	-	75.99	31.77	7.16	31.58	250	310	P	V
	*	2480	81.56	-	-	74.21	31.77	7.16	31.58	250	310	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4962	50.01	-23.99	74	66.04	33.85	10.13	60.01	243	182	P	H
		4962	45.75	-8.25	54	61.78	33.85	10.13	60.01	243	182	A	H
		7440	41.04	-32.96	74	52.63	36.11	12.84	60.54	100	0	P	H
		4960	42.6	-31.4	74	58.63	33.85	10.13	60.01	300	0	P	V
		7440	40.77	-33.23	74	52.36	36.11	12.84	60.54	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:


- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	98.62	-	-	10Hz
1+2	802.11n HT20	97.79	1.928	0.519	0.56kHz
1+2	802.11ac VHT40	96.49	0.957	1.045	1.1kHz
1+2	802.11ac VHT80	93.06	0.467	2.143	2.2kHz

802.11a

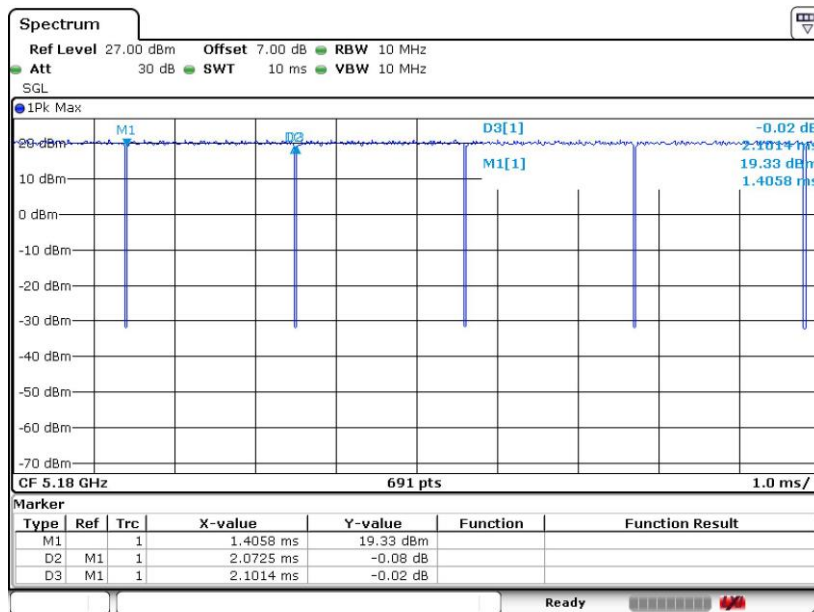




802.11n HT20

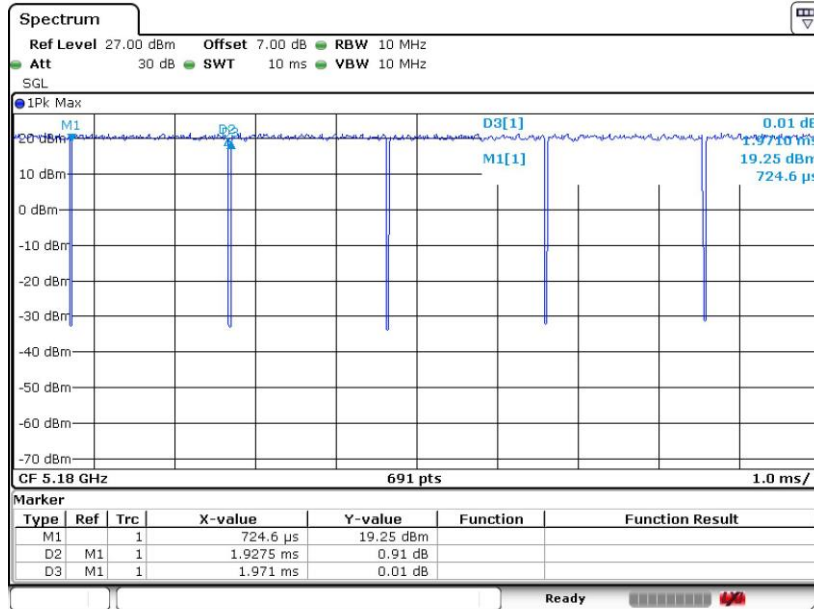

802.11ac VHT40

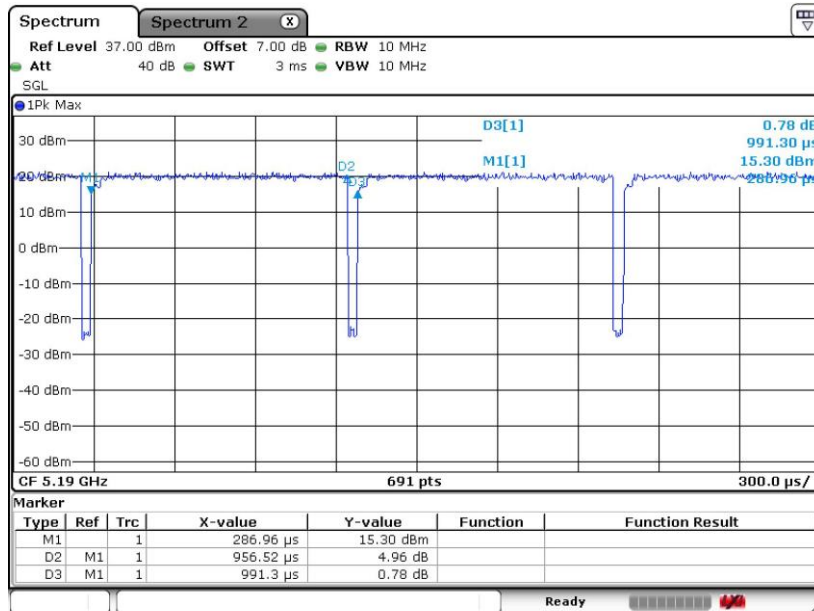



802.11ac VHT80

