



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2075-3
FCC ID : IHDT56ZC3
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DX) Low Power Communication Device Transmitter

The product was received on May 11, 2020 and testing was completed on May 27, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

TABLE OF CONTENTS2

REVISION HISTORY3

SUMMARY OF THE TEST RESULT4

1. GENERAL DESCRIPTION5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Specification of Accessory..... 6

 1.6 Modification of EUT 6

 1.7 Testing Location 7

 1.8 Test Software 7

 1.9 Applicable Standards..... 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST8

 2.1 Descriptions of Test Mode 8

 2.2 Connection Diagram of Test System 9

 2.3 Table for Supporting Units 10

 2.4 EUT Operation Test Setup 10

3. TEST RESULTS.....11

 3.1 AC Power Line Conducted Emissions Measurement 11

 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement..... 13

 3.3 Frequency Stability Measurement 14

 3.4 Field Strength of Fundamental Emissions and Mask Measurement..... 15

 3.5 Radiated Emissions Measurement 17

 3.6 Antenna Requirements..... 20

4. LIST OF MEASURING EQUIPMENT21

5. UNCERTAINTY OF EVALUATION22

APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

 B1. Test Result of 20dB Spectrum Bandwidth

 B2. Test Result of Frequency Stability

APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

 C1. Test Result of Field Strength of Fundamental Emissions

 C2. Results of Radiated Emissions (9 kHz~30MHz)

 C3. Results of Radiated Emissions (30MHz~1GHz)

APPENDIX D. SETUP PHOTOGRAPHS



SUMMARY OF THE TEST RESULT

| Report Section | FCC Rule | Description of Test | Result | Remark |
|----------------|--------------------|---|----------|--|
| 3.1 | 15.207 | AC Power Line Conducted Emissions | Complies | Under limit 12.75 dB at 0.203MHz |
| 3.2 | 15.215(c) | 20dB Spectrum Bandwidth | Complies | - |
| | - | 99% OBW Spectrum Bandwidth | Complies | - |
| 3.3 | 15.225(e) | Frequency Stability | Complies | - |
| 3.4 | 15.225(a)(b)(c) | Field Strength of Fundamental Emissions | Complies | Max level 58.07 dBµV/m at 13.560 MHz |
| 3.5 | 15.225(d) & 15.209 | Radiated Spurious Emissions | Complies | Under limit 3.24 dB at 40.670MHz |
| 3.6 | 15.203 | Antenna Requirements | Complies | - |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|--|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2075-3 |
| FCC ID | IHDT56ZC3 |
| EUT supports Radios application | CDMA/GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver/GNSS |
| IMEI Code | Conducted: N/A Conduction: 353617110020330/353617110020348 Radiation: 353617110020330/353617110020348 |
| HW Version | DVT2 |
| SW Version | QPN30.33-9 |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--------------------|
| Tx/Rx Frequency Range | 13.553 ~ 13.567MHz |
| Channel Number | 1 |
| 20dBW | 2.504 kHz |
| 99%OBW | 2.113 kHz |
| Antenna Type | FPC Antenna |
| Type of Modulation | ASK |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.5 Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------|---------------------|------------|-------------------|
| AC Adapter 1(US) | Brand Name | Motorola (Chenyang) | Model Name | MC-201 |
| AC Adapter 1(EU) | Brand Name | Motorola (Chenyang) | Model Name | MC-202 |
| AC Adapter 1(UK) | Brand Name | Motorola (Chenyang) | Model Name | MC-203 |
| AC Adapter 1(AU) | Brand Name | Motorola (Chenyang) | Model Name | MC-205 |
| AC Adapter 2(US) | Brand Name | Motorola (Acbel) | Model Name | MC-201 |
| AC Adapter 2(EU) | Brand Name | Motorola (Acbel) | Model Name | MC-202 |
| AC Adapter 2(UK) | Brand Name | Motorola (Acbel) | Model Name | MC-203 |
| AC Adapter 2(AU) | Brand Name | Motorola (Acbel) | Model Name | MC-205 |
| Battery | Brand Name | Motorola(Amperex) | Model Name | LZ50 |
| Earphone | Brand Name | Motorola(Lyand) | Model Name | MH191(SH38C81577) |
| USB Cable 1 | Brand Name | Motorola (Luxshare) | Model Name | SC18C24368 |
| USB Cable 2 | Brand Name | Motorola (Saibao) | Model Name | SC18C24367 |

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | | | |
|---------------------------|--|-----------|-------------|----------------------------|---------------------------------------|
| Test Site | Sporton International (Kunshan) Inc. | | | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | | | |
| Test Site No. | Sporton Site No. | | | FCC Designation No. | FCC Test Firm Registration No. |
| | TH01-KS | 03CH02-KS | CO01-KS | CN1257 | 314309 |
| Test Engineer | Orion LI | Carl NI | Amos Zhang | | |
| Temperature | 22~24°C | 21~22 | 24.2~25.6°C | | |
| Relative Humidity | 53~55% | 41~42 | 37~39% | | |

1.8 Test Software

| Item | Site | Manufacture | Name | Version |
|------|-----------|-------------|------|--------------|
| 1. | CO01-KS | AUDIX | E3 | 6.2009-8-24 |
| 2. | 03CH02-KS | AUDIX | E3 | 6.2009-8-24a |

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013



2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.


| Test Items | |
|-----------------------------------|---|
| AC Power Line Conducted Emissions | Field Strength of Fundamental Emissions |
| 20dB Spectrum Bandwidth | Frequency Stability |
| Radiated Emissions 9kHz~30MHz | Radiated Emissions 30MHz~1GHz |

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.


| Test Cases | |
|--|--|
| AC Conducted Emission | Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter 1) + Earphone + NFC tx |
| Remark: For Radiated Test Cases, The tests were performed with Adapter 1, Earphone, USB Cable1. | |

2.2 Connection Diagram of Test System

For Radiation

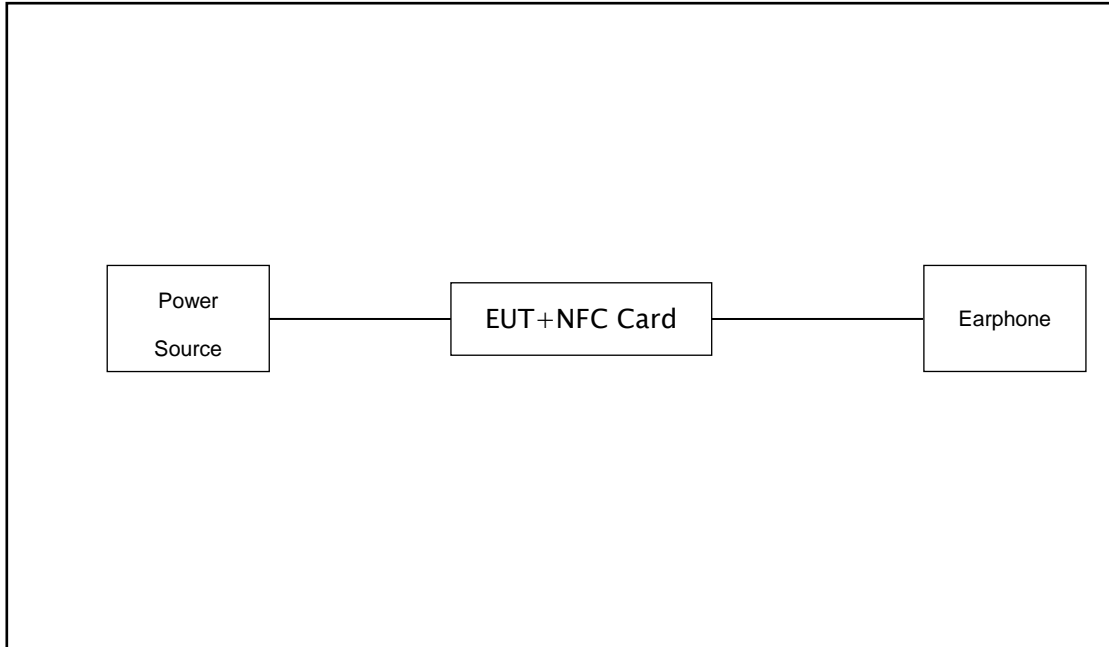

For Conducted Emission

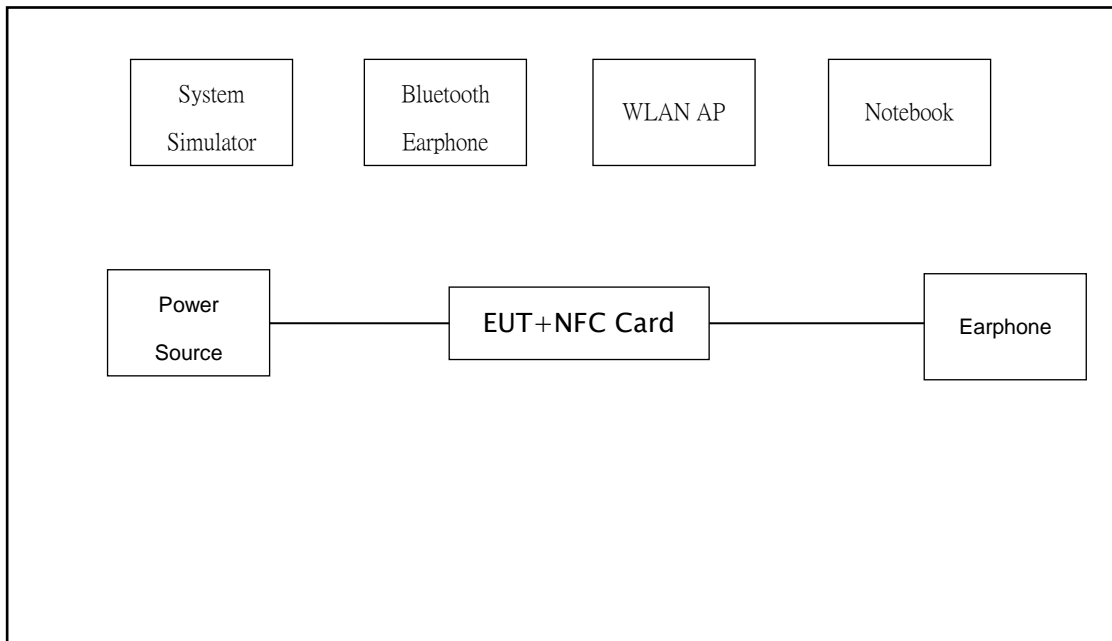



2.3 Table for Supporting Units

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|------------|------------|---------------|------------|--|
| 1. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8m |
| 2. | WLAN AP | D-link | DIR-655 | KA21R655B1 | N/A | Unshielded, 1.8m |
| 3. | Notebook | Lenovo | G480 | QDS-BRCM1050I | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |
| 4. | Bluetooth Earphone | Lenovo | LBH308 | N/A | N/A | N/A |
| 5. | NFC Card | N/A | N/A | N/A | N/A | N/A |

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|--------------------------------|------------------------------|-----------|
| | Quasi-Peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

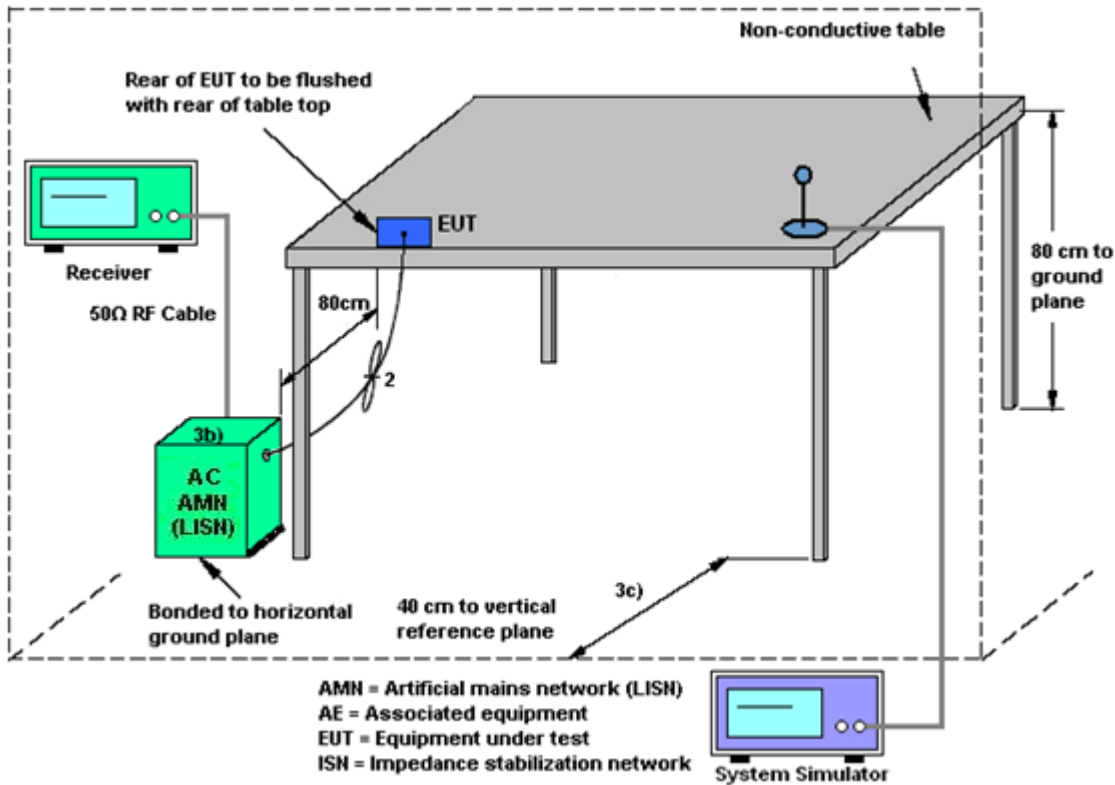

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

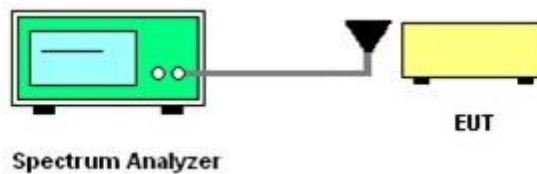

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

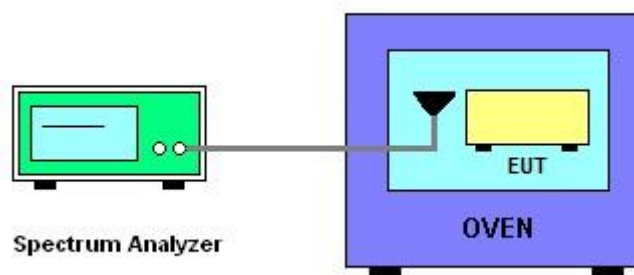

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

| Rules and specifications | FCC CFR 47 Part 15 section 15.225 | | | |
|--------------------------|---|--------------------------------|--------------------------------|-------------------------------|
| Description | Compliance with the spectrum mask is tested with RBW set to 9kHz. | | | |
| Freq. of Emission (MHz) | Field Strength (μV/m) at 30m | Field Strength (dBμV/m) at 30m | Field Strength (dBμV/m) at 10m | Field Strength (dBμV/m) at 3m |
| 1.705~13.110 | 30 | 29.5 | 48.58 | 69.5 |
| 13.110~13.410 | 106 | 40.5 | 59.58 | 80.5 |
| 13.410~13.553 | 334 | 50.5 | 69.58 | 90.5 |
| 13.553~13.567 | 15848 | 84.0 | 103.08 | 124.0 |
| 13.567~13.710 | 334 | 50.5 | 69.58 | 90.5 |
| 13.710~14.010 | 106 | 40.5 | 59.58 | 80.5 |
| 14.010~30.000 | 30 | 29.5 | 48.58 | 69.5 |

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

3.4.4 Test Setup

For radiated emissions below 30MHz

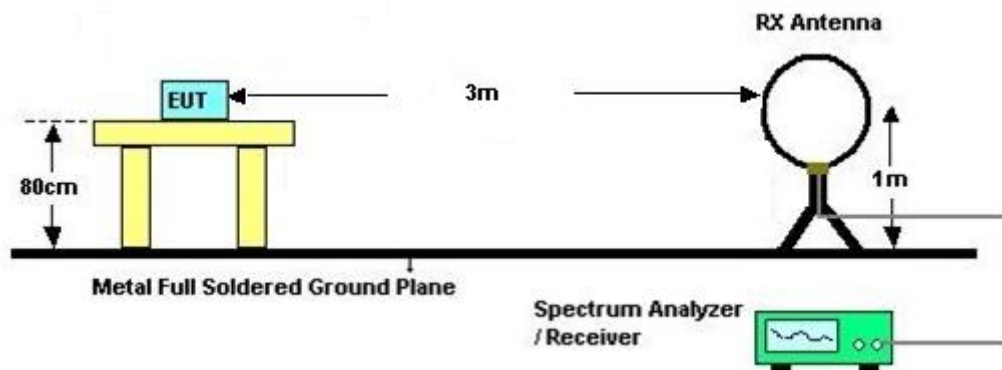

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

| Frequencies (MHz) | Field Strength (μ V/m) | Measurement Distance (meters) |
|----------------------|--------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

| Receiver Parameter | Setting |
|--------------------------------|---------------------|
| Attenuation | Auto |
| Frequency Range: 9kHz~150kHz | RBW 200Hz for QP |
| Frequency Range: 150kHz~30MHz | RBW 9kHz for QP |
| Frequency Range: 30MHz~1000MHz | RBW 120kHz for Peak |

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

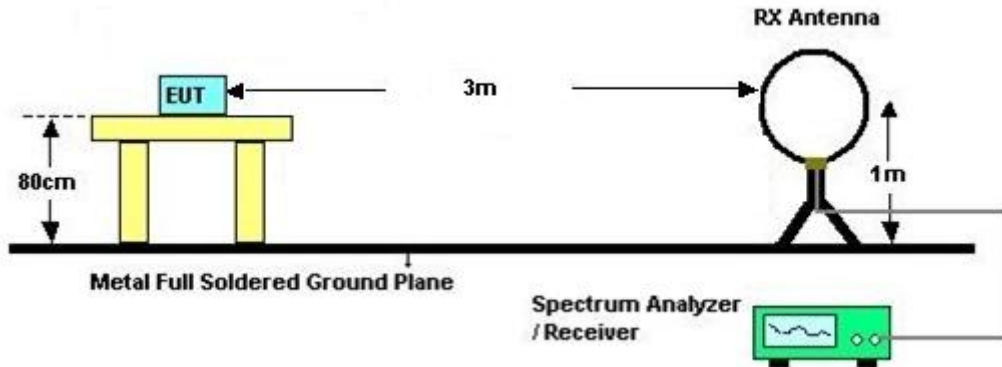

For radiated emissions above 30MHz

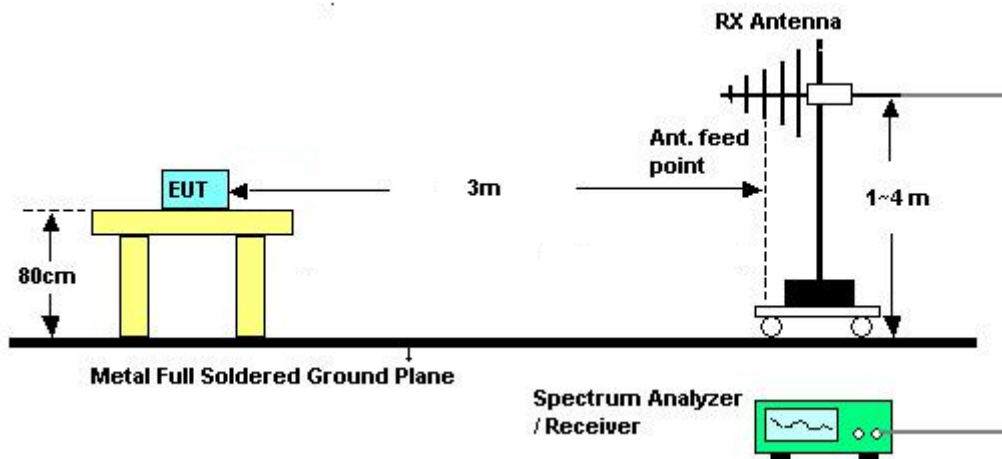

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Remark: There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.



3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|--------------|-----------|------------------|----------------------------|------------------|-------------------------------|---------------|-----------------------|
| Spectrum Analyzer | R&S | FSV40 | 101040 | 10Hz~40GHz | Nov. 02, 2019 | May 26, 2020~ May 27, 2020 | Nov. 01, 2020 | Conducted (TH01-KS) |
| Temperature & humidity chamber | Hongzhan | LP-150U | H2014011 440 | -40~+150°C 20%~95%RH | Jul. 04, 2019 | May 26, 2020~ May 27, 2020 | Jul. 03, 2020 | Conducted (TH01-KS) |
| AC Power Source | Chroma | 61602 | ABP00000 0811 | AC 0V~300V, 45Hz~1000Hz | Oct. 18, 2019 | May 26, 2020~ May 27, 2020 | Oct. 17, 2020 | Conducted (TH01-KS) |
| EMI Receiver | R&S | ESCI7 | 100768 | 9kHz~7GHz; | Apr. 14, 2020 | May 16, 2020 | Apr. 13, 2021 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 18, 2019 | May 16, 2020 | Oct. 17, 2020 | Conduction (CO01-KS) |
| AC LISN | MessTec | AN3016 | 060105 | 9kHz~30MHz | Oct. 28, 2019 | May 16, 2020 | Oct. 27, 2020 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP00000 0811 | AC 0V~300V, 45Hz~1000Hz | Oct. 18, 2019 | May 16, 2020 | Oct. 17, 2020 | Conduction (CO01-KS) |
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz;Ma x 30dBm | Oct. 18, 2019 | May 27, 2020 | Oct. 17, 2020 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY553705 28 | 10Hz~44G,MAX 30dB | Oct. 18, 2019 | May 27, 2020 | Oct. 17, 2020 | Radiation (03CH02-KS) |
| Loop Antenna | R&S | HFH2-Z2 | 100321 | 9kHz~30MHz | Nov. 10, 2019 | May 27, 2020 | Nov. 09, 2020 | Radiation (03CH02-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 44483 | 30MHz~1GHz | Dec. 30, 2019 | May 27, 2020 | Dec. 29, 2020 | Radiation (03CH02-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz~1GHz | Aug. 06, 2019 | May 27, 2020 | Aug. 05, 2020 | Radiation (03CH02-KS) |
| AC Power Source | Chroma | 61601 | 616010002 473 | N/A | NCR | May 27, 2020 | NCR | Radiation (03CH02-KS) |
| Turn Table | MF | MF7802 | N/A | 0~360 degree | NCR | May 27, 2020 | NCR | Radiation (03CH02-KS) |
| Antenna Mast | MF | MF7802 | N/A | 1 m~4 m | NCR | May 27, 2020 | NCR | Radiation (03CH02-KS) |

NCR: No Calibration Required



5. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.9dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5dB |
|---|-------|


Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5dB |
|---|-------|



Appendix A. Test Results of Conducted Emission Test

| | | | |
|-----------------|---------------|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 24.2~25.6°C |
| | | Relative Humidity : | 37~39% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |

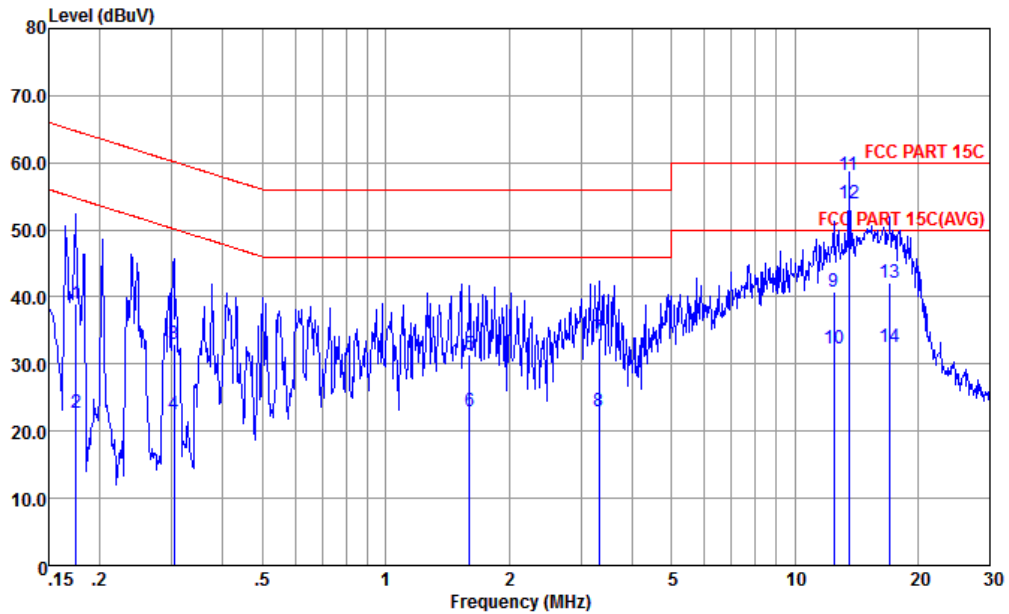

Site : CO01-KS
Condition : FCC PART 15C LISN-L-191028-060105 LINE


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|------|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.175 | 39.05 | -25.67 | 64.72 | 28.59 | 0.04 | 10.42 | QP |
| 2 | 0.175 | 22.75 | -31.97 | 54.72 | 12.29 | 0.04 | 10.42 | Average |
| 3 | 0.303 | 32.95 | -27.20 | 60.15 | 22.59 | 0.05 | 10.31 | QP |
| 4 | 0.303 | 22.55 | -27.60 | 50.15 | 12.19 | 0.05 | 10.31 | Average |
| 5 | 1.602 | 31.53 | -24.47 | 56.00 | 21.20 | 0.10 | 10.23 | QP |
| 6 | 1.602 | 22.93 | -23.07 | 46.00 | 12.60 | 0.10 | 10.23 | Average |
| 7 | 3.328 | 33.97 | -22.03 | 56.00 | 23.59 | 0.13 | 10.25 | QP |
| 8 | 3.328 | 22.87 | -23.13 | 46.00 | 12.49 | 0.13 | 10.25 | Average |
| 9 | 12.449 | 40.89 | -19.11 | 60.00 | 30.20 | 0.32 | 10.37 | QP |
| 10 | 12.449 | 32.29 | -17.71 | 50.00 | 21.60 | 0.32 | 10.37 | Average |
| 11 | 13.560 | 58.13 | -1.87 | 60.00 | 47.41 | 0.34 | 10.38 | QP |
| 12 * | 13.560 | 53.93 | 3.93 | 50.00 | 43.21 | 0.34 | 10.38 | Average |
| 13 | 17.109 | 42.14 | -17.86 | 60.00 | 31.20 | 0.50 | 10.44 | QP |
| 14 | 17.109 | 32.54 | -17.46 | 50.00 | 21.60 | 0.50 | 10.44 | Average |

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



| | | | |
|-----------------|---------------|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 24.2~25.6°C |
| | | Relative Humidity : | 37~39% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |

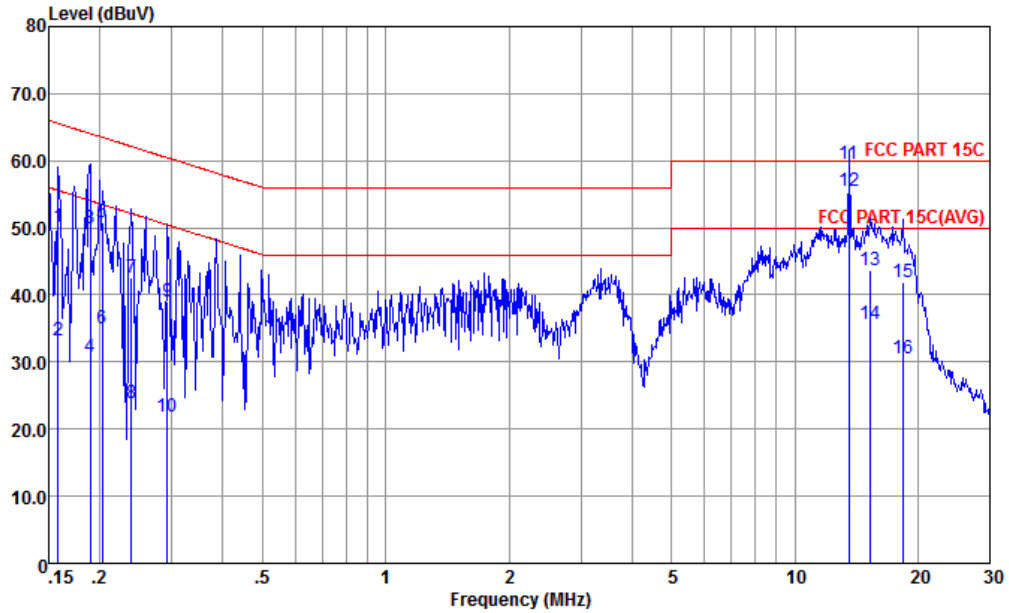

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-191028-060105 NEUTRAL


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|------|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.158 | 50.14 | -15.42 | 65.56 | 39.60 | 0.08 | 10.46 | QP |
| 2 | 0.158 | 33.14 | -22.42 | 55.56 | 22.60 | 0.08 | 10.46 | Average |
| 3 | 0.189 | 49.96 | -14.10 | 64.06 | 39.50 | 0.08 | 10.38 | QP |
| 4 | 0.189 | 30.66 | -23.40 | 54.06 | 20.20 | 0.08 | 10.38 | Average |
| 5 | 0.203 | 50.74 | -12.75 | 63.49 | 40.30 | 0.08 | 10.36 | QP |
| 6 | 0.203 | 35.04 | -18.45 | 53.49 | 24.60 | 0.08 | 10.36 | Average |
| 7 | 0.239 | 42.62 | -19.51 | 62.13 | 32.20 | 0.08 | 10.34 | QP |
| 8 | 0.239 | 23.92 | -28.21 | 52.13 | 13.50 | 0.08 | 10.34 | Average |
| 9 | 0.292 | 39.00 | -21.46 | 60.46 | 28.60 | 0.09 | 10.31 | QP |
| 10 | 0.292 | 21.90 | -28.56 | 50.46 | 11.50 | 0.09 | 10.31 | Average |
| 11 | 13.560 | 59.43 | -0.57 | 60.00 | 48.70 | 0.35 | 10.38 | QP |
| 12 * | 13.560 | 55.43 | 5.43 | 50.00 | 44.70 | 0.35 | 10.38 | Average |
| 13 | 15.307 | 43.70 | -16.30 | 60.00 | 32.91 | 0.39 | 10.40 | QP |
| 14 | 15.307 | 35.70 | -14.30 | 50.00 | 24.91 | 0.39 | 10.40 | Average |
| 15 | 18.328 | 41.91 | -18.09 | 60.00 | 30.90 | 0.55 | 10.46 | QP |
| 16 | 18.328 | 30.61 | -19.39 | 50.00 | 19.60 | 0.55 | 10.46 | Average |

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



| | | | |
|-----------------|---------------|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 24.2~25.6°C |
| | | Relative Humidity : | 37~39% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |

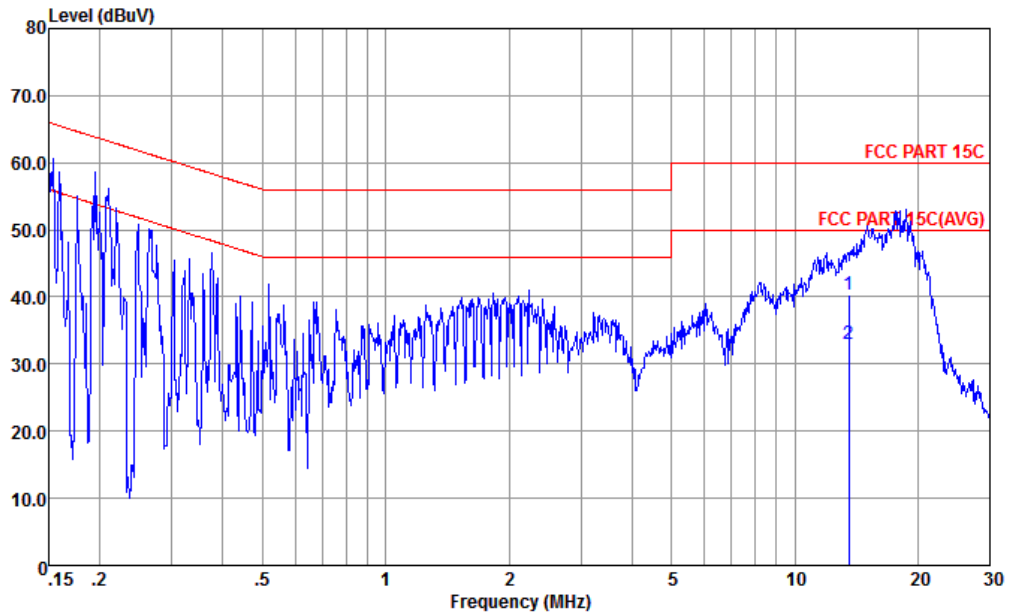

Site : CO01-KS
 Condition : FCC PART 15C LISN-L-191028-060105 LINE


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|------|-------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 13.560 | 40.43 | -19.57 | 60.00 | 29.71 | 0.34 | 10.38 | QP |
| 2 * | 13.560 | 32.93 | -17.07 | 50.00 | 22.21 | 0.34 | 10.38 | Average |

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.



| | | | |
|-----------------|---------------|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 24.2~25.6°C |
| | | Relative Humidity : | 37~39% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |

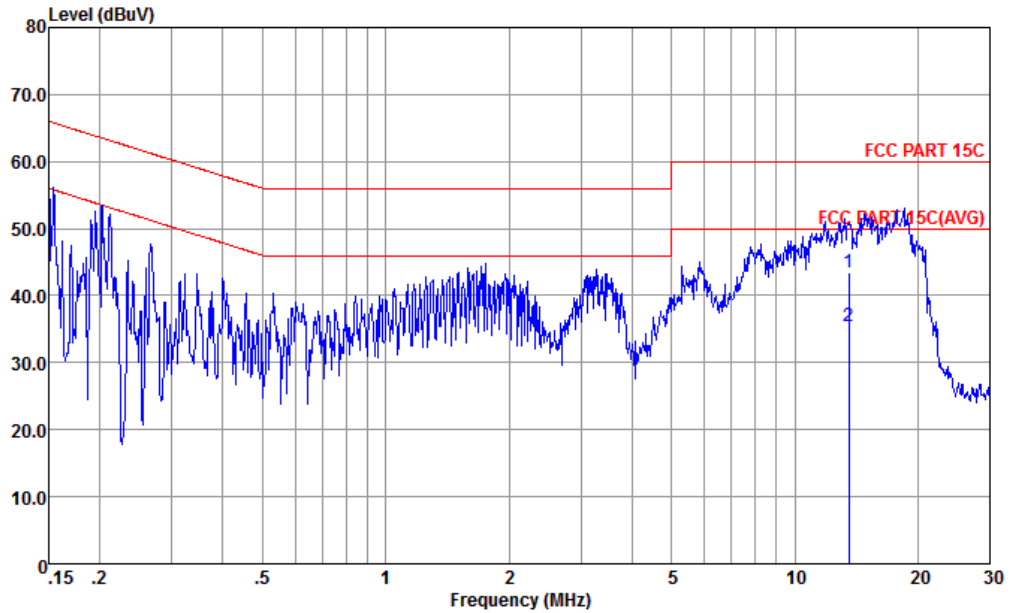

Site : CO01-KS
Condition : FCC PART 15C LISN-N-191028-060105 NEUTRAL

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|------|-------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 13.560 | 43.53 | -16.47 | 60.00 | 32.80 | 0.35 | 10.38 | QP |
| 2 * | 13.560 | 35.53 | -14.47 | 50.00 | 24.80 | 0.35 | 10.38 | Average |

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

| Test mode | NFC Tx | Test Frequency (MHz) | 13.56 |
|------------------------------|----------------|----------------------------|--------------------|
| | | | |
| 20dB Bandwidth (kHz) | 2.504 | 99% OccupiedBW(kHz) | 2.113 |
| Frequency range (MHz) | $f_L > 13.553$ | 13.558712 | Test Result |
| | $f_H < 13.567$ | 13.561216 | Complies |

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.



B2. Test Result of Frequency Stability

| Voltage vs. Frequency Stability | | Temperature vs. Frequency Stability | |
|---------------------------------|-----------------------------|-------------------------------------|-----------------------------|
| Voltage (Vac) | Measurement Frequency (MHz) | Temperature (°C) | Measurement Frequency (MHz) |
| 120 | 13.559964 | -20 | 13.559964 |
| 102 | 13.559964 | -10 | 13.559964 |
| 138 | 13.559964 | 0 | 13.559971 |
| - | - | 10 | 13.559964 |
| - | - | 20 | 13.559964 |
| - | - | 30 | 13.559964 |
| - | - | 40 | 13.559964 |
| - | - | 50 | 13.559964 |
| Max.Deviation (MHz) | -0.000036 | Max.Deviation (MHz) | -0.000036 |
| Max.Deviation (ppm) | -2.6549 | Max.Deviation (ppm) | -2.6549 |
| Limit | FS < ±100 ppm | Limit | FS < ±100 ppm |
| Test Result | PASS | Test Result | PASS |



Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

| Test Mode : | NFC Tx | Test Frequency (MHz) | 13.56 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--------|----------------------|------------|--------------------------|------------|-------|-------|--------|-----|----|--|--|--|------|-------|------------|------------|--------------------------|------------|-------|-------|--------|--|-----|--------|----|--------|------|------|----|----|-----|--|---|-------|-------|--------|--------|-------|-------|------|-----|-----|----|
| <p>Site : 03CH02-KS Condition : NFC 15.225 3m NFC ANT 100321 HORIZONTAL</p> <table border="1"> <thead> <tr> <th colspan="10">: F Card</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13.56</td> <td>58.07</td> <td>-65.93</td> <td>124.00</td> <td>37.61</td> <td>20.30</td> <td>0.16</td> <td>---</td> <td>---</td> <td>OP</td> </tr> </tbody> </table> | | | | : F Card | | | | | | | | | | Freq | Level | Over Limit | Limit Line | ReadAntenna Level Factor | Cable Loss | A/Pos | T/Pos | Remark | | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | cm | deg | | 1 | 13.56 | 58.07 | -65.93 | 124.00 | 37.61 | 20.30 | 0.16 | --- | --- | OP |
| : F Card | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Over Limit | Limit Line | ReadAntenna Level Factor | Cable Loss | A/Pos | T/Pos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 13.56 | 58.07 | -65.93 | 124.00 | 37.61 | 20.30 | 0.16 | --- | --- | OP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Site : 03CH02-KS Condition : NFC 15.225 3m NFC ANT 100321 VERTICAL</p> <table border="1"> <thead> <tr> <th colspan="10">: F Card</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13.56</td> <td>54.00</td> <td>-70.00</td> <td>124.00</td> <td>33.54</td> <td>20.30</td> <td>0.16</td> <td>---</td> <td>---</td> <td>OP</td> </tr> </tbody> </table> | | | | : F Card | | | | | | | | | | Freq | Level | Over Limit | Limit Line | ReadAntenna Level Factor | Cable Loss | A/Pos | T/Pos | Remark | | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | cm | deg | | 1 | 13.56 | 54.00 | -70.00 | 124.00 | 33.54 | 20.30 | 0.16 | --- | --- | OP |
| : F Card | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Over Limit | Limit Line | ReadAntenna Level Factor | Cable Loss | A/Pos | T/Pos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 13.56 | 54.00 | -70.00 | 124.00 | 33.54 | 20.30 | 0.16 | --- | --- | OP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) + Distance extrapolation Factor(dB)
- Distance extrapolation factor = 40 log (test distance/specific distance) (dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

| | | | | | | | | | |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------|-------------------------|---------|
| Test Mode : | | NFC Tx | | | Polarization : | | Horizontal | | |
| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 0.00999 | 57.36 | -70.26 | 127.62 | 36.75 | 20.6 | 0.01 | | | Average |
| 0.04467 | 57.21 | -57.39 | 114.6 | 37.4 | 19.8 | 0.01 | | | Average |
| 0.6569 | 39.12 | -32.12 | 71.24 | 18.69 | 20.41 | 0.02 | | | QP |
| 6.38 | 33.49 | -36.05 | 69.54 | 12.45 | 20.96 | 0.08 | | | QP |
| 19.577 | 33.08 | -36.46 | 69.54 | 12.25 | 20.6 | 0.23 | | | QP |
| 29.525 | 31.95 | -37.59 | 69.54 | 12.05 | 19.57 | 0.33 | | | QP |

| | | | | | | | | | |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------|-------------------------|---------|
| Test Mode : | | NFC Tx | | | Polarization : | | Vertical | | |
| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 0.01915 | 53.79 | -68.17 | 121.96 | 33.18 | 20.6 | 0.01 | | | Average |
| 0.04763 | 53.47 | -60.57 | 114.04 | 33.66 | 19.8 | 0.01 | | | Average |
| 0.65875 | 36.41 | -34.8 | 71.21 | 15.98 | 20.41 | 0.02 | | | QP |
| 6.392 | 33.1 | -36.44 | 69.54 | 12.06 | 20.96 | 0.08 | | | QP |
| 21.481 | 33.31 | -36.23 | 69.54 | 12.58 | 20.48 | 0.25 | | | QP |
| 29.22 | 31.96 | -37.58 | 69.54 | 12.02 | 19.61 | 0.33 | | | QP |

Note:

- 13.56 MHz is fundamental signal which can be ignored.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = 40 log (test distance/specific distance) (dB);
- Limit line = specific limits (dBµV) + distance extrapolation factor.



C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

| Test Mode : | | NFC Tx | | | Polarization : | | Horizontal | | | |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 40.67 | 21.75 | -18.25 | 40 | 33.67 | 19.16 | 0.88 | 31.96 | | | Peak |
| 94.99 | 20.37 | -23.13 | 43.5 | 35.23 | 15.6 | 1.47 | 31.93 | | | Peak |
| 161.92 | 22.74 | -20.76 | 43.5 | 36.04 | 16.71 | 1.92 | 31.93 | | | Peak |
| 230.79 | 28.6 | -17.4 | 46 | 40.92 | 17.32 | 2.3 | 31.94 | | | Peak |
| 421.88 | 25.24 | -20.76 | 46 | 31.9 | 22.43 | 3.07 | 32.16 | | | Peak |
| 946.65 | 30.03 | -15.97 | 46 | 25.69 | 30.8 | 4.56 | 31.02 | 100 | 0 | Peak |

| Test Mode : | | NFC Tx | | | Polarization : | | Vertical | | | |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 34.85 | 29.31 | -10.69 | 40 | 38.35 | 22.1 | 0.82 | 31.96 | | | Peak |
| 40.67 | 36.76 | -3.24 | 40 | 48.68 | 19.16 | 0.88 | 31.96 | 100 | 0 | Peak |
| 94.99 | 22.77 | -20.73 | 43.5 | 37.63 | 15.6 | 1.47 | 31.93 | | | Peak |
| 230.79 | 23.45 | -22.55 | 46 | 35.77 | 17.32 | 2.3 | 31.94 | | | Peak |
| 481.05 | 24.94 | -21.06 | 46 | 30.18 | 23.72 | 3.29 | 32.25 | | | Peak |
| 941.8 | 30.48 | -15.52 | 46 | 26.35 | 30.63 | 4.56 | 31.06 | | | Peak |

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.