



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.6 \pm 6 %	2.03 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	56.6 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.1 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 Ω - 2.3 j Ω
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 26.11.2020

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1061

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7405; ConvF(7.54, 7.54, 7.54) @ 2600 MHz; Calibrated: 29.06.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 119.2 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 30.9 W/kg

SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.37 W/kg


Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 25.0 W/kg

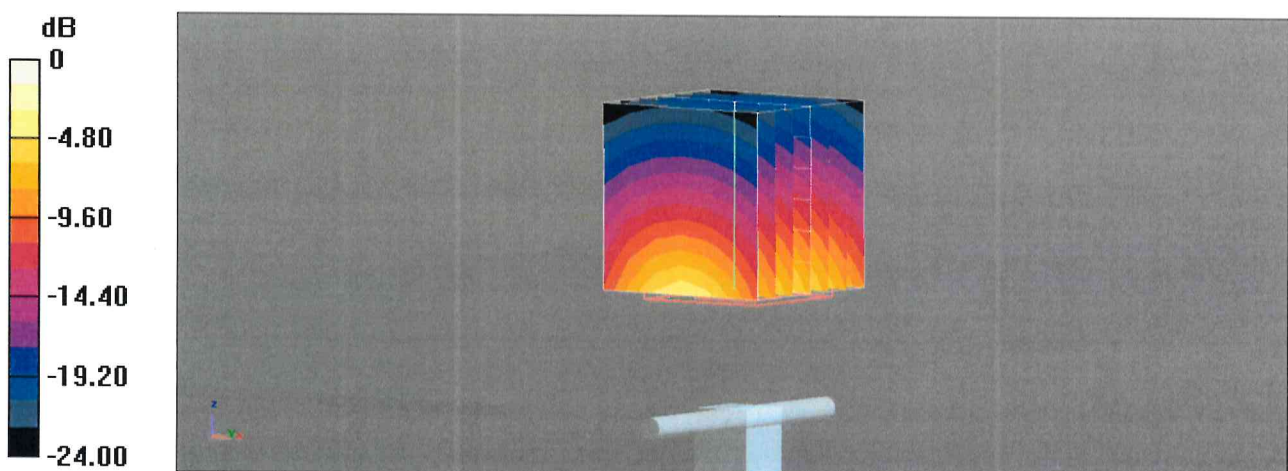

Impedance Measurement Plot for Head TSL

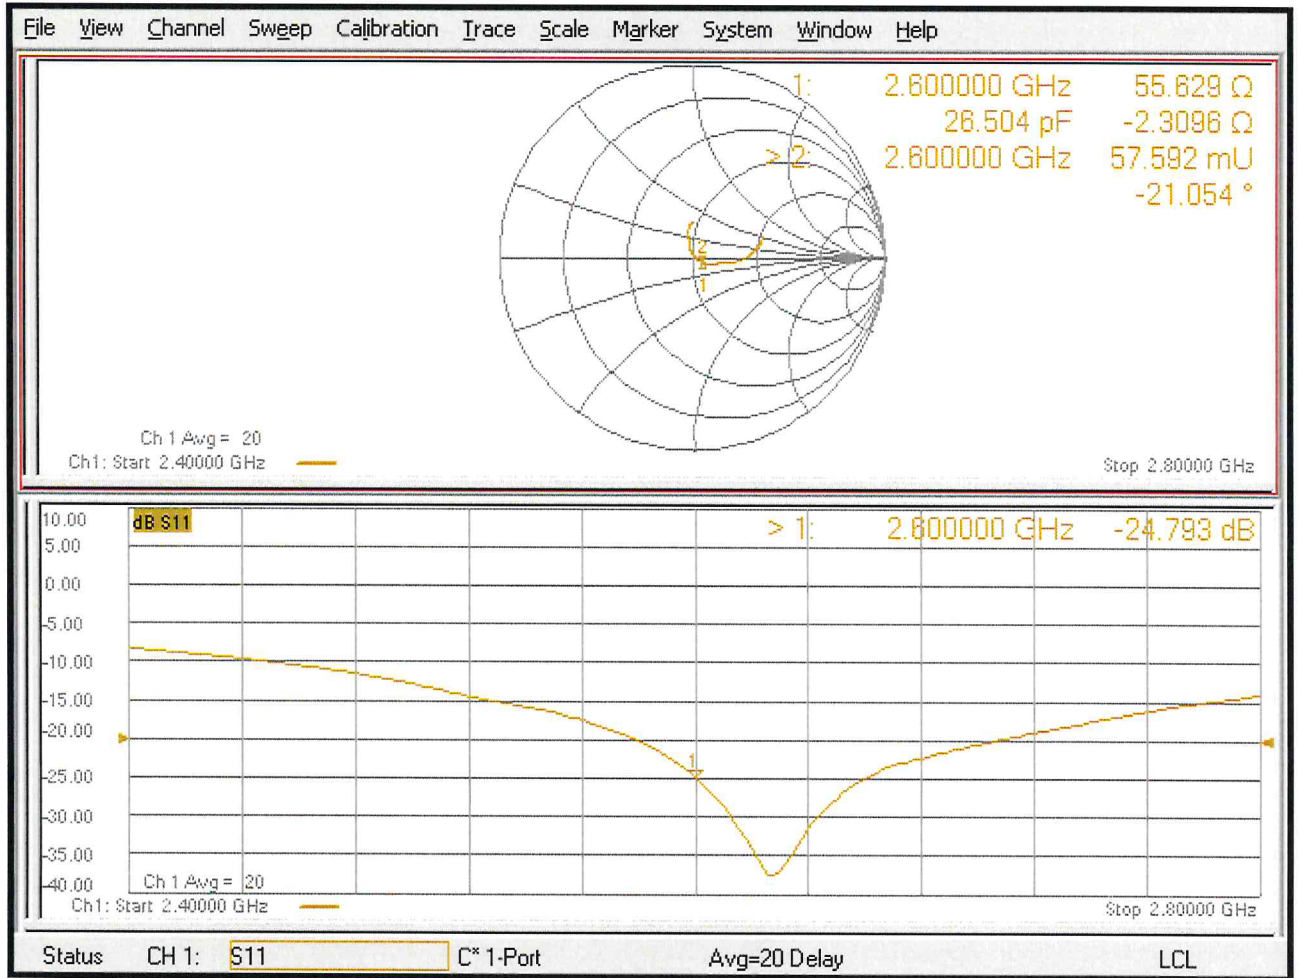



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton**

Certificate No: **DAE4-1303_Jul20**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BO - SN: 1303**

Calibration procedure(s) **QA CAL-06.v30
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **July 07, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Sep-19 (No:25949)	Sep-20
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	09-Jan-20 (in house check)	In house check: Jan-21
Calibrator Box V2.1	SE UMS 006 AA 1002	09-Jan-20 (in house check)	In house check: Jan-21

	Name	Function	Signature
Calibrated by:	Eric Hainfeld	Laboratory Technician	
Approved by:	Sven Kühn	Deputy Manager	

Issued: July 7, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.621 \pm 0.02% (k=2)	405.288 \pm 0.02% (k=2)	405.521 \pm 0.02% (k=2)
Low Range	3.95970 \pm 1.50% (k=2)	4.00177 \pm 1.50% (k=2)	4.00559 \pm 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	36.0 $^{\circ}$ \pm 1 $^{\circ}$
-------------------------------------------	------------------------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200028.13	-4.41	-0.00
Channel X + Input	20005.33	0.15	0.00
Channel X - Input	-20003.94	1.66	-0.01
Channel Y + Input	200034.95	3.01	0.00
Channel Y + Input	20004.62	-0.42	-0.00
Channel Y - Input	-20006.63	-0.88	0.00
Channel Z + Input	200029.72	-2.88	-0.00
Channel Z + Input	20001.10	-3.93	-0.02
Channel Z - Input	-20007.10	-1.35	0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.83	-0.06	-0.00
Channel X + Input	201.48	0.52	0.26
Channel X - Input	-198.72	0.43	-0.22
Channel Y + Input	2000.87	0.12	0.01
Channel Y + Input	199.93	-0.88	-0.44
Channel Y - Input	-199.89	-0.62	0.31
Channel Z + Input	2000.93	0.20	0.01
Channel Z + Input	200.16	-0.59	-0.30
Channel Z - Input	-199.91	-0.57	0.28

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-2.91	-4.53
	- 200	5.99	4.24
Channel Y	200	1.24	1.13
	- 200	-2.94	-3.20
Channel Z	200	-1.62	-1.40
	- 200	-0.52	-0.26

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	0.82	-4.08
Channel Y	200	7.63	-	2.53
Channel Z	200	10.14	5.17	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16198	15926
Channel Y	15904	15641
Channel Z	16229	15177

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.70	-0.97	2.67	0.58
Channel Y	-0.62	-1.86	0.89	0.42
Channel Z	-0.13	-1.67	0.85	0.41

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton**

Certificate No: **ES3-3293_Sep20**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3293**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 23, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: CC2552 (20x)	31-Mar-20 (No. 217-03106)	Apr-21
DAE4	SN: 660	27-Dec-19 (No. DAE4-660_Dec19)	Dec-20
Reference Probe ES3DV2	SN: 3013	31-Dec-19 (No. ES3-3013_Dec19)	Dec-20
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 29, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3293

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.10	0.90	0.73	± 10.1 %
DCP (mV) ^B	102.3	109.5	106.9	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	199.2	± 3.5 %	± 4.7 %
		Y	0.0	0.0	1.0		179.4		
		Z	0.0	0.0	1.0		183.6		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 5).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3293

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-5.0
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3293

Calibration Parameter Determined in Head Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	6.51	6.51	6.51	0.80	1.18	± 12.0 %
835	41.5	0.90	6.43	6.43	6.43	0.78	1.16	± 12.0 %
900	41.5	0.97	6.24	6.24	6.24	0.80	1.18	± 12.0 %
1750	40.1	1.37	5.37	5.37	5.37	0.63	1.28	± 12.0 %
1900	40.0	1.40	5.14	5.14	5.14	0.50	1.44	± 12.0 %
2000	40.0	1.40	5.11	5.11	5.11	0.72	1.25	± 12.0 %
2300	39.5	1.67	4.81	4.81	4.81	0.65	1.34	± 12.0 %
2450	39.2	1.80	4.51	4.51	4.51	0.57	1.50	± 12.0 %
2600	39.0	1.96	4.38	4.38	4.38	0.80	1.23	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

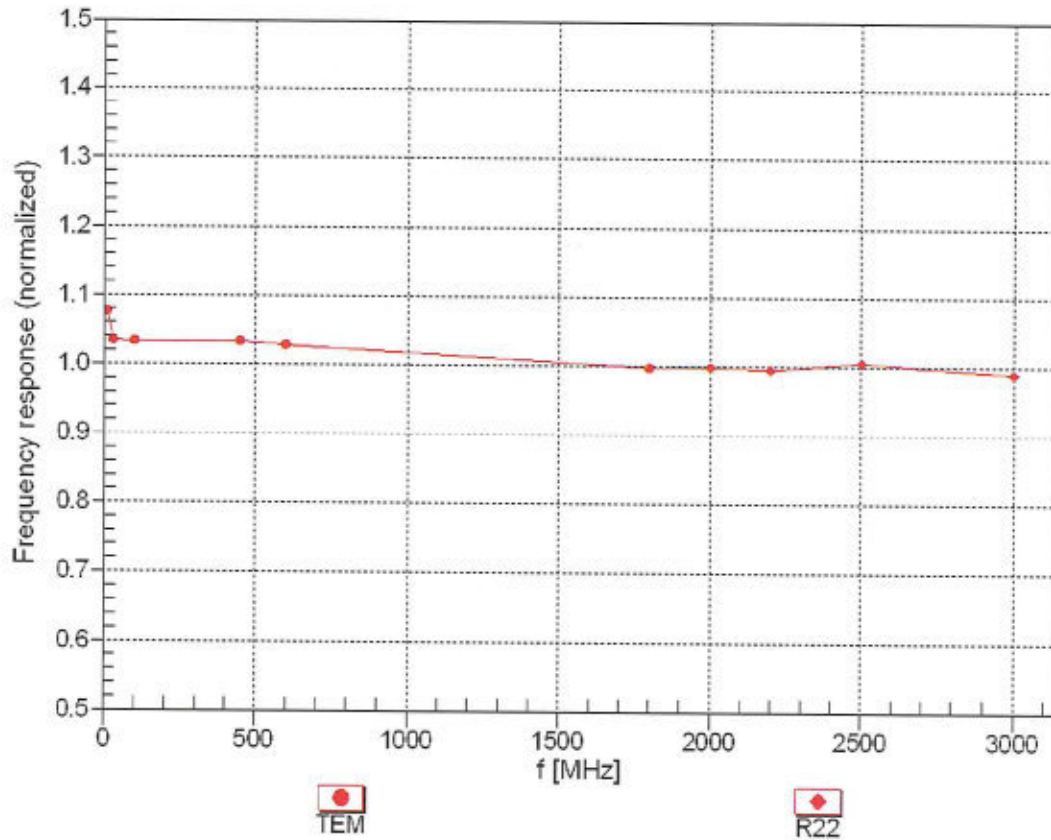



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


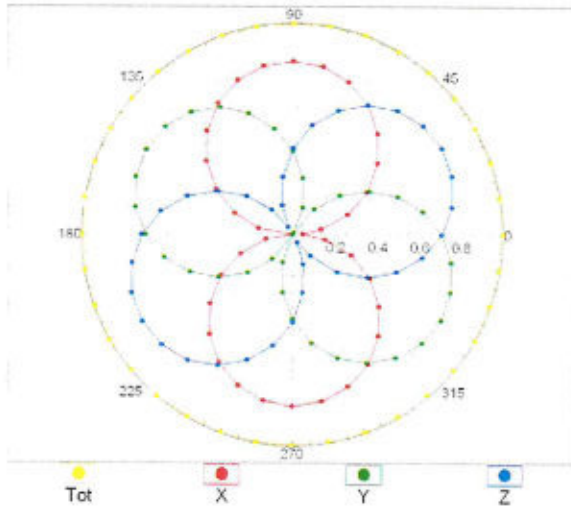


f=1800 MHz,R22

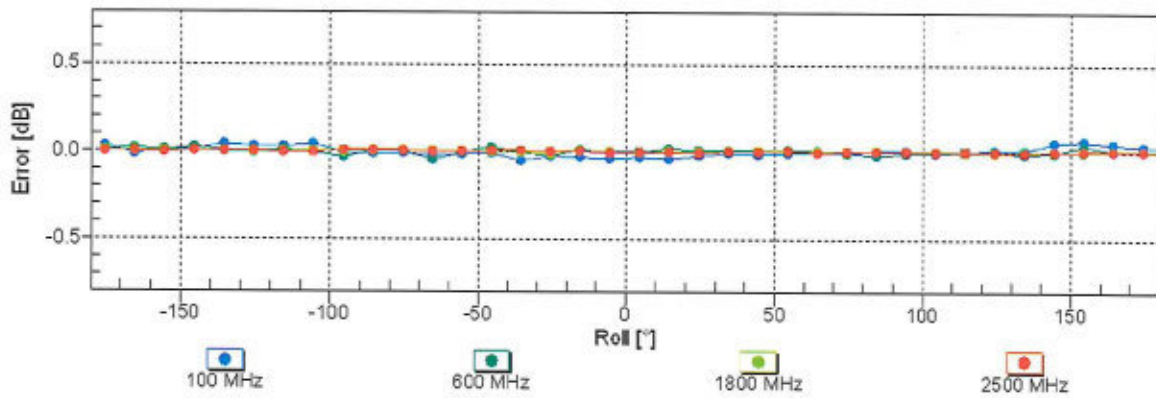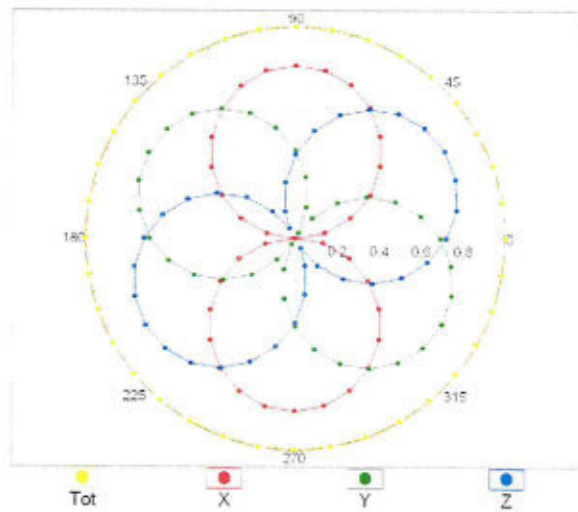


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

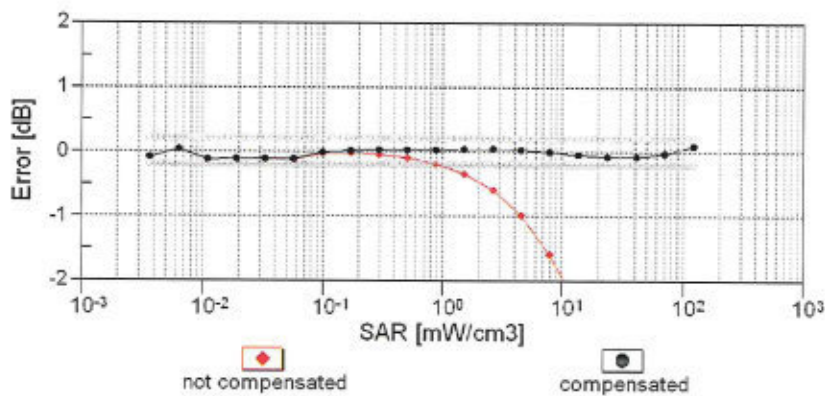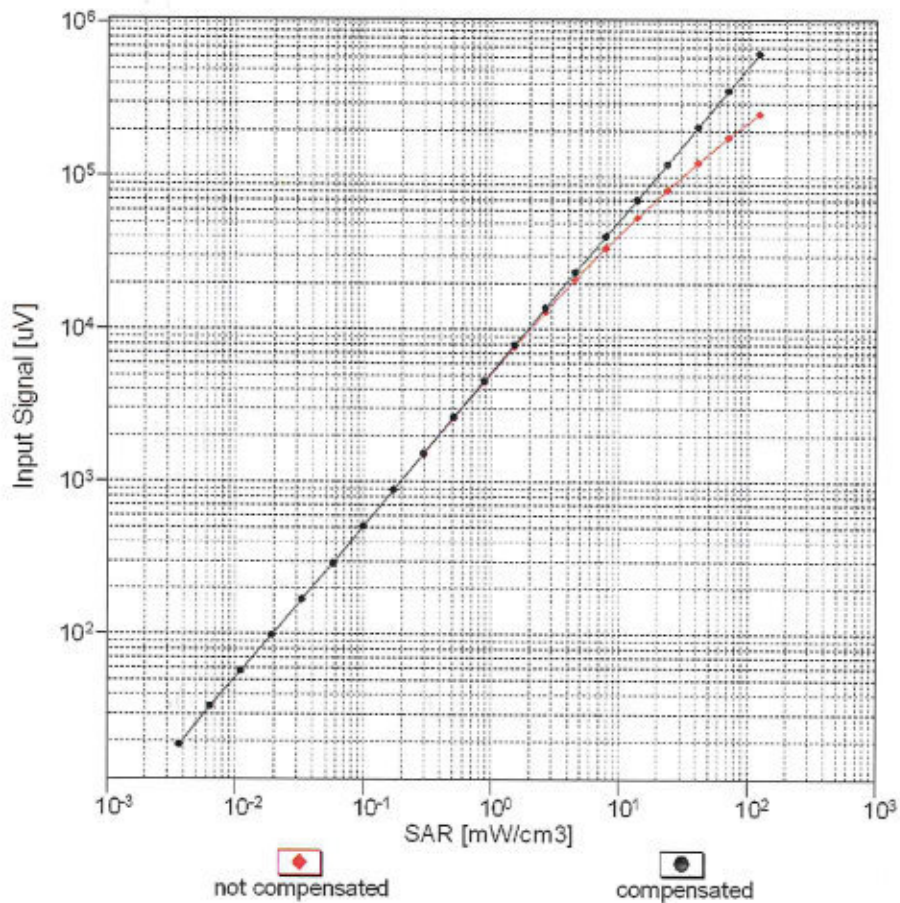


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

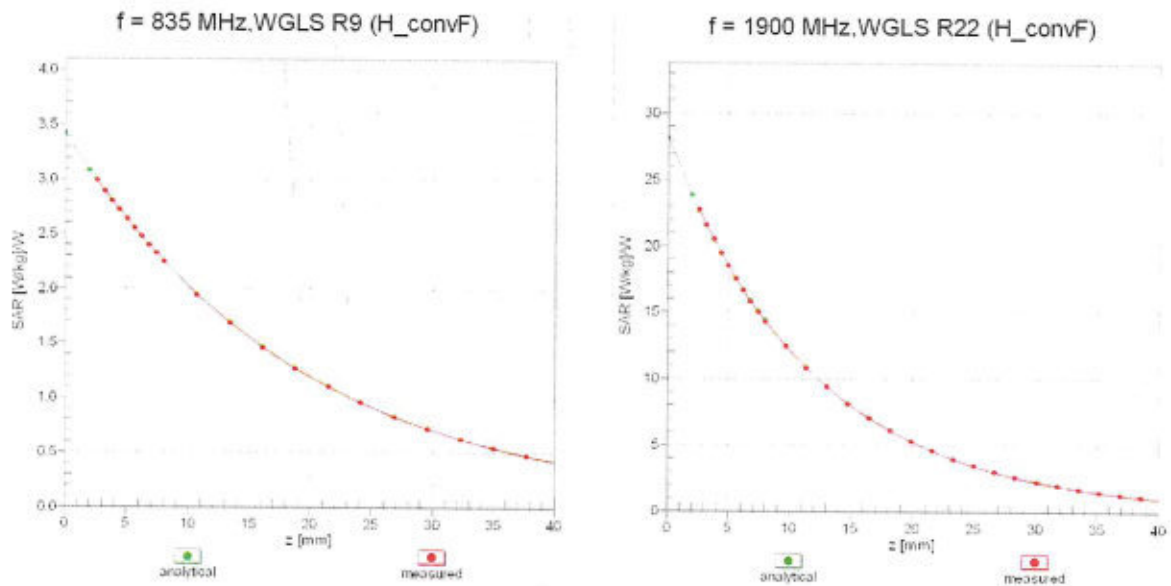

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

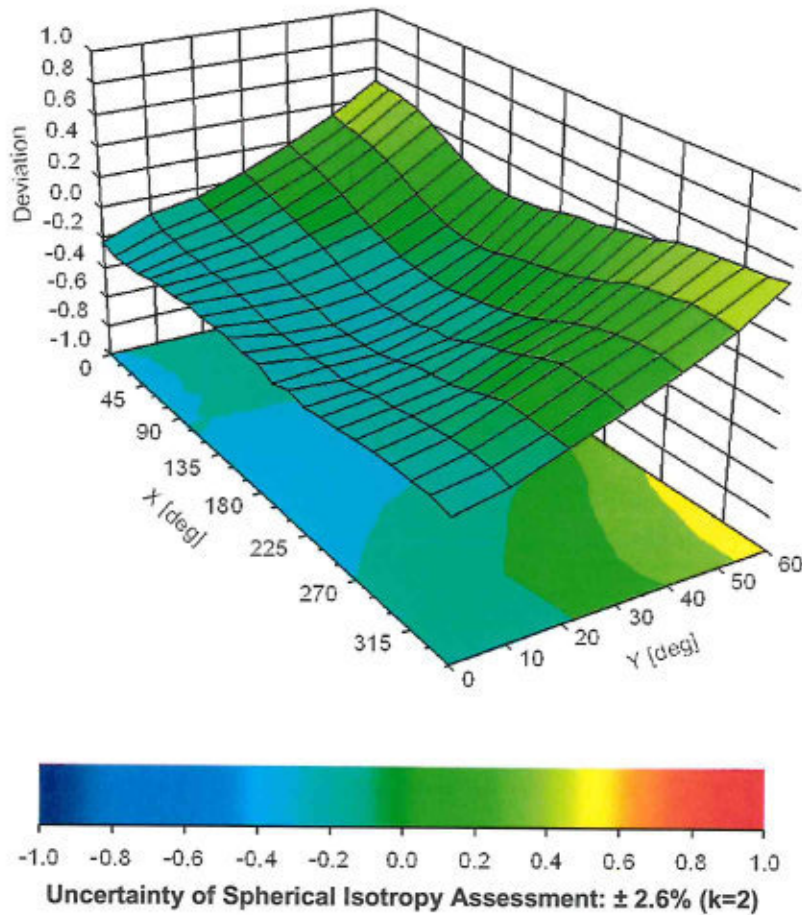



Appendix E. Conducted RF Output Power Table

The detailed power table are shown as follows.



Receiver On / Receiver Off / Hotspot On / Extremity

GSM900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	188	251		128	188	251	
TX Channel	524.2	536.4	548.6	524.2	536.4	548.6		
Frequency (MHz)	824.2	836.4	848.6	824.2	836.4	848.6		
GSM 1 Tx slot	32.83	32.82	32.76	33.50	23.83	23.82	23.76	
GPRS 1 Tx slots	32.81	32.85	32.77	33.50	23.81	23.85	23.77	
GPRS 2 Tx slots	32.02	32.05	31.97	32.50	26.02	26.05	25.97	
GPRS 3 Tx slots	30.27	30.32	30.21	31.00	26.01	26.06	25.95	
GPRS 4 Tx slots	26.35	26.36	26.26	30.00	26.35	26.36	26.26	
EDGE 1 Tx slot	25.91	27.04	26.93	27.50	17.91	19.04	17.93	
EDGE 2 Tx slots	25.51	25.68	25.49	26.50	19.51	19.68	19.49	
EDGE 3 Tx slots	23.11	23.25	23.13	24.00	18.85	18.99	18.87	
EDGE 4 Tx slots	22.09	22.09	22.01	22.50	19.05	19.09	19.01	

Receiver On / Receiver Off / Extremity

GSM1800	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
TX Channel	1652.2	1664.4	1676.6	1652.2	1664.4	1676.6		
Frequency (MHz)	1852.2	1864.4	1876.6	1852.2	1864.4	1876.6		
GSM 1 Tx slot	30.07	30.09	30.09	30.50	21.07	21.09	21.09	
GPRS 1 Tx slots	30.06	30.04	30.08	30.50	21.06	21.04	21.08	
GPRS 2 Tx slots	29.26	29.23	29.32	29.50	23.26	23.23	23.32	
GPRS 3 Tx slots	27.45	27.45	27.54	28.50	23.19	23.19	23.28	
GPRS 4 Tx slots	26.29	26.43	26.42	27.50	23.29	23.43	23.42	
EDGE 1 Tx slot	26.39	26.26	26.01	27.00	17.39	17.26	17.01	
EDGE 2 Tx slots	25.44	25.26	25.04	26.00	19.44	19.26	19.04	
EDGE 3 Tx slots	23.42	23.29	23.03	24.00	19.16	19.00	18.77	
EDGE 4 Tx slots	22.37	22.22	21.95	23.00	19.37	19.22	18.95	

Receiver On

Band	WCDMA 3			WCDMA 4			WCDMA 5		
	9602	9400	9538	1312	1413	1513	4132	4182	4233
TX Channel	9602	9600	9598	1537	1638	1738	4357	4407	4458
Frequency (MHz)	1652.2	1650	1647.8	1724.2	1722.5	1720.8	2664	2662.4	2660.8
3GPP Rel 99	AMR 12.2Kbps	23.83	23.80	23.77	24.50	23.53	23.40	23.36	24.50
3GPP Rel 99	RM-C 12.2Kbps	23.84	23.85	23.78	24.50	23.35	23.42	23.41	24.50
3GPP Rel 6	HSDPA Subtest-1	22.72	22.72	22.58	23.50	22.79	22.73	22.77	23.50
3GPP Rel 6	HSDPA Subtest-2	22.71	22.58	22.45	23.50	22.87	22.81	22.85	23.50
3GPP Rel 6	HSDPA Subtest-3	22.22	22.07	21.95	23.00	22.21	22.14	22.15	23.00
3GPP Rel 6	HSDPA Subtest-4	22.13	22.07	21.97	23.00	22.14	22.11	22.18	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.89	22.70	22.53	23.50	22.76	22.71	22.72	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.68	22.56	22.40	23.50	22.84	22.59	22.60	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.19	22.05	21.90	23.00	22.18	22.12	22.10	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.10	22.05	21.92	23.00	22.11	22.09	22.13	23.00
3GPP Rel 6	HSPA Subtest-1	22.71	22.68	22.53	23.50	22.65	22.46	22.49	23.50
3GPP Rel 6	HSPA Subtest-2	20.67	20.64	20.55	21.50	20.34	20.43	20.47	21.50
3GPP Rel 6	HSPA Subtest-3	21.72	21.83	21.57	22.50	21.33	21.41	21.20	22.50
3GPP Rel 6	HSPA Subtest-4	20.17	20.10	20.08	21.50	20.34	20.43	20.55	21.50
3GPP Rel 6	HSPA Subtest-5	22.58	22.62	22.48	23.50	22.30	22.40	22.20	23.50
3GPP Rel 7	HSPA (HSPA) Subtest-1	20.12	20.10	20.07	21.00	20.21	20.20	20.12	21.00

Receiver On / Receiver Off / Hotspot On / Extremity



Band 2 (1900MHz Band) Part 24E Receiver On									
BW (MHz)	Modulation	RB Size	RB Offset	Power Level Ch./Freq.	Power Mask Ch./Freq.	Power Ch./Freq.	Tune-up limit (dBm)	MPR (dB)	
Channel									
Frequency (MHz)									
20	QPSK	1	0	23.03	23.40	23.11			
20	QPSK	1	49	23.33	23.28	23.30	24	0	
20	QPSK	1	99	23.12	23.22	23.22			
20	QPSK	50	0	22.36	22.36	22.34			
20	QPSK	50	24	22.07	22.07	22.08	23	1	
20	QPSK	50	50	22.27	22.20	22.23			
20	QPSK	100	0	22.28	22.30	22.28			
20	16QAM	1	0	22.56	22.71	22.67	23	1	
20	16QAM	1	49	22.57	22.51	22.48			
20	16QAM	1	99	22.55	22.54	22.68			
20	16QAM	50	0	21.34	21.33	21.31			
20	16QAM	50	24	21.28	21.28	21.25	22	2	
20	16QAM	50	50	21.27	21.18	21.20			
20	16QAM	100	0	21.28	21.24	21.25			
20	64QAM	1	0	21.40	21.39	21.34			
20	64QAM	1	49	21.64	21.67	21.65	22	2	
20	64QAM	1	99	21.26	21.22	21.22			
20	64QAM	50	0	20.56	20.55	20.53			
20	64QAM	50	24	20.51	20.49	20.49	21	3	
20	64QAM	50	50	20.49	20.37	20.43			
20	64QAM	100	0	20.52	20.47	20.48			
Channel									
Frequency (MHz)									
15	QPSK	1	0	23.17	23.17	23.14			
15	QPSK	1	37	23.36	23.33	23.32	24	0	
15	QPSK	1	74	23.12	23.10	23.10			
15	QPSK	36	0	22.32	22.29	22.27			
15	QPSK	36	26	22.28	22.27	22.27	23	1	
15	QPSK	36	39	22.24	22.19	22.27			
15	QPSK	75	0	22.28	22.27	22.28			
15	16QAM	1	0	22.39	22.37	22.36	23	1	
15	16QAM	1	37	22.60	22.59	22.53			
15	16QAM	1	74	22.34	22.28	22.23			
15	16QAM	36	0	21.31	21.25	21.23			
15	16QAM	36	26	21.27	21.25	21.24	22	2	
15	16QAM	36	39	21.22	21.16	21.21			
15	16QAM	75	0	21.27	21.24	21.22			
15	64QAM	1	0	21.58	21.65	21.51			
15	64QAM	1	37	21.74	21.68	21.71	22	2	
15	64QAM	1	74	21.47	21.42	21.39			
15	64QAM	36	0	20.53	20.47	20.46			
15	64QAM	36	26	20.50	20.46	20.46	21	3	
15	64QAM	36	39	20.44	20.38	20.44			
15	64QAM	75	0	20.51	20.46	20.44			
Channel									
Frequency (MHz)									
10	QPSK	1	0	23.13	23.14	23.11			
10	QPSK	1	25	23.12	23.10	23.10	24	0	
10	QPSK	1	49	23.08	23.09	23.10			
10	QPSK	25	0	22.18	22.20	22.23			
10	QPSK	25	12	22.21	22.25	22.18	23	1	
10	QPSK	25	26	22.12	22.21	22.19			
10	QPSK	50	0	22.34	22.29	22.29			
10	16QAM	1	0	22.35	22.57	22.27	23	1	
10	16QAM	1	25	22.39	22.67	22.66			
10	16QAM	1	49	22.38	22.57	22.68			
10	16QAM	25	0	21.21	21.14	21.31			
10	16QAM	25	12	21.22	21.16	21.21	22	2	
10	16QAM	25	26	21.28	21.24	21.14			
10	16QAM	50	0	21.27	21.20	21.19			
10	64QAM	1	0	21.79	21.72	21.71			
10	64QAM	1	25	21.66	21.91	21.81	22	2	
10	64QAM	1	49	21.53	21.57	21.64			
10	64QAM	25	0	20.42	20.37	20.38			
10	64QAM	25	12	20.43	20.45	20.53	21	3	
10	64QAM	25	26	20.32	20.41	20.54			
10	64QAM	50	0	20.59	20.47	20.49			
Channel									
Frequency (MHz)									
5	QPSK	1	0	23.14	23.10	23.09			
5	QPSK	1	12	23.39	23.35	23.38	24	0	
5	QPSK	1	24	23.12	23.06	23.07			
5	QPSK	12	0	22.26	22.31	22.29			
5	QPSK	12	7	22.30	22.26	22.29	23	1	
5	QPSK	12	13	22.21	22.16	22.20			
5	QPSK	25	0	22.25	22.20	22.28			
5	16QAM	1	0	22.35	22.33	22.28	23	1	
5	16QAM	1	12	22.70	22.67	22.53			
5	16QAM	1	24	22.38	22.30	22.22			
5	16QAM	12	0	21.23	21.19	21.17			
5	16QAM	12	7	21.31	21.25	21.28	22	2	
5	16QAM	12	13	21.19	21.14	21.16			
5	16QAM	25	0	21.25	21.21	21.20			
5	64QAM	1	0	21.48	21.49	21.41			
5	64QAM	1	12	21.76	21.69	21.65	22	2	
5	64QAM	1	24	21.51	21.45	21.38			
5	64QAM	12	0	20.43	20.42	20.38			
5	64QAM	12	7	20.52	20.46	20.46	21	3	
5	64QAM	12	13	20.41	20.35	20.39			
5	64QAM	25	0	20.48	20.43	20.44			
Channel									
Frequency (MHz)									
3	QPSK	1	0	23.14	23.18	23.14			
3	QPSK	1	8	23.14	23.21	23.18	24	0	
3	QPSK	1	14	23.20	23.13	23.12			
3	QPSK	8	0	22.13	22.20	22.17			
3	QPSK	8	4	22.21	22.18	22.19	23	1	
3	QPSK	8	7	22.24	22.18	22.28			
3	QPSK	15	0	22.19	22.19	22.17			
3	16QAM	1	0	22.69	22.69	22.56			
3	16QAM	1	8	22.63	22.52	22.49	23	1	
3	16QAM	1	14	22.59	22.50	22.35			
3	16QAM	8	0	21.30	21.21	21.21			
3	16QAM	8	4	21.26	21.21	21.22	22	2	
3	16QAM	8	7	21.40	21.29	21.16			
3	16QAM	15	0	21.19	21.15	21.11			
3	64QAM	1	0	21.71	21.67	21.52			
3	64QAM	1	8	21.68	21.68	21.64	22	2	
3	64QAM	1	14	21.67	21.67	21.53			
3	64QAM	8	0	20.30	20.38	20.35			
3	64QAM	8	4	20.32	20.31	20.33	21	3	
3	64QAM	8	7	20.31	20.30	20.34			
3	64QAM	15	0	20.41	20.31	20.25			
Channel									
Frequency (MHz)									
1.4	QPSK	1	0	23.16	23.15	23.15			
1.4	QPSK	1	3	23.29	23.28	23.28	24	0	
1.4	QPSK	1	5	23.14	23.12	23.14			
1.4	QPSK	3	0	23.28	23.24	23.24			
1.4	QPSK	3	1	23.32	23.30	23.30	23	1	
1.4	QPSK	3	3	23.27	23.27	23.22			
1.4	QPSK	6	0	22.28	22.27	22.28			
1.4	16QAM	1	0	22.41	22.36	22.29	23	1	
1.4	16QAM	1	3	22.52	22.50	22.42			
1.4	16QAM	1	5	22.38	22.35	22.25			
1.4	16QAM	3	0	22.24	22.22	22.17			
1.4	16QAM	3	1	22.29	22.28	22.20			
1.4	16QAM	3	2	22.23	22.21	22.16	22	2	
1.4	16QAM	6	0	21.35	21.29	21.29			
1.4	64QAM	1	0	21.48	21.45	21.40			
1.4	64QAM	1	3	21.57	21.55	21.47			
1.4	64QAM	1	5	21.44	21.44	21.44	22	2	
1.4	64QAM	3	0	21.41	21.41	21.35			
1.4	64QAM	3	1	21.46	21.46	21.39			
1.4	64QAM	3	3	21.42	21.39	21.34	21	3	
1.4	64QAM	6	0	20.42	20.39	20.37			

Part 27L (Only on Channel Required) Receiver On									
BW (MHz)	Modulation	RB Size	RB Offset	Power Level Ch./Freq.	Power Mask Ch./Freq.	Power Ch./Freq.	Tune-up limit (dBm)	MPR (dB)	
Channel									
Frequency (MHz)									
20	QPSK	1	0	23.03	23.11	23.03			
20	QPSK	1	49	23.10	22.96	23.11	24	0	
20	QPSK	1	99	22.99	23.10	22.98			
20	QPSK	50	0	21.93	22.08	22.22			
20	QPSK	50	24	22.19	22.19	22.22	23	1	
20	QPSK	50	50	22.29	22.04				



Band 7 (2600MHz Band) Part 27 Receiver Band									
BW (MHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq	Power High Ch. / Freq	Power High Ch. / Freq	Tune-up limit (dBm)	MPR (dB)	
Channel				2060	2100	2130			
Frequency (MHz)									
20	QPSK	1	0	23.55	23.55	23.11			
20	QPSK	1	49	23.41	23.48	23.52			
20	QPSK	1	99	23.11	23.20	23.21	24	0	
20	QPSK	50	0	22.31	22.50	22.50			
20	QPSK	50	24	22.41	22.45	22.53			
20	QPSK	50	50	22.47	22.52	22.52	23	1	
20	QPSK	100	0	22.38	22.51	22.50			
20	16QAM	1	0	22.65	22.66	22.43			
20	16QAM	1	49	22.65	22.75	22.73	23	1	
20	16QAM	1	99	22.37	22.48	22.45			
20	16QAM	50	0	21.36	21.42	21.47			
20	16QAM	50	24	21.40	21.47	21.52			
20	16QAM	50	50	21.46	21.50	21.46	22	2	
20	16QAM	100	0	21.37	21.45	21.44			
20	64QAM	1	0	21.31	21.31	21.37			
20	64QAM	1	49	21.67	21.75	21.76	22	2	
20	64QAM	1	99	21.60	21.47	21.47			
20	64QAM	50	0	20.41	20.52	20.58			
20	64QAM	50	24	20.53	20.58	20.63			
20	64QAM	50	50	20.57	20.60	20.58	21	3	
20	64QAM	100	0	20.50	20.50	20.58			
Channel				2065	2100	2135	Tune-up limit (dBm)	MPR (dB)	
Frequency (MHz)									
15	QPSK	1	0	23.20	23.24	23.28			
15	QPSK	1	37	23.50	23.57	23.33	24	0	
15	QPSK	1	74	23.27	23.34	23.38			
15	QPSK	36	0	22.38	22.46	22.51			
15	QPSK	36	20	22.41	22.51	22.52	23	1	
15	QPSK	36	39	22.46	22.52	22.56			
15	QPSK	75	0	22.42	22.48	22.53			
15	16QAM	1	0	22.43	22.49	22.49			
15	16QAM	1	37	22.71	22.83	22.77	23	1	
15	16QAM	1	74	22.52	22.59	22.55			
15	16QAM	36	0	21.31	21.43	21.48			
15	16QAM	36	20	21.37	21.44	21.47	22	2	
15	16QAM	36	39	21.41	21.47	21.51			
15	16QAM	75	0	21.39	21.46	21.48			
15	64QAM	1	0	21.45	21.53	21.56			
15	64QAM	1	37	21.75	21.87	21.83	22	2	
15	64QAM	1	74	21.54	21.63	21.62			
15	64QAM	36	0	20.44	20.54	20.59			
15	64QAM	36	20	20.49	20.57	20.61			
15	64QAM	36	39	20.55	20.60	20.63	21	3	
15	64QAM	75	0	20.52	20.57	20.62			
Channel				2080	2100	2140	Tune-up limit (dBm)	MPR (dB)	
Frequency (MHz)									
10	QPSK	1	0	23.07	23.33	23.39			
10	QPSK	1	25	23.38	23.50	23.46	24	0	
10	QPSK	1	49	23.31	23.39	23.43			
10	QPSK	25	0	22.40	22.48	22.51			
10	QPSK	25	12	22.42	22.50	22.51	23	1	
10	QPSK	25	25	22.46	22.50	22.56			
10	QPSK	50	0	22.43	22.51	22.53			
10	16QAM	1	0	22.51	22.56	22.60			
10	16QAM	1	25	22.63	22.75	22.68	23	1	
10	16QAM	1	49	22.55	22.65	22.59			
10	16QAM	25	0	21.36	21.47	21.50			
10	16QAM	25	12	21.40	21.45	21.48	22	2	
10	16QAM	25	25	21.45	21.51	21.51			
10	16QAM	50	0	21.42	21.50	21.49			
10	64QAM	1	0	21.51	21.59	21.62			
10	64QAM	1	25	21.84	21.78	21.74	22	2	
10	64QAM	1	49	21.57	21.67	21.61			
10	64QAM	25	0	20.52	20.59	20.60			
10	64QAM	25	12	20.52	20.58	20.63	21	3	
10	64QAM	25	25	20.58	20.63	20.64			
10	64QAM	50	0	20.53	20.60	20.59			
Channel				2075	2100	2152	Tune-up limit (dBm)	MPR (dB)	
Frequency (MHz)									
5	QPSK	1	0	23.18	23.26	23.28			
5	QPSK	1	12	23.52	23.57	23.23	24	0	
5	QPSK	1	24	23.16	23.24	23.37			
5	QPSK	12	0	22.35	22.46	22.55			
5	QPSK	12	7	22.46	22.55	22.65	23	1	
5	QPSK	12	13	22.38	22.53	22.64			
5	QPSK	25	0	22.43	22.49	22.61			
5	16QAM	1	0	22.55	22.73	22.79			
5	16QAM	1	12	22.76	22.85	22.80	23	1	
5	16QAM	1	24	22.65	22.82	22.65			
5	16QAM	12	0	21.47	21.43	21.53			
5	16QAM	12	7	21.55	21.59	21.61	22	2	
5	16QAM	12	13	21.47	21.47	21.64			
5	16QAM	25	0	21.39	21.44	21.57			
5	64QAM	1	0	21.48	21.47	21.45			
5	64QAM	1	12	21.54	21.70	21.94	22	2	
5	64QAM	1	24	21.56	21.57	21.55			
5	64QAM	12	0	20.55	20.59	20.60			
5	64QAM	12	7	20.56	20.66	20.74	21	3	
5	64QAM	12	13	20.56	20.61	20.53			
5	64QAM	25	0	20.53	20.60	20.66			

Band 66 Receiver On									
BW (MHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq	Power High Ch. / Freq	Power High Ch. / Freq	Tune-up limit (dBm)	MPR (dB)	
Channel				13007	13022	13032			
Frequency (MHz)									
20	QPSK	1	0	23.10	23.14	22.98			
20	QPSK	1	49	23.10	22.95	22.92	24	0	
20	QPSK	1	99	22.74	22.94	22.87			
20	QPSK	50	0	22.12	22.21	22.03			
20	QPSK	50	24	22.09	21.99	21.95	23	1	
20	QPSK	50	50	22.07	21.97	21.82			
20	QPSK	100	0	22.09	22.10	21.91			
20	16QAM	1	0	22.22	22.39	22.23	23	1	
20	16QAM	1	49	22.33	22.28	22.11			
20	16QAM	1	99	21.98	21.90	22.21			
20	16QAM	50	0	21.14	21.09	21.04			
20	16QAM	50	24	21.14	21.04	20.98	22	2	
20	16QAM	50	50	21.09	21.00	20.96			
20	16QAM	100	0	21.12	21.04	20.93			
20	64QAM	1	0	21.12	21.05	21.00			
20	64QAM	1	49	21.46	21.38	21.26	22	2	
20	64QAM	1	99	21.16	21.02	21.00			
20	64QAM	50	0	20.37	20.33	20.27			
20	64QAM	50	24	20.36	20.26	20.20	21	3	
20	64QAM	50	50	20.33	20.23	20.08			
20	64QAM	100	0	20.38	20.31	20.15			
Channel				13007	13022	13032	Tune-up limit (dBm)	MPR (dB)	
Frequency (MHz)									
15	QPSK	1	0	22.72	22.85	22.98			
15	QPSK	1	37	22.98	23.05	23.10	24	0	
15	QPSK	1	74	22.72	22.84	22.81			
15	QPSK	36	0	21.90	22.01	22.15			
15	QPSK	36	20	21.87	22.03	22.12	23	1	
15	QPSK	36	39	21.86	21.97	22.02			
15	QPSK	75	0	21.86	21.92	22.09			
15	16QAM	1	0	21.90	22.09	22.13			
15	16QAM	1	37	22.14	22.33	22.30	23	1	
15	16QAM	1	74	22.01	22.09	21.94			
15	16QAM	36	0	20.90	21.03	21.14			
15	16QAM	36	20	20.89	21.05	21.10	22	2	
15	16QAM	36	39	20.87	20.97	20.98			
15	16QAM	75	0	20.88	21.03	21.09			
15	64QAM	1	0	21.64	21.26	21.35			
15	64QAM	1	37	21.33	21.52	21.43	22	2	
15	64QAM	1	74	21.12	21.23	21.11			
15	64QAM	36	0	20.12	20.29	20.39			
15	64QAM	36	20	20.17	20.27	20.34	21	3	
15	64QAM	36	39	20.11	20.21	20.22			
15	64QAM	75	0	20.12	20.28	20.34			
Channel				13022	13022	13032	Tune-up limit (dBm)	MPR (dB)	
Frequency (MHz)									
10	QPSK	1	0	22.77	22.76	22.83			
10	QPSK	1	25	22.83	22.81	22.81	24	0	
10	QPSK	1	49	22.72	22.71	22.71			
10	QPSK	25	0	21.84	21.82	21.91			
10	QPSK	25	12	21.86	21.82	21.84	23	1	
10	QPSK	25	25	21.77	21.89	21.77			
10	QPSK	50	0	21.82	21.82	21.88			
10	16QAM	1	0	21.91	21.99	21.99			
10	16QAM	1	25	22.01	22.06	22.06	23	1	
10	16QAM	1	49	21.96	21.97	21.79			
10	16QAM	25	0	20.78	20.84	20.91			
10	16QAM	25	12	20.79	20.84	20.83	22	2	
10	16QAM	25	25	20.75	20.81	20.77			
10	16QAM	50	0	20.81	20.87	20.86			
10	64QAM	1	0	20.92	21.12	21.15			
10	64QAM	1	25	21.09	21.22	21.20	22	2	
10	64QAM	1	49	20.97	21.12	20.96			
10	64QAM	25	0	19.93	20.10	20.15			
10	64QAM	25	12	19.96	20.09	20.08	21	3	
10	64QAM	25	25	19.91	20.07	20.06			
10	64QAM	50	0	19.94	20.10	20.03			



Hotspot On

GSM1900	Burst-Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1890	1909.8		1850.2	1890	1909.8	
GSM 1 Tx slot	26.12	26.08	26.13	26.50	17.12	17.08	17.13	17.50
GPRS 1 Tx slot	26.30	26.34	26.16	26.50	17.30	17.34	17.16	17.50
GPRS 2 Tx slots	24.89	24.83	24.73	25.50	18.89	18.83	18.73	19.50
GPRS 3 Tx slots	24.09	23.99	23.90	24.50	19.83	19.73	19.64	20.24
GPRS 4 Tx slots	23.03	23.06	23.02	23.50	20.03	20.06	20.02	20.50
EDGE 1 Tx slot	22.05	21.87	21.81	23.00	13.05	12.87	12.81	14.00
EDGE 2 Tx slots	21.08	20.93	20.83	22.00	15.08	14.93	14.83	16.00
EDGE 3 Tx slots	18.80	18.68	18.52	20.00	14.54	14.42	14.26	15.74
EDGE 4 Tx slots	17.82	17.65	17.53	19.00	14.62	14.65	14.53	16.00

Hotspot On

Band	WCDMA II	WCDMA IV			Tune-up Limit (dBm)	1312	1413	1513	Tune-up Limit (dBm)
		1312	1413	1513					
TX Channel	9982	9980	9938		1312	1413	1513		
Rx Channel	9982	9900	9938		1537	1638	1738		
Frequency (MHz)	1852.4	1890	1907.6		1712.4	1732.6	1752.6		
3GPP Rel 99	AMR 12.2Kbps	18.18	18.09	18.20	18.00	18.02	18.17	16.05	17.00
3GPP Rel 99	TM12 12.2Kbps	18.17	18.33	18.22	18.00	18.21	18.22	16.17	17.00
3GPP Rel 6	HSDPA Subtest-1	17.43	17.34	17.36	18.00	15.25	15.28	15.29	16.00
3GPP Rel 6	HSDPA Subtest-2	17.34	17.20	17.25	18.00	15.20	15.31	15.17	16.00
3GPP Rel 6	HSDPA Subtest-3	16.85	16.73	16.76	17.50	14.68	14.77	14.88	15.50
3GPP Rel 6	HSDPA Subtest-4	16.77	16.71	16.73	17.50	14.67	14.68	14.66	15.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.22	17.34	17.12	18.00	15.20	15.28	15.10	16.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.21	17.21	17.20	18.00	15.20	15.20	15.17	16.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.98	16.73	16.80	17.50	14.61	14.49	14.43	15.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.71	16.71	16.63	17.50	14.67	14.68	14.50	15.50
3GPP Rel 6	HSPA Subtest-1	17.47	17.34	17.38	18.00	15.50	15.57	15.66	16.00
3GPP Rel 6	HSPA Subtest-2	15.82	15.75	15.79	16.00	13.55	13.47	13.51	14.00
3GPP Rel 6	HSPA Subtest-3	16.58	16.47	16.57	17.00	14.23	14.04	14.60	15.00
3GPP Rel 6	HSPA Subtest-4	15.89	15.80	15.88	16.00	13.05	13.05	13.08	14.00
3GPP Rel 6	HSPA Subtest-5	17.30	17.30	17.30	18.00	15.50	15.50	15.50	16.00
3GPP Rel 7	HSPA+ (16QAM) Subtest1	15.10	15.01	15.02	15.50	13.20	13.20	13.00	13.50



Band 2 (1900MHz Band)										
Part 24E Hotspot On										
BW (MHz)	Modulation	RB Size	RB Offset	Power Low Ch./Freq.	Power Middle Ch./Freq.	Power High Ch./Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel										
Frequency (MHz)										
20	QPSK	1	0	19.84	19.79	19.83	20.5	0		
20	QPSK	1	49	19.45	19.61	19.54				
20	QPSK	1	99	19.42	19.42	19.43				
20	QPSK	50	0	18.49	18.79	18.75				
20	QPSK	50	24	18.39	18.72	18.74	19.5	1		
20	QPSK	50	50	18.36	18.69	18.69				
20	QPSK	100	0	18.48	18.71	18.65				
20	16QAM	1	0	18.35	18.26	18.41				
20	16QAM	1	49	18.39	18.66	18.75	19.5	1		
20	16QAM	1	99	18.34	18.41	18.29				
20	16QAM	50	0	17.59	17.79	17.89				
20	16QAM	50	24	17.47	17.75	17.85				
20	16QAM	50	50	17.48	17.73	17.81	18.5	2		
20	16QAM	100	0	17.46	17.62	17.85				
20	64QAM	1	0	17.47	17.50	17.81				
20	64QAM	1	49	17.66	17.86	17.84	18.5	2		
20	64QAM	1	99	17.48	17.65	17.48				
20	64QAM	50	0	16.47	16.66	16.92				
20	64QAM	50	24	16.45	16.75	16.76	17.5	3		
20	64QAM	50	50	16.47	16.68	16.65				
20	64QAM	100	0	16.45	16.69	16.80				
Channel										
Frequency (MHz)										
15	QPSK	1	0	19.22	19.45	19.67	20.5	0		
15	QPSK	1	37	19.45	19.45	19.56				
15	QPSK	1	74	19.20	19.36	19.46				
15	QPSK	36	0	18.44	18.65	18.77	19.5	1		
15	QPSK	36	20	18.40	18.73	18.80				
15	QPSK	36	39	18.32	18.63	18.69				
15	QPSK	75	0	18.44	18.59	18.73				
15	16QAM	1	0	18.47	18.64	18.71	19.5	1		
15	16QAM	1	37	18.47	18.73	18.93				
15	16QAM	1	74	18.44	18.58	18.46				
15	16QAM	36	0	17.39	17.63	17.83	18.5	2		
15	16QAM	36	20	17.45	17.73	17.70				
15	16QAM	36	39	17.45	17.70	17.75				
15	16QAM	75	0	17.38	17.73	17.80				
15	64QAM	1	0	17.41	17.71	17.87	18.5	2		
15	64QAM	1	37	17.81	18.01	18.14				
15	64QAM	1	74	17.84	17.75	17.79				
15	64QAM	36	0	16.45	16.60	16.83	17.5	3		
15	64QAM	36	20	16.47	16.65	16.73				
15	64QAM	36	39	16.39	16.63	16.65				
15	64QAM	75	0	16.39	16.74	16.71				
Channel										
Frequency (MHz)										
10	QPSK	1	0	19.48	19.62	19.62	20.5	0		
10	QPSK	1	25	19.60	19.76	19.73				
10	QPSK	1	49	19.43	19.65	19.67				
10	QPSK	25	0	18.35	18.60	18.73	19.5	1		
10	QPSK	25	12	18.47	18.62	18.81				
10	QPSK	25	25	18.40	18.67	18.72				
10	QPSK	50	0	18.44	18.73	18.71	19.5	1		
10	16QAM	1	0	18.36	18.77	18.74	19.5	1		
10	16QAM	1	25	18.58	18.69	18.81				
10	16QAM	1	49	18.37	18.57	18.81				
10	16QAM	25	0	17.40	17.75	17.79	18.5	2		
10	16QAM	25	12	17.49	17.73	17.99				
10	16QAM	25	25	17.42	17.69	17.76				
10	16QAM	50	0	17.40	17.70	17.69				
10	64QAM	1	0	17.59	17.84	17.93	18.5	2		
10	64QAM	1	25	17.59	17.98	18.00				
10	64QAM	1	49	17.54	17.83	17.90				
10	64QAM	25	0	16.46	16.83	16.74	17.5	3		
10	64QAM	25	12	16.51	16.66	16.88				
10	64QAM	25	25	16.43	16.59	16.84				
10	64QAM	50	0	16.36	16.70	16.77				
Channel										
Frequency (MHz)										
5	QPSK	1	0	19.20	19.52	19.60	20.5	0		
5	QPSK	1	12	19.48	19.57	19.53				
5	QPSK	1	24	19.37	19.51	19.68				
5	QPSK	12	0	18.35	18.60	18.65	19.5	1		
5	QPSK	12	7	18.44	18.70	18.73				
5	QPSK	12	13	18.28	18.57	18.64				
5	QPSK	25	0	18.35	18.69	18.71	19.5	1		
5	16QAM	1	0	18.45	18.71	18.73	19.5	1		
5	16QAM	1	12	18.43	18.83	18.78				
5	16QAM	1	24	18.38	18.68	18.71				
5	16QAM	12	0	17.48	17.76	17.76	18.5	2		
5	16QAM	12	7	17.48	17.74	17.76				
5	16QAM	12	13	17.46	17.70	17.76				
5	16QAM	25	0	17.43	17.70	17.73	18.5	2		
5	64QAM	1	0	17.57	17.73	17.73	18.5	2		
5	64QAM	1	12	17.69	17.92	17.91				
5	64QAM	1	24	17.58	17.72	17.74				
5	64QAM	12	0	16.48	16.66	16.73	17.5	3		
5	64QAM	12	7	16.37	16.69	16.84				
5	64QAM	12	13	16.37	16.65	16.72				
5	64QAM	25	0	16.56	16.72	16.77				
Channel										
Frequency (MHz)										
3	QPSK	1	0	19.30	19.64	19.67	20.5	0		
3	QPSK	1	8	19.42	19.59	19.69				
3	QPSK	1	14	19.33	19.64	19.77				
3	QPSK	8	0	18.37	18.63	18.76	19.5	1		
3	QPSK	8	7	18.27	18.67	18.71				
3	QPSK	8	7	18.37	18.67	18.68				
3	QPSK	15	0	18.36	18.59	18.64				
3	16QAM	1	0	18.50	18.76	18.84	19.5	1		
3	16QAM	1	8	18.47	18.80	18.83				
3	16QAM	1	14	18.55	18.83	18.88				
3	16QAM	8	0	17.67	17.85	17.83	18.5	2		
3	16QAM	8	4	17.51	17.85	17.92				
3	16QAM	8	7	17.51	17.82	17.79				
3	16QAM	15	0	17.52	17.82	17.84				
3	64QAM	1	0	17.52	17.83	17.86	18.5	2		
3	64QAM	1	8	17.59	17.78	17.80				
3	64QAM	1	14	17.58	17.79	17.73				
3	64QAM	8	0	16.59	16.81	16.94	17.5	3		
3	64QAM	8	4	16.53	16.84	16.93				
3	64QAM	8	7	16.61	16.95	16.97				
3	64QAM	15	0	16.51	16.76	16.84				
Channel										
Frequency (MHz)										
1.4	QPSK	1	0	19.33	19.51	19.52	20.5	0		
1.4	QPSK	1	3	19.23	19.67	19.71				
1.4	QPSK	1	5	19.26	19.57	19.64				
1.4	QPSK	3	0	19.33	19.62	19.70	19.5	1		
1.4	QPSK	3	1	19.35	19.68	19.77				
1.4	QPSK	3	3	19.31	19.64	19.71				
1.4	QPSK	6	0	18.30	18.55	18.77	19.5	1		
1.4	16QAM	1	0	18.46	18.70	18.76	18.5	2		
1.4	16QAM	1	3	18.59	18.92	18.77				
1.4	16QAM	1	5	18.47	18.68	18.75				
1.4	16QAM	3	0	18.50	18.75	18.76	19.5	1		
1.4	16QAM	3	1	18.40	18.81	18.80				
1.4	16QAM	3	3	18.40	18.71	18.70				
1.4	16QAM	6	0	17.41	17.67	17.83	18.5	2		
1.4	64QAM	1	0	17.50	17.88	17.73				
1.4	64QAM	1	3	17.53	17.93	17.96				
1.4	64QAM	1	5	17.52	17.74	17.78	18.5	2		
1.4	64QAM	3	0	17.39	17.75	17.77				
1.4	64QAM	3	1	17.46	17.71	17.78				
1.4	64QAM	3	3	17.41	17.66	17.63	17.5	3		
1.4	64QAM	6	0	16.43	16.70	16.74				



Band 66 Hotspot On										
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel				132072	132222	132572				
Frequency (MHz)				1723	1745	1770				
20	QPSK	1	0	16.51	16.97	16.71				
20	QPSK	1	49	16.75	16.87	16.90	17.5	0		
20	QPSK	1	99	16.53	16.56	16.64				
20	QPSK	50	0	15.88	16.02	16.00				
20	QPSK	50	24	15.87	15.80	16.00	16.5	1		
20	QPSK	50	50	15.84	15.83	15.98				
20	QPSK	100	0	15.82	15.90	15.90				
20	16QAM	1	0	16.20	16.21	16.34				
20	16QAM	1	49	16.47	16.49	16.44	16.5	1		
20	16QAM	1	99	16.06	16.17	16.22				
20	16QAM	50	0	14.94	14.94	15.04				
20	16QAM	50	24	14.91	14.86	15.02				
20	16QAM	50	50	14.77	14.78	14.89	15.5	2		
20	16QAM	100	0	14.88	14.97	15.03				
20	64QAM	1	0	14.82	14.86	15.00				
20	64QAM	1	49	14.90	15.10	15.24	15.5	2		
20	64QAM	1	99	14.77	14.81	14.80				
20	64QAM	50	0	13.96	14.05	14.15				
20	64QAM	50	24	13.87	13.94	14.06				
20	64QAM	50	50	13.85	13.90	14.01	14.5	3		
20	64QAM	100	0	13.80	13.92	14.01				
Channel				132047	132322	132597				
Frequency (MHz)				1717.5	1745	1772.5				
15	QPSK	1	0	16.58	16.76	16.81				
15	QPSK	1	37	16.73	16.94	16.89	17.5	0		
15	QPSK	1	74	16.57	16.65	16.72				
15	QPSK	36	0	15.86	15.97	16.06				
15	QPSK	36	20	15.80	15.94	16.08	16.5	1		
15	QPSK	36	39	15.84	15.92	15.88				
15	QPSK	75	0	15.76	15.88	16.05				
15	16QAM	1	0	16.25	16.07	16.23				
15	16QAM	1	37	16.20	16.49	16.42	16.5	1		
15	16QAM	1	74	16.31	16.08	15.99				
15	16QAM	36	0	14.73	14.90	15.11				
15	16QAM	36	20	14.87	14.85	14.99	15.5	2		
15	16QAM	36	39	14.86	14.88	14.96				
15	16QAM	75	0	14.90	15.00	15.14				
15	64QAM	1	0	14.85	14.84	14.77				
15	64QAM	1	37	14.97	14.97	15.00	15.5	2		
15	64QAM	1	74	14.50	14.95	14.65				
15	64QAM	36	0	13.81	13.87	14.01				
15	64QAM	36	20	13.81	13.99	14.10	14.5	3		
15	64QAM	36	39	13.71	13.88	13.93				
15	64QAM	75	0	13.86	13.97	14.11				
Channel				132022	132322	132622				
Frequency (MHz)				1715	1745	1775				
10	QPSK	1	0	16.58	16.70	16.85				
10	QPSK	1	25	16.79	16.72	16.81	17.5	0		
10	QPSK	1	49	16.52	16.67	16.78				
10	QPSK	25	0	15.86	15.91	16.02				
10	QPSK	25	12	15.86	15.87	16.00	16.5	1		
10	QPSK	25	25	15.81	15.81	15.90				
10	QPSK	50	0	15.87	15.92	16.01				
10	16QAM	1	0	16.03	16.06	16.25				
10	16QAM	1	25	16.16	16.20	16.27	16.5	1		
10	16QAM	1	49	16.01	16.13	16.14				
10	16QAM	25	0	14.85	15.00	15.18				
10	16QAM	25	12	14.91	14.95	15.10	15.5	2		
10	16QAM	25	25	14.82	14.94	14.98				
10	16QAM	50	0	14.89	15.01	15.14				
10	64QAM	1	0	14.60	14.74	14.85				
10	64QAM	1	25	14.67	14.84	15.00	15.5	2		
10	64QAM	1	49	14.61	15.09	14.75				
10	64QAM	25	0	13.84	13.98	14.16				
10	64QAM	25	12	13.88	13.92	14.01	14.5	3		
10	64QAM	25	25	13.87	13.94	13.93				
10	64QAM	50	0	13.92	13.95	14.06				
Channel				131997	132322	132647				
Frequency (MHz)				1712.5	1745	1777.5				
5	QPSK	1	0	16.53	16.66	16.73				
5	QPSK	1	12	16.93	16.77	16.92	17.5	0		
5	QPSK	1	24	16.47	16.56	16.68				
5	QPSK	12	0	15.66	15.86	15.94				
5	QPSK	12	7	15.79	15.85	15.79	16.5	1		
5	QPSK	12	13	15.63	15.77	15.84				
5	QPSK	25	0	15.65	15.80	15.92				
5	16QAM	1	0	15.89	15.90	16.02				
5	16QAM	1	12	15.19	15.13	15.33	16.5	1		
5	16QAM	1	24	16.04	15.91	15.99				
5	16QAM	12	0	14.75	14.88	14.84				
5	16QAM	12	7	14.67	14.90	15.05	15.5	2		
5	16QAM	12	13	14.67	14.79	14.87				
5	16QAM	25	0	14.76	14.93	14.97				
5	64QAM	1	0	14.54	14.76	14.79				
5	64QAM	1	12	14.91	15.02	15.06	15.5	2		
5	64QAM	1	24	14.82	14.76	14.83				
5	64QAM	12	0	13.78	13.91	13.89				
5	64QAM	12	7	13.85	13.84	13.91	14.5	3		
5	64QAM	12	13	13.76	13.80	13.82				
5	64QAM	25	0	13.68	13.75	13.83				
Channel				131987	132322	132657				
Frequency (MHz)				1711.5	1745	1773.5				
3	QPSK	1	0	16.58	16.63	16.82				
3	QPSK	1	8	16.57	16.67	16.78	17.5	0		
3	QPSK	1	14	16.59	16.81	16.80				
3	QPSK	8	0	15.70	15.80	15.92				
3	QPSK	8	4	15.68	15.72	15.76	16.5	1		
3	QPSK	8	7	15.67	15.72	15.83				
3	QPSK	15	0	15.64	15.72	15.81				
3	16QAM	1	0	16.00	16.00	16.12				
3	16QAM	1	8	16.00	15.96	16.06	16.5	1		
3	16QAM	1	14	15.96	16.00	16.06				
3	16QAM	8	0	14.91	15.04	14.89				
3	16QAM	8	4	14.83	14.98	15.03	15.5	2		
3	16QAM	8	7	14.67	14.80	14.91				
3	16QAM	15	0	14.67	14.87	14.88				
3	64QAM	1	0	14.57	14.86	14.97				
3	64QAM	1	8	14.77	14.88	14.93	15.5	2		
3	64QAM	1	14	14.73	14.84	14.93				
3	64QAM	8	0	13.80	13.90	13.96				
3	64QAM	8	4	13.82	13.88	14.04	14.5	3		
3	64QAM	8	7	13.73	13.96	13.89				
3	64QAM	15	0	13.57	13.90	13.78				
Channel				131979	132322	132695				
Frequency (MHz)				1710.7	1745	1773.3				
1.4	QPSK	1	0	16.58	16.65	16.83				
1.4	QPSK	1	3	16.65	16.86	16.94	17.5	0		
1.4	QPSK	1	5	16.57	16.66	16.82				
1.4	QPSK	3	0	16.64	16.72	16.89				
1.4	QPSK	3	1	16.66	16.76	16.81				
1.4	QPSK	3	3	16.62	16.76	16.92	16.5	1		
1.4	QPSK	6	0	15.62	15.76	15.81				
1.4	16QAM	1	0	15.90	16.00	16.00				
1.4	16QAM	1	3	16.11	15.98	16.14	16.5	1		
1.4	16QAM	1	5	15.79	15.96	16.08				
1.4	16QAM	3	0	15.74	15.72	15.86				
1.4	16QAM	3	1	15.58	15.80	15.90				
1.4	16QAM	3	3	15.73	15.83	15.87				
1.4	16QAM	6	0	14.81	15.00	15.02	15.5	2		
1.4	64QAM	1	0	14.71	14.74	14.96				



Receiver Off / Extremity

Band	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
	9662	9600	9638		1312	1413	1513	
Tx Channel	9662	9600	9638		1312	1413	1513	
Rx Channel	9662	9600	9638		1312	1413	1513	
Frequency (MHz)	1874	1800	1874		1724	1723	1723	
3GPP Rel 99	AMR 12.2Kbps	21.14	21.15	21.09	22.00	17.61	17.52	17.66
3GPP Rel 99	RMTC 12.2Kbps	21.12	21.15	21.10	22.00	17.67	17.76	17.73
3GPP Rel 6	HSDPA Subtest-1	20.49	20.43	20.47	21.00	16.69	16.79	16.80
3GPP Rel 6	HSDPA Subtest-2	20.27	20.26	20.39	21.00	16.43	16.85	16.70
3GPP Rel 6	HSDPA Subtest-3	19.69	19.93	19.86	20.50	16.13	16.23	16.17
3GPP Rel 6	HSDPA Subtest-4	19.93	19.88	19.94	20.50	16.10	16.11	16.15
3GPP Rel 6	DC-HSDPA Subtest-1	20.44	20.39	20.42	21.00	16.61	16.74	16.74
3GPP Rel 6	DC-HSDPA Subtest-2	20.59	20.20	20.36	21.00	16.57	16.62	16.62
3GPP Rel 6	DC-HSDPA Subtest-3	19.86	19.91	19.91	20.50	16.10	16.20	16.10
3GPP Rel 6	DC-HSDPA Subtest-4	19.90	19.76	19.87	20.50	16.02	16.07	16.11
3GPP Rel 6	HSUPA Subtest-1	20.51	20.43	20.55	21.00	16.64	16.62	16.76
3GPP Rel 6	HSUPA Subtest-2	19.40	16.36	16.46	19.00	15.01	15.03	15.02
3GPP Rel 6	HSUPA Subtest-3	19.47	19.46	19.48	20.00	15.62	15.76	15.76
3GPP Rel 6	HSUPA Subtest-4	17.99	17.95	18.02	19.00	15.00	15.02	15.03
3GPP Rel 6	HSUPA Subtest-5	20.40	20.30	20.40	21.00	16.60	16.70	16.70
3GPP Rel 7	HSPA+ (TCM/M) Subtest-1	16.13	16.20	16.11	16.50	14.60	14.61	14.66



Band 2 (1900MHz Band) Part 24E Receiver Off / Extremity									
BW (MHz)	Modulation	RB Size	RB Offset	Power Low Ch./Freq. 1870	Power Middle Ch./Freq. 1880	Power High Ch./Freq. 1900	Tune-up limit (dBm)	MPR (dB)	
Channel									
Frequency (MHz)									
20	QPSK	1	0	22.20	22.32	22.24			
20	QPSK	1	49	22.19	22.27	22.31	23	0	
20	QPSK	1	99	21.83	22.01	21.90			
20	QPSK	50	0	21.19	21.26	21.21			
20	QPSK	50	24	21.14	21.25	21.20			
20	QPSK	50	50	20.99	21.20	21.33			
20	QPSK	100	0	21.10	21.18	21.11	22	1	
20	16QAM	1	0	20.88	21.02	21.15			
20	16QAM	1	49	21.30	21.37	21.30	22	1	
20	16QAM	1	99	20.90	21.16	21.02			
20	16QAM	50	0	20.99	20.91	20.41			
20	16QAM	50	24	20.13	20.26	20.41			
20	16QAM	50	50	20.02	20.23	20.28			
20	16QAM	100	0	20.09	20.14	20.23			
20	84QAM	1	0	20.36	20.39	20.63			
20	84QAM	1	49	20.68	20.63	20.71	21	2	
20	84QAM	1	99	20.25	20.48	20.43			
20	84QAM	50	0	19.54	19.60	19.72			
20	84QAM	50	24	19.53	19.65	19.71			
20	84QAM	50	50	19.37	19.63	19.55			
20	84QAM	100	0	19.41	19.65	19.80			
Channel									
Frequency (MHz)									
15	QPSK	1	0	21.87	21.97	22.29	23	0	
15	QPSK	1	37	22.10	22.23	22.19			
15	QPSK	1	74	21.84	21.99	22.03			
15	QPSK	36	0	21.08	21.13	21.37			
15	QPSK	36	20	21.14	21.29	21.31	22	1	
15	QPSK	36	39	21.04	21.21	21.29			
15	QPSK	75	0	20.98	21.22	21.35			
15	16QAM	1	0	20.38	20.37	21.35			
15	16QAM	1	37	21.38	21.37	21.35	22	1	
15	16QAM	1	74	21.05	21.17	21.26			
15	16QAM	36	0	20.13	20.28	20.34			
15	16QAM	36	20	20.14	20.26	20.18			
15	16QAM	36	39	20.06	20.21	20.27			
15	16QAM	75	0	19.95	20.15	20.39			
15	84QAM	1	0	20.47	20.67	20.68			
15	84QAM	1	37	20.52	20.87	20.65			
15	84QAM	1	74	20.43	20.81	20.70			
15	84QAM	36	0	19.47	19.62	19.77			
15	84QAM	36	20	19.45	19.62	19.89			
15	84QAM	36	39	19.33	19.52	19.61			
15	84QAM	75	0	19.44	19.63	19.67			
Channel									
Frequency (MHz)									
10	QPSK	1	0	21.99	22.07	22.17	23	0	
10	QPSK	1	25	22.08	22.16	22.26			
10	QPSK	1	49	21.89	21.98	22.14			
10	QPSK	25	0	20.92	21.17	21.24			
10	QPSK	25	12	21.03	21.13	21.25			
10	QPSK	25	25	20.94	21.22	21.13	22	1	
10	QPSK	50	0	20.99	21.13	21.27			
10	16QAM	1	0	21.06	21.24	21.30			
10	16QAM	1	25	21.20	21.33	21.32			
10	16QAM	1	49	21.11	21.26	21.26	22	1	
10	16QAM	25	0	20.01	20.24	20.28			
10	16QAM	25	12	20.06	20.23	20.27			
10	16QAM	25	25	20.06	20.14	20.20			
10	16QAM	50	0	19.94	20.16	20.27			
10	84QAM	1	0	20.54	20.68	20.72			
10	84QAM	1	25	20.57	20.68	20.80			
10	84QAM	1	49	20.24	20.87	20.68	21	2	
10	84QAM	25	0	19.49	19.66	19.65			
10	84QAM	25	12	19.55	19.63	19.77			
10	84QAM	25	25	19.44	19.64	19.62			
10	84QAM	50	0	19.44	19.53	19.62			
Channel									
Frequency (MHz)									
5	QPSK	1	0	21.73	22.01	21.99	23	0	
5	QPSK	1	12	21.87	22.22	22.18			
5	QPSK	1	24	21.80	21.99	22.03			
5	QPSK	12	0	20.89	21.07	21.12			
5	QPSK	12	7	20.99	21.16	21.22			
5	QPSK	12	13	20.96	21.12	21.15	22	1	
5	QPSK	25	0	20.91	21.13	21.17			
5	16QAM	1	0	20.85	21.07	21.05			
5	16QAM	1	12	21.02	21.29	21.33	22	1	
5	16QAM	1	24	20.89	21.06	21.04			
5	16QAM	12	0	19.94	20.07	20.18			
5	16QAM	12	7	19.97	20.14	20.22			
5	16QAM	12	13	19.98	20.10	20.03			
5	16QAM	25	0	19.95	20.17	20.24			
5	84QAM	1	0	20.36	20.59	20.55			
5	84QAM	1	12	20.68	20.81	20.80			
5	84QAM	1	24	20.37	20.58	20.57			
5	84QAM	12	0	19.31	19.49	19.54			
5	84QAM	12	7	19.30	19.55	19.42			
5	84QAM	12	13	19.31	19.44	19.44			
5	84QAM	25	0	19.30	19.51	19.50			
Channel									
Frequency (MHz)									
3	QPSK	1	0	21.86	22.02	22.07	23	0	
3	QPSK	1	8	21.91	22.07	22.18			
3	QPSK	1	14	21.82	22.14	22.04			
3	QPSK	8	0	20.87	21.04	21.22			
3	QPSK	8	4	21.01	21.18	21.20			
3	QPSK	8	7	20.94	21.12	21.30			
3	QPSK	15	0	20.81	21.12	21.25			
3	16QAM	1	0	20.95	21.02	21.12			
3	16QAM	1	8	20.98	21.10	21.18	22	1	
3	16QAM	1	14	20.91	21.17	21.23			
3	16QAM	8	0	19.88	20.14	20.16			
3	16QAM	8	4	19.98	20.29	20.27			
3	16QAM	8	7	19.97	20.16	20.26			
3	16QAM	15	0	19.80	20.10	20.08			
3	84QAM	1	0	20.41	20.57	20.64			
3	84QAM	1	8	20.45	20.64	20.75			
3	84QAM	1	14	20.47	20.63	20.67	21	2	
3	84QAM	8	0	19.38	19.46	19.62			
3	84QAM	8	4	19.43	19.68	19.61			
3	84QAM	8	7	19.36	19.50	19.64			
3	84QAM	15	0	19.27	19.48	19.54			
Channel									
Frequency (MHz)									
1.4	QPSK	1	0	21.84	21.93	21.98	23	0	
1.4	QPSK	1	3	21.88	22.10	22.18			
1.4	QPSK	1	5	21.89	21.92	21.99			
1.4	QPSK	3	0	21.85	22.06	22.10			
1.4	QPSK	3	1	21.84	21.97	22.12			
1.4	QPSK	3	3	21.91	22.09	22.20			
1.4	QPSK	6	0	21.03	21.24	21.25			
1.4	16QAM	1	0	20.90	21.10	21.05	22	1	
1.4	16QAM	1	3	20.97	21.13	21.18			
1.4	16QAM	1	5	20.85	21.00	21.09			
1.4	16QAM	3	0	20.83	21.10	21.14			
1.4	16QAM	3	1	20.93	21.11	21.23			
1.4	16QAM	3	1	20.18	20.36	20.52			
1.4	16QAM	6	0	19.88	20.22	20.10	21	2	
1.4	84QAM	1	0	20.38	20.68	20.66			
1.4	84QAM	1	3	20.41	20.59	20.78			
1.4	84QAM	1	5	20.48	20.52	20.55			
1.4	84QAM	3	0	20.27	20.58	20.63			
1.4	84QAM	3	1	20.18	20.36	20.54			
1.4	84QAM	3	3	20.46	20.44	20.48			
1.4	84QAM	6	0	19.38	19.43	19.59	20	3	

Band 4 (AWS Band) Part 27L (only on channel required) Receiver Off / Extremity									
BW (MHz)	Modulation	RB Size	RB Offset	Power Low Ch./Freq. 1720	Power Middle Ch./Freq. 1732.5	Power High Ch./Freq. 1745	Tune-up limit (dBm)	MPR (dB)	
Channel									
Frequency (MHz)									
20	QPSK	1	0	18.36	18.54	18.30			
20	QPSK	1	49	18.29	18.33	18.31	19	0	
20	QPSK	1	99	18.21	18.26	18.15			
20	QPSK	50	0	17.30	17.38	17.35			
20	QPSK	50	24	17.37	17.22	17.38			
20	QPSK	50	50	17.22	17.26	17.28			
20	QPSK	100							



Band 66 Receiver Off / Extremity										
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel				132012	132322	132572				
Frequency (MHz)				1720	1745	1770				
20	QPSK	1	0	18.54	18.83	18.45	19	0		
20	QPSK	1	49	18.80	18.78	18.80				
20	QPSK	1	99	18.37	18.44	18.39				
20	QPSK	50	0	17.61	17.86	17.75	18	1		
20	QPSK	50	24	17.51	17.82	17.73				
20	QPSK	50	50	17.52	17.66	17.75				
20	QPSK	100	0	17.64	17.74	17.69				
20	16QAM	1	0	17.99	17.91	17.92	18	1		
20	16QAM	1	49	17.89	17.94	17.97				
20	16QAM	1	99	17.49	17.49	17.97				
20	16QAM	50	0	16.75	16.87	16.96				
20	16QAM	50	24	16.66	16.62	16.89	17	2		
20	16QAM	50	50	16.59	16.65	16.83				
20	16QAM	100	0	16.64	16.73	16.83				
20	64QAM	1	0	16.84	16.99	16.93				
20	64QAM	1	49	16.84	16.96	16.97	17	2		
20	64QAM	1	99	16.79	16.88	16.95				
20	64QAM	50	0	15.65	15.63	15.76				
20	64QAM	50	24	15.57	15.60	15.86	16	3		
20	64QAM	50	50	15.53	15.67	15.69				
20	64QAM	100	0	15.66	15.73	15.77				
Channel				132047	132322	132597				
Frequency (MHz)				1717.5	1745	1772.5				
15	QPSK	1	0	18.44	18.80	18.75	19	0		
15	QPSK	1	37	18.62	18.51	18.82				
15	QPSK	1	74	18.34	18.55	18.50				
15	QPSK	36	0	17.50	17.66	17.75	18	1		
15	QPSK	36	20	17.52	17.68	17.75				
15	QPSK	36	39	17.65	17.59	17.63				
15	QPSK	75	0	17.52	17.76	17.68				
15	16QAM	1	0	17.36	17.37	17.53	18	1		
15	16QAM	1	37	17.57	17.48	17.69				
15	16QAM	1	74	17.31	17.35	17.37				
15	16QAM	36	0	16.62	16.72	16.86				
15	16QAM	36	20	16.64	16.83	16.83	17	2		
15	16QAM	36	39	16.52	16.65	16.90				
15	16QAM	75	0	16.60	16.79	16.73				
15	64QAM	1	0	16.20	16.30	16.50				
15	64QAM	1	37	16.40	16.57	16.57	17	2		
15	64QAM	1	74	16.20	16.30	16.25				
15	64QAM	36	0	15.63	15.71	15.83				
15	64QAM	36	20	15.59	15.87	15.83	16	3		
15	64QAM	36	39	15.58	15.71	15.64				
15	64QAM	75	0	15.69	15.76	15.84				
Channel				132022	132322	132622				
Frequency (MHz)				1715	1745	1775				
10	QPSK	1	0	18.56	18.51	18.65	19	0		
10	QPSK	1	25	18.61	18.58	18.75				
10	QPSK	1	49	18.47	18.47	18.50				
10	QPSK	25	0	17.57	17.76	17.85	18	1		
10	QPSK	25	12	17.57	17.58	17.69				
10	QPSK	25	25	17.63	17.72	17.68				
10	QPSK	50	0	17.66	17.64	17.78				
10	16QAM	1	0	17.53	17.38	17.45	18	1		
10	16QAM	1	25	17.51	17.45	17.39				
10	16QAM	1	49	17.57	17.29	17.27				
10	16QAM	25	0	16.62	16.71	16.93				
10	16QAM	25	12	16.57	16.67	16.71	17	2		
10	16QAM	25	25	16.60	16.74	16.68				
10	16QAM	50	0	16.74	16.83	16.75				
10	64QAM	1	0	16.56	16.47	16.80				
10	64QAM	1	25	16.38	16.84	16.76	17	2		
10	64QAM	1	49	16.47	16.53	16.50				
10	64QAM	25	0	15.57	15.67	15.84				
10	64QAM	25	12	15.63	15.63	15.78	16	3		
10	64QAM	25	25	15.67	15.67	15.63				
10	64QAM	50	0	15.52	15.77	15.72				
Channel				131997	132322	132647				
Frequency (MHz)				1712.5	1745	1777.5				
5	QPSK	1	0	18.29	18.40	18.46	19	0		
5	QPSK	1	12	18.75	18.76	18.76				
5	QPSK	1	24	18.30	18.39	18.41				
5	QPSK	12	0	17.47	17.56	17.73	18	1		
5	QPSK	12	7	17.51	17.62	17.65				
5	QPSK	12	13	17.64	17.61	17.73				
5	QPSK	25	0	17.46	17.54	17.65				
5	16QAM	1	0	17.82	17.74	17.78	18	1		
5	16QAM	1	12	17.50	17.49	17.43				
5	16QAM	1	24	17.65	17.73	17.72				
5	16QAM	12	0	16.44	16.56	16.74	17	2		
5	16QAM	12	7	16.51	16.79	16.72				
5	16QAM	12	13	16.56	16.68	16.70				
5	16QAM	25	0	16.64	16.74	16.68				
5	64QAM	1	0	16.52	16.60	16.60	17	2		
5	64QAM	1	12	16.90	16.74	16.99				
5	64QAM	1	24	16.56	16.51	16.62				
5	64QAM	12	0	15.38	15.50	15.67				
5	64QAM	12	7	16.47	16.75	16.58	16	3		
5	64QAM	12	13	15.40	15.48	15.62				
5	64QAM	25	0	15.62	15.64	15.73				
Channel				131987	132322	132657				
Frequency (MHz)				1711.5	1745	1778.5				
3	QPSK	1	0	18.50	18.52	18.63	19	0		
3	QPSK	1	8	18.54	18.59	18.52				
3	QPSK	1	14	18.60	18.66	18.51				
3	QPSK	8	0	17.47	17.53	17.57	18	1		
3	QPSK	8	4	17.51	17.53	17.62				
3	QPSK	8	7	17.48	17.60	17.58				
3	QPSK	15	0	17.35	17.61	17.51				
3	16QAM	1	0	17.37	17.54	17.61				
3	16QAM	1	8	17.38	17.42	17.68	18	1		
3	16QAM	1	14	17.39	17.51	17.58				
3	16QAM	8	0	16.54	16.61	16.49				
3	16QAM	8	4	16.60	16.68	16.67	17	2		
3	16QAM	8	7	16.52	16.72	16.64				
3	16QAM	15	0	16.33	16.49	16.51				
3	64QAM	1	0	16.74	16.83	16.49				
3	64QAM	1	8	16.71	16.72	16.70	17	2		
3	64QAM	1	14	16.78	16.67	16.58				
3	64QAM	8	0	15.48	15.86	15.67				
3	64QAM	8	4	15.58	15.79	15.70	16	3		
3	64QAM	8	7	15.41	15.84	15.72				
3	64QAM	15	0	15.42	15.77	15.61				
Channel				131979	132322	132655				
Frequency (MHz)				1710.7	1745	1779.3				
1.4	QPSK	1	0	18.20	18.44	18.42	19	0		
1.4	QPSK	1	3	18.49	18.63	18.62				
1.4	QPSK	1	5	18.40	18.43	18.43				
1.4	QPSK	3	0	18.49	18.60	18.52				
1.4	QPSK	3	1	18.45	18.47	18.71				
1.4	QPSK	3	3	18.44	18.51	18.71				
1.4	QPSK	6	0	17.28	17.58	17.60	18	1		
1.4	16QAM	1	0	17.30	17.47	17.48				
1.4	16QAM	1	3	17.38	17.73	17.71				
1.4	16QAM	1	5	17.33	17.46	17.51	18	1		
1.4	16QAM	3	0	17.45	17.55	17.66				
1.4	16QAM	3	1	17.58	17.58	17.60				
1.4	16QAM	3	3	17.43	17.70	17.65				
1.4	16QAM	6	0	16.54	16.59	16.48	17	2		
1.4	64QAM	1	0	16.61	16.57	16.70				
1.4	64QAM	1	3	16.72	16					

Full Power Mode

2.4GHz WLAN		Ant 1				
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	15.29	16.00	100.00
		6	2437	17.03	18.00	
		11	2462	15.66	16.00	
	802.11g 6Mbps	1	2412	14.25	16.00	100.00
		6	2437	15.08	16.00	
		11	2462	12.12	14.00	
	802.11n-HT20 MCS0	1	2412	13.47	14.00	100.00
		6	2437	14.75	16.00	
		11	2462	11.82	12.00	

BT EDR

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	6.26	4.17	4.14
	CH 39	2441	7.14	5.60	5.48
	CH 78	2480	6.71	4.84	4.87
Tune-up Limit			8.5	6.5	6.5

BT LE

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	-5.33
	CH 19	2440	-4.11
	CH 39	2480	-4.24
Tune-up Limit			-4