



# FCC RF Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2143-1  
FCC ID : IHDT56ZP3  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter  
TEST DATE(S) : Jun. 09, 2021 ~ Jun. 17, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer ..... 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 6

1.5 Modification of EUT ..... 6

1.6 Testing Location ..... 6

1.7 Test Software ..... 6

1.8 Applicable Standards..... 7

1.9 Specification of Accessory..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

2.1 Carrier Frequency Channel ..... 8

2.2 Test Mode..... 9

2.3 Connection Diagram of Test System..... 10

2.4 Support Unit used in test configuration and system ..... 10

2.5 EUT Operation Test Setup ..... 11

2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

3.1 Number of Channel Measurement ..... 12

3.2 Hopping Channel Separation Measurement ..... 14

3.3 Dwell Time Measurement..... 20

3.4 20dB Bandwidth Measurement ..... 22

3.5 Output Power Measurement..... 28

3.6 Conducted Band Edges Measurement..... 29

3.7 Conducted Spurious Emission Measurement ..... 36

3.8 Radiated Band Edges and Spurious Emission Measurement ..... 46

3.9 AC Conducted Emission Measurement..... 50

3.10 Antenna Requirements ..... 52

**4 LIST OF MEASURING EQUIPMENT ..... 53**

**5 UNCERTAINTY OF EVALUATION..... 54**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	N/A	Report only	-
-	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.33 dB at 32.910 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 16.07 dB at 0.180 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203	Pass	-

**Remark:** Not required means after assessing, test items are not necessary to carry out.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2143-1
FCC ID	IHDT56ZP3
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20 WLAN 2.4GHz 802.11ac/ax VHT20/HE20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a/n HT20/HT40 WLAN 6GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 6GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC and GNSS
IMEI Code	Conducted: 353121920026637/353121920026645 Conduction: 353121920024616/353121920024624 Radiation: 353121920042550/353121920042568
HW Version	DVT2
SW Version	RRG31.35
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth BR(1Mbps) : 10.60 dBm (0.0115 W) Bluetooth EDR (2Mbps) : 12.50 dBm (0.0178 W) Bluetooth EDR (3Mbps) : 12.90 dBm (0.0195 W)
<b>Antenna Type / Gain</b>	IFA Antenna with gain -1.50 dBi
<b>Type of Modulation</b>	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH02-SZ	CN1256	421272

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO01-SZ	AUDIX	E3	6.120613b



## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salom)	Model Name	MC-301
AC Adapter 1(EU)	Brand Name	Motorola(Salom)	Model Name	MC-302
AC Adapter 1(UK)	Brand Name	Motorola(Salom)	Model Name	MC-303
AC Adapter 1(Brazil)	Brand Name	Motorola(Salom)	Model Name	MC-307
AC Adapter 1(AU)	Brand Name	Motorola(Salom)	Model Name	MC-305
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-301
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-302
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-303
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-305
AC Adapter 2(IN)	Brand Name	Motorola(Acbel)	Model Name	MC-304
AC Adapter 3(Brazil)	Brand Name	Motorola(Flex)	Model Name	MC-307
Battery	Brand Name	Motorola(ATL)	Model Name	MB40
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	MH191(SH38C81577)
Earphone 2	Brand Name	Motorola(LCHSE)	Model Name	MH191(SH38C81576)
Earphone 3 (Brazil only)	Brand Name	Motorola(Lyand)	Model Name	MH181(SH38C37773)
Earphone 4 (Brazil only)	Brand Name	Motorola(Cosonic)	Model Name	MH181(SH38C44959)
USB Cable 1	Brand Name	Motorola(Luxshare)	Model Name	SC18D13217
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	SC18D13215
USB Cable 3	Brand Name	Motorola(Cabletech)	Model Name	SC18D13216
Type C to audio cable	Brand Name	Motorola(Luxshare)	Model Name	SC18C27844



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-





## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
Mode 3: CH78_2480 MHz			
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter3) + Battery 1		
<b>Remark:</b> <ol style="list-style-type: none"> <li>1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.</li> <li>2. All the test items are performed with accessories from Part 15B worst case.</li> </ol>			

## 2.3 Connection Diagram of Test System

<For AC Conducted Emission>

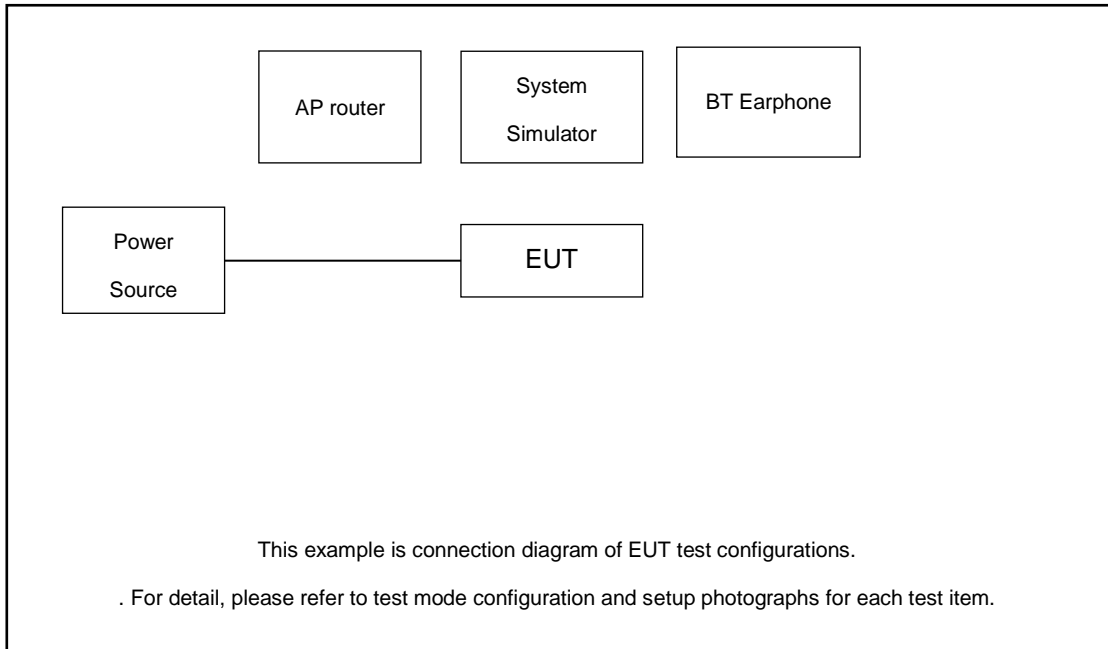

<For RSE>

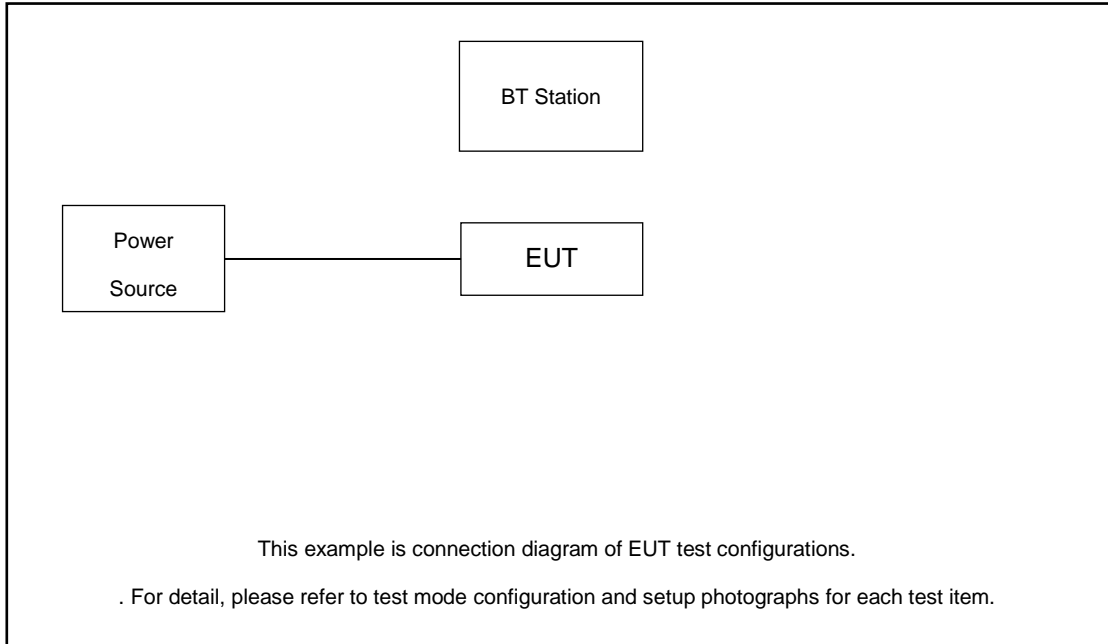

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
------	-----------	------------	------------	--------	------------	------------



1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	BLUETOOTH TESTER	R&S	CBT	N/A	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

### 2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 3.0dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 3.0 + 20 = 23.00(\text{dB}) \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup




##### 3.1.5 Test Result of Number of Hopping Frequency




Please refer to Appendix A.

Number of Hopping Channel Plot on Channel 00 - 78

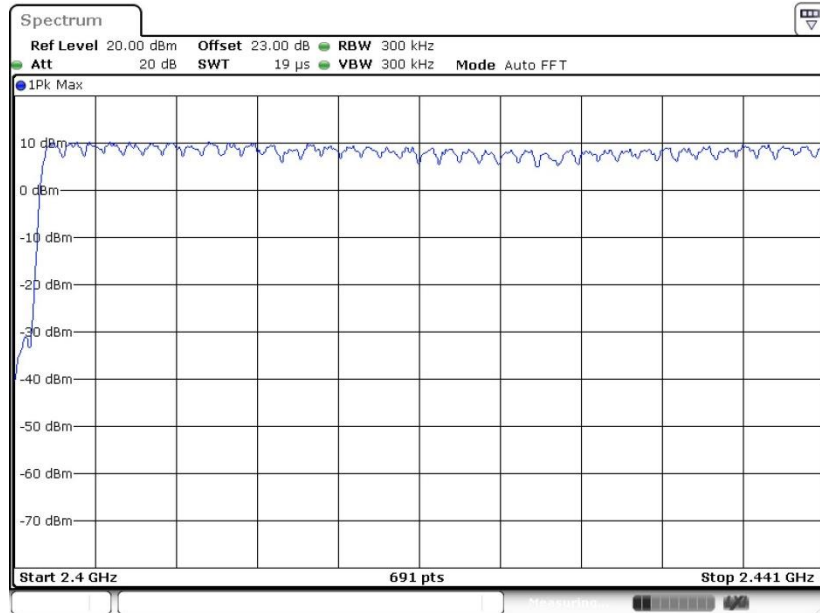

Date: 17.JUN.2021 11:33:54

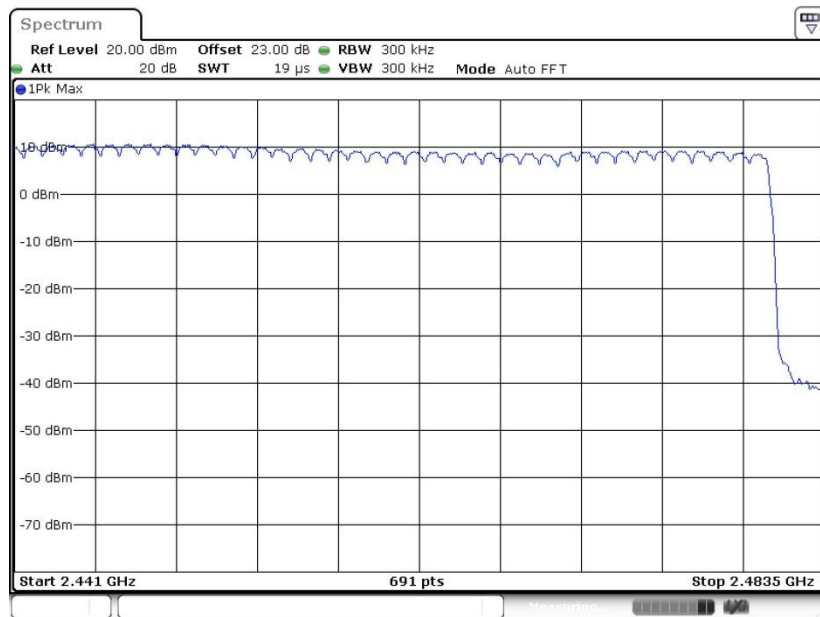

Date: 17.JUN.2021 11:38:43

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup




### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.



<1Mbps>

Channel Separation Plot on Channel 00 - 01

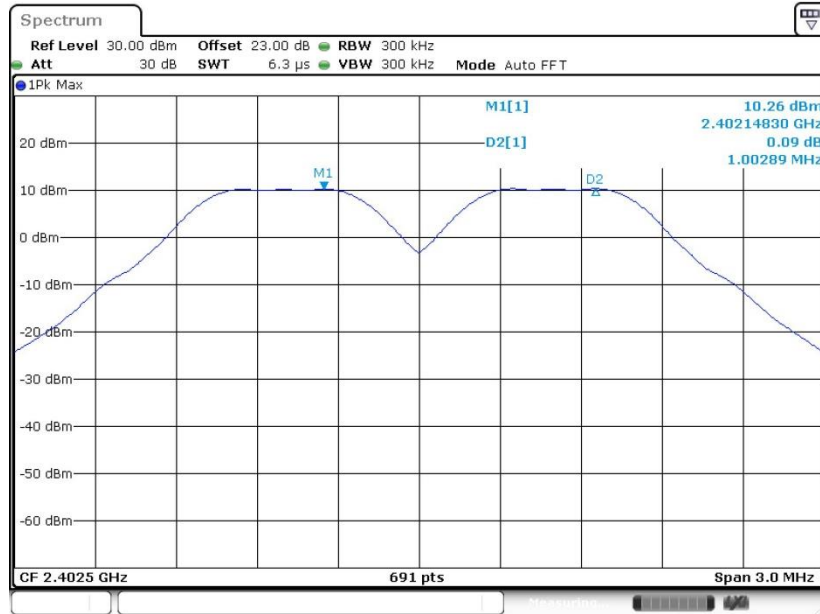

Date: 17.JUN.2021 09:43:32


Channel Separation Plot on Channel 39 - 40



Date: 17.JUN.2021 09:39:07




Channel Separation Plot on Channel 77 - 78

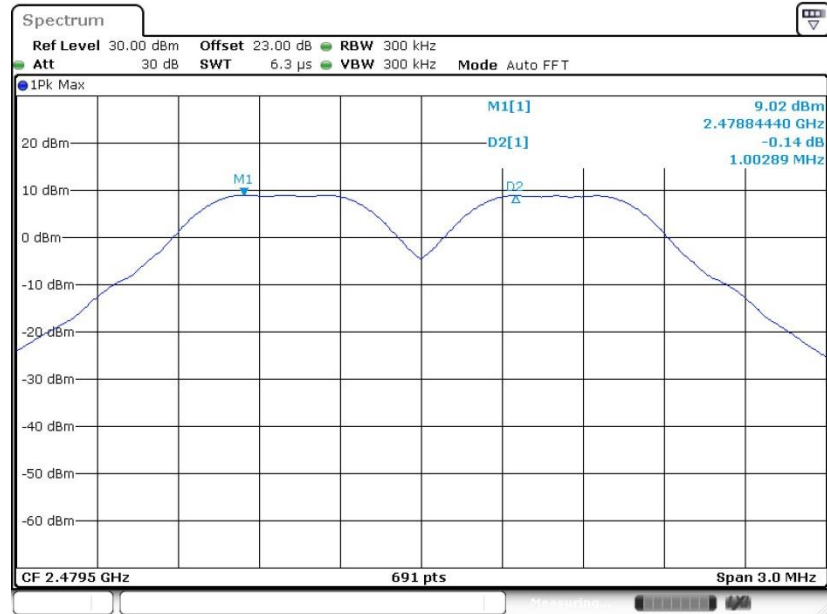

Date: 17.JUN.2021 09:41:08

<2Mbps>

Channel Separation Plot on Channel 00 - 01

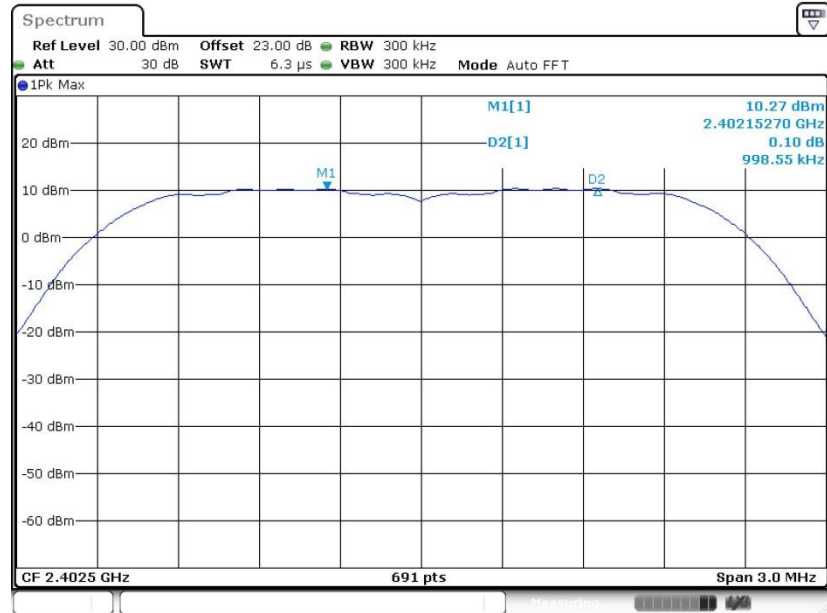


Date: 17.JUN.2021 09:44:51






### Channel Separation Plot on Channel 39 - 40

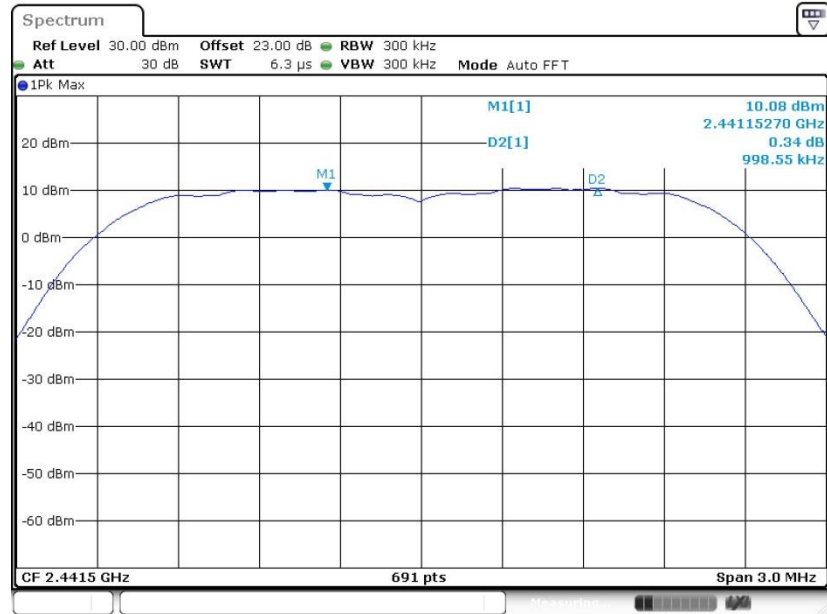

Date: 17.JUN.2021 09:46:01

### Channel Separation Plot on Channel 77 - 78

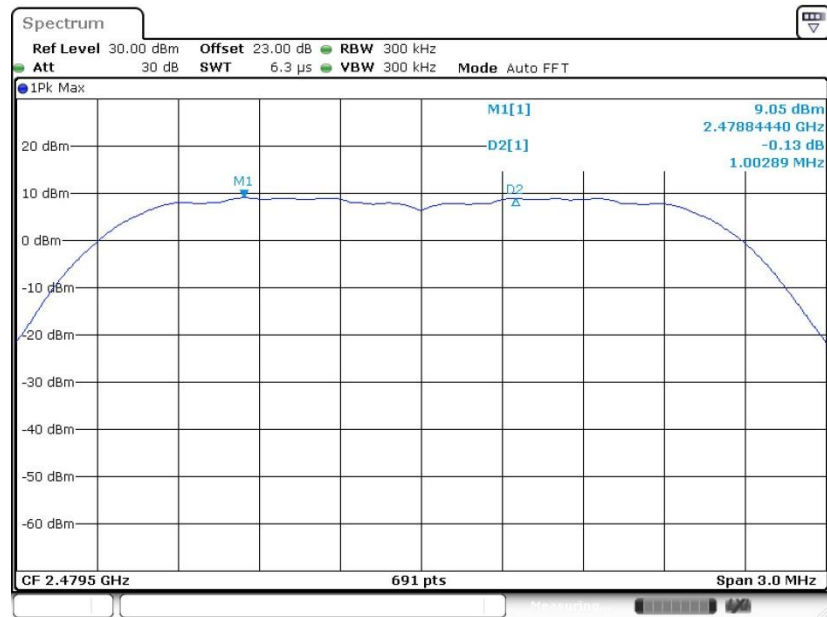


Date: 17.JUN.2021 09:48:13




<3Mbps>

Channel Separation Plot on Channel 00 - 01

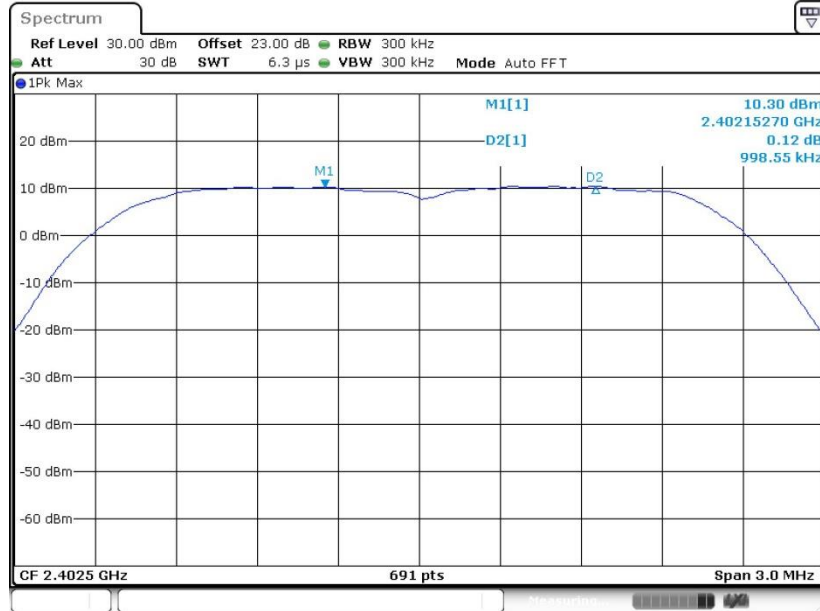

Date: 17.JUN.2021 09:52:38


Channel Separation Plot on Channel 39 - 40

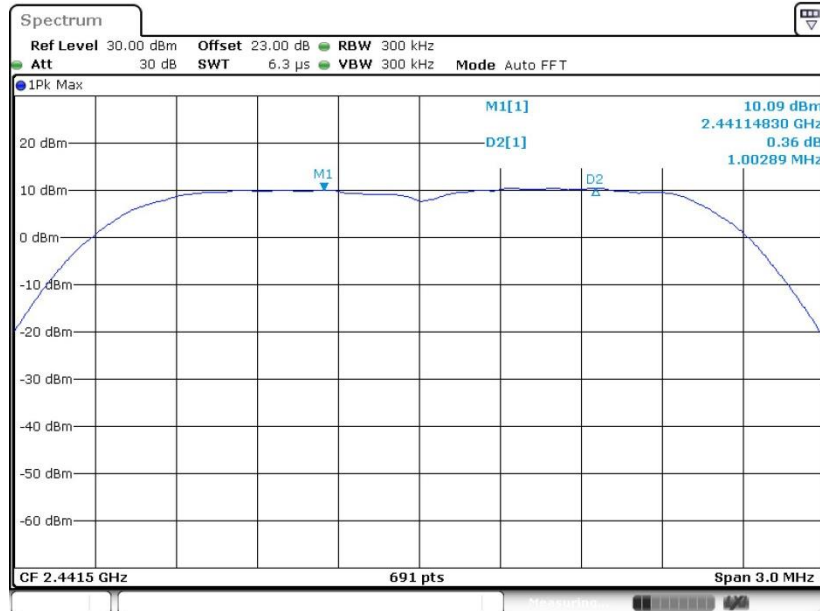

Date: 17.JUN.2021 09:50:44



Channel Separation Plot on Channel 77 - 78

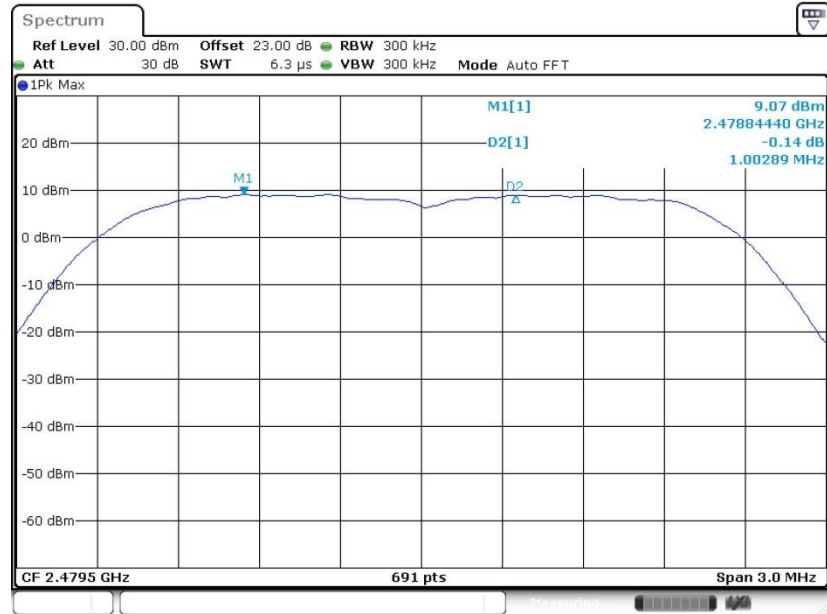

Date: 17.JUN.2021 09:51:42

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup






### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

Package Transfer Time Plot

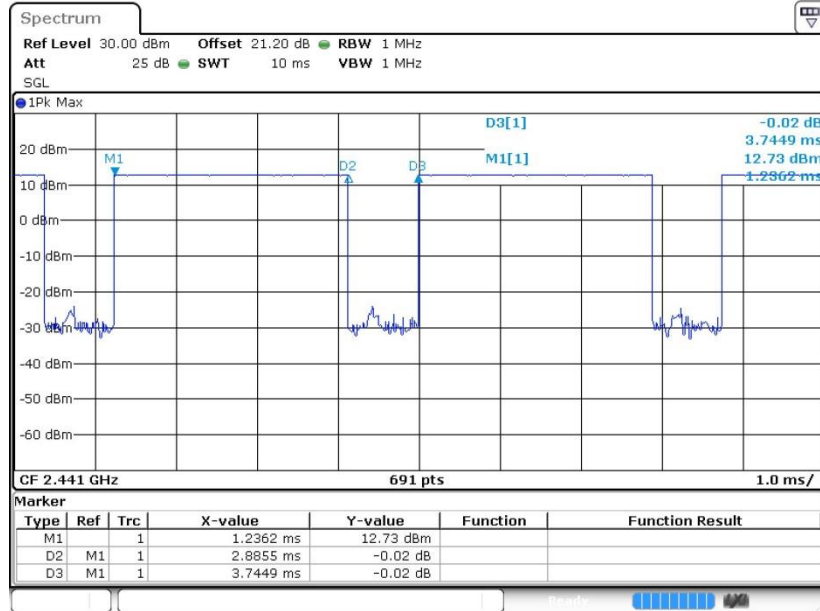

Date: 23.MAY.2021 10:35:30

**Remark:**

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

## 3.4 20dB Bandwidth Measurement

### 3.4.1 Limit of 20dB Bandwidth

Reporting only

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;  
Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

### 3.4.4 Test Setup




### 3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<1Mbps>

20 dB Bandwidth Plot on Channel 00

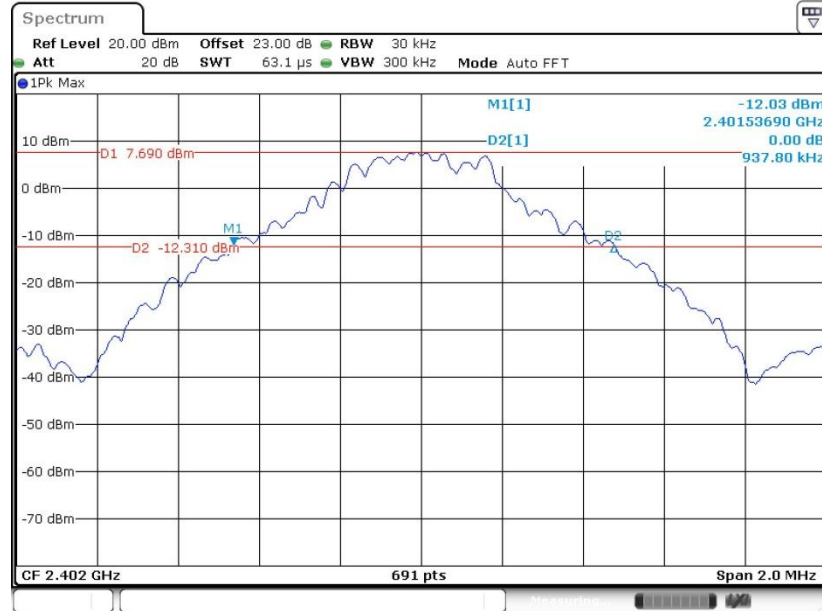

Date: 17.JUN.2021 09:55:06


20 dB Bandwidth Plot on Channel 39

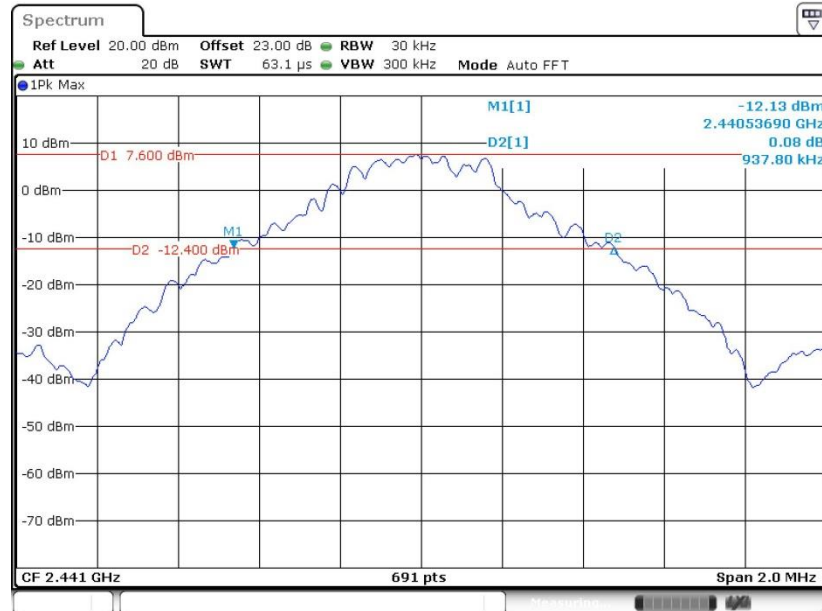

Date: 17.JUN.2021 09:57:01




### 20 dB Bandwidth Plot on Channel 78

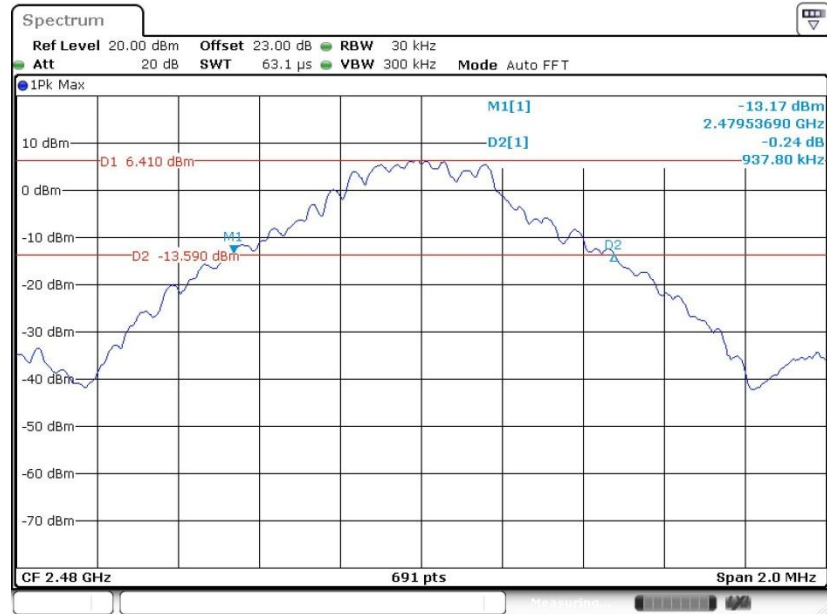

Date: 17.JUN.2021 09:59:10

### <2Mbps>

### 20 dB Bandwidth Plot on Channel 00

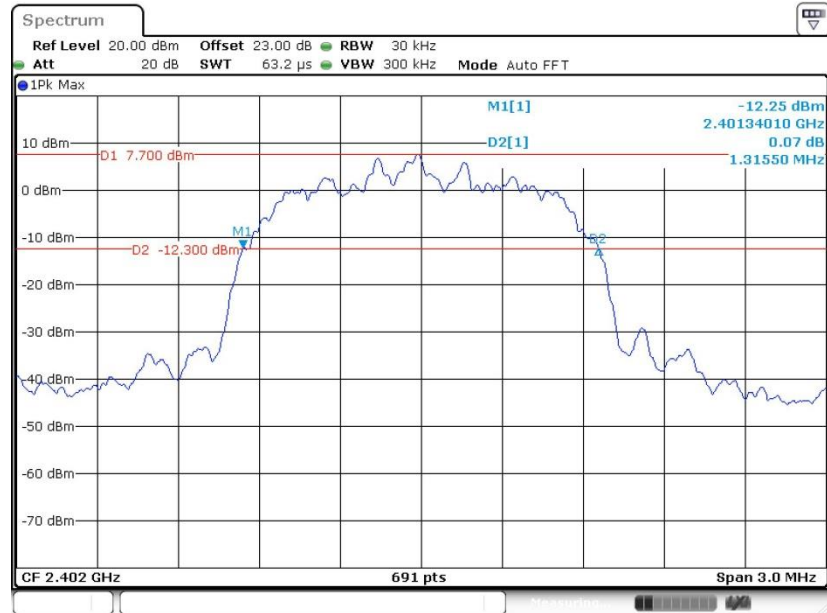

Date: 17.JUN.2021 10:01:30






### 20 dB Bandwidth Plot on Channel 39



Date: 17.JUN.2021 10:03:31

### 20 dB Bandwidth Plot on Channel 78

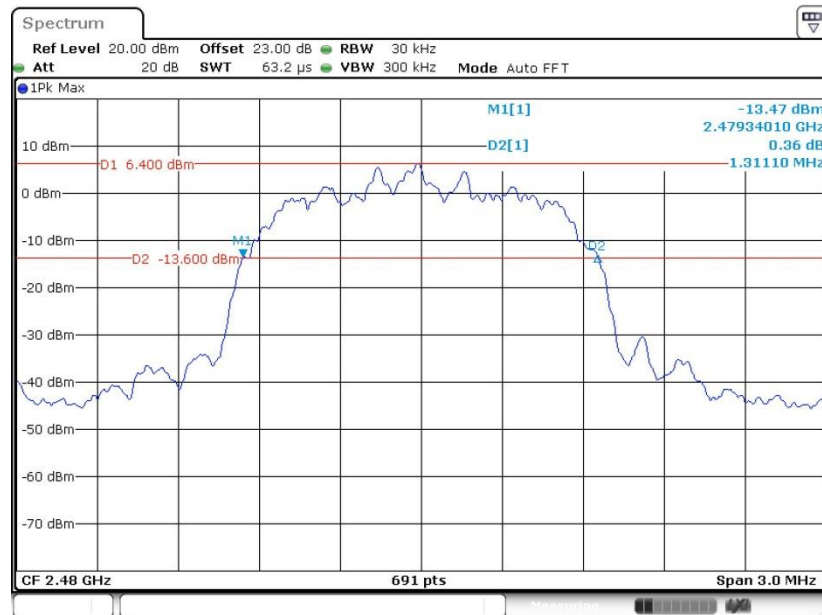


Date: 17.JUN.2021 10:04:38




<3Mbps>

20 dB Bandwidth Plot on Channel 00

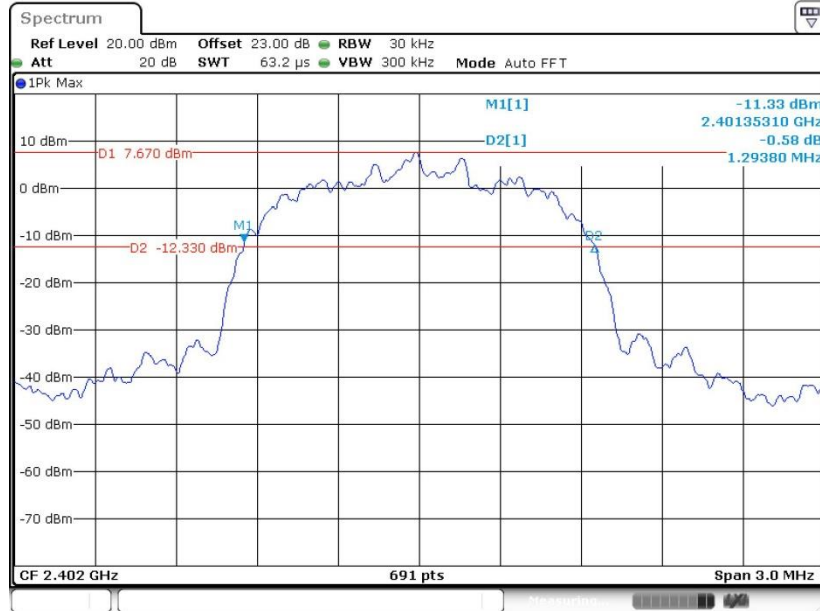

Date: 17.JUN.2021 10:06:19


20 dB Bandwidth Plot on Channel 39

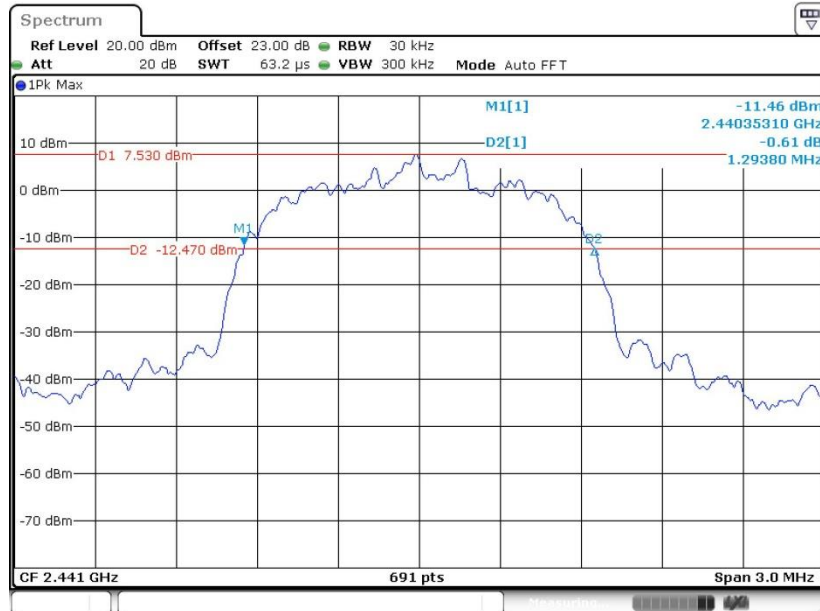

Date: 17.JUN.2021 10:07:45



20 dB Bandwidth Plot on Channel 78

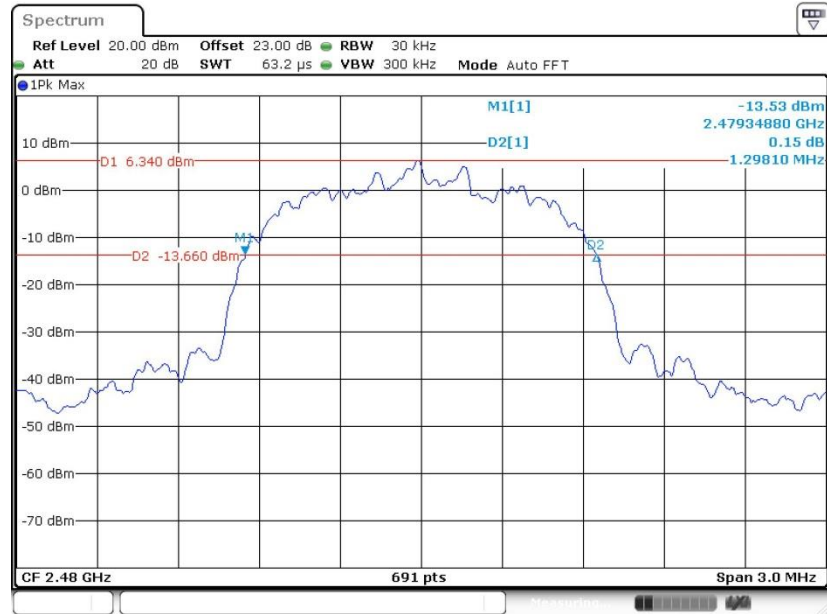

Date: 17.JUN.2021 10:08:42

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

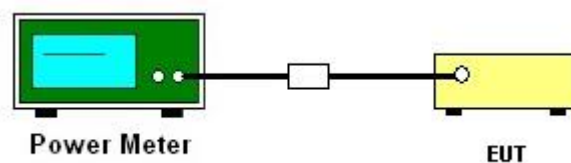

### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup






### 3.6.5 Test Result of Conducted Band Edges


<1Mbps>

#### Low Band Edge Plot on Channel 00

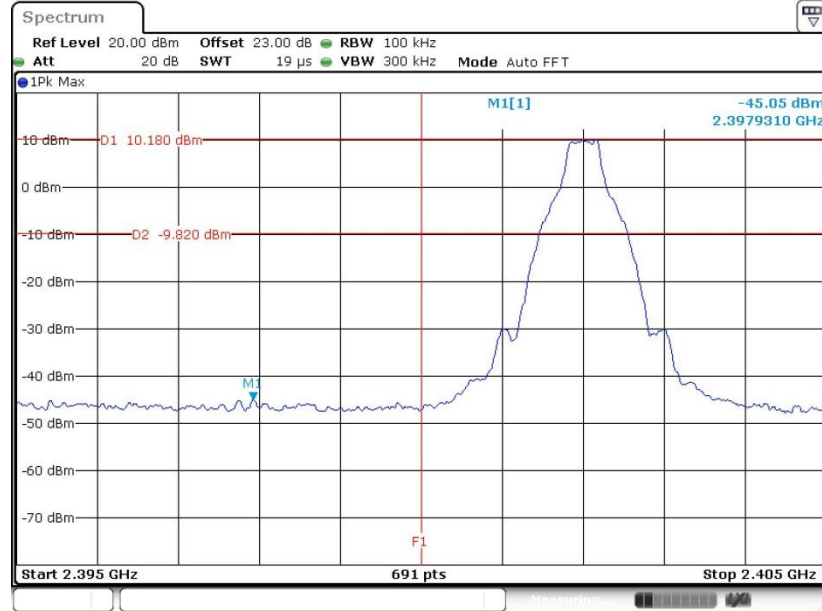

Date: 17.JUN.2021 09:55:40

#### High Band Edge Plot on Channel 78

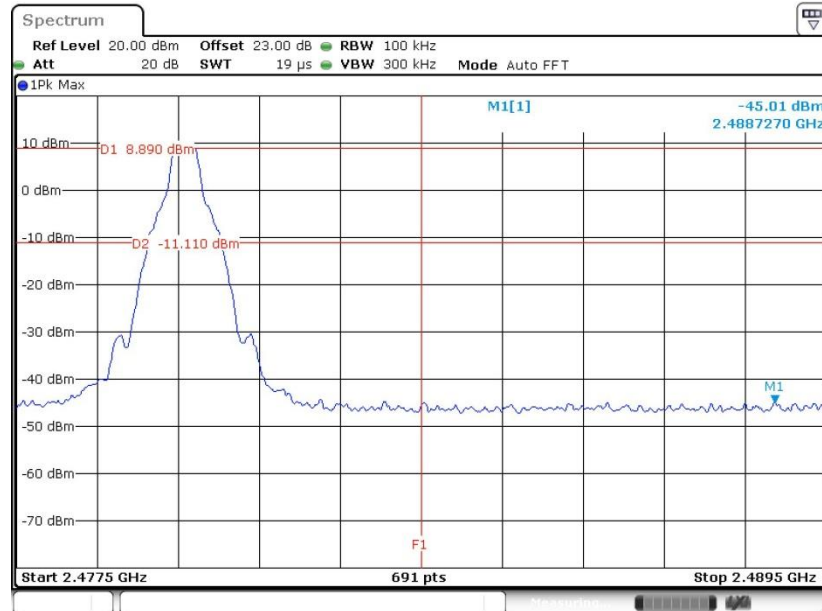


Date: 17.JUN.2021 10:00:07




<2Mbps>

Low Band Edge Plot on Channel 00

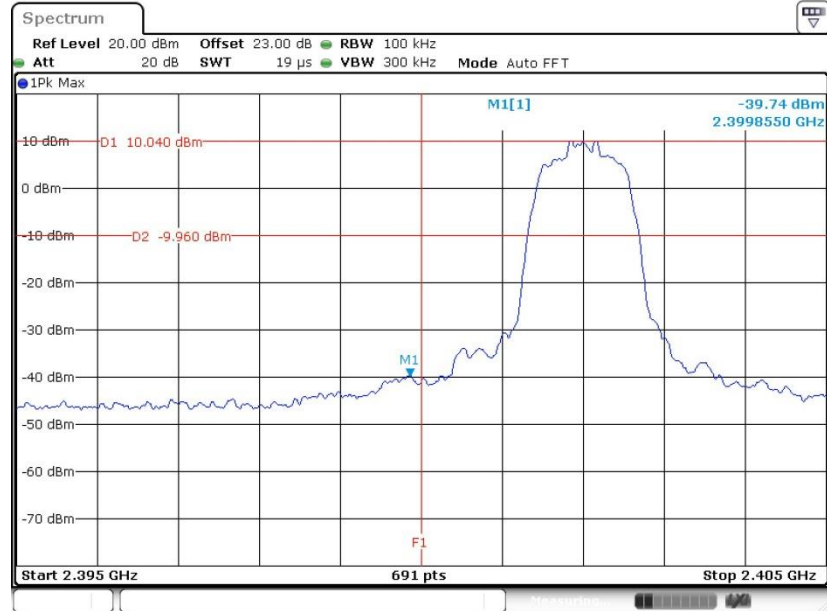

Date: 17.JUN.2021 10:01:51

High Band Edge Plot on Channel 78

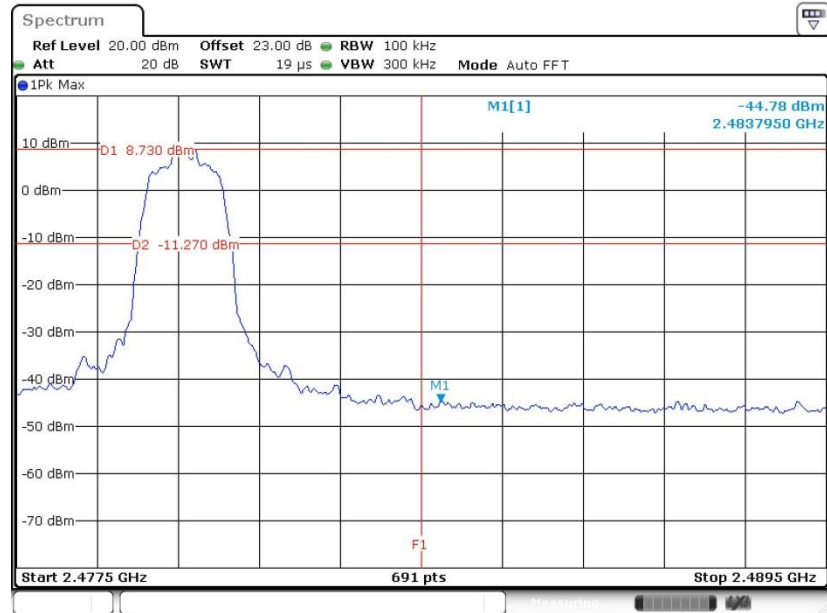


Date: 17.JUN.2021 10:05:01




<3Mbps>

Low Band Edge Plot on Channel 00

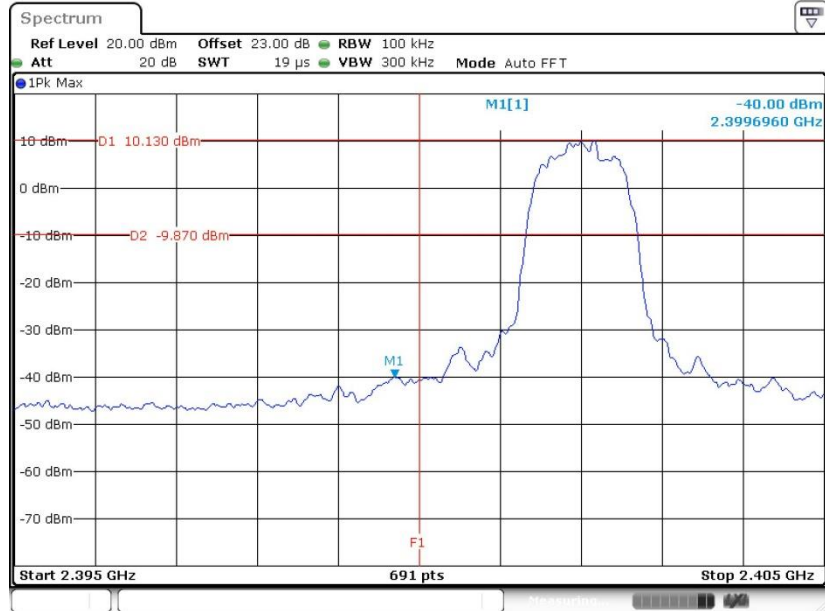

Date: 17.JUN.2021 10:06:39

High Band Edge Plot on Channel 78

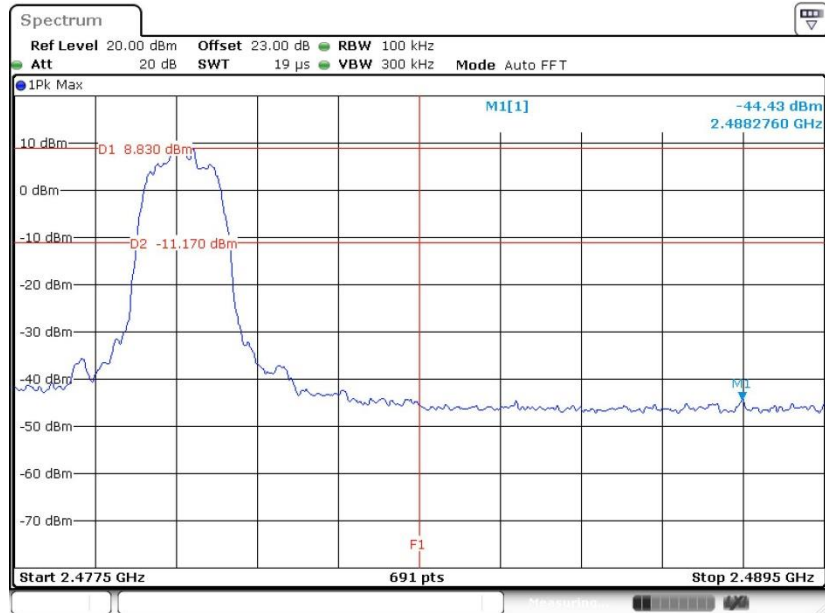

Date: 17.JUN.2021 10:09:02






### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


<1Mbps>

#### Hopping Mode Low Band Edge Plot

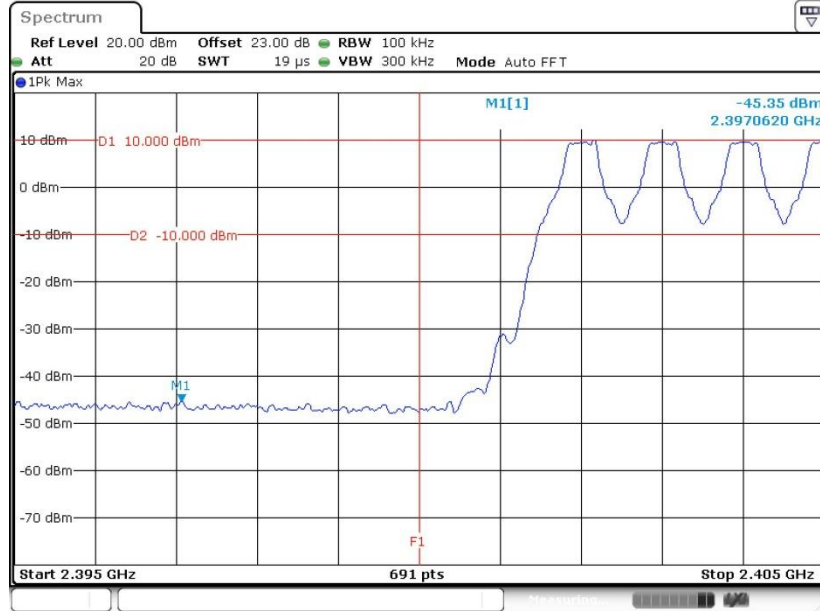

Date: 17.JUN.2021 11:18:40

#### Hopping Mode High Band Edge Plot

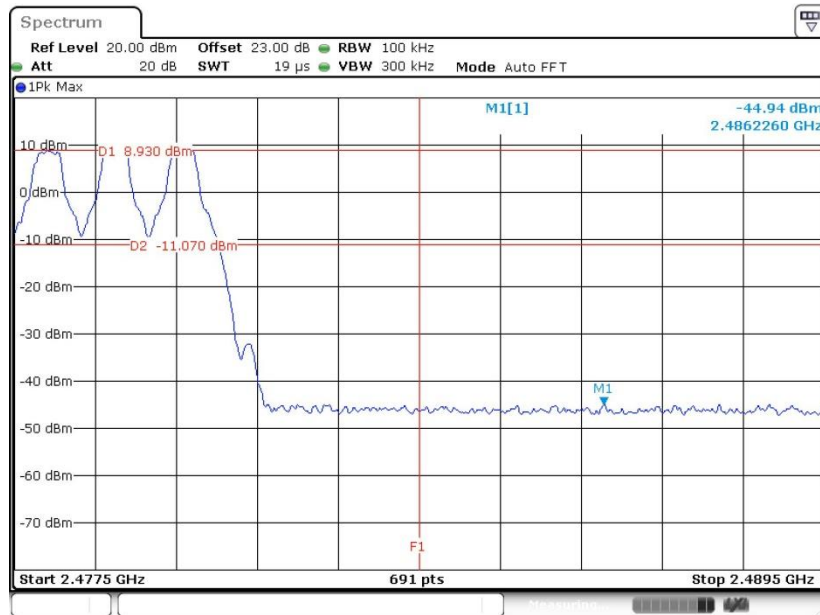


Date: 17.JUN.2021 11:19:03




<2Mbps>

Hopping Mode Low Band Edge Plot

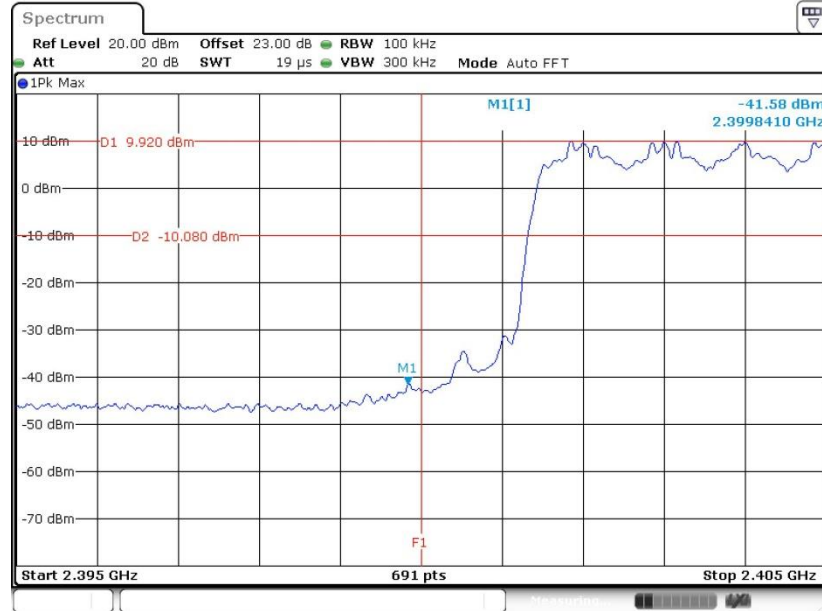

Date: 17.JUN.2021 11:20:12

Hopping Mode High Band Edge Plot

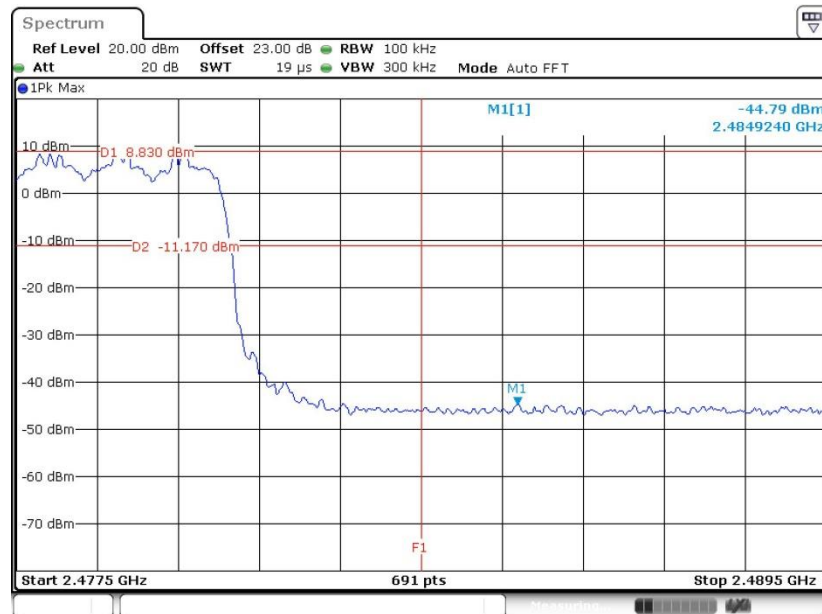


Date: 17.JUN.2021 11:20:42




<3Mbps>

Hopping Mode Low Band Edge Plot

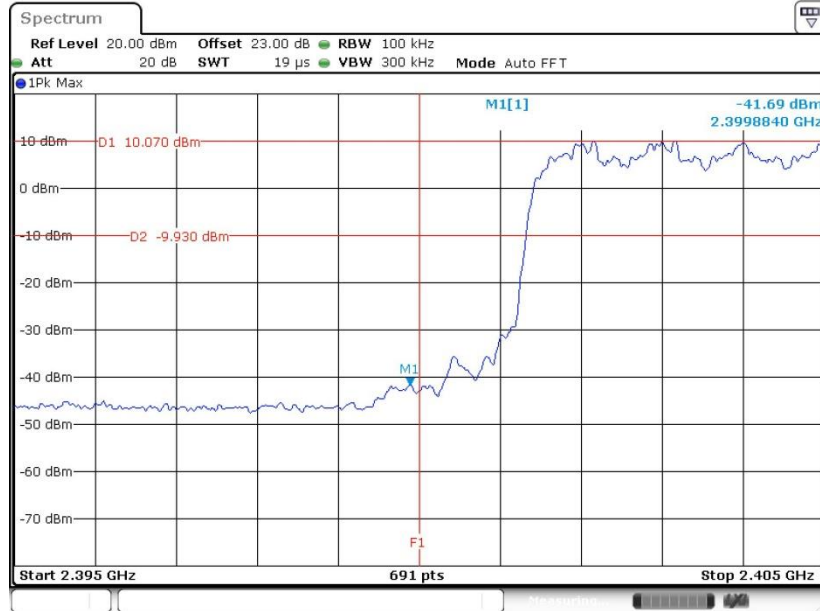

Date: 17.JUN.2021 11:21:25

Hopping Mode High Band Edge Plot

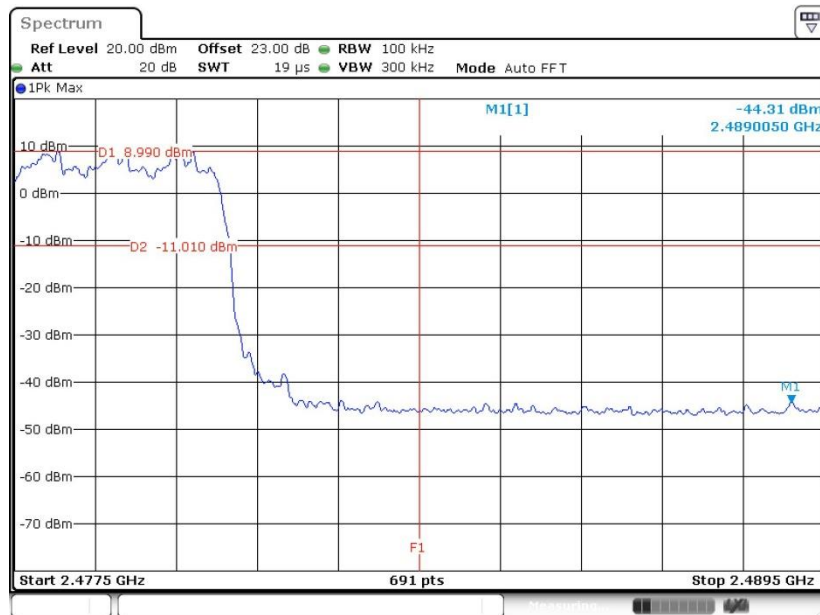

Date: 17.JUN.2021 11:21:58

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

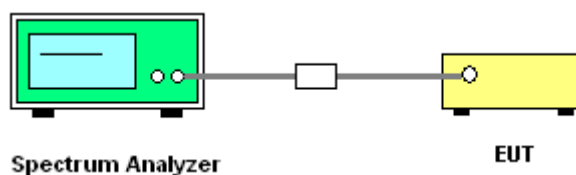




### 3.7.5 Test Result of Conducted Spurious Emission


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

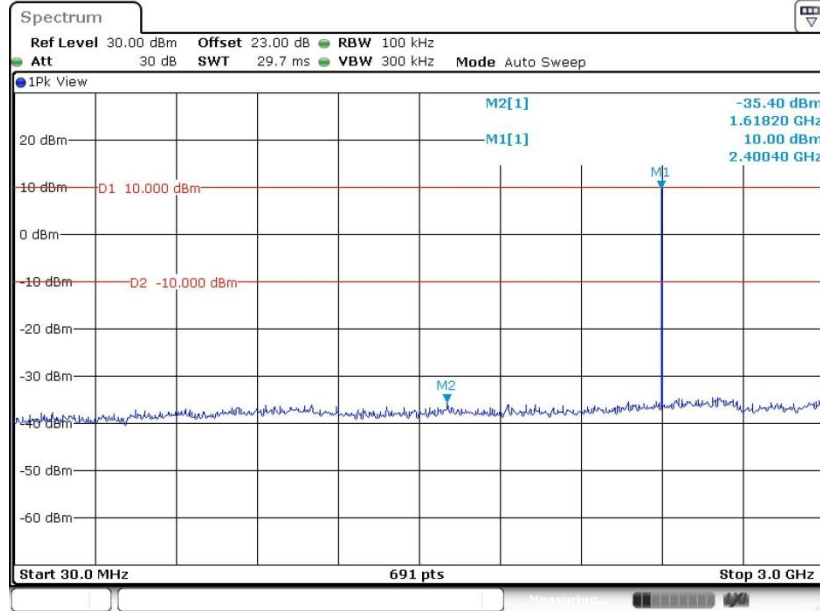

Date: 17.JUN.2021 10:13:32


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

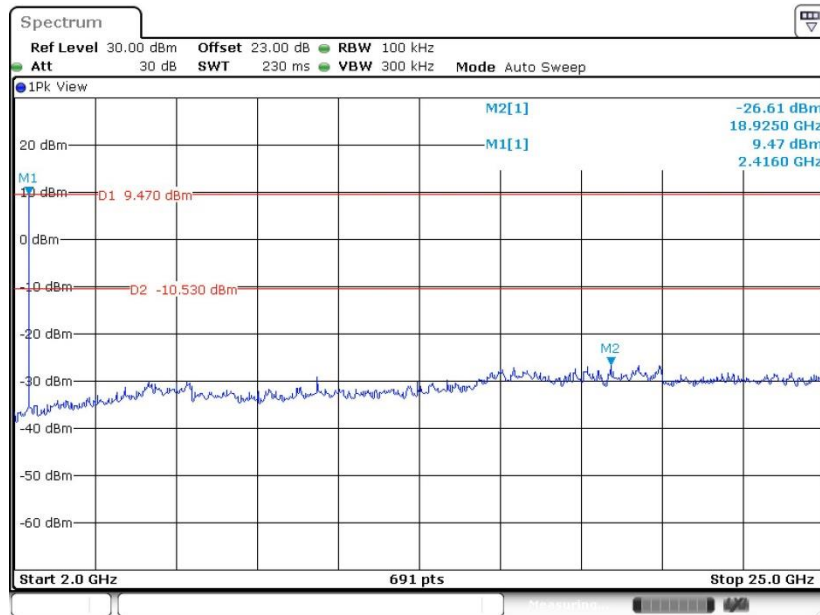

Date: 17.JUN.2021 10:14:02




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

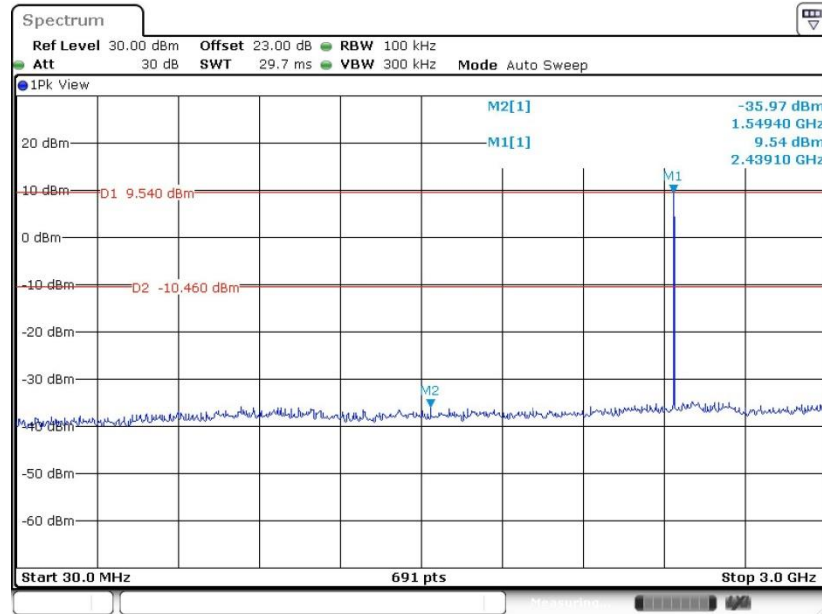

Date: 17.JUN.2021 10:16:22


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

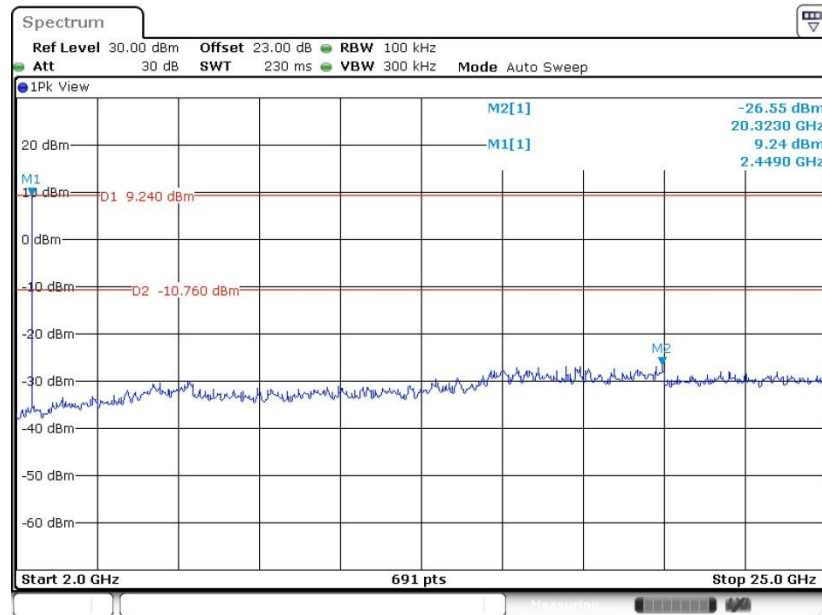

Date: 17.JUN.2021 10:17:13




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

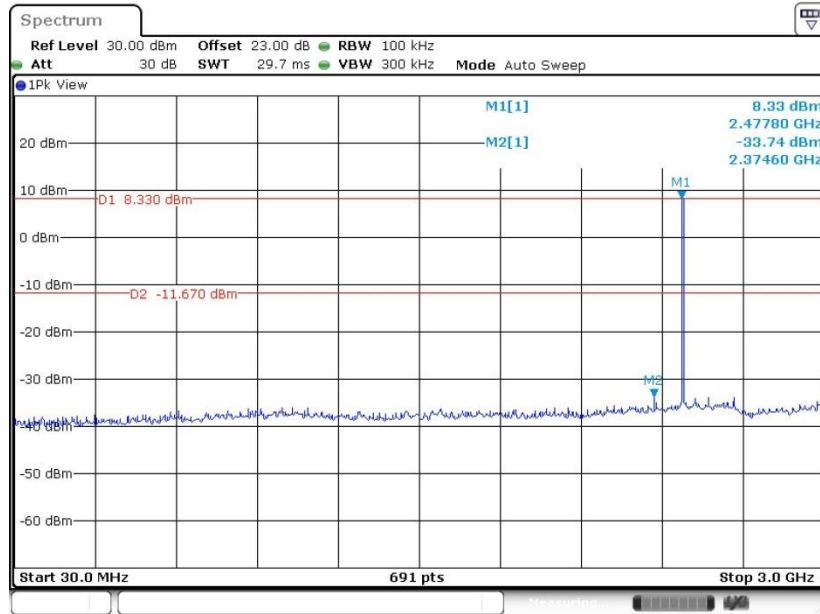

Date: 17.JUN.2021 10:18:55

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

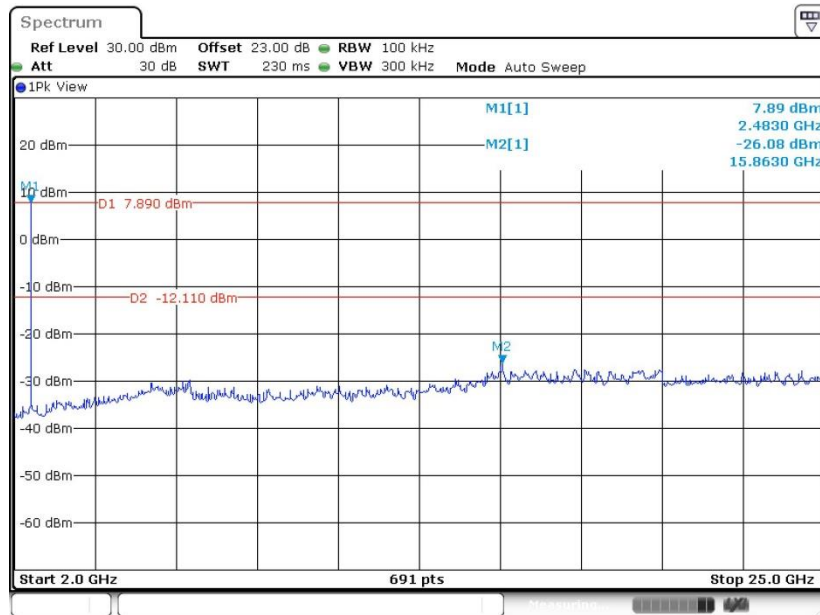


Date: 17.JUN.2021 10:19:26




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

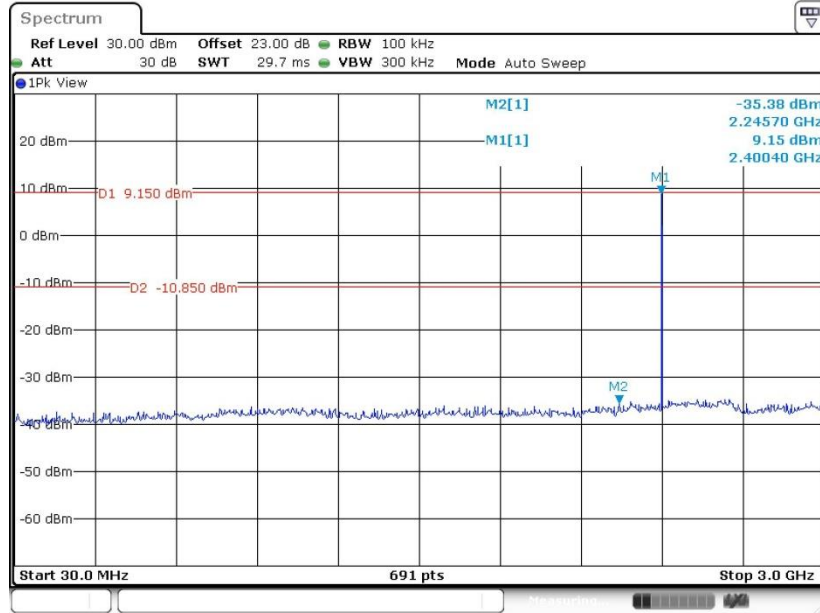

Date: 17.JUN.2021 10:36:16

CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

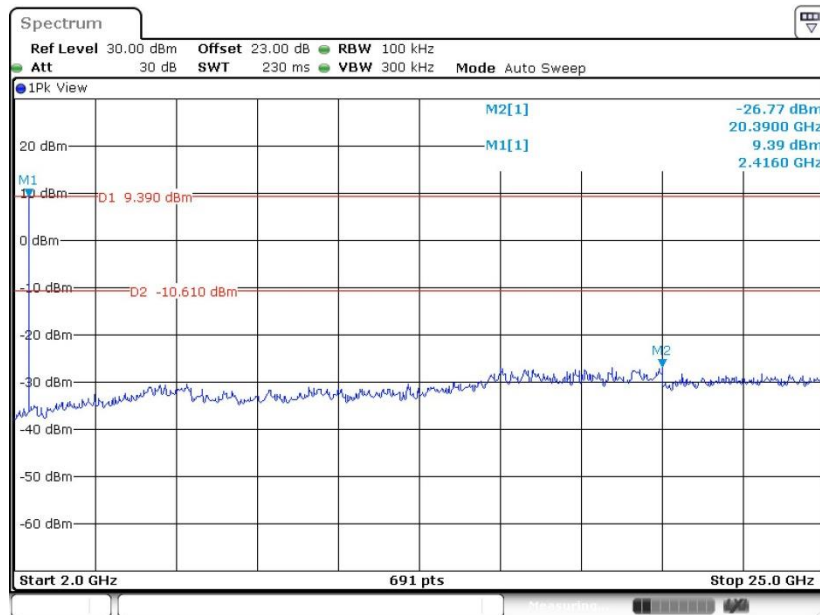


Date: 17.JUN.2021 10:37:12






CSE Plot on Ch 39 between 30MHz ~ 3 GHz

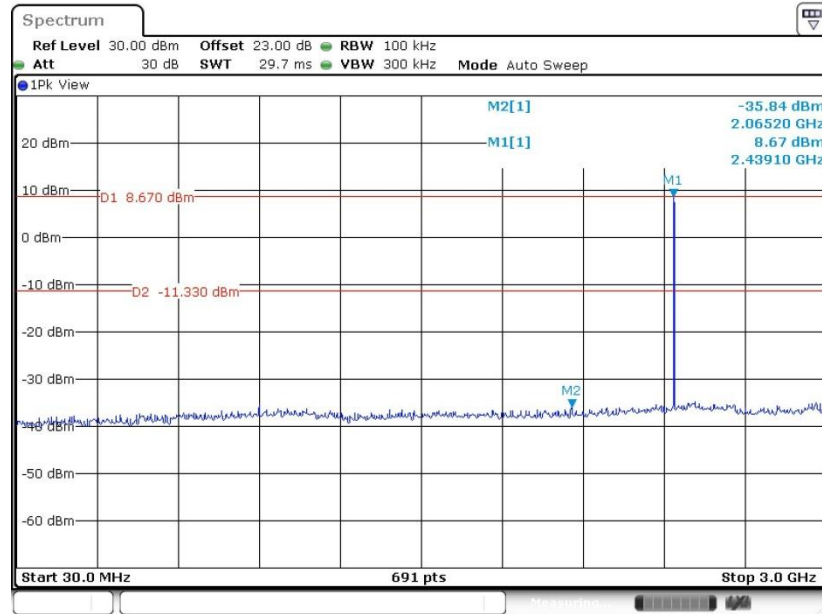

Date: 17.JUN.2021 10:47:47


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

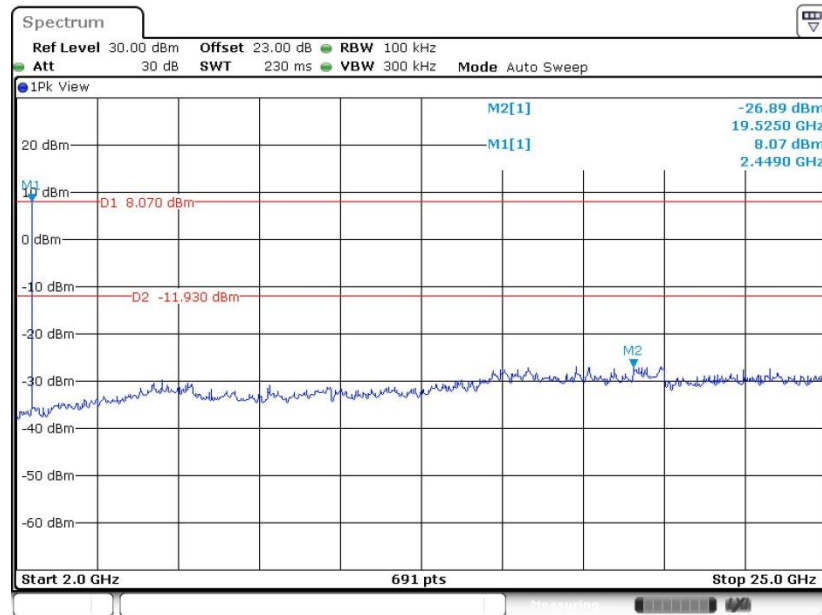

Date: 17.JUN.2021 10:48:52




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

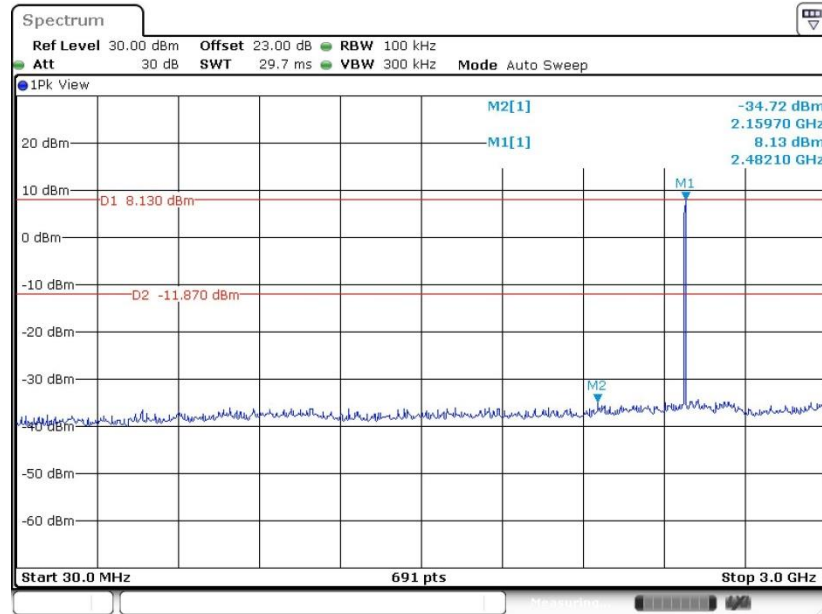

Date: 17.JUN.2021 10:50:21

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

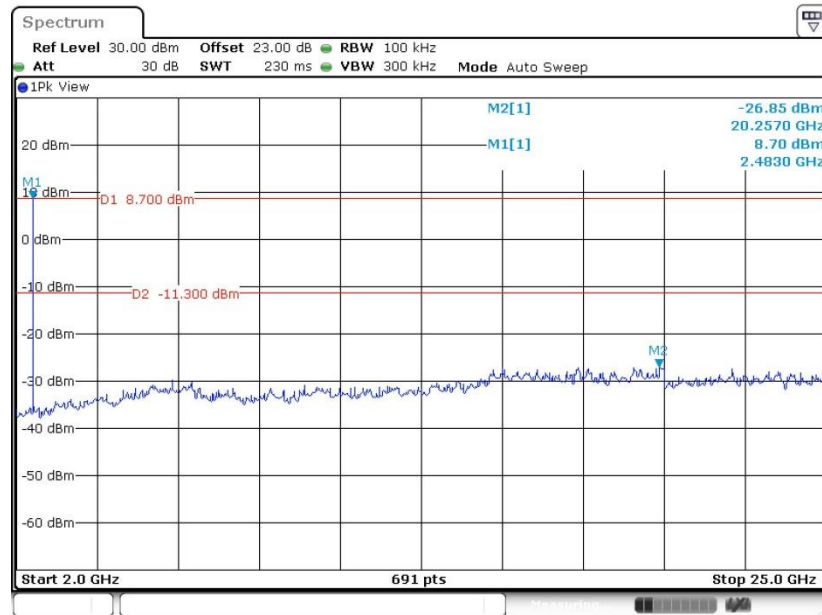


Date: 17.JUN.2021 10:50:52




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

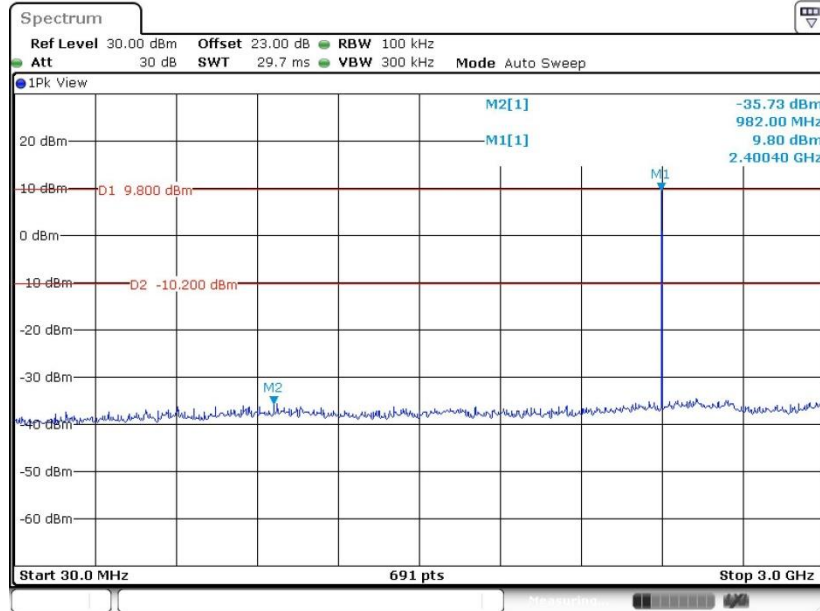

Date: 17.JUN.2021 10:57:03


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

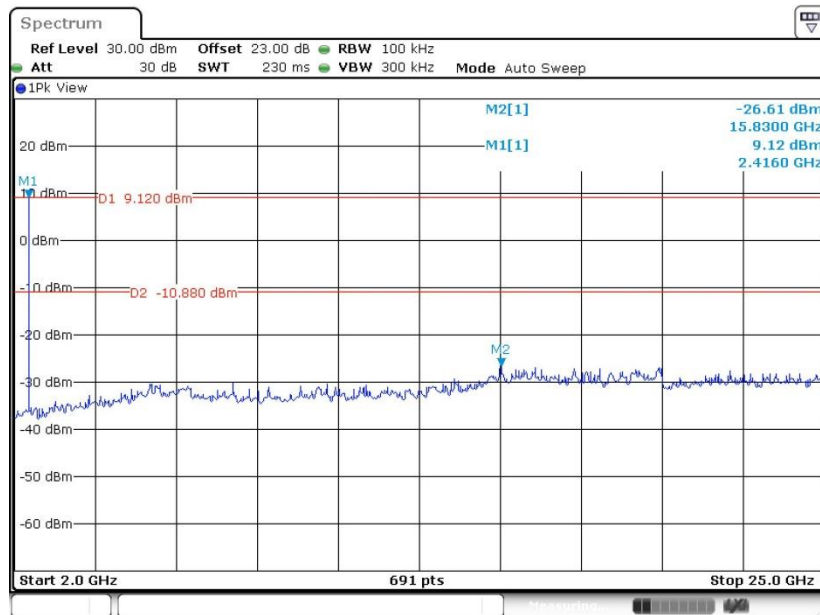

Date: 17.JUN.2021 10:57:32




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

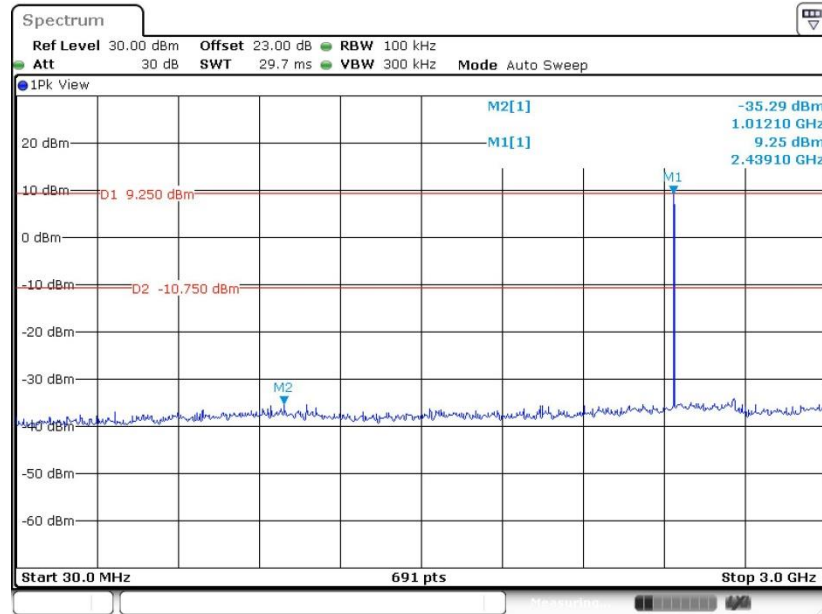

Date: 17.JUN.2021 11:06:24


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

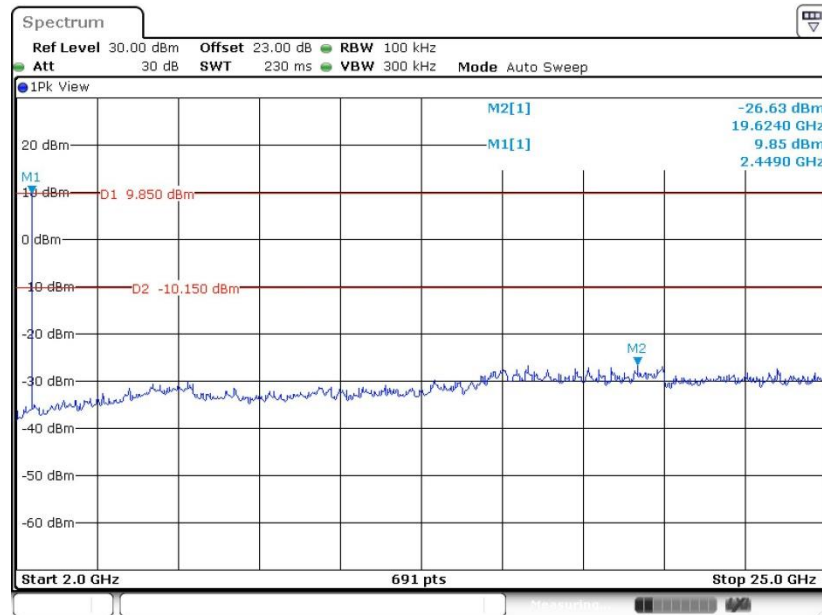

Date: 17.JUN.2021 11:07:10




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

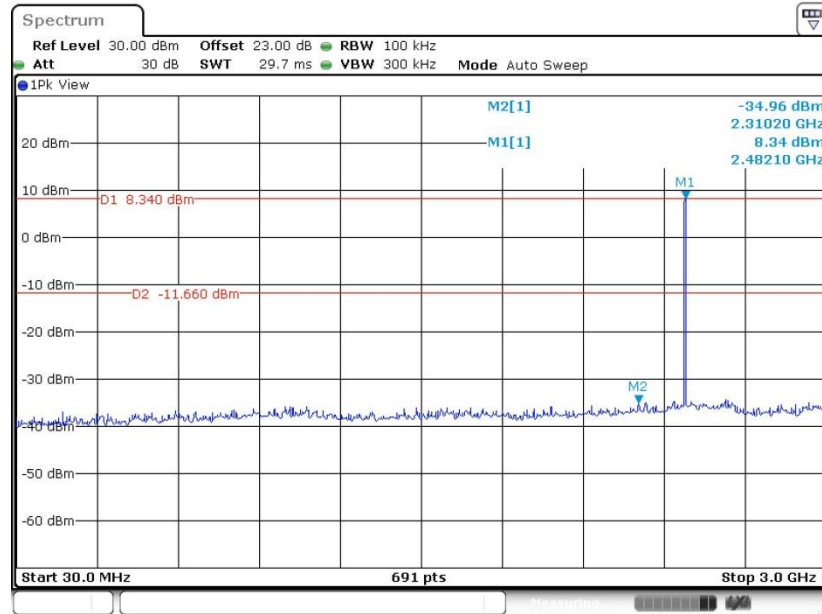

Date: 17.JUN.2021 11:15:49

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

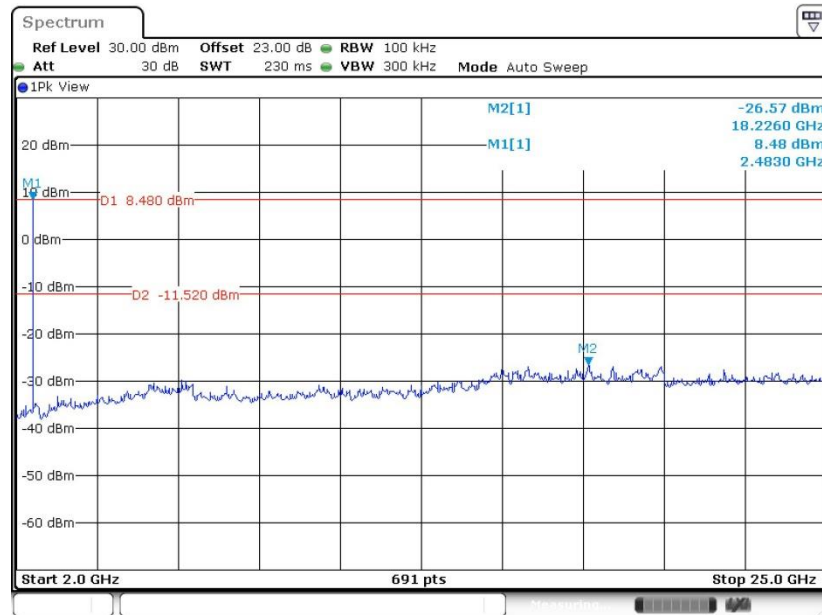

Date: 17.JUN.2021 11:16:19



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

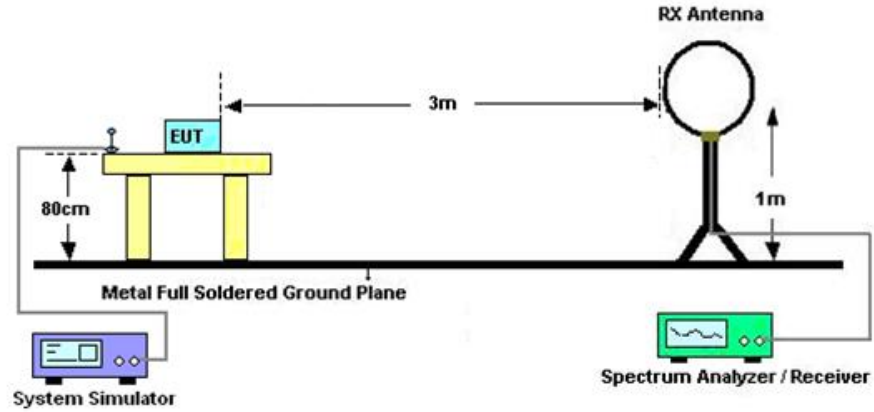

For radiated emissions from 30MHz to 1GHz

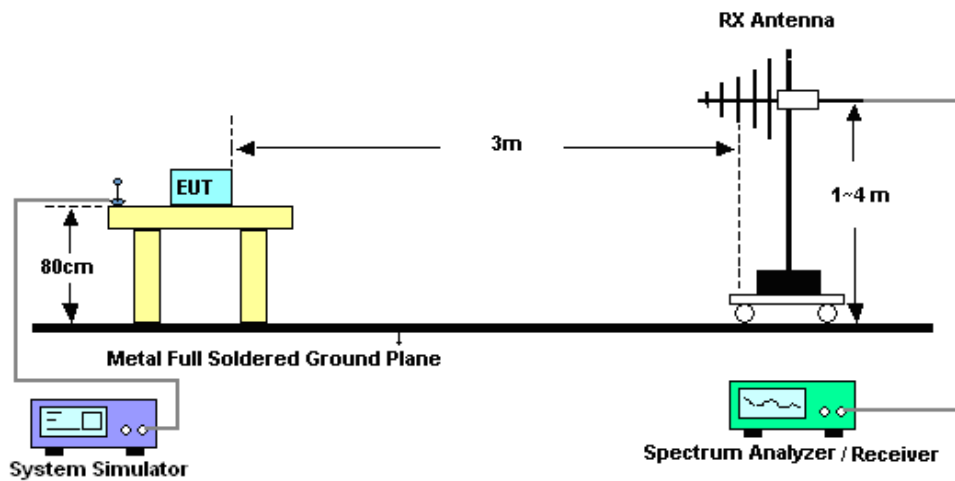

For radiated emissions above 1GHz

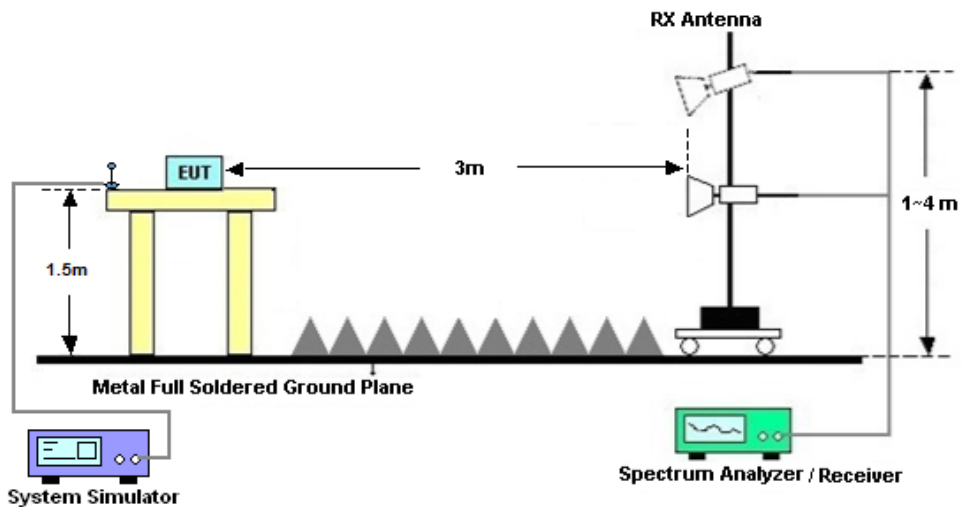

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)





The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.8.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

### **3.8.8 Duty cycle correction factor for average measurement**

Please refer to Appendix D.

## 3.9 AC Conducted Emission Measurement

### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

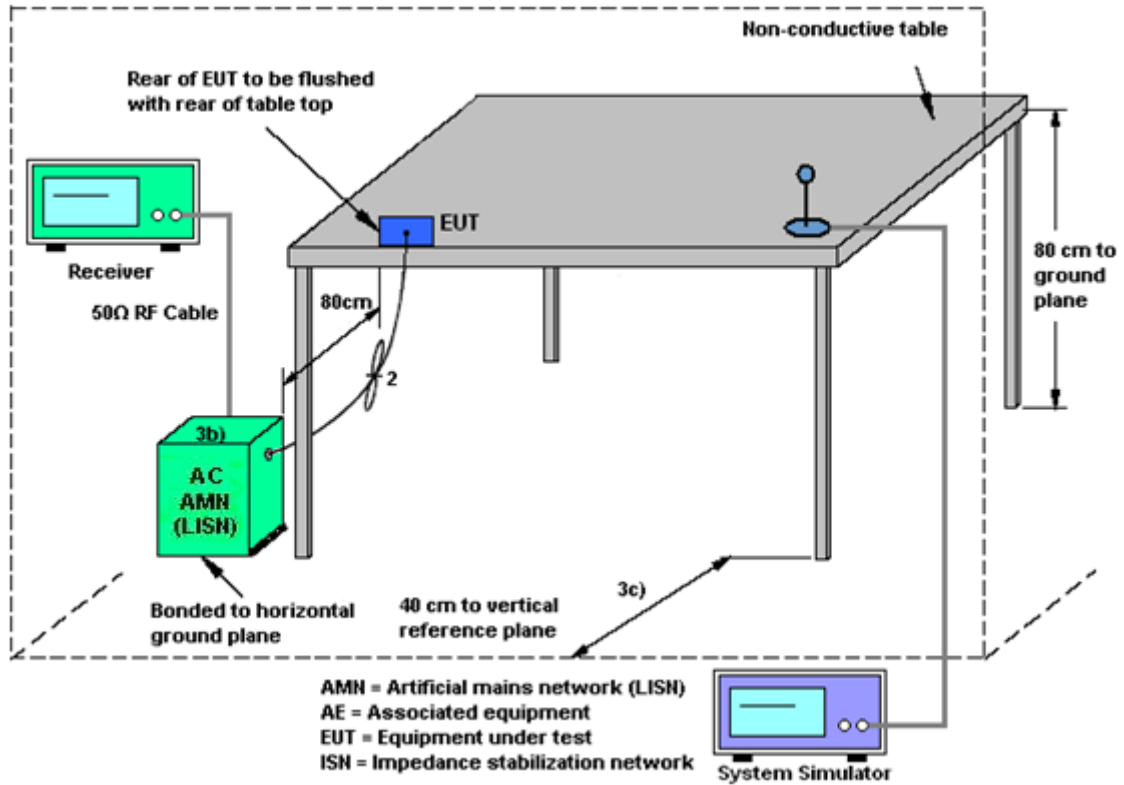

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 07, 2021	Jun. 11, 2021	Mar. 06, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Jun. 11, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Jun. 11, 2021	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2020	Jun. 11, 2021	Jul. 20, 2021	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSP30	101400	9KHz~30GHz	Dec. 25, 2020	Jun. 17, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Jun. 17, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Jun. 17, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2020	Jun. 09, 2021	Jul. 20, 2021	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jun. 09, 2021	Jun. 21, 2022	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2020	Jun. 09, 2021	Jul. 14, 2021	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2020	Jun. 09, 2021	Jul. 24, 2021	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 23, 2021	Jun. 09, 2021	Apr. 22, 2022	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 16,2020	Jun. 09, 2021	Oct. 15,2021	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 17,2020	Jun. 09, 2021	Oct. 15,2021	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21. 2020	Jun. 09, 2021	Jul. 20. 2021	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 16,2020	Jun. 09, 2021	Oct. 15,2021	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Jun. 09, 2021	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jun. 09, 2021	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jun. 09, 2021	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------



## Appendix A. Conducted Test Results

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2021/6/17	Relative Humidity:	51~54	%

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.836	1.003	0.6252	Pass
DH	1Mbps	1	39	2441	0.938	0.836	1.003	0.6252	Pass
DH	1Mbps	1	78	2480	0.938	0.836	1.003	0.6252	Pass
2DH	2Mbps	1	0	2402	1.316	1.178	0.999	0.8770	Pass
2DH	2Mbps	1	39	2441	1.311	1.172	0.999	0.8741	Pass
2DH	2Mbps	1	78	2480	1.311	1.175	1.003	0.8741	Pass
3DH	3Mbps	1	0	2402	1.294	1.175	0.999	0.8625	Pass
3DH	3Mbps	1	39	2441	1.294	1.175	1.003	0.8625	Pass
3DH	3Mbps	1	78	2480	1.298	1.175	1.003	0.8654	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

<b>TEST RESULTS DATA</b>					
<b>Peak Power Table</b>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH5	0	1	10.60	20.97	Pass
	39	1	10.30	20.97	Pass
	78	1	9.70	20.97	Pass
2DH5	0	1	12.50	20.97	Pass
	39	1	12.20	20.97	Pass
	78	1	11.60	20.97	Pass
3DH5	0	1	12.90	20.97	Pass
	39	1	12.70	20.97	Pass
	78	1	12.10	20.97	Pass

<b>TEST RESULTS DATA</b>				
<b>Average Power Table</b>				
<b>(Reporting Only)</b>				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH5	0	1	10.00	1.13
	39	1	9.60	1.13
	78	1	8.90	1.13
2DH5	0	1	10.00	1.13
	39	1	9.70	1.13
	78	1	8.90	1.13
3DH5	0	1	10.00	1.13
	39	1	9.60	1.13
	78	1	8.90	1.13


<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass





## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25 °C
		Relative Humidity :	50~55 %
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

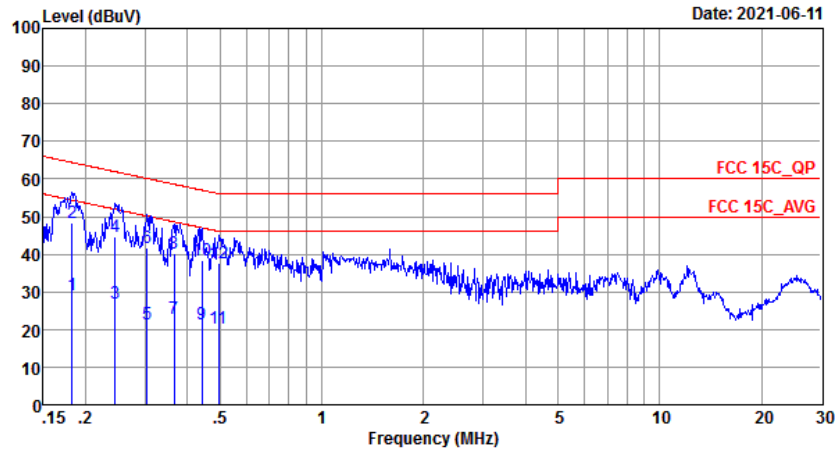


Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20201030\_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	29.30	-25.07	54.37	19.20	0.08	10.02	Average
2 *	0.18	48.30	-16.07	64.37	38.20	0.08	10.02	QP
3	0.24	26.78	-25.17	51.95	16.70	0.05	10.03	Average
4	0.24	44.58	-17.37	61.95	34.50	0.05	10.03	QP
5	0.30	21.55	-28.60	50.15	11.50	0.01	10.04	Average
6	0.30	41.55	-18.60	60.15	31.50	0.01	10.04	QP
7	0.37	23.00	-25.61	48.61	12.90	0.06	10.04	Average
8	0.37	40.20	-18.41	58.61	30.10	0.06	10.04	QP
9	0.44	21.54	-25.48	47.02	11.40	0.09	10.05	Average
10	0.44	38.34	-18.68	57.02	28.20	0.09	10.05	QP
11	0.49	20.25	-25.85	46.10	10.10	0.10	10.05	Average
12	0.49	37.55	-18.55	56.10	27.40	0.10	10.05	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25 °C
		Relative Humidity :	50~55 %
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

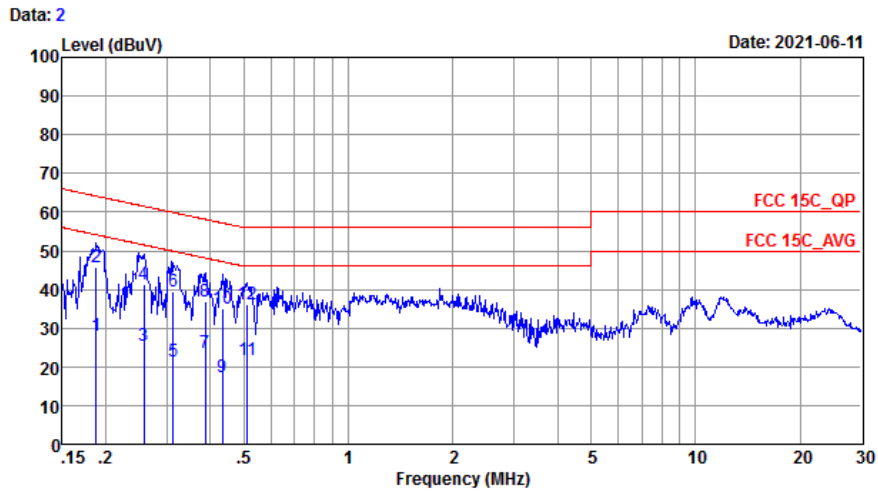

Site : CO01-SZ  
Condition: FCC 15C\_QP LISN\_20201030\_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.19	28.11	-26.04	54.15	18.00	0.08	10.03	Average
2 *	0.19	45.61	-18.54	64.15	35.50	0.08	10.03	QP
3	0.26	25.37	-26.14	51.51	15.29	0.04	10.04	Average
4	0.26	41.27	-20.24	61.51	31.19	0.04	10.04	QP
5	0.31	21.36	-28.52	49.88	11.30	0.02	10.04	Average
6	0.31	39.66	-20.22	59.88	29.60	0.02	10.04	QP
7	0.39	23.72	-24.40	48.12	13.61	0.07	10.04	Average
8	0.39	37.02	-21.10	58.12	26.91	0.07	10.04	QP
9	0.43	17.43	-29.77	47.20	7.29	0.09	10.05	Average
10	0.43	35.23	-21.97	57.20	25.09	0.09	10.05	QP
11	0.51	21.65	-24.35	46.00	11.50	0.10	10.05	Average
12	0.51	36.15	-19.85	56.00	26.00	0.10	10.05	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH00 2402MHz		2325.22	43.5	-30.5	74	41.4	27.93	7.48	33.31	121	237	P	H
		2325.22	18.71	-35.29	54	-	-	-	-	-	-	A	H
	*	2402	107.62	-	-	105.64	27.7	7.54	33.26	121	237	P	H
	*	2402	82.83	-	-	-	-	-	-	-	-	A	H
		2360.08	42.92	-31.08	74	40.87	27.83	7.51	33.29	367	146	P	V
		2360.08	18.13	-35.87	54	-	-	-	-	-	-	A	V
	*	2402	104.36	-	-	102.38	27.7	7.54	33.26	367	146	P	V
	*	2402	79.57	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2350.46	42.63	-31.37	74	40.51	27.9	7.51	33.29	121	237	P	H
		2350.46	17.84	-36.16	54	-	-	-	-	-	-	A	H
	*	2441	103.86	-	-	101.19	27.24	6.67	31.24	226	55	P	H
	*	2441	79.07	-	-	-	-	-	-	-	-	A	H
		2495.94	43.12	-30.88	74	41.39	27.4	7.53	33.2	121	237	P	H
		2495.94	18.33	-35.67	54	-	-	-	-	-	-	A	H
		2323.02	42.9	-31.1	74	40.8	27.93	7.48	33.31	355	133	P	V
		2323.02	18.11	-35.89	54	-	-	-	-	-	-	A	V
	*	2441	107.37	-	-	105.46	27.6	7.54	33.23	355	133	P	V
	*	2441	82.58	-	-	-	-	-	-	-	-	A	V
		2489.15	43.06	-30.94	74	41.35	27.4	7.53	33.22	355	133	P	V
		2489.15	18.27	-35.73	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	107.32	-	-	105.54	27.47	7.53	33.22	115	236	P	H
	*	2480	82.53	-	-	-	-	-	-	-	-	A	H
		2483.52	52.3	-21.7	74	50.52	27.47	7.53	33.22	115	236	P	H
		2483.52	27.51	-26.49	54	-	-	-	-	-	-	A	H
	*	2480	105.26	-	-	103.48	27.47	7.53	33.22	306	124	P	V
	*	2480	80.47	-	-	-	-	-	-	-	-	A	V
		2483.56	51.14	-22.86	74	49.36	27.47	7.53	33.22	306	124	P	V
		2483.56	26.35	-27.65	54	-	-	-	-	-	-	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	41.28	-32.72	74	57.79	31.1	9.86	57.47	151	219	P	H
		4804	16.49	-37.51	54							A	H
		4804	41.67	-32.33	74	58.18	31.1	9.86	57.47	151	219	P	V
		4804	16.88	-37.12	54							A	V
BT CH 39 2441MHz		4882	40.21	-33.79	74	56.7	31.13	9.9	57.52	150	258	P	H
		4882	15.42	-38.58	54							A	H
		7323	49.09	-24.91	74	59.73	36.4	11.88	58.92	152	309	P	H
		7323	24.3	-29.7	54							A	H
		4882	41.17	-32.83	74	57.66	31.13	9.9	57.52	150	258	P	V
		4882	16.38	-37.62	54							A	V
		7323	48.13	-25.87	74	58.77	36.4	11.88	58.92	152	309	P	V
		7323	23.34	-30.66	54							A	V
BT CH 78 2480MHz		4960	41.95	-32.05	74	58.23	31.37	9.93	57.58	118	289	P	H
		4960	17.16	-36.84	54							A	H
		7440	48.83	-25.17	74	59.27	36.5	12.03	58.97	158	273	P	H
		7440	24.04	-29.96	54							A	H
		4960	41.84	-32.16	74	58.12	31.37	9.93	57.58	118	289	P	V
		4960	17.05	-36.95	54							A	V
		7440	49.19	-24.81	74	59.63	36.5	12.03	58.97	158	273	P	V
		7440	24.4	-29.6	54							A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BT LF		91.11	25.49	-18.01	43.5	41.63	15	0.96	32.1			P	H
		288.99	23.85	-22.15	46	34.74	19.06	1.77	31.72			P	H
		552.83	26.43	-19.57	46	28.97	25.88	2.47	30.89			P	H
		734.22	29.03	-16.97	46	29.28	27.94	2.82	31.01			P	H
		850.62	29.05	-16.95	46	28.18	29.22	3.05	31.4	100	234	P	H
		982.54	31.85	-22.15	54	28.85	30.9	3.28	31.18			P	H
		32.91	35.67	-4.33	40	43.92	23.6	0.55	32.4	100	230	P	V
		157.07	25.33	-18.17	43.5	39.53	16.7	1.28	32.18			P	V
		292.87	24.41	-21.59	46	35.18	19.16	1.78	31.71			P	V
		560.59	28.69	-17.31	46	30.56	26.5	2.48	30.85			P	V
		807.94	31.02	-14.98	46	31.18	28.2	2.96	31.32			P	V
		988.36	34.02	-19.98	54	31.23	30.62	3.29	31.12			P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




## Appendix D. Duty Cycle Plots

### 3DH5 on time (One Pulse) Plot on Channel 39



### 3DH5 on time (Count Pulses) Plot on Channel 39

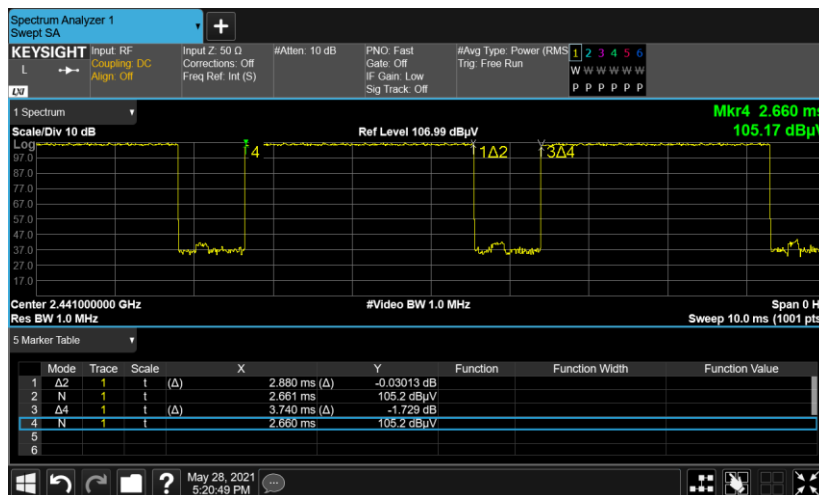

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.79 dB
3. 3DH5 has the highest duty cycle worst case and is reported.