

TEST REPORT

FCC ID: IK4RVW-SOLAR1

Product: Solar Wireless Digital Reversing System

Model No.: RVW-Solar 1

Additional Model No.: RVW-Solar 1U, RVW-Solar 2, RVW-Solar 3, RVW-Sungo 2, RVW-Sungo 3, Solar1-FBA, RVS-Solar1-FBA, Solar1-DE-FBA, Solar2-EU-FBA, RVS-Sungo-FBA, Sungo-DE-FBA, Sungo-EU-FBA, Sungo-FBA, SOlar-1 -FBA, Solar. 1-FBA, Solar 1-FBA, Solar 1E-UK-FBA, RVS-Solar 1-UK-FBA, RVS-Solar 1E-UK-FBA, WTK-A002, RVK-50SW

Trade Mark: N/A

Report No.: TCT191014E026

Issued Date: Dec. 11, 2019

Issued for:

Shenzhen Auto-vox Technology Co., Ltd.
5NO.709, Block 5, Jinfanghua Industrial Area, Xinhe Street, Hebei Village,
Bantian, Longgang District, Shenzhen, China

Issued By:

Shenzhen Tongce Testing Lab.

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China

TEL: +86-755-27673339 FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com





TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary)
3. EUT Description	5
4. General Information	5
4.1. Test environment and mode	6
	6
5. Facilities and Accreditations	7
5.1. Facilities	7
	7
5.3. Measurement Uncertainty	7
6. Test Results and Measurement Da	ata 8
- [. (A i)	8
6.2. Conducted Emission	9
	10
	13
6.5. Carrier Frequencies Separation	16
	19
	22
6.8. Pseudorandom Frequency Hopping	g Sequence25
	nt26
6.10.Conducted Spurious Emission Mea	asurement28
6.11.Radiated Spurious Emission Measu	urement30
Appendix A: Photographs of Test Se	tup
Appendix B: Photographs of EUT	



1. Test Certification

Product:	Solar Wireless Digital Reversing System
Model No.:	RVW-Solar 1
Additional Model:	RVW-Solar 1U, RVW-Solar 2, RVW-Solar 3, RVW-Sungo 2, RVW-Sungo 3, Solar1-FBA, RVS-Solar1-FBA, Solar1-DE-FBA, Solar2-EU-FBA, RVS-Sungo-FBA, Sungo-DE-FBA, Sungo-EU-FBA, Sungo-FBA, SOlar-1 -FBA, Solar. 1-FBA, Solar 1-FBA, Solar 1E-UK-FBA, RVS-Solar 1E-UK-FBA, WTK-A002, RVK-50SW
Trade Mark:	N/AC) (C) (C)
Applicant:	Shenzhen Auto-vox Technology Co., Ltd.
Address:	5NO.709, Block 5, Jinfanghua Industrial Area, Xinhe Street, Hebei Village, Bantian, Longgang District, Shenzhen, China
Manufacturer:	Shenzhen Auto-vox Technology Co., Ltd.
Address:	5NO.709, Block 5, Jinfanghua Industrial Area, Xinhe Street, Hebei Village, Bantian, Longgang District, Shenzhen, China
Date of Test:	Oct. 15, 2019 - Dec. 10, 2019
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Byanc, Leng, Date: Dec. 10, 2019

Brave Zeng

Reviewed By: Date: Dec. 11, 2019

Approved By: Date: Dec. 11, 2019

Tomsin



2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
Conducted Peak Output Power	§15.247 (b)(1)	PASS
20dB Occupied Bandwidth	§15.247 (a)(1)	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209	PASS
Band Edge	§15.247(d)	PASS

Note:

- 1. PASS: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.





3. EUT Description

Report No.: TCT191014E026

Product Name: Solar Wireless Digital Reversing System Model: RVW-Solar 1 RVW-Solar 1U, RVW-Solar 2, RVW-Solar 3,

RVW-Sungo 2, RVW-Sungo 3, Solar1-FBA,

RVS-Solar1-FBA, Solar1-DE-FBA, Solar2-EU-FBA, RVS-Sungo-FBA, Sungo-DE-FBA, Sungo-EU-FBA, Sungo-FBA, Solar 1-FBA, Solar 1-FBA, Solar 1-FBA, Solar 1-FBA, Solar 1-FBA, Solar 1-UK-FBA, Solar 1-UK-FBA, Solar 1-UK-FBA, Solar 1-UK-FBA,

RVS-Solar 1E-UK-FBA, WTK-A002, RVK-50SW

Trade Mark: N/A

Operation Frequency: 2406MHz~2475MHz

Transfer Rate: 3 Mbits/s

Number of Channel: 2406MHz~2475MHz

Modulation Type: GFSK

Modulation
Technology:

Antenna Type: Copper pipe Antenna

Antenna Gain: 2dBi

Power Supply: Rechargeable Li-ion Battery DC 3.7V

Remark:

All models above are identical in interior structure, electrical circuits and components, and just modle names are different for the marketing requirement.

Operation Frequency each of channel for GFSK

operation requestey each or charmer for or or								
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
0	2406MHz	6	2424MHz	12	2442MHz	18	2460MHz	
1	2409MHz	7	2427MHz	13	2445MHz	19	2463MHz	
2	2412MHz	8	2430MHz	14	2448MHz	20	2466MHz	
3	2415MHz	9	2433MHz	15	2451MHz	21	2469MHz	
4	2418MHz	10	2436MHz	16	2454MHz	22	2472MHz	
5	2421MHz	11	2439MHz	17	2457MHz	23	2475MHz	
Remark:	Channel 0, 1	Remark: Channel 0, 12&23 have been tested for GFSK modulation mode.						



4. General Information

4.1. Test environment and mode

Operating Environment:						
Condition Conducted Emission Radiated Emission						
Temperature:	25.0 °C	25.0 °C				
Humidity:	55 % RH	55 % RH				
Atmospheric Pressure:	1010 mbar	1010 mbar				
Test Mode:						
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery					

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
1	1	/ /	9 1	

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Page 6 of 55



5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

• IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,

Shenzhen, Guangdong, China

Tel: 86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%

Report No.: TCT191014E026



6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is copper pipe antenna which permanently attached, and the best case gain of the antenna is 2dBi.

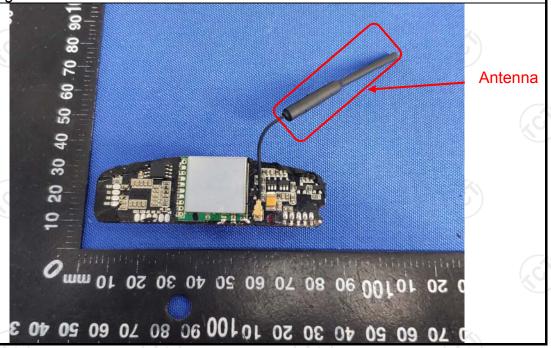

Page 8 of 55



6.2. Conducted Emission

6.2.1. Test Specification

o.z.r. rest opecinication						
Test Requirement:	FCC Part15 C Section	15.207	No.			
Test Method:	ANSI C63.10:2013					
Frequency Range:	150 kHz to 30 MHz					
Receiver setup:	RBW=9 kHz, VBW=30	kHz, Sweep time	e=auto			
Limits:	Frequency range (MHz) Limit (dBuV) Quasi-peak Average 0.15-0.5 66 to 56* 56 to 46* 0.5-5 56 46 5-30 60 50					
	Reference	Plane	1201			
Test Setup:	Test table/Insulation plane Remark E.U.T Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m					
Test Mode:	Refer to item 4.1					
Test Procedure:	1. The E.U.T is connect impedance stabilized provides a 50ohm/5 measuring equipmer 2. The peripheral device power through a LIST coupling impedance refer to the block photographs). 3. Both sides of A.C. conducted interference emission, the relative the interface cables in ANSI C63.10:2013 of the stability.	ation network fould coupling in int. es are also conne SN that provides with 50ohm terr diagram of the line are checke ice. In order to fi e positions of equ must be changed	(L.I.S.N.). This appedance for the ected to the main a 500hm/50uH mination. (Please test setup and ed for maximum and the maximum alipment and all of according to			
Test Result:	N/A					



6.3. Conducted Output Power

6.3.1. Test Specification

A) / A)					
Test Requirement:	FCC Part15 C Section 15.247 (b)(1)				
Test Method:	KDB 558074 D01 v05r02				
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.				
Test Setup:	Spectrum Analyzer EUT				
Test Mode:	Transmitting mode with modulation				
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.				
Test Result:	PASS				

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020



6.3.3. Test Data

GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	17.54	21.00	PASS			
Middle	17.44	21.00	PASS			
Highest	17.58	21.00	PASS			

Test pl	ots as follov	vs:			

Report No.: TCT191014E026



Lowest channel



Middle channel









6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	KDB 558074 D01 v05r02		
Limit:	N/A		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	 Transmitting mode with modulation The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; 1%≤RBW ≤5% of the 20 dB bandwidth; VBW≥3RBW; Sweep = auto; Detector function = peak; Trace = maxhold. Measure and record the results in the test report. 		
Test Result:	PASS		

6.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Page 13 of 55

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



6.4.3. Test data


_					
I	Test channel	20dB Occupy Bandwidth (kHz)			
1	rest chamile	GFSK	Conclusion		
1	Lowest	2884.62	PASS		
	Middle	2923.08	PASS		
I	Highest	2884.62	PASS		


Test plots as follows:


Test pl	ots as follov	vs:			


Report No.: TCT191014E026











Highest channel





6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	KDB 558074 D01 v05r02
Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

6.5.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	тст	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020



6.5.3. Test data

GFSK mode				
Test channel Carrier Frequencies Separation (kHz)		Limit (kHz)	Result	
Lowest	3009.62	1948.72	PASS	
Middle	3009.62	1948.72	PASS	
Highest	3000.00	1948.72	PASS	


Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	2923.08	1948.72

Test plots as follows:



Lowest channel



Middle channel







6.6. Hopping Channel Number

6.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)			
Test Method:	KDB 558074 D01 v05r02			
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.			
Test Setup:				
	Spectrum Analyzer EUT			
Test Mode:	Hopping mode			
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. The number of hopping frequency used is defined as the number of total channel. Record the measurement data in report. 			
Test Result:	PASS			

6.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020



6.6.3. Test data

Report No.: TCT191014E026

Mode	Hopping channel numbers	Limit	Result
GFSK	24	15	PASS

Test plots as follows:














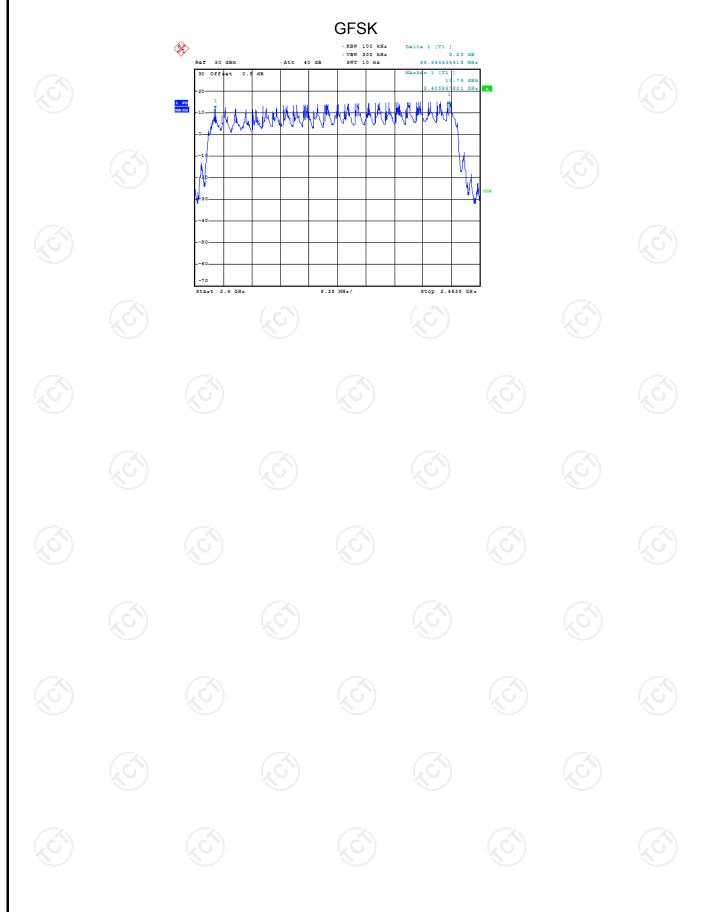



6.7. Dwell Time

6.7.1. Test Specification

FCC Part15 C Section 15.247 (a)(1)		
KDB 558074 D01 v05r02		
The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.		
Spectrum Analyzer EUT		
Hopping mode		
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel; VBW≥RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = clear write. Measure and record the results in the test report. 		
PASS		

6.7.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	тст	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020



6.7.3. Test Data

Report No.: TCT191014E026

Mode	Hops Over Occupancy Time (hops)	Package Transfer Time (ms)	Dwell time (second)	Limit (second)	Result
GFSK	31	10.53	0.33	0.4	PASS

Note: 1. Measure Time=400ms* minimum number of hopping frequencies=400 ms *24=9600 ms;


2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:






GFSK Package Transfer Time



































6.8. udorandom Frequency Hopping Sequence

Test Requirement:

FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 2⁹-1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz (≥1% span=10MHz), VBW = 300 kHz (≥RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. Enable hopping function of the EUT and then repeat step 2 and 3. Measure and record the results in the test report.
Test Result:	PASS


6.9.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020	
RF cable (9kHz-26.5GHz)	тст	RE-06	N/A	Sep. 11, 2020	
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020	





6.9.3. Test Data

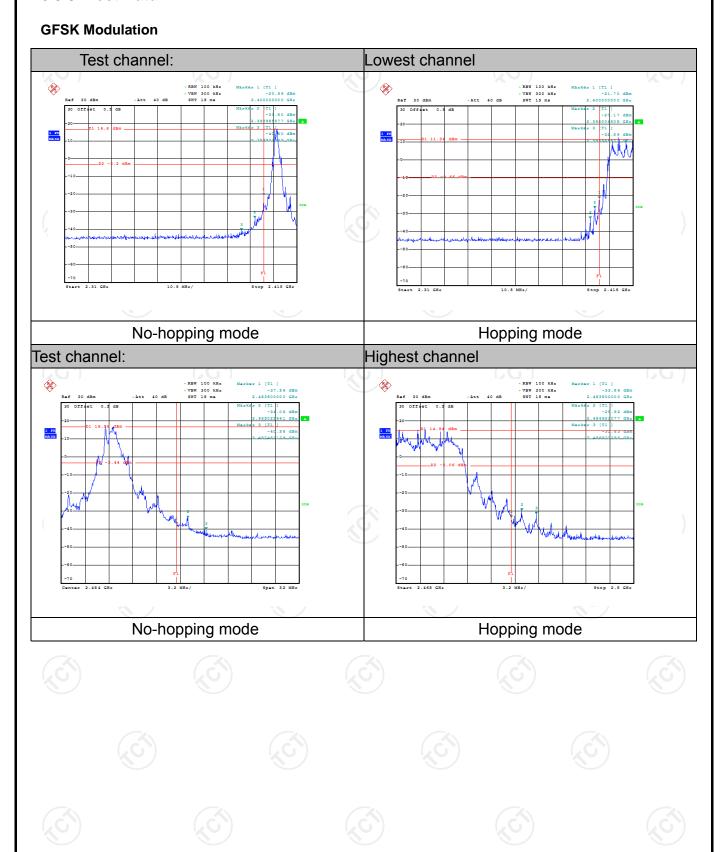



6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Measure and record the results in the test report. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

6.10.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020	
Spectrum Analyzer	ROHDE&SCH WARZ	FSQ40	200061	Sep. 11, 2020	
RF Cable (9KHz-26.5GHz)	тст	RE-06	N/A	Sep. 11, 2020	
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020	




Report No.: TCT191014E026 6.10.3. Test Data GFSK mode **Lowest Channel %** Middle Channel *RBW 100 kHz *VBW 300 kHz SWT 2.5 s Highest Channel *RBW 100 kHz *VBW 300 kHz SWT 2.5 s



6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

Test Requirement:	FCC Part15	C Sectio	n 15.209 🖔				
Test Method:	ANSI C63.10	0:2013					
Frequency Range:	9 kHz to 25 (GHz					
Measurement Distance:	3 m				100		
Antenna Polarization:	Horizontal &	Vertical					
	Frequency	Detector	RBW	VBW		Remark	
	9kHz- 150kHz	Quasi-pea	ak 200Hz	1kHz	Quas	i-peak Value	
Receiver Setup:	150kHz- 30MHz	Quasi-pea		30kHz		i-peak Value	
-	30MHz-1GHz	Quasi-pea	ak 120KHz	300KHz	Quas	i-peak Value	
	(C)	Peak	1MHz	3MHz		eak Value	
	Above 1GHz	Peak	1MHz	10Hz		rage Value	
	Francis		Field Stre	ength	Меа	asurement	
	Frequen	icy	(microvolts	/meter)	Distar	nce (meters)	
	0.009-0.4	190	2400/F(F			300	
	0.490-1.705		24000/F(KHz)		30		
	1.705-30		30		30		
	30-88		100		3		
	88-216		150		3		
Limit:	216-96		200		3		
	Above 9		500		3		
	Frequency	2 1 1	Field Strength (microvolts/meter)		ment	Detector	
			500	(mete	rs)	Average	
	Above 1GHz	<u>z</u>	5000	3		Average Peak	
	For radiated emis	ssions belov		-	(c)		
		stance = 3m					
	Computer Computer						
		─		_			
		'() _	Pre -	Amplifier	L ((C	
Test setup:		`	$\neg \neg$				
Tool colup.	EUT	,					
	0.3m	Turn table	1m				
	(<u></u>	_ 니,	Receiver	oxdot	
	4	1	ad Plans	Ľ.		J	
		Grou	nd Plane				
	30MHz to 1GHz						
		_/.		7.			

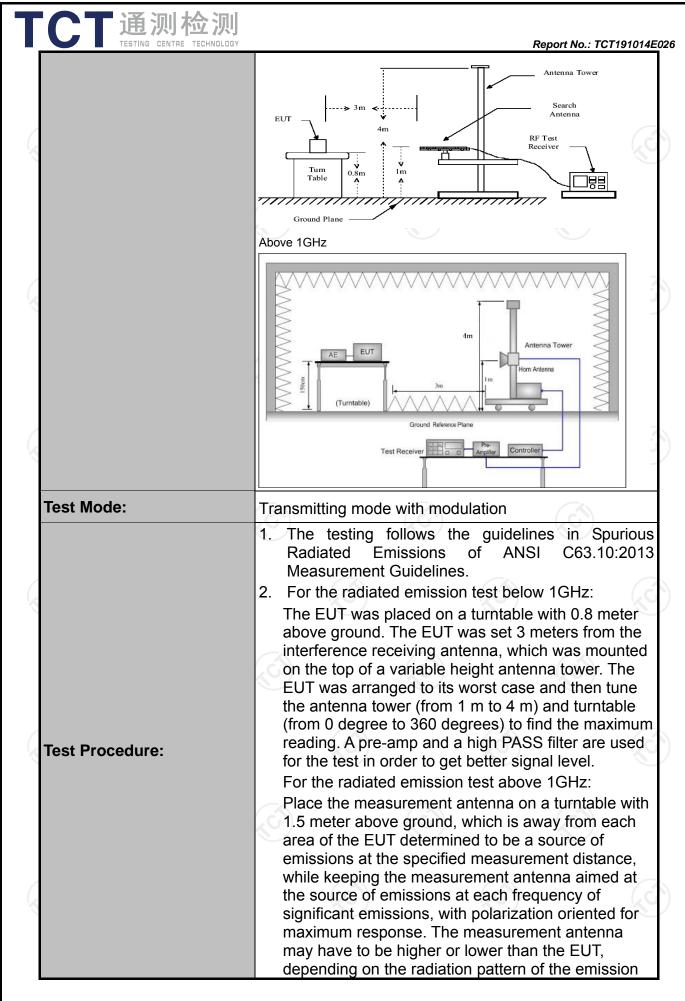

CT通测检测 Report No.: TCT191014E026 and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time =N1*L1+N2*L2+...+Nn-1*LNn-1+Nn*Ln Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle) Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Fax: 86-755-27673332

PASS

Te<u>l: 86-755-27673339</u>

Test results:

Hotline: 400-6611-140

http://www.tct-lab.com





6.11.2. Test Instruments


	Radiated Em	ission Test Site	e (966)		
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 29, 2020	
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2020	
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 08, 2020	
Pre-amplifier	HP	8447D	2727A05017	Sep. 08, 2020	
Loop antenna	ZHINAN	ZN30900A	12024	Oct. 20, 2019	
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 06, 2020	
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 06, 2020	
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 06, 2020	
Antenna Mast	Keleto	RE-AM	N/A	N/A	
Coax cable (9KHz-40GHz)	тст	RE-high-02	N/A	Sep. 08, 2020	
Coax cable (9KHz-40GHz)	тст	RE-high-04	N/A	Sep. 08, 2020	
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A	



6.11.3. Test Data

Duty cycle correction factor for average measurement

GFSK on time (One Pulse) Plot on Channel 24



Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = 10.53/100=0.1053
- 2. Worst case Duty cycle correction factor = 20*log (Duty cycle) = -19.50dB
- 3. DH5 has the highest duty cycle worst case and is reported.
- 4. The average levels were calculated from the peak level corrected with duty cycle correction factor (-19.50dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.




Report No.: TCT191014E026



Please refer to following diagram for individual

Below 1GHz

Horizontal:

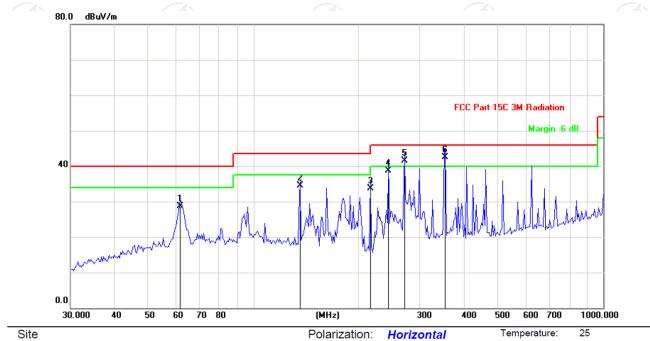


Limit: FCC Part 15C 3M Radiation Power: Humidity: 55 %

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dB/m	dB	Detector
1		61.8676	41.66	-12.99	28.67	40.00	-11.33	QP
2		135.9163	50.23	-15.81	34.42	43.50	-9.08	QP
3		216.1194	47.22	-13.55	33.67	46.00	-12.33	QP
4		243.5431	51.55	-12.75	38.80	46.00	-7.20	QP
5	ļ	270.6161	53.32	-11.89	41.43	46.00	-4.57	QP
6	*	353.4471	52.22	-9.63	42.59	46.00	-3.41	QP





Vertical:

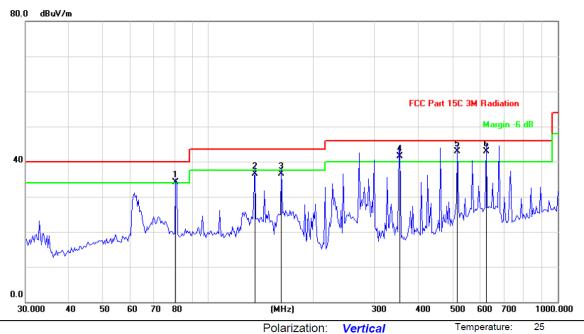

Site Polarization: Vertical Temperature: 25
Limit: FCC Part 15C 3M Radiation Power: Humidity: 55 %

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dB/m	dB	Detector
1	İ	80.8041	50.22	-16.20	34.02	40.00	-5.98	QP
2		135.9163	52.33	-15.81	36.52	43.50	-6.98	QP
3		162.0197	52.22	-15.71	36.51	43.50	-6.99	QP
4	į	353.4471	51.23	-9.63	41.60	46.00	-4.40	QP
5	į	516.5651	50.22	-7.26	42.96	46.00	-3.04	QP
6	*	624.4895	48.66	-5.69	42.97	46.00	-3.03	QP

Note: 1.The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported


2. Measurements were conducted in all three channels (high, middle, low) and the worst case Mode (high channel) was submitted only.



Test Result of Radiated Spurious at Band edges

Lowest channel 2406:

Horizontal:

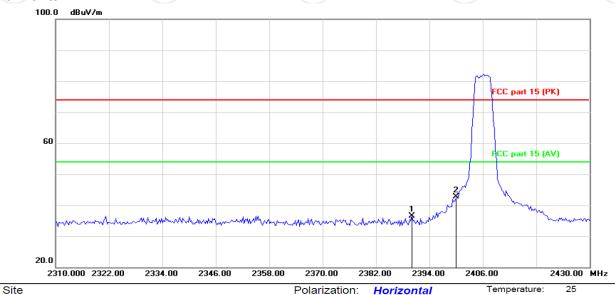

Power:


Limit: FCC part 15 (PK)

Polarization: Horizontal

Temperature: Humidity:

55 %

Vertical:

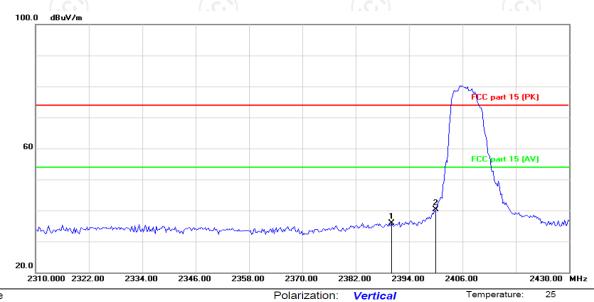

Limit: FCC part 15 (PK)

Power:

Humidity:

55 %


_		Λ	

Frequency (MHz)	Ant. Pol. H/V	Peak (dBµV/m)	Dutycycle factor (dB/m)	AV (dBµV/m)	Peak limit (dBµV/m)	AV limit (dBµV/m)	PK Margin (dB)	AVG Margin (dB)
2439	Н	36.52	-19.50	17.02	74	54	-37.48	-36.98
2439	V	35.86	-19.50	16.36	74	54	-38.14	-37.64
2400	Н	42.72	-19.50	23.22	74	54	-31.28	-30.78
2400	V	40.36	-19.50	20.86	74	54	-33.64	-33.14




Highest channel 2475:

Horizontal:

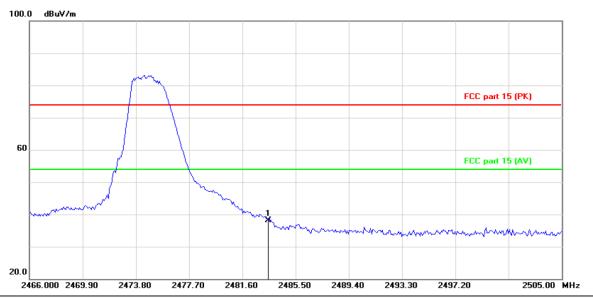

Site Polarization: Horizontal Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

Vertical:

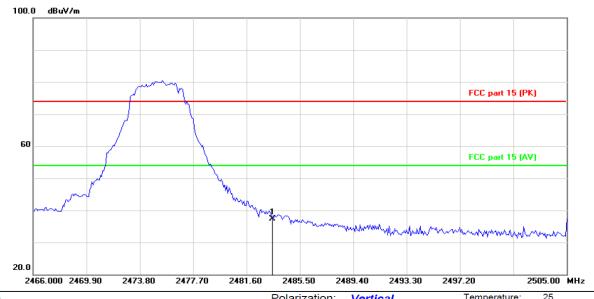

Site Polarization: Vertical Temperature: 28
Limit: FCC part 15 (PK) Power: Humidity: 55 %

Frequency (MHz)	Ant. Pol. H/V	Peak (dBµV/m)	Dutycycle factor (dB/m)	AV (dBµV/m)	Peak limit (dBµV/m)	AV limit (dBµV/m)	PK Margin (dB)	AVG Margin (dB)
2483.5	Н	38.19	-19.50	18.69	74	54	-35.81	-35.31
2483.5	V	37.36	-19.50	17.86	74	54	-36.64	-36.14

Note: Measurements were conducted in all three channels (high, middle, low), and the worst case channel (high channel) was submitted only.



Above 1GHz

				, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	. • –					
Modulation	Modulation Type: GFSK									
Low channel: 2406 MHz										
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBuV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)	
4804	Н	45.42		0.66	46.08		74	54	-7.92	
7206	Н	36.86		9.5	46.36		74	54	-7.64	
	H							7-7		
(G) (G)										
4804	V	44.47		0.66	45.13		74	54	-8.87	
7206	V	37.82		9.5	47.32		74	54	-6.68	
	V									

Middle cha	nnel: 2442	2 MHz		K)		10		1/C
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
4882	H	47.55	-	0.99	48.54		74	54	-5.46
7323	(OH)	38.92	4	9.87	48.79	07	74	54	-5.21
	H					<u></u>			
4882	V	46.62		0.99	47.61		74	54	-6.39
7323	V	38.71		9.87	48.58		74	54	-5.42
)	V	(-		') 		(S)		

High channel: 2475 MHz										
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)	
4960	Н	46.99		1.33	48.32		74	54	-5.68	
7440	Н	36.49		10.22	46.71		74	54	-7.29	
	Η				<u> </u>	-	-7			
		(.G)		(, ((.c))		(.Č	
4960	V	48.32		1.33	49.65		74	54	-4.35	
7440	V	36.75		10.22	46.97		74	54	-7.03	
	V		-			-				

Note:

- 1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss Pre-amplifier
- 2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 5. Data of measurement shown "---"in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- 6. Measurements were conducted in all three channels (high, middle, low), and the worst case channel (high channel) was submitted only.
- 7. All the restriction bands are compliance with the limit of 15.209.







Appendix A: Photographs of Test Setup Product: Solar Wireless Digital Reversing System Model: RVW-Solar 1 **Radiated Emission**








Appendix B: Photographs of EUT Product: Solar Wireless Digital Reversing System Model: RVW-Solar 1 External Photos







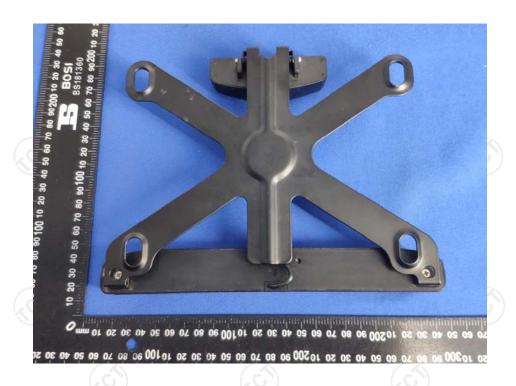
































Product: Solar Wireless Digital Reversing System Model: RVW-Solar 1 Internal Photos



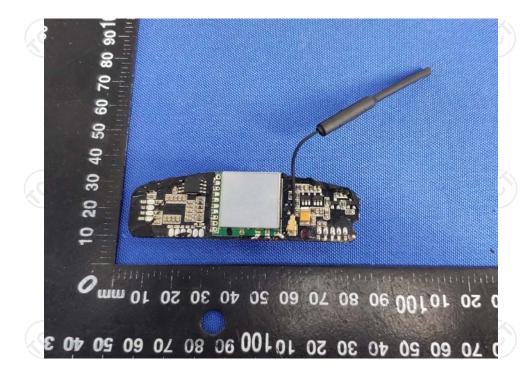





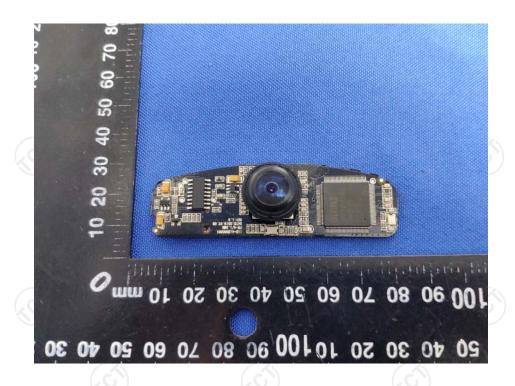

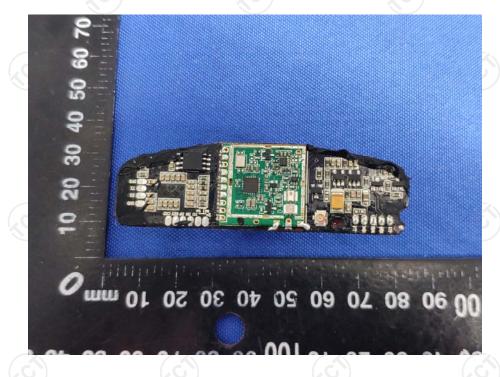




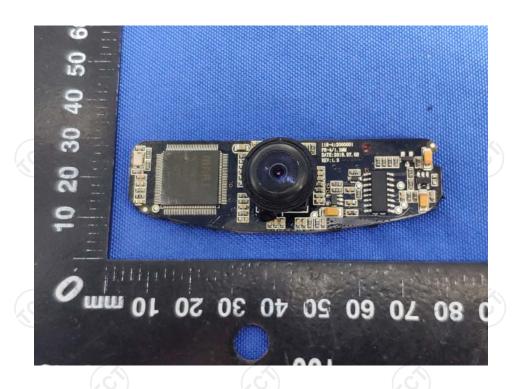

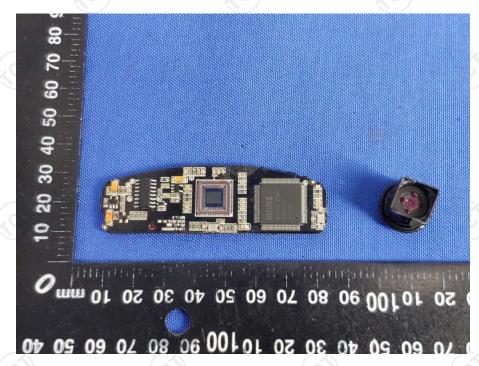



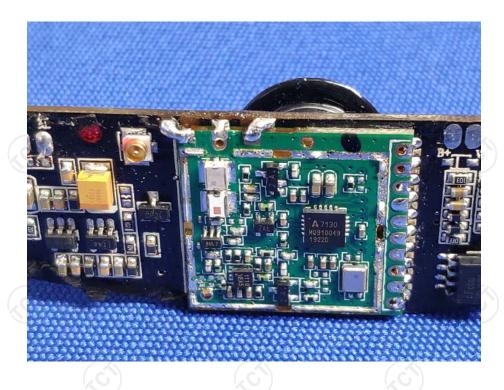














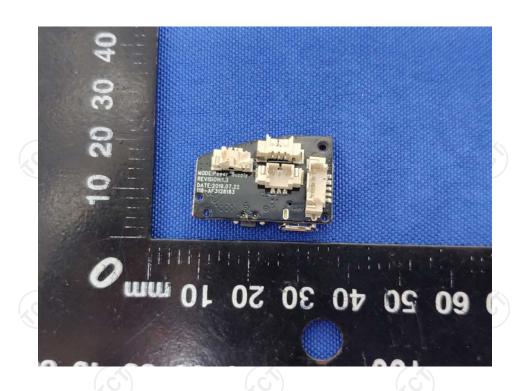

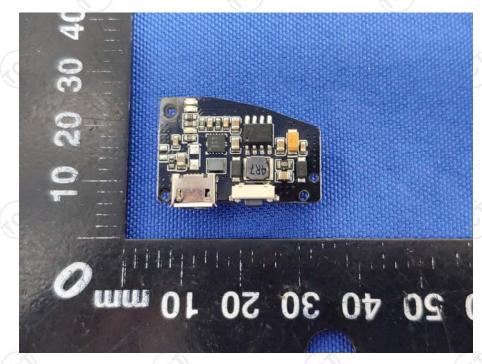






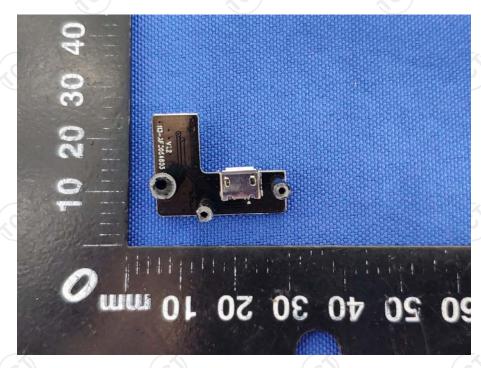




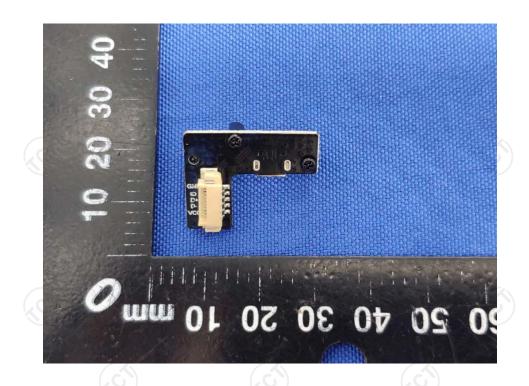





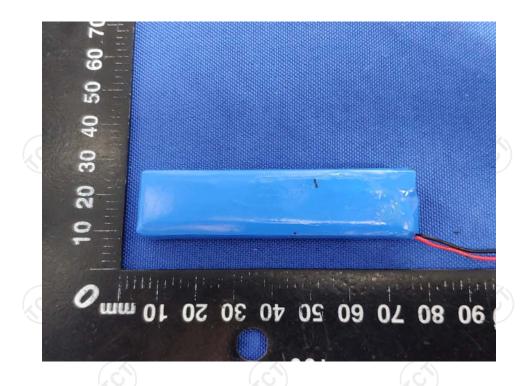

*****END OF REPORT****





