



■ **Report No.:** DDT-R21090205-2E02

■ **Issued Date:** Nov. 23, 2021

RF EXPOSURE REPORT

FOR

Applicant	:	Scosche Industries
Address	:	1550 Pacific Avenue, Oxnard, CA 93033
Equipment under Test	:	Magnetic Wireless Power Bank
Model No.	:	PBQ5MS, PBQ5MSWT, PBQ5MS-SP, PBQ5MSWT-SP, PBQ5MS-XCES0, PBQ5MSWT-XCES0, PBQ5MS-XTSP1, PBQ5MSWT-XTSP1, PBQ5MS-XSSP1, PBQ5MSWT-XSSP1
Trade Mark	:	Scosche
FCC ID	:	IKQPB5M
Manufacturer	:	Power7 Technology (Dong Guan) Co., Ltd.
Address	:	No.28 Binjiang Street. Shishuikou Village, Qiaotou Town, Dongguan City, Guangdong Province P.R.China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	3
1.	General Information	5
1.1.	Description of equipment	5
1.2.	Accessories of EUT.....	5
1.3.	Assistant equipment used for test.....	5
1.4.	Block diagram of EUT configuration for test.....	5
1.5.	Assess laboratory.....	6
2.	Equipment Used During Test.....	6
3.	Method of Measurement	7
3.1.	Applicable standard.....	7
3.2.	Block diagram of test setup.....	7
3.3.	Test procedure	7
3.4.	Equipment approval considerations:.....	8
3.5.	E and H Field Strength.....	9
4.	Test Setup Photo.....	12

Test Report Declare

Applicant	:	Scosche Industries
Address	:	1550 Pacific Avenue, Oxnard, CA 93033
Equipment	:	Magnetic Wireless Power Bank
Model No.	:	PBQ5MS, PBQ5MSWT, PBQ5MS-SP, PBQ5MSWT-SP, PBQ5MS-XCES0, PBQ5MSWT-XCES0, PBQ5MS-XTSP1, PBQ5MSWT-XTSP1, PBQ5MS-XSSP1, PBQ5MSWT-XSSP1
Trade Mark	:	Scosche
Manufacturer	:	Power7 Technology (Dong Guan) Co., Ltd.
Address	:	No.28 Binjiang Street. Shishuikou Village, Qiaotou Town, Dongguan City, GuangDong Province P.R.China

Assess Standard Used: FCC CFR 47 part1, 1.1307(b), 1.1310; KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

We Declare:

The equipment described above is assessed by Dongguan Dongdian Testing Service Co., Ltd and in the configuration assessed the equipment complied with the standards specified above. The assessed results are contained in this report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these assess.

After evaluation, our opinion is that the equipment In Accordance with above standard.

Report No.:	DDT-R21090205-2E02		
Date of Receipt:	Oct. 09, 2021	Date of Test:	Oct. 09, 2021 ~ Nov. 22, 2021

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Nov. 23, 2021	

1. General Information

1.1. Description of equipment

EUT* Name	: Magnetic Wireless Power Bank
Model Number	: PBQ5MS, PBQ5MSWT, PBQ5MS-SP, PBQ5MSWT-SP, PBQ5MS-XCES0, PBQ5MSWT-XCES0, PBQ5MS-XTSP1, PBQ5MSWT-XTSP1, PBQ5MS-XSSP1, PBQ5MSWT-XSSP1
Model Differences	: All models are identical except the appearance colors and manner of packing, therefore the test performed on the model PBQ5MS. ("XX" means different packaging methods)
EUT function description	: Please reference user manual of this device
Power Supply	: DC 5V from external AC Adapter DC 3.7V Polymer Li-ion built-in battery
Wireless charging Operation frequency	: 110 kHz - 147 kHz
Antenna Type	: Inductive loop coil antenna
Sample Type	: N/A
Serial Number	: N/A

Note: EUT is the abbreviation of equipment under test.

1.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

1.3. Assistant equipment used for test


Assistant equipment	Manufacturer	Model number or Type	Description	Other
Mobile phone	HUAWEI	ELS-AN00	N/A	N/A

1.4. Block diagram of EUT configuration for test

For mode 1: Tx mode (5W load, 7.5W load, 10W load):



For mode 2: Standby mode:



Note: Scan with mode 1 and mode 2, the worst case is mode 1 Tx mode (10W load) and recorded in this report.

1.5. Assess laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Electric and Magnetic Field Analyzer	narda	EHP-200A	170WX91016	Jan. 06, 2021	1 Year

3. Method of Measurement


3.1. Applicable standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

According KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

3.2. Block diagram of test setup

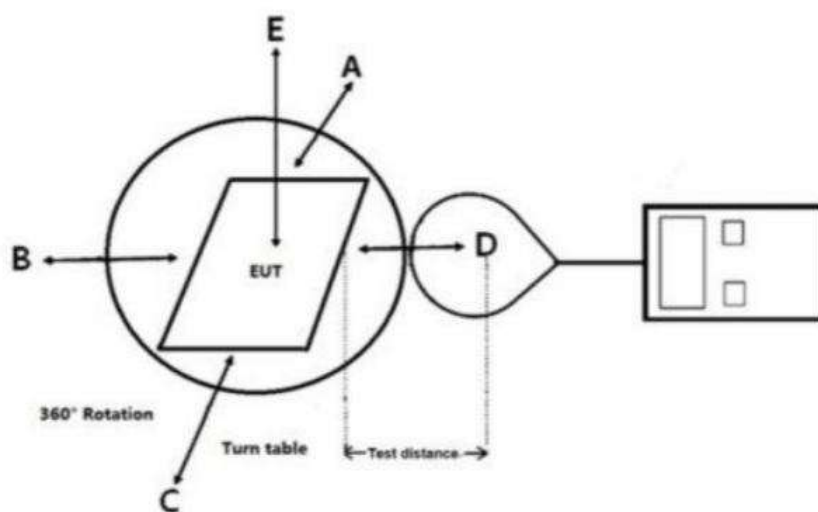

Note: Due to installation limitations no tests from the underside of the charging device (Test Position F) are required. The test position F is required when the distance is 0 cm for portable device.

3.3. Test procedure

- The RF exposure test was performed in shielded chamber.
- The measurement probe was placed at test distance (0 cm, 2 cm, 4 cm, 6 cm, 8 cm, 10 cm) which is between the edge of the charger and the geometric centre of probe.
- The measurement probe used to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

3.4. Equipment approval considerations:

The EUT does comply with section 5 b) of KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

(1) Power transfer frequency is less than 1 MHz.

Yes; the device operates in the frequency range from 110 kHz - 147 kHz

(2) Output power from each primary coil is less than or equal to 15 watts

Yes; the maximum output power of the primary coil is 10 W.

(3) The system may consist of more than one source primary coils, charging one or more clients.

If more than one primary coil is present, the coil pairs may be powered on at the same time.

Yes.

(4) Client device is placed directly in contact with the transmitter.

Yes.

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

No; the EUT is for portable exposure conditions.

(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

Yes; EUT was evaluated for portable exposure condition, and H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 10 cm.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

3.5. E and H Field Strength

Test mode for wireless charger:

Mobile phone has been charged at 1%, 50% and 99% battery electric quantity

E-Filed Strength at 0 cm from the edges surrounding the EUT and 0 cm above the top surface of the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	99%	1%	50%	
A	4.3514	2.7929	1.1864	614
B	1.4005	1.7420	13.794	614
C	2.7791	3.4414	5.2236	614
D	4.8656	10.874	8.6496	614
E	3.2050	6.4363	2.6987	614
F	1.9262	2.3231	2.4460	614

H-Filed Strength at 0 cm from the edges surrounding the EUT and 0 cm above the top surface of the EUT (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	99%	1%	50%	
A	0.3041	0.3191	0.1589	1.63
B	0.2175	0.1844	0.3057	1.63
C	0.1148	0.0945	0.1296	1.63
D	0.1971	0.2090	0.2345	1.63
E	0.3454	0.7964	0.5603	1.63
F	0.4871	0.6038	0.3450	1.63

E-Filed Strength at 2 cm from the edges surrounding the EUT and 2 cm above the top surface of the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	99%	1%	50%	
A	0.6996	1.6751	1.8156	614
B	0.4690	9.4937	1.0505	614
C	0.6832	2.4494	3.1819	614
D	2.3498	0.9464	2.8847	614
E	4.3069	4.0767	5.3276	614

H-Filed Strength at 2 cm from the edges surrounding the EUT and 2 cm above the top surface of the EUT (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	99%	1%	50%	
A	0.2020	0.2557	0.2942	1.63
B	0.0715	0.1232	0.1504	1.63
C	0.1301	0.2969	0.2565	1.63
D	0.1090	0.0730	0.0907	1.63
E	0.0536	0.1165	0.0716	1.63

E-Filed Strength at 4 cm from the edges surrounding the EUT and 4 cm above the top surface of the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	99%	1%	50%	
A	0.6187	0.4414	0.5478	614
B	0.4172	0.3707	0.4288	614
C	0.4713	0.5125	0.3887	614
D	0.8142	0.6420	1.4157	614
E	1.6795	1.4695	2.0788	614

H-Filed Strength at 4 cm from the edges surrounding the EUT and 4 cm above the top surface of the EUT (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	99%	1%	50%	
A	0.0525	0.1056	0.1664	1.63
B	0.1041	0.0881	0.0745	1.63
C	0.0540	0.0802	0.0738	1.63
D	0.0799	0.0610	0.0677	1.63
E	0.0695	0.0540	0.0524	1.63

E-Filed Strength at 6 cm from the edges surrounding the EUT and 6 cm above the top surface of the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	99%	1%	50%	
A	0.4881	0.4491	0.4008	614
B	0.3808	0.3766	0.3887	614
C	0.3971	0.4163	0.4101	614
D	0.5467	0.7265	1.2425	614
E	1.1538	2.7854	0.7410	614

H-Filed Strength at 6 cm from the edges surrounding the EUT and 6 cm above the top surface of the EUT (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	99%	1%	50%	
A	0.0786	0.1386	0.0540	1.63
B	0.0564	0.1046	0.0653	1.63
C	0.0528	0.0677	0.0793	1.63
D	0.0575	0.0553	0.0648	1.63
E	0.0692	0.0540	0.0535	1.63

E-Filed Strength at 8 cm from the edges surrounding the EUT and 8 cm above the top surface of the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	99%	1%	50%	
A	0.3624	0.3753	0.3906	614
B	0.4163	0.3887	0.5250	614
C	0.4783	0.3971	0.3887	614
D	0.5467	0.4775	0.5015	614
E	0.5705	0.8008	1.0142	614

H-Filed Strength at 8 cm from the edges surrounding the EUT and 8 cm above the top surface of the EUT (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	99%	1%	50%	
A	0.0549	0.0751	0.0727	1.63
B	0.0728	0.0569	0.0755	1.63
C	0.0528	0.0641	0.0680	1.63
D	0.0528	0.0528	0.0540	1.63
E	0.0540	0.0525	0.0564	1.63

E-Filed Strength at 10 cm from the edges surrounding the EUT and 10 cm above the top surface of the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	99%	1%	50%	
A	0.3808	0.4242	0.3984	614
B	0.3971	0.4178	0.8102	614
C	0.3808	0.3808	0.4803	614
D	0.5522	0.4098	0.5809	614
E	0.4333	1.2498	1.4256	614

H-Filed Strength at 10 cm from the edges surrounding the EUT and 10 cm above the top surface of the EUT (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	99%	1%	50%	
A	0.0528	0.0528	0.0683	1.63
B	0.0528	0.0528	0.0577	1.63
C	0.0528	0.0546	0.0746	1.63
D	0.0513	0.0536	0.0606	1.63
E	0.0525	0.0550	0.0540	1.63

4. Test Setup Photo







END OF REPORT