



Test Report Serial Number: **45461506 R2.0**  
Test Report Date: **28 May 2019**  
Project Number: **1438**

## SAR Test Report - New Certification

Applicant:



**Garmin International Inc.**  
**1200 East 151 St.**  
**Olathe, KS, 66062**  
**USA**

FCC ID:

**IPH-03560**

Product Model Number / HVIN

**A03560**

### Maximum Reported 10g SAR

FCC	Extremity DTS	0.52	W/kg
ISED	Extremity DTS	0.58	
General Pop. Limit:		4.00	

ISED Registration Number

**1792A-03560**

Product Name / PMN

**A03560**

In Accordance With:

### FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

### IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

**Ben Hewson, President**

Celltech Labs Inc.  
21-364 Lougheed Rd.  
Kelowna, BC, V1X 7R8  
Canada



Test Lab Certificate: 2470.01



**Industry  
Canada**

IC Registration 3874A-1



FCC Registration: CA3874

## Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
4.0 NORMATIVE REFERENCES.....	7
5.0 STATEMENT OF COMPLIANCE .....	8
6.0 SAR MEASUREMENT SYSTEM.....	9
7.0 RF CONDUCTED POWER MEASUREMENT.....	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS .....	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS .....	11
8.0 NUMBER OF TEST CHANNELS ( $N_C$ ) AND CONFIGURATIONS .....	12
9.0 ACCESSORIES EVALUATED.....	14
TABLE 9.0 ACCESSORIES EVALUATED .....	14
10.0 SAR MEASUREMENT SUMMARY.....	15
TABLE 10.0: MEASURED RESULTS.....	15
11.0 SCALING OF MAXIMUM MEASURED SAR.....	16
TABLE 11.0 SAR SCALING .....	16
12.0 SAR EXPOSURE LIMITS.....	18
TABLE 12.0 EXPOSURE LIMITS.....	18
13.0 DETAILS OF SAR EVALUATION.....	19
13.0 DAY LOG .....	19
13.1 DUT SETUP AND CONFIGURATION.....	20
13.2 DUTY CYCLE EVALUATION – 2.4GHZ WIFI.....	21
13.3 DUTY CYCLE EVALUATION – 2.4GHZ BLUETOOTH .....	22
13.4 DUT POSITIONING .....	23
13.5 GENERAL PROCEDURES AND REPORT.....	23
13.6 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	24
13.7 SCAN RESOLUTION 100MHZ TO 2GHZ.....	24
13.8 SCAN RESOLUTION 2GHZ TO 3GHZ.....	25
13.9 SCAN RESOLUTION 5GHZ TO 6GHZ.....	25
14.0 MEASUREMENT UNCERTAINTIES.....	26
TABLE 14.0 MEASUREMENT UNCERTAINTY.....	26
TABLE 14.1 CALCULATION OF DEGREES OF FREEDOM .....	27
15.0 FLUID DIELECTRIC PARAMETERS .....	28
TABLE 15.0 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL.....	28
16.0 SYSTEM VERIFICATION TEST RESULTS.....	30
TABLE 16.0 SYSTEM VERIFICATION RESULTS 2450MHZ BODY TSL .....	30
17.0 SYSTEM VALIDATION SUMMARY .....	31
TABLE 17.0 SYSTEM VALIDATION SUMMARY.....	31
18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	32

TABLE 18.0 MEASUREMENT SYSTEM SPECIFICATIONS .....	32
19.0 TEST EQUIPMENT LIST .....	34
TABLE 19.0 EQUIPMENT LIST AND CALIBRATION .....	34
20.0 FLUID COMPOSITION .....	35
TABLE 20.0 FLUID COMPOSITION 2450MHz BODY TSL .....	35
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	36
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR .....	38
GARMIN A03560-2450B MAY 16 2019 .....	40
APPENDIX C - SETUP PHOTOS.....	41
APPENDIX D – DUT AND ACCESSORY PHOTOS .....	44
APPENDIX E – PROBE CALIBRATION.....	49
APPENDIX F – DIPOLE CALIBRATION .....	50
APPENDIX G - PHANTOM.....	51

## 1.0 DOCUMENT CONTROL

<b>Samples Tested By:</b>	Trevor Whillock		
<b>Report Prepared By:</b>	Trevor Whillock		
<b>Report Reviewed By:</b>	Ben Hewson		
<b>Report Issue Number</b>	<b>Description</b>	<b>By</b>	<b>Report Issue Date</b>
R0.0	Draft	Trevor Whillock	16 May 2019
R1.0	Initial Release	Trevor Whillock	21 May 2019
R2.0	Appendix E Revision - Page Orientation	Trevor Whillock	28 May 2019

## 2.0 CLIENT AND DEVICE INFORMATION

<b>Applicant Address</b>	1200 East 151 St.	
	Olathe, KS,66062	
	USA	
<b>DUT Information</b>		
<b>Device Identifier(s):</b>	<b>FCC ID:</b>	<b>IPH-03560</b>
	<b>IC:</b>	<b>1792A-03560</b>
<b>Type of Equipment:</b>	Digital Transmission System (DTS) FCC Part 15, RSS 247	
	Low Power Communication Device Transmitter (DXX) FCC Part 15	
<b>Device Model(s) / HVIN:</b>	A03560	
<b>Device Marketing Name / PMN:</b>	A03560	
<b>Test Sample Serial No.:</b>	T/A Sample - Identical Prototype	
<b>Transmit Frequency Range:</b>	WiFi: 2412 - 2462 MHz	
	BT/BLE/ANT: 2402 - 2480 MHz	
	NFC: 13.56 MHz	
<b>Number of Channels:</b>	See Section 8.0	
<b>Manuf. Max. Avg Rated Output Power:</b>	WiFi 2.4GHz: 802.11b:18.08 dBm Avg./ 802.11g: 16.51 dBm Avg. / 802.11n: 16.32 dBm avg.	
	BT:GFSK: 8.95 dBm Avg. / PI/4-DQPSK: 7.74 dBm Avg.	
	BLE: GMSK: -2.45 dBm Avg. ANT: GFSK: -1.37 dBm Avg.	
<b>Modulation:</b>	WiFi 802.11b/g/n: DSSS, OFDM, MCS0-7	
	BT: GFSK, PI/4-DQPSK	
	BLE:GMSK	
	ANT:GFSK	
<b>Duty Cycle:</b>	WiFi: 100% (Setting 0) / BT:9.52%	
<b>DUT Power Source:</b>	5V USB, Internal Li-ion battery	
<b>Deviation(s) from standard/procedure:</b>	None	
<b>Modification of DUT:</b>	None	

### 3.0 SCOPE OF EVALUATION

The A03560, FCC ID: IPH-03560 ISED ID: 1792A-03560, is a wrist-worn transceiver that is capable of operating in the 2.4GHz WiFi and Bluetooth frequency bands with an additional NFC feature that operates at a fixed frequency of 13.56MHz. The device is intended for General Population Use. The product operates from an internal proprietary Li-ion rechargeable battery which can be connected to a compliant USB interface port, AC or DC adapter for charging. Test samples provided by the manufacturer were capable of transmitting at select frequencies and modulations preset by the manufacturer. An additional antenna modification was prepared for one sample allowing the ability to connect test equipment for antenna port conducted power analysis. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEEE 1528, IEC 62209-2, FCC KDB 865646, 447498, 248227 and RSS 102.

## 4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2017	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	


## 5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

<b>Applicant:</b> <b>Garmin International Inc.</b>	<b>Model / HVIN:</b> <b>A03560</b>	
<b>Standard(s) Applied:</b> <b>FCC 47 CFR §2.1093</b> <b>Health Canada's Safety Code 6</b>	<b>Measurement Procedure(s):</b> <b>FCC KDB 865664, FCC KDB 447498, FCC KDB248227</b> <b>Industry Canada RSS-102 Issue 5</b> <b>IEEE Standard 1528-2013, IEC 62209-2</b>	
<b>Reason For Issue:</b> <input checked="" type="checkbox"/> <b>New Certification</b> <input type="checkbox"/> <b>Class I Permissive Change</b> <input type="checkbox"/> <b>Class II Permissive Change</b>	<b>Use Group:</b> <input checked="" type="checkbox"/> <b>General Population / Uncontrolled</b> <input type="checkbox"/> <b>Occupational / Controlled</b>	<b>Limits Applied:</b> <input type="checkbox"/> <b>1.6W/kg - 1g Volume</b> <input type="checkbox"/> <b>8.0W/kg - 1g Volume</b> <input checked="" type="checkbox"/> <b>4.0W/kg - 10g Volume</b>
<b>Reason for Change:</b> <b>Original Filing</b>	<b>Date(s) Evaluated:</b> <b>May 15th &amp; 16th, 2019</b>	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.

  
**Trevor Whillock**  
**Test Lab Engineer**  
**Celltech Labs Inc.**  
**21 May 2019**  
**Date**




## 6.0 SAR MEASUREMENT SYSTEM

### SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



**DASY 6 SAR System with SAM Phantom**

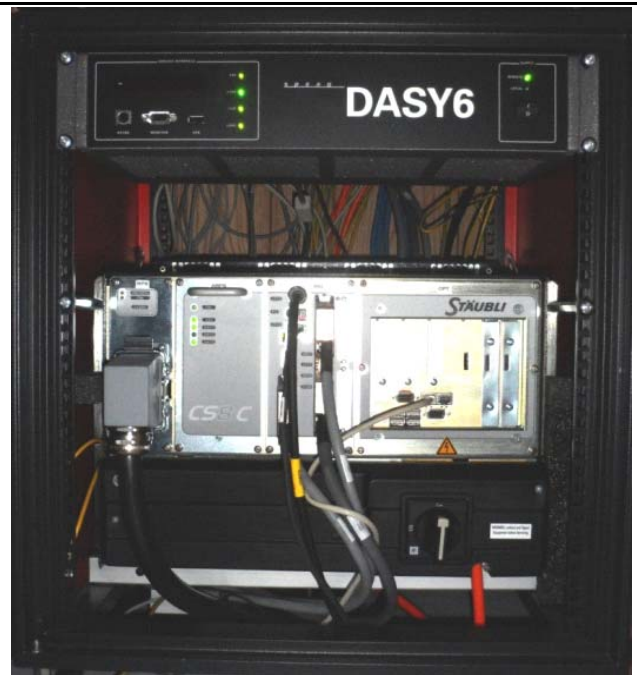

**DASY 6 Measurement Controller**

## 7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements

Conducted Power Measurements									
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation	
1	2412	18.08	18.08	0.06	0.00	Y	WLAN 2.4G	DSS-1Mbps	802.11b
2	2417	18.05	18.08	0.06	-0.03	-		DSS-1Mbps	
3	2422	17.98	18.08	0.06	-0.10	-		DSS-1Mbps	
4	2427	17.93	18.08	0.06	-0.15	-		DSS-1Mbps	
5	2432	17.84	18.08	0.06	-0.24	-		DSS-1Mbps	
6	2437	17.87	18.08	0.06	-0.21	Y		DSS-1Mbps	
7	2442	17.75	18.08	0.06	-0.33	-		DSS-1Mbps	
8	2447	17.63	18.08	0.06	-0.45	-		DSS-1Mbps	
9	2452	17.71	18.08	0.06	-0.37	-		DSS-1Mbps	
10	2457	17.62	18.08	0.06	-0.46	-		DSS-1Mbps	
11	2462	17.76	18.08	0.06	-0.32	Y		DSS-1Mbps	
1	2412	18.05	18.08	0.06	-0.03	-		DSS-2Mbps	802.11g
		18.02	18.08	0.06	-0.06	-		DSS-5.5Mbps	
		18.01	18.08	0.06	-0.07	-		DSS-11Mbps	
		14.77	16.51	0.04	-1.74	-		OFDM-6Mbps	
		14.82	16.51	0.04	-1.69	-		OFDM-54Mbps	
		12.92	16.32	0.04	-3.40	-		MCS-0	
		13.13	16.32	0.04	-3.19	-		MCS-7	
6	2437	17.90	18.08	0.06	-0.18	-		DSS-2Mbps	802.11b
		17.98	18.08	0.06	-0.10	-		DSS-5.5Mbps	
		17.79	18.08	0.06	-0.29	-		DSS-11Mbps	
		16.32	16.51	0.04	-0.19	-		OFDM-6Mbps	
		16.51	16.51	0.04	0.00	-		OFDM-54Mbps	
		16.24	16.32	0.04	-0.08	-		MCS-0	
		16.32	16.32	0.04	0.00	-		MCS-7	
11	2462	17.74	18.08	0.06	-0.34	-		DSS-2Mbps	802.11b
		17.81	18.08	0.06	-0.27	-		DSS-5.5Mbps	
		17.74	18.08	0.06	-0.34	-		DSS-11Mbps	
		14.49	16.51	0.04	-2.02	-		OFDM-6Mbps	
		14.40	16.51	0.04	-2.11	-		OFDM-54Mbps	
		12.61	16.32	0.04	-3.71	-		MCS-0	
		12.48	16.32	0.04	-3.84	-		MCS-7	

**Table 7.1 Conducted Power Measurements**

Conducted Power Measurements								
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
2	2402	8.95	8.95	0.01	0.00	Y	BT/BLE/ANT	
41	2441	8.92	8.95	0.01	-0.03	-		
80	2480	8.82	8.95	0.01	-0.13	-		BT(GFSK)
2	2402	7.74	7.74	0.01	0.00	-		BT(PI/4-DQPSK)
		-2.45	-2.45	0.001	0.00	-		BLE(GMSK)
		-1.37	-1.37	0.001	0.00	-		ANT(GFSK)

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using the power level setting and duty cycle specified by the manufacture to be the max output power and produce the most conservative SAR. SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down.

## 8.0 NUMBER OF TEST CHANNELS ( $N_c$ ) AND CONFIGURATIONS

This device is a wrist-worn device and was evaluated for extremity SAR. Although the intended use is to be wrist-worn with the back side of the device in contact with the human skin, the device was additionally evaluated to the worst case setup configuration leveraged from a previous EU evaluation of the same model series, report reference 45461494 R1.0. The Front side (Screen) of the device was found to be the worst case setup configuration and produced the highest SAR.

### WiFi SAR Evaluation:

SAR was evaluated in DSS mode with a sample rate of 1Mbps at a 100% duty cycle (setting 0). The power level setting selected was specified by the manufacture to be the max output power and produce the most conservative SAR.

As per FCC KDB 24827, the required 802.11 test channels are Ch1, Ch6 and Ch 11. Based on evaluated SAR levels of the highest Middle band frequency or highest output channels; SAR test reduction methodology was applied to reduce the total number of required test channels and exclude Ch 6 and Ch 11 from SAR test evaluation.

When applicable, SAR test reduction methods may be utilized.

802.11b DSSS SAR test reduction is determined according to the following:

- a) When the reported SAR of the highest measured maximum output power channel is  $\leq$  to 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b) When the reported SAR is  $>$  0.8 W/kg, SAR is required for that exposure configuration using the next highest output power channel. When any reported SAR is  $>$  1.2 W/Kg, SAR is required for the third channel.

While 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

Therefore; Ch 6 and Ch 11 was not required for evaluation in any exposure configuration.

### 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

- a) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq$  1.2 W/kg.

See 13.1 for details.

#### BT/BLE/ANT SAR Test Evaluation:

Bluetooth was evaluated for SAR at a transmit duty cycle of 9.52% in the worst-case configuration from the WiFi test evaluation. The duty cycle cannot be altered in test mode or by the user. A measurement Crest factor of 10.5 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

#### General SAR Test Reduction Considerations

As per KDB 447498D01 4.4.1,

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid band or highest output power channel is:

c)  $\leq 0.4\text{W/kg}$  or  $1.0\text{W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{MHz}$

BLE/ANT was not evaluated for SAR.

Per FCC KDB 447498 4.3.1 the BLE/ANT transmitter meets the standalone SAR test exclusion criteria. See section 11.0 for details.

NOTE: This device is not capable of simultaneous transmission between the BT/BLE/ANT and WiFi transmitters. Due to the nature of this device, WiFi and Bluetooth were evaluated for standalone SAR only.

#### NFC:

The RFID transmitter is a low power communication device transmitter and does not require standalone SAR evaluation. Simultaneous transmission evaluation with it and the 802.11b/g/n or BT 802.15 is not required

## 9.0 ACCESSORIES EVALUATED

Table 9.0 Accessories Evaluated

Manufacturer's Accessory List				
Test Report ID Number	Manufacturer's Part Number	Description	SAR <sup>(3)</sup> Evaluated	SAR <sup>(4)</sup> Tested
<b>B1</b>	010-12517-00	Black Silicone Wrist Band	<b>Y</b>	<b>Y</b>
<b>B2</b>	010-12864-08	Metal Wrist Band	<b>Y</b>	<b>Y</b>
<b>P1</b>	362-00087-00	AC Adapter	<b>n/a</b>	<b>n/a</b>
<b>P2</b>	010-12491-01	Charging Cable	<b>n/a</b>	<b>n/a</b>

## 10.0 SAR MEASUREMENT SUMMARY

Table 10.0: Measured Results

Measured SAR Results (10g) - BODY(FCC/ISED)														
Date	Plot ID #	DUT Model	Test Type	Test Freq.	Modulation	Accessories				DUT Spacing		Meas. Cond. Power	Measured SAR	SAR Drift
				(MHz)		Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)		10g	
						(dBm)	(W/kg)	(dB)						
Extremity SAR														
WiFi & BT 2.4 GHz														
15 May 2019	B1	A03560	BODY-Back	2412	DSS-1Mbps	n/a	n/a	B1	n/a	0	0	18.08	0.128	-0.370
15 May 2019	B2	A03560	BODY-Back	2412	DSS-1Mbps	n/a	n/a	B2	n/a	0	0	18.08	0.200	-0.340
15 May 2019	B3	A03560	BODY-Front	2412	DSS-1Mbps	n/a	n/a	B2	n/a	0	0	18.08	0.519	-0.510
15 May 2019	B4	A03560	BODY-Front	2402	BT-GFSK	n/a	n/a	B2	n/a	0	0	8.95	0.004	1.140
FCC 47 CFR 2.1093				Health Canada Safety Code 6			Extremity	10g Average		4.0 W/kg		General Population		

Reference Section 8.0 for details

\*Per KDB 248227 D01 5.2.1(a);

Testing of other required test channels is not required when the reported 1-g or 10g SAR for the mid-band or highest output power channel is  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively.

\*\*Per KDB 447498D01 4.4.1(c)

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid band or highest output power channel is:

$\leq 0.4$ W/kg or 1.0W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$ Mh

## 11.0 SCALING OF MAXIMUM MEASURED SAR

Table 11.0 SAR Scaling

Scaling of Maximum Measured SAR <sup>(1)</sup>							
Plot ID	Configuration	Freq	Measured Fluid Deviation		Measured Conducted Power	Measured Drift	Measured SAR (10g)
		(MHz)	Permittivity	Conductivity	(dBm)	(dB)	(W/kg)
E3	BODY-Front Side	2412	-0.97%	-2.62%	18.1	-0.510	0.519
Step 1							
Fluid Sensitivity Adjustment							
Plot ID	Scale Factor		X	Measured SAR		=	Step 1 Adjusted SAR (10g)
	(%)			(W/kg)			(W/kg)
E3	n/a		X	0.519		=	0.519
Step 2							
Manufacturer's Tune-Up Tolerance							
Plot ID	Measured Conducted Power		Rated Power		Delta	Step 1 Adjusted SAR	Step 2 Adjusted SAR (10g)
	(dBm)		(dBm)		(dB)		
E3	18.1		18.1		0.0	+	0.519
Step 3 (ISED)							
Drift Adjustment							
Plot ID	Measured Drift		+	Step 2 Adjusted SAR		=	Step 3 Adjusted SAR (10g)
	(dB)			(W/kg)			(W/kg)
E3	-0.510		+	0.519		=	0.584
Step 4 (FCC)							
Simultaneous Transmission - Bluetooth and/or WiFi							
Plot ID	Rated Output Power (Pmax)	Freq	Separation Distance	Estimated SAR SAR	+	Step 2 Adjusted SAR	Step 4 Adjusted SAR (10g)
	(mW)	(MHz)	(mm)	(W/kg)		(W/kg)	(W/kg)
E3	n/a	n/a	0	n/a	+	0.519	0.519
Step 5							
Reported SAR							
Plot ID	FCC			ISED			
	From Steps 1 and 2			From Steps 1 through 3			
	1g SAR (W/kg)			1g SAR (W/kg)			
E3	0.519			0.584			



The SAR test exclusion threshold for the BLE/ANT transmitter as per FCC KDB 447498 4.3.1 is as follows:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \times [\sqrt{f(\text{GHz})}] \leq 7.5$  for 10-g SAR

$$[(0.729)/(5)] \times [\sqrt{2.402}] = 0.226 \leq 7.5$$

Where:

max. power of channel, including tune-up tolerance, mW = 0.729 mW

min. test separation distance, mm = 5mm

f(GHz) = 2.402 GHz

Therefore; the BLE/ANT Transmitter meets the SAR test exclusion criteria.

NOTE: This device is not capable of simultaneous transmission between the BT/BLE/ANT and WiFi transmitters. Due to the nature of this device, WiFi and Bluetooth were evaluated for standalone SAR only.

The RFID transmitter is a low power communication device transmitter and does not require standalone SAR evaluation. Simultaneous transmission evaluation with it and the 802.11b/g/n or BT 802.15 is not required

#### NOTES to Table 11.0

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.

NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by light gray text.

##### Step 1

Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 9.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

##### Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

##### Step 3

Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.

##### Step 4

Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.

##### Step 5

The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Trevor Whillock  
Test Lab Engineer  
Celltech Labs Inc.

21 May 2019

Date

## 12.0 SAR EXPOSURE LIMITS

Table 12.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure <sup>(4)</sup>	Occupational / Controlled Exposure <sup>(5)</sup>
Spatial Average <sup>(1)</sup> (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak <sup>(2)</sup> (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak <sup>(3)</sup> (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

## 13.0 DETAILS OF SAR EVALUATION

### 13.0 Day Log

DAY LOG						Fluid Dielectric	SPC	Test
Date	Ambient Temp °C	Fluid Temp °C	Pressure (kPa)	Humidity	TSL			
14 May 2019	23	23.3	101.0	29%	2450B	X	X	
15 May 2019	23	22.9	101.5	27%	2450B			X *
16 May 2019	23	23.1	100.4	29%	2450B			X **


\*Per 1528 Test series was started within 24 hours of Fluid Parameter Measurement

\*\*Per 1528 Test series was completed within a 48 hr period

### 13.1 DUT Setup and Configuration

DUT Setup and Configuration	
1	The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 865646, 248277 and RSS-102. The device was evaluated at a phantom separation distance of 0mm.
2	<p>2.4GHz 802.11g/n OFDM SAR Test Exclusion</p> <p>As Per KDB 248277 D01v02r02 - 5.2.2, b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is <math>\leq 1.2</math> W/kg.</p> <p>Maximum 802.11g/n OFDM specified power(POFDM)= 16.51 dBm Maximum 802.11b DSSS specified power (PDSSS)= 18.08 dBm Ratio OFDM/DSSS power = -1.57 dBm(70.0%) Highest reported* SAR (SARMAX)= 0.519 W/kg</p> <p><math>POFDM/PDSSS \times SARMAX = 0.363W/kg \leq 1.2</math> W/kg</p> <p>Since the ratio of the OFDM/DSSS specified power is less than one (0dB), the reported SAR would not exceed 1.2W/kg</p> <p>*The reported SAR in this case is the measured SAR adjusted for fluid sensitivity.</p>
3	The Device was capable of transmitting at various modulations, data rates and duty cycles. The Conducted Power was highest when measured in DSS Mode-1 Mbps at 100% Duty cycle(setting 0) than any other configuration in the 2.4GHz Band. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer.
4	Bluetooth was evaluated for SAR in GFSK mode with a transmit duty cycle of 9.52% in the worst-case configuration from the WiFi test evaluation. The Duty cycle could not be altered in test mode or by the user. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer.
5	Each SAR evaluation was performed with a fully charged battery.


### 13.2 Duty Cycle Evaluation – 2.4GHz WiFi

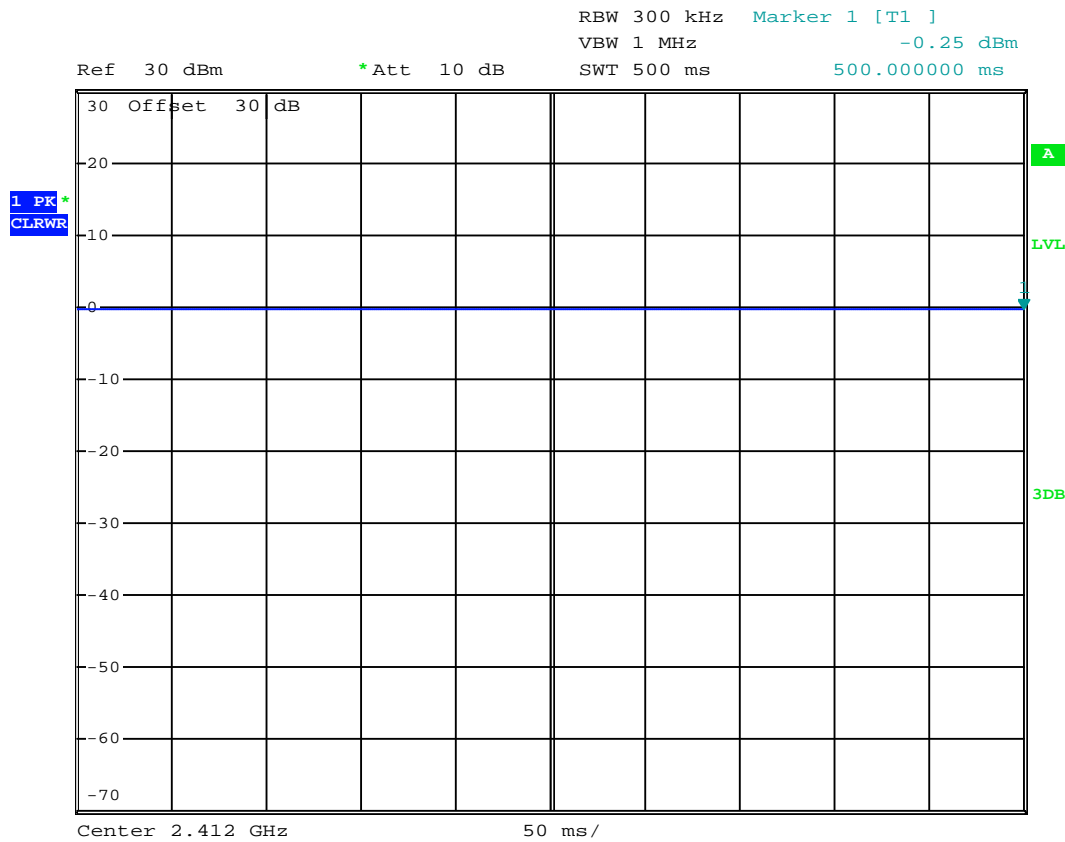

Date: 16.MAY.2019 10:49:58

DSS mode at 1Mbps was found to be the worst case test mode for 2.4GHZ WiFi. The transmit Duty cycle was 100%, test (Setting 0) as indicated in the above plot. This duty cycle cannot be altered by the user. A measurement Crest factor of 1 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

### 13.3 Duty Cycle Evaluation – 2.4GHz Bluetooth

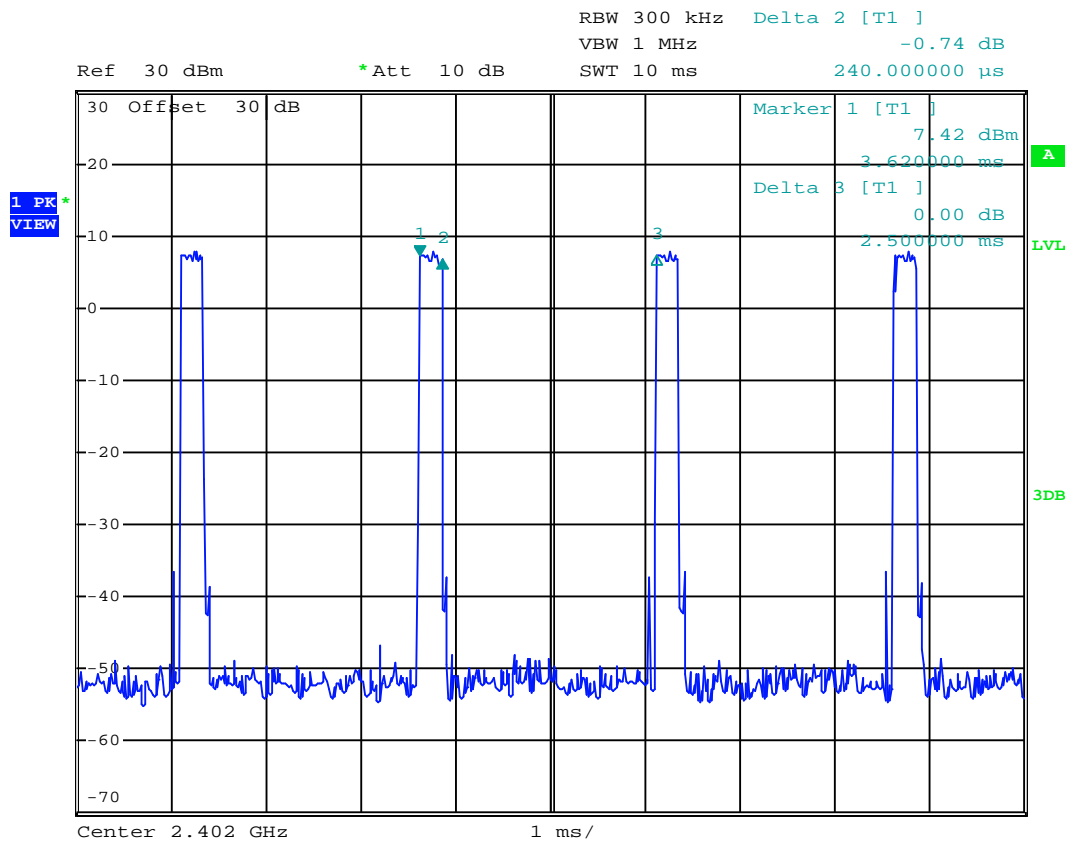

Date: 16.MAY.2019 10:59:53

GFSK mode was found to be the worst case test mode for 2.4GHz Bluetooth. The transmit Duty cycle was 9.52%, as indicated in the above plot. This duty cycle cannot be altered by the user. A measurement Crest factor of 10.5 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

### 13.4 DUT Positioning

DUT Positioning	
<b>Positioning</b>	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
<b>FACE Configuration</b>	This device is not intended to be held to the face and was not tested in the FACE configuration.
<b>BODY Configuration</b>	The DUT was securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom surface.
<b>HEAD Configuration</b>	This device is not intended to be held to the ear and was not tested in the HEAD configuration.
<b>Limb Worn Configuration</b>	The DUT was positioned with the back side directly againsts the phantom surface with the strap opened to allow direct contact or 0mm of the DUT and watch band to the phantom surface.

### 13.5 General Procedures and Report

General Procedures and Reporting	
<b>General Procedures</b>	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to <math>\pm 0.5^{\circ}\text{C}</math>. The Active TSL temperature was maintained to within <math>\pm 2.0^{\circ}\text{C}</math> throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p>
<b>Reporting</b>	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

### 13.6 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
<b>Fluid Dielectric Measurement Procedure</b>	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of <math>\pm 100\text{MHz}</math> for frequencies <math>&gt; 300\text{MHz}</math> and <math>\pm 50\text{MHz}</math> for frequencies <math>\leq 300\text{MHz}</math> with frequency step size of <math>10\text{MHz}</math> is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at <math>23^{\circ}\text{C}</math> in a <math>300\text{ml}</math> beaker) method. A sample of the TSL is placed in a <math>300\text{ml}</math> beaker and the open-ended coax is submerged approximately <math>8\text{mm}</math> below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are <math>&gt; 5\%</math> in range that the DUT is to be tested. If the adjustments fail to bring the parameters to <math>\leq 5\%</math> but are <math>&lt; 10\%</math>, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters <math>&gt; 10\%</math> in the DUT test frequency range are not used.</p>
<b>Systems Performance Check</b>	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the <math>10\text{MHz}</math> step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the <math>10\text{MHz}</math> step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the <math>1\text{g}</math> and <math>10\text{g}</math> SAR is measured. The measured <math>1\text{g}</math> and <math>10\text{g}</math> SAR is compared to the <math>1\text{g}</math> and <math>10\text{g}</math> SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to <math>1.0\text{W}</math> and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is <math>\leq 10\%</math> of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than <math>84</math> hours or if the Active TSL temperature has exceed <math>\pm 1^{\circ}\text{C}</math> of the initial fluid analysis.</p>

### 13.7 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^{\circ} \pm 1^{\circ}$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	$15 \text{ mm}$
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	$7.5 \text{ mm}$
Zoom Scan Spatial Resolution $\Delta Z$ (Uniform Grid)	$5 \text{ mm}$
Zoom Scan Volume X, Y, Z	$30 \text{ mm}$
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within $2\text{dB}$ of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the $1\text{-gram}$ and $10\text{-gram}$ peak spatial-average SAR	



### 13.8 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5 mm
Zoom Scan Spatial Resolution $\Delta Z$ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

### 13.9 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	10 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	4 mm
Zoom Scan Spatial Resolution $\Delta Z$ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

## 14.0 MEASUREMENT UNCERTAINTIES

Table 14.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Source of Uncertainty	IEEE 1528 Section	Toler ±%	Prob Dist	Div	c <sub>i</sub>	c <sub>i</sub>	Stand Unct ±%	Stand Unct ±%	V <sub>i</sub> or V <sub>eff</sub>
Measurement System					(1g)	(10g)	(1g)	(10g)	
EX3DV4 Probe Calibration** (k=1)	E.2.1	6.7	N	1	1	1	6.7	6.7	∞
Axial Isotropy** (k=1)	E.2.2	0.6	R	√3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy** (k=1)	E.2.2	3.2	R	√3	0.7	0.7	1.3	1.3	∞
Boundary Effect*	E.2.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity** (k=1)	E.2.4	0.5	R	√3	1	1	0.3	0.3	∞
System Detection Limits*	E.2.4	1.0	R	√3	1	1	0.6	0.6	∞
Modulation Response** (k=1)	E.2.5	8.3	R	√3	1	1	4.8	4.8	∞
Readout Electronics*	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time*	E.2.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time*	E.2.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
RF Ambient Conditions - Reflection	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
Probe Positioner Mechanical Tolerance*	E.6.2	0.0	R	√3	1	1	0.0	0.0	∞
Probe Positioning wrt Phantom Shell*	E.6.3	0.4	R	√3	1	1	0.2	0.2	∞
Post-processing*	E.5	2.0	R	√3	1	1	1.2	1.2	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.2	N	1	1	1	2.2	2.2	5
Device Holder Uncertainty*	E.4.1	3.6	N	1	1	1	3.6	3.6	∞
SAR Drift Measurement <sup>(2)</sup>	E.2.9	0.0	R	√3	1	1	0.0	0.0	∞
SAR Power Scaling <sup>(3)</sup>	E.6.5	0.0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	6.1	R	√3	1	1	3.5	3.5	∞
SAR Correction Uncertainty	E.3.2	1.6	N	1	1	0.84	1.6	1.3	∞
Liquid Conductivity (measurement)	E.3.3	5.0	N	1	0.78	0.71	3.9	3.6	10
Liquid Permittivity (measurement)	E.3.3	5.0	N	1	0.23	0.26	1.2	1.3	10
Liquid Conductivity (Temperature)	E.3.2	0.4	R	√3	0.78	0.71	0.2	0.2	10
Liquid Permittivity Temperature)	E.3.2	0.2	R	√3	0.23	0.26	0.0	0.0	10
Effective Degrees of Freedom <sup>(1)</sup>									V <sub>eff</sub> = 1141
Combined Standard Uncertainty			RSS				11.1	11.0	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.2	21.9	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30

Therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

(2) The SAR Value is compensated for Drift

(3) SAR Power Scaling not Required

\* Provided by SPEAG for DASY4

**Table 14.1 Calculation of Degrees of Freedom**

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1}^m \frac{c_i^4 u_i^4}{v_i}}$

## 15.0 FLUID DIELECTRIC PARAMETERS

**Table 15.0 Fluid Dielectric Parameters 2450MHz BODY TSL**

\*\*\*\*\*

Aprel Laboratory  
Test Result for UIM Dielectric Parameter  
Tue 14/May/2019 15:18:05  
Freq Frequency(GHz)  
FCC\_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon  
FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
FCC\_eB FCC Limits for Body Epsilon  
FCC\_sB FCC Limits for Body Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	52.69	1.81
2.3600	52.82	1.86	52.32	1.84
2.3700	52.81	1.87	52.51	1.83
2.3800	52.79	1.88	52.36	1.83
2.3900	52.78	1.89	52.23	1.86
2.4000	52.77	1.90	52.36	1.87
2.4100	52.75	1.91	52.22	1.86
2.4200	52.74	1.92	52.29	1.87
2.4300	52.73	1.93	52.14	1.91
2.4400	52.71	1.94	51.98	1.91
2.4500	52.70	1.95	51.99	1.95
2.4600	52.69	1.96	51.90	1.96
2.4700	52.67	1.98	52.06	1.96
2.4800	52.66	1.99	52.21	1.98
2.4900	52.65	2.01	52.08	1.99
2.5000	52.64	2.02	51.80	2.03
2.5100	52.62	2.04	52.03	2.02
2.5200	52.61	2.05	51.82	2.03
2.5300	52.60	2.06	51.87	2.05
2.5400	52.59	2.08	51.55	2.06
2.5500	52.57	2.09	51.57	2.06

### FLUID DIELECTRIC PARAMETERS

Date:	14 May 2019	Fluid Temp:	23.3	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350.0000		52.6900	1.8100	52.8300	1.85	-0.27%	-2.16%
2360.0000		52.3200	1.8400	52.8200	1.86	-0.95%	-1.08%
2370.0000		52.5100	1.8300	52.8100	1.87	-0.57%	-2.14%
2380.0000		52.3600	1.8300	52.7900	1.88	-0.81%	-2.66%
2390.0000		52.2300	1.8600	52.7800	1.89	-1.04%	-1.59%
2400.0000		52.3600	1.8700	52.7700	1.90	-0.78%	-1.58%
2402.0000	*	52.3320	1.8680	52.7660	1.90	-0.82%	-1.79%
2410.0000		52.2200	1.8600	52.7500	1.91	-1.00%	-2.62%
2412.0000	*	52.2340	1.8620	52.7480	1.91	-0.97%	-2.62%
2420.0000		52.2900	1.8700	52.7400	1.92	-0.85%	-2.60%
2430.0000		52.1400	1.9100	52.7300	1.93	-1.12%	-1.04%
2437.0000	*	52.0280	1.9100	52.7160	1.94	-1.31%	-1.39%
2440.0000		51.9800	1.9100	52.7100	1.94	-1.38%	-1.55%
2450.0000		51.9900	1.9500	52.7000	1.95	-1.35%	0.00%
2460.0000		51.9000	1.9600	52.6900	1.96	-1.50%	0.00%
2462.0000	*	51.9320	1.9600	52.6860	1.96	-1.43%	-0.20%
2470.0000		52.0600	1.9600	52.6700	1.98	-1.16%	-1.01%
2472.0000	*	52.0900	1.9640	52.6680	1.98	-1.10%	-0.91%
2480.0000		52.2100	1.9800	52.6600	1.99	-0.85%	-0.50%
2490.0000		52.0800	1.9900	52.6500	2.01	-1.08%	-1.00%
2500.0000		51.8000	2.0300	52.6400	2.02	-1.60%	0.50%
2510.0000		52.0300	2.0200	52.6200	2.04	-1.12%	-0.98%
2520.0000		51.8200	2.0300	52.6100	2.05	-1.50%	-0.98%
2530.0000		51.8700	2.0500	52.6000	2.06	-1.39%	-0.49%
2540.0000		51.5500	2.0600	52.5900	2.08	-1.98%	-0.96%
2550.0000		51.5700	2.0600	52.5700	2.09	-1.90%	-1.44%

\*Channel Frequency Tested

## 16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.0 System Verification Results 2450MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
14 May 2019		2450	D2450V2	825	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	23.3	23	29%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
51.99	52.70	-1.35%	1.95	1.95	0.00%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
12.40	12.80	-3.13%	5.73	6.05	-5.29%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
49.60	50.70	-2.17%	22.92	23.80	-3.70%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

## 17.0 SYSTEM VALIDATION SUMMARY

Table 17.0 System Validation Summary

System Validation Summary											
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results		
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy
30	24-Sep-18	EX3DV4	3600	CLA-30	1005	Head	50.15	0.72	Pass	Pass	Pass
150	27-Jun-18	EX3DV4	3600	CLA-150	4007	Body	66.48	0.79	Pass	Pass	Pass
150	11-Jul-18	EX3DV4	3600	CLA-150	4007	Head	51.51	0.81	Pass	Pass	Pass
450	08-May-17	EX3DV4	3600	D450V3	1068	Body	54.65	0.95	Pass	Pass	Pass
450	16-May-17	EX3DV4	3600	D450V3	1068	Head	43.70	0.83	Pass	Pass	Pass
835	03-May-18	EX3DV4	3600	D835V2	4d075	Body	53.31	1.00	Pass	Pass	Pass
835	19-May-17	EX3DV4	3600	D835V2	4d075	Head	42.01	0.89	Pass	Pass	Pass
900	08-May-18	EX3DV4	3600	D900V2	045	Body	54.46	1.10	Pass	Pass	Pass
900	02-Aug-17	EX3DV4	3600	D900V2	045	Head	39.10	0.93	Pass	Pass	Pass
1640	06-May-18	EX3DV4	3600	1620-S-2	207-00102	Body	39.87	1.27	Pass	Pass	Pass
1640	07-May-18	EX3DV4	3600	1620-S-2	207-00102	Head	39.87	1.27	Pass	Pass	Pass
1800	21-Jul-17	EX3DV4	3600	D1800V2	247	Body	54.77	1.53	Pass	Pass	Pass
1800	18-Jul-17	EX3DV4	3600	D1800V2	247	Head	40.70	1.33	Pass	Pass	Pass
2450	05-Apr-19	EX3DV4	3600	D2450V2	825	Body	51.55	1.90	Pass	Pass	Pass
2450	02-Apr-19	EX3DV4	3600	D2450V2	825	Head	36.58	1.85	Pass	Pass	Pass
5250	24-Jul-18	EX3DV4	3600	D5GHzV2	1031	Body	46.42	5.69	Pass	Pass	Pass
5250	24-Jul-18	EX3DV4	3600	D5GHzV2	1031	Head	35.96	4.99	Pass	Pass	Pass
5750	25-Jul-18	EX3DV4	3600	D5GHzV2	1031	Body	47.10	5.60	Pass	Pass	Pass

## 18.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 18.0 Measurement System Specifications

Measurement System Specification	
<b>Specifications</b>	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
<b>Data Acquisition Electronic (DAE) System</b>	
<b>Cell Controller</b>	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
<b>Data Converter</b>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V52.10.0.1446
	Postprocessing Software: SEMCAD X, V14.6.10( Deployment Build )
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<b>DASY Measurement Server</b>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<b>E-Field Probe</b>	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<b>Phantom</b>	
Type	SAM Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter



Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$ )	
Frequency:	10 MHz to $> 6$ GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)	
Directivity:	$\pm 0.2$ dB in head tissue (rotation around probe axis) $\pm 0.4$ dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 $\mu$ W/g to $> 100$ mW/g; Linearity: $\pm 0.2$ dB	
Surface Detect:	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	<b>EX3DV4 E-Field Probe</b>
Phantom Specification		
The SAM V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm $\pm$ .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.		
		<b>SAM Phantom</b>
Device Positioner Specification		
The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.		
		<b>Device Positioner</b>

## 19.0 TEST EQUIPMENT LIST

Table 19.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	19-Mar-19	19-Mar-20
-EX3DV4 E-Field Probe	00213	3600	26-Mar-19	26-Mar-20
-CLA 30 Validation Dipole	00300	1005	23-Nov-17	23-Nov-20
-CLA 150 Validation Dipole	00251	4007	27-Apr-17	27-Apr-20
-D450V3 Validation Dipole	00221	1068	23-Apr-18	23-Apr-21
-D750V3 Validation Dipole	00238	1061	19-Mar-19	19-Mar-22
-D835V2 Validation Dipole	00217	4D075	20-Apr-18	20-Apr-21
-D900V2 Validation Dipole	00020	54	24-Apr-17	24-Apr-20
-D1640/1620-S-2 Validation Dipole	00299	207-00102	07-Nov-17	07-Nov-20
-D2450V2 Validation Dipole*	00219	825	24-Apr-18	24-Apr-21
-D5GHzV2 Validation Dipole	00126	1031	26-Apr-18	26-Apr-21
ELI Phantom	00247	-	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00007	1835801	26-Mar-19	26-Mar-22
Gigatronics 80701A Power Sensor	00248	1833687	26-Mar-19	26-Mar-22
Gigatronics 80334A Power Sensor	00237	1837001	26-Mar-19	26-Mar-22
HP 8753ET Network Analyzer	00134	US39170292	29-Dec-17	29-Dec-20
Rohde & Schwarz SMR20 Signal Generator	00006	100104	29-May-17	29-May-20
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Traceable VWR Thermometer	00291	-	19-Nov-16	19-Nov-19
Traceable VWR Jumbo Humidity/Thermometer	00295	170120555	17-Feb-17	17-Feb-20
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	15-May-18	15-May-21
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	10-Feb-17	10-Feb-20

CNR = Calibration Not Required

SB=Stand By

COU = Calibrate on Use

\* Per KDB 865664 3.2.2; Supporting documentation is included in the report for validation dipoles exceeding the recommended annual calibration cycle.

When applicable, reference Appendix F

## 20.0 FLUID COMPOSITION

Table 20.0 Fluid Composition 2450MHz BODY TSL

Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt <sup>(1)</sup>	HEC <sup>(2)</sup>	Bacteriacide <sup>(3)</sup>
69.98	30.0	0.02	0.0	0.0

(1) Non-Iodized

(2) Hydroxyethyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

## APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 5/14/2019 4:19:12 PM

Test Laboratory: Celltech Labs

**SPC-2450B May 14 2019**

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825**

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium: TSL\_2450B[14MY19]

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.95$  S/m;  $\epsilon_r = 51.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
  - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASY52 52.10.1(1476);

**Frequency: 2450 MHz**

**SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Area Scan (4x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 13.2 W/kg

**SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 80.77 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 25.4 W/kg


**SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.73 W/kg**


Maximum value of SAR (measured) = 14.2 W/kg

**SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Z Scan (1x1x22):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Penetration depth = 7.921 (7.673, 8.024) [mm]

Maximum value of SAR (interpolated) = 20.5 W/kg

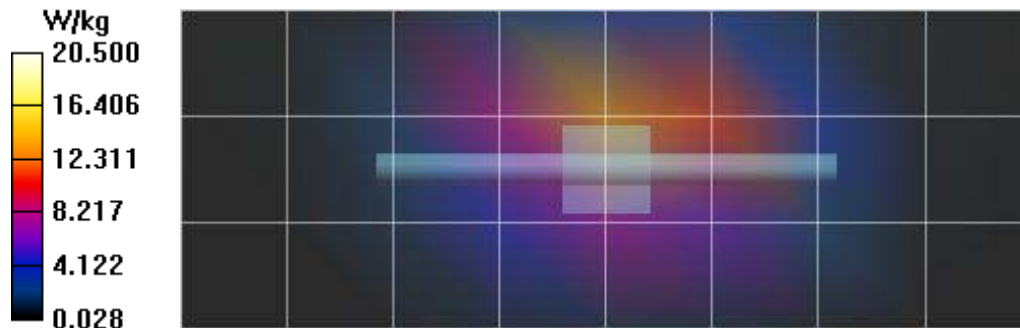

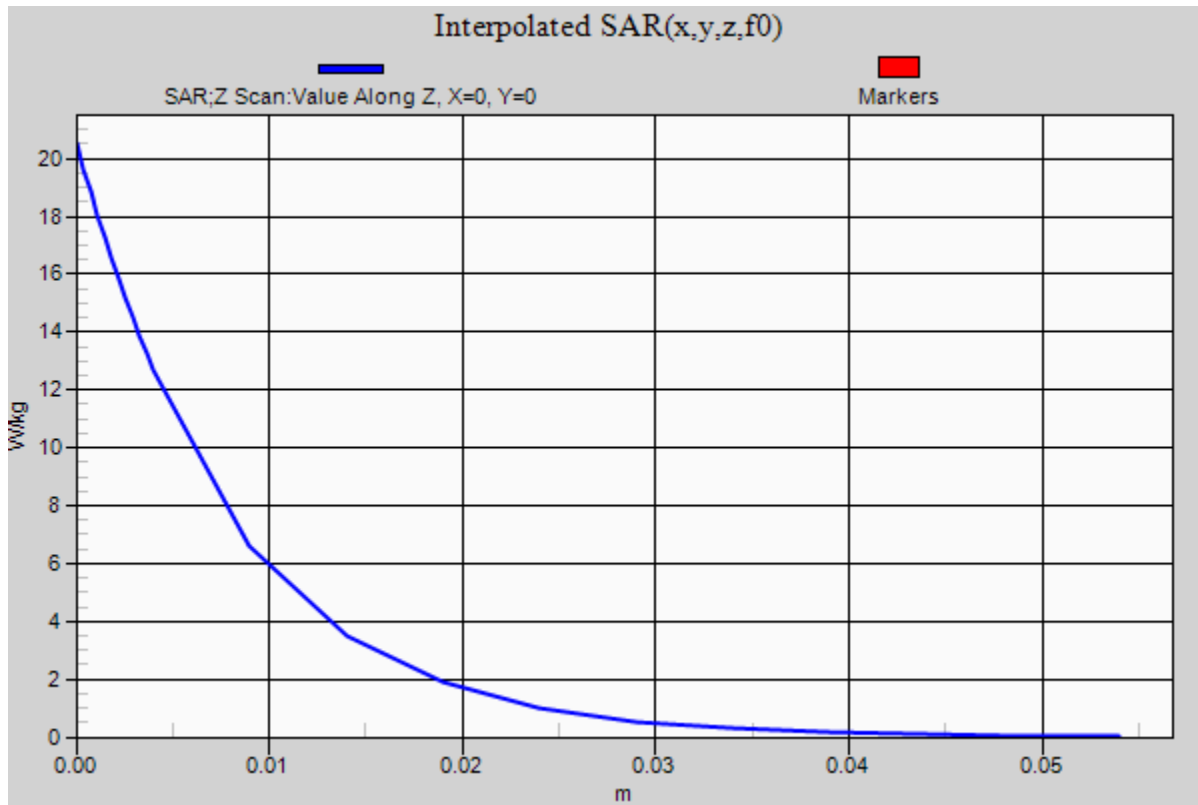

## APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

### Plot B3

Date/Time: 5/15/2019 1:47:48 PM,

Test Laboratory: Celltech Labs

**Garmin A03560-2450B May 16 2019**

**DUT: A03560; Type: Wrist-Worn Transmitter;**

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2412 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium: TSL\_2450B[14MY19]

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.862$  S/m;  $\epsilon_r = 52.234$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
  - Modulation Compensation: PMR for UID 10012 - CAB, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASY52 52.10.1(1476);

**Frequency: 2412 MHz**

**2450B/B3 A03560, Body-Front, 2412 MHz, Metal Band-WIFI/Area Scan (8x8x1):** Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 W/kg

**2450B/B3 A03560, Body-Front, 2412 MHz, Metal Band-WIFI/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.02 V/m; Power Drift = -0.51 dB

Peak SAR (extrapolated) = 2.36 W/kg

**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.519 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 1.37 W/kg

**2450B/B3 A03560, Body-Front, 2412 MHz, Metal Band-WIFI/Z Scan (1x1x22):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 7.313 (8.826, 6.985) [mm]

Maximum value of SAR (interpolated) = 2.03 W/kg

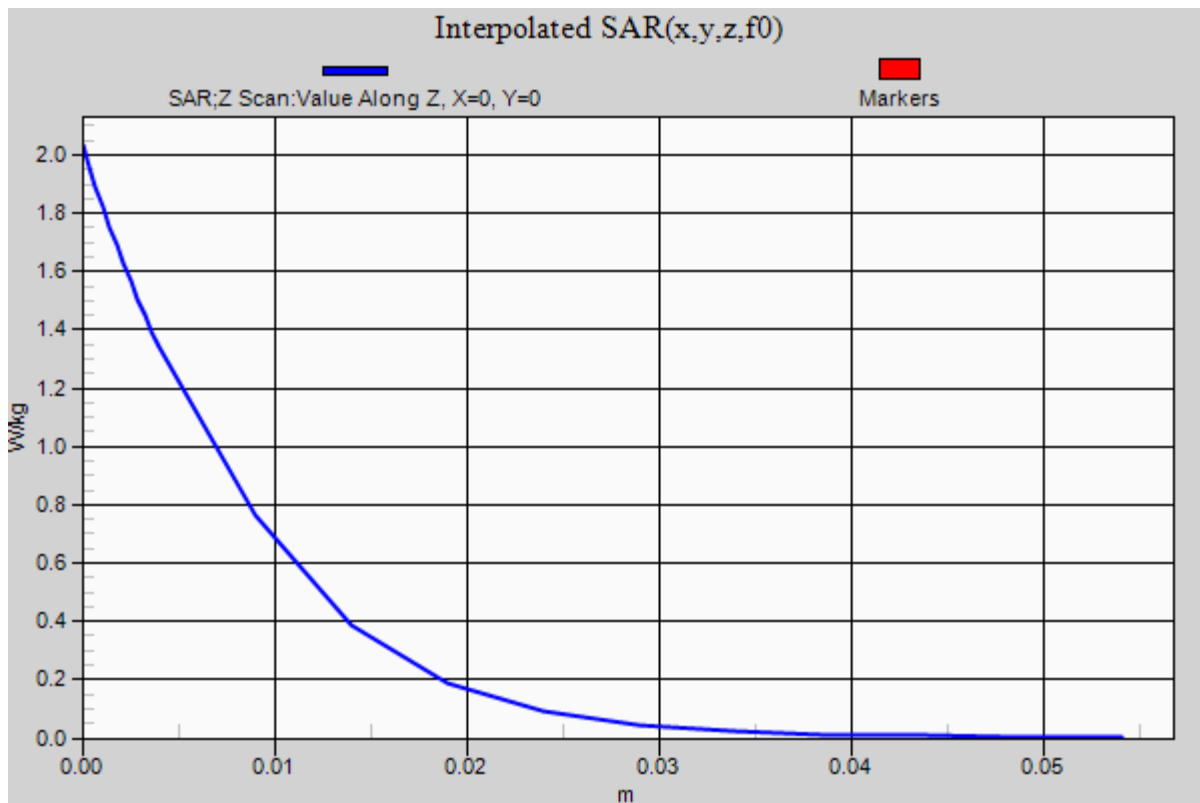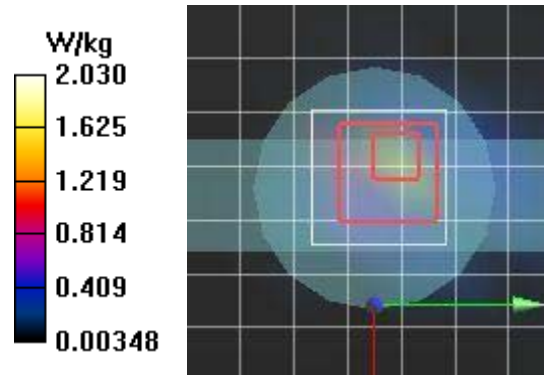

**Plot B4**

Date/Time: 5/16/2019 8:55:51 AM,

Test Laboratory: Celltech Labs

**Garmin A03560-2450B May 16 2019**

**DUT: A03560; Type: Wrist-Worn Transmitter;**

Communication System: UID 10030 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH1); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2402 MHz; Communication System PAR: 5.3 dB; PMF: 1.83865

Medium: TSL\_2450B[14MY19]

Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.868$  S/m;  $\epsilon_r = 52.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
  - Modulation Compensation: PMR for UID 10030 - CAA, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASY52 52.10.1(1476);

• **Frequency: 2402 MHz**

**2450B/B4 A03560, Body-Front, 2402 MHz, Metal Band-BT/Area Scan (8x8x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0130 W/kg

**2450B/B4 A03560, Body-Front, 2402 MHz, Metal Band-BT/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.911 V/m; Power Drift = 1.14 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00383 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0137 W/kg

**2450B/B4 A03560, Body-Front, 2402 MHz, Metal Band-BT/Z Scan (1x1x22):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm,  $dz=5$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 16.79 (13.96, 5.777) [mm]

Maximum value of SAR (interpolated) = 0.0122 W/kg

