



Test Report Serial Number:	45461459 R2.0
Test Report Date:	21 March 2019
Project Number:	1419

SAR Test Report - New Certification

Applicant:



1200 East 151 St.
Olathe, KS, 66062
USA

Maximum Reported 10g SAR			W/kg
FCC	Extremity DTS	0.28	
ISED	Extremity DTS	0.31	
General Pop. Limit:		4.00	

FCC ID:

IPH-03568

Product Model Number / HVIN

A03568

ISED Registration Number

1792A-03568

Product Name / PMN

A03568

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01



Industry
Canada

IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
4.0 NORMATIVE REFERENCES.....	7
5.0 STATEMENT OF COMPLIANCE.....	8
6.0 SAR MEASUREMENT SYSTEM.....	9
7.0 RF CONDUCTED POWER MEASUREMENT.....	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS.....	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS.....	11
8.0 NUMBER OF TEST CHANNELS (N_C) AND CONFIGURATIONS.....	12
9.0 ACCESSORIES EVALUATED.....	13
TABLE 9.0 ACCESSORIES EVALUATED.....	13
10.0 SAR MEASUREMENT SUMMARY.....	14
TABLE 10: MEASURED RESULTS.....	14
11.0 SCALING OF MAXIMUM MEASURED SAR.....	15
TABLE 11.0 SAR SCALING.....	15
TABLE 11.1 FLUID SENSITIVITY CALCULATION (10G).....	16
TABLE 11.2 FLUID SENSITIVITY CALCULATION (10G).....	17
12.0 SAR EXPOSURE LIMITS.....	18
TABLE 12.0 EXPOSURE LIMITS.....	18
13.0 DETAILS OF SAR EVALUATION.....	19
13.0 DAY LOG.....	19
13.1 DUT SETUP AND CONFIGURATION.....	20
13.2 DUT POSITIONING.....	20
13.3 GENERAL PROCEDURES AND REPORT.....	21
13.4 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	22
13.5 SCAN RESOLUTION 100MHZ TO 2GHZ.....	22
13.6 SCAN RESOLUTION 2GHZ TO 3GHZ.....	23
13.7 SCAN RESOLUTION 5GHZ TO 6GHZ.....	23
14.0 MEASUREMENT UNCERTAINTIES.....	24
TABLE 14.0 MEASUREMENT UNCERTAINTY.....	24
TABLE 14.1 CALCULATION OF DEGREES OF FREEDOM.....	25
15.0 FLUID DIELECTRIC PARAMETERS.....	26
TABLE 15.0 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL.....	26
TABLE 15.1 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL.....	28
16.0 SYSTEM VERIFICATION TEST RESULTS.....	30
TABLE 16.0 SYSTEM VERIFICATION RESULTS 2450MHZ BODY TSL.....	30
TABLE 16.1 SYSTEM VERIFICATION RESULTS 2450MHZ BODY TSL.....	31
17.0 SYSTEM VALIDATION SUMMARY.....	32

TABLE 17.0 SYSTEM VALIDATION SUMMARY.....	32
18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	33
TABLE 18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	33
19.0 TEST EQUIPMENT LIST.....	35
TABLE 19.0 EQUIPMENT LIST AND CALIBRATION.....	35
20.0 FLUID COMPOSITION.....	36
TABLE 20.0 FLUID COMPOSITION 2450MHz BODY TSL.....	36
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	37
SPC-2450B SEP 24 2018.....	37
SPC-2450B OCT 23 2018.....	39
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR.....	41
GARMIN-2450B SEP 25 2018.....	41
GARMIN-2450B SEP 25 2018.....	43
GARMIN-2450B OCT 24 2018.....	45
APPENDIX C - SETUP PHOTOS.....	47
APPENDIX D – DUT AND ACCESSORY PHOTOS.....	49
APPENDIX E – PROBE CALIBRATION.....	53
APPENDIX F – DIPOLE CALIBRATION.....	54
APPENDIX G - PHANTOM.....	55

1.0 DOCUMENT CONTROL

Samples Tested By:	Trevor Whillock		
Report Prepared By:	Art Voss		
Report Reviewed By:	Ben Hewson		
Report Issue Number	Description	By	Report Issue Date
R0.0	Draft	Art Voss	09 October 2018
R1.0	Initial Release	Art Voss	29 October 2018
	Addition of BLE/ANT Evaluation Section 10.0, 13.0, 15.0, 16.0 and Appendix C		
	Revised Rated Power Section 2.0 and 7.0		
	Revised Scaling Section 10.0		
R2.0	Revised Max SAR-Cover Page	Trevor Whillock	21 March 2019
	Removed Reference to DSS Cover and Section 2.0		
	Revised PMN for DUT and Accessory photos Appendix D		

2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St.
	Olathe, KS,66062
	USA
DUT Information	
Device Identifier(s):	FCC ID: IPH-03568
	IC: 1792A-03568
Type of Equipment:	Digital Transmission System (DTS) FCC Part 15, RSS 247
Device Model(s) / HVIN:	A03568
Device Marketing Name / PMN:	A03568
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	WiFi: 2412 - 2462 MHz
	BT: 2402 - 2480 MHz
Number of Channels:	See Section 8.0
Manuf. Max. Avg Rated Output Power:	Avg Power: WiFi 2.4GHz: 802.11b/ 12.55 dBm, 802.11g/ 13.26 dBm, 802.11n/ 13.42 dBm, CW/ 22.62 dBm Peak
	Avg Power: BT:GFSK/ 13.01 dBm, PI/4-2EDR/ 10.41dBm , CW/ 14.31 dBm Peak
	Avg Power:BLE:GMSK/ 13.60 dBm ANT: GFSK 13.22 dBm, CW/ 14.31 dBm Peak
Modulation:	WiFi 802.11b/g/n: DSSS, OFDM, CCK, MCS0-7, CW
	BT: GFSK, PI/4-DQPSK, CW
	BLE:GMSK
	ANT:GFSK
Duty Cycle:	100.0%
DUT Power Source:	5V USB, Internal Li-ion battery
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE OF EVALUATION

The A03568, FCC ID: IPH-A03568 ISEDC ID: 1792A-03568 is a wrist-worn transceiver that is capable of operating in the 2.4 GHz WiFi and Bluetooth frequency bands. The transceiver is not capable of simultaneous transmission between WiFi and Bluetooth. The device is intended for General Population Use. The product operates from an internal proprietary Li-ion rechargeable battery which can be connected to a compliant USB interface port, AC or DC adapter for charging. Test samples provided by the manufacturer were capable of transmitting at select frequencies and modulations preset by the manufacturer. An additional antenna modification was prepared for one sample allowing the ability to connect test equipment for antenna port conducted power analysis. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEEE 1528, IEC 62209-2, FCC KDB 865646, 447498, 248227 and RSS 102.

4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2017	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant:	Garmin International Inc.	
Model / HVIN:	A03568	
Standard(s) Applied:	FCC 47 CFR §2.1093 Health Canada's Safety Code 6	
Measurement Procedure(s):	FCC KDB 865664, FCC KDB 447498, FCC KDB248227 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2	
Reason For Issue:	Use Group:	Limits Applied:
<input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change	<input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled	<input type="checkbox"/> 1.6W/kg - 1g Volume <input type="checkbox"/> 8.0W/kg - 1g Volume <input checked="" type="checkbox"/> 4.0W/kg - 10g Volume
Reason for Change:	Date(s) Evaluated:	
Original Filing	September 24th-25th & October 23rd-24th 2018	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
 Technical Manager
 Celltech Labs Inc.
 29 October 2018
 Date



6.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



DASY 6 SAR System with SAM Phantom



DASY 6 Measurement Controller

7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements

Conducted Power Measurements								
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
1	2412	11.86	12.55	0.02	-0.69	-	WLAN 2.4G	DSS-1Mbps
2	2417	12.04	12.55	0.02	-0.51	-		DSS-1Mbps
3	2422	12.00	12.55	0.02	-0.55	-		DSS-1Mbps
4	2427	12.32	12.55	0.02	-0.23	-		DSS-1Mbps
5	2432	12.33	12.55	0.02	-0.22	-		DSS-1Mbps
6	2437	12.03	12.55	0.02	-0.52	-		DSS-1Mbps
7	2442	12.13	12.55	0.02	-0.42	-		DSS-1Mbps
8	2447	11.83	12.55	0.02	-0.72	-		DSS-1Mbps
9	2452	11.97	12.55	0.02	-0.58	-		DSS-1Mbps
10	2457	11.99	12.55	0.02	-0.56	-		DSS-1Mbps
11	2462	11.48	12.55	0.02	-1.07	-		DSS-1Mbps
2	2417	11.56	12.55	0.02	-0.99	-	DSS-2Mbps	
		10.69	12.55	0.02	-1.86	-	DSS-5.5Mbps	
		11.30	12.55	0.02	-1.25	-	DSS-11Mbps	
		13.14	13.26	0.02	-0.12	-	802.11b	
		13.18	13.26	0.02	-0.08	-	OFDM-6Mbps	
		13.04	13.42	0.02	-0.38	-	802.11g	
		13.24	13.42	0.02	-0.18	Y	MCS-7	
5	2432	11.12	12.55	0.02	-1.43	-	DSS-2Mbps	
		11.16	12.55	0.02	-1.39	-	DSS-5.5Mbps	
		11.46	12.55	0.02	-1.09	-	DSS-11Mbps	
		13.17	13.26	0.02	-0.09	-	802.11b	
		13.26	13.26	0.02	0.00	-	OFDM-6Mbps	
		13.10	13.42	0.02	-0.32	-	802.11g	
		13.33	13.42	0.02	-0.09	Y	MCS-7	
10	2457	10.92	12.55	0.02	-1.63	-	DSS-2Mbps	
		11.18	12.55	0.02	-1.37	-	DSS-5.5Mbps	
		11.55	12.55	0.02	-1.00	-	DSS-11Mbps	
		12.83	13.26	0.02	-0.43	-	802.11b	
		12.90	13.26	0.02	-0.36	-	OFDM-6Mbps	
		13.00	13.42	0.02	-0.42	-	802.11g	
		13.06	13.42	0.02	-0.36	Y	MCS-7	

Table 7.1 Conducted Power Measurements

Conducted Power Measurements								
Channel	Frequency (MHz)	Measured Power Peak (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
2	2402	12.51	13.01	0.02	-0.50	Y	BT/BLE/ANT	BT-BR-GFSK
41	2441	12.23	13.01	0.02	-0.78	-		
80	2480	11.85	13.01	0.02	-1.16	-		
2	2402	9.23	10.41	0.011	-1.18	-		BT 2EDR(PI/4)
		12.55	13.60	0.023	-1.05	-		BLE-GMSK
		12.82	13.22	0.021	-0.40	Y		ANT-GFSK

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. The highest maximum output power channels were measured in MCS-7 mode than any other mode and data rate configuration in 802.11 b/g/n.

Due to the nature of the device, Bluetooth and BLE/ ANT were evaluated for SAR. See section 8.0 for details

Conducted power measurements were taken across the various channels and modes. The highest maximum output power channel was measured in GFSK mode than any other mode and data rate configuration

SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down

8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS

WiFi SAR Evaluation:

SAR was evaluated in MCS-7 mode using the power level setting specified by the manufacture to be the max output power and produce the most conservative SAR.

As per FCC KDB 24827, the required 802.11 test channels are Ch1, Ch6 and Ch 11; however, higher output power was found on adjacent channels. As a result the channels selected for SAR evaluation included Ch2, Ch5, and Ch10.

BT SAR Evaluation:

SAR was evaluated in BT-BR GFSK mode using power level setting specified by the manufacture to be the max output power and produce the most conservative SAR. The highest measured maximum output power was measured on Ch 2 in GFSK mode.

BLE/ ANT SAR Evaluation:

SAR was evaluated in Ant-GFSK mode using the power level set setting specified by the manufacture to be the max output power and produce the most conservative SAR. The highest measured maximum output power was measured on Ch 2 in GFSK mode. ANT-GFSK had a higher maximum output power when compared to BLE; therefore, only ANT was selected for SAR evaluation.

Note: WiFi, Bluetooth, BLE and ANT transmitters share the same antenna and cannot simultaneously transmit.

When applicable, SAR test reduction methods may be utilized.

General SAR Test Reduction Considerations

As per KDB 447498D01 4.4.1,

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid band or highest output power channel is:

c) $\leq 0.4W/kg$ or $1.0W/kg$, for 1-g or 10-g respectively, when the transmission band is $\geq 200Mh$

See 13.1 for details.

9.0 ACCESSORIES EVALUATED

Table 9.0 Accessories Evaluated

Manufacturer's Accessory List						
Test Report ID Number	Manufacturer's Part Number	Description	UDC Group ⁽¹⁾	Type II Group ⁽²⁾	SAR ⁽³⁾ Evaluated	SAR ⁽⁴⁾ Tested
B1	011-04747-00	Black Silicone Wrist Band	n/a	n/a	Y	Y
P1	362-00087-00	AC Adapter, 5.0V, 1.0A, USB-A Recpt	n/a	n/a	n/a	n/a
P2	010-12491-01	CA Assy, Plug Charger	n/a	n/a	n/a	n/a

10.0 SAR MEASUREMENT SUMMARY

Table 10: Measured Results

Measured SAR Results (10g) - BODY(FCC/ISED)																
Date	Plot ID #	DUT Model	Test Type	Test Freq. (MHz)	Modulation	Accessories				DUT Spacing		Meas. Cond. Power (dBm)	Measured SAR 10g (W/kg)	SAR Drift (dB)		
						Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)					
Extremity SAR 2.4 GHz																
24 Sep 2018	B1	A03568	BODY Back Side	2417	MCS-7	n/a	n/a	B1	n/a	0	0	13.24	0.241	-0.750		
25 Sep 2018	B2	A03568	BODY Back Side	2432	MCS-7	n/a	n/a	B1	n/a	0	0	13.33	0.246	-0.830		
25 Sep 2018	B3	A03568	BODY Back Side	2457	MCS-7	n/a	n/a	B1	n/a	0	0	13.06	0.217	-0.630		
25 Sep 2018	*B4	A03568	BODY Back Side	2402	BT-GFSK	n/a	n/a	B1	n/a	0	0	12.51	0.248	0.110		
24 Oct 2018	*B5	A03568	BODY Back Side	2402	ANT-GFSK	n/a	n/a	B1	n/a	0	0	12.82	0.247	0.130		
SAR Limit						Spatial Peak				RF Exposure Category						
FCC 47 CFR 2.1093						Health Canada Safety Code 6				Extremity	10g Average	4.0 W/kg		General Population		

Reference Section 8.0 for details

*Note: KDB447498D01 general SAR test reduction applies when reported 10g SAR is ≤ 1.0wW/kg for transmission > than 200 MHz

11.0 SCALING OF MAXIMUM MEASURED SAR

Table 11.0 SAR Scaling

Scaling of Maximum Measured SAR ⁽¹⁾							
Plot ID	Configuration	Freq (MHz)	Measured Fluid Deviation		Measured Conducted Power (dBm)	Measured Drift (dB)	Measured SAR (10g) (W/kg)
			Permittivity	Conductivity			
B2	Extremity	2432	-1.67%	7.04%	13.3	-0.830	0.246
B4	Extremity	2402	-1.35%	5.89%	14.0	0.110	0.248
Step 1							
Fluid Sensitivity Adjustment							
Plot ID	Scale Factor (%)		X	Measured SAR (W/kg)	=	Step 1 Adjusted SAR (10g) (W/kg)	
B2	2.114%		X	0.246	=	0.251	
B4	1.795%		X	0.248	=	0.252	
Step 2							
Manufacturer's Tune-Up Tolerance							
Plot ID	Measured Conducted Power (dBm)	Rated Power (dBm)	Delta (dB)	+	Step 1 Adjusted SAR (W/kg)	=	Step 2 Adjusted SAR (10g) (W/kg)
B2	13.33	13.42	-0.1	+	0.251	=	0.252
B4	12.51	13.01	-0.5		0.252	=	0.282
Step 3 (ISED)							
Drift Adjustment							
Plot ID	Measured Drift (dB)	+	Step 2 Adjusted SAR (W/kg)	=	Step 3 Adjusted SAR (10g) (W/kg)		
B2	-0.830	+	0.252	=	0.305		
B4	0.110	+	0.282	=	0.282		
Step 4							
Reported SAR							
Plot ID	FCC From Steps 1 and 2 10g SAR (W/kg)			ISED From Steps 1 through 3 10g SAR (W/kg)			
B2	0.252			0.305			
B4	0.282			0.282			

Note: WiFi, Bluetooth, BLE and ANT transmitters share the same antenna and cannot simultaneously transmit. Due to the nature of this device, WiFi, Bluetooth, and BLE/ ANT were evaluated for standalone SAR only.


NOTES to Table 11.0	
<p>(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 5. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.</p> <p>NOTE: Some of the scaling factors in Steps 1 through 5 may not apply and are identified by light gray text.</p>	
Step 1	Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 11.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).
Step 2	Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.
Step 3	Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.
Step 4	Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.
Step 5	Per RSS-102. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.
Step 6	The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 5 are reported on Page 1 of this report.

Table 11.1 Fluid Sensitivity Calculation (10g)

Fluid Sensitivity Calculation (10g)	
Delta SAR = Ce * Delta Er + C(sigma)*Delta Sigma	
Frequency (GHz)	Plot ID
2.432	B2
Ce	-0.1585
Cσ	0.2627
Δ E	-1.6700
Δσ	7.0400
ΔSAR	2.1143
Scale Factor Is Positive. Scaling Required	

Table 11.2 Fluid Sensitivity Calculation (10g)

Fluid Sensitivity Calculation (10g)	
$\Delta SAR = C_e * \Delta E_r + C(\sigma) * \Delta \sigma$	
Frequency (GHz)	Plot ID
2.402	B4
Ce	-0.1575
C σ	0.2686
ΔE	-1.3500
$\Delta \sigma$	5.8900
ΔSAR	1.7946
Scale Factor Is Positive. Scaling Required	

<p>I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.</p>	 <hr/> <p>Trevor Whillock Test Lab Engineer Celltech Labs Inc. 29 October 2018 Date</p>
---	--

12.0 SAR EXPOSURE LIMITS

Table 12.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
Spatial Average ⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak ⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak ⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

13.0 DETAILS OF SAR EVALUATION

13.0 Day Log

DAY LOG					Fluid Dielectric	SPC	Test
Date	Ambient Temp °C	Fluid Temp °C	Humidity	TSL			
24 Sep 2018	23.0	21.5	32%	2450B	X	X	X
25 Sep 2018	22.0	22.0	32%	2450B			X
23 Oct 2018	23.0	22.3	26%	2450B	X	X	
24 Oct 2018	24.0	22.7	27%	2450B			X

13.1 DUT Setup and Configuration

DUT Setup and Configuration	
1	<p>The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 865646, 447498, 248277, and RSS-102.</p> <p>The device was evaluated at a phantom separation distance of 0mm with the back side of the device against the phantom.</p>
2	<p>General SAR Test Reduction Considerations</p> <p>As per KDB 447498D01 4.4.1, Testing of other required channels within the operating mode of a frequency band is not required when the <u>reported</u> 1-g or 10-g SAR for the mid band or highest output power channel is. c) $\leq 0.4W/kg$ or $1.0W/kg$, for 1-g or 10-g respectively, when the transmission band is $\geq 200Mhz$</p>
3	<p>The Device was capable of transmitting at various modulations and data rates. The Conducted Power was higher when measured in MCS-7 Mode for 2.4GHz than any other configuration. The DUT was evaluated for SAR in MCS-7 mode at the maximum conducted output power level, preset by the manufacturer.</p> <p>Each SAR evaluation was performed with a fully charged battery.</p>
4	<p>The Device was capable of transmitting at various modulations and data rates. The Conducted Power was higher when measured in GFSK Mode for 2.4GHz Bluetooth band than any other configuration. SAR was evaluated in GFSK mode using power level setting specified by the manufacture to be the max output power and produce the most conservative SAR. The highest measured maximum output power was measured on Ch 2 in GFSK mode.</p> <p>ANT-GFSK had a higher maximum output power when compared to BLE; therefore, only ANT was selected for SAR evaluation.</p>

13.2 DUT Positioning

DUT Positioning	
Positioning	<p>The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.</p>
FACE Configuration	<p>This device is not intended to be held to the face and was not tested in the FACE configuration.</p>
BODY Configuration	<p>The DUT was securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom surface.</p>
HEAD Configuration	<p>This device is not intended to be held to the ear and was not tested in the HEAD configuration.</p>
Limb Worn Configuration	<p>The DUT was positioned with the back side directly against the phantom surface with the strap opened to allow direct contact or 0mm of the DUT and watch band to the phantom surface.</p>

13.3 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 2.0^{\circ}\text{C}$ throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <i>Maximum Distance to Phantom Surface</i> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

13.4 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>
Systems Performance Check	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>

13.5 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.6 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	12 mm
Zoom Scan Spatial Resolution ΔX, ΔY	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.7 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	10 mm
Zoom Scan Spatial Resolution ΔX, ΔY	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

14.0 MEASUREMENT UNCERTAINTIES

Table 14.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration*	E.2.1	6.6	Normal	1	1	1	6.60	6.60	∞
Axial Isotropy*	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy*	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect*	E.2.3	8.3	Rectangular	1.732050808	1	1	4.8	4.8	∞
Linearity*	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits*	E.2.4	1.0	Rectangular	1.732050808	1	1	0.6	0.6	∞
Modulation Response	E.2.5	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
Readout Electronics*	E.2.6	1.0	Normal	1	1	1	1.0	1.0	∞
Response Time*	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time*	E.2.8	1.4	Rectangular	1.732050808	1	1	0.8	0.8	∞
RF Ambient Conditions - Noise	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
RF Ambient Conditions - Reflection	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance*	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell*	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation*	E.5	3.9	Rectangular	1.732050808	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	0.3	Normal	1	1	1	0.3	0.3	5
Device Holder Uncertainty*	E.4.1	3.6	Normal	1	1	1	3.6	3.6	∞
SAR Drift Measurement**	E.2.9	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
SAR Scaling***	E.6.5	2.0	Rectangular	1.732050808	1	1	1.2	1.2	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Uncertainty	E.3.2	1.2	Normal	1	1	0.84	1.2	1.0	∞
Liquid Conductivity (measurement)	E.3.3	6.8	Normal	1	0.78	0.71	5.3	4.8	10
Liquid Permittivity (measurement)	E.3.3	5.3	Normal	1	0.23	0.26	1.2	1.4	10
Liquid Conductivity (Temperature)	E.3.2	0.1	Rectangular	1.732050808	0.78	0.71	0.1	0.0	∞
Liquid Permittivity Temperature)	E.3.2	0.0	Rectangular	1.732050808	0.23	0.26	0.0	0.0	∞
Effective Degrees of Freedom⁽¹⁾								V_{eff} = 873.2	
Combined Standard Uncertainty			RSS				12.59		12.40
Expanded Uncertainty (95% Confidence Interval)			k=2				25.18		24.80
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30 therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

* Provided by SPEAG

Table 14.1 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

15.0 FLUID DIELECTRIC PARAMETERS

Table 15.0 Fluid Dielectric Parameters 2450MHz BODY TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Mon 24/Sep/2018 13:44:15
Freq      Frequency(GHz)
FCC_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	52.19	1.95
2.3600	52.82	1.86	52.36	1.96
2.3700	52.81	1.87	52.03	1.97
2.3800	52.79	1.88	52.18	1.98
2.3900	52.78	1.89	52.02	1.99
2.4000	52.77	1.90	52.08	2.01
2.4100	52.75	1.91	51.96	2.03
2.4200	52.74	1.92	51.71	2.05
2.4300	52.73	1.93	51.85	2.07
2.4400	52.71	1.94	51.84	2.06
2.4500	52.70	1.95	51.97	2.12
2.4600	52.69	1.96	51.59	2.11
2.4700	52.67	1.98	51.62	2.12
2.4800	52.66	1.99	51.71	2.12
2.4900	52.65	2.01	51.62	2.16
2.5000	52.64	2.02	51.45	2.17
2.5100	52.62	2.04	51.37	2.18
2.5200	52.61	2.05	51.62	2.21
2.5300	52.60	2.06	51.42	2.21
2.5400	52.59	2.08	51.51	2.23
2.5500	52.57	2.09	51.35	2.21

FLUID DIELECTRIC PARAMETERS								
Date:	24 Sep 2018	Fluid Temp:		21.5	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity		
2350.0000		52.1900	1.9500	52.8300	1.85	-1.21%	5.41%	
2360.0000		52.3600	1.9600	52.8200	1.86	-0.87%	5.38%	
2370.0000		52.0300	1.9700	52.8100	1.87	-1.48%	5.35%	
2380.0000		52.1800	1.9800	52.7900	1.88	-1.16%	5.32%	
2390.0000		52.0200	1.9900	52.7800	1.89	-1.44%	5.29%	
2400.0000		52.0800	2.0100	52.7700	1.90	-1.31%	5.79%	
2402.0000	*	52.0560	2.0140	52.7660	1.90	-1.35%	5.89%	
2410.0000		51.9600	2.0300	52.7500	1.91	-1.50%	6.28%	
2417.0000	*	51.7850	2.0440	52.7430	1.92	-1.82%	6.62%	
2420.0000		51.7100	2.0500	52.7400	1.92	-1.95%	6.77%	
2430.0000		51.8500	2.0700	52.7300	1.93	-1.67%	7.25%	
2432.0000	*	51.8480	2.0680	52.7260	1.93	-1.67%	7.04%	
2440.0000		51.8400	2.0600	52.7100	1.94	-1.65%	6.19%	
2450.0000		51.9700	2.1200	52.7000	1.95	-1.39%	8.72%	
2457.0000	*	51.7040	2.1130	52.6930	1.96	-1.88%	7.97%	
2460.0000		51.5900	2.1100	52.6900	1.96	-2.09%	7.65%	
2470.0000		51.6200	2.1200	52.6700	1.98	-1.99%	7.07%	
2480.0000		51.7100	2.1200	52.6600	1.99	-1.80%	6.53%	
2490.0000		51.6200	2.1600	52.6500	2.01	-1.96%	7.46%	
2500.0000		51.4500	2.1700	52.6400	2.02	-2.26%	7.43%	
2510.0000		51.3700	2.1800	52.6200	2.04	-2.38%	6.86%	
2520.0000		51.6200	2.2100	52.6100	2.05	-1.88%	7.80%	
2530.0000		51.4200	2.2100	52.6000	2.06	-2.24%	7.28%	
2540.0000		51.5100	2.2300	52.5900	2.08	-2.05%	7.21%	
2550.0000		51.3500	2.2100	52.5700	2.09	-2.32%	5.74%	

*Channel Frequency Tested

Table 15.1 Fluid Dielectric Parameters 2450MHz BODY TSL

 Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Tue 23/Oct/2018 15:34:37
 Freq Frequency(GHz)
 FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	50.94	1.87
2.3600	52.82	1.86	51.04	1.86
2.3700	52.81	1.87	50.94	1.88
2.3800	52.79	1.88	50.87	1.89
2.3900	52.78	1.89	50.90	1.90
2.4000	52.77	1.90	50.67	1.91
2.4100	52.75	1.91	50.58	1.96
2.4200	52.74	1.92	50.76	1.94
2.4300	52.73	1.93	50.55	1.95
2.4400	52.71	1.94	50.64	1.98
2.4500	52.70	1.95	50.78	1.98
2.4600	52.69	1.96	50.51	2.01
2.4700	52.67	1.98	50.53	2.01
2.4800	52.66	1.99	50.52	2.00
2.4900	52.65	2.01	50.64	2.03
2.5000	52.64	2.02	50.45	2.04
2.5100	52.62	2.04	50.48	2.07
2.5200	52.61	2.05	50.21	2.08
2.5300	52.60	2.06	50.28	2.12
2.5400	52.59	2.08	50.35	2.11
2.5500	52.57	2.09	50.20	2.15

FLUID DIELECTRIC PARAMETERS							
Date:	23 Oct 2018	Fluid Temp:	22.3	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
2350.0000		50.9400	1.8700	52.8300	1.85	-3.58%	1.08%
2360.0000		51.0400	1.8600	52.8200	1.86	-3.37%	0.00%
2370.0000		50.9400	1.8800	52.8100	1.87	-3.54%	0.53%
2380.0000		50.8700	1.8900	52.7900	1.88	-3.64%	0.53%
2390.0000		50.9000	1.9000	52.7800	1.89	-3.56%	0.53%
2400.0000		50.6700	1.9100	52.7700	1.90	-3.98%	0.53%
2402.0000	*	50.6520	1.9200	52.7660	1.90	-4.01%	0.95%
2410.0000		50.5800	1.9600	52.7500	1.91	-4.11%	2.62%
2417.0000	*	50.7060	1.9460	52.7430	1.92	-3.86%	1.51%
2420.0000		50.7600	1.9400	52.7400	1.92	-3.75%	1.04%
2430.0000		50.5500	1.9500	52.7300	1.93	-4.13%	1.04%
2432.0000	*	50.5680	1.9560	52.7260	1.93	-4.09%	1.24%
2440.0000		50.6400	1.9800	52.7100	1.94	-3.93%	2.06%
2441.0000	*	50.6540	1.9800	52.7090	1.94	-3.90%	2.01%
2450.0000		50.7800	1.9800	52.7000	1.95	-3.64%	1.54%
2460.0000		50.5100	2.0100	52.6900	1.96	-4.14%	2.55%
2462.0000	*	50.5140	2.0100	52.6860	1.96	-4.12%	2.34%
2470.0000		50.5300	2.0100	52.6700	1.98	-4.06%	1.52%
2480.0000	*	50.5200	2.0000	52.6600	1.99	-4.06%	0.50%
2490.0000		50.6400	2.0300	52.6500	2.01	-3.82%	1.00%
2500.0000		50.4500	2.0400	52.6400	2.02	-4.16%	0.99%
2510.0000		50.4800	2.0700	52.6200	2.04	-4.07%	1.47%
2520.0000		50.2100	2.0800	52.6100	2.05	-4.56%	1.46%
2530.0000		50.2800	2.1200	52.6000	2.06	-4.41%	2.91%
2540.0000		50.3500	2.1100	52.5900	2.08	-4.26%	1.44%
2550.0000		50.2000	2.1500	52.5700	2.09	-4.51%	2.87%

*Channel Frequency Tested

16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.0 System Verification Results 2450MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
24 Sep 2018		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	21.5	23	32%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
51.97	52.70	-1.39%	2.12	1.95	8.72%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
13.60	13.00	4.62%	6.22	6.05	2.81%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
54.40	50.70	7.30%	24.88	23.80	4.54%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 16.1 System Verification Results 2450MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
23 Oct 2018		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	22.3	23	26%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
50.78	52.70	-3.64%	1.98	1.95	1.54%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
12.20	12.80	-4.69%	5.62	5.97	-5.86%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
48.80	50.40	-3.17%	22.48	23.70	-5.15%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer’s dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

17.0 SYSTEM VALIDATION SUMMARY



Table 17.0 System Validation Summary

System Validation Summary											
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results		
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy
30		EX3DV4	3600	CLA-30	1005	Head					
150	03-May-17	EX3DV4	3600	CLA-150	4007	Body	66.48	0.79	Pass	Pass	Pass
150	04-May-17	EX3DV4	3600	CLA-150	4007	Head	51.51	0.81	Pass	Pass	Pass
450	08-May-17	EX3DV4	3600	D450V3	1068	Body	54.65	0.95	Pass	Pass	Pass
450	16-May-17	EX3DV4	3600	D450V3	1068	Head	43.70	0.83	Pass	Pass	Pass
835	03-May-18	EX3DV4	3600	D835V2	4d075	Body	53.31	1.00	Pass	Pass	Pass
835	19-May-17	EX3DV4	3600	D835V2	4d075	Head	42.01	0.89	Pass	Pass	Pass
900	08-May-18	EX3DV4	3600	D900V2	045	Body	54.46	1.10	Pass	Pass	Pass
900	02-Aug-17	EX3DV4	3600	D900V2	045	Head	39.10	0.93	Pass	Pass	Pass
1640	06-May-18	EX3DV4	3600	1620-S-2	207-00102	Body	39.87	1.27	Pass	Pass	Pass
1640	07-May-18	EX3DV4	3600	1620-S-2	207-00102	Head	39.87	1.27	Pass	Pass	Pass
1800	21-Jul-18	EX3DV4	3600	D1800V2	247	Body	54.77	1.53	Pass	Pass	Pass
1800	18-Jul-18	EX3DV4	3600	D1800V2	247	Head	40.70	1.33	Pass	Pass	Pass
2450	23-May-18	EX3DV4	3600	D2450V2	825	Body	49.51	1.92	Pass	Pass	Pass
2450	24-May-18	EX3DV4	3600	D2450V2	825	Head	37.95	1.87	Pass	Pass	Pass
5250	24-Jul-18	EX3DV4	3600	D5GHzV2	1031	Body	46.42	5.69	Pass	Pass	Pass
5250	24-Jul-18	EX3DV4	3600	D5GHzV2	1031	Head	35.96	4.99	Pass	Pass	Pass
5750	25-Jul-18	EX3DV4	3600	D5GHzV2	1031	Body	47.10	5.60	Pass	Pass	Pass

18.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 18.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V52.10.0.1446 Postprocessing Software: SEMCAD X, V14.6.10(Deployment Build)
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	SAM
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter

Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	
Phantom Specification		
<p>The SAM phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.</p>		
		SAM Phantom
Device Positioner Specification		
<p>The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>		
		Device Positioner

19.0 TEST EQUIPMENT LIST

Table 19.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	20-Apr-18	20-Apr-19
-EX3DV4 E-Field Probe	00213	3600	25-Apr-18	25-Apr-19
-CLA 30 Validation Dipole	00300	1005	23-Nov-17	23-Nov-20
-CLA150 Validation Dipole	00251	4007	27-Apr-17	27-Apr-20
-D450V3 Validation Dipole	00221	1068	23-Apr-18	23-Apr-21
-D835V2 Validation Dipole	00217	4D075	20-Apr-18	20-Apr-21
-D900V2 Validation Dipole	00020	54	24-Apr-17	24-Apr-20
-D1640/1620-S-2 Validation Dipole	00299	207-00102	07-Nov-17	07-Nov-20
-D2450V2 Validation Dipole	00219	825	24-Apr-18	24-Apr-21
-D5GHzV2 Validation Dipole	00126	1031	26-Apr-18	26-Apr-21
ELI Phantom	00247	-	CNR	CNR
SAM Phantom	00154	-	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00110	1835801	29-Feb-16	29-Feb-19
Gigatronics 80701A Power Sensor	00248	1833687	29-Feb-16	29-Feb-19
HP 8753ET Network Analyzer	00134	US39170292	29-Dec-17	29-Dec-20
Rohde & Schwarz SMR20 Signal Generator	00006	100104	29-May-17	29-May-20
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Traceable VWR Thermometer	00291	-	19-Nov-16	19-Nov-19
Traceable VWR Jumbo Humidity/Thermometer	00295	170120555	17-Feb-17	17-Feb-20
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	15-May-18	15-May-21
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	10-Feb-17	10-Feb-20

CNR = Calibration Not Required
COU = Calibrate on Use

20.0 FLUID COMPOSITION

Table 20.0 Fluid Composition 2450MHz BODY TSL

Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
69.98	30.0	0.02	0.0	0.0

(1) Non-Iodized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Preservative

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 9/24/2018 2:44:30 PM

Test Laboratory: Celltech Labs

SPC-2450B Sep 24 2018

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium: TSL_2450B[24SE18]

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.12$ S/m; $\epsilon_r = 51.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, -99.0$
- Electronics: DAE4 Sn353; Calibrated: 4/20/2018
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS2 52.10.1(1476);

Frequency: 2450 MHz

SPC/SPC 2450B Input=250mw, Target=12.8W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 14.3 W/kg

SPC/SPC 2450B Input=250mw, Target=12.8W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.23 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 28.6 W/kg


SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.22 W/kg


Maximum value of SAR (measured) = 15.5 W/kg

SPC/SPC 2450B Input=250mw, Target=12.8W/kg/Z Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Penetration depth = n/a (n/a, 7.521) [mm]

Maximum value of SAR (interpolated) = 21.5 W/kg

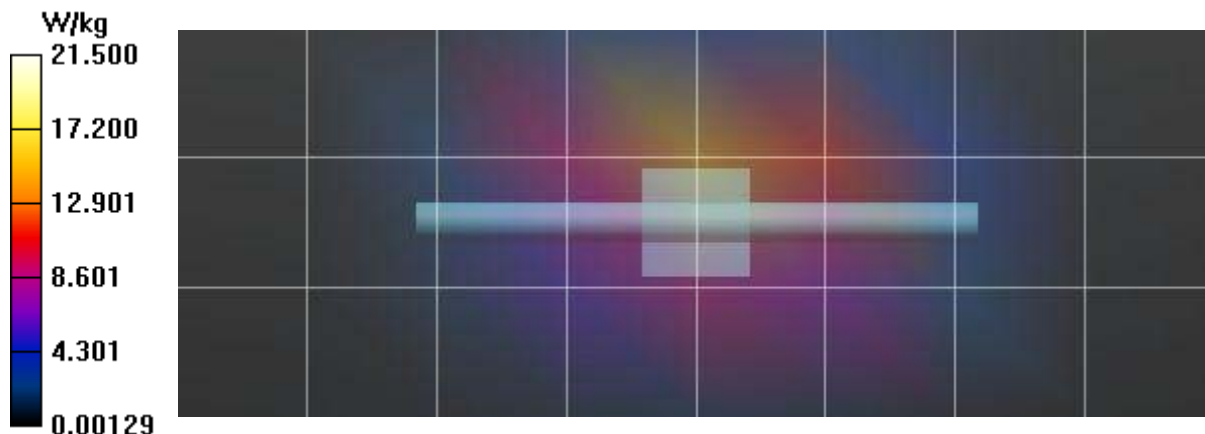

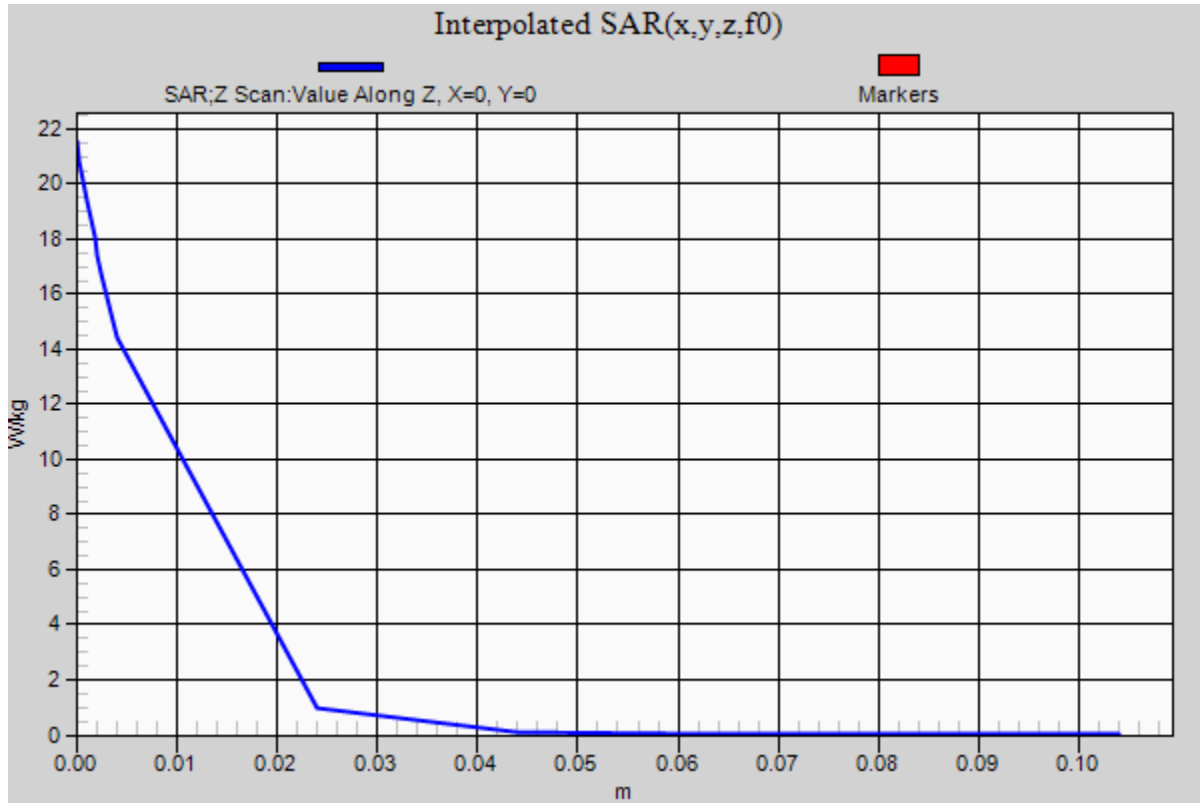

Date/Time: 10/23/2018 3:49:46 PM

Test Laboratory: Celltech Labs

SPC-2450B Oct 23 2018

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium: TSL_2450B[23OC18]
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 50.78$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EX3DV4 - SN3600; ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, -99.0$
- Electronics: DAE4 Sn353; Calibrated: 4/20/2018
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax;
- DASYS52 52.10.1(1476);


Frequency: 2450 MHz

SPC/SPC 2450B Input=250mw, Target=12.8W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 12.9 W/kg

SPC/SPC 2450B Input=250mw, Target=12.8W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 81.93 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 24.9 W/kg
SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.62 W/kg
 Maximum value of SAR (measured) = 14.1 W/kg

SPC/SPC 2450B Input=250mw, Target=12.8W/kg/Z Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=20mm
 Penetration depth = n/a (n/a, 7.776) [mm]
 Maximum value of SAR (interpolated) = 19.4 W/kg

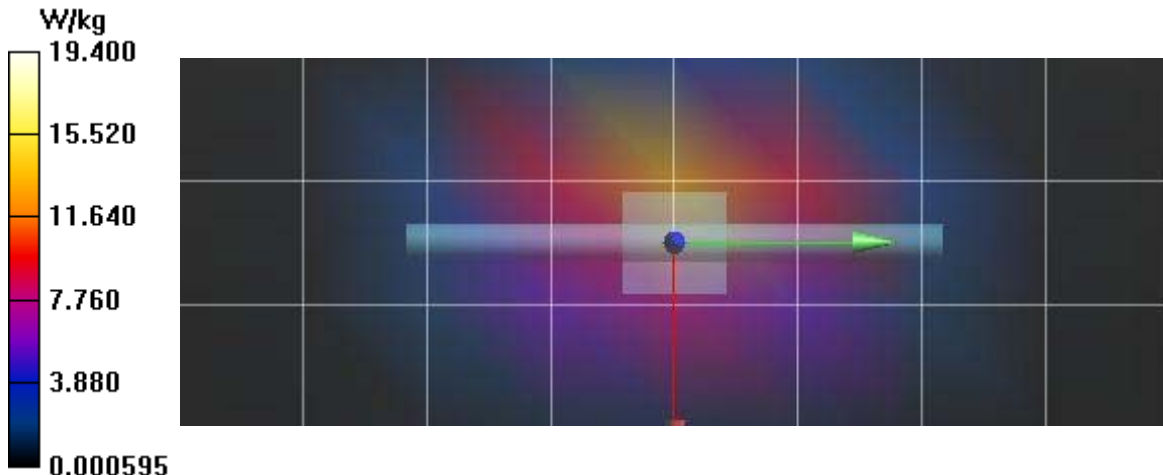

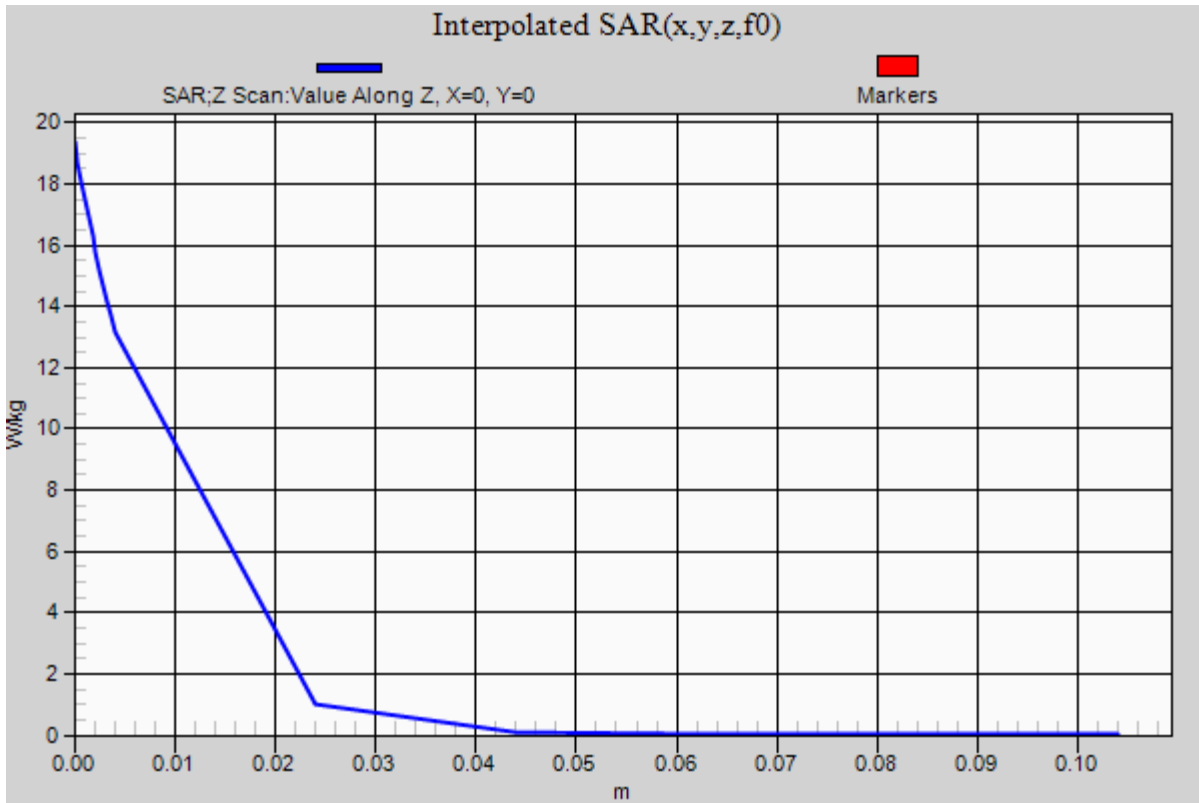

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B2

Date/Time: 9/25/2018 8:38:27 AM

Test Laboratory: Celltech Labs

Garmin-2450B Sep 25 2018

DUT: A03538; Type: Body Worn Transmitter;

Communication System: UID 10598 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle); Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2432 MHz; Communication System PAR: 8.5 dB; PMF: 1.08518

Medium: TSL_2450B[24SE18]

Medium parameters used (interpolated): $f = 2432$ MHz; $\sigma = 2.068$ S/m; $\epsilon_r = 51.848$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018;
 - Modulation Compensation: PMR for UID 10598 - AAB, Calibrated: 4/25/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 101.0$
- Electronics: DAE4 Sn353; Calibrated: 4/20/2018
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS52 52.10.1(1476);

Frequency: 2432 MHz

2450B/B2-A03568, Body-Backside, 2432 MHz, Silicone Band-WIFI/Area Scan (8x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.690 W/kg

2450B/B2-A03568, Body-Backside, 2432 MHz, Silicone Band-WIFI/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.47 V/m; Power Drift = -0.83 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.246 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.609 W/kg

2450B/B2-A03568, Body-Backside, 2432 MHz, Silicone Band-WIFI/Z Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a ($n/a, 7.848$) [mm]

Maximum value of SAR (interpolated) = 0.868 W/kg

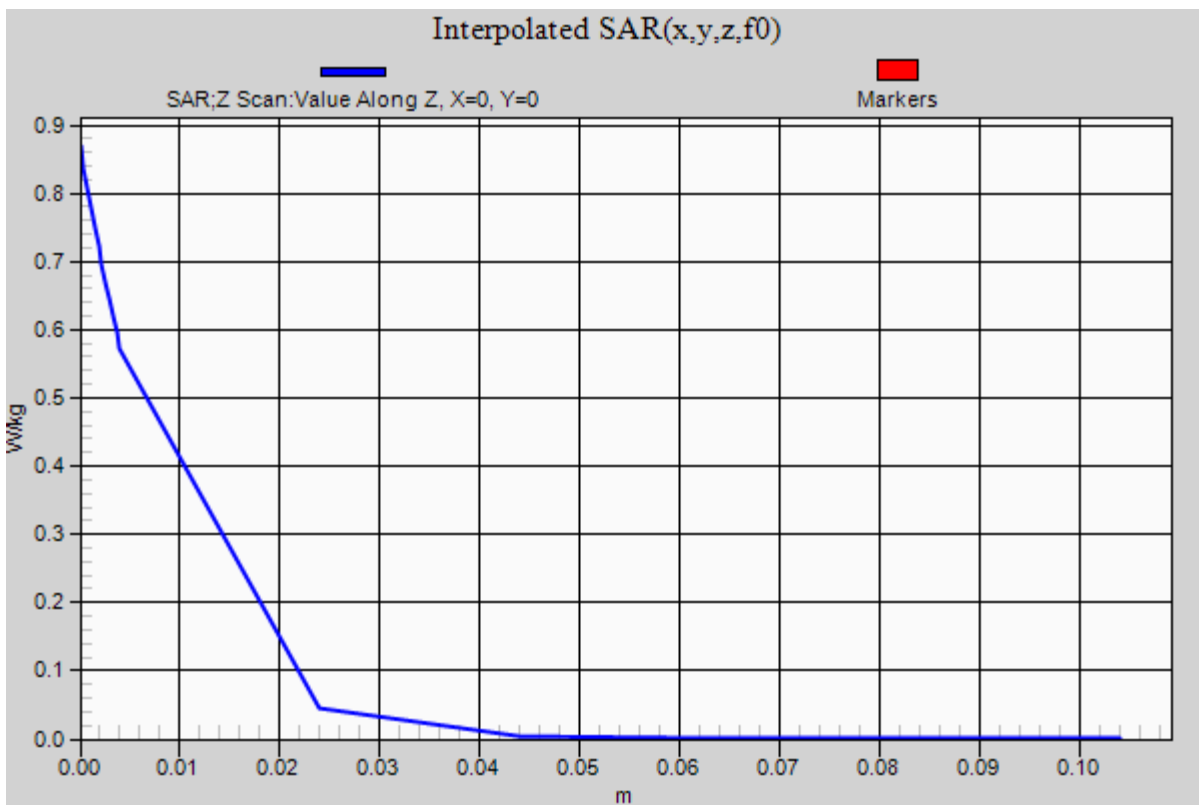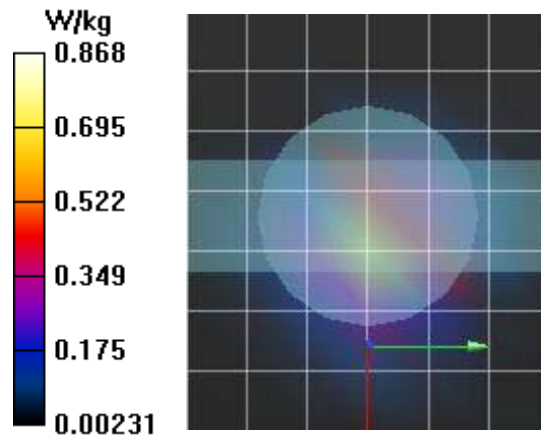

Plot B4

Date/Time: 9/25/2018 11:27:07 AM

Test Laboratory: Celltech Labs

Garmin-2450B Sep 25 2018

DUT: A03568; Type: Body Worn Transmitter

Communication System: UID 10030 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH1); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2402 MHz; Communication System PAR: 5.3 dB; PMF: 1.83865

Medium: TSL_2450B[24SE18]

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 2.014$ S/m; $\epsilon_r = 52.056$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018;
 - Modulation Compensation: PMR for UID 10030 - CAA, Calibrated: 4/25/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 101.0$
- Electronics: DAE4 Sn353; Calibrated: 4/20/2018
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS2 52.10.1(1476);

Frequency: 2402 MHz

2450B/B4-A03568,Body-Backside, 2402 MHz, Silicone Band-BT/Area Scan (8x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.570 W/kg

2450B/B4-A03568,Body-Backside, 2402 MHz, Silicone Band-BT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.18 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.248 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.626 W/kg

2450B/B4-A03568,Body-Backside, 2402 MHz, Silicone Band-BT/Z Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 7.677) [mm]

Maximum value of SAR (interpolated) = 0.865 W/kg

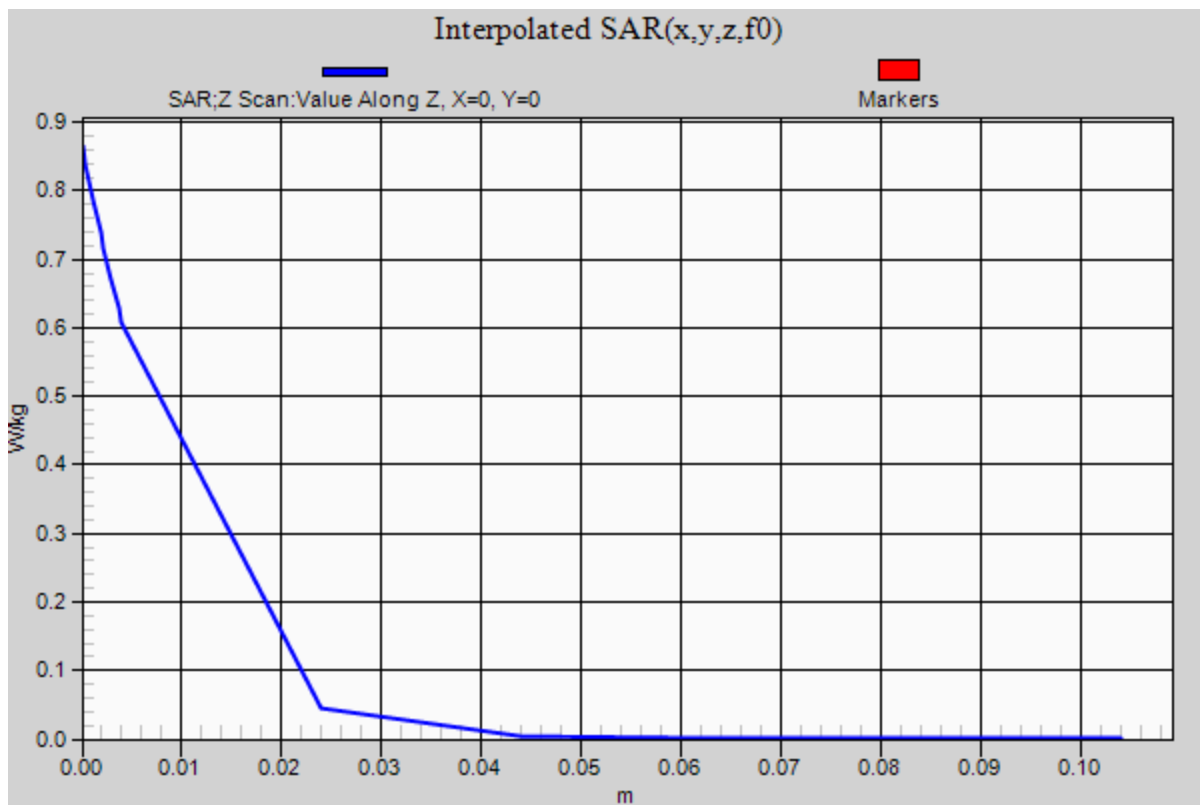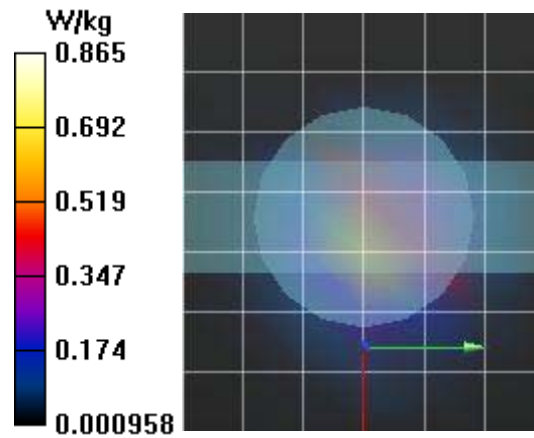

Plot B5

Date/Time: 10/24/2018 11:02:29 AM

Test Laboratory: Celltech Labs

Garmin-2450B Oct 24 2018

DUT: A03568; Type: Body Worn Transmitter;

Communication System: UID 10030 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH1); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2402 MHz; Communication System PAR: 5.3 dB; PMF: 1.83865

Medium: TSL_2450B[23OC18]

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 50.652$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018, ConvF(6.54, 6.54, 6.54); Calibrated: 4/25/2018;
 - Modulation Compensation: PMR for UID 10030 - CAA, Calibrated: 4/25/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 101.0$
- Electronics: DAE4 Sn353; Calibrated: 4/20/2018
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax;
- DASY52 52.10.1(1476);

Frequency: 2402 MHz

2450B/B5-A03568,Body-Back Side, 2402 MHz, Silicone Band-ANT-GFSK/Area Scan (8x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.614 W/kg

2450B/B5-A03568,Body-Back Side, 2402 MHz, Silicone Band-ANT-GFSK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.58 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.540 W/kg; SAR(10 g) = 0.247 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.622 W/kg

2450B/B5-A03568,Body-Back Side, 2402 MHz, Silicone Band-ANT-GFSK/Z Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 8.896) [mm]

Maximum value of SAR (interpolated) = 0.659 W/kg

