



Test Report Serial Number:	45461570 R2.0
Test Report Date:	24 March 2020
Project Number:	1485

SAR Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St.
Olathe, KS, 66062
USA

Maximum Reported 1g SAR			W/kg
FCC	BODY DTS	0.62	
	BODY DXX	<0.1	
ISED	BODY DTS	0.62	
	BODY DXX	<0.1	
General Pop. Limit:		1.60	

FCC ID:

IPH-03877

Product Model Number / HVIN

A03877

ISED Registration Number

1792A-03877

Product Name / PMN

A03877

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

Ben Hewson, President

Celltech Labs Inc.
 21-364 Lougheed Rd.
 Kelowna, BC, V1X 7R8
 Canada



Test Lab Certificate: 2470.01



IC Registration 3874A-1



FCC Registration: CA3874

Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
4.0 NORMATIVE REFERENCES.....	7
5.0 STATEMENT OF COMPLIANCE.....	8
6.0 SAR MEASUREMENT SYSTEM.....	9
7.0 RF CONDUCTED POWER MEASUREMENT.....	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS – P1 BATTERY.....	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS – P1 BATTERY.....	11
TABLE 7.2 CONDUCTED POWER MEASUREMENTS – P2 BATTERY.....	11
TABLE 7.3 CONDUCTED POWER MEASUREMENTS – P2 BATTERY.....	11
8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS.....	12
9.0 ACCESSORIES EVALUATED.....	13
TABLE 9.0 ACCESSORIES EVALUATED.....	13
10.0 SAR MEASUREMENT SUMMARY.....	14
TABLE 10.0: MEASURED RESULTS.....	14
11.0 SCALING OF MAXIMUM MEASURED SAR.....	15
TABLE 11.0 SAR SCALING.....	15
12.0 SAR EXPOSURE LIMITS.....	17
TABLE 12.0 EXPOSURE LIMITS.....	17
13.0 DETAILS OF SAR EVALUATION.....	18
13.0 DAY LOG.....	18
13.1 DUT SETUP AND CONFIGURATION.....	19
13.2 DUTY CYCLE EVALUATION.....	20
13.3 DUTY CYCLE EVALUATION.....	21
13.4 DUT POSITIONING.....	22
13.5 GENERAL PROCEDURES AND REPORT.....	23
13.6 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	24
13.7 SCAN RESOLUTION 100MHZ TO 2GHZ.....	24
13.8 SCAN RESOLUTION 2GHZ TO 3GHZ.....	25
13.9 SCAN RESOLUTION 5GHZ TO 6GHZ.....	25
14.0 MEASUREMENT UNCERTAINTIES.....	26
TABLE 14.0 MEASUREMENT UNCERTAINTY.....	26
TABLE 14.1 CALCULATION OF DEGREES OF FREEDOM.....	27
15.0 FLUID DIELECTRIC PARAMETERS.....	28
TABLE 15.0 FLUID DIELECTRIC PARAMETERS 2450MHZ HEAD TSL.....	28
TABLE 15.1 FLUID DIELECTRIC PARAMETERS 2450MHZ HEAD TSL.....	30
16.0 SYSTEM VERIFICATION TEST RESULTS.....	32
TABLE 16.0 SYSTEM VERIFICATION RESULTS 2450MHZ HEAD TSL.....	32
17.0 SYSTEM VALIDATION SUMMARY.....	33

TABLE 17.0 SYSTEM VALIDATION SUMMARY.....	33
18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	34
TABLE 18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	34
19.0 TEST EQUIPMENT LIST.....	36
TABLE 19.0 EQUIPMENT LIST AND CALIBRATION.....	36
20.0 FLUID COMPOSITION.....	37
TABLE 20.0 FLUID COMPOSITION 2450MHz HEAD TSL.....	37
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	38
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR.....	40
APPENDIX C - SETUP PHOTOS.....	44
APPENDIX D – DUT AND ACCESSORY PHOTOS.....	47
APPENDIX E – PROBE CALIBRATION.....	51
APPENDIX F – DIPOLE CALIBRATION.....	52
APPENDIX G - PHANTOM.....	53

1.0 DOCUMENT CONTROL

Revision History				
Samples Tested By:	Trevor Whillock	Date(s) of Evaluation:	26 Feb - 28 Feb 2020	
Report Prepared By:	Art Voss	Report Reviewed By:	Trevor Whillock	
Report Revision	Description of Revision	Revised Section	Revised By	Revision Date
0.0	Draft Release	n/a	Trevor Whillock	11 March 2020
1.0	Initial Release	n/a	Trevor Whillock	12 March 2020
2.0	Revised Fluid Dielectrics Table	15.1	Trevor Whillock	24 March 2020

2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St.
	Olathe, KS,66062
	USA
DUT Information	
Device Identifier(s):	FCC ID: IPH-03877
	IC: 1792A-03877
Type of Equipment:	Digital Transmission System (DTS) , RSS-247- WiFi
	Frequency Hopping Spread Spectrum Systems (FHSS), RSS-247
	Low Power Communication Device Transmitter (DXX) RSS-210
Device Model(s) / HVIN:	A03877
Device Marketing Name / PMN:	A03877
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	WiFi: 2412 - 2462 MHz
	BT/BLE/ANT: 2402 - 2480 MHz
Antenna Type/Gain:	Sheet Metal Inverted F 2.4GHz: -4.3 dBi (Wi-Fi, ANT, BT, BLE)
Number of Channels:	See Section 8.0
Manuf. Max. Avg Rated Output Power:	WiFi 2.4GHz: 802.11b: 13.20 dBm Avg. / 802.11g: 11.89 dBm Avg. / 802.11n: 11.81 dBm avg.
	BT:GFSK: 4.24 dBm Avg./ PI/4-DPSK: 3.35 dBm Avg. / 8DPSK: 3.39 dBm Avg.
	BLE: GMSK: 3.67 dBm Avg.
	ANT: GFSK: 4.21 dBm Avg.
Modulation:	WiFi 802.11b/g/n: CCK, DSSS, OFDM, MCS0-7
	BT: GFSK, PI/4-DPSK, 8DPSK
	BLE:GMSK
	ANT:GFSK
Duty Cycle:	DTS WiFi: 95%, DXX BT: 29%
DUT Power Source:	4.35V, Internal rechargeable Li-ion battery (P1)
	External Power Pack (P/N: 010-12562-00) (P2)
DUT Dimensions [L x W x H]	51.41 mm x 84.92 mm x 20.00 mm
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE OF EVALUATION

This Certification Report was prepared on behalf of:

Garmin International Inc.

, (the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in this report.

Equipment:

The A03877, FCC ID: IPH-03877, ISED ID: 1792A-03877, P/N 010-02424-XX is a *mobile* or *portable handheld* transceiver. The device contains several different transmitters namely: 2.4GHz WiFi, BT, BLE and ANT. The transmitters transmit over one antenna and therefore can not simultaneously transmit.

Application:

This is an application for a new FCC and ISED certification.

Scope:

Due to the small form factor and portability option of the device, the device will be evaluated for SAR in the Body configuration. The device was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEEE 1528, IEC 62209-2, FCC KDB 865646, 447498, 248227 and RSS 102.

4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2017	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidane for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	


5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant: Garmin International Inc.	Model Name / PMN: A03877	
Standard(s) Applied: FCC 47 CFR §2.1093 Health Canada's Safety Code 6	Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, FCC KDB 248227 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2	
Reason For Issue: <input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change	Use Group: <input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled	Limits Applied: <input checked="" type="checkbox"/> 1.6W/kg - 1g Volume <input type="checkbox"/> 8.0W/kg - 1g Volume <input type="checkbox"/> 4.0W/kg - 10g Volume
Reason for Change: None	Date(s) Evaluated: 26 Feb - 28 Feb, 2020	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.


Trevor Whillock
Test Lab Engineer
Celltech Labs Inc.
24 March 2020
Date


6.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



DASY 6 SAR System with SAM Phantom

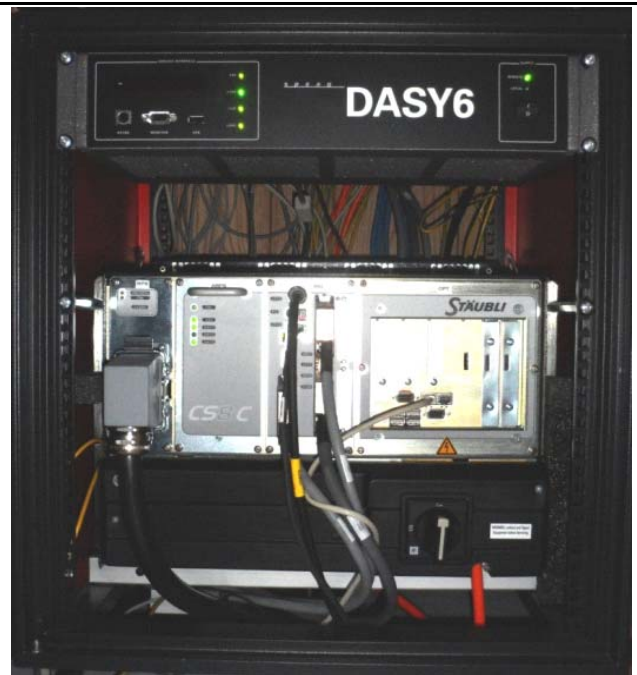

DASY 6 Measurement Controller

7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements – P1 Battery

A03877 Conducted Power Measurements (P1 Battery) - Average Power									
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation	Bandwidth (MHz)
1	2412	12.76	13.02	0.020	-0.26	-	802.11b	CCK-1Mbps	20
2	2417	12.81	13.02	0.020	-0.21	-		CCK-1Mbps	
3	2422	12.86	13.02	0.020	-0.16	-		CCK-1Mbps	
4	2427	12.85	13.02	0.020	-0.17	-		CCK-1Mbps	
5	2432	12.85	13.02	0.020	-0.17	-		CCK-1Mbps	
6	2437	12.94	13.02	0.020	-0.08	-		CCK-1Mbps	
7	2442	12.97	13.02	0.020	-0.05	-		CCK-1Mbps	
8	2447	12.96	13.02	0.020	-0.06	-		CCK-1Mbps	
9	2452	12.95	13.02	0.020	-0.07	-		CCK-1Mbps	
10	2457	12.99	13.02	0.020	-0.03	-		CCK-1Mbps	
11	2462	12.99	13.02	0.020	-0.03	-		CCK-1Mbps	
3	2422	13.01	13.20	0.021	-0.19	Y	802.11g	CCK-2Mbps	20
		10.10	10.27	0.011	-0.17	-		DSS-5.5Mbps	
		11.52	11.89	0.015	-0.37	-	802.11n	OFDM-6Mbps	
		7.91	8.25	0.007	-0.34	-		OFDM-54Mbps	
		11.47	11.81	0.015	-0.34	-	802.11n	MCS-0	
		7.53	7.83	0.006	-0.30	-		MCS-7	
7	2442	13.07	13.20	0.021	-0.13	Y	802.11b	CCK-2Mbps	20
		10.12	10.27	0.011	-0.15	-		DSS-5.5Mbps	
		11.65	11.89	0.015	-0.24	-	802.11g	OFDM-6Mbps	
		8.01	8.25	0.007	-0.24	-		OFDM-54Mbps	
		11.54	11.81	0.015	-0.27	-	802.11n	MCS-0	
		7.69	7.83	0.006	-0.14	-		MCS-7	
11	2462	13.14	13.20	0.021	-0.06	Y	802.11b	CCK-2Mbps	20
		10.23	10.27	0.011	-0.04	-		DSS-5.5Mbps	
		11.84	11.89	0.015	-0.05	-	802.11g	OFDM-6Mbps	
		8.22	8.25	0.007	-0.03	-		OFDM-54Mbps	
		11.68	11.81	0.015	-0.13	-	802.11n	MCS-0	
		7.77	7.83	0.006	-0.06	-		MCS-7	

Table 7.1 Conducted Power Measurements – P1 Battery

A03877 Conducted Power Measurements (P1 Battery) - Average Power								
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
2	2402	4.24	4.24	0.003	0.00	Y	BT	(GFSK)
41	2441	3.56	4.24	0.003	-0.68	-		
80	2480	2.90	4.24	0.003	-1.34	-		
2	2402	3.35	3.35	0.002	0.00	-		PI/4-DPSK
2	2402	3.39	3.39	0.002	0.00	-		8DPSK
2	2402	4.21	4.21	0.003	0.00	-	ANT	GFSK
2	2402	3.67	3.67	0.002	0.00	-	BLE	GMSK

Table 7.2 Conducted Power Measurements – P2 Battery

A03877 Conducted Power Measurements (P2 Battery) - Average Power									
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation	Bandwidth (MHz)
3	2422	12.82	13.20	0.021	-0.38	-	802.11b	CCK-2Mbps	20
7	2442	13.05	13.20	0.021	-0.15	-		CCK-2Mbps	
11	2462	13.08	13.20	0.021	-0.12	Y		CCK-2Mbps	

Table 7.3 Conducted Power Measurements – P2 Battery

A03877 Conducted Power Measurements (P2 Battery) - Average Power								
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
2	2402	3.88	4.24	0.003	-0.36	-	BT	(GFSK)
41	2441	3.22	4.24	0.003	-1.02	-		
80	2480	2.53	4.24	0.003	-1.71	-		
2	2402	2.91	3.35	0.002	-0.44	-		PI/4-DPSK
2	2402	2.83	3.39	0.002	-0.56	-		8DPSK
2	2402	3.76	4.21	0.003	-0.45	-	ANT	GFSK
2	2402	3.22	3.67	0.002	-0.45	-	BLE	GMSK

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using the power level setting specified by the manufacture to be the max output power and produce the most conservative SAR. SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down.

8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS

The intended use of the device is to be hand-held; or optionally, mounted on a handle bar. Due to the small form factor, the device may be worn within a user's apparel and was evaluated for body SAR limits. The device was additionally evaluated to the worst-case setup configuration leveraged from a previous EU evaluation. The Front Side (Screen) of the device was found to be the worst-case setup configuration and produced the highest SAR.

WiFi SAR Evaluation:

SAR was evaluated in CCK mode with a sample rate of 2Mbps at a 95% duty cycle. The power level setting selected was specified by the manufacturer to be the max output power and produce the most conservative SAR.

As per FCC KDB 248227, the required 802.11 test channels are Ch1, Ch 6 and Ch 11; however, higher conducted output power was found on Channels 3 and 7. As a result, the channels selected for SAR evaluation included Ch 3, Ch 7 and Ch 11. Based on evaluated SAR levels of the highest Middle band frequency or highest output channels; SAR test reduction methodology was applied to reduce the total number of required test channels from the SAR test evaluation.

When applicable, SAR test reduction methods may be utilized.

802.11b DSSS SAR test reduction is determined according to the following:

- a) When the reported SAR of the highest measured maximum output power channel is \leq to 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b) When the reported SAR is $>$ 0.8 W/kg, SAR is required for that exposure configuration using the next highest output power channel. When any reported SAR is $>$ 1.2 W/Kg, SAR is required for the third channel.

Therefore; Channels 3 and 7 were not required for evaluation in either exposure configuration.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

- a) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is \leq 1.2 W/kg.

See 13.1 for details.

BT/BLE/ANT SAR Test Evaluation:

Bluetooth was evaluated for SAR.

Per FCC KDB 447498 4.3.1 the BT/BLE/ANT transmitter meets the standalone SAR test exclusion criteria; however due to requirements under ISSED RSS-102, the highest output channel and worst-case configuration was evaluated for SAR.

NOTE: Due to lower conducted power found on BLE and ANT Transmitters, SAR of the BLE and ANT transmitter was not evaluated.

NOTE: This device is not capable of simultaneous transmission between the BT/BLE/ANT and WiFi transmitters.

9.0 ACCESSORIES EVALUATED

Table 9.0 Accessories Evaluated

Manufacturer's Accessory List				
Test Report ID Number	Manufacturer's Part Number	Description	SAR ⁽³⁾ Evaluated	SAR ⁽⁴⁾ Tested
P2	010-12562-00	External Power Pack	Yes	Yes
P3	362-00087-00	AC Adapter, 5.0V, 1.0A	n/a	n/a
P4	320-00541-0X	Mini B-A Style Mass Storage	n/a	n/a

10.0 SAR MEASUREMENT SUMMARY

Table 10.0: Measured Results

Measured SAR Results (1g) - BODY(FCC/ISED)																		
Date	Plot ID #	DUT Model	DUT P/N	Test Type	Test Freq. (MHz)	Modulation	Accessories				DUT Spacing		Meas. Cond. Power (dBm)	Measured SAR 1g (W/kg)	SAR Drift (dB)			
							Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)						
BODY SAR WiFi 2.4 GHz																		
26 Feb 2020	B1	A03877	010-02424-XX	BODY Back side	2462	CCK-2Mbps	n/a	P1-Internal	n/a	n/a	0	0	13.14	0.145	-0.130			
26 Feb 2020	B2	A03877	010-02424-XX	BODY Front side	2462	CCK-2Mbps	n/a	P1-Internal	n/a	n/a	0	0	13.14	0.575	0.090			
28 Feb 2020	B3**	A03877	010-02424-XX	BODY Front side	2402	BT-BR-GFSK	n/a	P1-Internal	n/a	n/a	0	0	4.24	0.00010	0.100			
26 Feb 2020	B4*	A03877	010-02424-XX	BODY Front side	2462	CCK-2Mbps	n/a	P2-External Power Pack	n/a	n/a	0	0	13.08	0.589	0.950			
SAR Limit							Spatial Peak				RF Exposure Category							
FCC 47 CFR 2.1093							Health Canada Safety Code 6				BODY		1g Average		1.6 W/kg		General Population	

Reference Section 8.0 for details

*Per KDB 248227 D01 5.2.1(a);

Testing of other required test channels is not required when the reported 1-g or 10g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively.

**Per KDB 447498D01 4.4.1(c)

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid band or highest output power channel is:

≤ 0.4 W/kg or 1.0W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 Mh

11.0 SCALING OF MAXIMUM MEASURED SAR

Table 11.0 SAR Scaling

Scaling of Maximum Measured SAR (1g)				
Measured Parameters	Configuration			
	BODY	BODY		
Plot ID	B3	B4		
Maximum Measured SAR _M	0.0001	0.589	(W/kg)	
Frequency	2402	2462	(MHz)	
Power Drift	0.100 (1)	0.950 (1)	(dB)	
Conducted Power	4.240	13.080	(dBm)	
Fluid Deviation from Target				
Δe	Permittivity	-5.07	-5.32	(%)
Δσ	Conductivity	0.11	3.09	(%)

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Fluid Sensitivity Calculation (1g)			IEC 62209-2 Annex F	
Delta SAR = Ce * Δe + Cσ * Δσ			(F.1)	
Ce = (-0.0007854*f ³) + (0.009402*f ²) - (0.02742*f) - 0.2026			(F.2)	
Cσ = (0.009804*f ³) - (0.08661*f ²) + (0.02981*f) + 0.7829			(F.3)	
f	Frequency (GHz)	2.402	2.462	
	Ce	-0.225	-0.225	
	Cσ	0.491	0.478	
	Ce * Δe	-5.070	-5.320	
	Cσ * Δσ	0.110	3.090	
	ΔSAR	1.20	2.670	(%)

Manufacturer's Tuneup Tolerance			
Measured Conducted Power	4.240	13.080	(dBm)
Rated Conducted Power	4.240	13.200	(dBm)
ΔP	0.000 (4)	-0.120	(dB)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.


SAR Adjustment for Fluid Sensitivity			
SAR ₁ = SAR _M * ΔSAR	0.000101	0.605	(W/kg)

SAR Adjustment for Tuneup Tolerance			
SAR ₂ = SAR ₁ + [ΔP]	0.000101	0.622	(W/kg)

SAR Adjustment for Drift			
SAR ₃ = SAR ₂ + Drift	0.000101	0.622	(W/kg)

reported SAR			
FCC = SAR ₂	0.000101	0.62	(W/kg)
ISED = SAR ₃	0.000101	0.62	(W/kg)

NOTES to Table 10.0	
<p>(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 5. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.</p> <p>NOTE: Some of the scaling factors in Steps 1 through 5 may not apply and are identified by light gray text.</p>	
Step 1	Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 11.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).
Step 2	Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.
Step 3	Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.
Step 4	The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 5 are reported on Page 1 of this report.

<p>I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.</p>	 <hr/> Trevor Whillock Test Lab Engineer Celltech Labs Inc. <hr/> 24 March 2020 Date
---	--

12.0 SAR EXPOSURE LIMITS

Table 12.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
Spatial Average ⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak ⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak ⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

13.0 DETAILS OF SAR EVALUATION

13.0 Day Log

DAY LOG					Fluid Dielectric	SPC	Test	Task
Date	Ambient Temp (°C)	Fluid Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)				
26 Feb 2020	23	22.9	25%	103.0	X	X	X	2450H Fluids, SPC & SAR Evaluation*
27 Feb 2020	22	22.5	25%	102.9			X	2450H SAR Evaluation
28 Feb 2020	23	22.4	25%	101.9	X		X	2450H SAR Evaluation & Fluids Per IEEE 1528**


*Per IEEE 1528 Test Series was started within 24 hours of Fluid Parameter Measurement

**Per IEEE 1528 Fluid Parameters were measured at the end of test series

13.1 DUT Setup and Configuration

DUT Setup and Configuration	
1	<p>The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 865646, 248277 and RSS-102. The device was evaluated at a phantom separation distance of 0mm.</p>
2	<p>2.4GHz 802.11g/n OFDM SAR Test Exclusion</p> <p>As Per KDB 248277 D01v02r02 - 5.2.2, b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.</p> <p>Maximum 802.11g/n OFDM specified power(POFDM)= 11.81 dBm Maximum 802.11b DSSS specified power (PDSSS)= 13.2 dBm Ratio OFDM/DSSS power = -1.39 dBm(72.6%) Highest reported* SAR (SARMAX)= 0.599 W/kg</p> <p>$POFDM/PDSSS \times SARMAX = 0.435 \text{ W/kg} \leq 1.2 \text{ W/kg}$</p> <p>Since the ratio of the ODFM/DSSS specified power is less than one (0dB), the reported SAR would not exceed 1.2W/kg</p> <p>*The reported SAR in this case is the measured SAR adjusted for fluid sensitivity.</p>
3	<p>The Device was capable of transmitting at various modulations, data rates. The Conducted Power was highest when measured in CCK Mode-2 Mbps for WiFi and BT-GFSK mode than any other configuration. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer.</p> <p>Each SAR evaluation was performed with a fully charged battery.</p>


13.2 Duty Cycle Evaluation

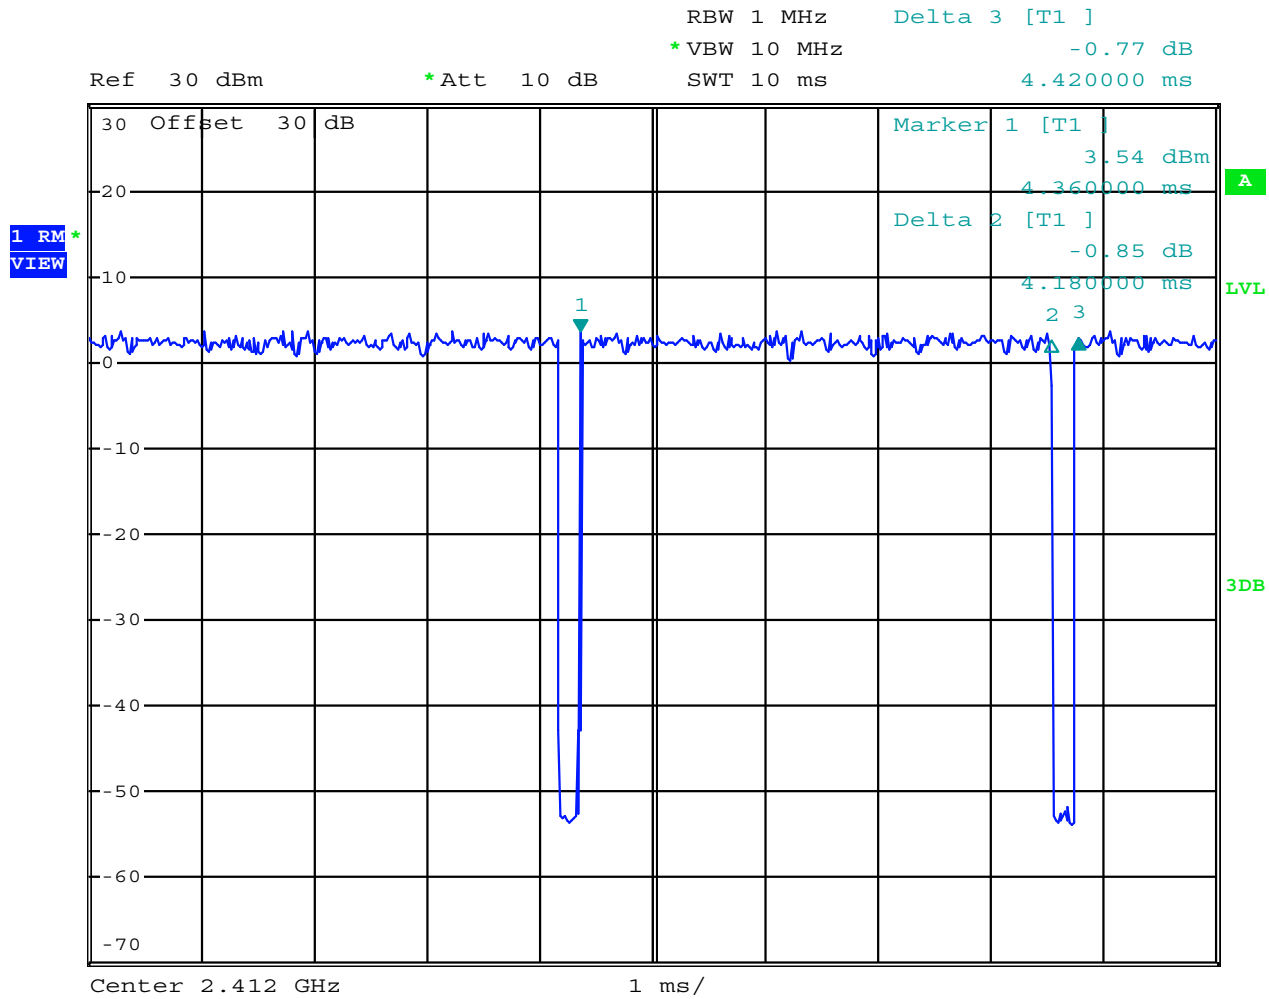

Date: 25.FEB.2020 17:00:16

CKK at 2 Mbps was found to be the worst-case test mode for 2.4GHZ WiFi. The transmit Duty cycle was 95% as indicated in the above plot. This duty cycle cannot be altered by the user. A measurement Crest factor of 1.44 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

13.3 Duty Cycle Evaluation

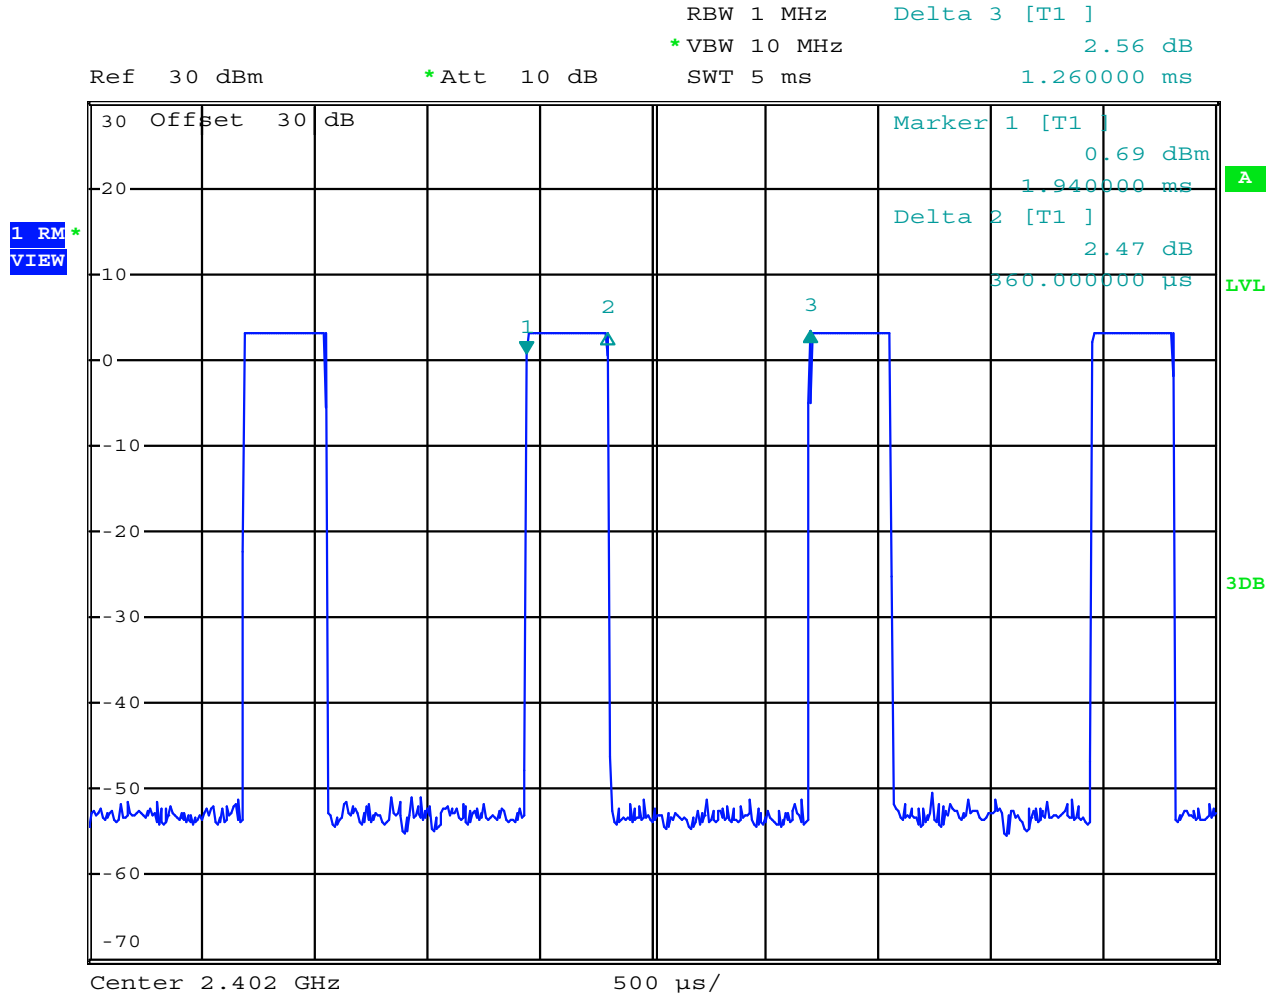

Date: 25.FEB.2020 19:08:53

BT- GFSK mode was found to be the worst-case test mode for Bluetooth. The transmit Duty cycle was 29% as indicated in the above plot. This duty cycle cannot be altered by the user. A measurement Crest factor of 3.38 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

13.4 DUT Positioning

DUT Positioning	
Positioning	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
FACE Configuration	This device is not intended to be held to the face and was not tested in the FACE configuration.
BODY Configuration	The DUT was securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom.
HEAD Configuration	This device is not intended to be held to the ear and was not tested in the HEAD configuration.

13.5 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 2.0^{\circ}\text{C}$ throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

13.6 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>
Systems Performance Check	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>

13.7 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.8 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.9 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	10 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

14.0 MEASUREMENT UNCERTAINTIES

Table 14.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Source of Uncertainty	IEEE 1528 Section	Toler ±%	Prob Dist	Div	c _i	c _i	Stand Unct ±%	Stand Unct ±%	V _i or V _{eff}
Measurement System									
EX3DV4 Probe Calibration** (k=1)	E.2.1	6.7	N	1	1	1	6.7	6.7	∞
Axial Isotropy** (k=1)	E.2.2	0.6	R	√3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy** (k=1)	E.2.2	3.2	R	√3	0.7	0.7	1.3	1.3	∞
Boundary Effect*	E.2.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity** (k=1)	E.2.4	0.5	R	√3	1	1	0.3	0.3	∞
System Detection Limits*	E.2.4	1.0	R	√3	1	1	0.6	0.6	∞
Modulation Response** (k=1)	E.2.5	8.3	R	√3	1	1	4.8	4.8	∞
Readout Electronics*	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time*	E.2.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time*	E.2.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
RF Ambient Conditions - Reflection	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
Probe Positioner Mechanical Tolerance*	E.6.2	0.0	R	√3	1	1	0.0	0.0	∞
Probe Positioning wrt Phantom Shell*	E.6.3	0.4	R	√3	1	1	0.2	0.2	∞
Post-processing*	E.5	2.0	R	√3	1	1	1.2	1.2	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.2	N	1	1	1	2.2	2.2	5
Device Holder Uncertainty*	E.4.1	3.6	N	1	1	1	3.6	3.6	∞
SAR Drift Measurement ⁽²⁾	E.2.9	0.0	R	√3	1	1	0.0	0.0	∞
SAR Power Scaling ⁽³⁾	E.6.5	0.0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	6.1	R	√3	1	1	3.5	3.5	∞
SAR Correction Uncertainty	E.3.2	1.6	N	1	1	0.84	1.6	1.3	∞
Liquid Conductivity (measurement)	E.3.3	5.0	N	1	0.78	0.71	3.9	3.6	10
Liquid Permittivity (measurement)	E.3.3	5.0	N	1	0.23	0.26	1.2	1.3	10
Liquid Conductivity (Temperature)	E.3.2	0.4	R	√3	0.78	0.71	0.2	0.2	10
Liquid Permittivity Temperature)	E.3.2	0.2	R	√3	0.23	0.26	0.0	0.0	10
Effective Degrees of Freedom⁽¹⁾								V_{eff} =	1141
Combined Standard Uncertainty			RSS				11.1	11.0	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.2	21.9	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30

Therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

(2) The SAR Value is compensated for Drift

(3) SAR Power Scaling not Required

* Provided by SPEAG for DASYS

Table 14.1 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

15.0 FLUID DIELECTRIC PARAMETERS

Table 15.0 Fluid Dielectric Parameters 2450MHz HEAD TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Wed 26/Feb/2020 10:50:56
Freq      Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e    Epsilon of UIM
Test_s    Sigma of UIM
*****

```

Freq	FCC_eHFCC_sH	Test_e	Test_s
2.3500	39.38 1.71	37.54	1.70
2.3600	39.36 1.72	37.70	1.72
2.3700	39.34 1.73	37.60	1.71
2.3800	39.32 1.74	37.45	1.75
2.3900	39.31 1.75	37.53	1.75
2.4000	39.29 1.76	37.32	1.76
2.4100	39.27 1.76	37.20	1.77
2.4200	39.25 1.77	37.38	1.80
2.4300	39.24 1.78	37.32	1.82
2.4400	39.22 1.79	37.23	1.83
2.4500	39.20 1.80	37.16	1.84
2.4600	39.19 1.81	37.10	1.87
2.4700	39.17 1.82	37.11	1.86
2.4800	39.16 1.83	37.02	1.89
2.4900	39.15 1.84	36.96	1.89
2.5000	39.14 1.85	36.96	1.89
2.5100	39.12 1.87	36.82	1.91
2.5200	39.11 1.88	36.72	1.94
2.5300	39.10 1.89	36.78	1.94
2.5400	39.09 1.90	36.82	1.99
2.5500	39.07 1.91	36.73	1.99

FLUID DIELECTRIC PARAMETERS

Date:	26 Feb 2020	Fluid Temp:		22.9	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity		
2350.0000		37.5400	1.7000	39.3800	1.71	-4.67%	-0.58%	
2360.0000		37.7000	1.7200	39.3600	1.72	-4.22%	0.00%	
2370.0000		37.6000	1.7100	39.3400	1.73	-4.42%	-1.16%	
2380.0000		37.4500	1.7500	39.3200	1.74	-4.76%	0.57%	
2390.0000		37.5300	1.7500	39.3100	1.75	-4.53%	0.00%	
2400.0000		37.3200	1.7600	39.2900	1.76	-5.01%	0.00%	
2402.0000	*	37.2960	1.7620	39.2860	1.76	-5.07%	0.11%	
2410.0000		37.2000	1.7700	39.2700	1.76	-5.27%	0.57%	
2420.0000		37.3800	1.8000	39.2500	1.77	-4.76%	1.69%	
2422.0000	*	37.3680	1.8040	39.2480	1.77	-4.79%	1.81%	
2430.0000		37.3200	1.8200	39.2400	1.78	-4.89%	2.25%	
2440.0000		37.2300	1.8300	39.2200	1.79	-5.07%	2.23%	
2442.0000	*	37.2160	1.8320	39.2160	1.79	-5.10%	2.23%	
2450.0000		37.1600	1.8400	39.2000	1.80	-5.20%	2.22%	
2460.0000		37.1000	1.8700	39.1900	1.81	-5.33%	3.31%	
2462.0000	*	37.1020	1.8680	39.1860	1.81	-5.32%	3.09%	
2470.0000		37.1100	1.8600	39.1700	1.82	-5.26%	2.20%	
2472.0000		37.0920	1.8660	39.1680	1.82	-5.30%	2.41%	
2480.0000		37.0200	1.8900	39.1600	1.83	-5.46%	3.28%	
2490.0000		36.9600	1.8900	39.1500	1.84	-5.59%	2.72%	
2500.0000		36.9600	1.8900	39.1400	1.85	-5.57%	2.16%	
2510.0000		36.8200	1.9100	39.1200	1.87	-5.88%	2.14%	
2520.0000		36.7200	1.9400	39.1100	1.88	-6.11%	3.19%	
2530.0000		36.7800	1.9400	39.1000	1.89	-5.93%	2.65%	
2540.0000		36.8200	1.9900	39.0900	1.90	-5.81%	4.74%	
2550.0000		36.7300	1.9900	39.0700	1.91	-5.99%	4.19%	

*Channel Frequency Tested

Table 15.1 Fluid Dielectric Parameters 2450MHz HEAD TSL

```

*****
                Aprel Laboratory
                Test Result for UIM Dielectric Parameter
                Fri 28/Feb/2020 16:32:37
                Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
                Test_e Epsilon of UIM
                Test_s Sigma of UIM
*****

```

Freq	FCC_eHFCC_sH	Test_e	Test_s
2.3500	39.38 1.71	37.47	1.78
2.3600	39.36 1.72	37.46	1.80
2.3700	39.34 1.73	37.51	1.83
2.3800	39.32 1.74	37.35	1.84
2.3900	39.31 1.75	37.27	1.85
2.4000	39.29 1.76	37.14	1.86
2.4100	39.27 1.76	37.17	1.86
2.4200	39.25 1.77	37.05	1.92
2.4300	39.24 1.78	37.02	1.91
2.4400	39.22 1.79	37.01	1.93
2.4500	39.20 1.80	36.90	1.92
2.4600	39.19 1.81	36.92	1.95
2.4700	39.17 1.82	36.74	1.94
2.4800	39.16 1.83	36.60	1.99
2.4900	39.15 1.84	36.80	1.97
2.5000	39.14 1.85	36.67	2.01
2.5100	39.12 1.87	36.67	1.99
2.5200	39.11 1.88	36.52	2.01
2.5300	39.10 1.89	36.61	2.02
2.5400	39.09 1.90	36.64	2.05
2.5500	39.07 1.91	36.51	2.05

*Per IEEE 1528 Fluid Parameters were measured at the end of test series.

FLUID DIELECTRIC PARAMETERS

Date:	28 Feb 2020	Fluid Temp:		22.4	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity		
2350.0000		37.4700	1.7800	39.3800	1.71	-4.85%	4.09%	
2360.0000		37.4600	1.8000	39.3600	1.72	-4.83%	4.65%	
2370.0000		37.5100	1.8300	39.3400	1.73	-4.65%	5.78%	
2380.0000		37.3500	1.8400	39.3200	1.74	-5.01%	5.75%	
2390.0000		37.2700	1.8500	39.3100	1.75	-5.19%	5.71%	
2400.0000		37.1400	1.8600	39.2900	1.76	-5.47%	5.68%	
2402.0000	*	37.1460	1.8600	39.2860	1.76	-5.45%	5.68%	
2410.0000		37.1700	1.8600	39.2700	1.76	-5.35%	5.68%	
2420.0000		37.0500	1.9200	39.2500	1.77	-5.61%	8.47%	
2422.0000	*	37.0440	1.9180	39.2480	1.77	-5.62%	8.24%	
2430.0000		37.0200	1.9100	39.2400	1.78	-5.66%	7.30%	
2440.0000		37.0100	1.9300	39.2200	1.79	-5.63%	7.82%	
2442.0000	*	36.9880	1.9280	39.2160	1.79	-5.68%	7.59%	
2450.0000		36.9000	1.9200	39.2000	1.80	-5.87%	6.67%	
2460.0000		36.9200	1.9500	39.1900	1.81	-5.79%	7.73%	
2462.0000	*	36.8840	1.9480	39.1860	1.81	-5.87%	7.51%	
2470.0000		36.7400	1.9400	39.1700	1.82	-6.20%	6.59%	
2472.0000		36.7120	1.9500	39.1680	1.82	-6.27%	7.03%	
2480.0000		36.6000	1.9900	39.1600	1.83	-6.54%	8.74%	
2490.0000		36.8000	1.9700	39.1500	1.84	-6.00%	7.07%	
2500.0000		36.6700	2.0100	39.1400	1.85	-6.31%	8.65%	
2510.0000		36.6700	1.9900	39.1200	1.87	-6.26%	6.42%	
2520.0000		36.5200	2.0100	39.1100	1.88	-6.62%	6.91%	
2530.0000		36.6100	2.0200	39.1000	1.89	-6.37%	6.88%	
2540.0000		36.6400	2.0500	39.0900	1.90	-6.27%	7.89%	
2550.0000		36.5100	2.0500	39.0700	1.91	-6.55%	7.33%	

*Channel Frequency Tested

*Per IEEE 1528 Fluid Parameters were measured at the end of test series.

16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.0 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
26 Feb 2020		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	22.9	23	25%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
37.16	39.20	-5.20%	1.84	1.80	2.22%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
13.70	13.30	3.01%	6.21	6.16	0.81%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
54.80	52.10	5.18%	24.84	24.30	2.22%

Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.

The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.

The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.

The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.

17.0 SYSTEM VALIDATION SUMMARY

Table 17.0 System Validation Summary

System Validation Summary												
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results			
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy	
150	12-Aug-19	EX3DV4	3600	CLA-150	4007	Head	49.46	0.79	Pass	Pass	Pass	
450	13-Aug-19	EX3DV4	3600	D450V3	1068	Head	43.70	0.83	Pass	Pass	Pass	
835	15-Aug-19	EX3DV4	3600	D835V2	4d075	Head	42.01	0.89	Pass	Pass	Pass	
900	02-Aug-19	EX3DV4	3600	D900V2	045	Head	39.10	0.93	Pass	Pass	Pass	
1640	07-May-18	EX3DV4	3600	1620-S-2	207-00102	Head	39.87	1.27	Pass	Pass	Pass	
1800	18-Jun-19	EX3DV4	3600	D1800V2	247	Head	41.20	1.39	Pass	Pass	Pass	
2450	02-Apr-19	EX3DV4	3600	D2450V2	825	Head	36.58	1.85	Pass	Pass	Pass	
5250	24-Jul-19	EX3DV4	3600	D5GHzV2	1031	Head	35.96	4.93	Pass	Pass	Pass	
5750	25-Jul-19	EX3DV4	3600	D5GHzV2	1031	Head	34.10	5.60	Pass	Pass	Pass	

18.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 18.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.10.0.12 / DASY52 V10.3(1513)
	Postprocessing Software: SEMCAD X, V14.6.13(7474)
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	4 MHz -10GHz
Linearity	±0.2 dB (30 MHz to 10 GHz)
Phantom	
Type	ELI Elliptical Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter

Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	
EX3DV4 E-Field Probe		
Phantom Specification		
<p>The ELI V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.</p>		
		ELI Phantom
Device Positioner Specification		
<p>The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>		
		Device Positioner

19.0 TEST EQUIPMENT LIST

Table 19.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	19-Mar-19	19-Mar-20
-EX3DV4 E-Field Probe	00213	3600	26-Mar-19	26-Mar-20
-CLA 30 Validation Dipole	00300	1005	23-Nov-17	23-Nov-20
-CLA150 Validation Dipole	00251	4007	27-Apr-17	27-Apr-20
-D450V3 Validation Dipole	00221	1068	23-Apr-18	23-Apr-21
-D750V3 Validation Dipole	00238	1061	19-Mar-19	19-Mar-22
-D835V2 Validation Dipole	00217	4D075	20-Apr-18	20-Apr-21
-D900V2 Validation Dipole	00020	54	24-Apr-17	24-Apr-20
-D1640/1620-S-2 Validation Dipole	00299	207-00102	07-Nov-17	07-Nov-20
-D2450V2 Validation Dipole**	00219	825	24-Apr-18	24-Apr-21
-D5GHzV2 Validation Dipole	00126	1031	26-Apr-18	26-Apr-21
ELI Phantom	00247	1234	CNR	CNR
SAM Phantom	00154	1033	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00007	1835801	26-Mar-19	26-Mar-22
Gigatronics 80701A Power Sensor	00186	1837002	COU	COU
Gigatronics 80334A Power Sensor	00237	1837001	26-Mar-19	26-Mar-22
HP 8753ET Network Analyzer	00134	US39170292	29-Dec-17	29-Dec-20
Rohde & Schwarz SMR20 Signal Generator	00006	100104	29-May-17	29-May-20
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Traceable VWR Thermometer	00334	192385455	06-Aug-19	06-Aug-21
Traceable VWR Jumbo Humidity/Thermometer	00295	170120555	17-Feb-17	*15-Mar-20
Digital Multi Meter DMR-1800	00250	TE182	6-22-17	6-22-20
Bipolar Power Supply 6299A	00086	1144A02155	CNR	CNR
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	15-May-18	15-May-21
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	10-Feb-17	10-Feb-20
Rental Equipment				
R&S Base Station (Mobile Phone)	n/a	153128	08-Apr-19	08-Apr-20

CNR = Calibration Not Required

SB=Stand By

COU = Calibrate on Use

*Verified and Extended

**Per KDB 865664 3.2.2; Supporting documentation is included in the report for validation dipoles exceeding the recommended annual calibration cycle.

When applicable, reference Appendix F

Note: Per KDB 865664, Dipoles are evaluated annually for return loss and impedance. The dipole's SAR target can only be assessed by the SAR equipment manufacturer and remains the target until the dipole is recalibrated by the manufacturer. The dipole's SAR is evaluated and compared to this target during each and every System Verification which is performed prior to and/or during each DUT SAR evaluation. The results of these verifications are shown in Section 15.0

20.0 FLUID COMPOSITION

Note: Effective February 19, 2019 TCB Workshop: FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests.

Table 20.0 Fluid Composition 2450MHz HEAD TSL

Table 20.0		2450MHz Head		
Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
52.0	48.0	0.0	0.0	0.0

(1) Non-Iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dovicil 75 Antimicrobial Perservative

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 2/26/2020 11:32:58 AM

Test Laboratory: Celltech Labs

SPC-2450H Feb 26 2020

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 37.16$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:


- Probe: EX3DV4 - SN3600; ConvF(6.46, 6.46, 6.46) @ 2450 MHz; Calibrated: 3/26/2019
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASYS2 52.10.3(1513); SEMCAD X 14.6.13(7474)

SPC/SPC 2450H Input=250mw, Target=[13.3][6.16]W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 12.9 W/kg

SPC/SPC 2450H Input=250mw, Target=[13.3][6.16]W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 90.84 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 30.1 W/kg
SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.21 W/kg
 Smallest distance from peaks to all points 3 dB below = 10.2 mm
 Ratio of SAR at M2 to SAR at M1 = 46.8%
 Maximum value of SAR (measured) = 15.6 W/kg

SPC/SPC 2450H Input=250mw, Target=[13.3][6.16]W/kg/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Penetration depth = 6.872 (6.578, 6.997) [mm]
 Maximum value of SAR (interpolated) = 26.6 W/kg

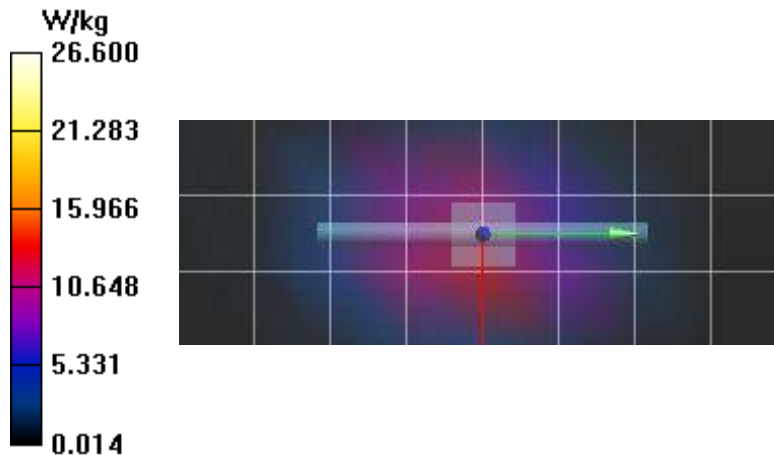

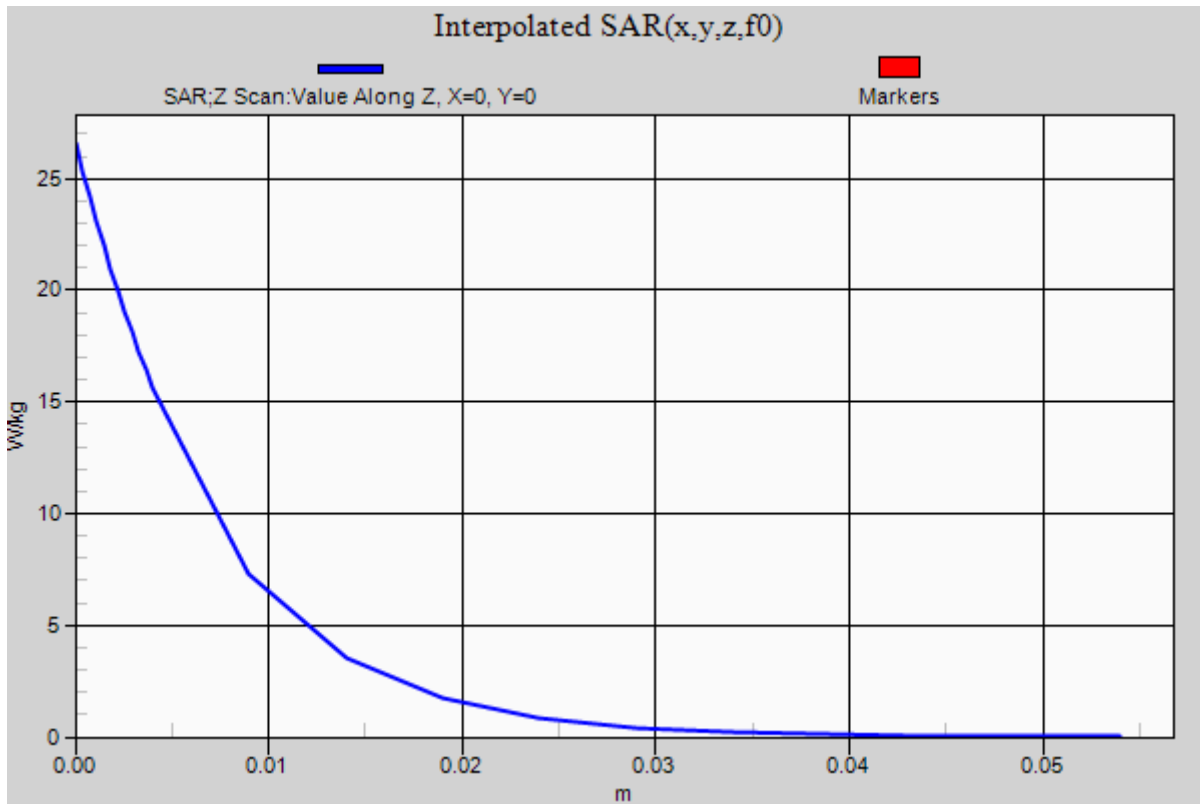

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B3

Date/Time: 2/28/2020 10:05:47 AM

Test Laboratory: Celltech Labs

Garmin A03877 - 2450H Feb 28 2020

DUT: A03877; Type: Transmitter; Communication System: UID 10030 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH1); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2402 MHz; Communication System PAR: 5.3 dB; PMF: 1.83865
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 37.296$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.46, 6.46, 6.46) @ 2402 MHz; Calibrated: 3/26/2019
 - Modulation Compensation: PMR for UID 10030 - CAA, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

2450H/B3-A03877,Body-Front Side, 2402MHz, BT/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00220 W/kg

2450H/B3-A03877,Body-Front Side, 2402MHz, BT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.00202 W/kg

SAR(1 g) = 9.72e-005 W/kg; SAR(10 g) = 2.71e-005 W/kg

Ratio of SAR at M2 to SAR at M1 = 82.6%

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.00202 W/kg

2450H/B3-A03877,Body-Front Side, 2402MHz, BT/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 2.904 (3.743, 2.949) [mm]

Maximum value of SAR (interpolated) = 0.00153 W/kg

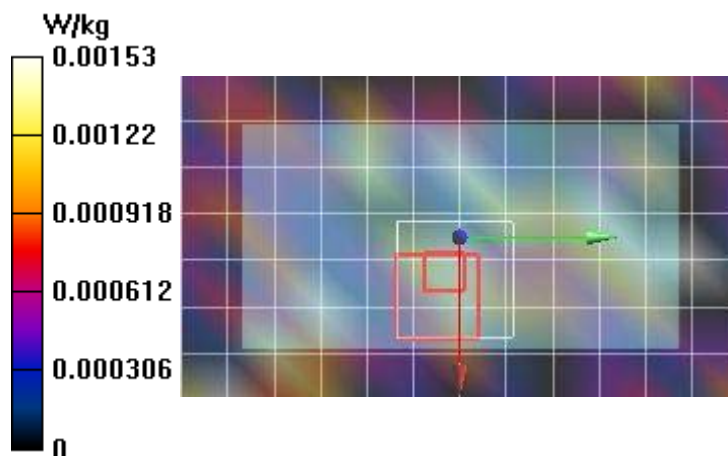

Plot B4

Date/Time: 2/28/2020 1:58:03 PM

Test Laboratory: Celltech Labs

Garmin A03877 - 2450H Feb 28 2020

DUT: A03877; Type: Transmitter;

Communication System: UID 10515 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle); Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2462 MHz; Communication System PAR: 1.58 dB; PMF: 1.01158
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 37.102$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.46, 6.46, 6.46) @ 2462 MHz; Calibrated: 3/26/2019
 - Modulation Compensation: PMR for UID 10515 - AAA, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

2450H/B4-A03877, Body-Front Side-ext power pack, 2462MHz,WIFI/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.604 W/kg

2450H/B4-A03877, Body-Front Side-ext power pack, 2462MHz,WIFI/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.578 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 40.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.645 W/kg

2450H/B4-A03877, Body-Front Side-ext power pack, 2462MHz,WIFI/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 9.640 (9.667, 11.30) [mm]

Maximum value of SAR (interpolated) = 0.0579 W/kg

