

FCC/ISED Test Report

Prepared for: **Garmin International, Inc.**

Address: **1200 E. 151st Street**
 Olathe, Kansas, 66062, USA

Product: **A04448**

Test Report No: **R20230808-00-E10A**

Approved by:



Fox Lane
EMC Test Engineer

DATE: **September 29, 2023**

Total Pages: **136**

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above-named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	28 September 2023	Issued by FLane Reviewed by KVepuri Prepared by ESchmidt/FLane
A	29 September 2023	Corrected Customer information Page 5 - FL



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page 2

1.0 Summary of test results.....4

2.0 EUT Description5

2.1 Equipment under test5

2.2 Description of test modes5

2.3 Description of support units.....5

3.0 Laboratory and General Test Description6

3.1 Laboratory description.....6

3.2 Test personnel.....6

3.3 Test equipment.....7

3.4 General Test Procedure and Setup for Radio Measuremnts.....8

4.0 Results9

4.1 Output Power13

4.2 Bandwidth.....14

4.3 Duty Cycle15

4.4 Radiated emissions.....16

4.5 Conducted Spurious Emissions25

4.6 Band edges31

4.7 Power Spectral Density.....33

4.8 Conducted AC Mains Emissions34

Appendix A: Sample Calculation37

Appendix B – Measurement Uncertainty39

Appendix C – Graphs and Tables40

REPORT END.....136



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 3

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 3 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 3 Section 5.2 (a)	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 3 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 3 Section 5.2 (b)	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 3 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	A04448
FCC ID	IPH-04448
IC	1792A-04448
EUT Received	24 August 2023
EUT Tested	28 August 2023 - 14 September 2023
Serial No.	3451928865 (Radiated Measurements) 3451928680 (Radiated Measurements) 3451928690 (Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery / 5VDC Charger: Garmin (Phi Hong) Model: AQ27A-59CFA GPN: 362-00118-00 (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

Data Rates:

Modulation	Low/High Data rate
802.11b	1MB/11MB
802.11g	6MB/54MB
802.11n	MCS0/MCS7

For 802.11x Transmissions:

Channel	Frequency
Low	2412 MHz
Mid	2437 MHz
High	2462 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequencies and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing, Review, and Report
2	Blake Winter	Test Engineer	Testing
3	Ethan Schmidt	Test Technician	Testing and Report
4	Karthik Vepuri	Test Engineer	Review/Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 17, 2023	July 17, 2025
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	July 17, 2023	July 17, 2025
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 18, 2023	July 17, 2025
SunAR RF Motion	JB1	A091418	July 27, 2023	July 26, 2024
ETS-Lindgren Red Horn Antenna	3115	218576	July 31, 2023	July 30, 2024
EMCO Horn Antenna	3116	2576	July 31, 2023	July 30, 2024
Com-Power LISN, Single Phase	LI-220C	20070017	July 17, 2023	July 17, 2025
Agilent Preamp*	87405A	3950M00669	June 5, 2023	June 5, 2025
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	June 5, 2023	June 5, 2025
Trilithic High Pass Filter*	6HC330	23042	June 5, 2023	June 5, 2025
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	June 5, 2023	June 5, 2025
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	June 5, 2023	June 5, 2025
RF Cable (control room bulkhead to test receiver)	FSCM 64639	01F1206	June 5, 2023	June 5, 2025
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	June 5, 2023	June 5, 2025
N connector bulkhead (control room)	PE9128	NCEEBH2	June 5, 2023	June 5, 2025
TDK Emissions Lab Software	V11.25	700307	NA	NA
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2024
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	May 25, 2022	May 25, 2025

*Internal Characterization

**2 Year Cal Cycle

***3 Year Cal Cycle

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

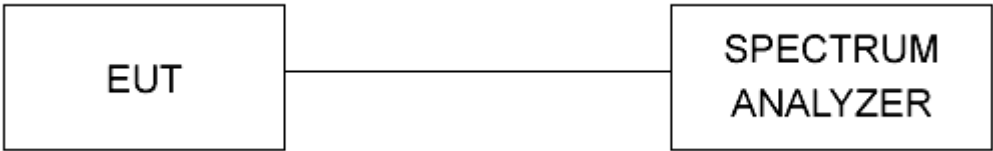


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

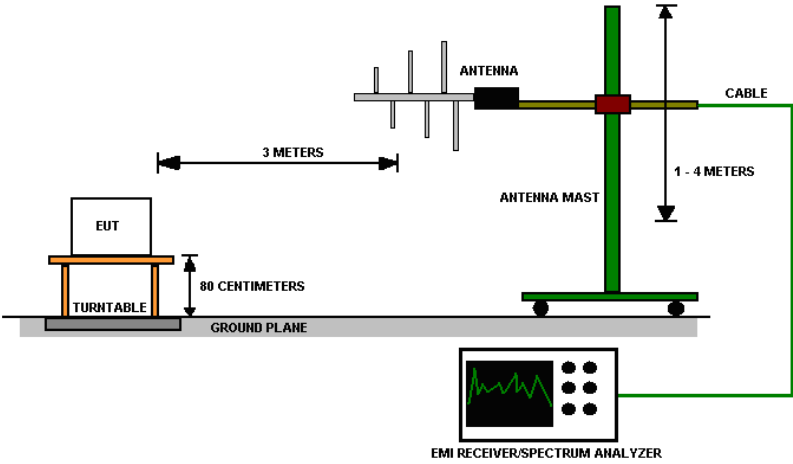


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DTS Radio Measurements Low Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	15.06	10.06	12.290	16.943	-9.717	PASS
Mid	802.11 b	15.03	10.07	12.250	16.788	-3.882	PASS
High	802.11 b	15.06	10.05	12.240	16.749	-1.823	PASS
Low	802.11 g	16.86	16.58	9.980	9.954	-13.311	PASS
Mid	802.11 g	16.87	16.54	13.770	23.823	-9.579	PASS
High	802.11 g	16.80	16.57	8.990	7.925	-14.86	PASS
Low	802.11 n	17.62	17.67	12.370	17.258	-12.394	PASS
Mid	802.11 n	17.98	17.69	15.870	38.637	-9.319	PASS
High	802.11 n	17.62	17.66	7.590	5.741	-17.034	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit =500 kHz				Output Power Limit = 30 dBm; PSD Limit = 8 dBm			
Unrestricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dB μ V)	Relative Fundamental (dB μ V)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2400.00	70.77	111.00	40.23	30.00	PASS
Low	802.11 g	2400.00	69.18	103.78	34.60	30.00	PASS
Low	802.11 n	2400.00	71.23	106.38	35.15	30.00	PASS
High	802.11 b	2483.50	53.55	110.80	57.26	30.00	PASS
High	802.11 g	2483.50	56.14	103.09	46.95	30.00	PASS
High	802.11 n	2483.50	53.66	101.39	47.73	30.00	PASS
Radiated Peak Restricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dB μ V/m @ 3m)	Measurement Type	Limit (dB μ V/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	53.60	Peak	73.98	20.39	PASS
Low	802.11 g	2390.00	60.43	Peak	73.98	13.55	PASS
Low	802.11 n	2390.00	66.04	Peak	73.98	7.94	PASS
High	802.11 b	2483.50	57.14	Peak	73.98	16.85	PASS
High	802.11 g	2483.50	64.20	Peak	73.98	9.78	PASS
High	802.11 n	2483.50	62.31	Peak	73.98	11.68	PASS
*Limit shown is the peak limit taken from FCC Part 15.209							



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

Radiated Average Restricted Band-Edge Low Data Rate

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dB μ V/m @ 3m)	Measurement Type	Limit (dB μ V/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	45.76	Average	53.98	8.22	PASS
Low	802.11 g	2390.00	46.45	Average	53.98	7.53	PASS
Low	802.11 n	2390.00	50.47	Average	53.98	3.51	PASS
High	802.11 b	2483.50	48.39	Average	53.98	5.59	PASS
High	802.11 g	2483.50	49.23	Average	53.98	4.75	PASS
High	802.11 n	2483.50	47.73	Average	53.98	6.26	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

DTS Radio Measurements High Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.79	9.07	12.380	17.298	-10.23	PASS
Mid	802.11 b	14.78	9.05	12.480	17.701	-10.461	PASS
High	802.11 b	14.80	9.52	12.250	16.788	-10.623	PASS
Low	802.11 g	16.65	16.57	10.460	11.117	-13.809	PASS
Mid	802.11 g	16.69	16.57	11.950	15.668	-12.267	PASS
High	802.11 g	16.62	16.55	9.520	8.954	-14.454	PASS
Low	802.11 n	17.60	17.70	10.710	11.776	-13.559	PASS
Mid	802.11 n	17.60	17.70	10.240	10.568	-14.762	PASS
High	802.11 n	17.61	17.71	8.360	6.855	-16.313	PASS

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz Output Power Limit = 30 dBm; PSD Limit = 8 dBm

Unrestricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dB μ V)	Relative Fundamental (dB μ V)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2390.00	69.99	111.00	41.01	30.00	PASS
Low	802.11 g	2400.00	73.58	105.54	31.96	30.00	PASS
Low	802.11 n	2400.00	71.55	105.43	33.88	30.00	PASS
High	802.11 b	2483.50	52.42	110.71	58.29	30.00	PASS
High	802.11 g	2483.50	60.46	104.59	44.13	30.00	PASS
High	802.11 n	2483.50	57.29	103.15	45.85	30.00	PASS

Radiated Peak Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dB μ V/m @ 3m)	Measurement Type	Limit (dB μ V/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	55.66	Peak	73.98	18.32	PASS
Low	802.11 g	2390.00	61.72	Peak	73.98	12.26	PASS
Low	802.11 n	2390.00	62.11	Peak	73.98	11.87	PASS
High	802.11 b	2483.50	58.03	Peak	73.98	15.96	PASS
High	802.11 g	2483.50	66.50	Peak	73.98	7.48	PASS
High	802.11 n	2483.50	67.96	Peak	73.98	6.02	PASS

*Limit shown is the peak limit taken from FCC Part 15.209



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

Radiated Average Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dB μ V/m @ 3m)	Measurement Type	Limit (dB μ V/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	45.26	Average	53.98	8.72	PASS
Low	802.11 g	2390.00	46.89	Average	53.98	7.10	PASS
Low	802.11 n	2390.00	48.10	Average	53.98	5.88	PASS
High	802.11 b	2483.50	46.71	Average	53.98	7.27	PASS
High	802.11 g	2483.50	50.18	Average	53.98	3.80	PASS
High	802.11 n	2483.50	50.80	Average	53.98	3.19	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method:

Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purposes only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

All Modulations/Transmitters in this report had a duty cycle of >98%

4.4 RADIATED EMISSIONS

Test Method:

ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worst-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

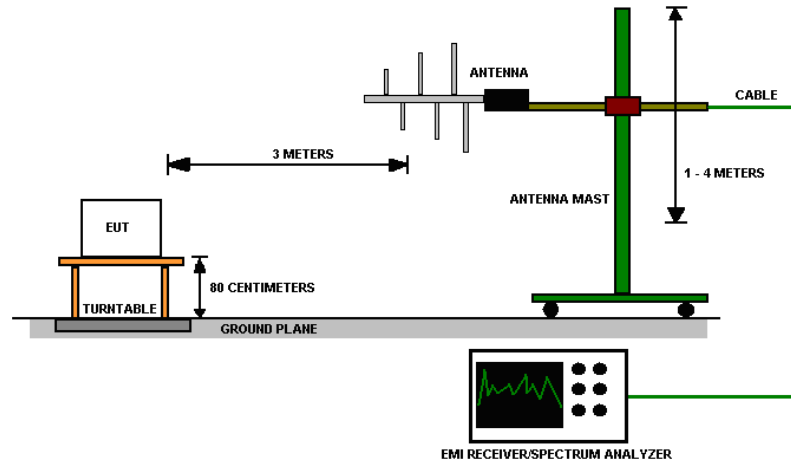


Figure 3 - Radiated Emissions Test Setup

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

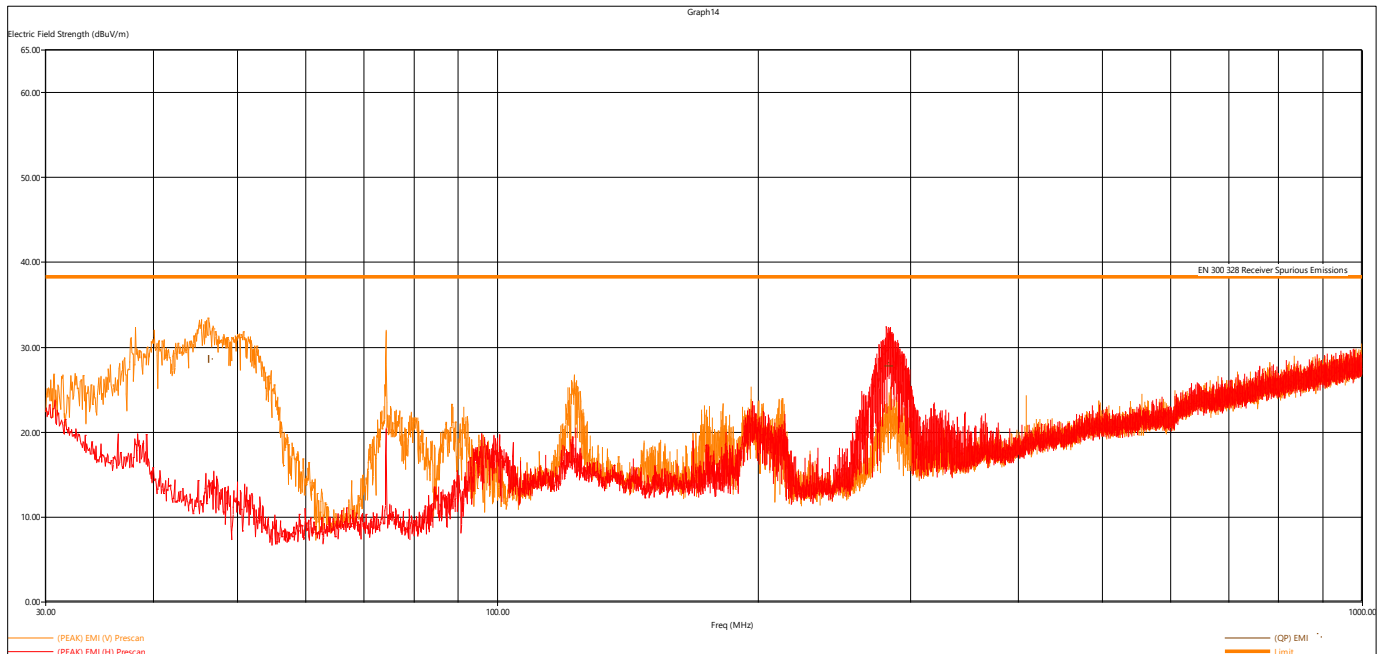


Figure 4 - Radiated Emissions Plot, Receive

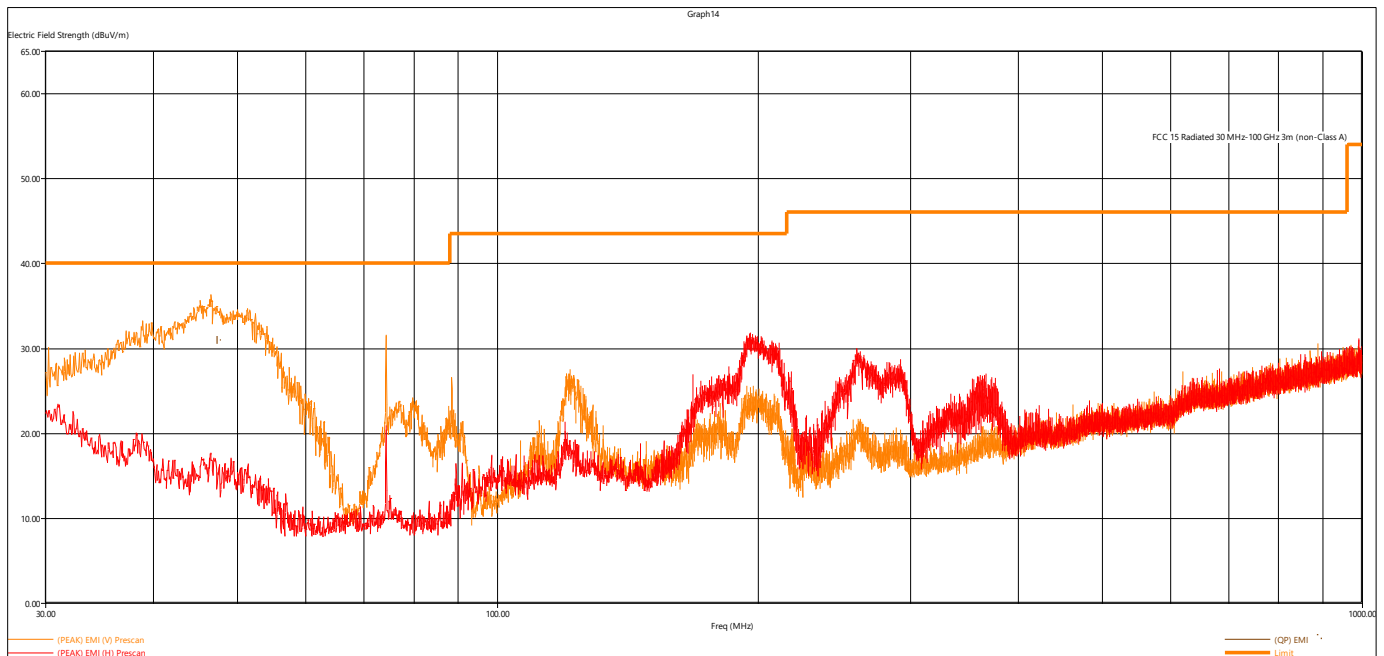


Figure 5 - Radiated Emissions Plot, 802.11b 1MB

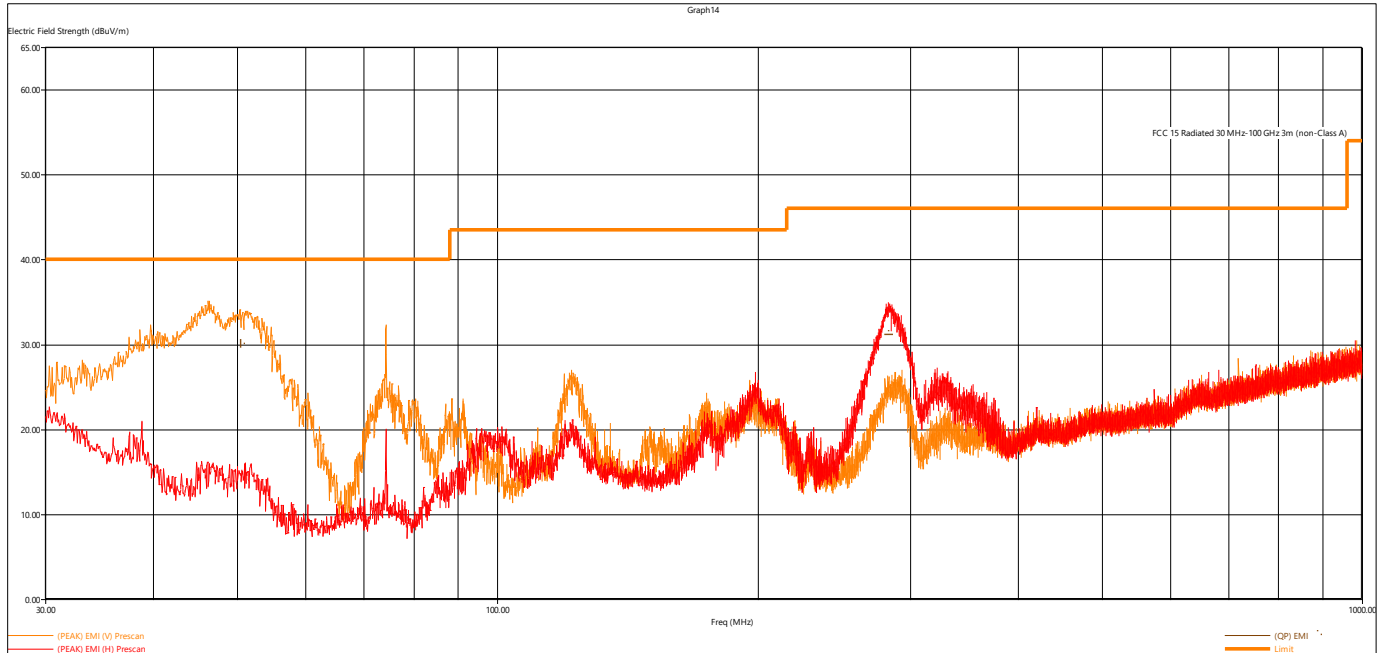


Figure 6 - Radiated Emissions Plot, 802.11b 11MB

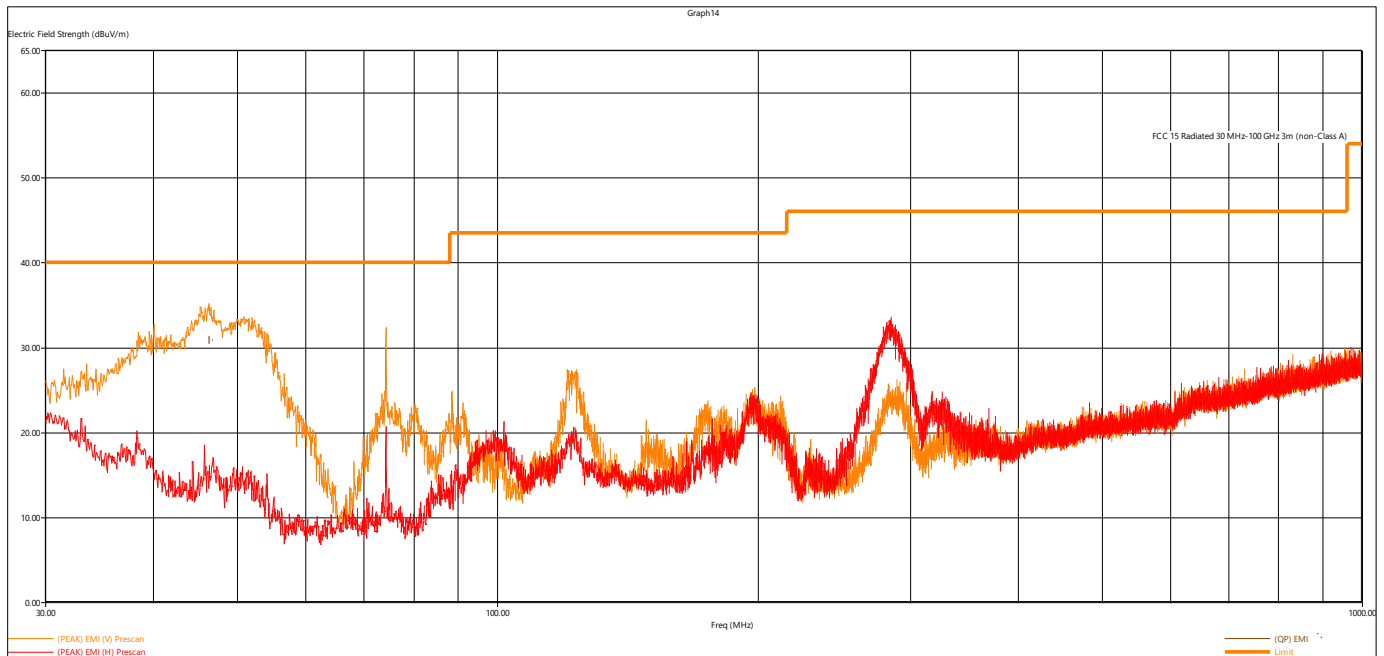


Figure 7 - Radiated Emissions Plot, 802.11g 6MB

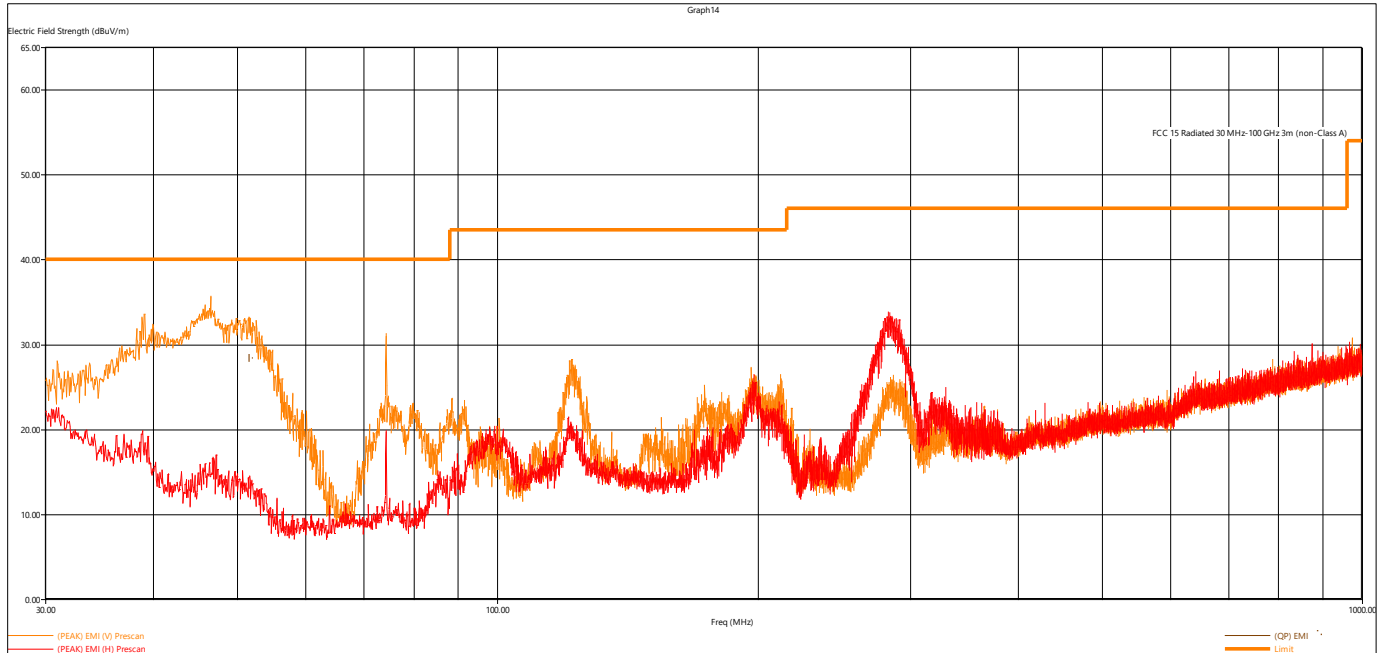


Figure 8 - Radiated Emissions Plot, 802.11g 54MB

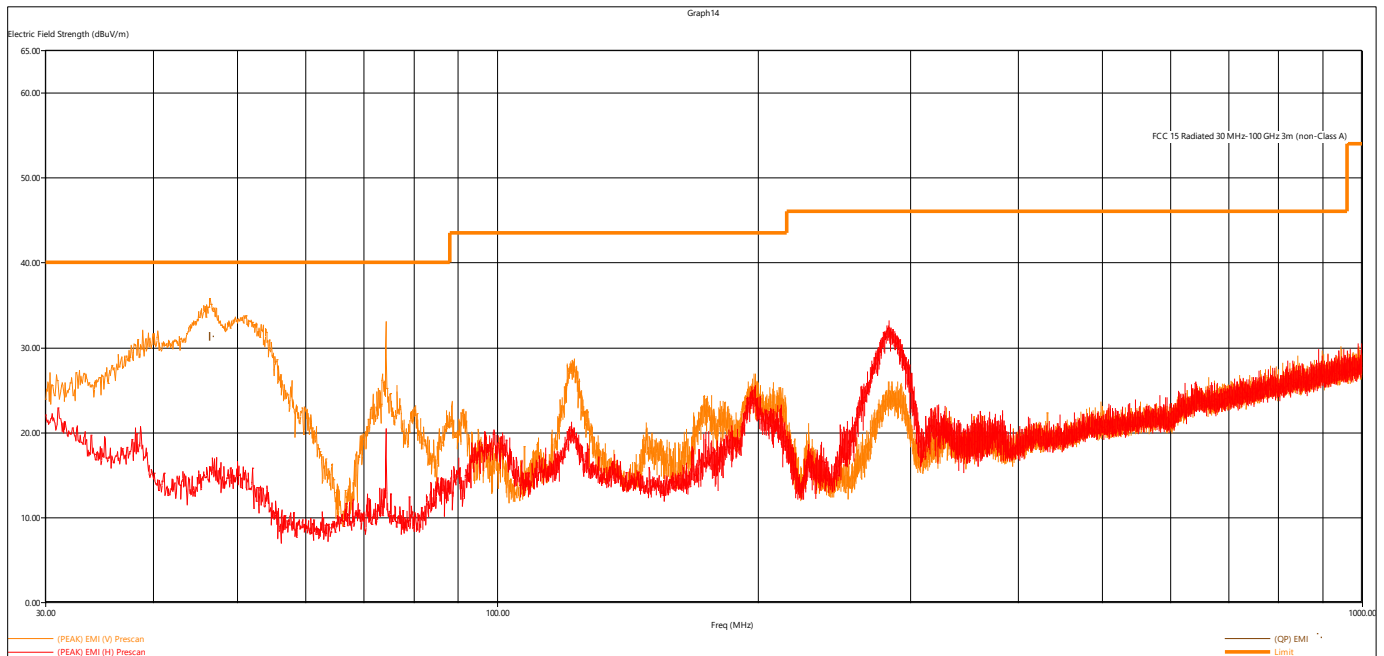


Figure 9 - Radiated Emissions Plot, 802.11n MCS0

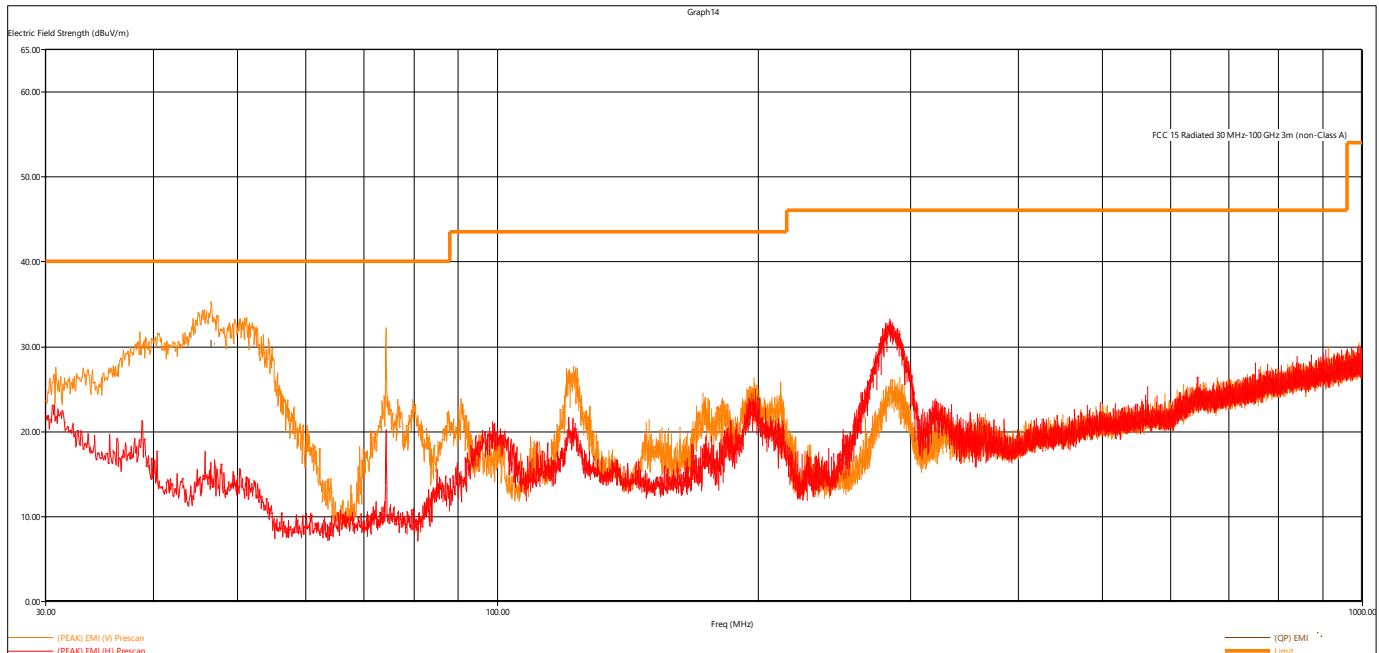


Figure 10 - Radiated Emissions Plot, 802.11n MCS7

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
47.375040	30.86	40.00	9.14	106.35	45.25	V	High	WIFI B 1MB
282.970800	31.14	46.02	14.88	109.28	267.25	H	High	WIFI B 11MB
50.411280	30.04	46.02	15.98	103.79	31.00	V	High	WIFI B 11MB
46.324320	30.84	40.00	9.16	105.94	23.75	V	High	WIFI G 6MHz
51.600960	28.38	40.00	11.62	123.01	289.00	V	High	WIFI G 54MHz
46.594320	31.20	40.00	8.80	105.88	360.25	V	High	WIFI N MCS0
46.599840	30.19	40.00	9.81	117.88	357.00	V	High	WIFI N MCS7
283.217520	27.69	46.02	18.33	104.14	278.50	H	Receive	
46.266000	28.49	40.00	11.51	104.38	67.50	V	Receive	

All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2412.858000	100.23	N/A	N/A	202.11	223.00	V	Low	WIFI B 1MB
2437.804000	101.18	N/A	N/A	220.62	177.25	H	Mid	WIFI B 1MB
7312.672000	58.21	73.98	15.77	514.17	92.00	H	Mid	WIFI B 1MB
7234.516000	56.30	N/A	N/A	161.16	88.75	V	Low	WIFI B 1MB
7385.588000	52.28	73.98	21.70	141.52	120.75	H	High	WIFI B 1MB
7236.618000	60.41	N/A	N/A	463.79	15.25	V	Low	WIFI B 11MB
7311.078000	62.98	73.98	11.00	540.44	90.25	H	Mid	WIFI B 11MB
7387.078000	58.83	73.98	15.15	202.47	79.25	H	High	WIFI B 11MB
7228.752000	55.83	N/A	N/A	503.19	43.75	H	Low	WIFI G 6MB
7306.626000	61.04	73.98	12.94	518.23	102.25	H	Mid	WIFI G 6MB
7313.186000	60.29	73.98	13.69	152.56	66.75	V	Mid	WIFI G 6MB
7238.410000	59.31	N/A	N/A	479.01	358.50	V	Low	WIFI G 54MB
7318.306000	58.79	73.98	15.19	161.52	72.25	V	Mid	WIFI G 54MB
7311.072000	57.51	73.98	16.47	146.53	77.25	V	Mid	WIFI N MCS0
7230.726000	58.92	N/A	N/A	195.31	70.25	V	Low	WIFI N MCS7
7316.478000	57.63	73.98	16.35	490.17	51.75	H	Mid	WIFI N MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.			
2412.858000	97.38	N/A	N/A	202.11	223.00	V	Low	WIFI B 1MB
2437.804000	98.61	N/A	N/A	220.62	177.25	H	Mid	WIFI B 1MB
7312.672000	53.27	53.98	0.71	514.17	92.00	H	Mid	WIFI B 1MB
7234.516000	49.82	N/A	N/A	161.16	88.75	V	Low	WIFI B 1MB
7385.588000	41.67	53.98	12.31	141.52	120.75	H	High	WIFI B 1MB
7236.618000	48.06	N/A	N/A	463.79	15.25	V	Low	WIFI B 11MB
7311.078000	50.62	53.98	3.36	540.44	90.25	H	Mid	WIFI B 11MB
7387.078000	47.12	53.98	6.86	202.47	79.25	H	High	WIFI B 11MB
7228.752000	43.38	N/A	N/A	503.19	43.75	H	Low	WIFI G 6MB
7306.626000	48.12	53.98	5.86	518.23	102.25	H	Mid	WIFI G 6MB
7313.186000	45.85	53.98	8.13	152.56	66.75	V	Mid	WIFI G 6MB
7238.410000	41.19	N/A	N/A	479.01	358.50	V	Low	WIFI G 54MB
7318.306000	42.81	53.98	11.17	161.52	72.25	V	Mid	WIFI G 54MB
7311.072000	43.35	53.98	10.63	146.53	77.25	V	Mid	WIFI N MCS0
7230.726000	40.54	N/A	N/A	195.31	70.25	V	Low	WIFI N MCS7
7316.478000	40.79	53.98	13.19	490.17	51.75	H	Mid	WIFI N MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method:

ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

From FCC Part 15.247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plots is a reference line placed at -20dBm.

Deviations from test standard:

Test performed at 120kHz RBW

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Data rates and channels were investigated and worst case was reported. no emissions exceeded the limits.

There was no distinguishable difference between low and high data rate.

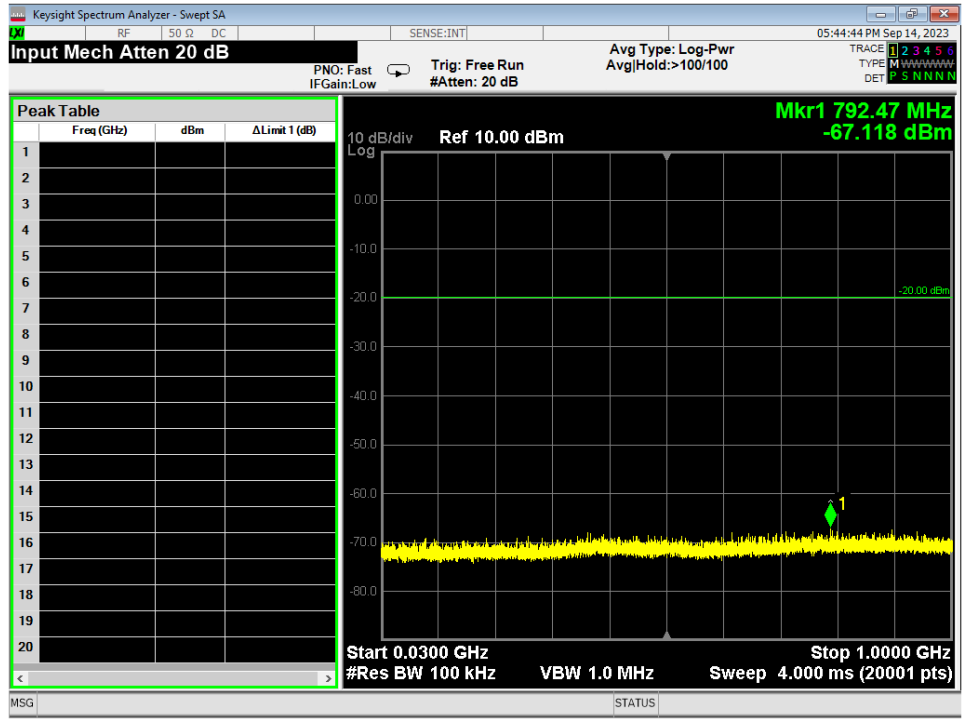


Figure 11 - Radiated Emissions Plot, WIFI 802.11b, 30M – 1G, Low

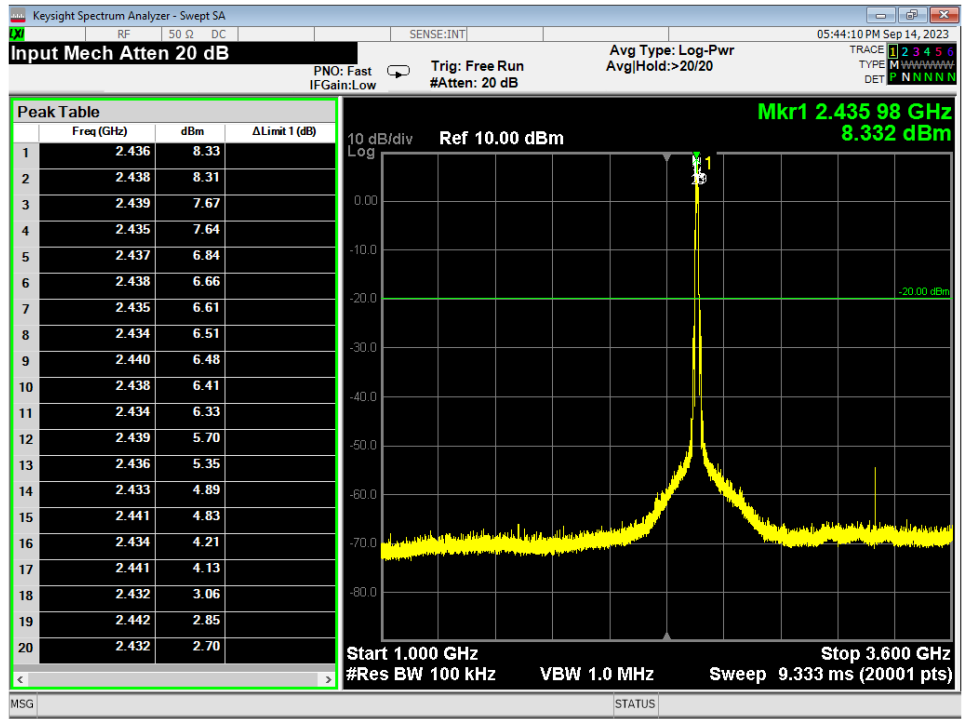


Figure 12 - Radiated Emissions Plot, WIFI 802.11b, 1G – 3.6G, Low

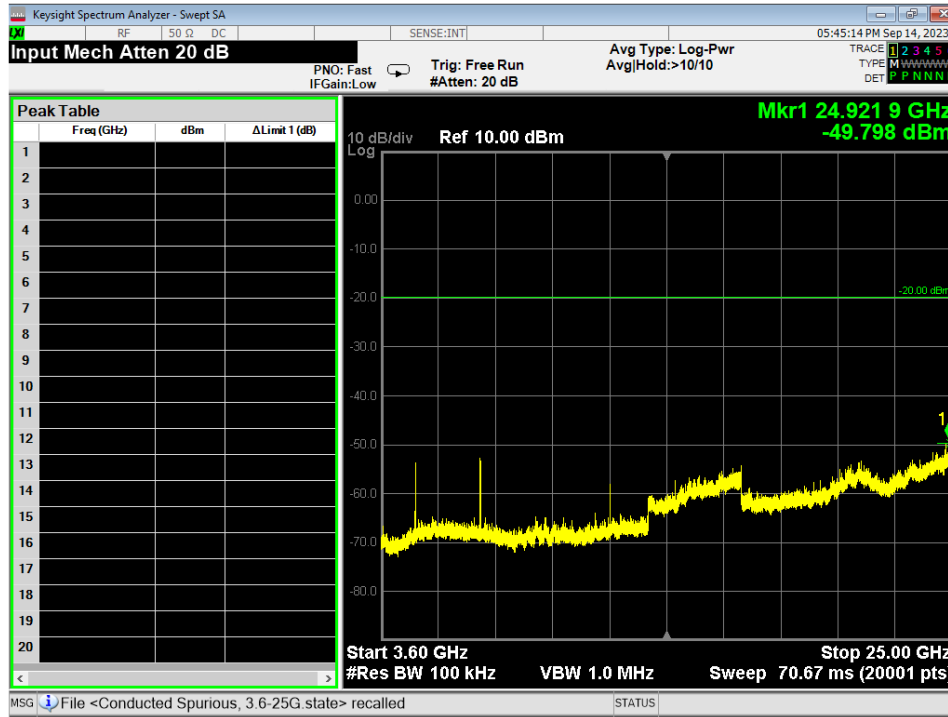


Figure 13 - Radiated Emissions Plot, WIFI 802.11b, 3.6G – 25G, Low

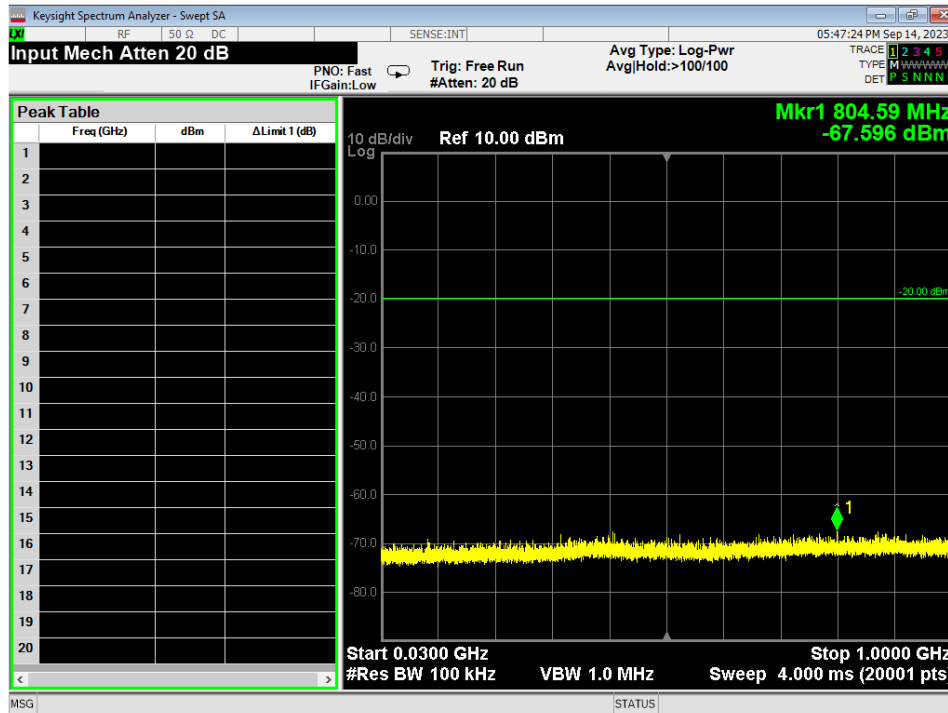


Figure 14 - Radiated Emissions Plot, WIFI 802.11g, 30M – 1G, Low

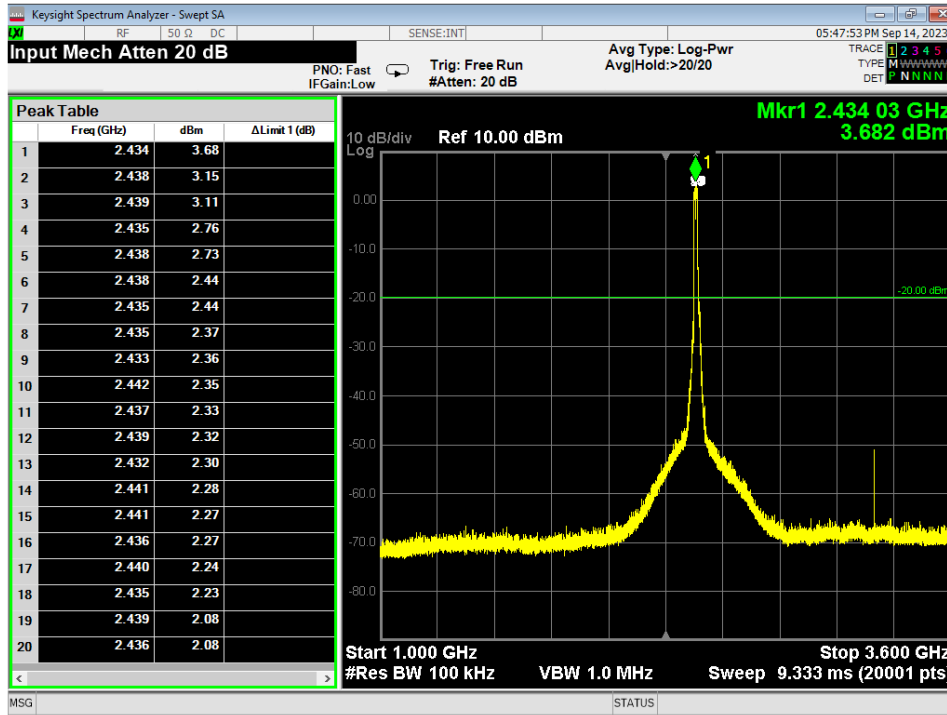


Figure 15 - Radiated Emissions Plot, WIFI 802.11g, 1G – 3.6G, Low

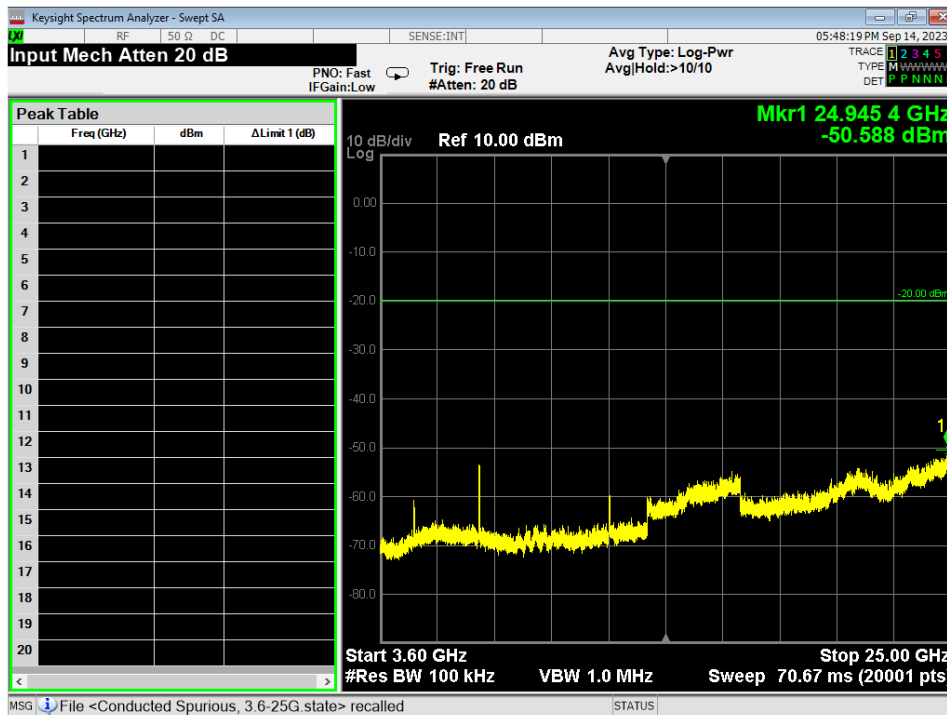


Figure 16 - Radiated Emissions Plot, WIFI 802.11g, 3.6G – 25G, Low

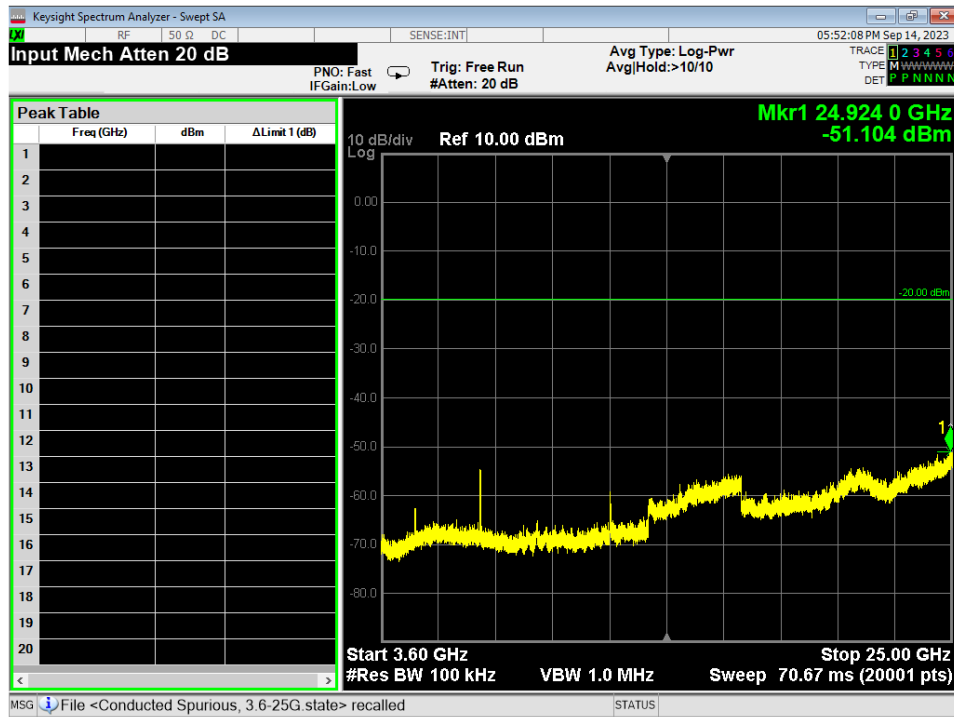


Figure 19 - Radiated Emissions Plot, WIFI 802.11n, 3.6G – 25G, Low



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 BAND EDGES

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing it to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

4.7 POWER SPECTRAL DENSITY

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.

4.8 CONDUCTED AC MAINS EMISSIONS

Test Method:

ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

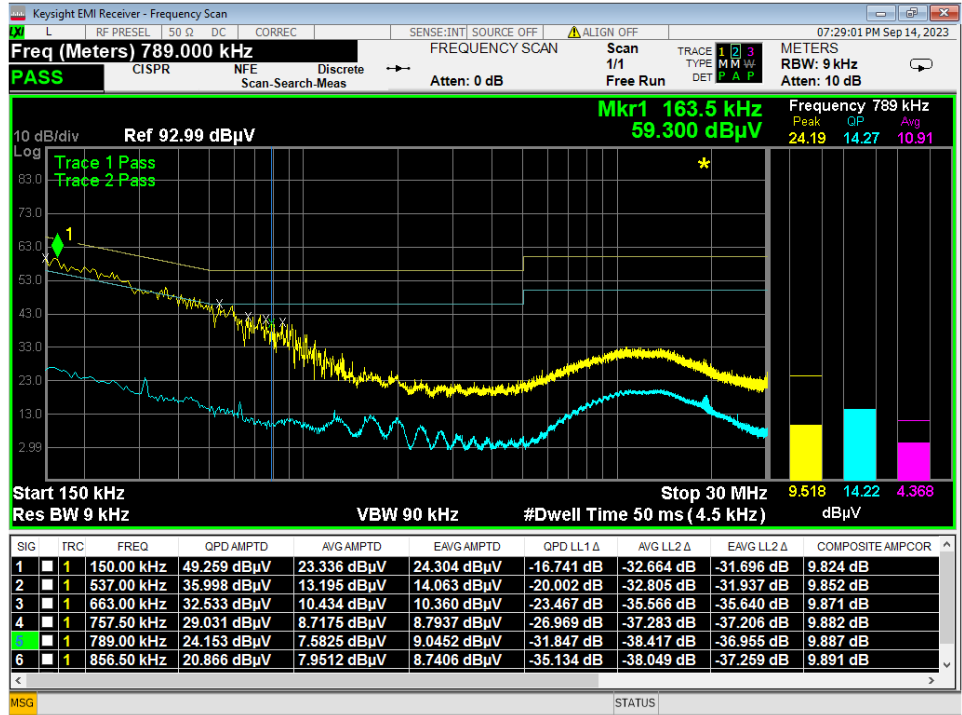


Figure 20 - Conducted Emissions Plot, Line, TX

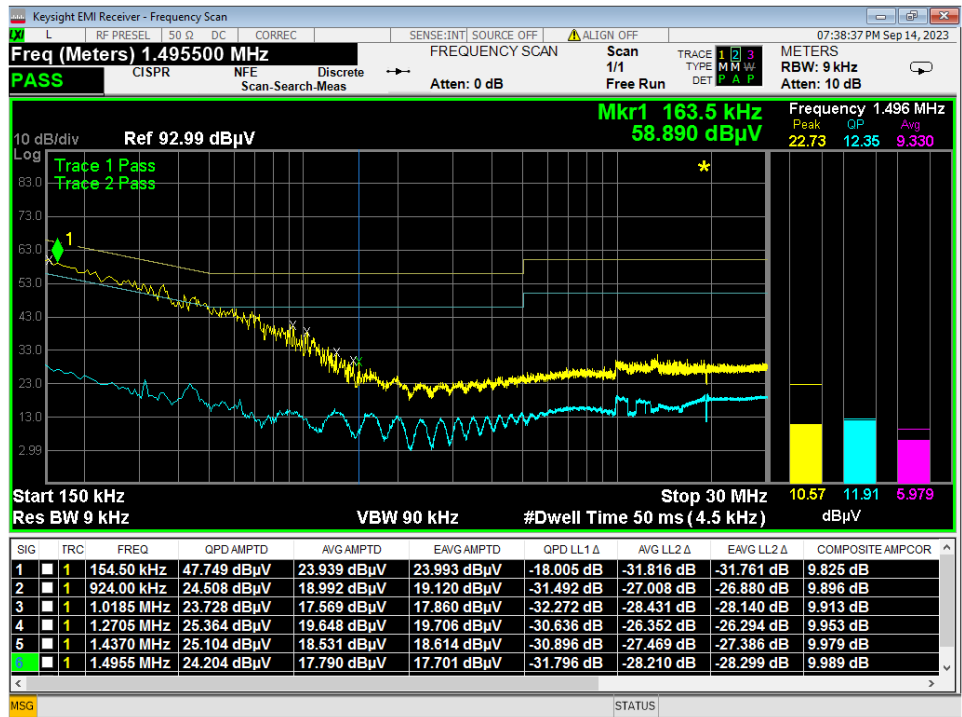


Figure 21 - Conducted Emissions Plot, Neutral, TX

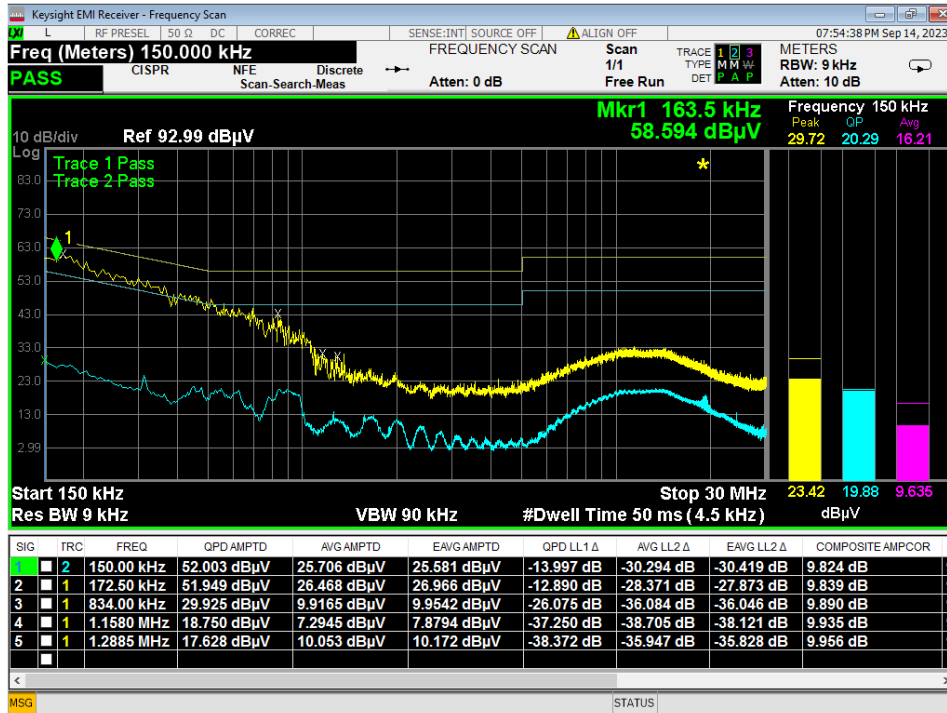


Figure 22 - Conducted Emissions Plot, Line, IDLE

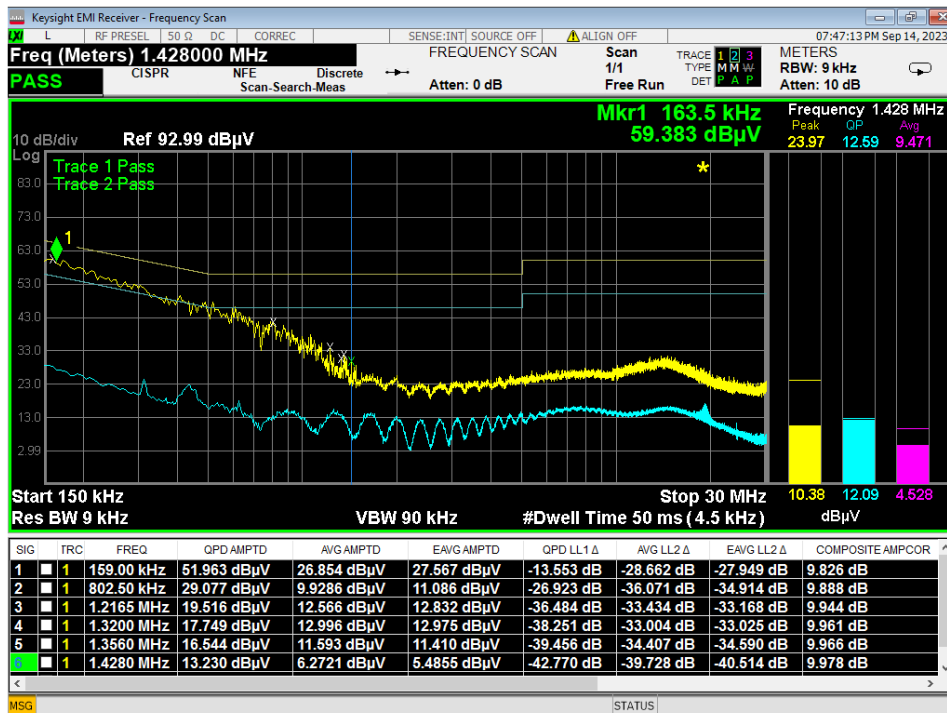



Figure 23 - Conducted Emissions Plot, Neutral, IDLE

	Report Number:	R20230808-00-E10A	Rev	A
	Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±4.31
Radiated Emissions, 3m	1GHz - 18GHz	±5.08
Emissions limits, conducted	30MHz – 18GHz	±3.03

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		


APPENDIX C – GRAPHS AND TABLES

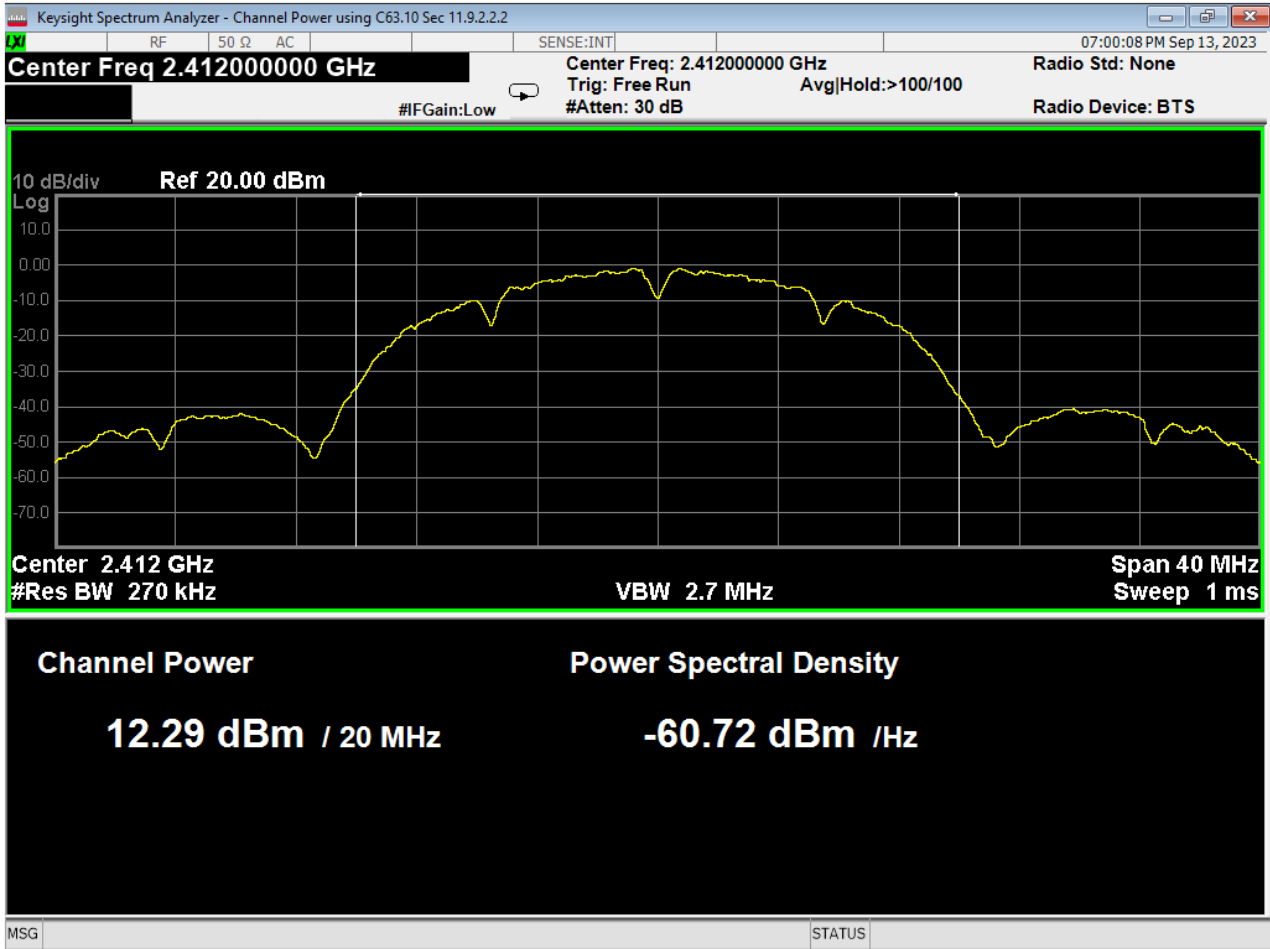

01 Average Power, Low, Wifi B, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

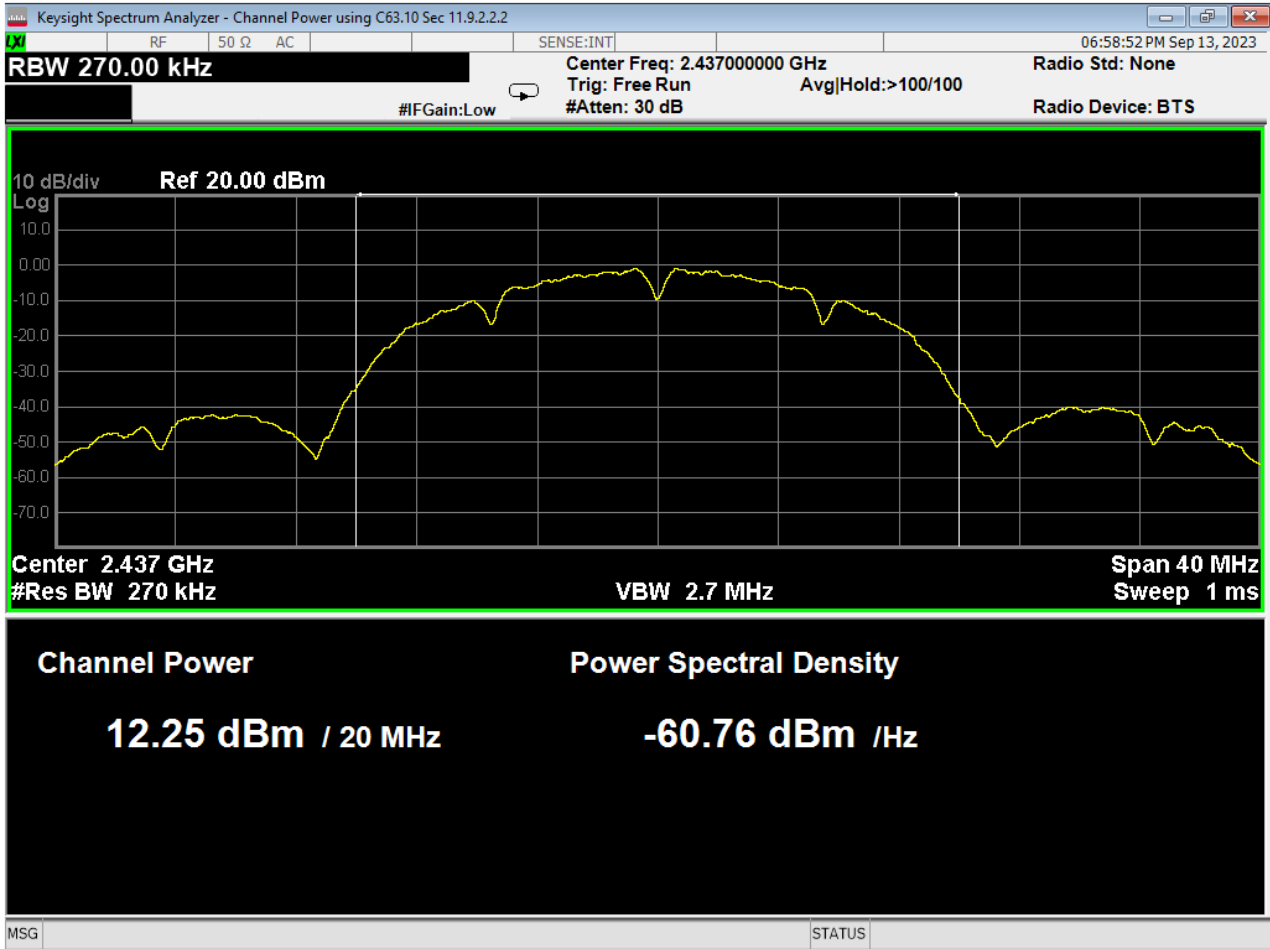

02 Average Power, Mid, Wifi B, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

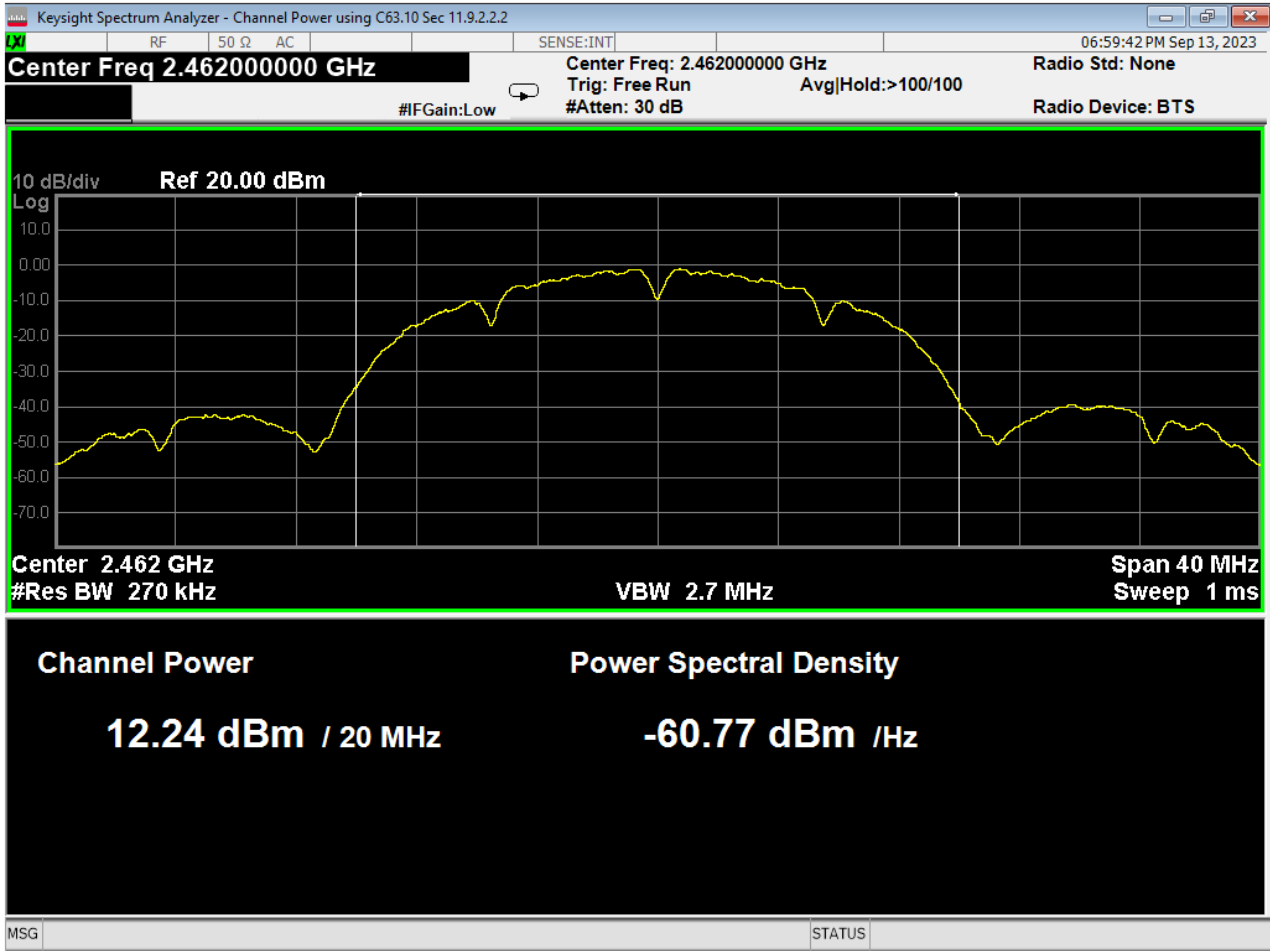

03 Average Power, High, Wifi B, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

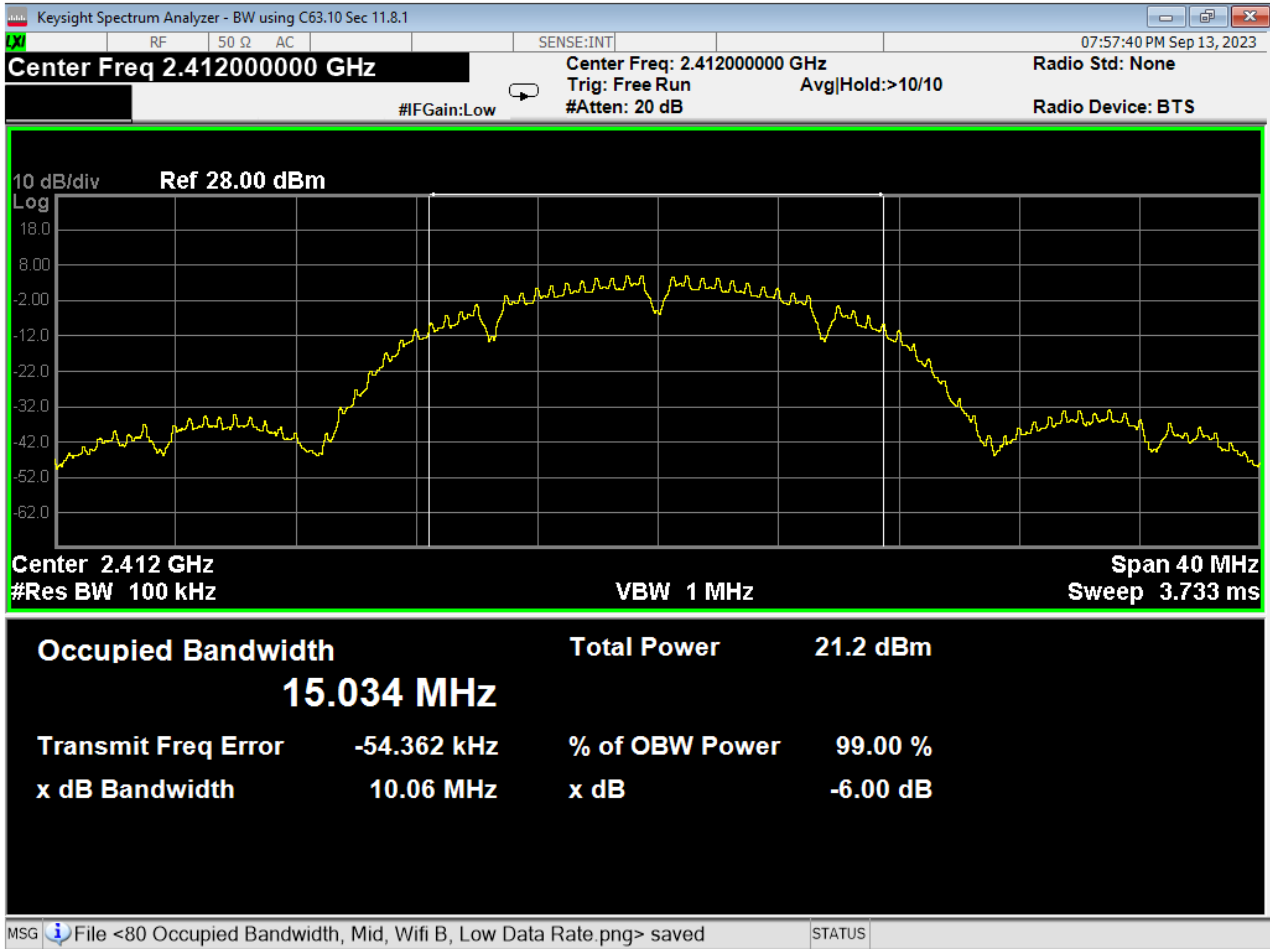

04 6dB Bandwidth, Low, Wifi B, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

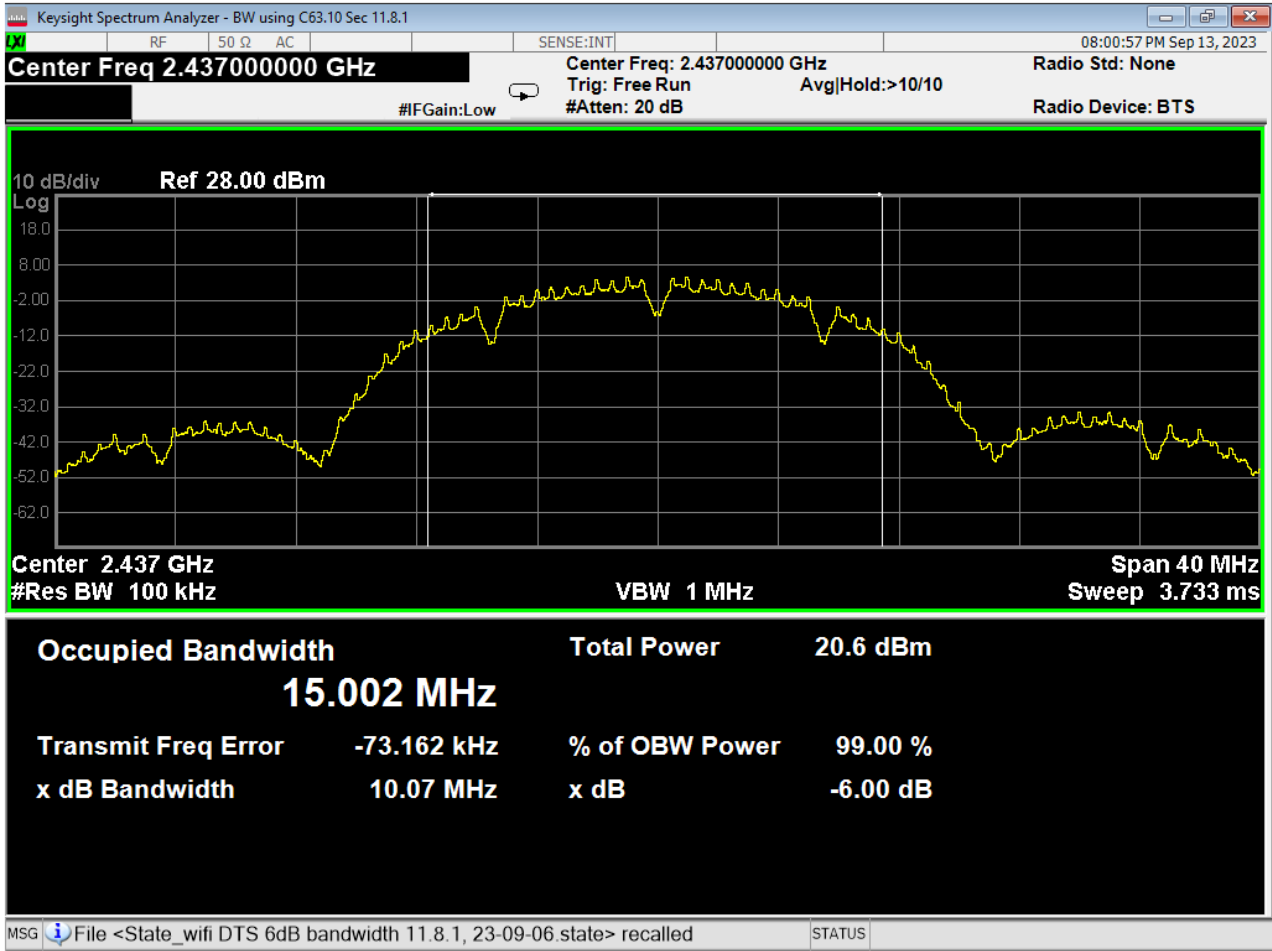


05 6dB Bandwidth, Mid, Wifi B, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

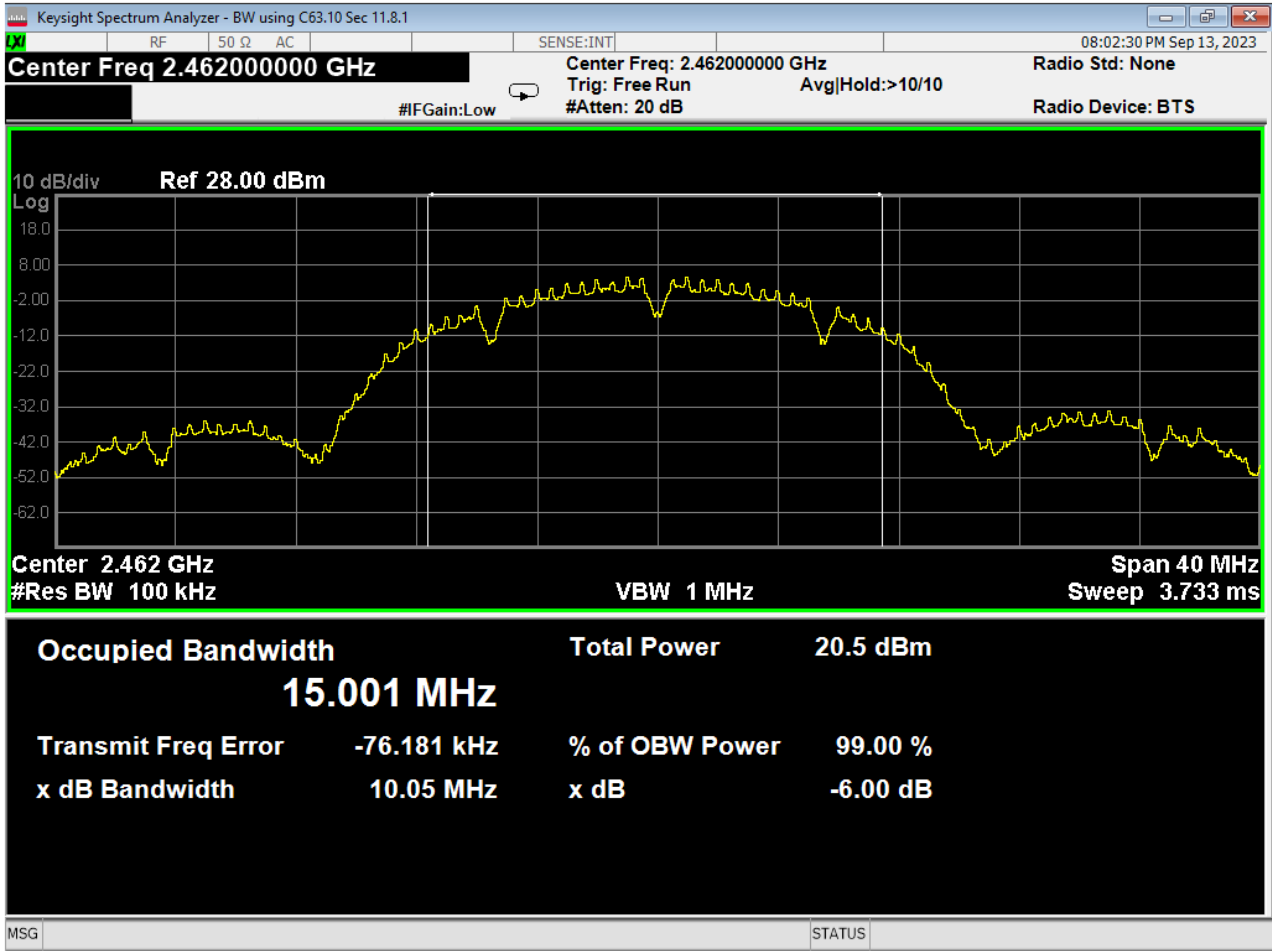


06 6dB Bandwidth, High, Wifi B, Low Data Rate

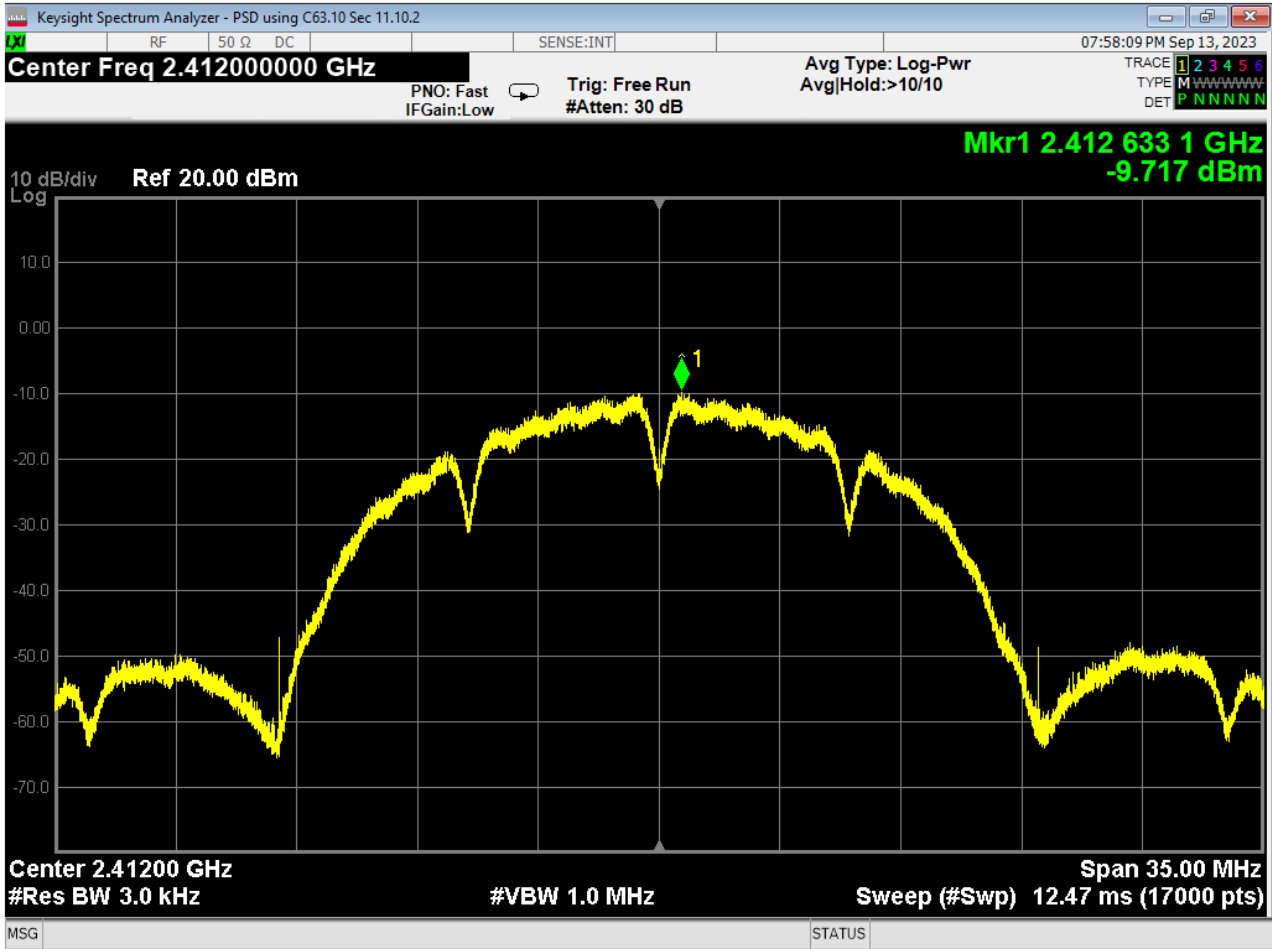


07 PSD, Low, Wifi B, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

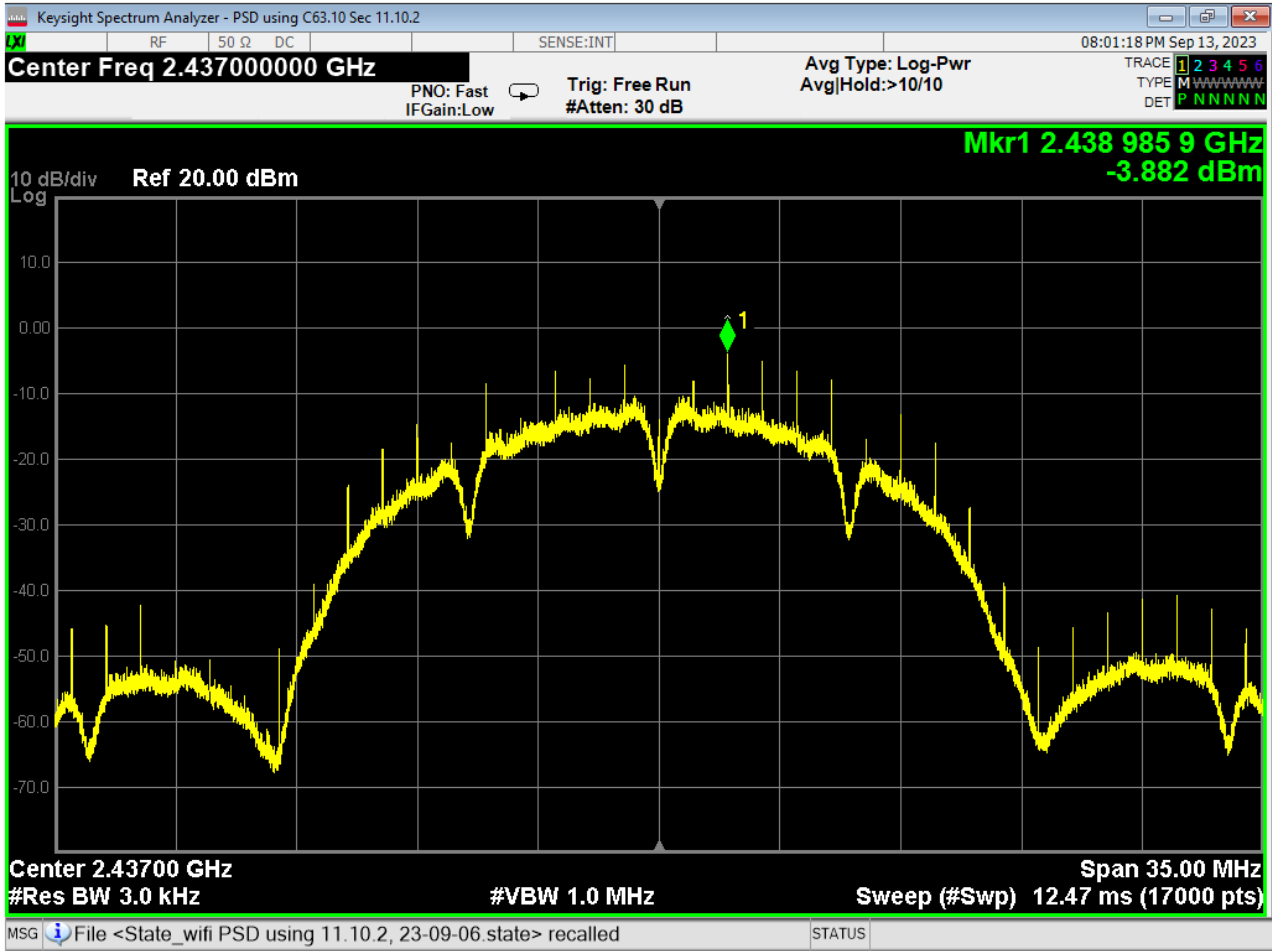


08 PSD, Mid, Wifi B, Low Data Rate

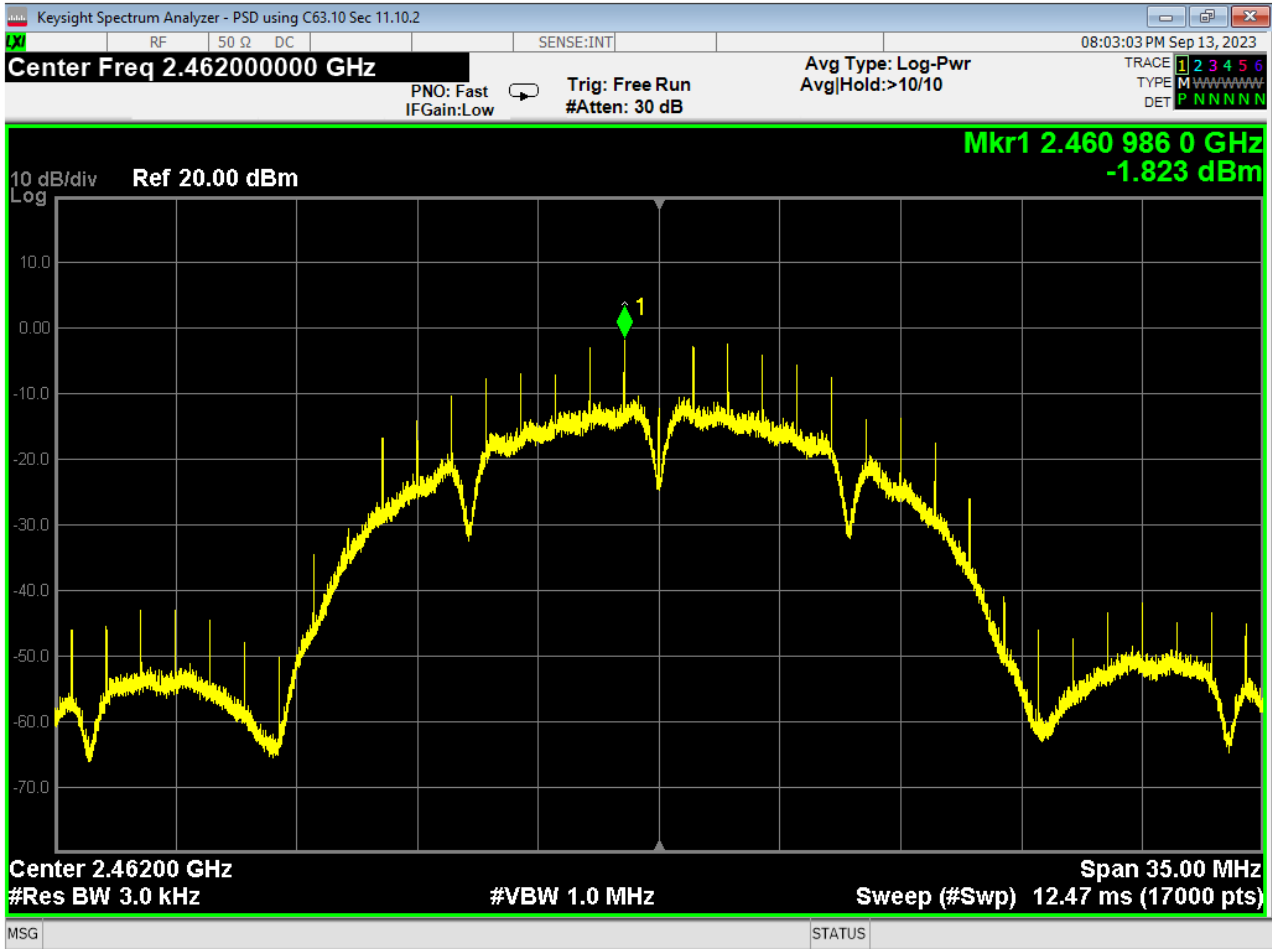

09 PSD, High, Wifi B, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

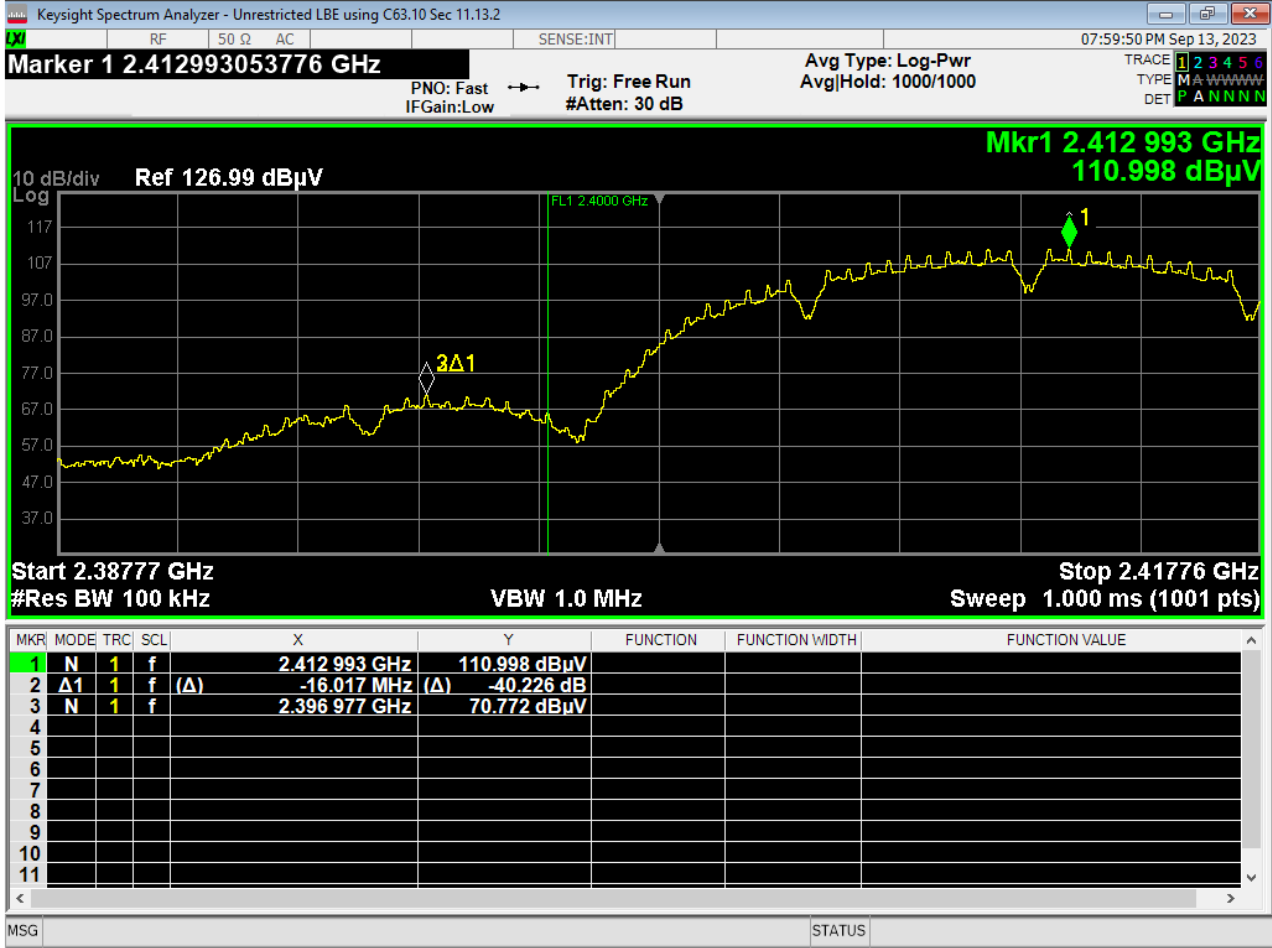

10 Lower Bandedge, Unrestricted, Wifi B, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		



11 Higher Bandedge, Unrestricted, Wifi B, Low Data Rate



Report Number:


R20230808-00-E10A

Rev


A

Prepared for:


Garmin International, Inc.

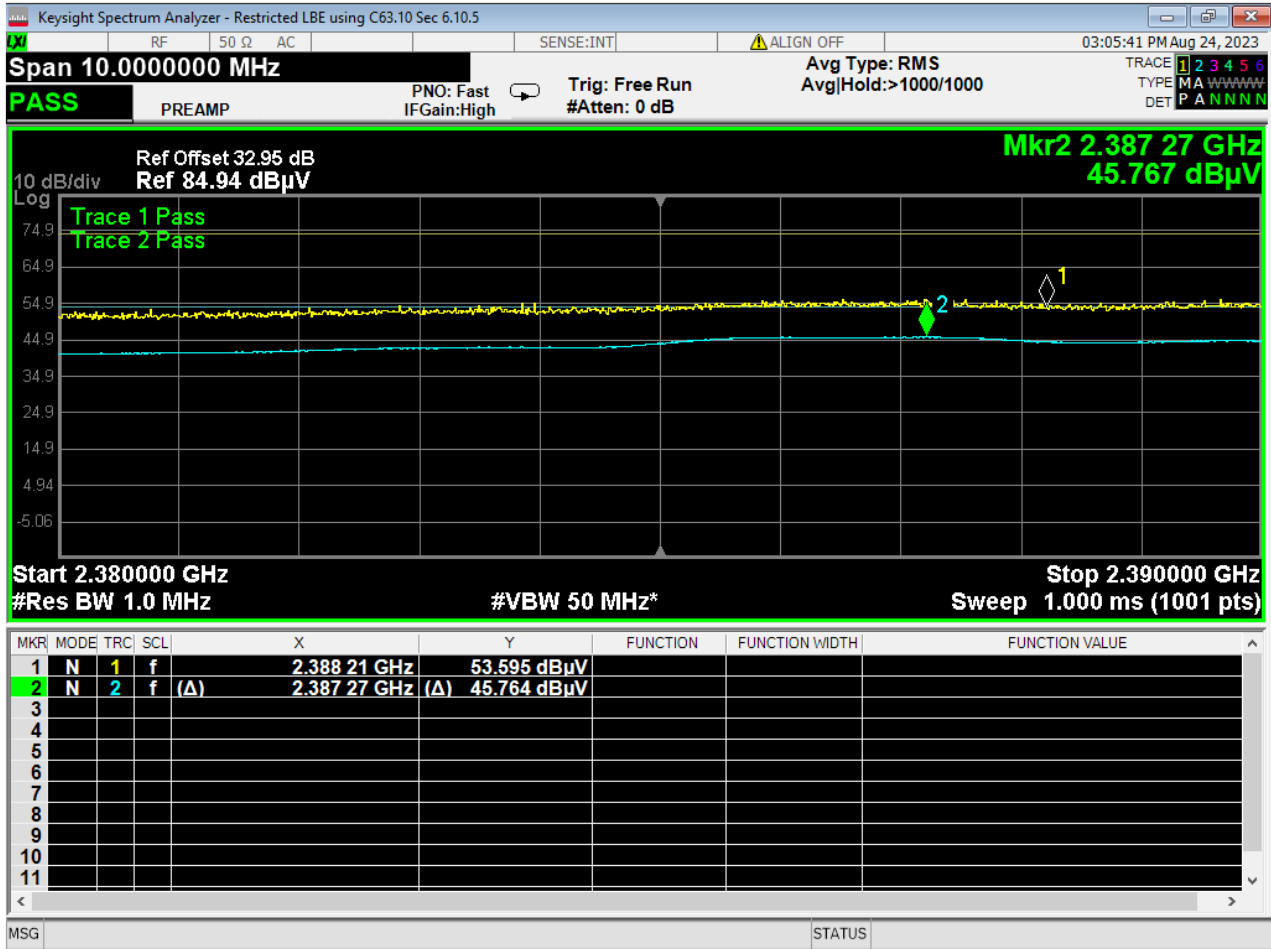


12 Lower Bandedge, Restricted, Wifi B, Low Data Rate

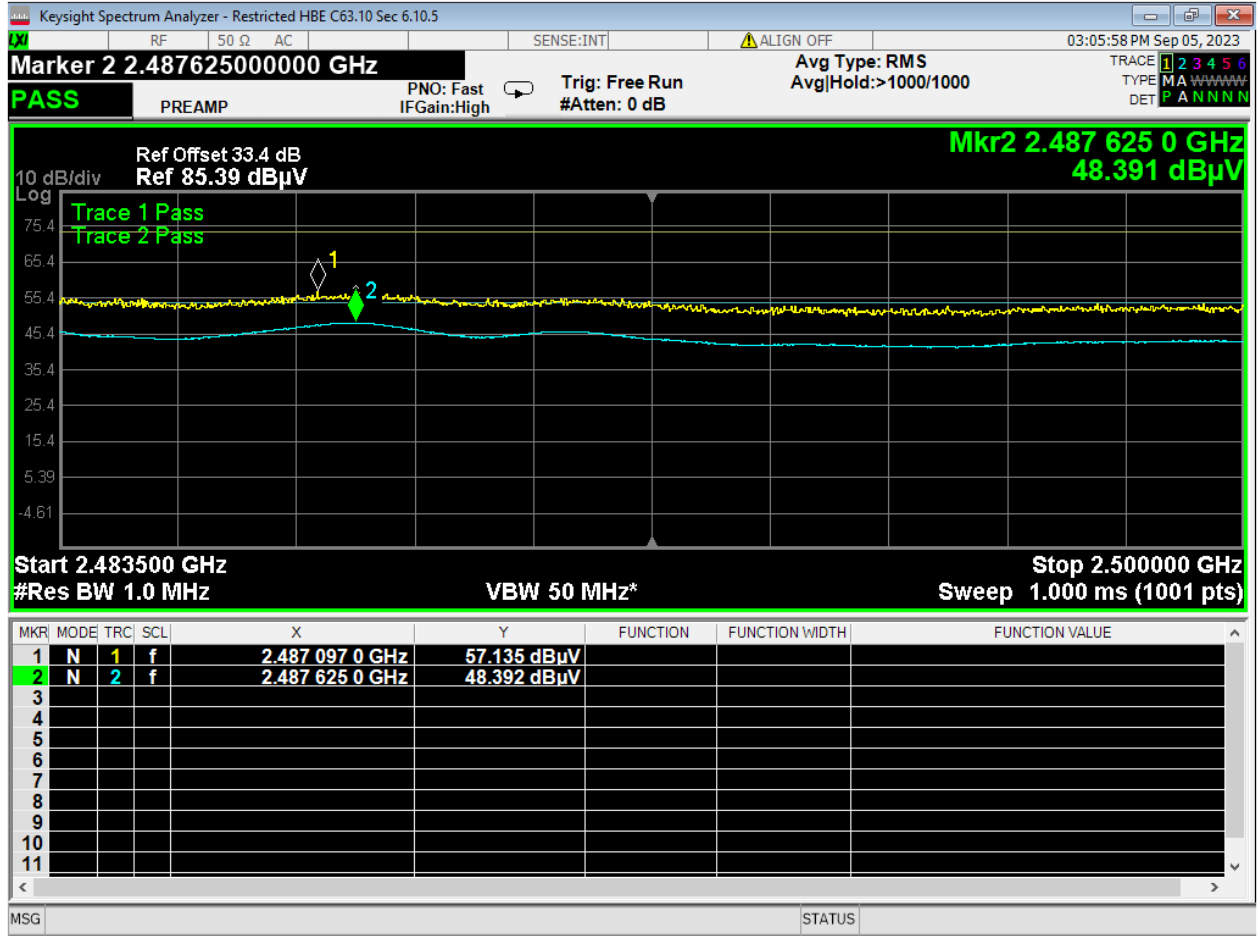

13 Higher Bandedge, Restricted, Wifi B, Low Data Rate

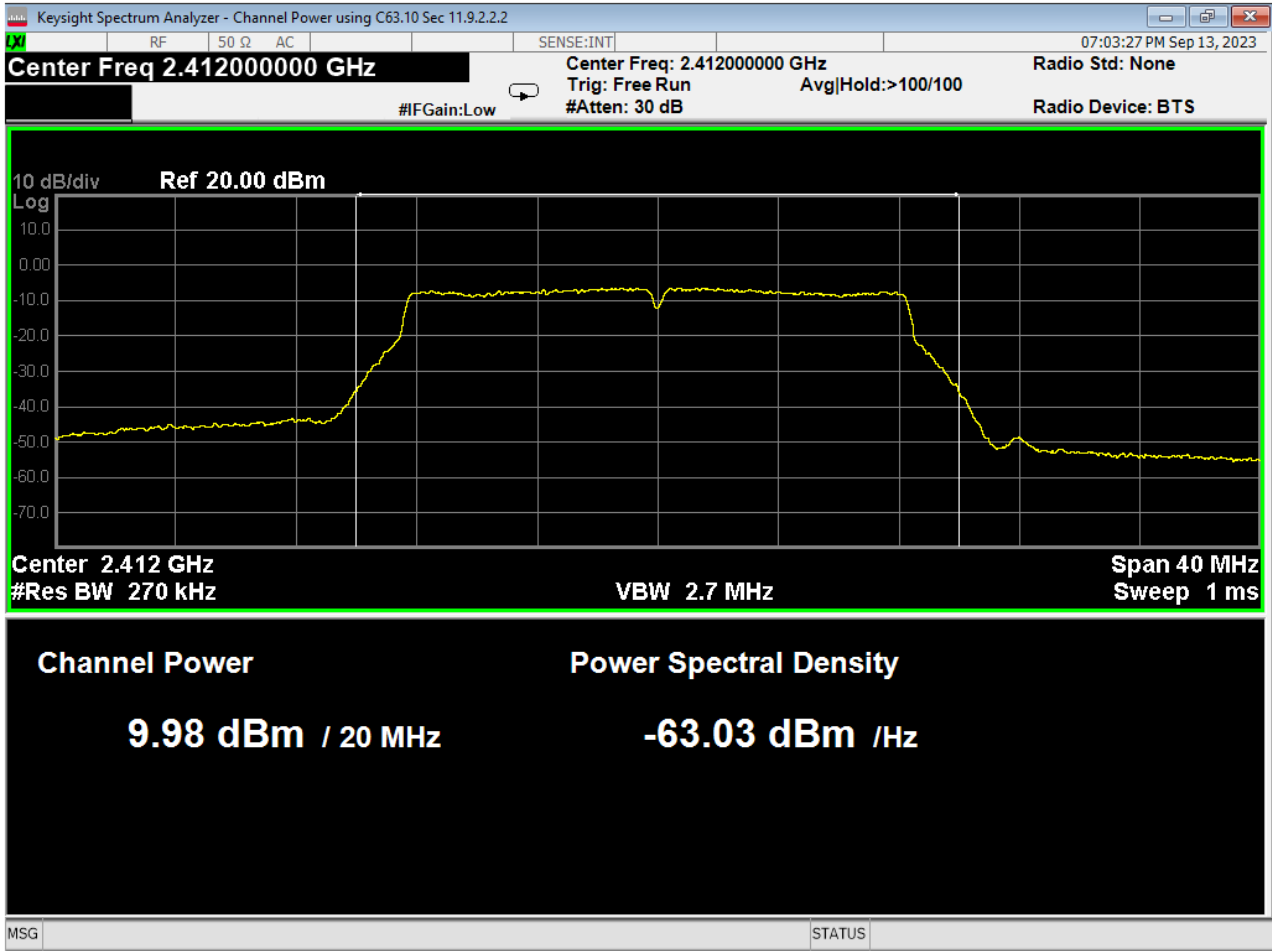


14 Average Power, Low, Wifi G, Low Data Rate

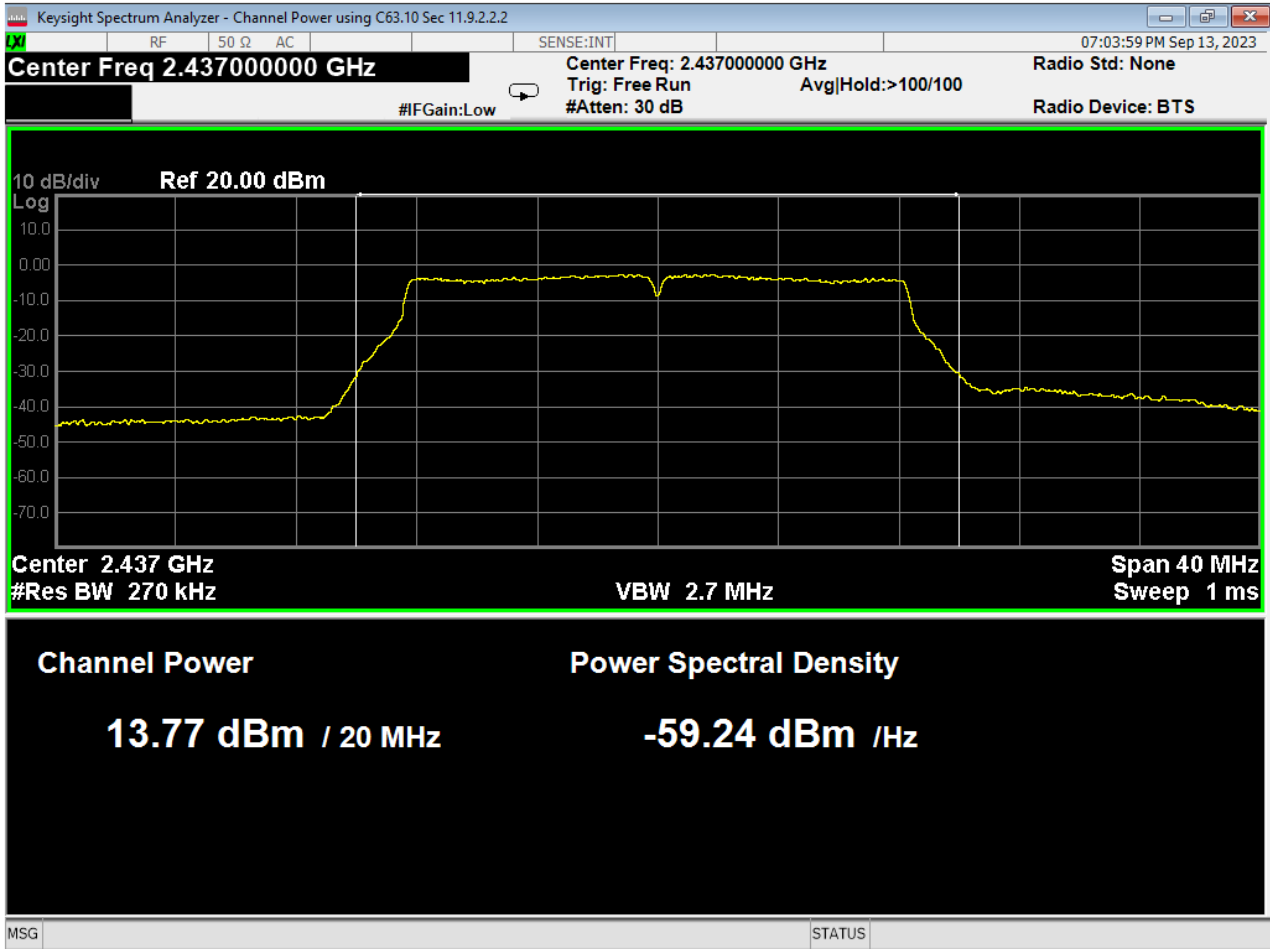

15 Average Power, Mid, Wifi G, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

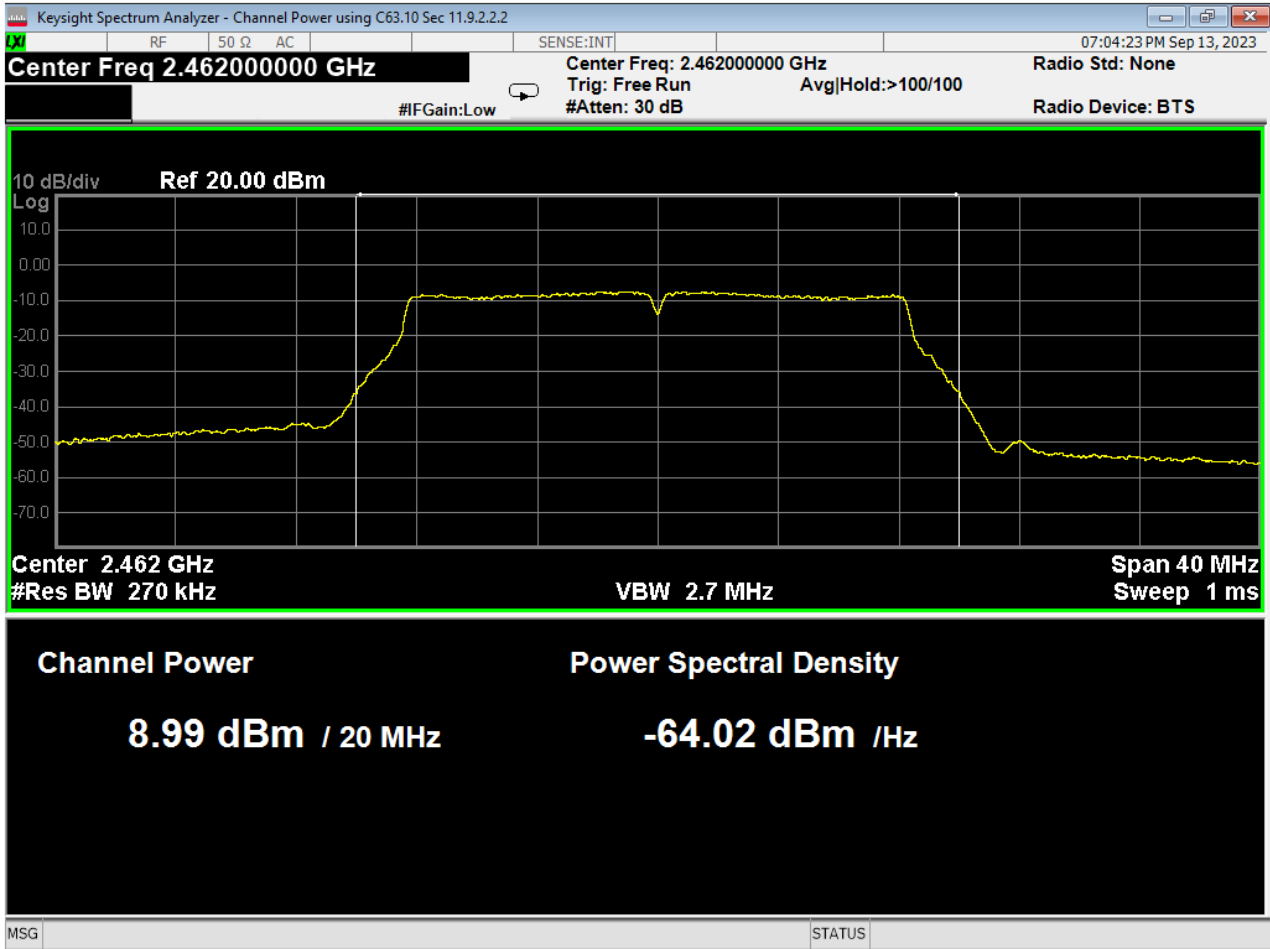

16 Average Power, High, Wifi G, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

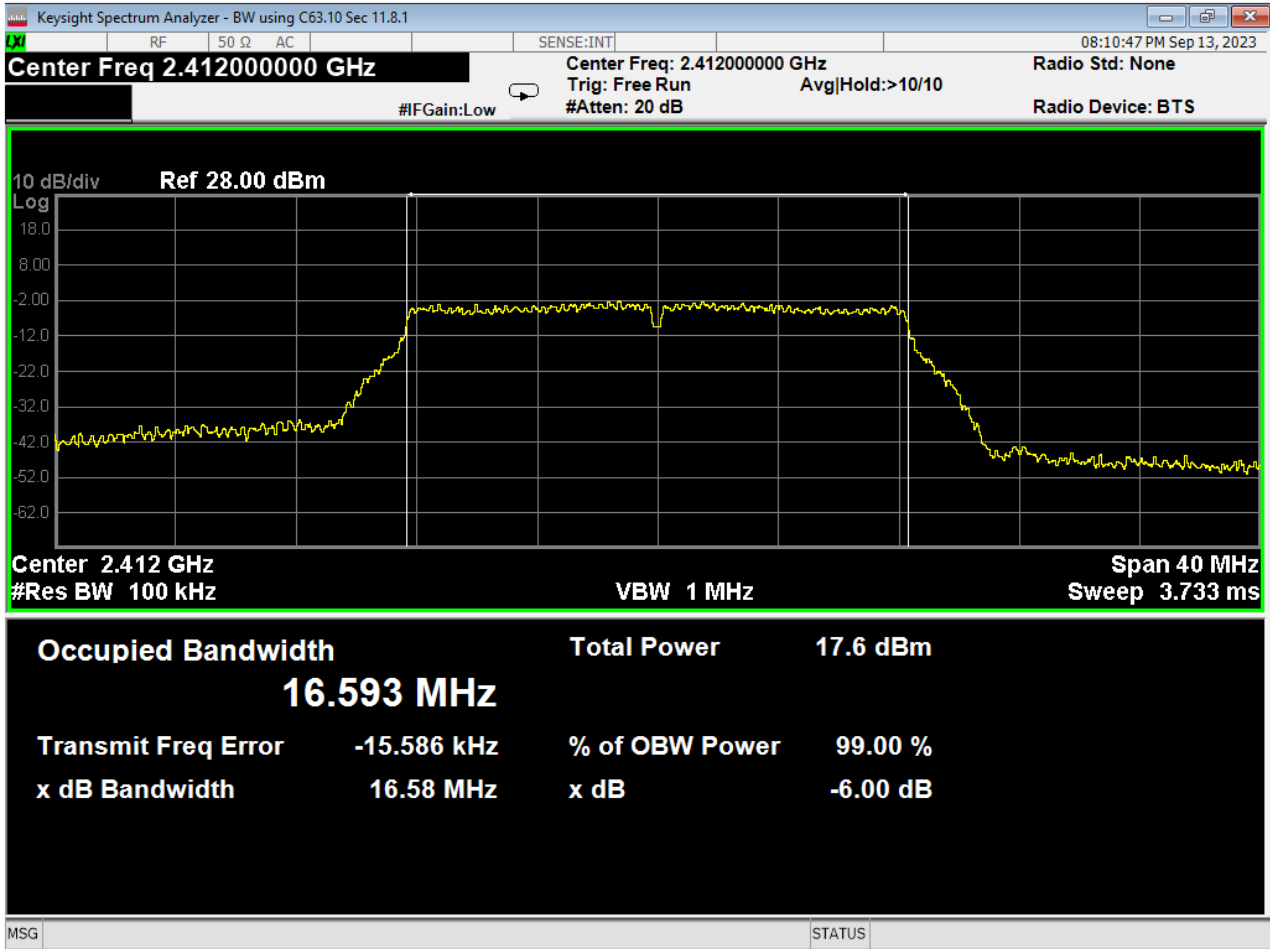

17 6dB Bandwidth, Low, Wifi G, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

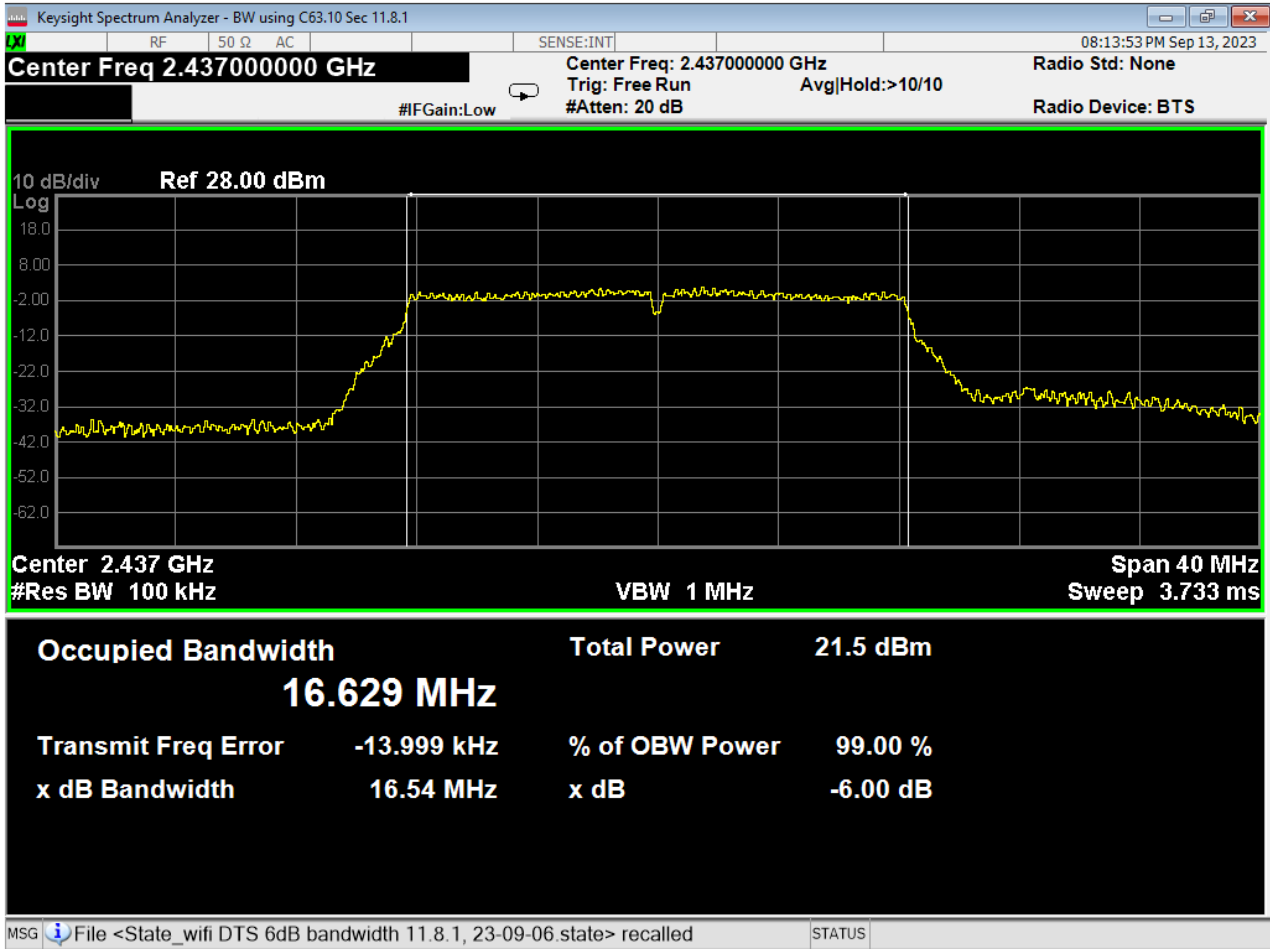


18 6dB Bandwidth, Mid, Wifi G, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

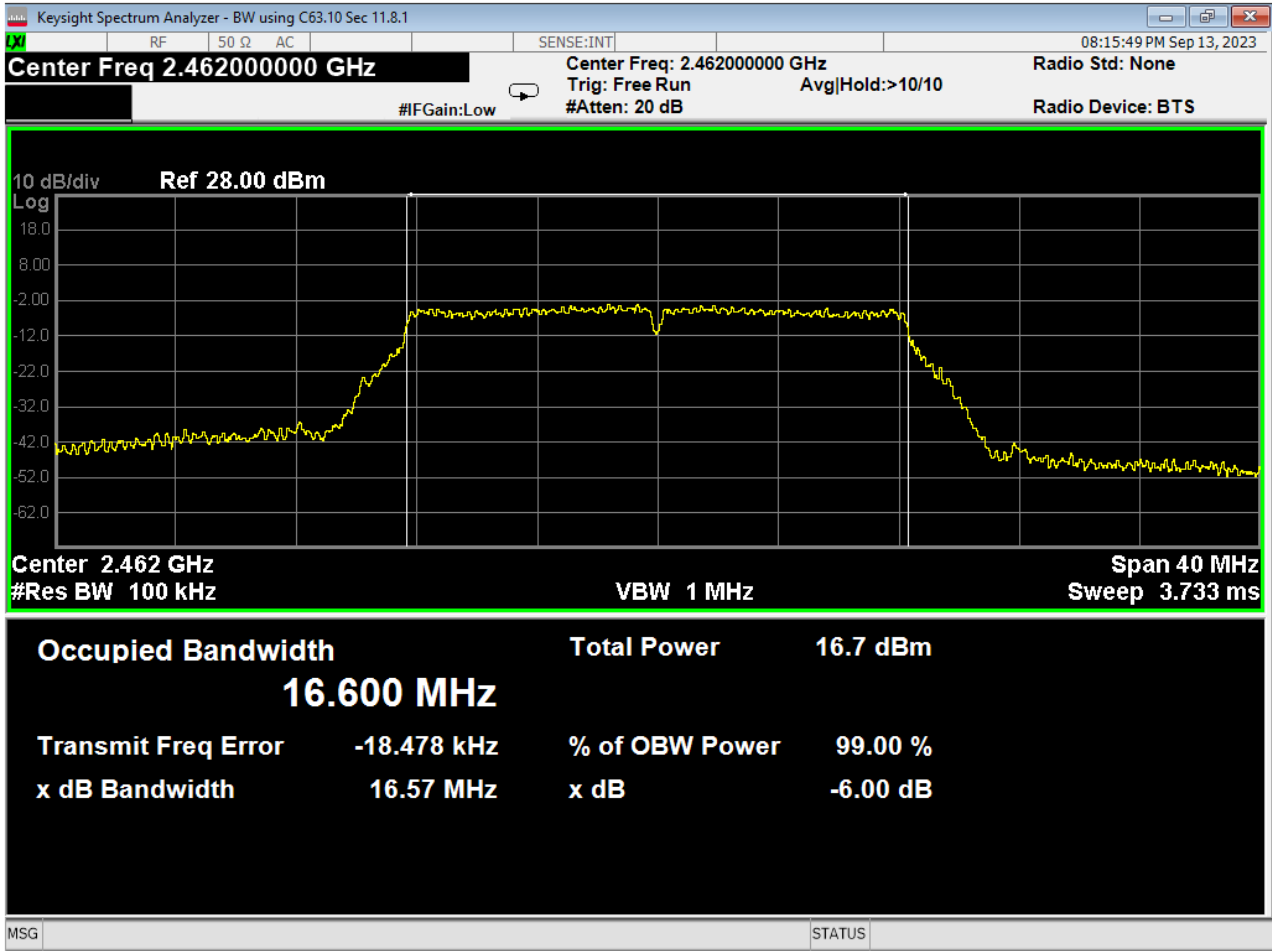


19 6dB Bandwidth, High, Wifi G, Low Data Rate

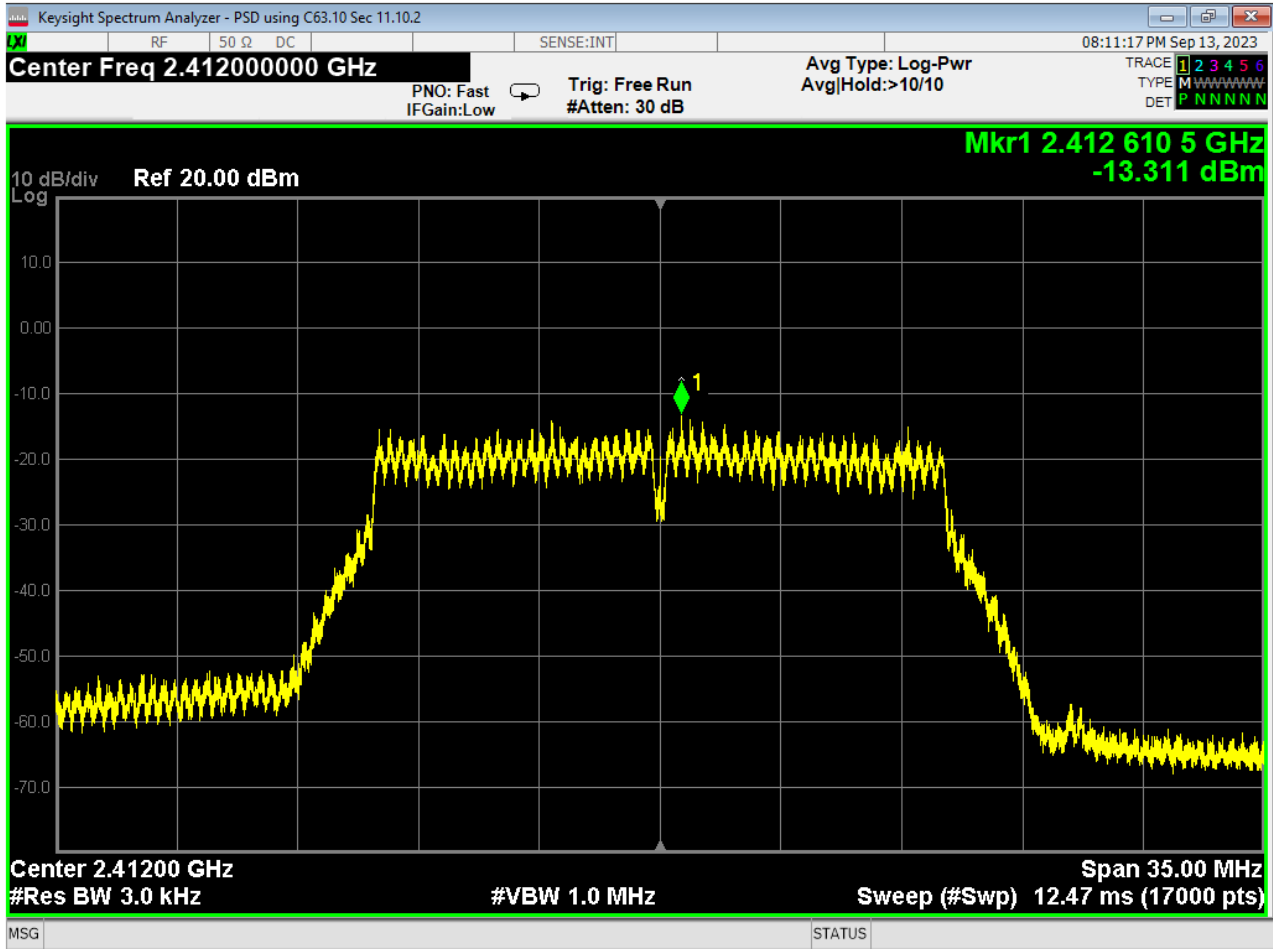


20 PSD, Low, Wifi G, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

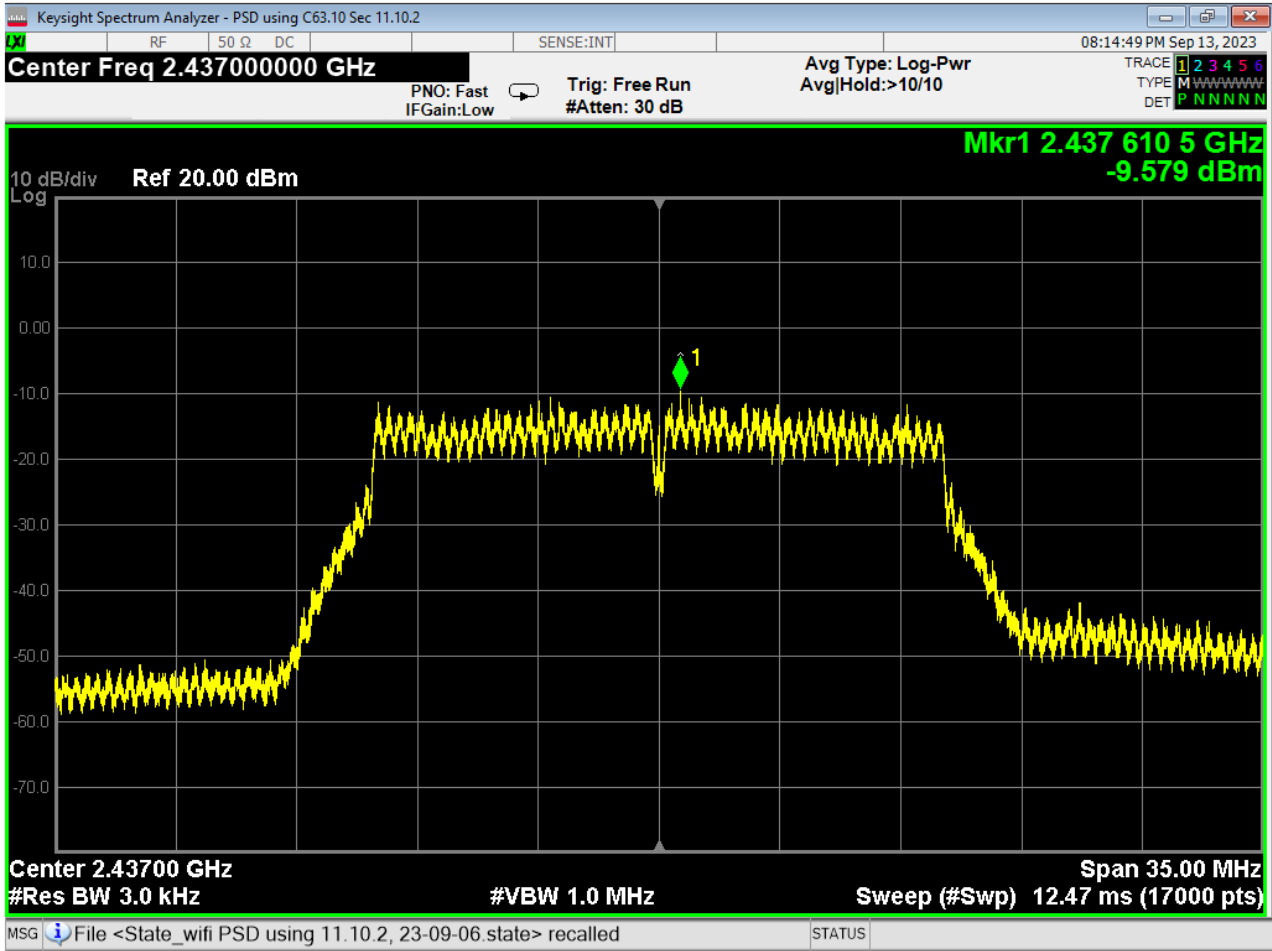


21 PSD, Mid, Wifi G, Low Data Rate

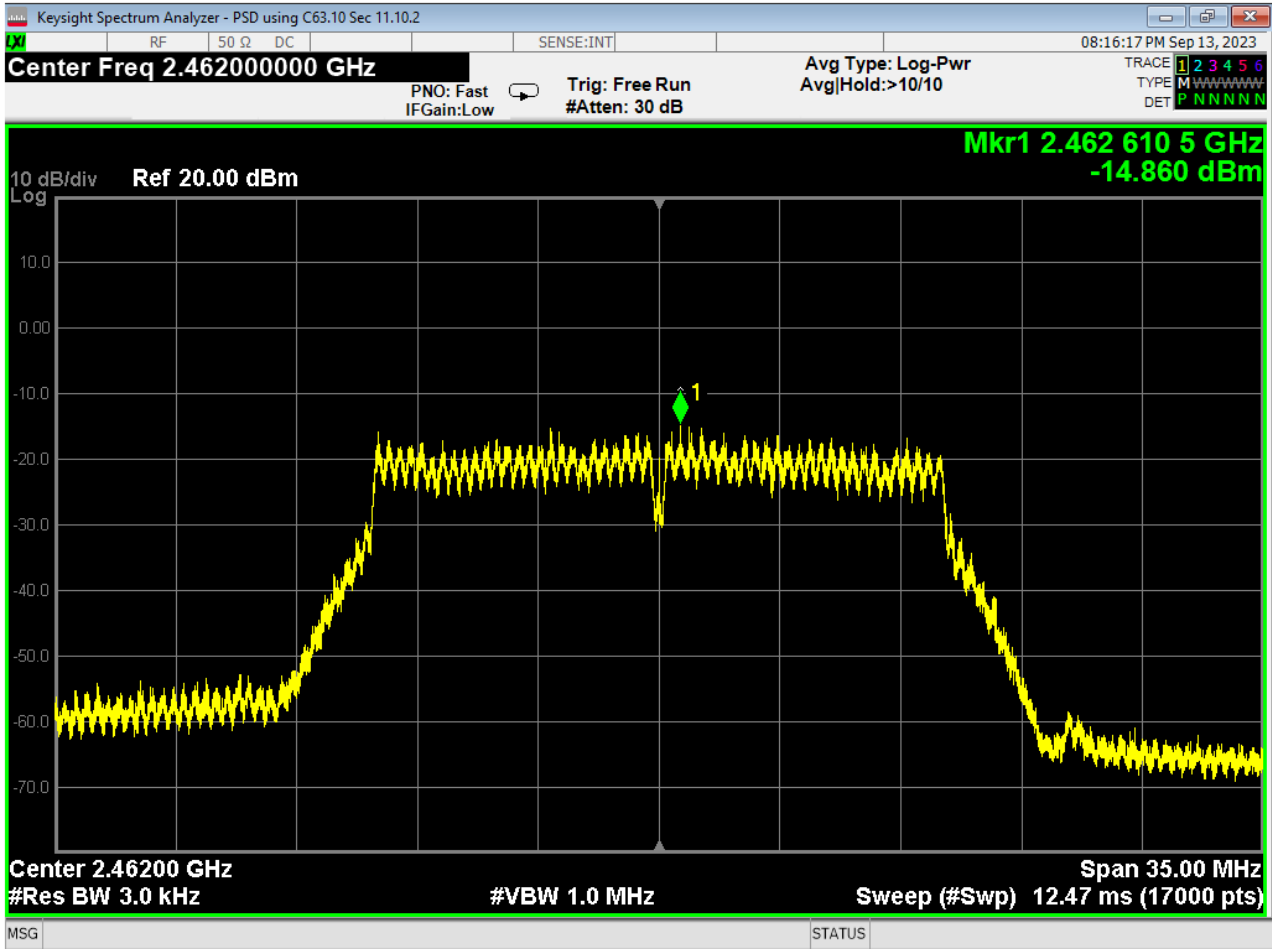


22 PSD, High, Wifi G, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

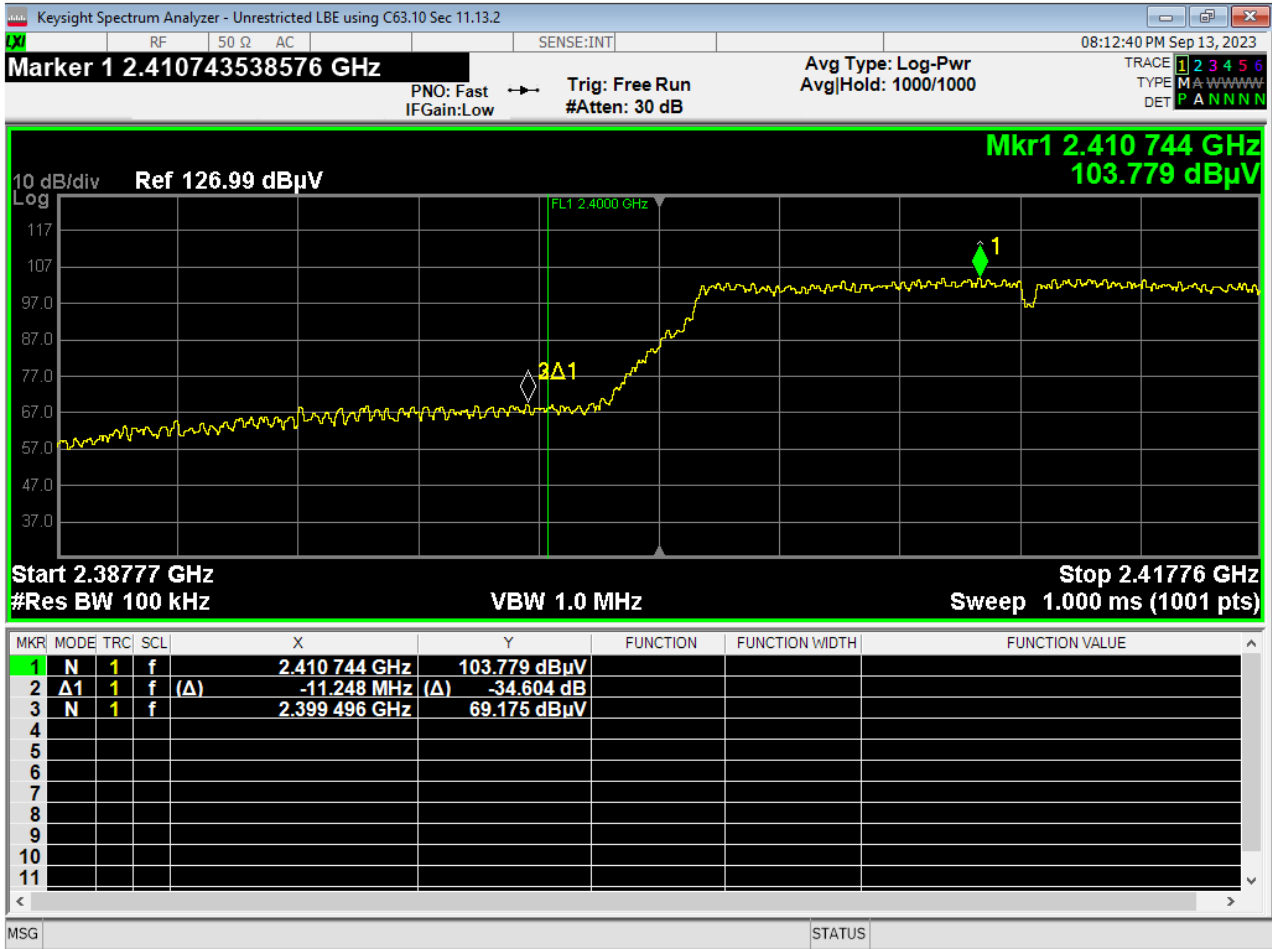

23 Lower Bandedge, Unrestricted, Wifi G, Low Data Rate

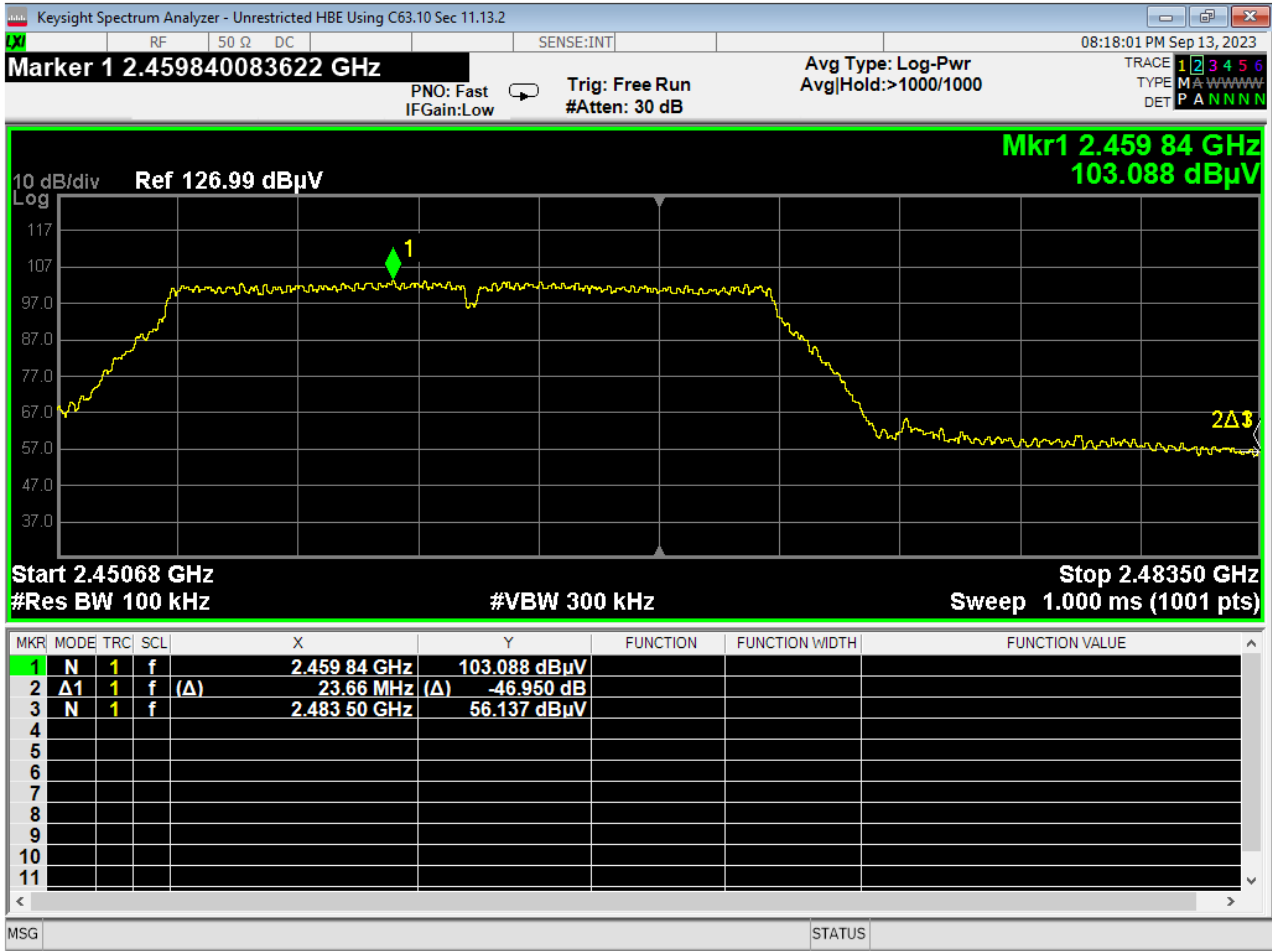

24 Higher Bandedge, Unrestricted, Wifi G, Low Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

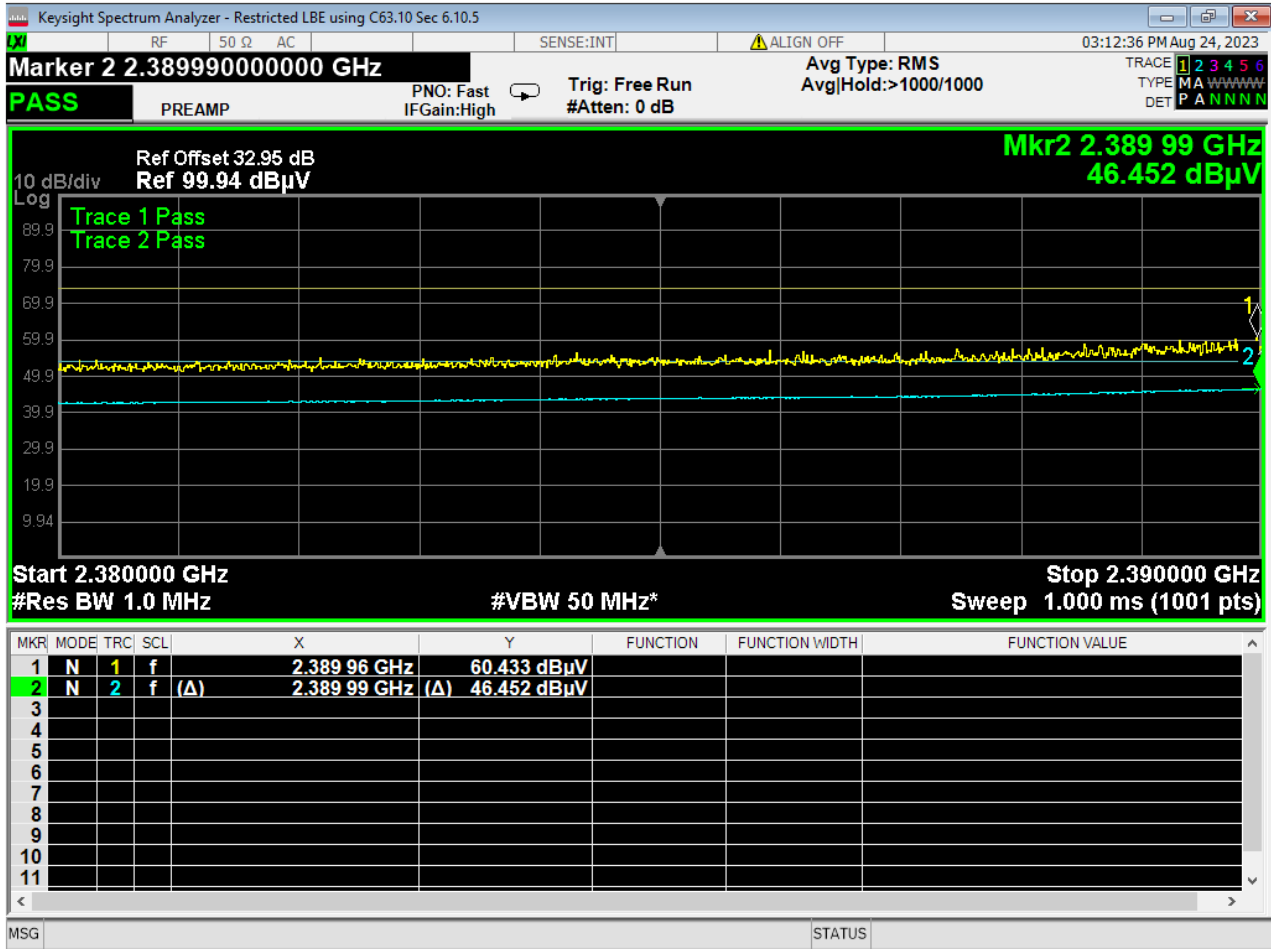

25 Lower Bandedge, Restricted, Wifi G, Low Data Rate



Report Number:


R20230808-00-E10A

Rev


A

Prepared for:

Garmin International, Inc.

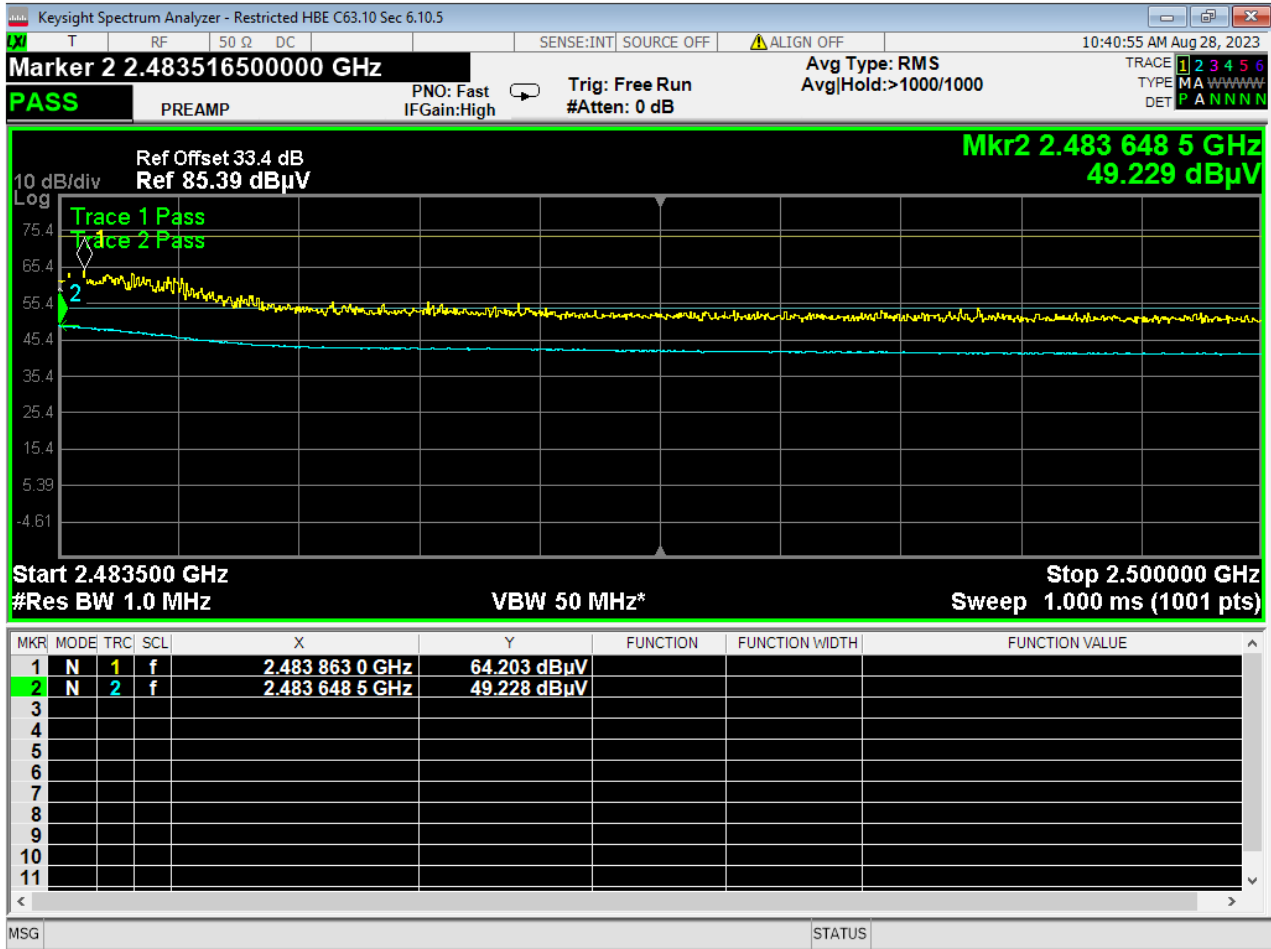


26 Higher Bandedge, Restricted, Wifi G, Low Data Rate

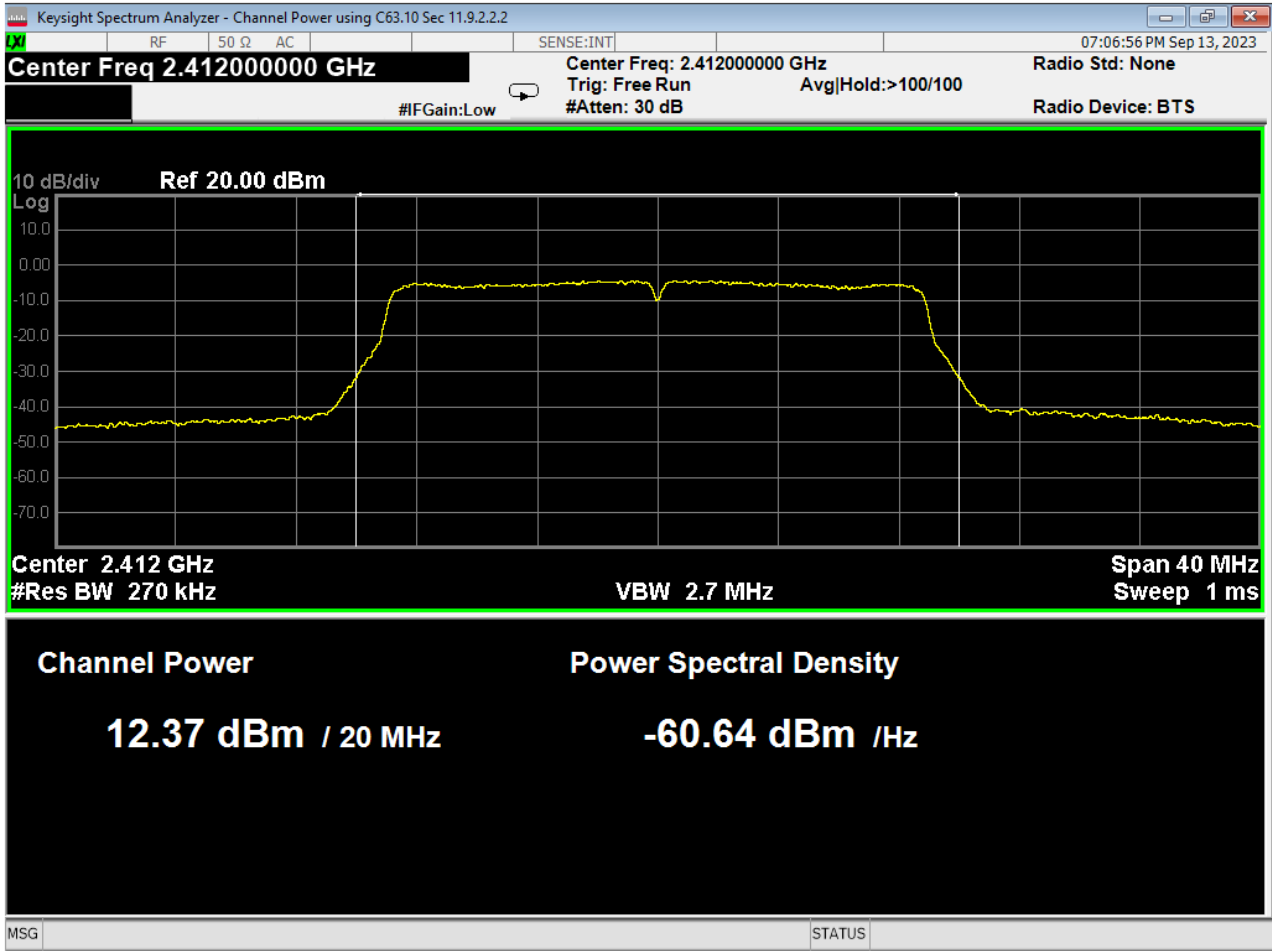

27 Average Power, Low, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

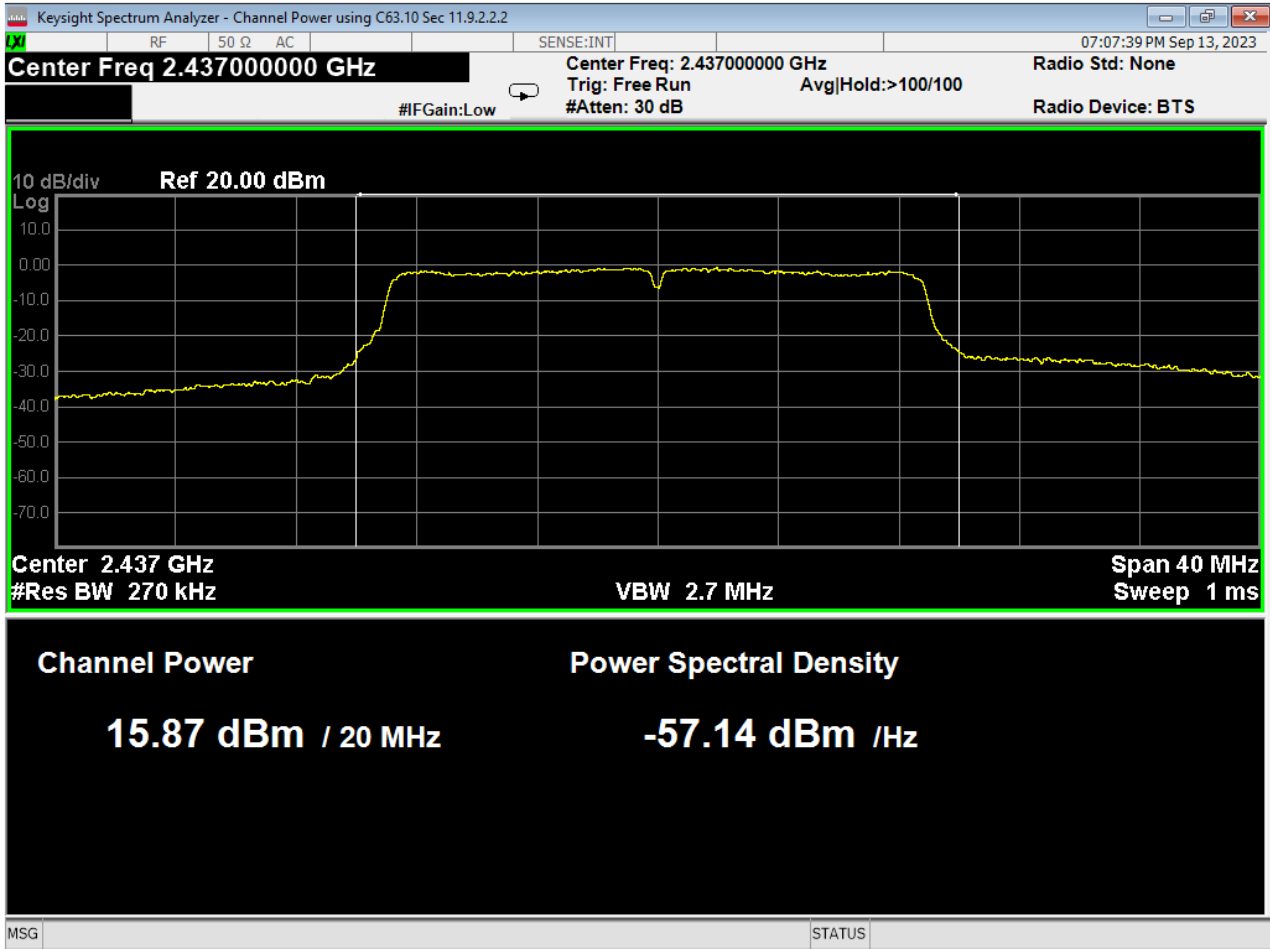

28 Average Power, Mid, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

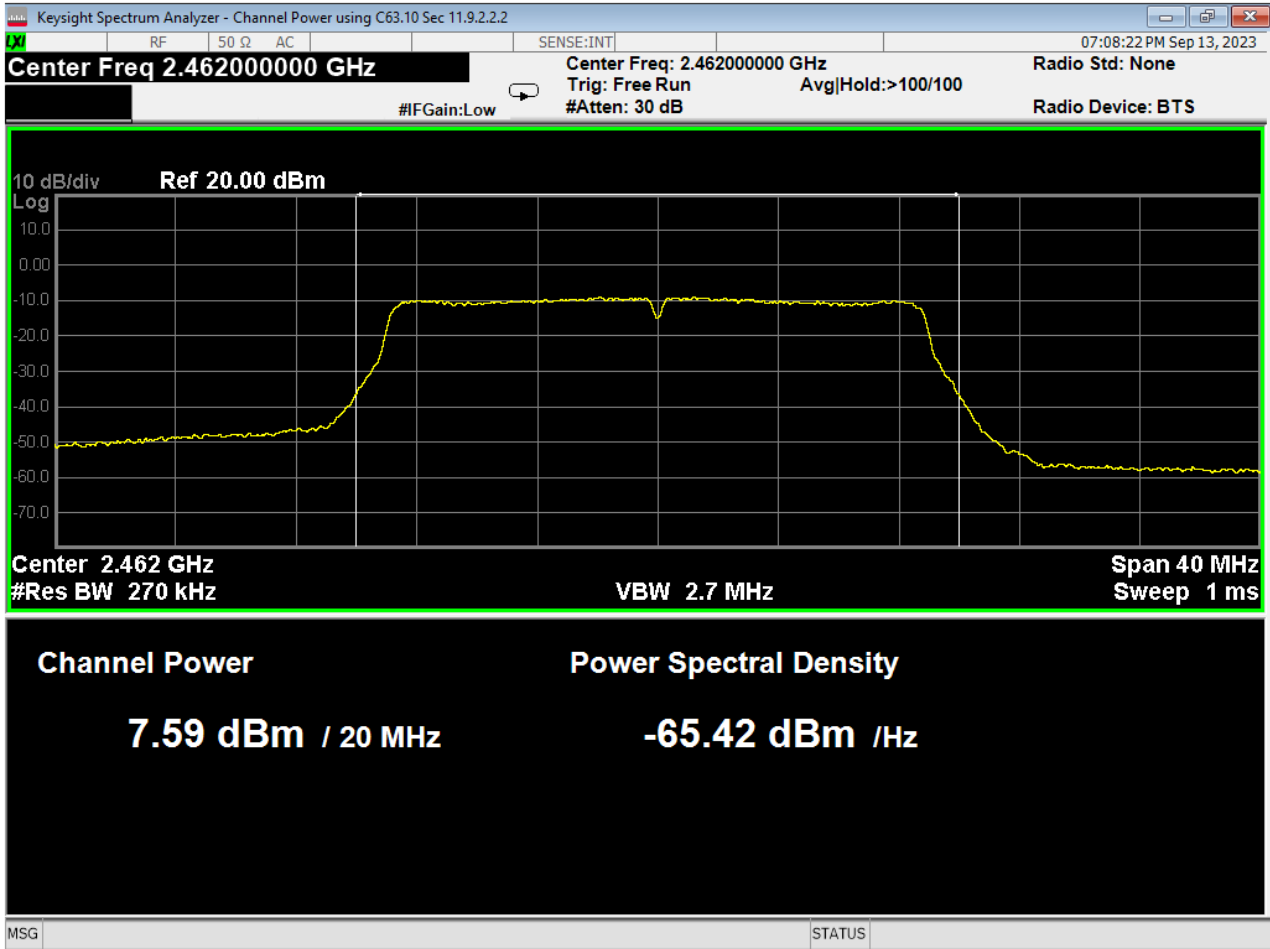

29 Average Power, High, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

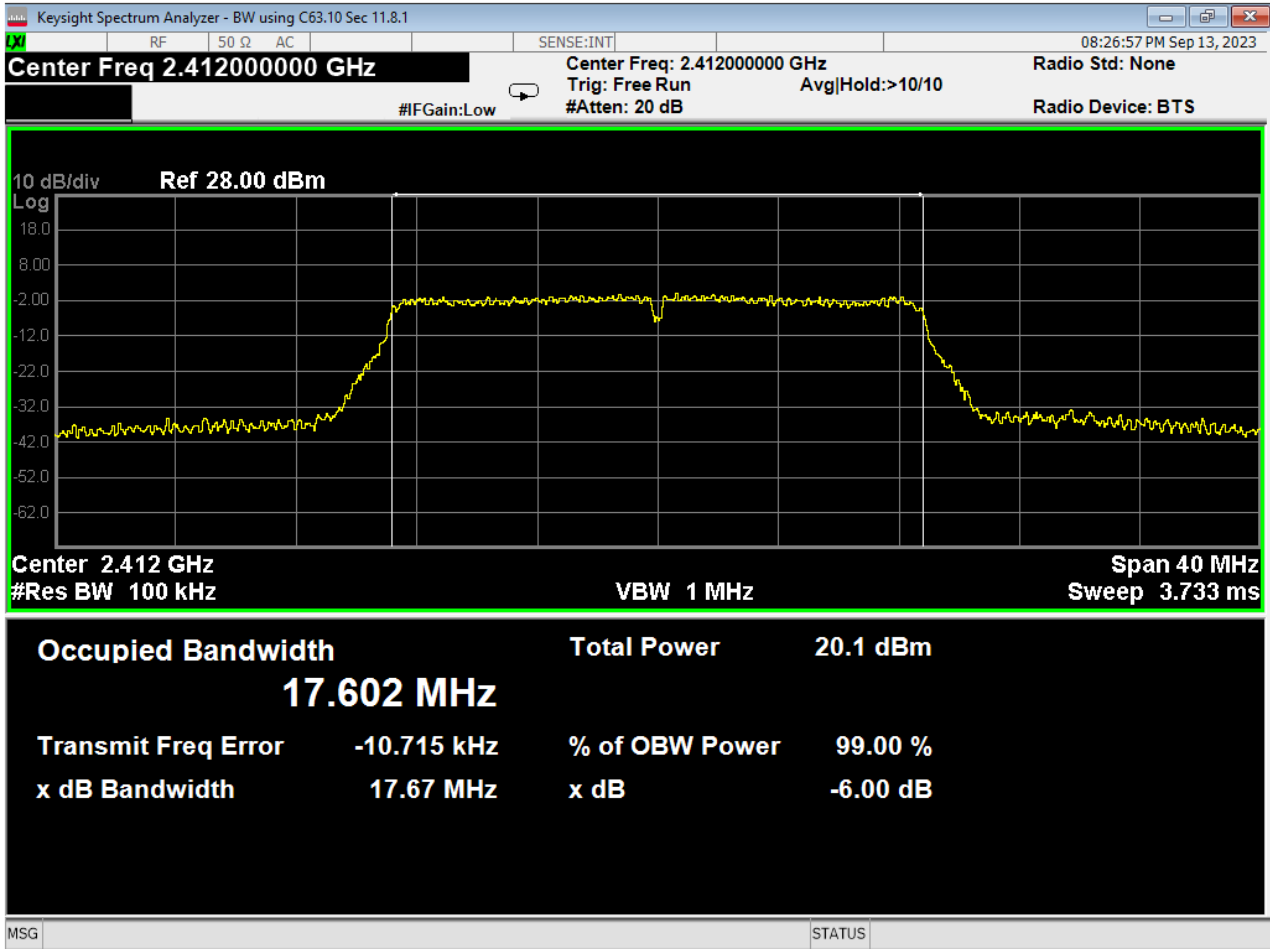

30 6dB Bandwidth, Low, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

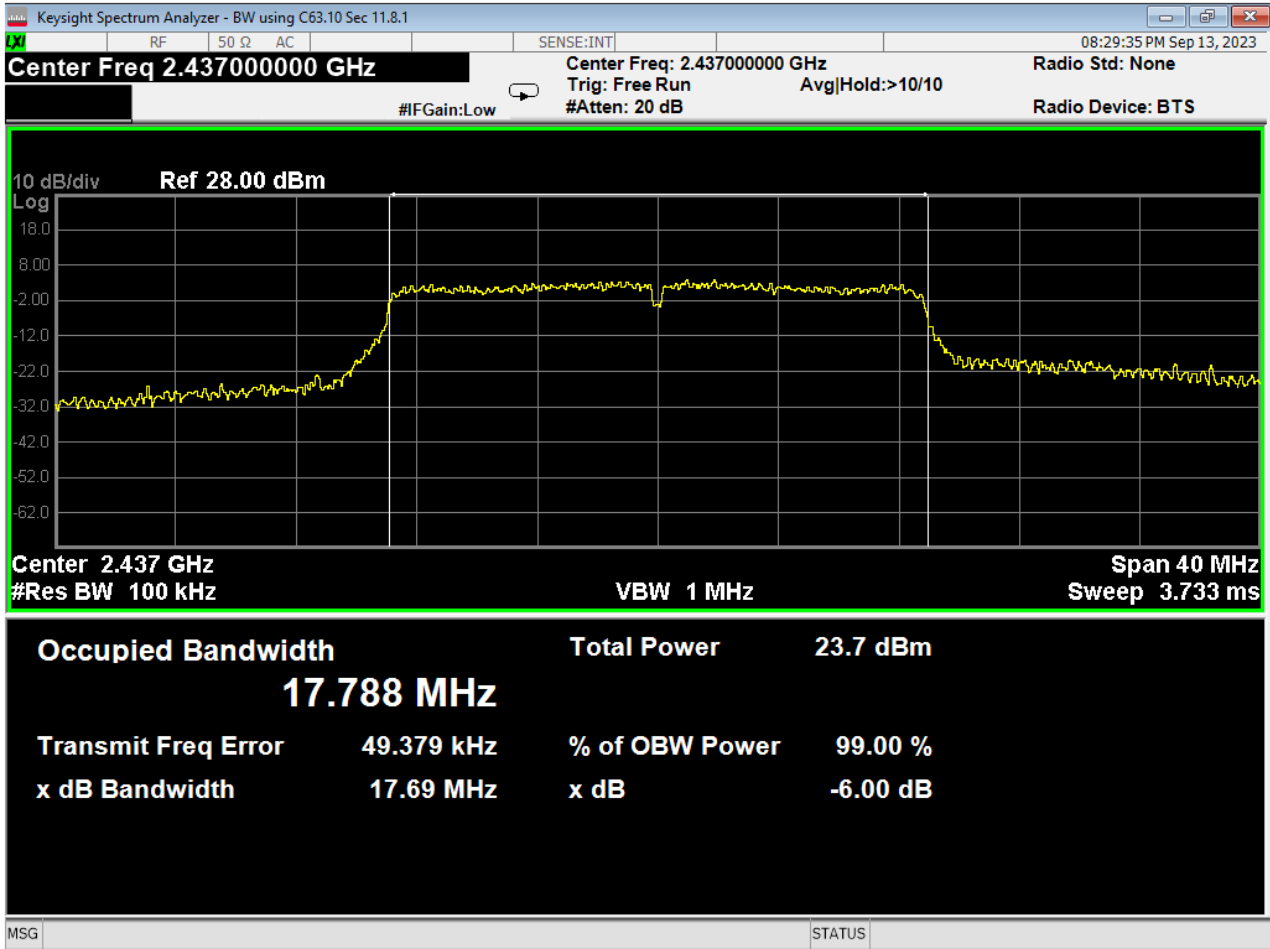


31 6dB Bandwidth, Mid, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

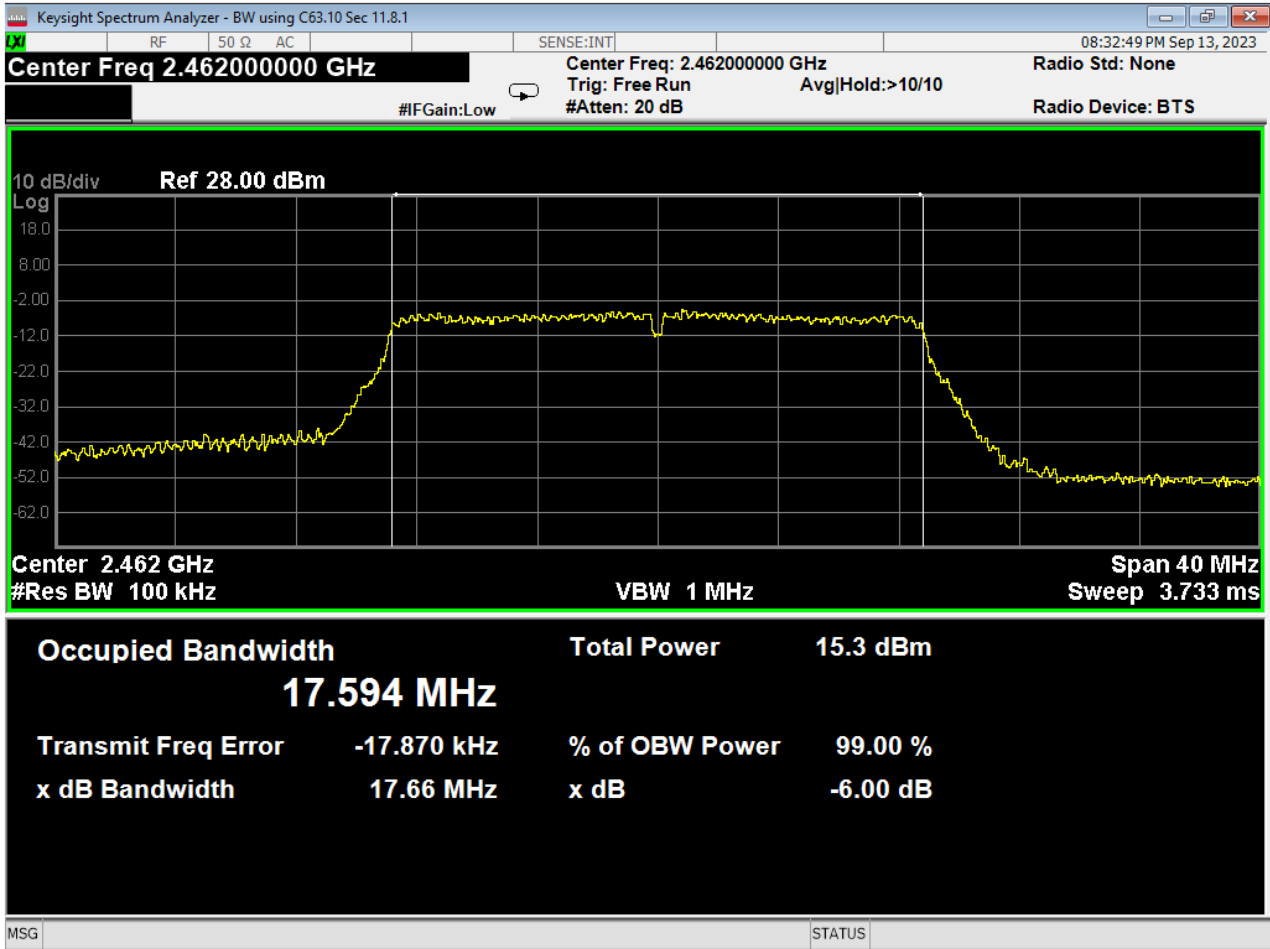


32 6dB Bandwidth, High, Wifi N, Low Data Rate

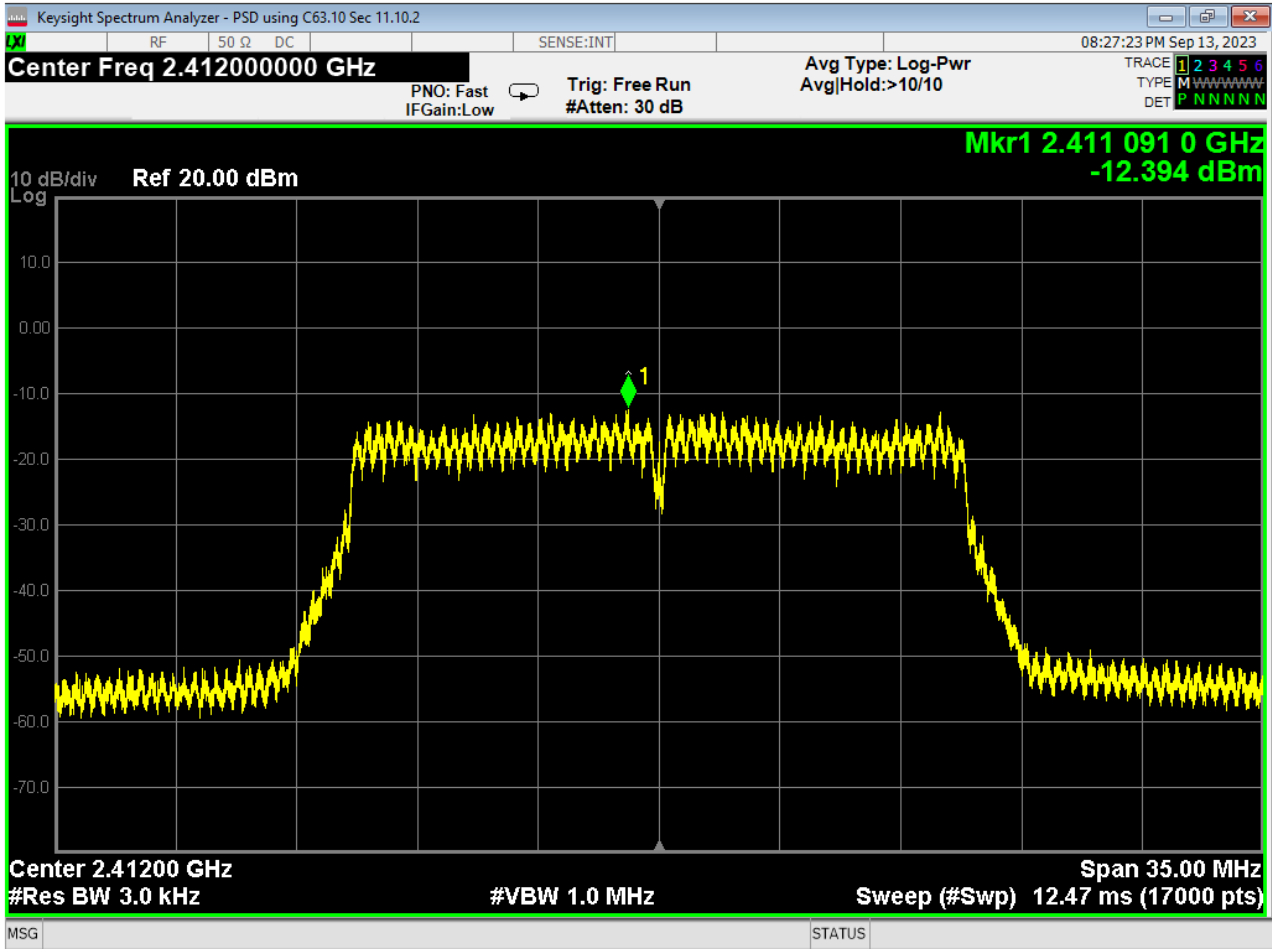

33 PSD, Low, Wifi N, Low Data Rate

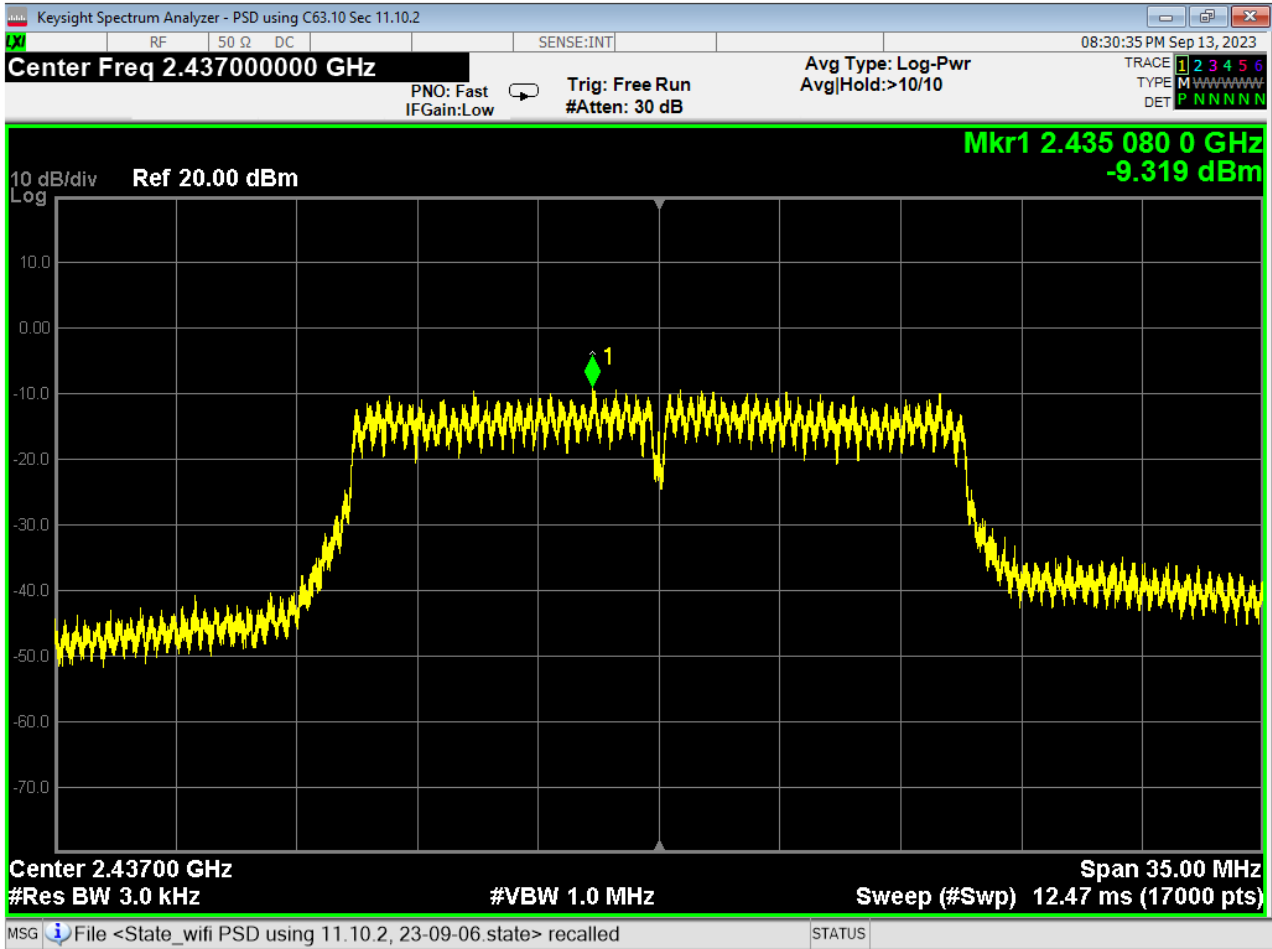

34 PSD, Mid, Wifi N, Low Data Rate

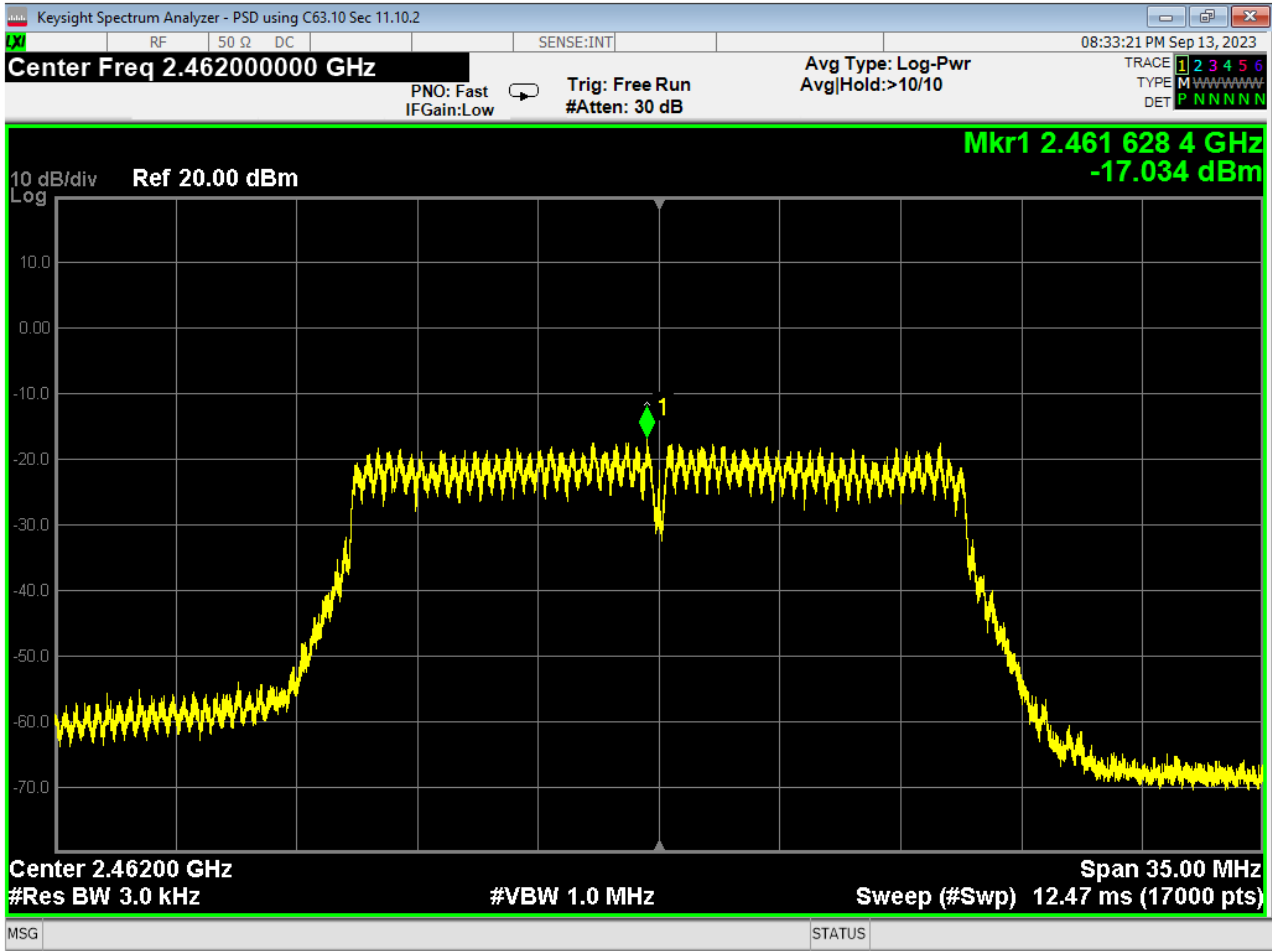

35 PSD, High, Wifi N, Low Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:


Garmin International, Inc.

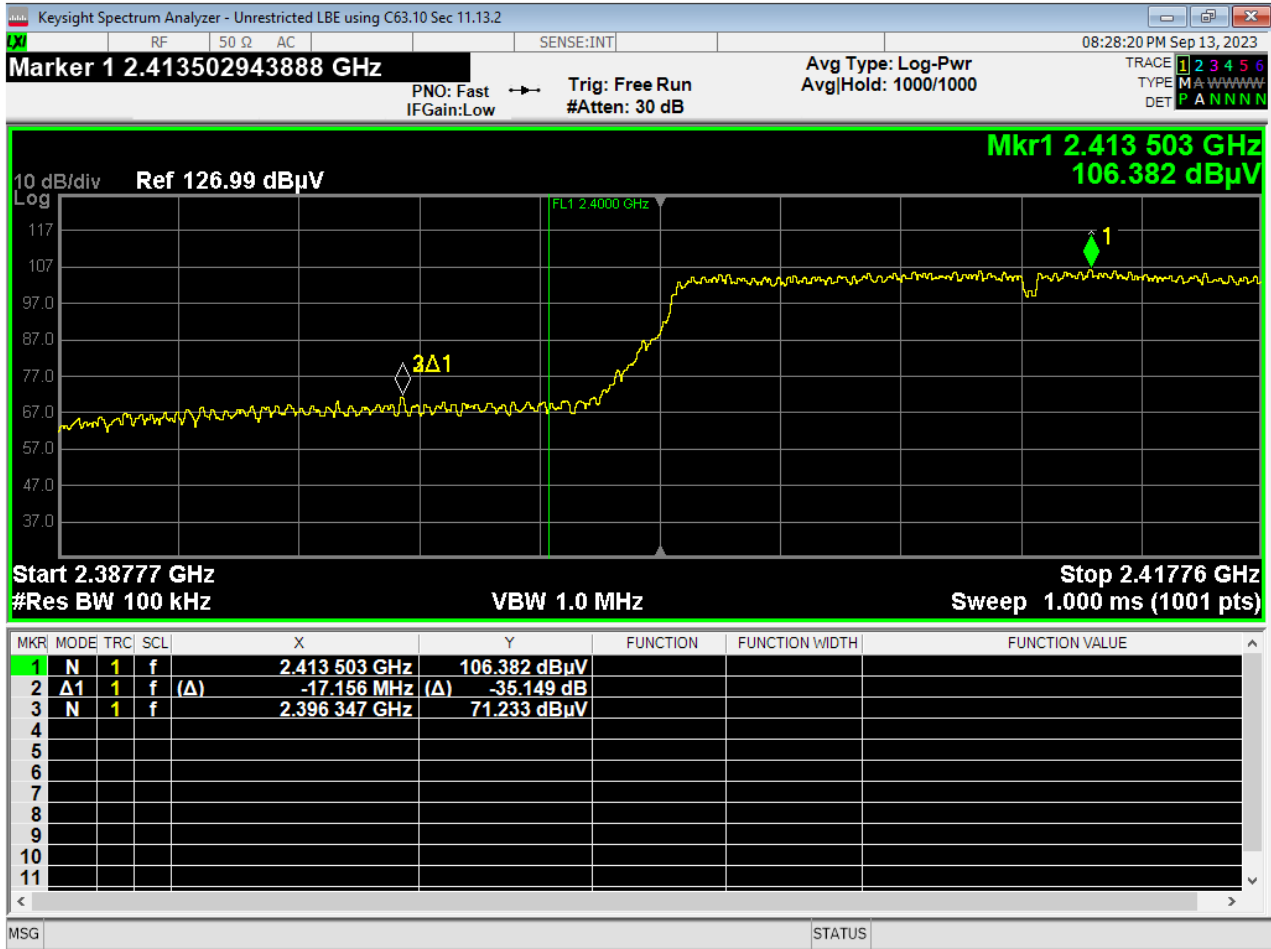

36 Lower Bandedge, Unrestricted, Wifi N, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

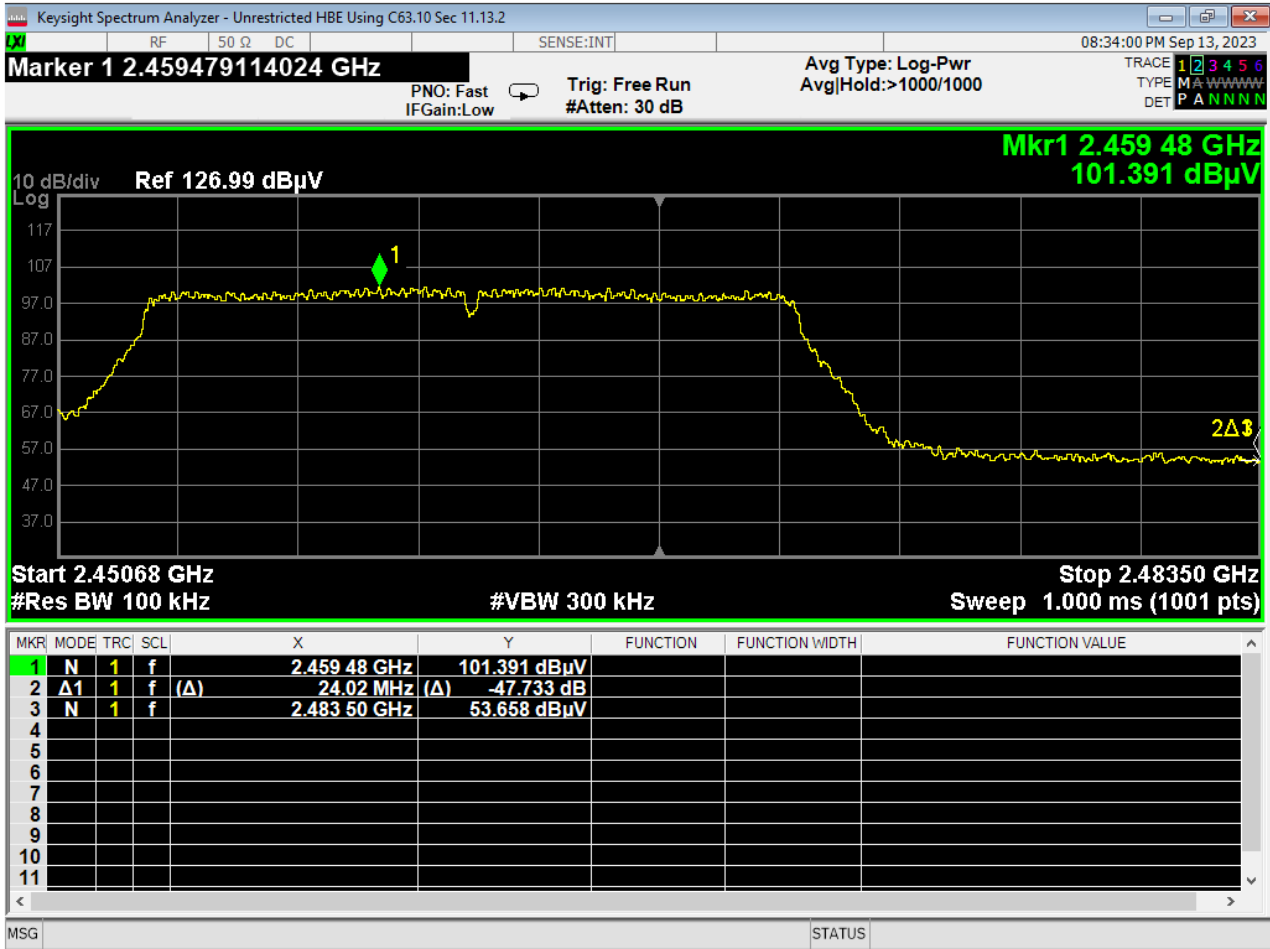

37 Higher Bandedge, Unrestricted, Wifi N, Low Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

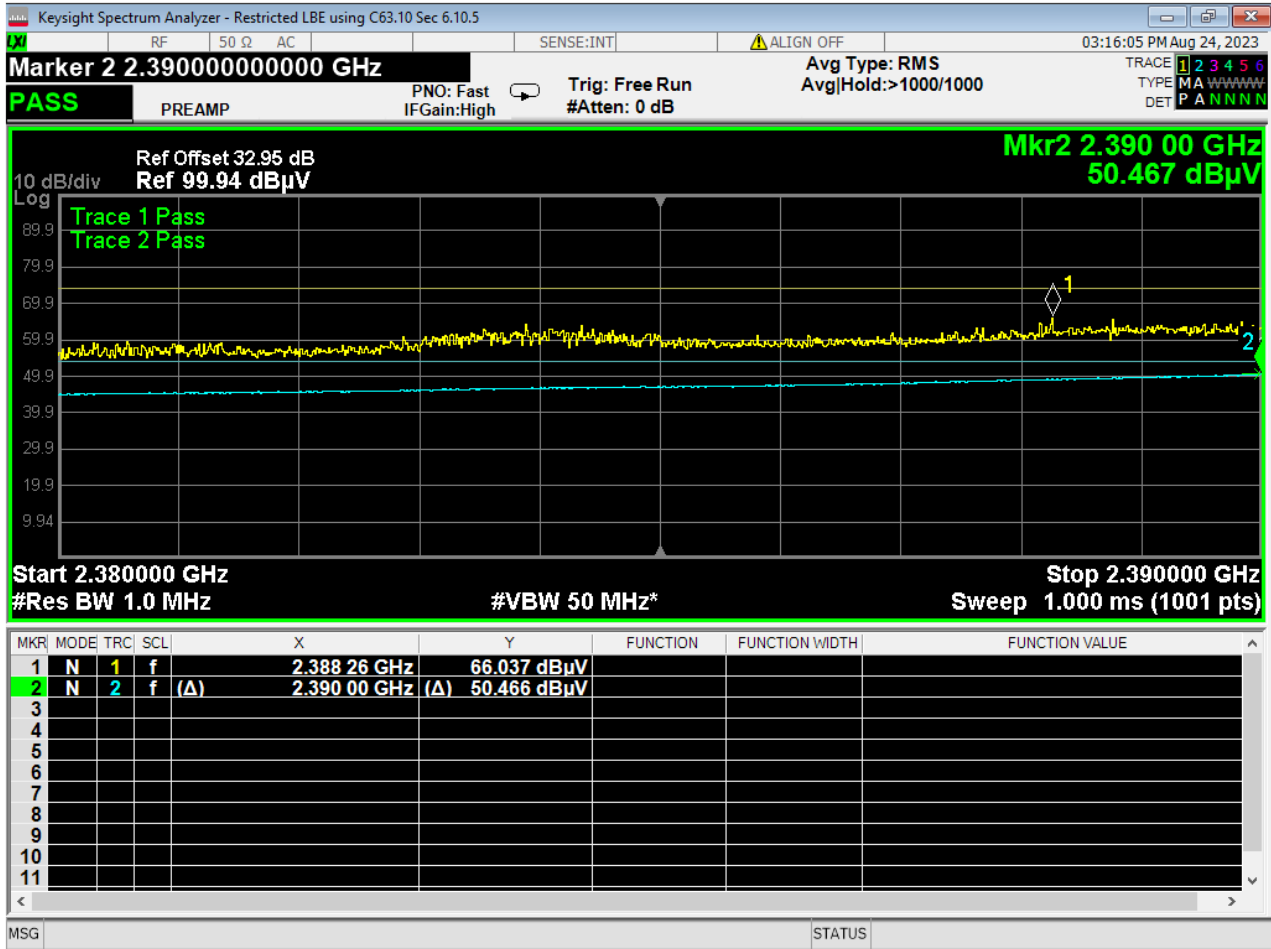

38 Lower Bandedge, Restricted, Wifi N, Low Data Rate



Report Number:


R20230808-00-E10A

Rev


A

Prepared for:


Garmin International, Inc.

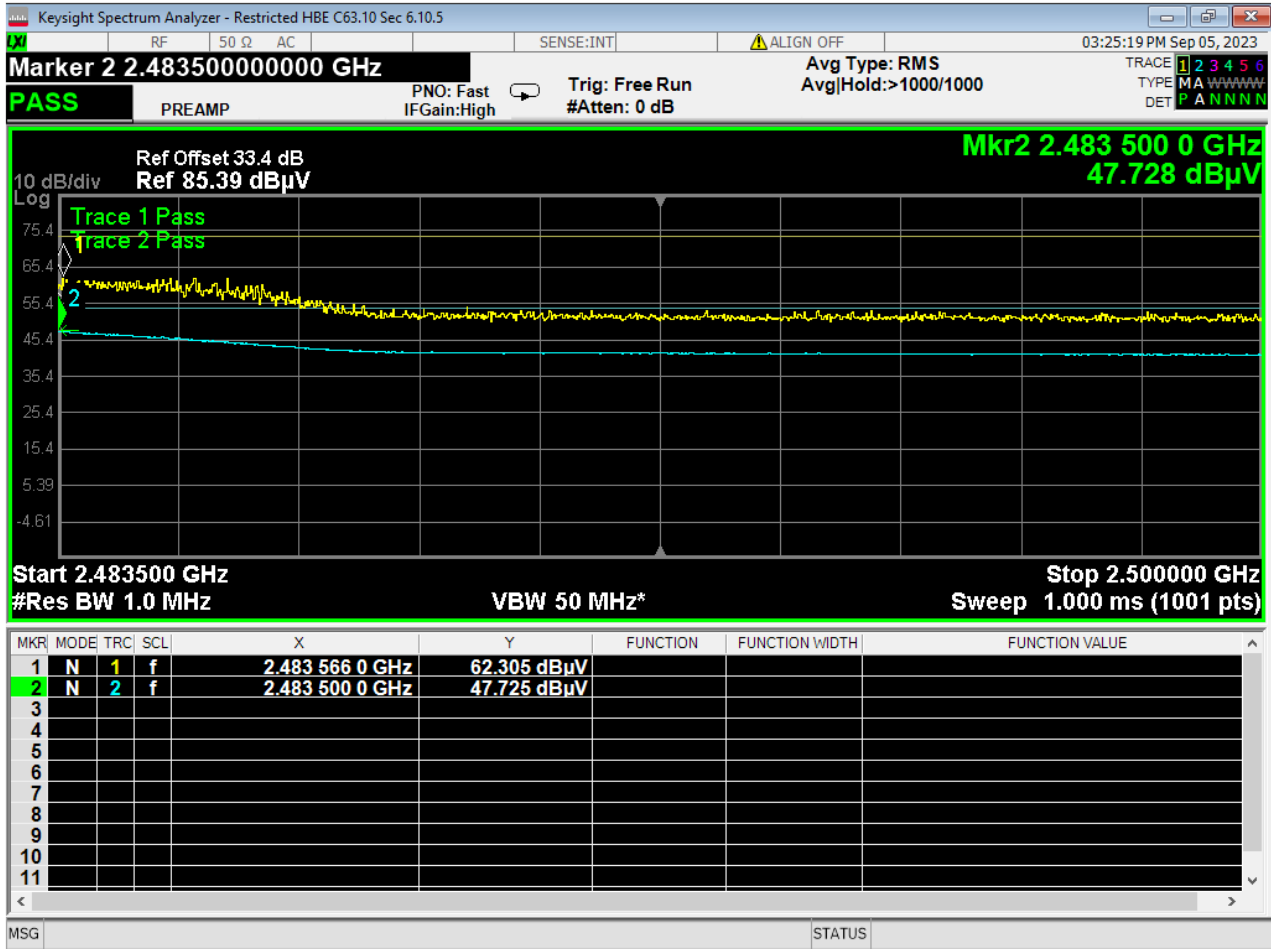


39 Higher Bandedge, Restricted, Wifi N, Low Data Rate

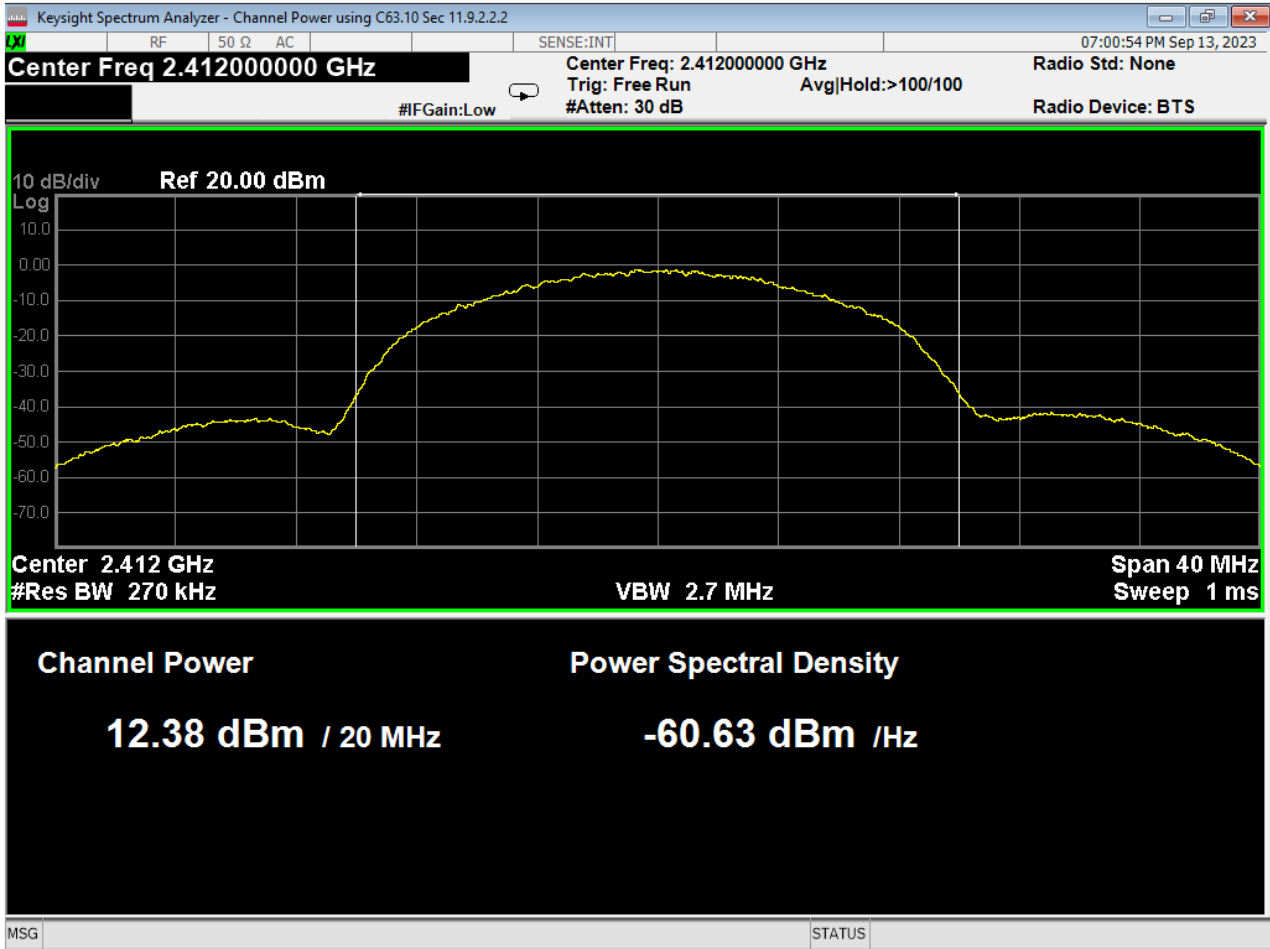

40 Average Power, Low, Wifi B, High Data Rate

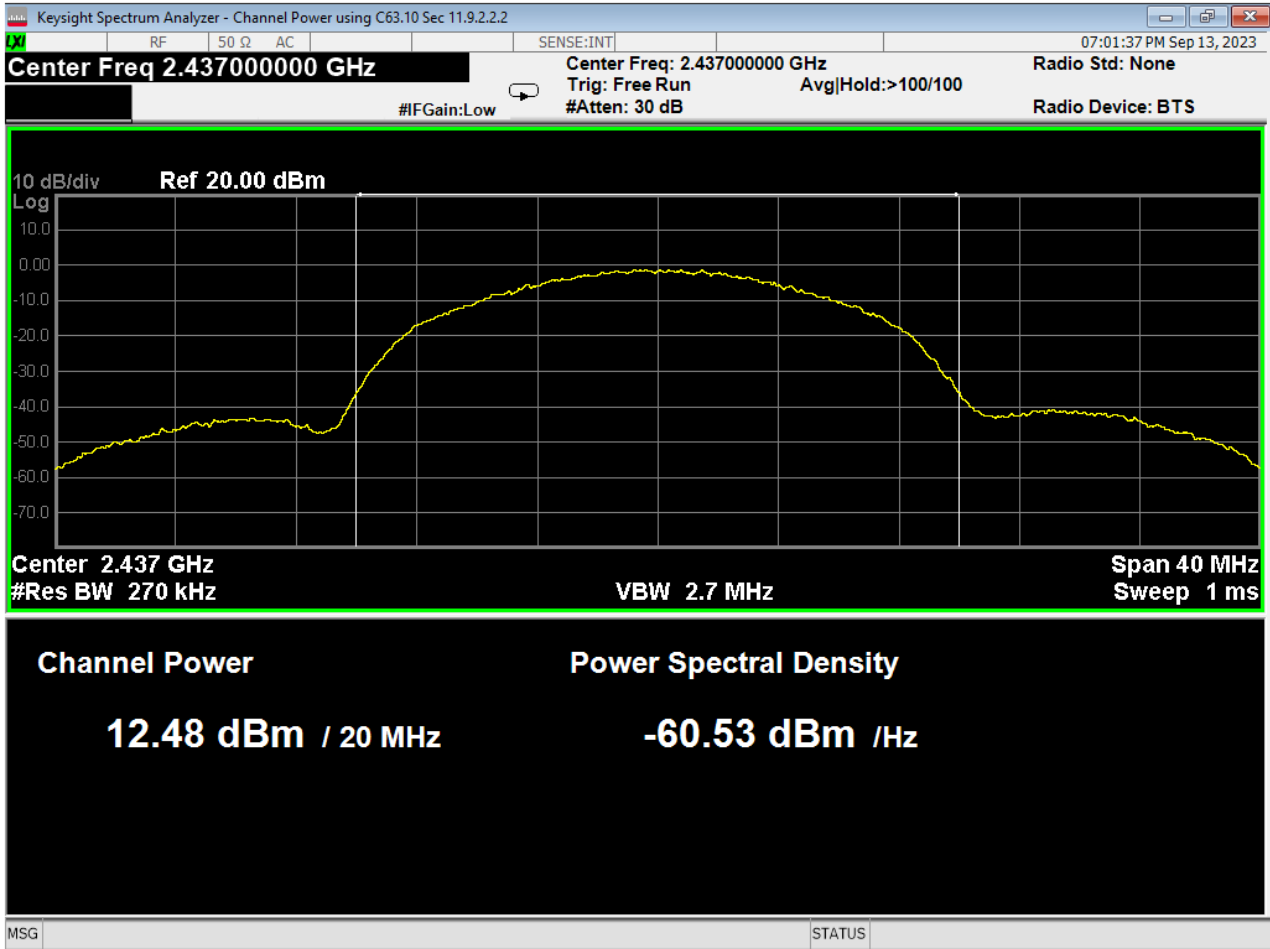


41 Average Power, Mid, Wifi B, High Data Rate

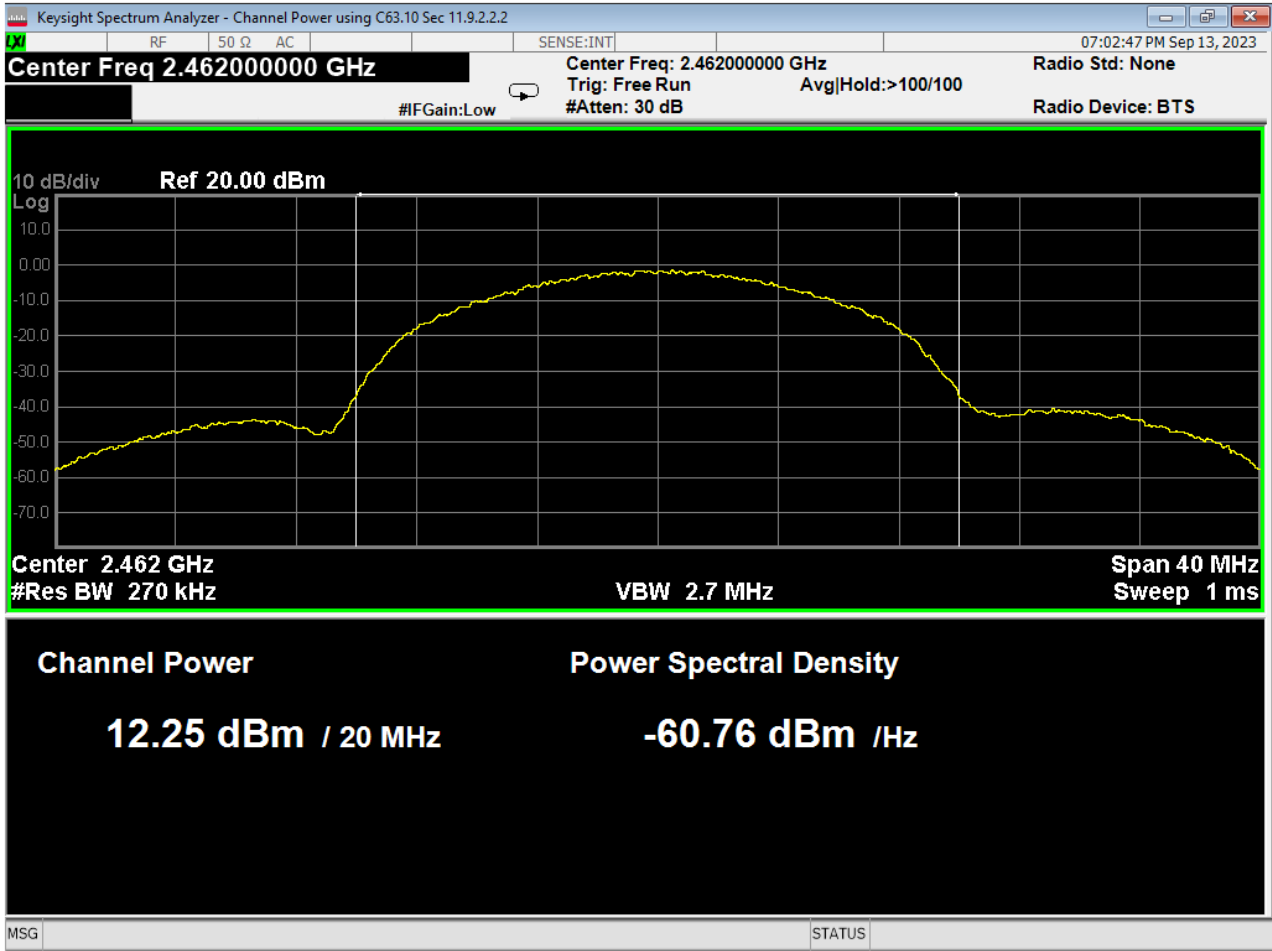

42 Average Power, High, Wifi B, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

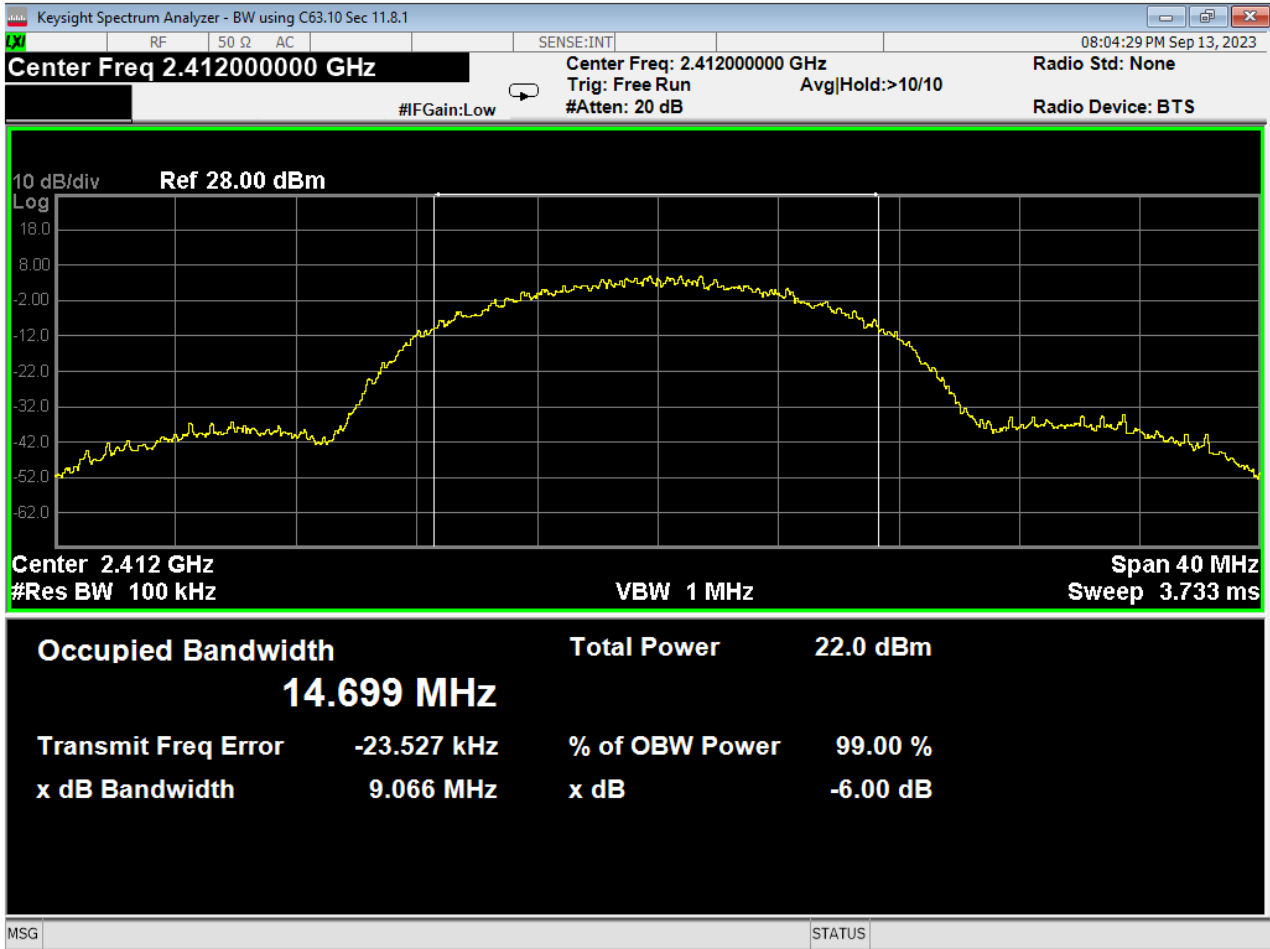

43 6dB Bandwidth, Low, Wifi B, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

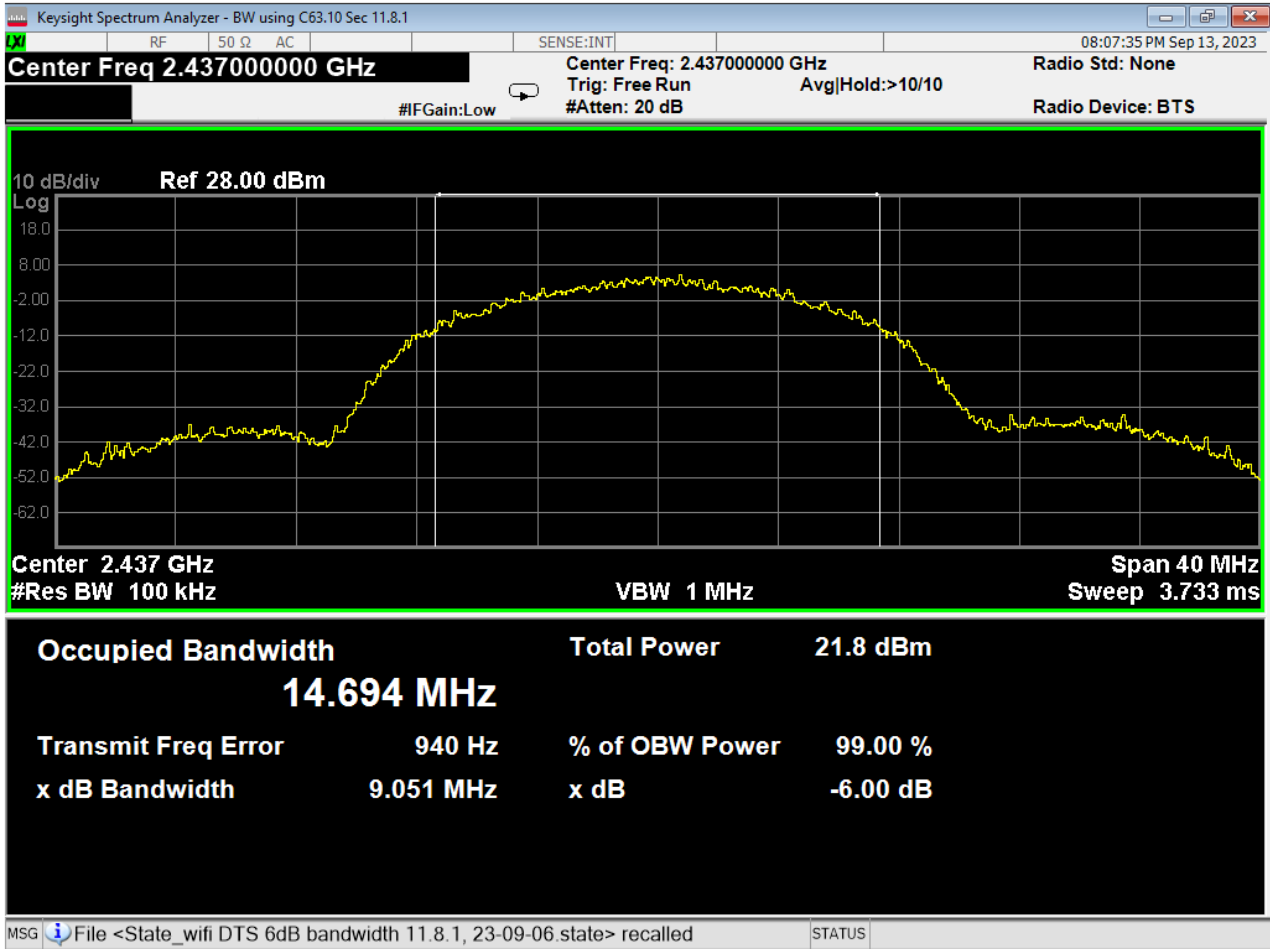


44 6dB Bandwidth, Mid, Wifi B, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

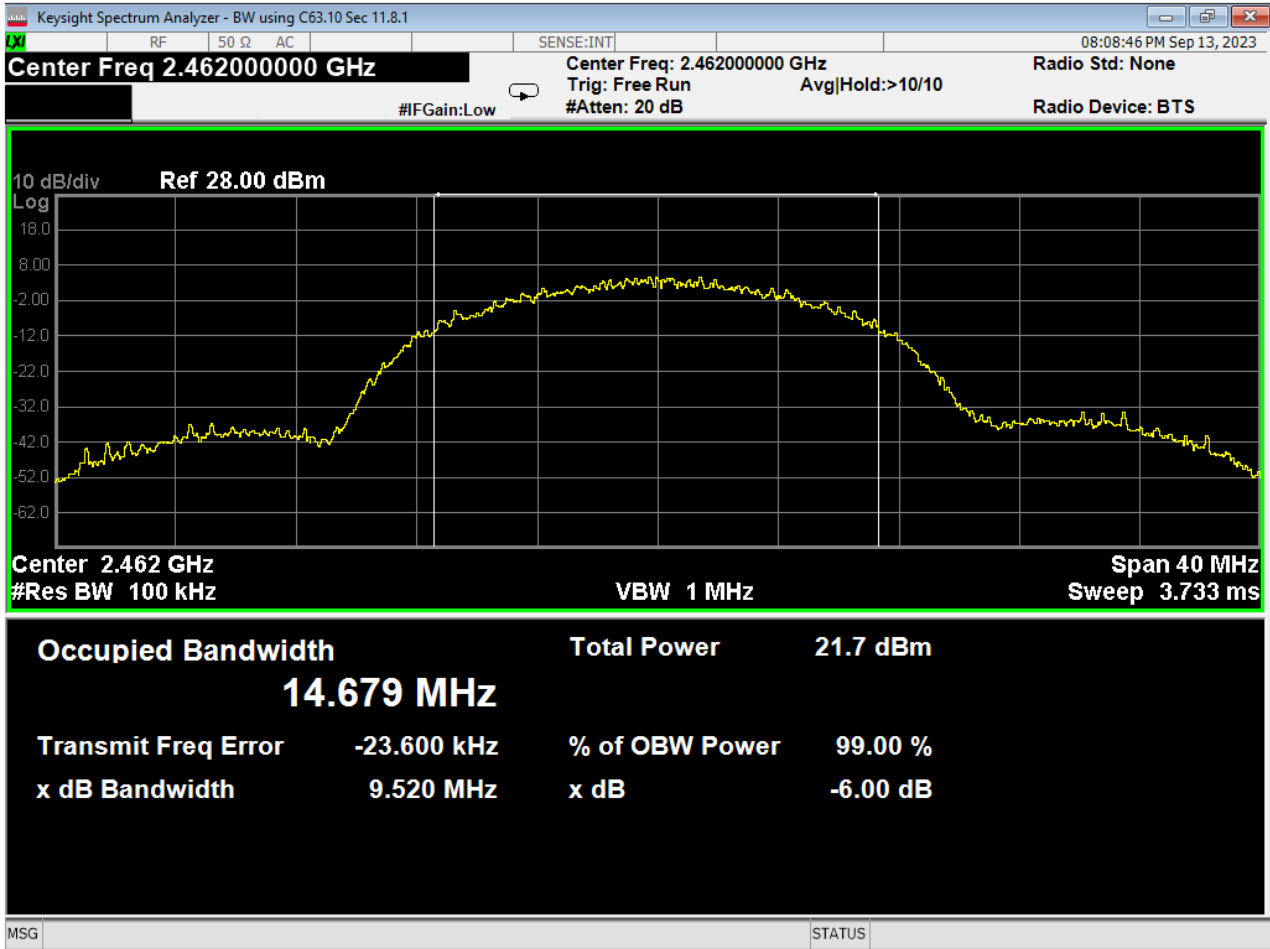


45 6dB Bandwidth, High, Wifi B, High Data Rate

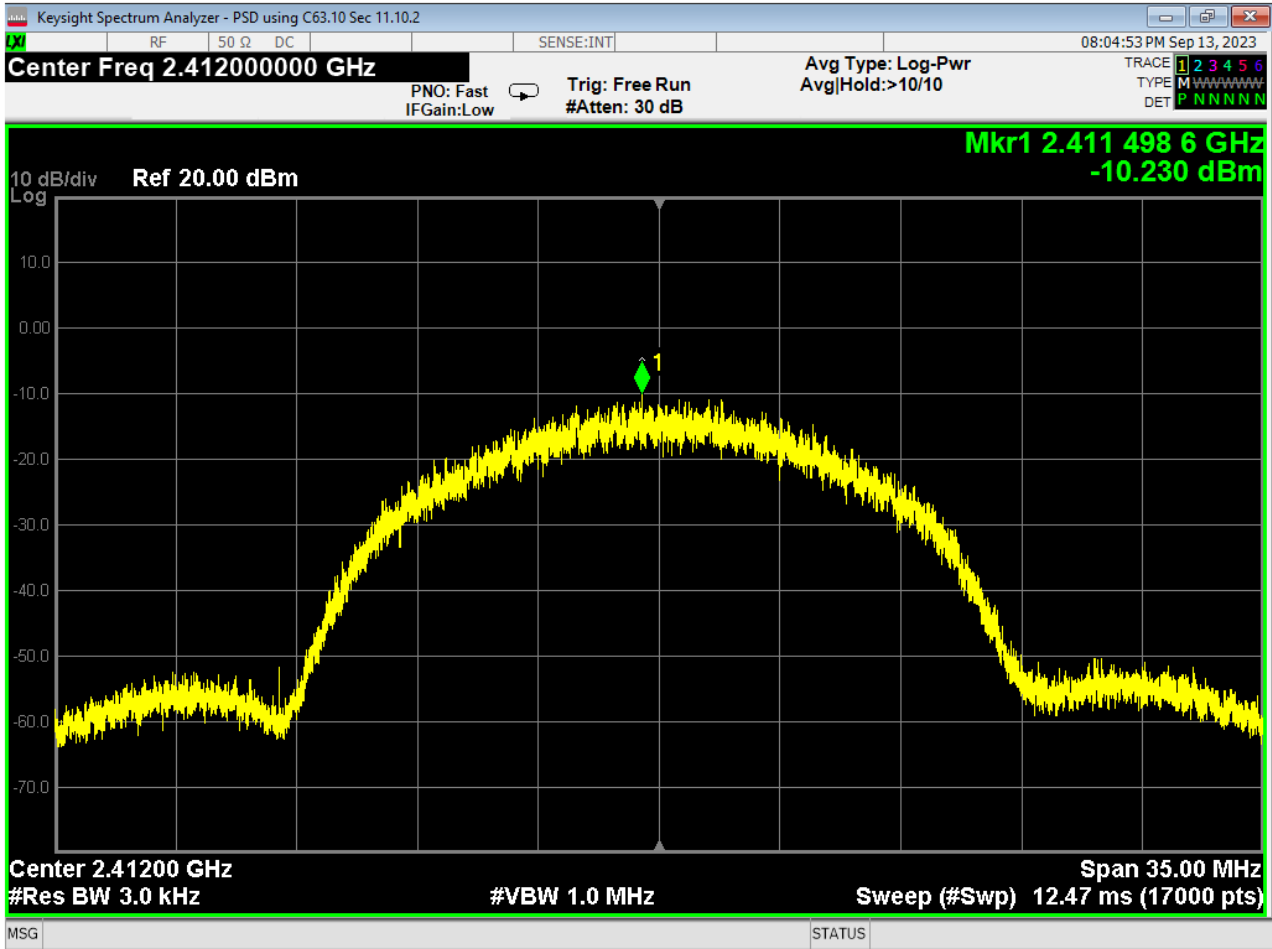

46 PSD, Low, Wifi B, High Data Rate

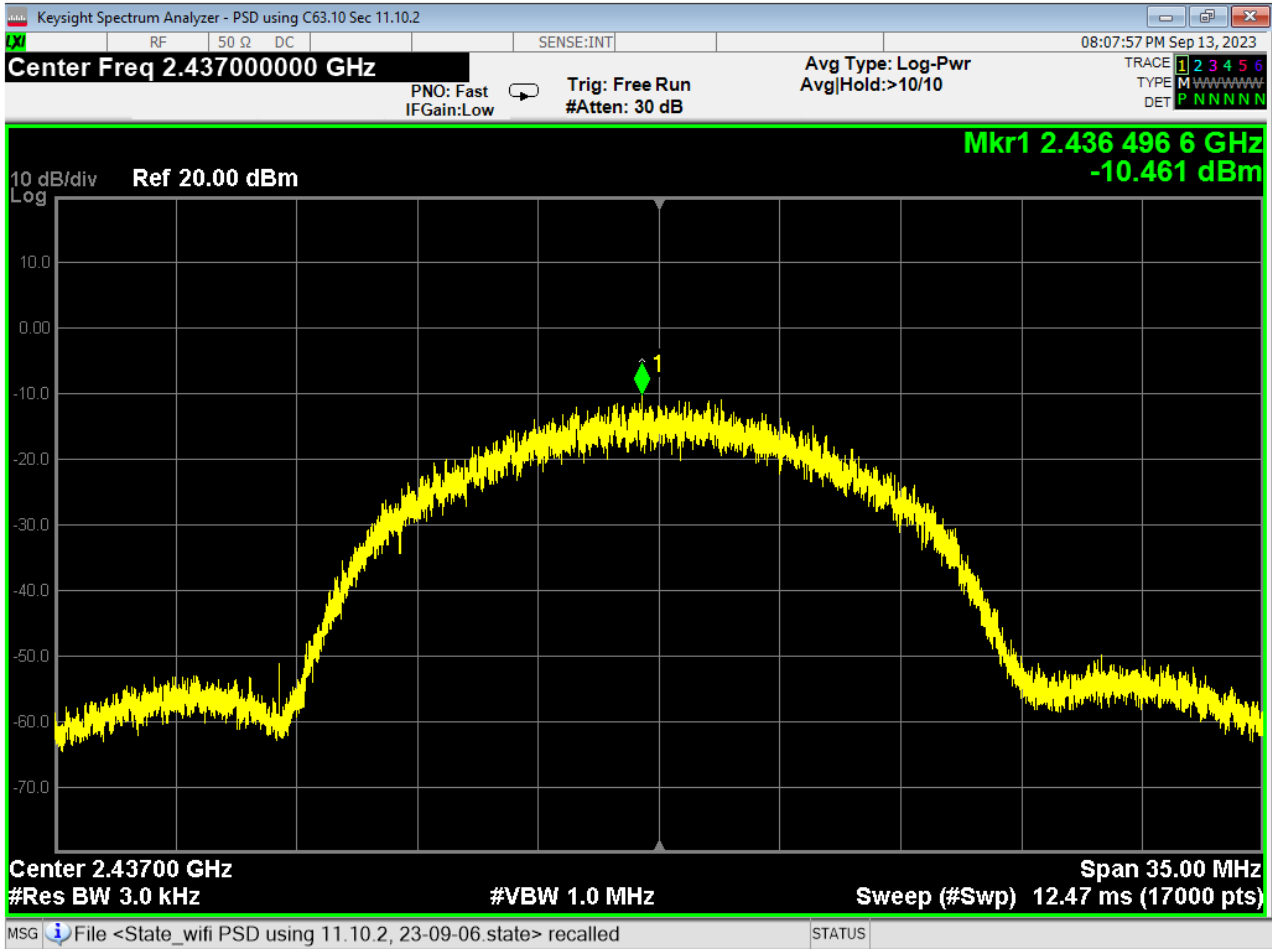

47 PSD, Mid, Wifi B, High Data Rate

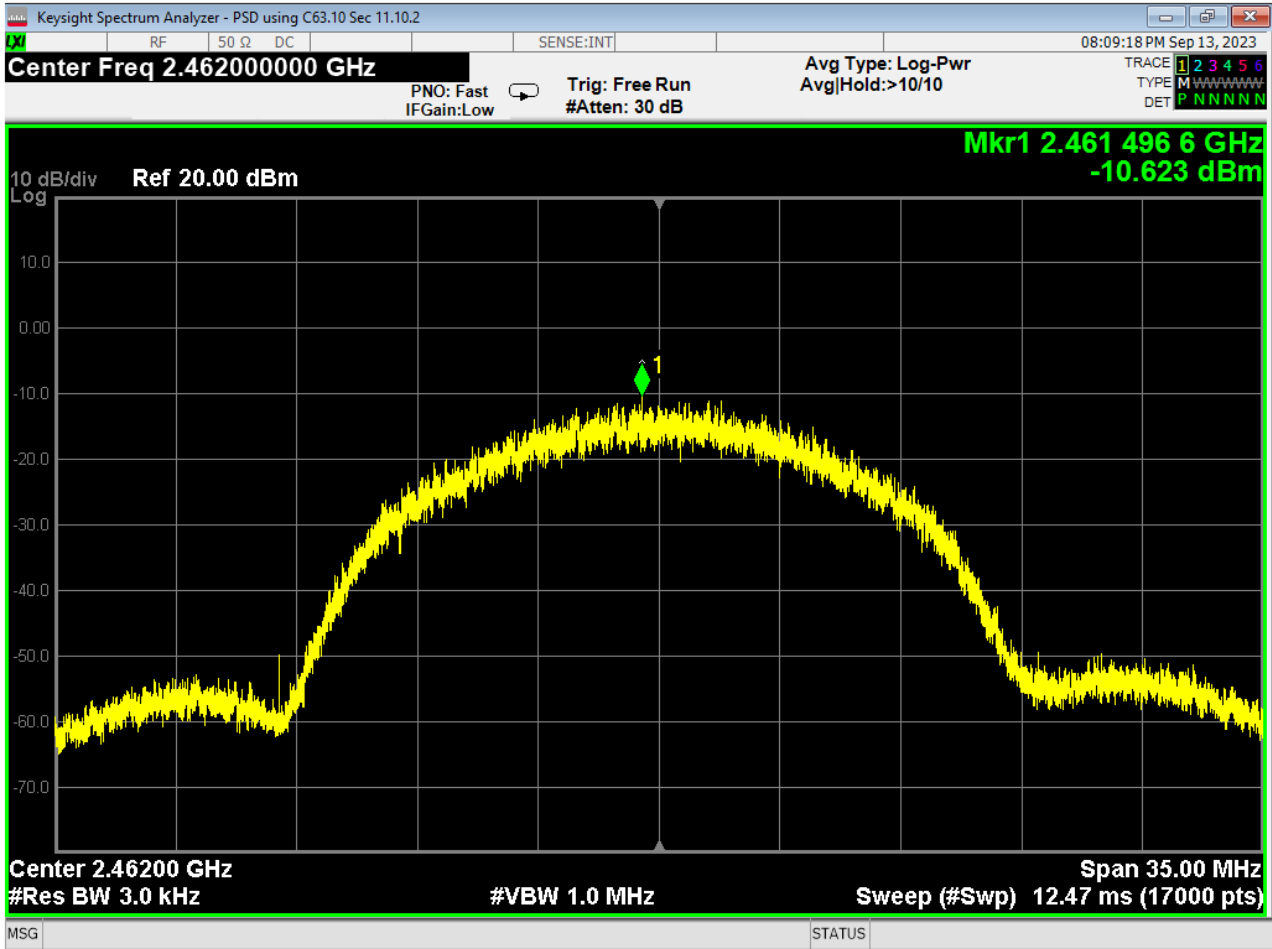

48 PSD, High, Wifi B, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

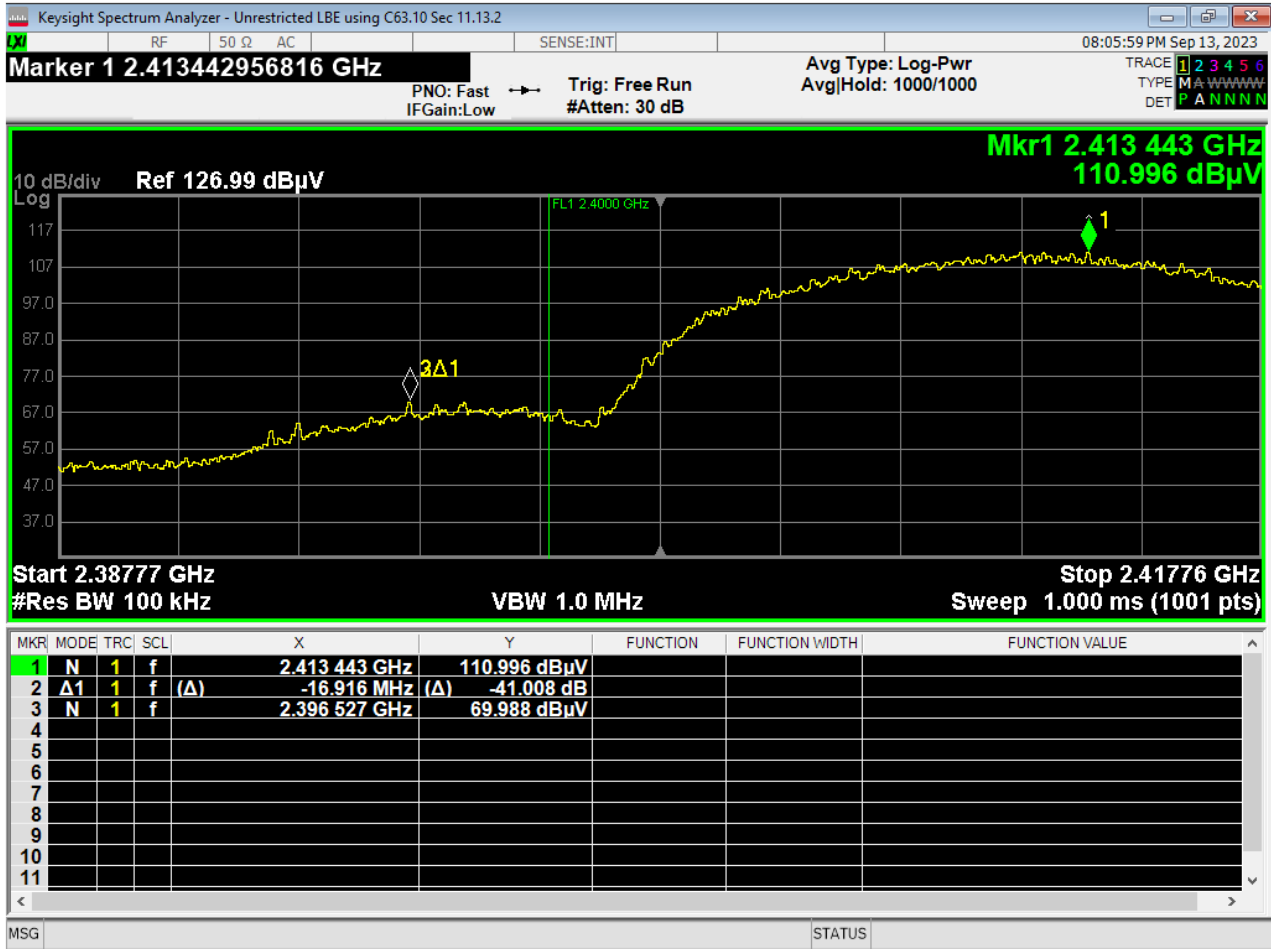

49 Lower Bandedge, Unrestricted, Wifi B, High Data Rate



Report Number:

R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.



50 Higher Bandedge, Unrestricted, Wifi B, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

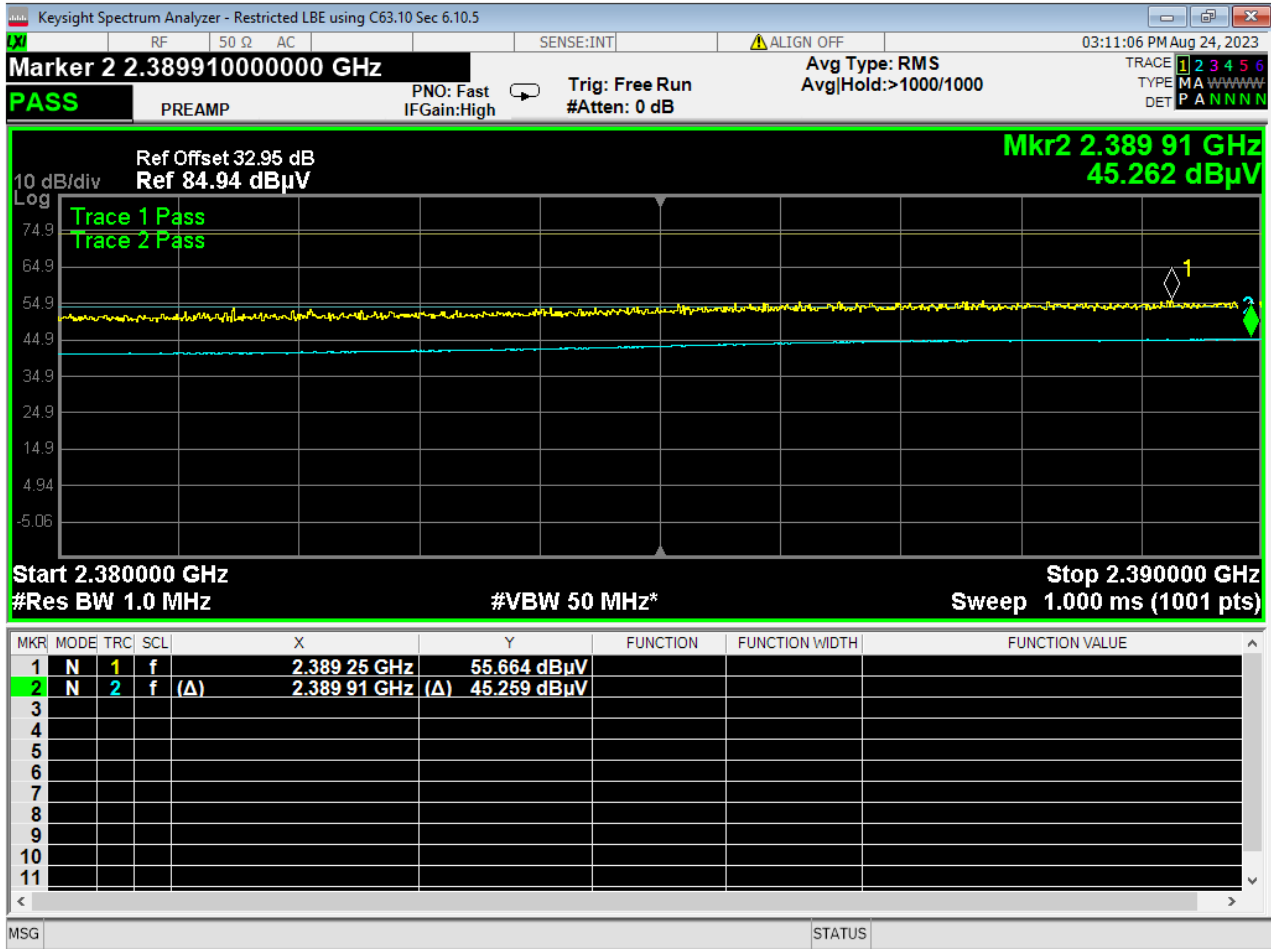

51 Lower Bandedge, Restricted, Wifi B, High Data Rate



Report Number:


R20230808-00-E10A

Rev


A

Prepared for:

Garmin International, Inc.

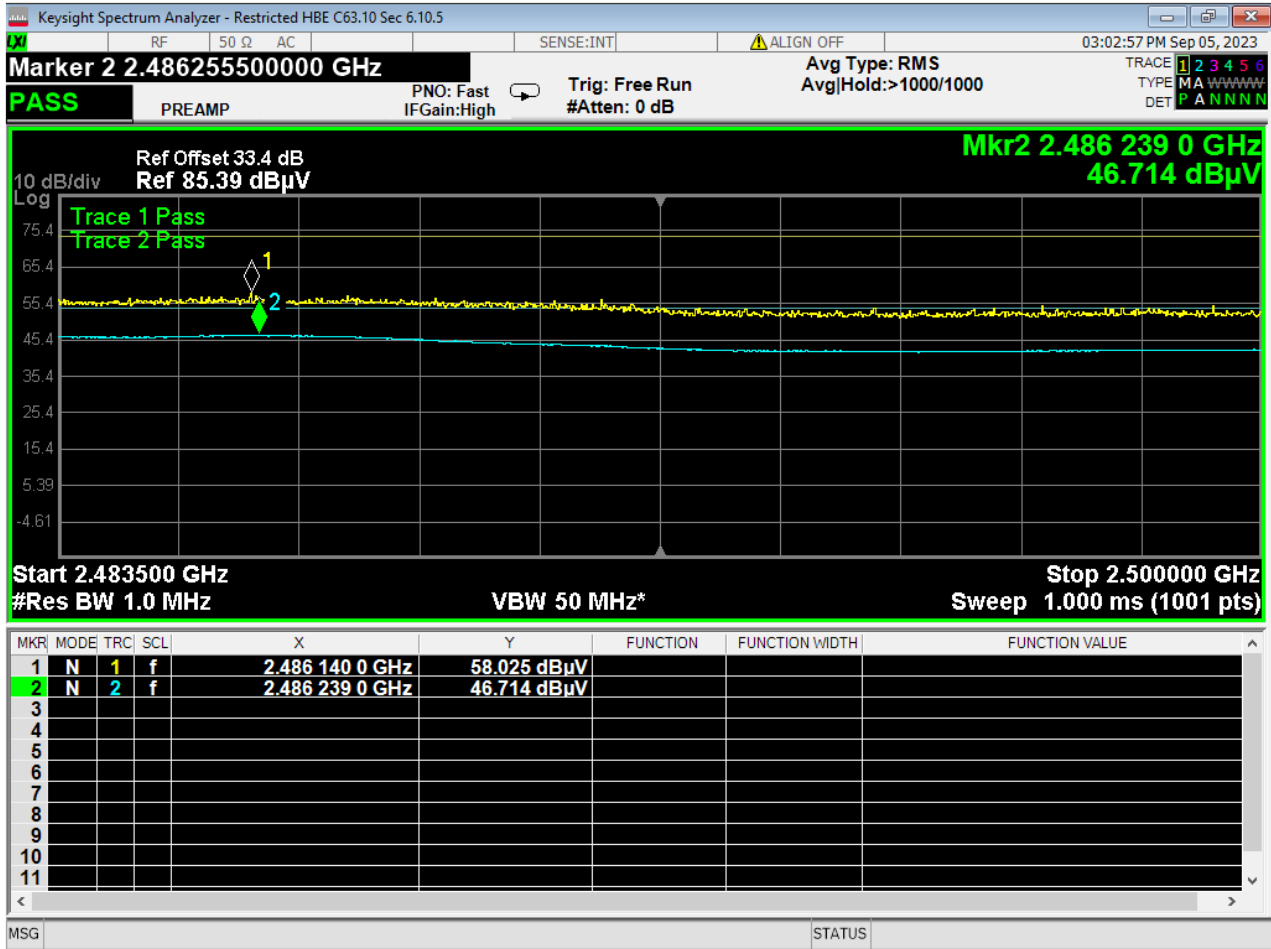


52 Higher Bandedge, Restricted, Wifi B, High Data Rate

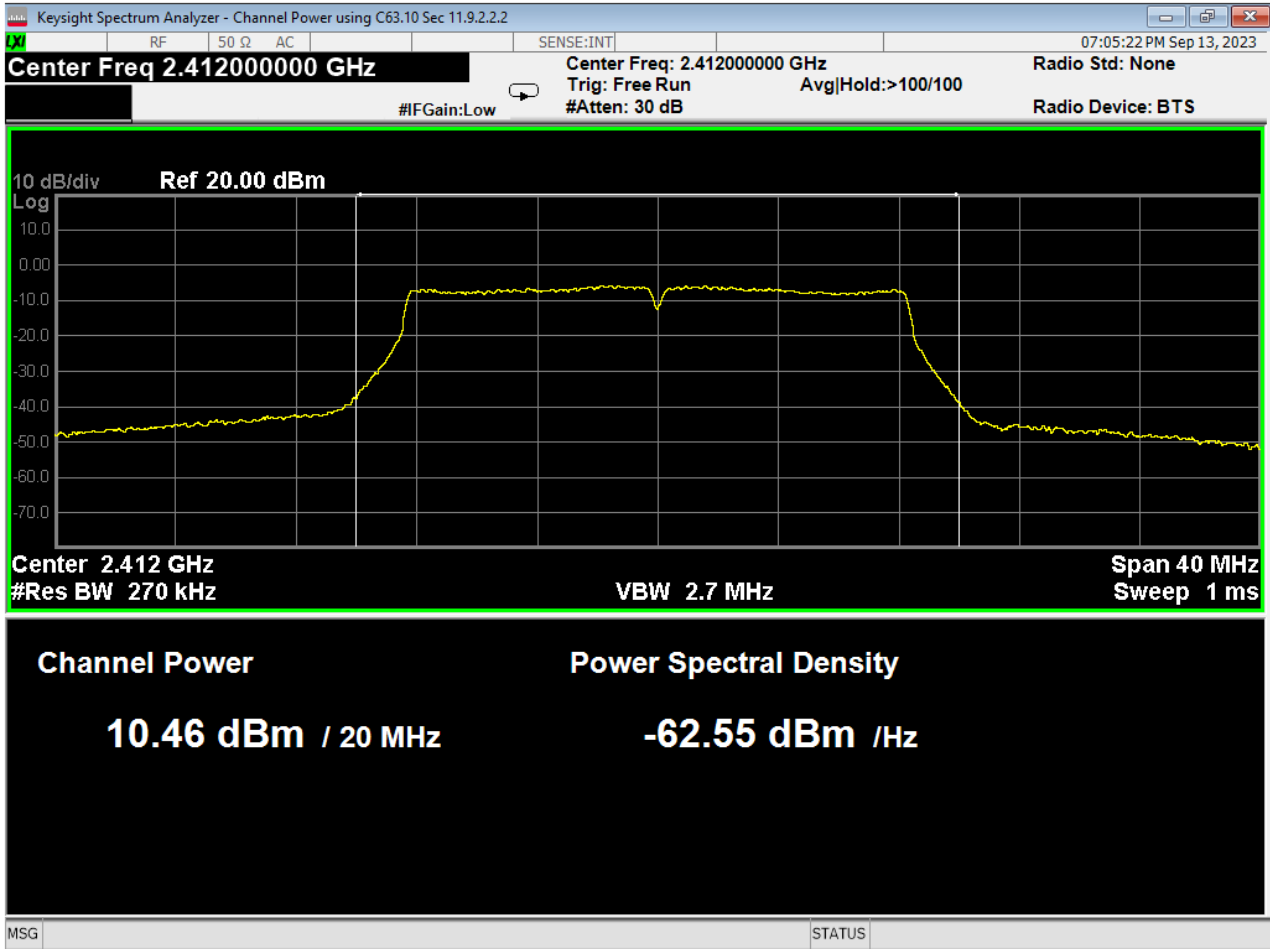

53 Average Power, Low, Wifi G, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

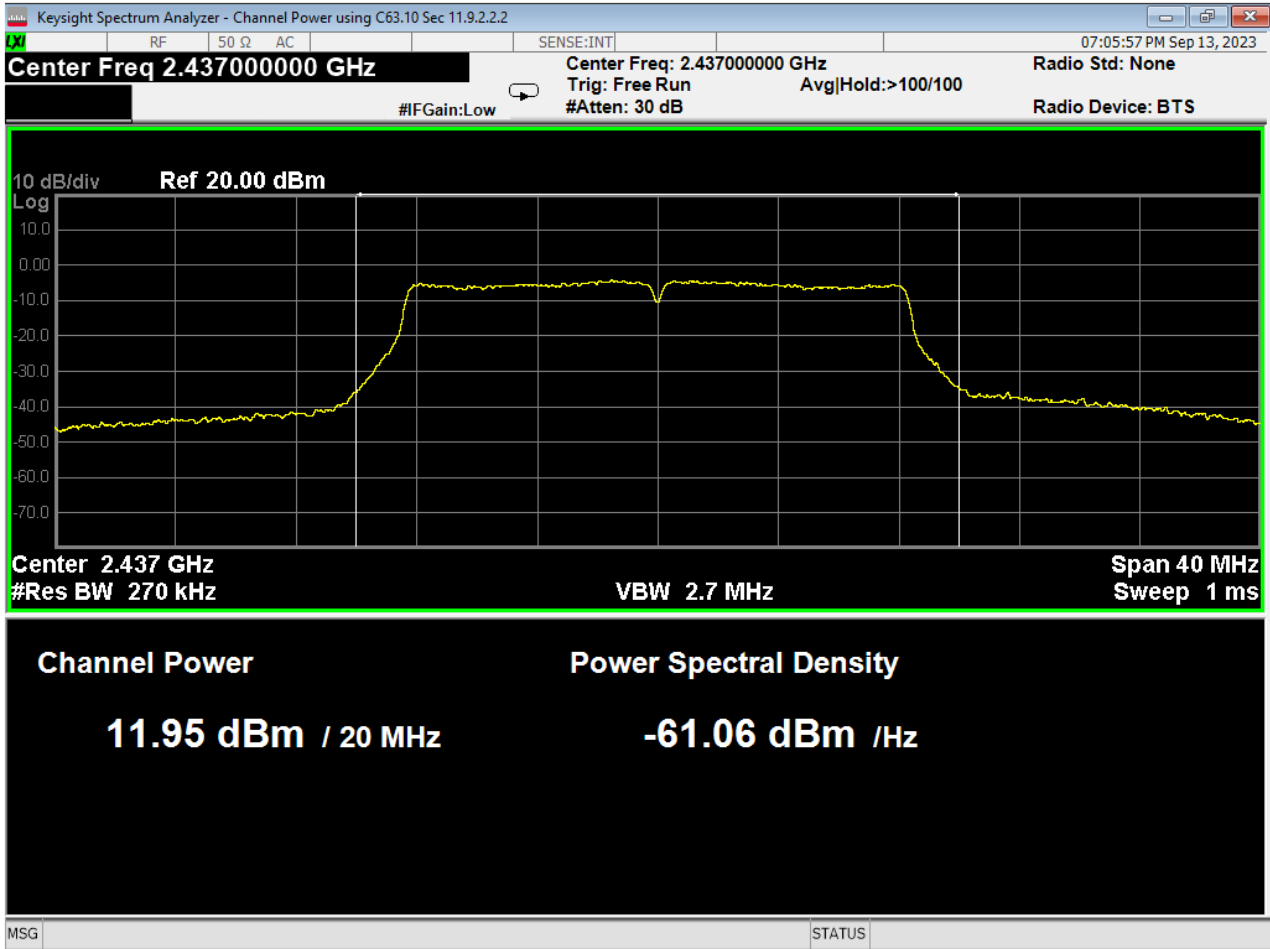

54 Average Power, Mid, Wifi G, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

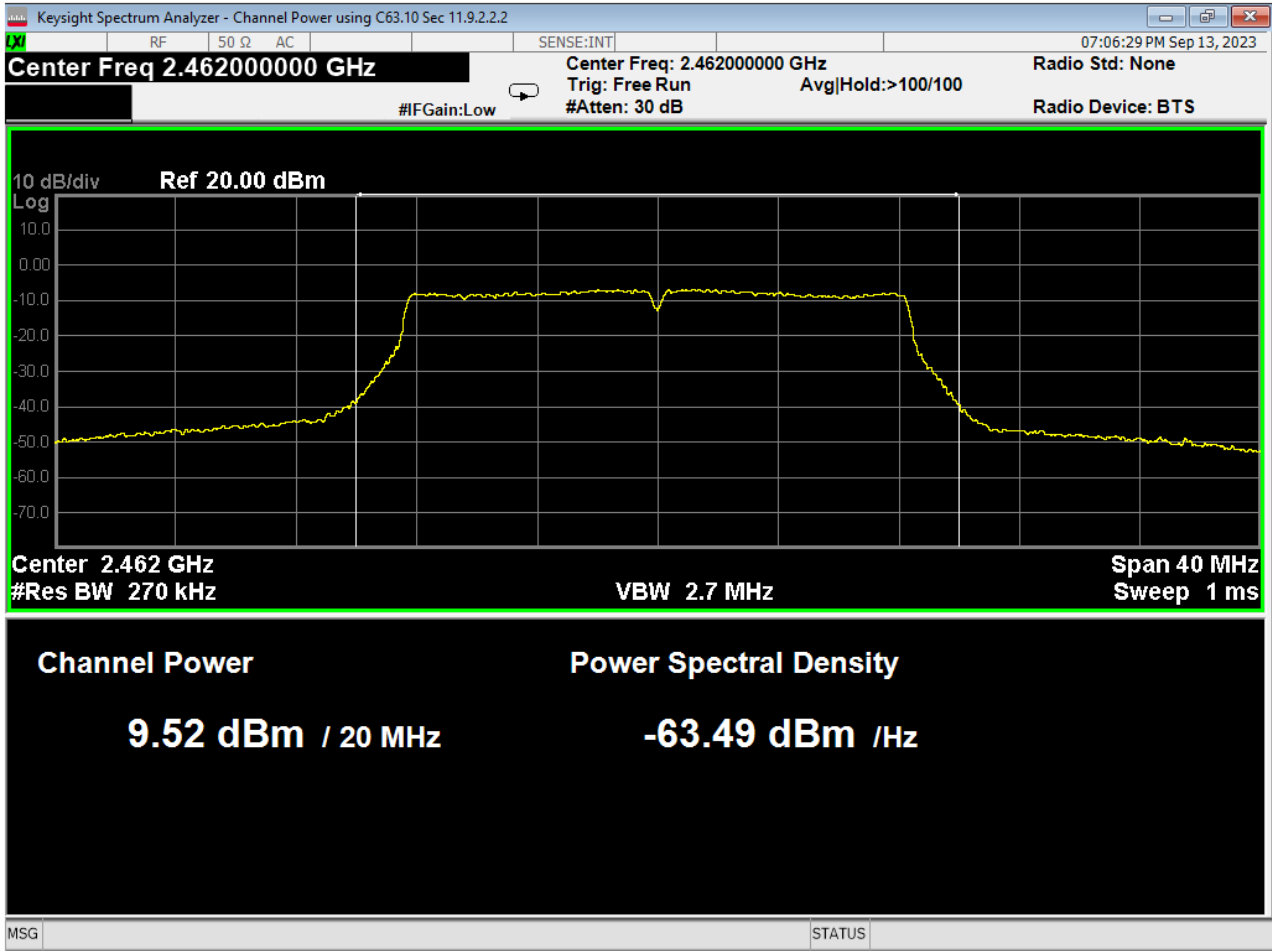

55 Average Power, High, Wifi G, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:


Garmin International, Inc.

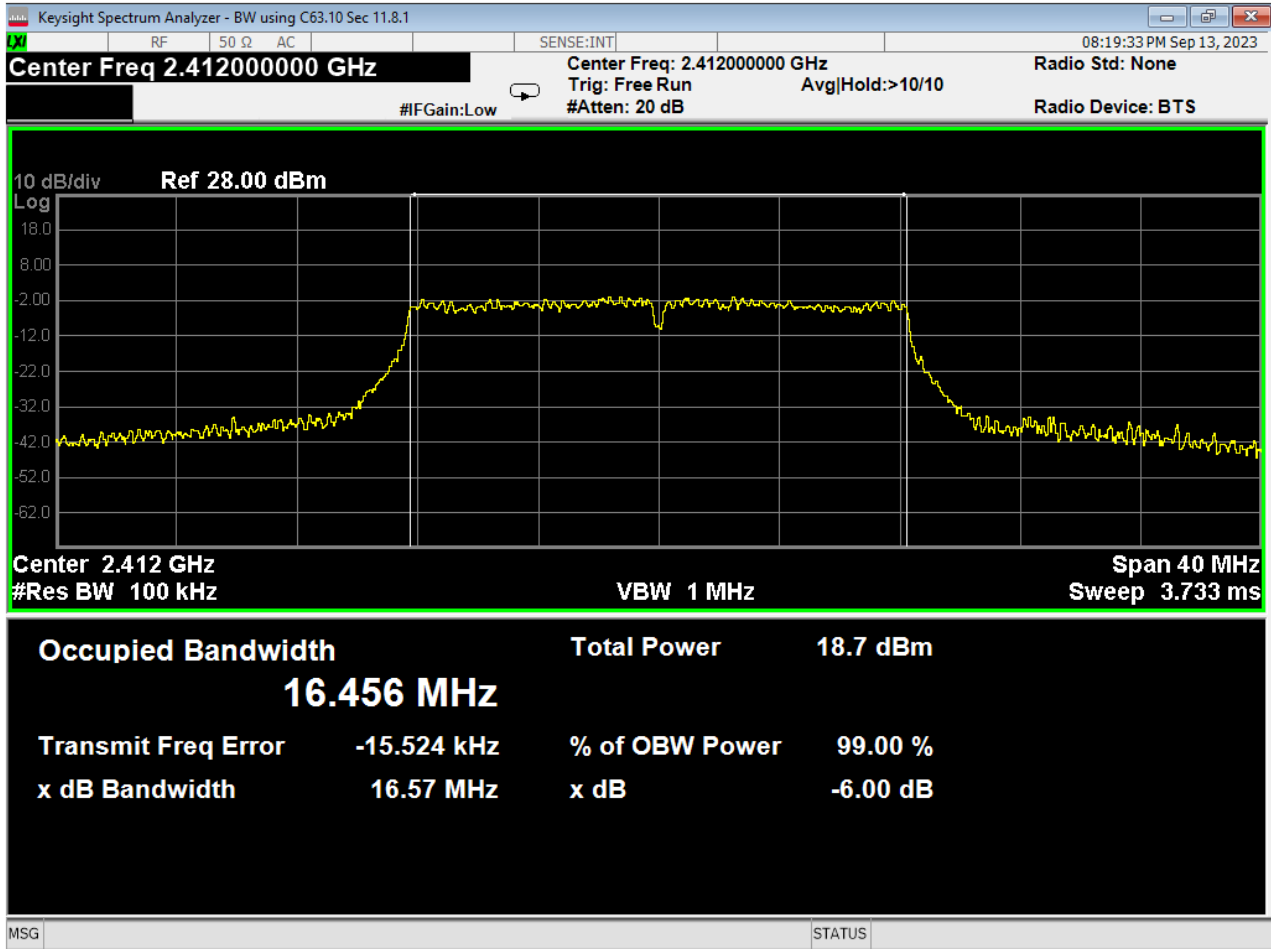

56 dB Bandwidth, Low, Wifi G, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

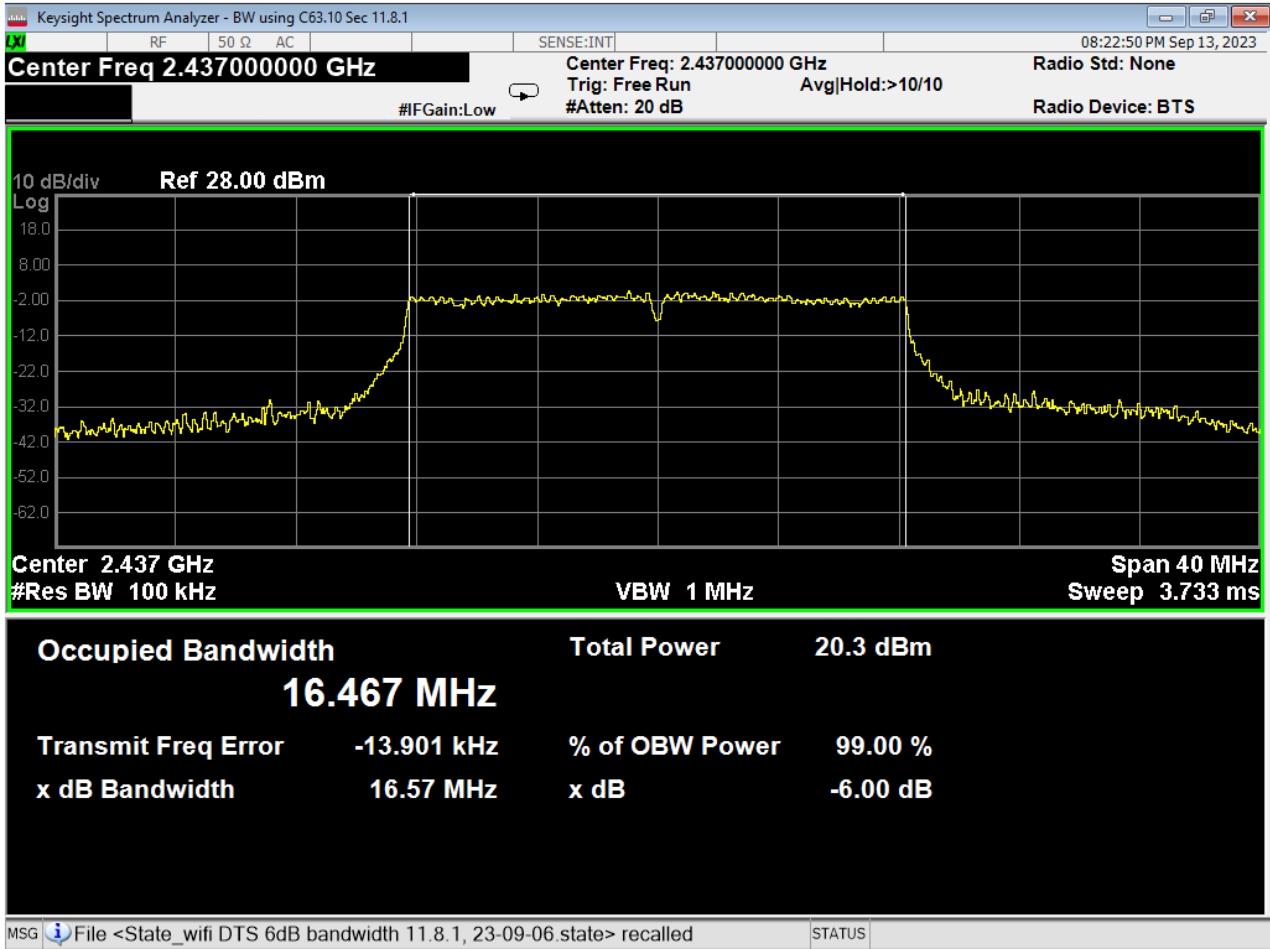


57 6dB Bandwidth, Mid, Wifi G, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

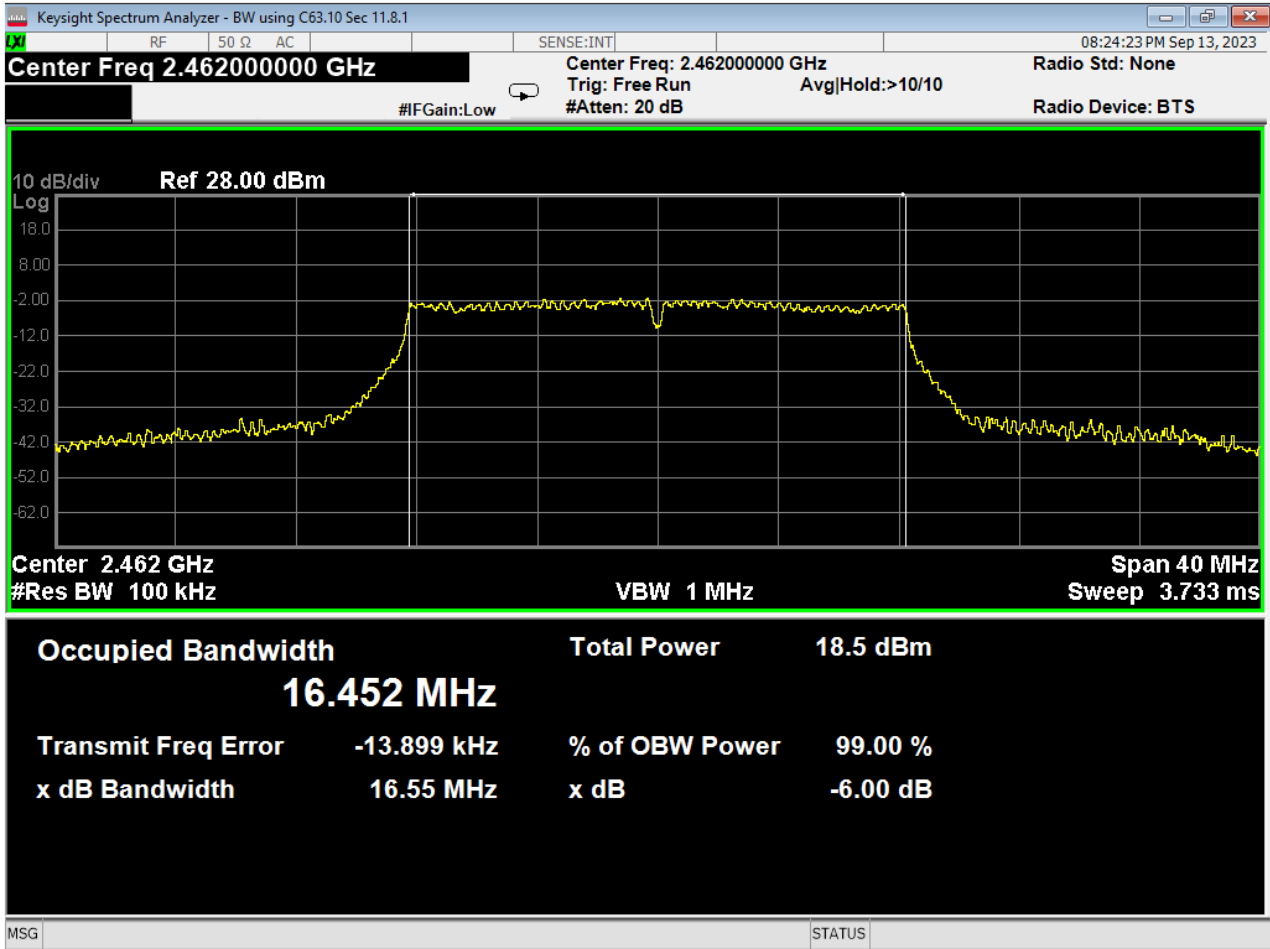


58 dB Bandwidth, High, Wifi G, High Data Rate

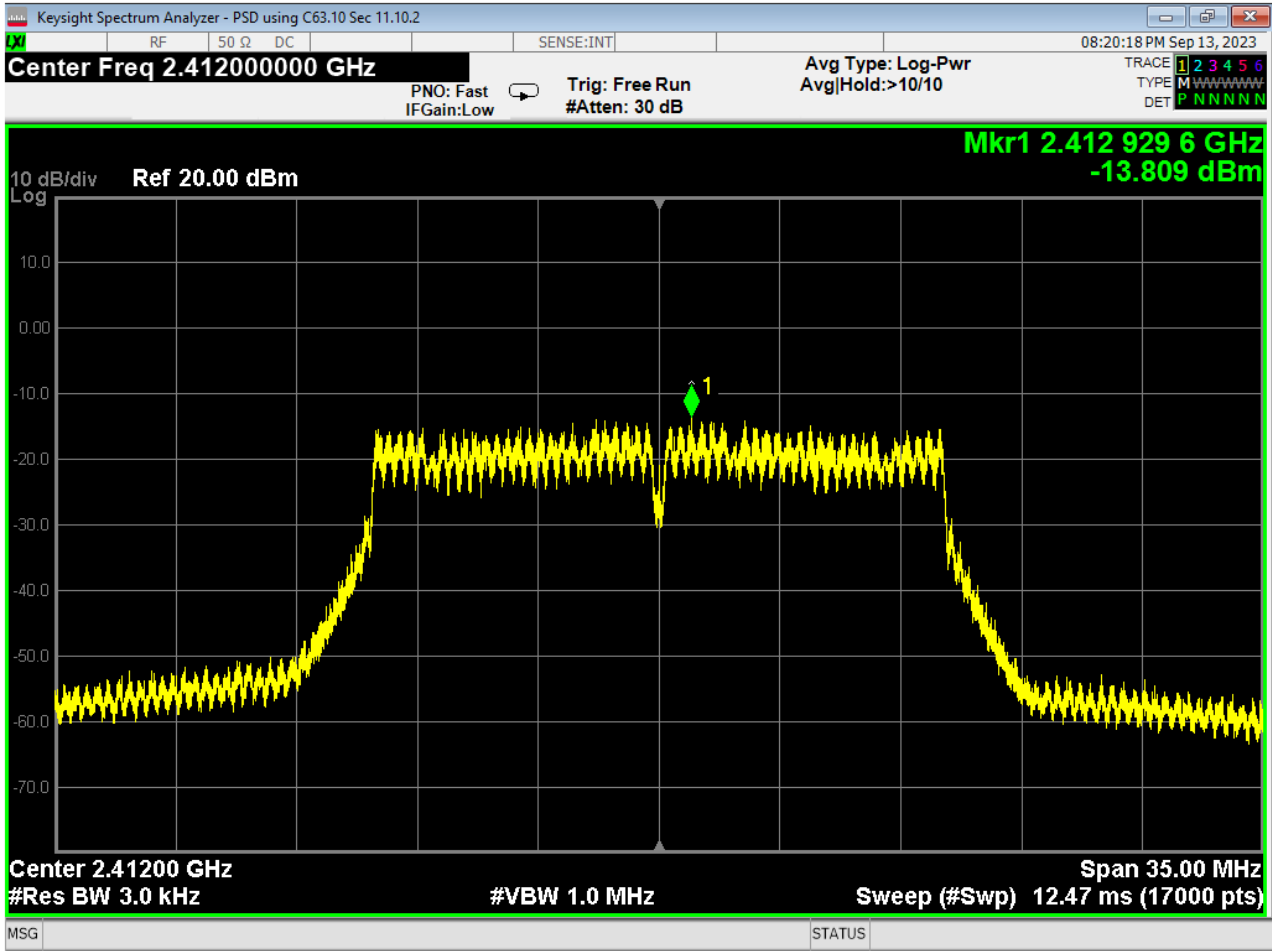


59 PSD, Low, Wifi G, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

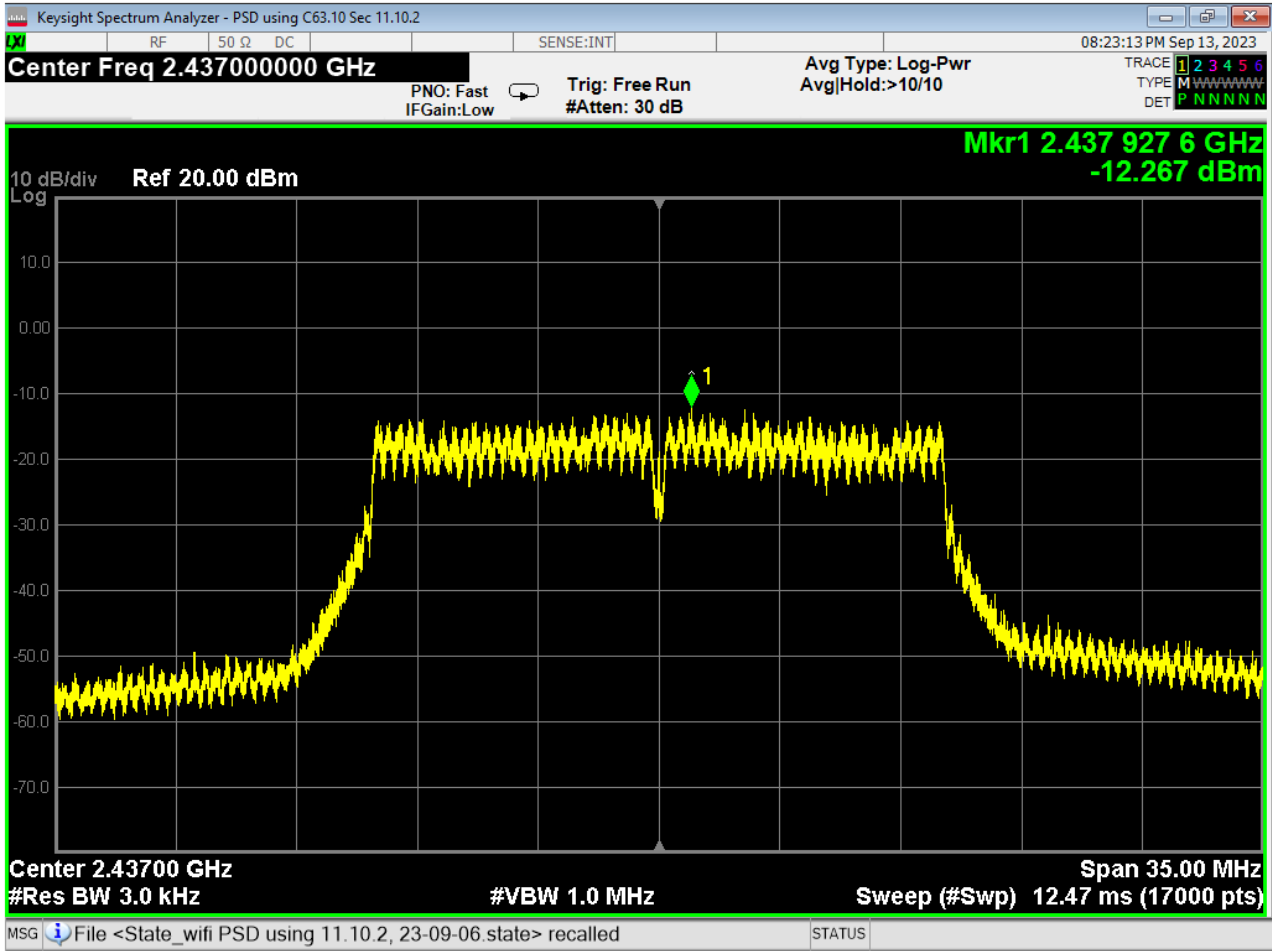

60 PSD, Mid, Wifi G, High Data Rate

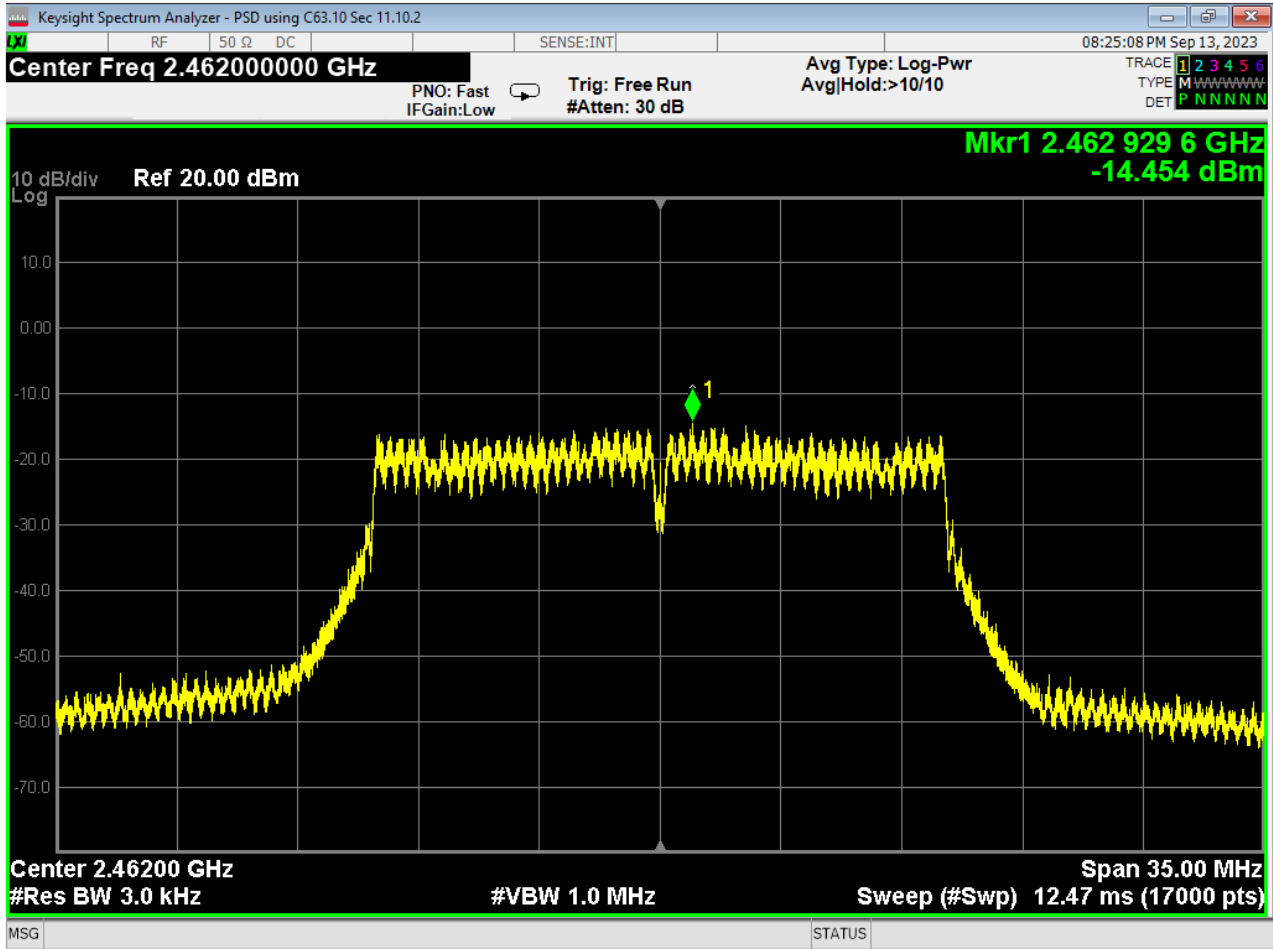

61 PSD, High, Wifi G, High Data Rate



Report Number:

R20230808-00-E10A

Rev

A

Prepared for:


Garmin International, Inc.



62 Lower Bandedge, Unrestricted, Wifi G, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

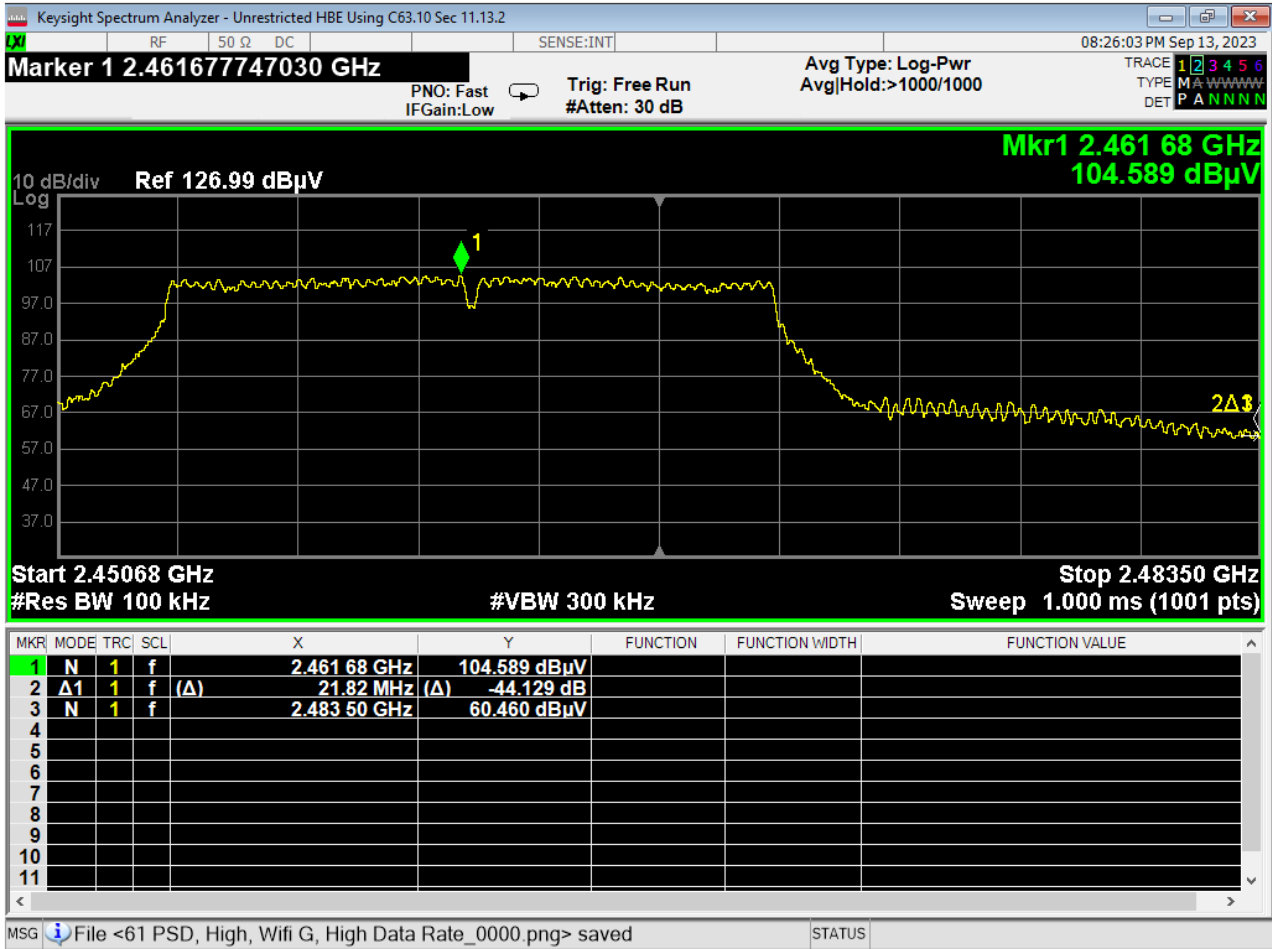

63 Higher Bandedge, Unrestricted, Wifi G, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

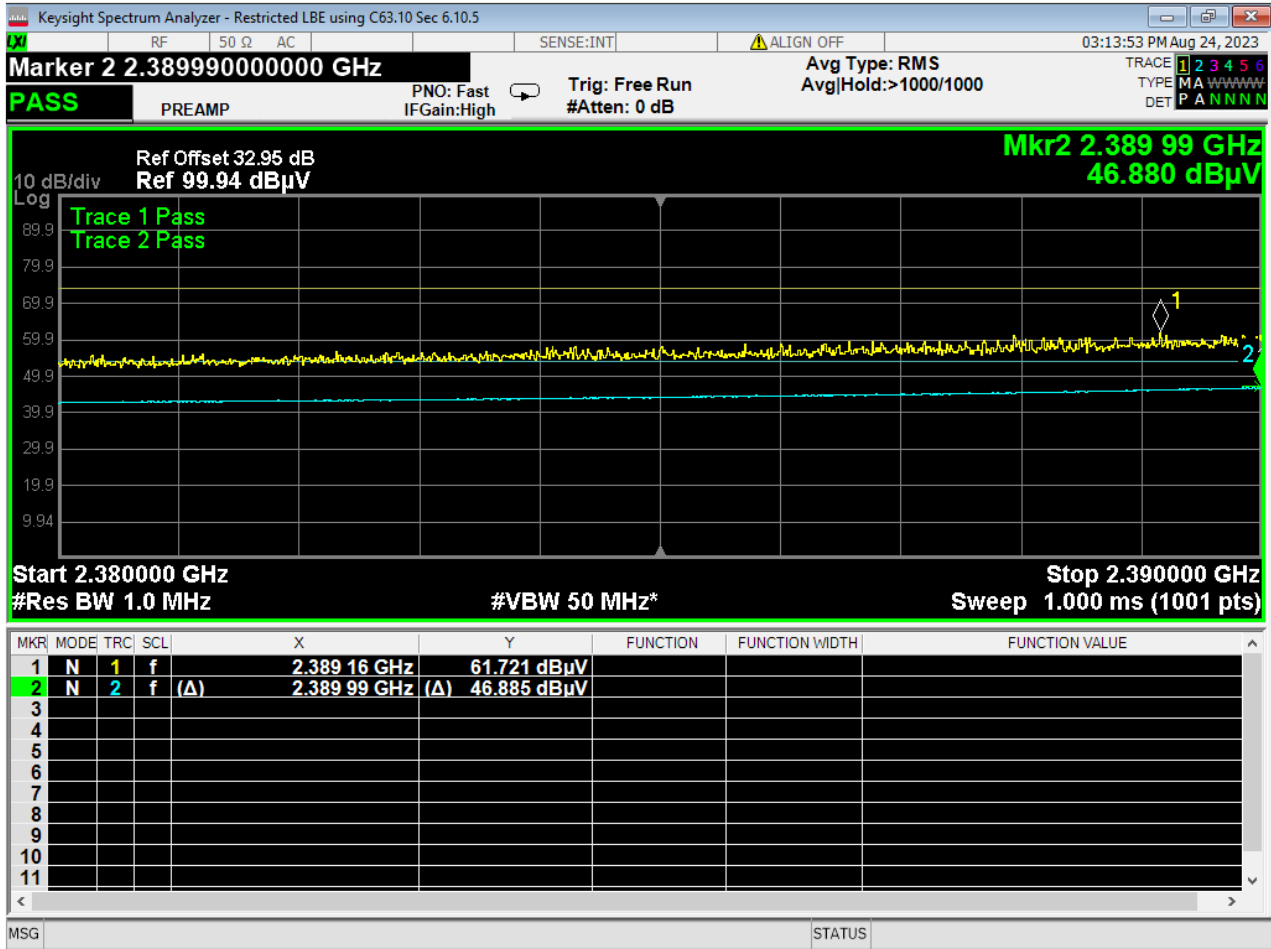

64 Lower Bandedge, Restricted, Wifi G, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:


Garmin International, Inc.

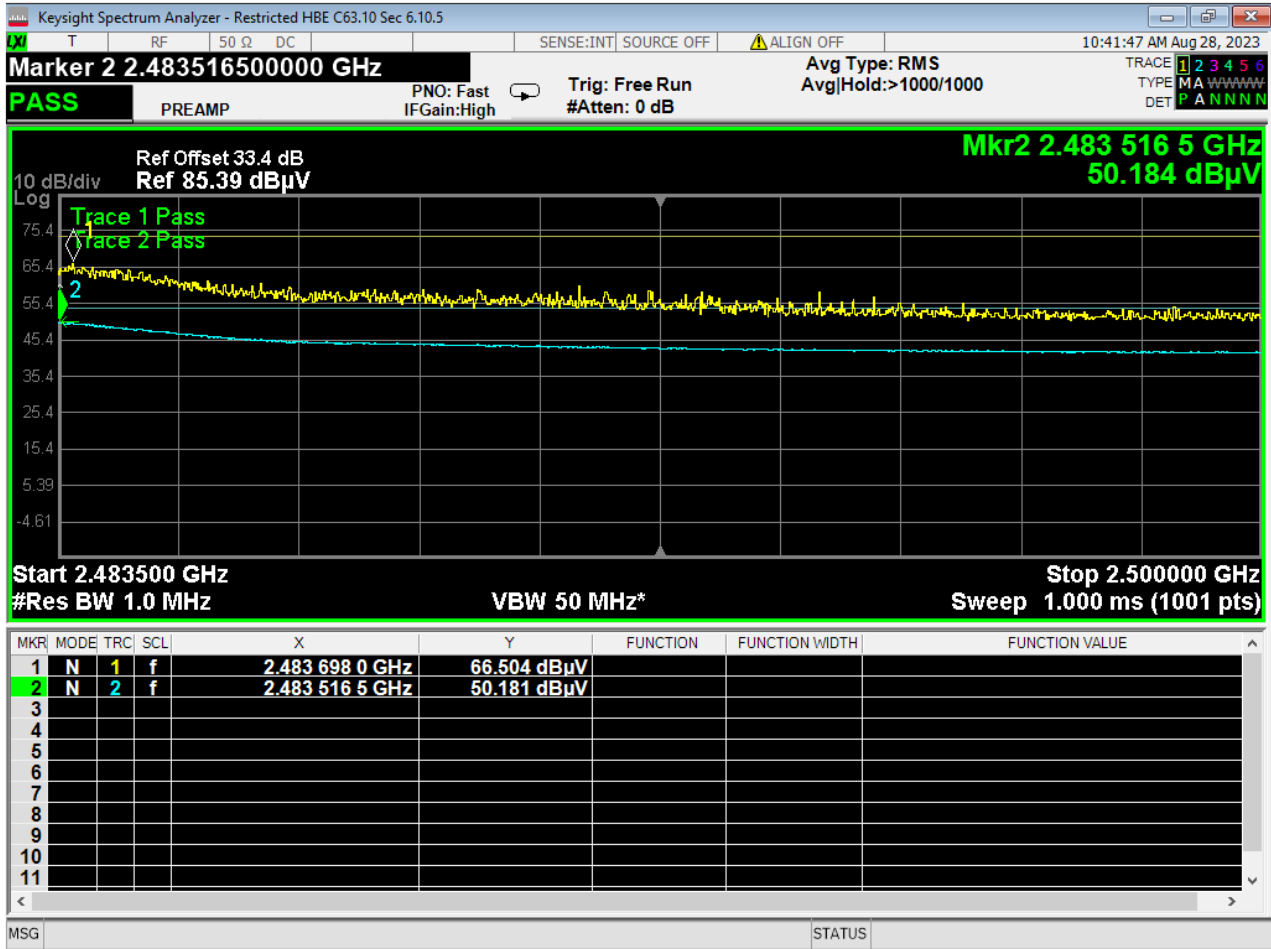

65 Higher Bandedge, Restricted, Wifi G High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

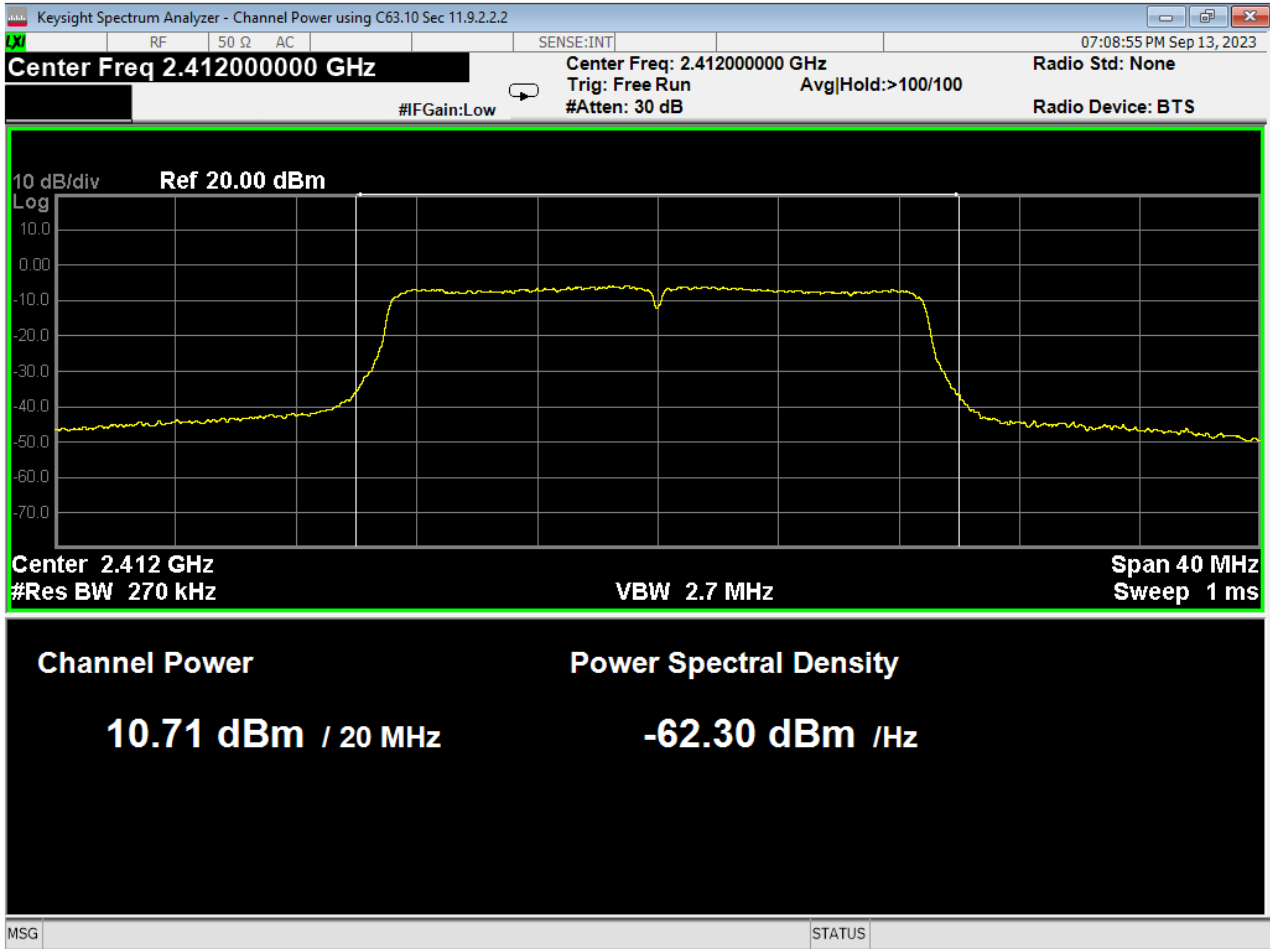


66 Average Power, Low, Wifi N, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

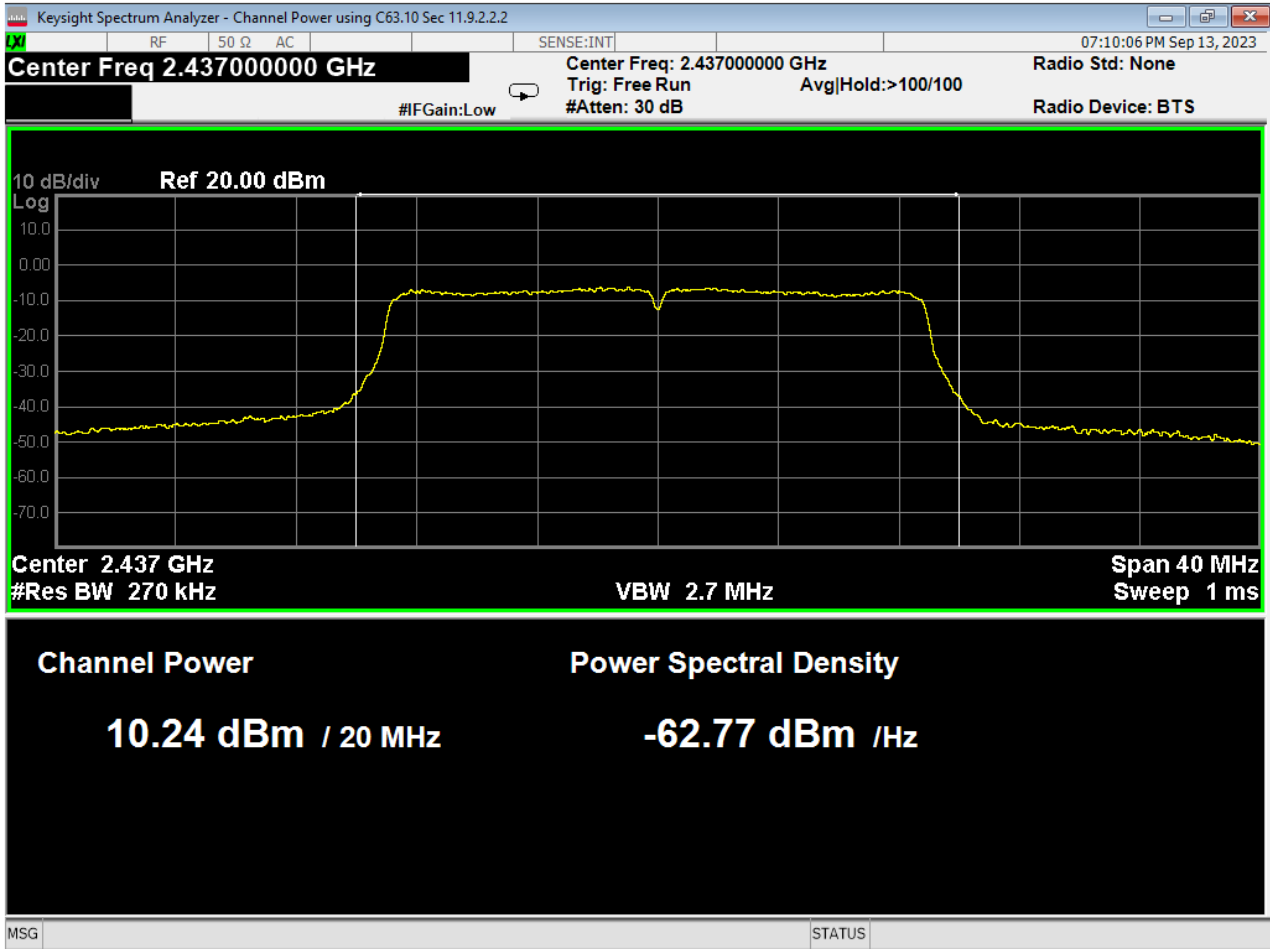


67 Average Power, Mid, Wifi N, High Data Rate

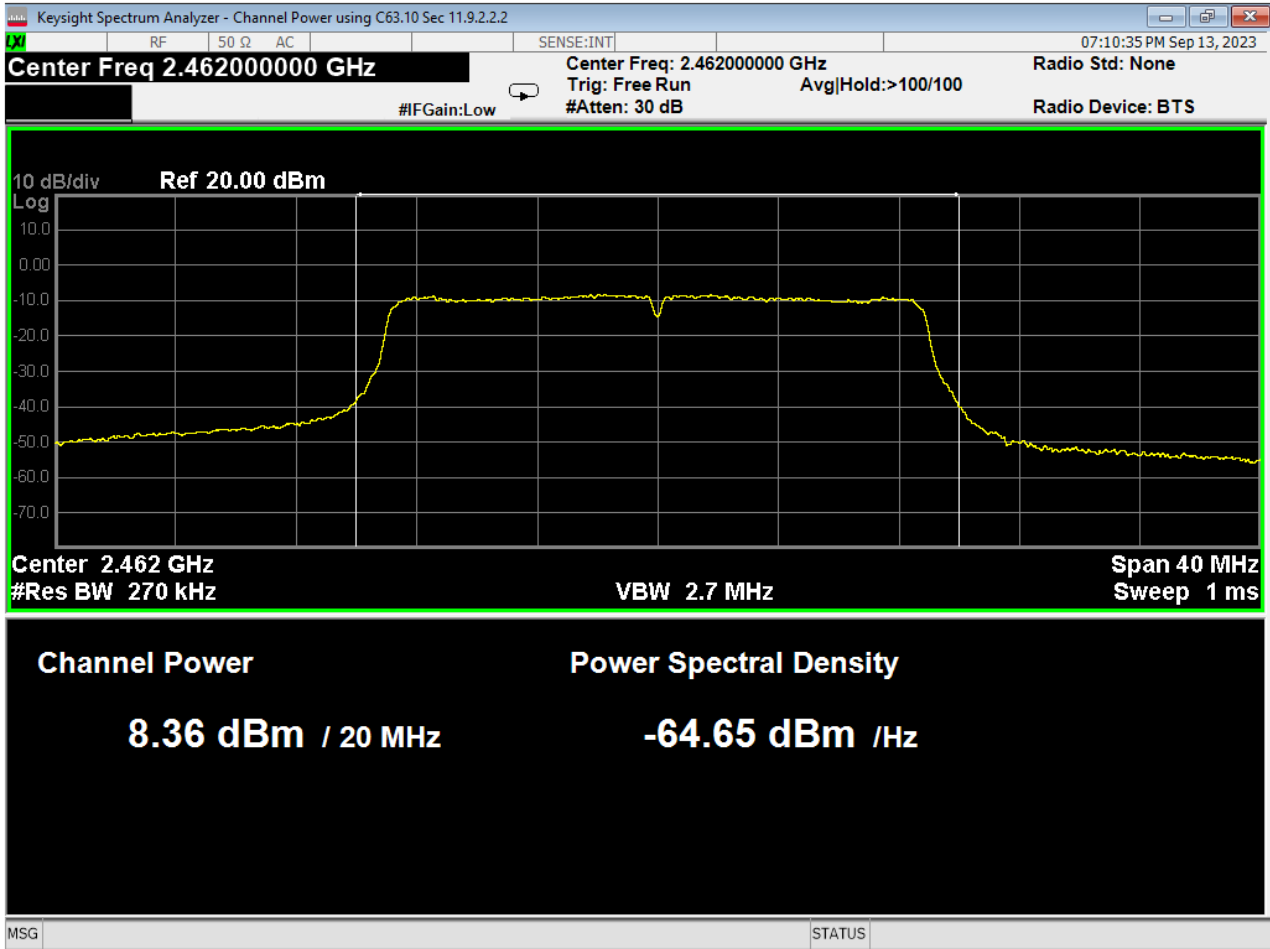

68 Average Power, High, Wifi N, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

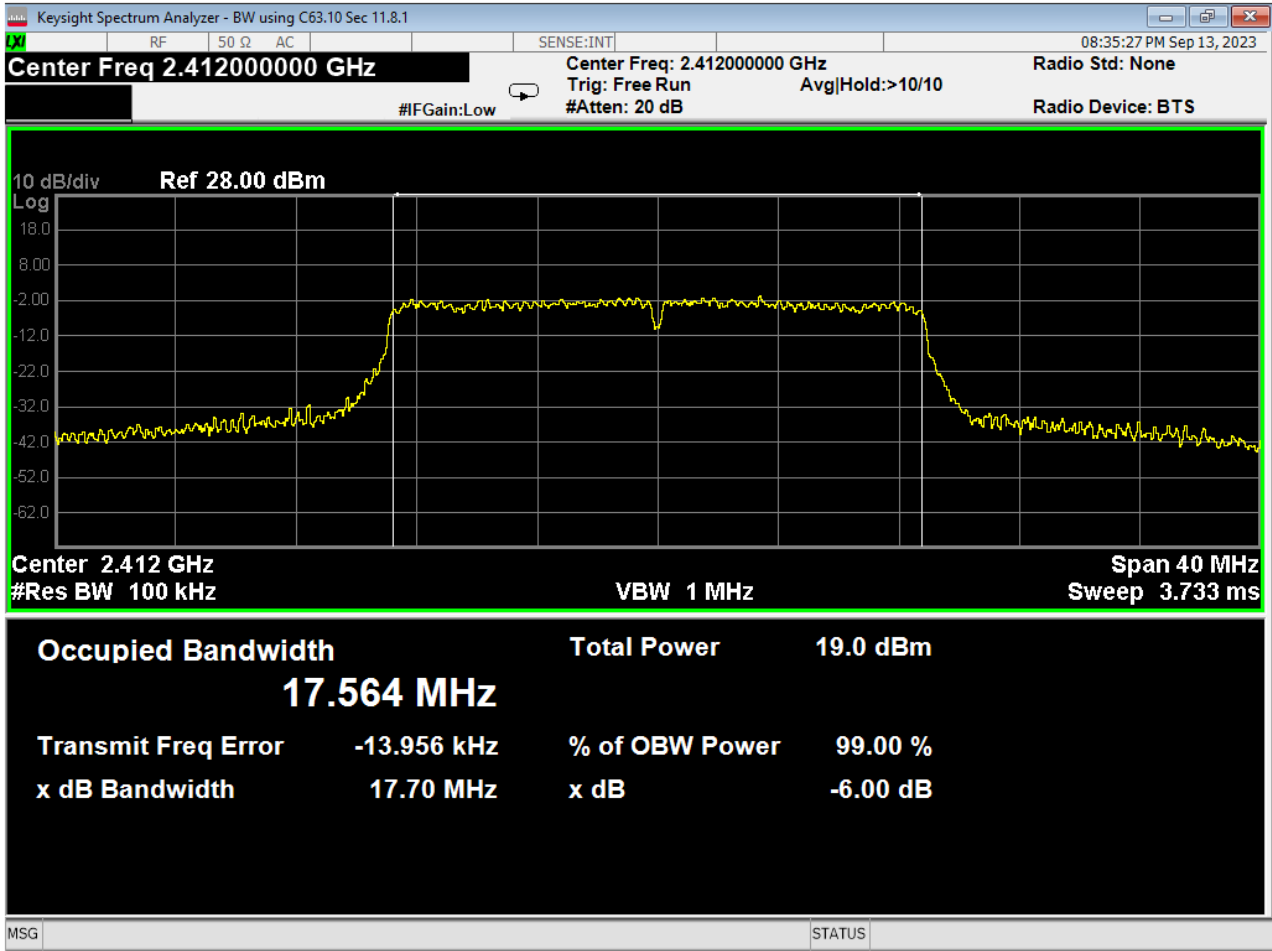

69 6dB Bandwidth, Low, Wifi N, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

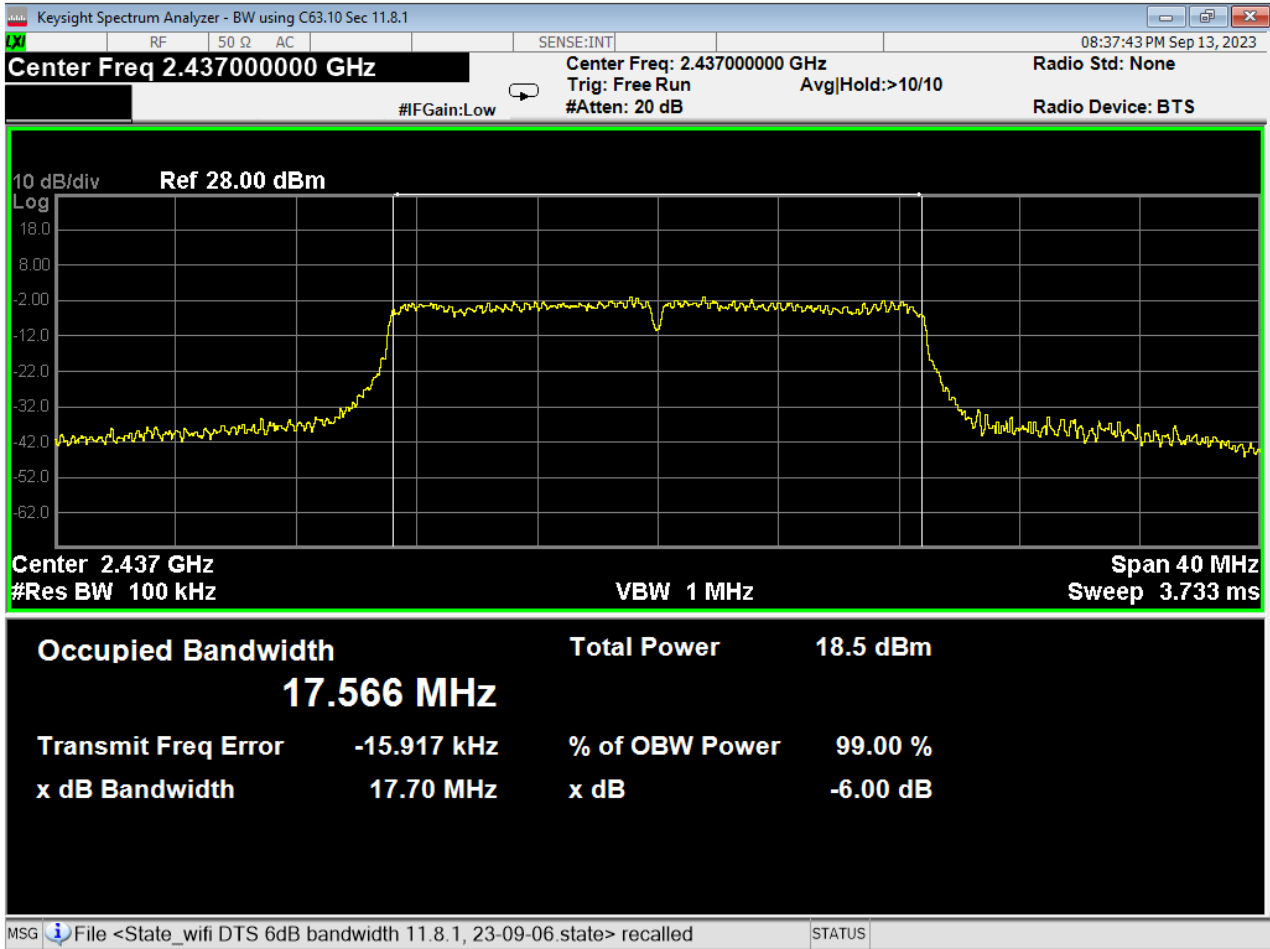


70 6dB Bandwidth, Mid, Wifi N, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

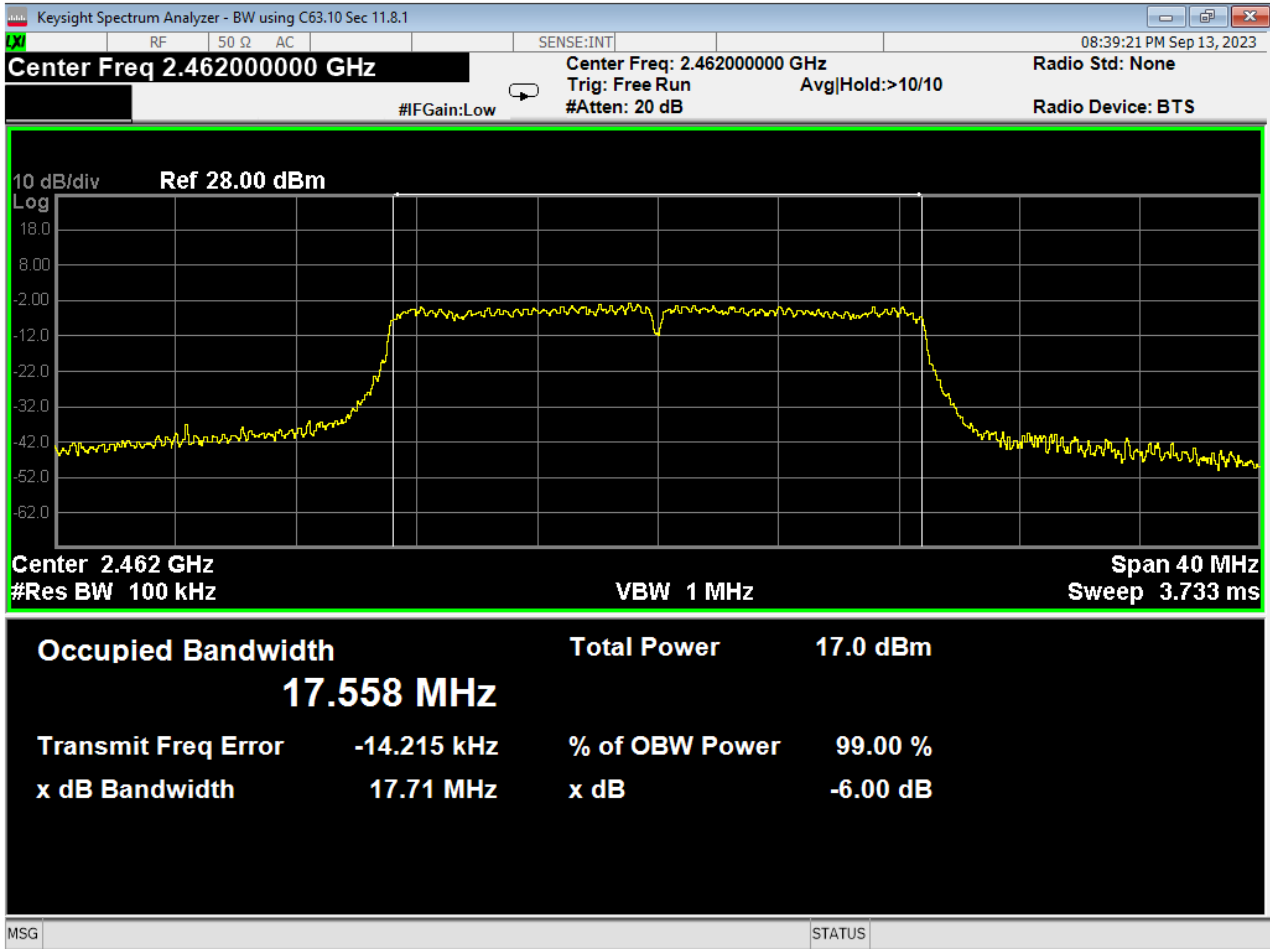


71 dB Bandwidth, High, Wifi N, High Data Rate

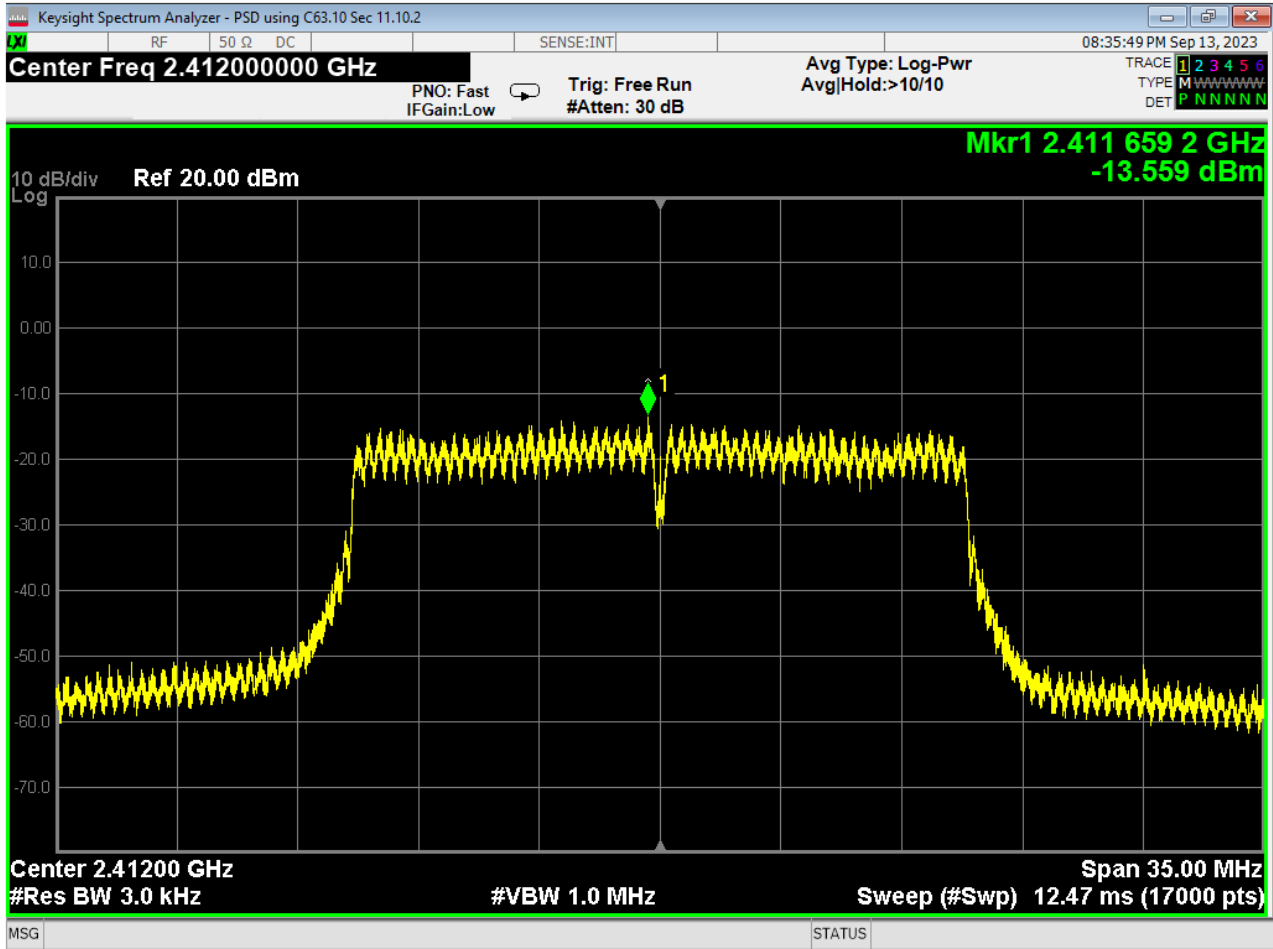

72 PSD, Low, Wifi N, High Data Rate

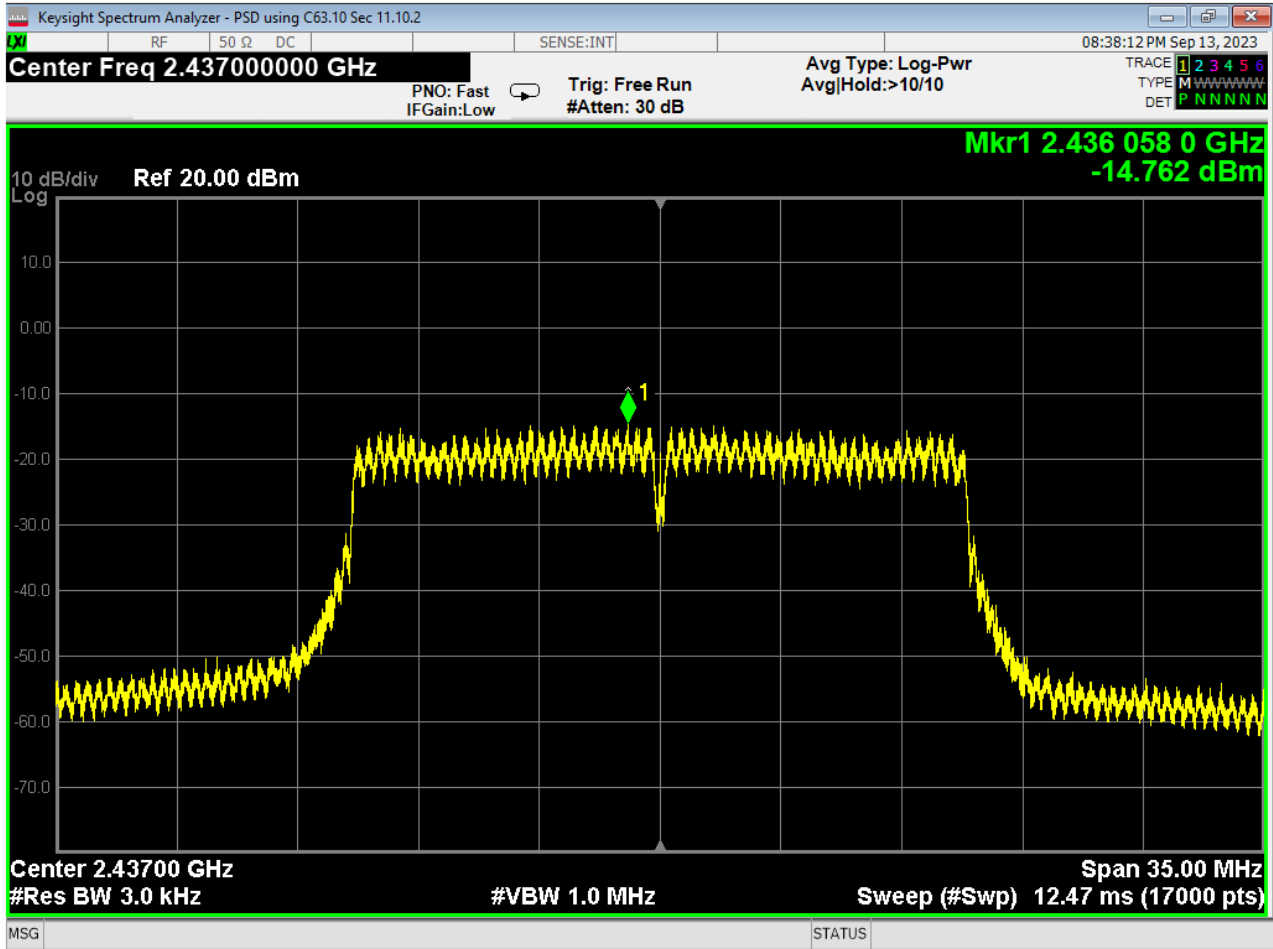


73 PSD, Mid, Wifi N, High Data Rate

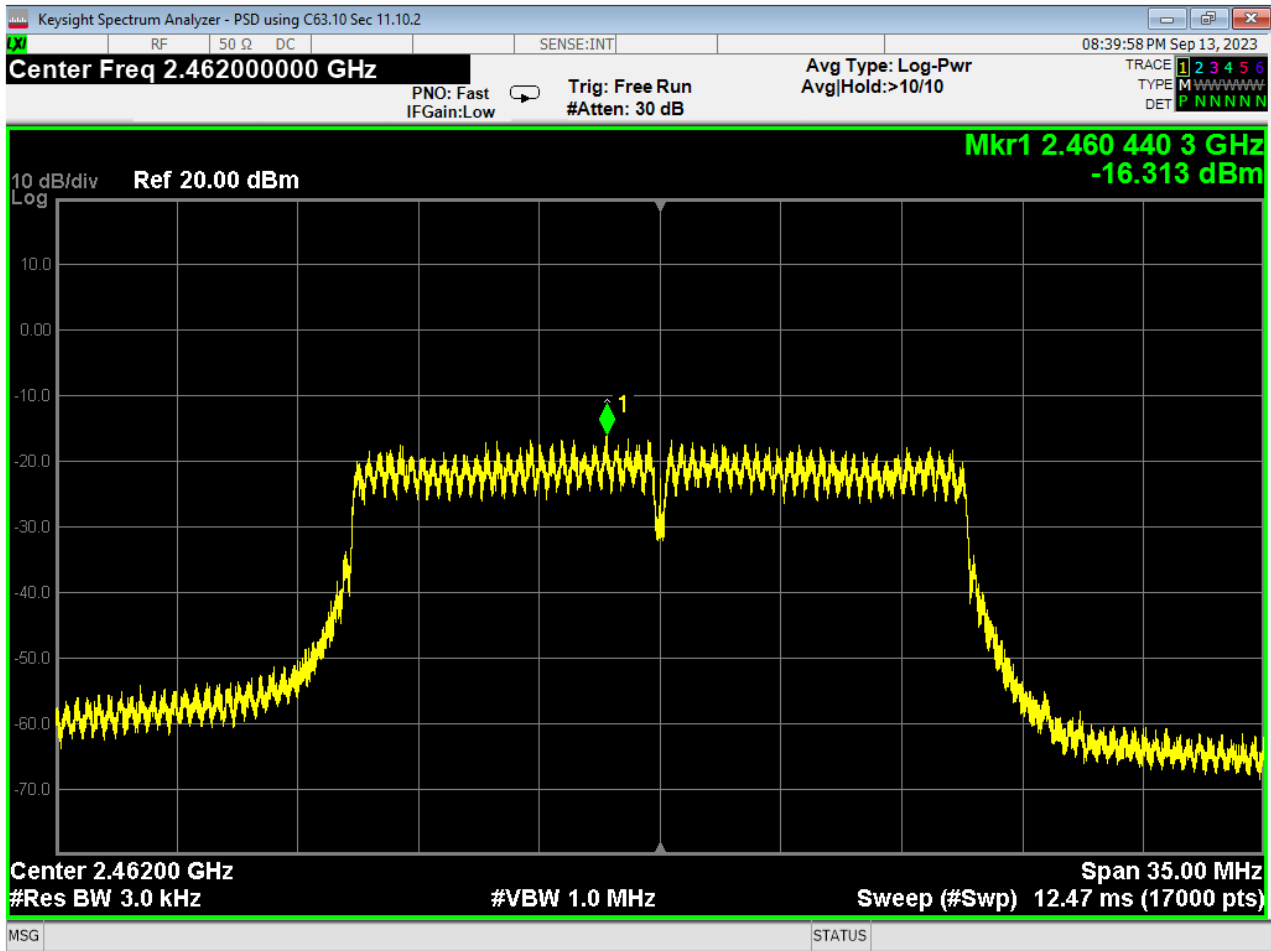

74 PSD, High, Wifi N, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

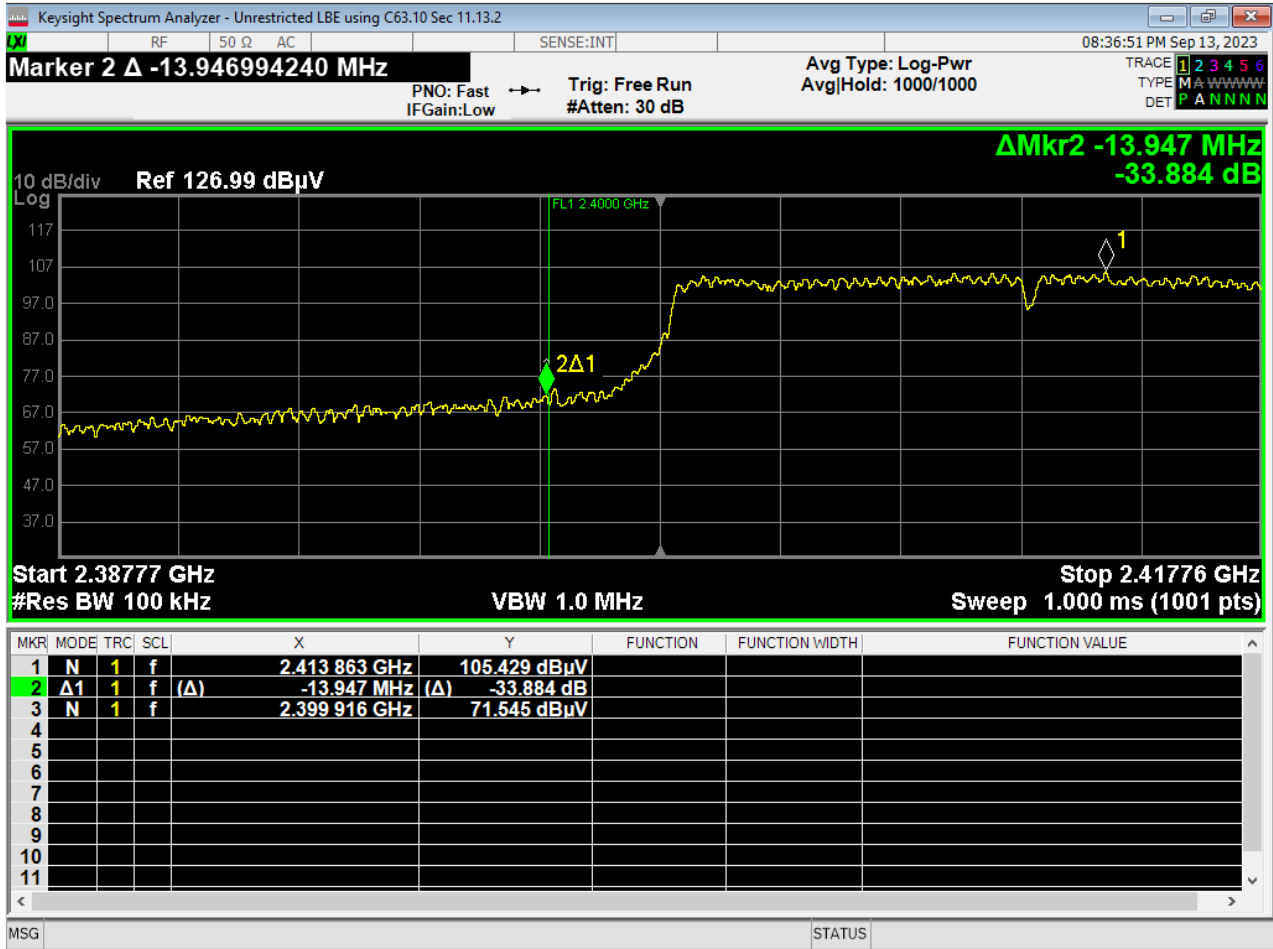

75 Lower Bandedge, Unrestricted, Wifi N, High Data Rate



76 Higher Bandedge, Unrestricted, Wifi N, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

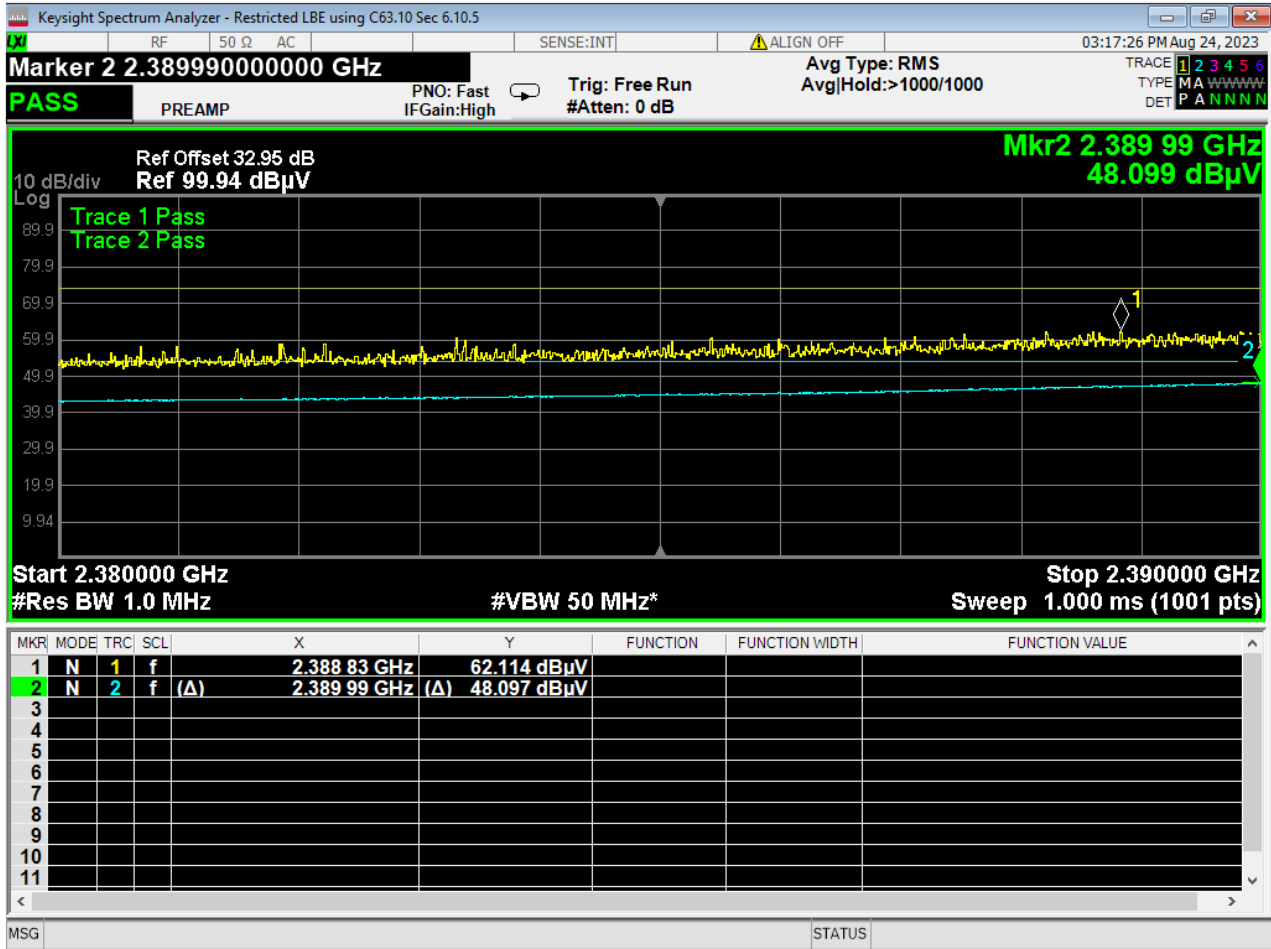

77 Lower Bandedge, Restricted, Wifi N, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:


Garmin International, Inc.

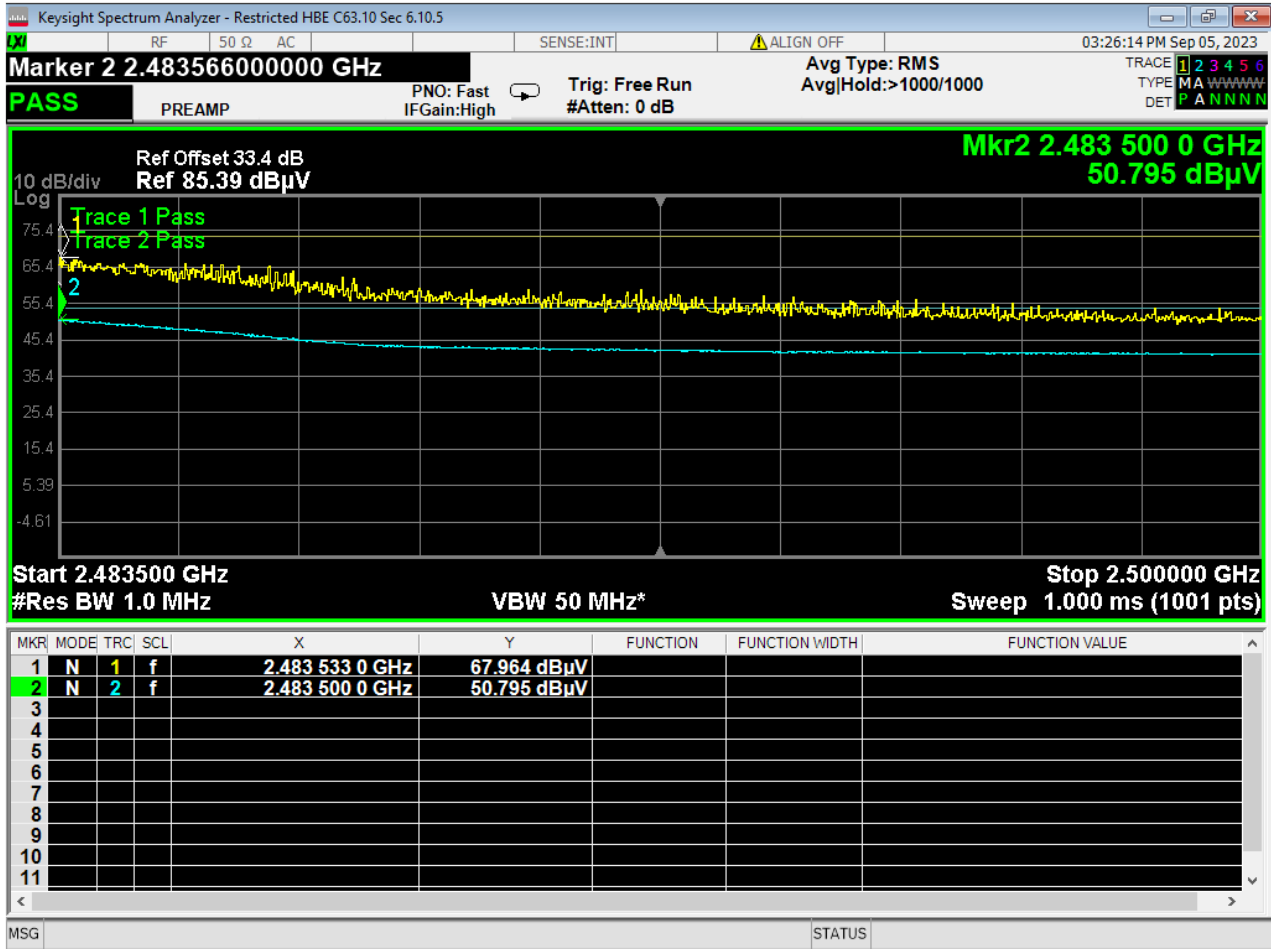

78 Higher Bandedge, Restricted, Wifi N, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

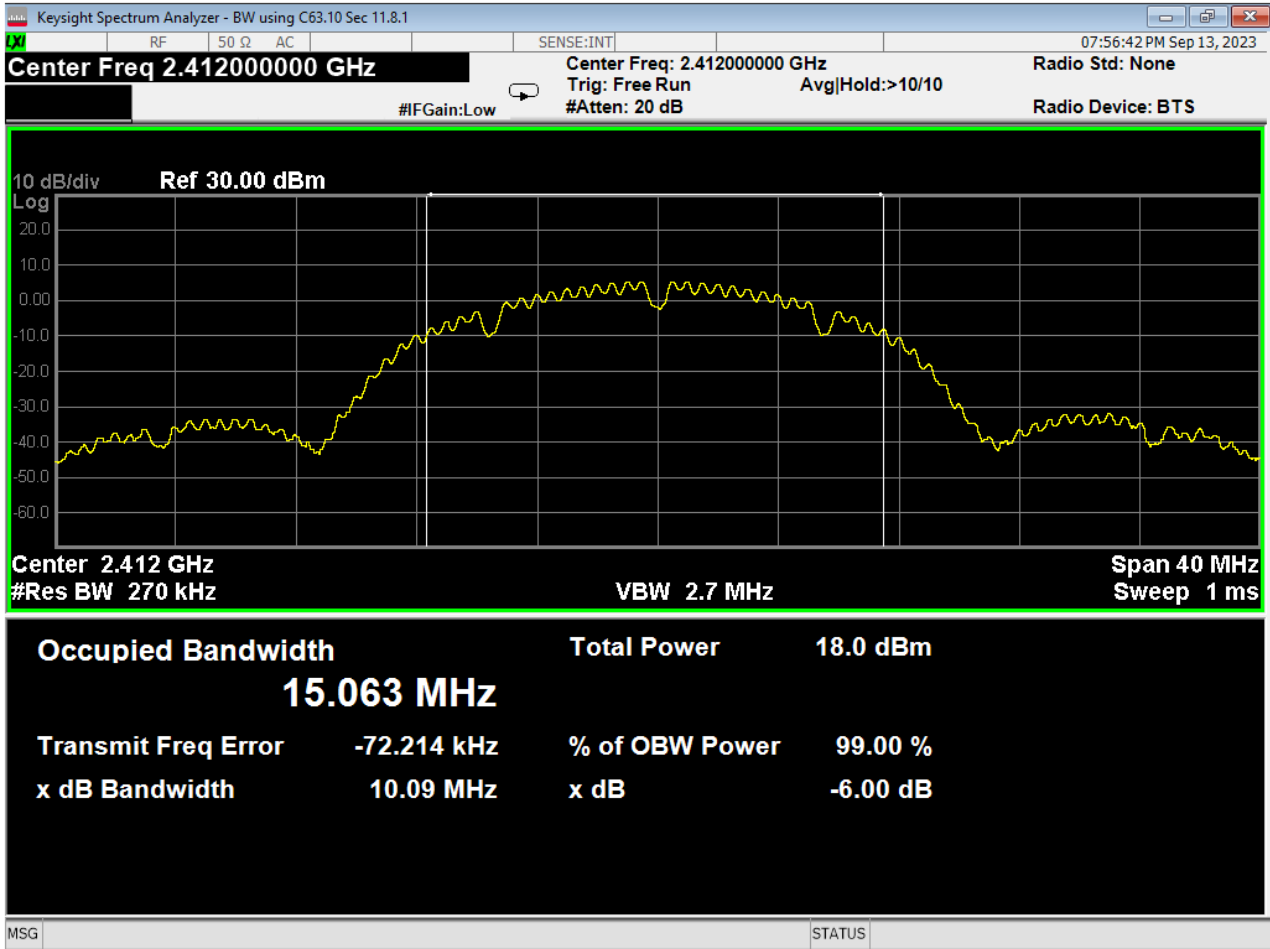


79 Occupied Bandwidth, Low, Wifi B, Low Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

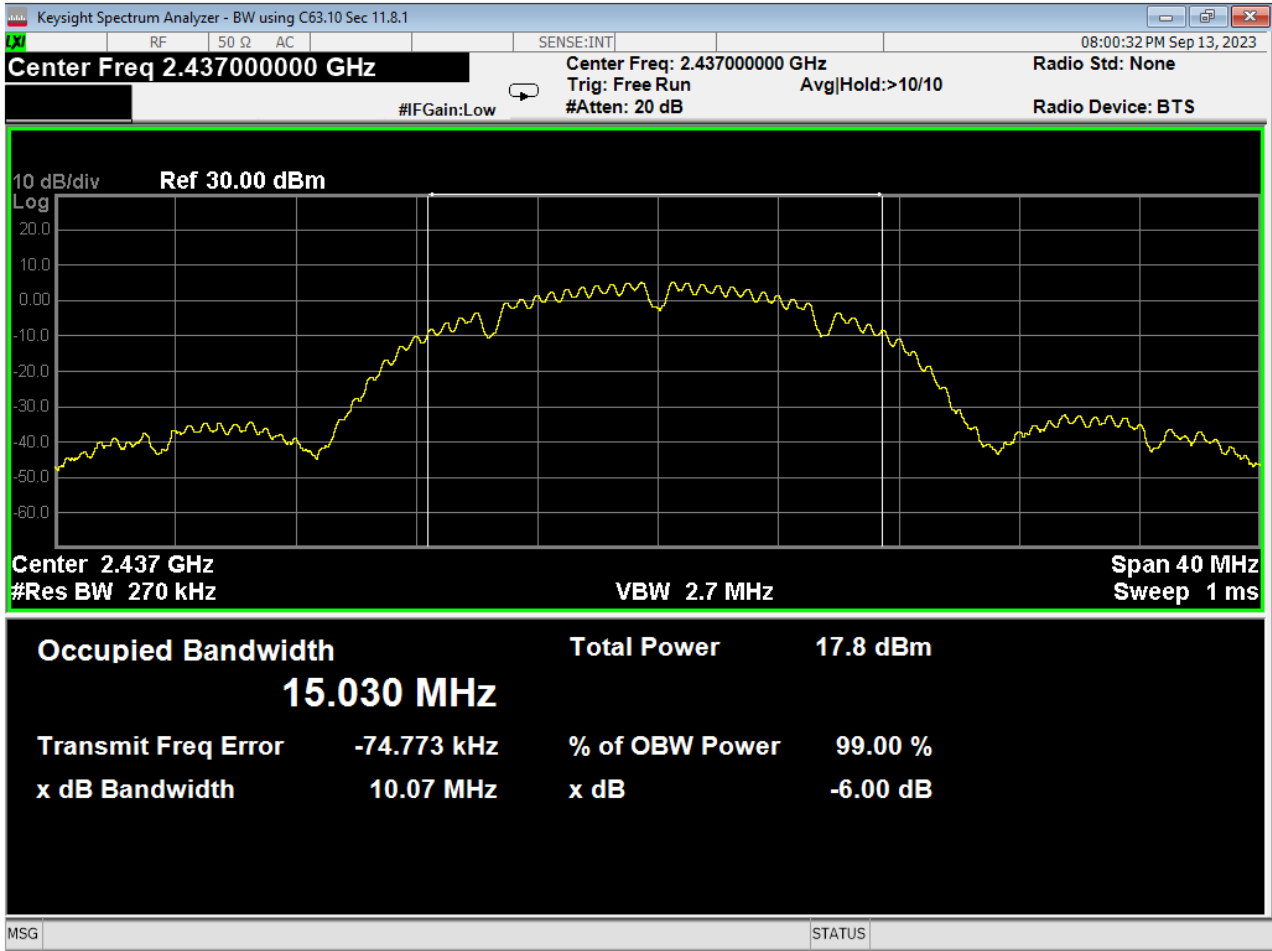


80 Occupied Bandwidth, Mid, Wifi B, Low Data Rate

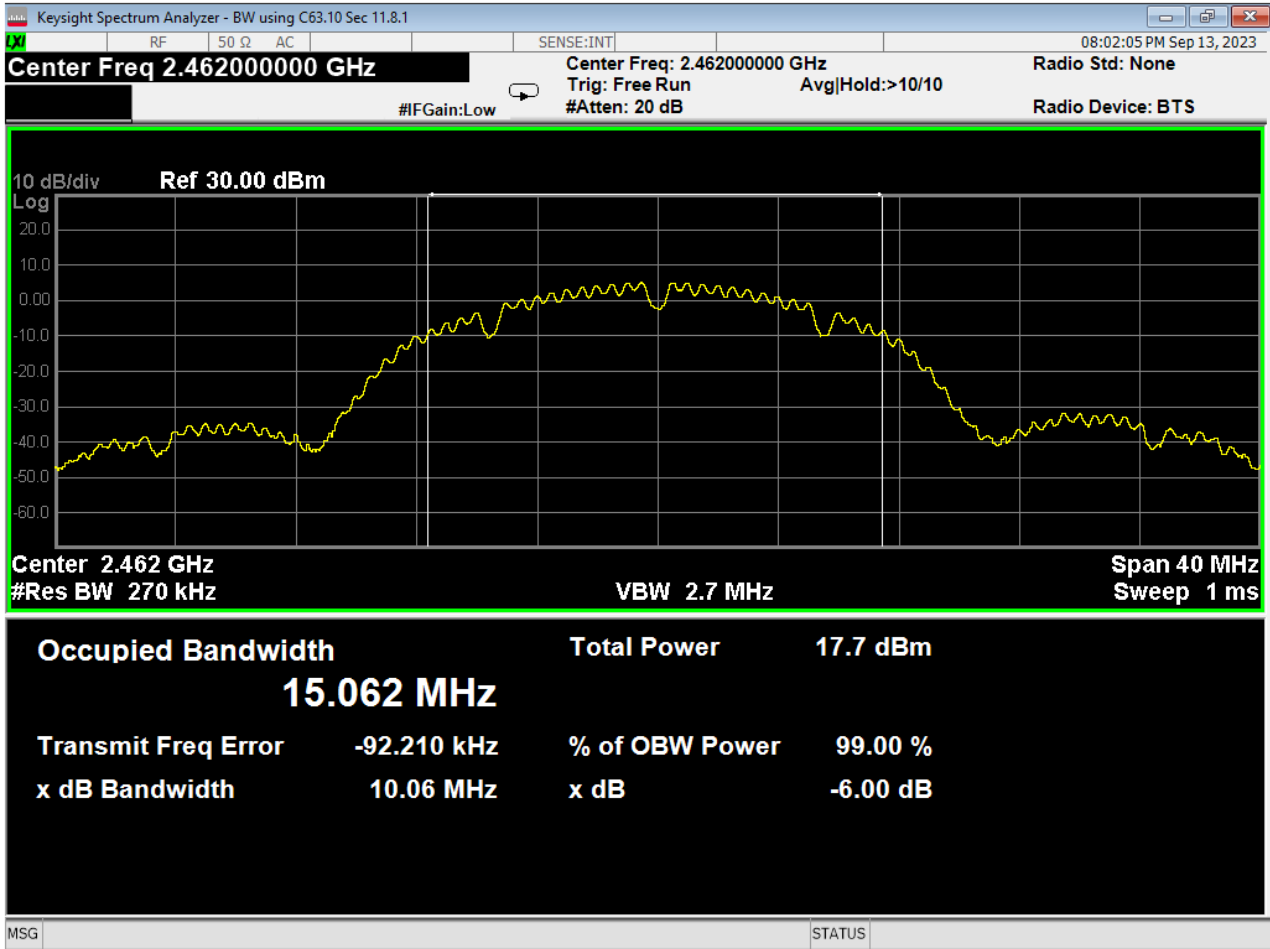

81 Occupied Bandwidth, High, Wifi B, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

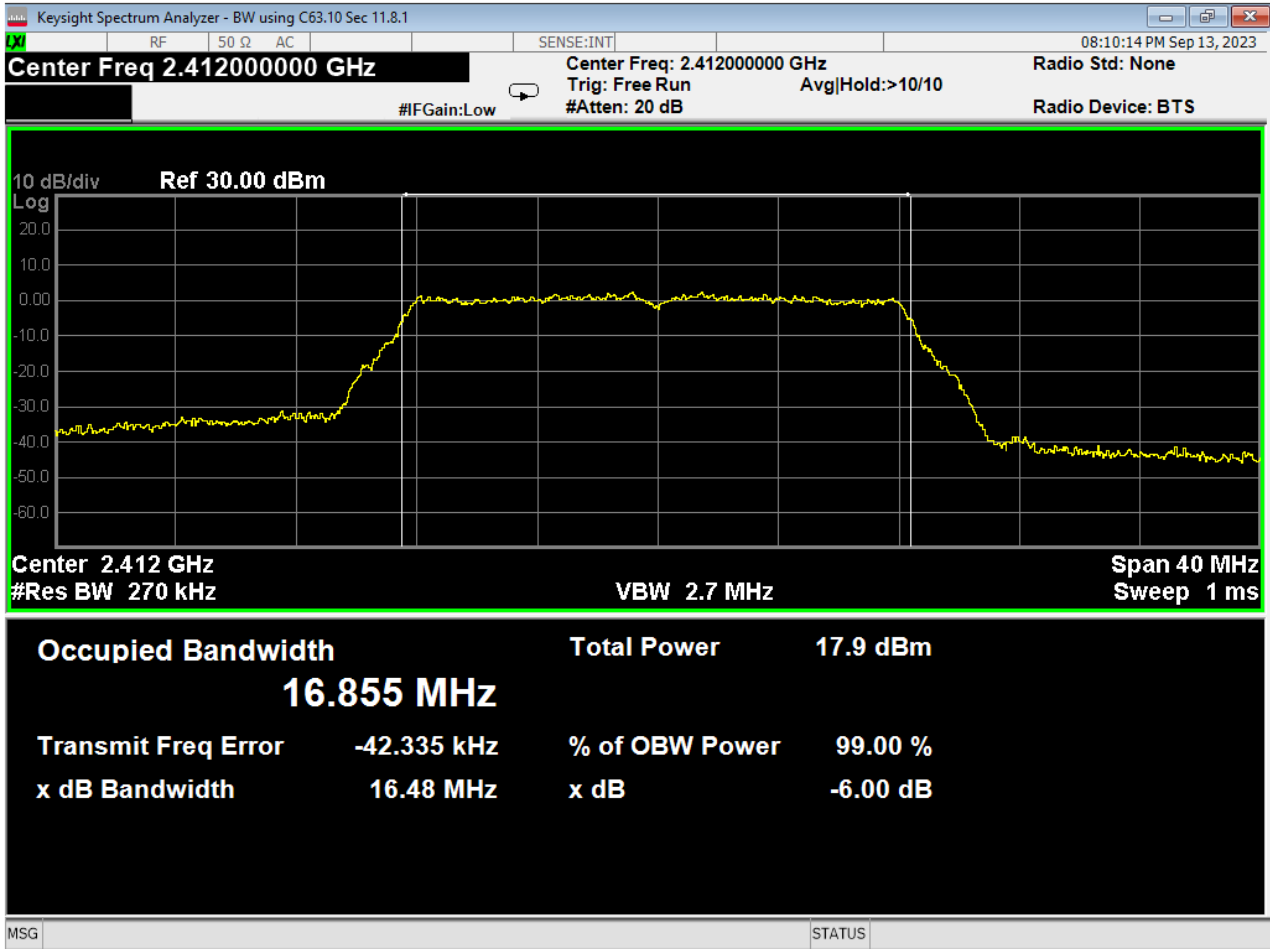

82 Occupied Bandwidth, Low, Wifi G, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

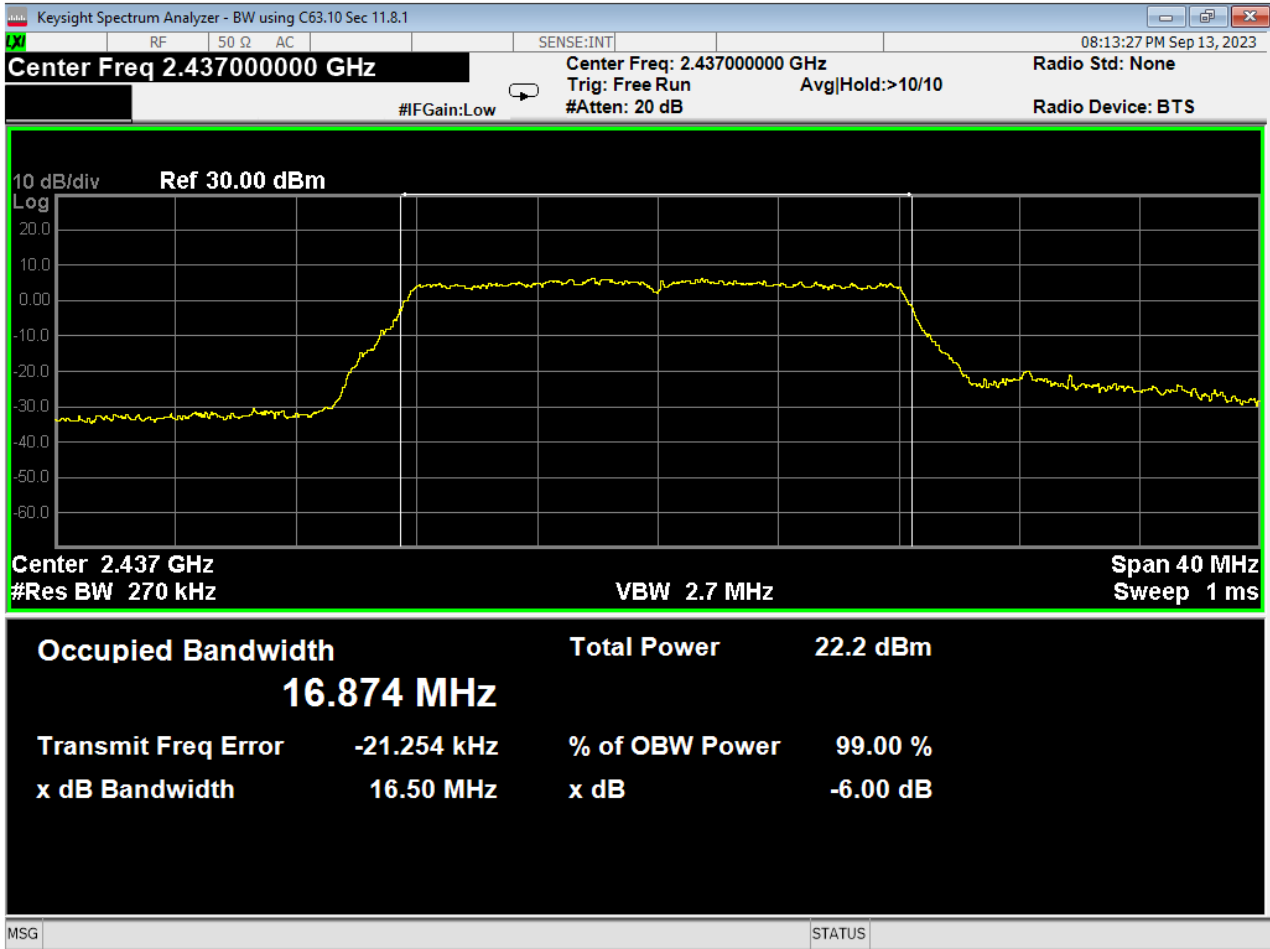

83 Occupied Bandwidth, Mid, Wifi G, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

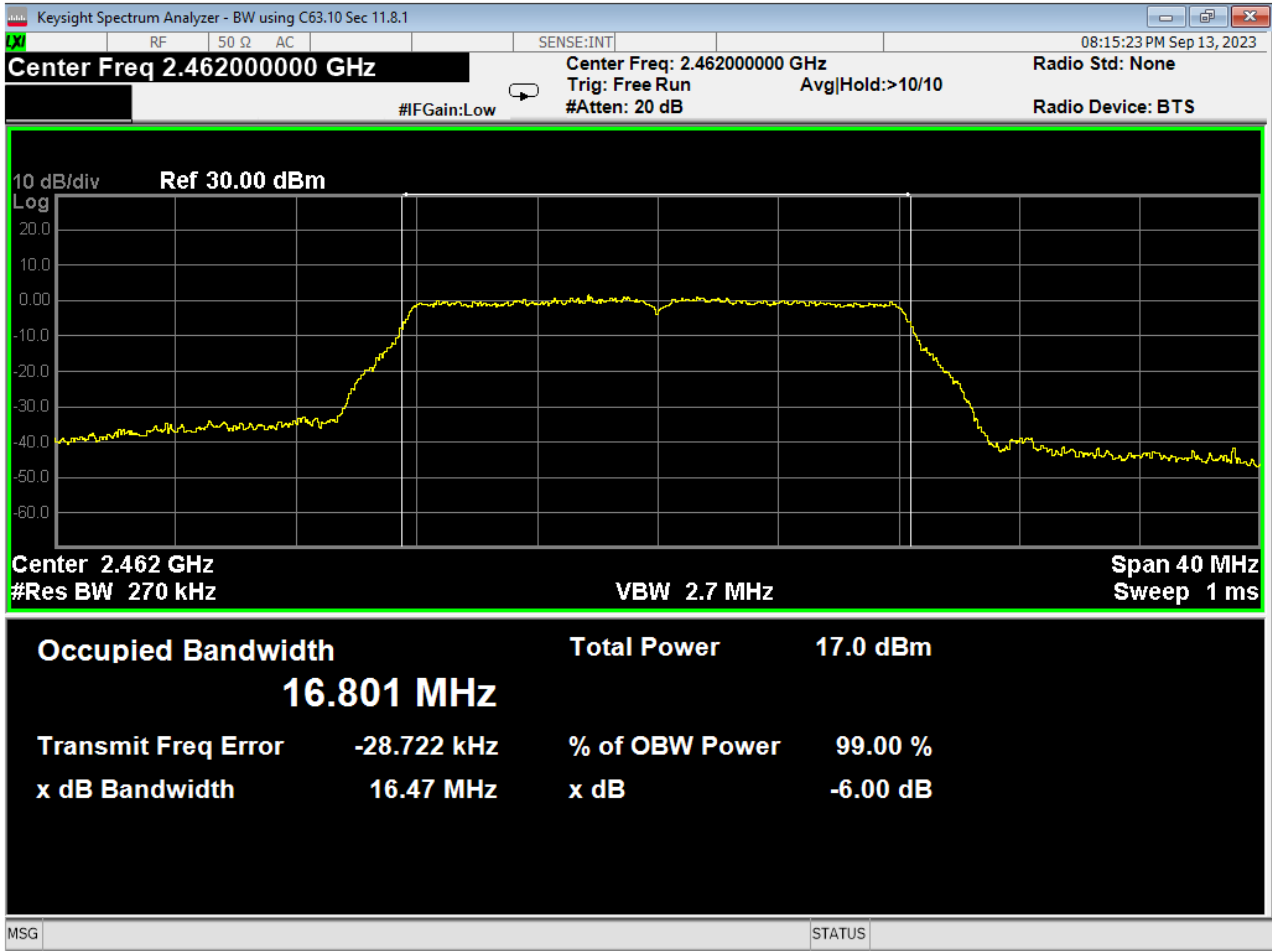

84 Occupied Bandwidth, High, Wifi G, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

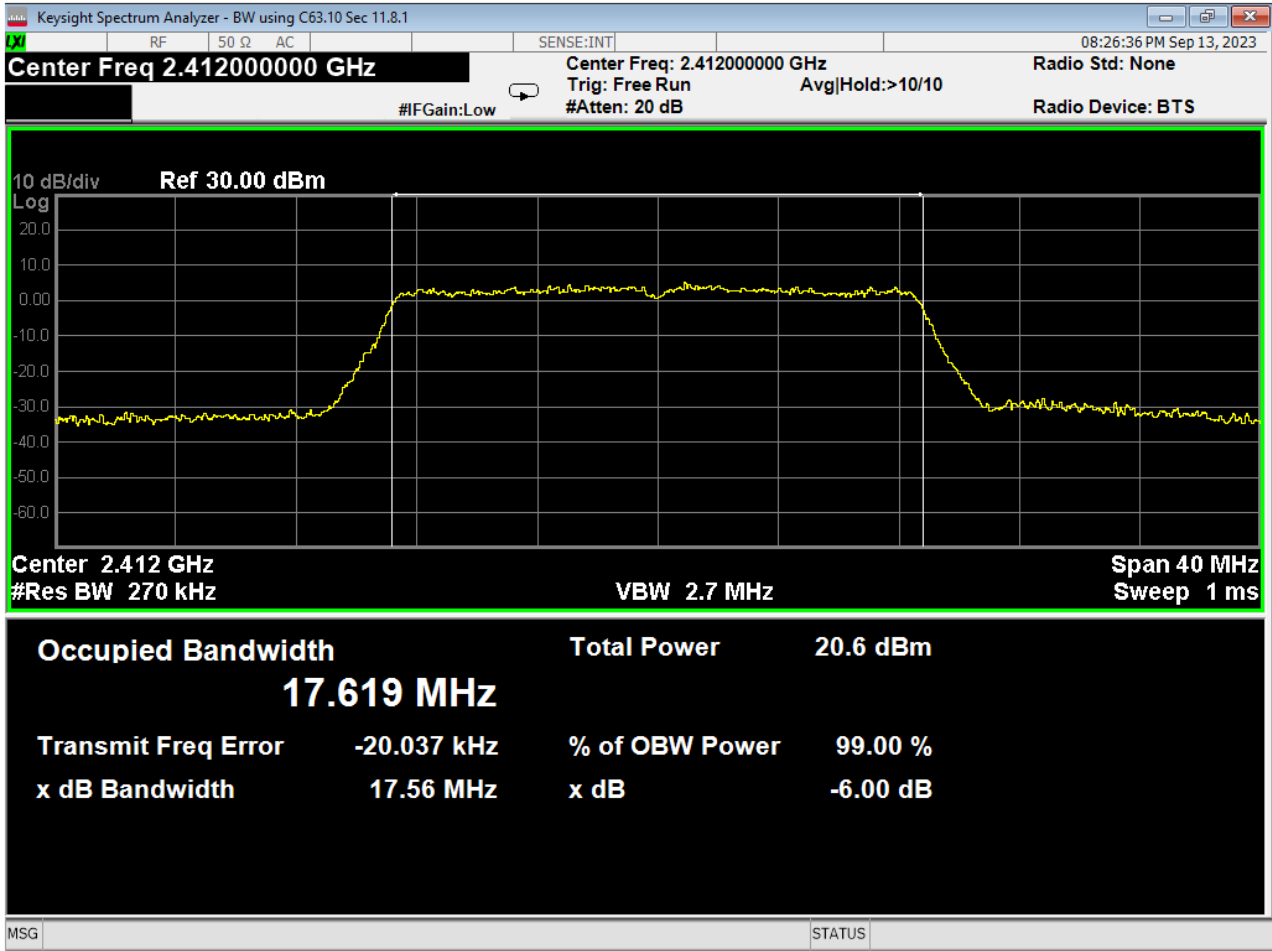

85 Occupied Bandwidth, Low, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

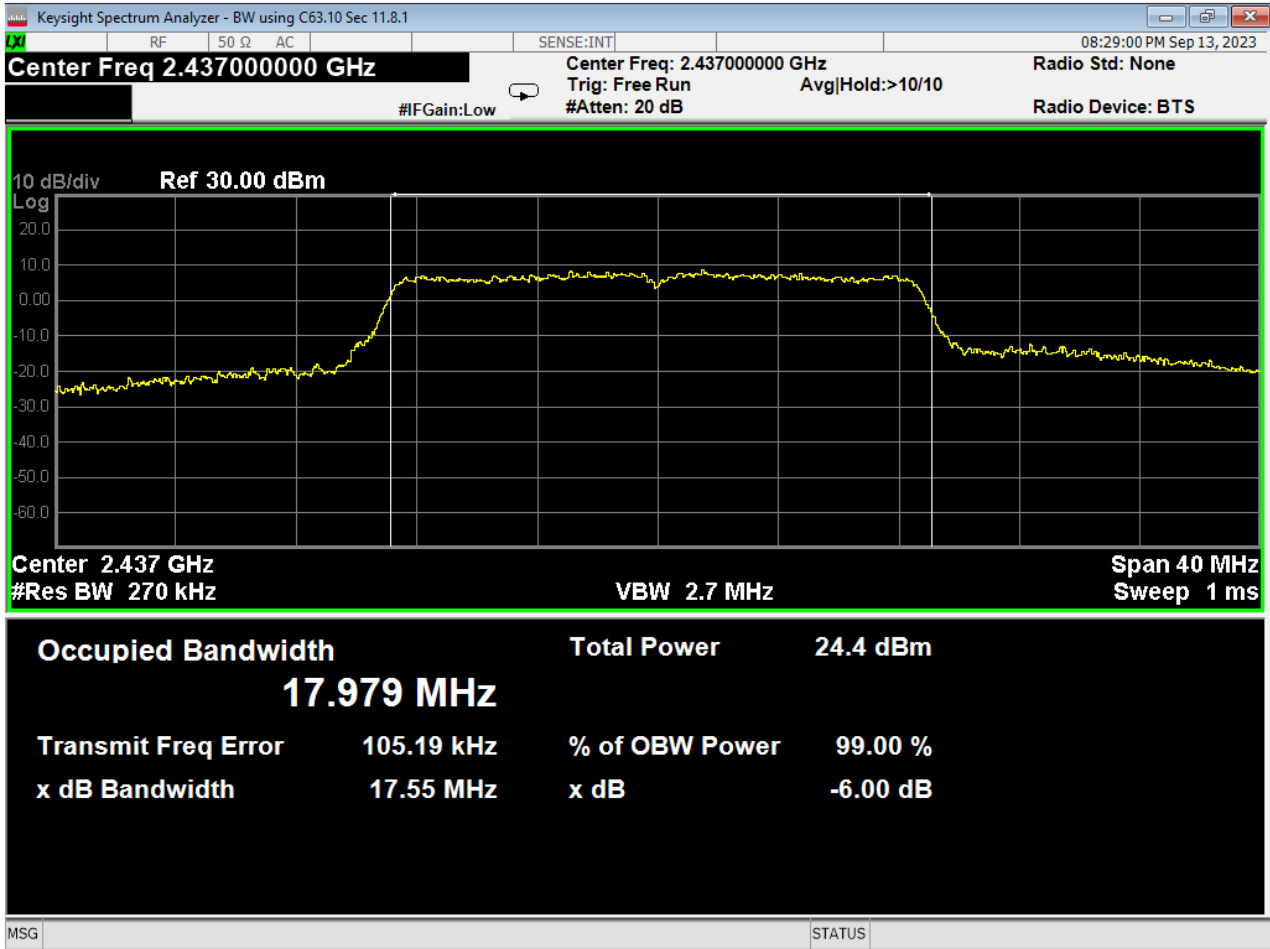

86 Occupied Bandwidth, Mid, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

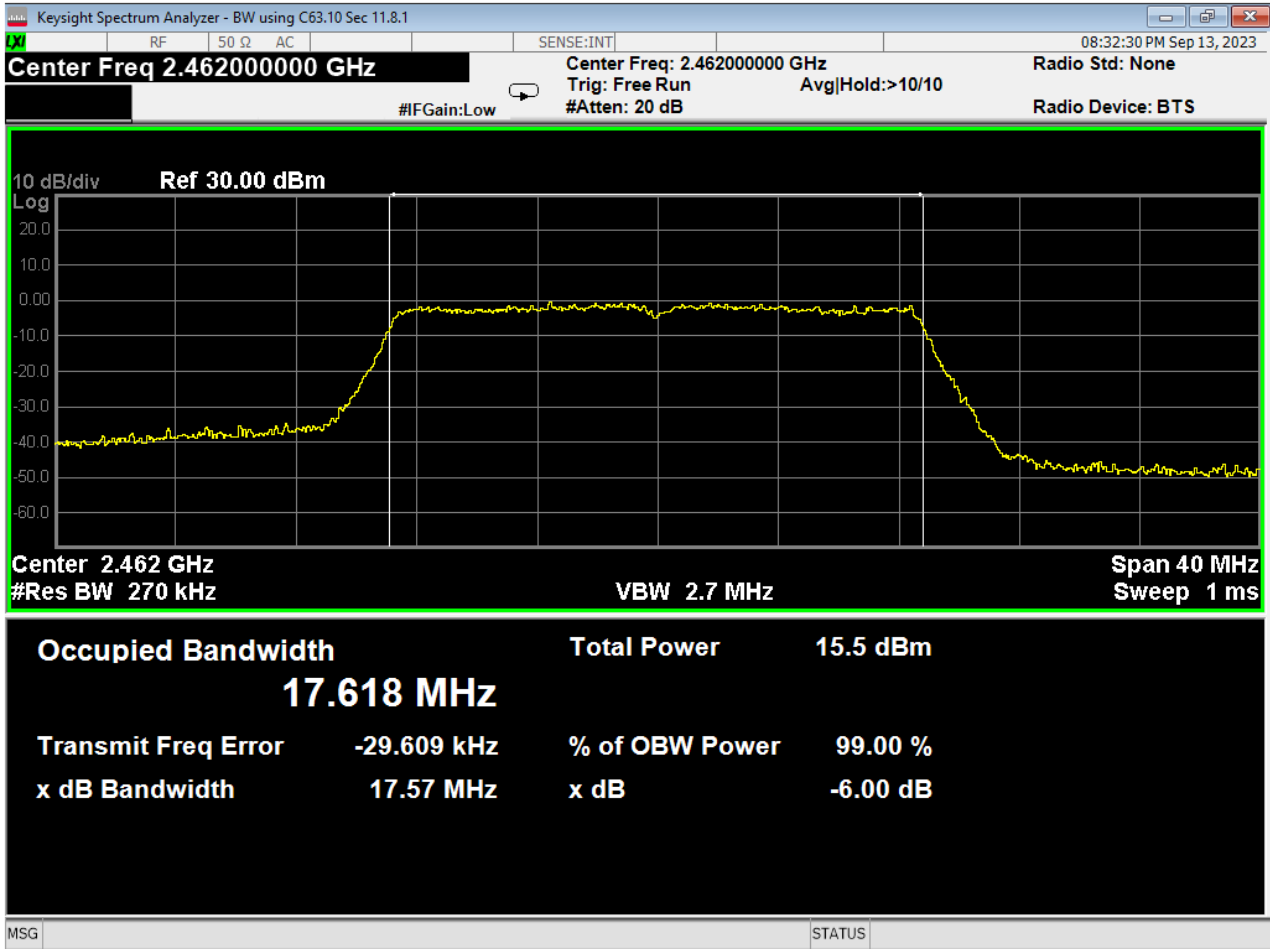

87 Occupied Bandwidth, High, Wifi N, Low Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

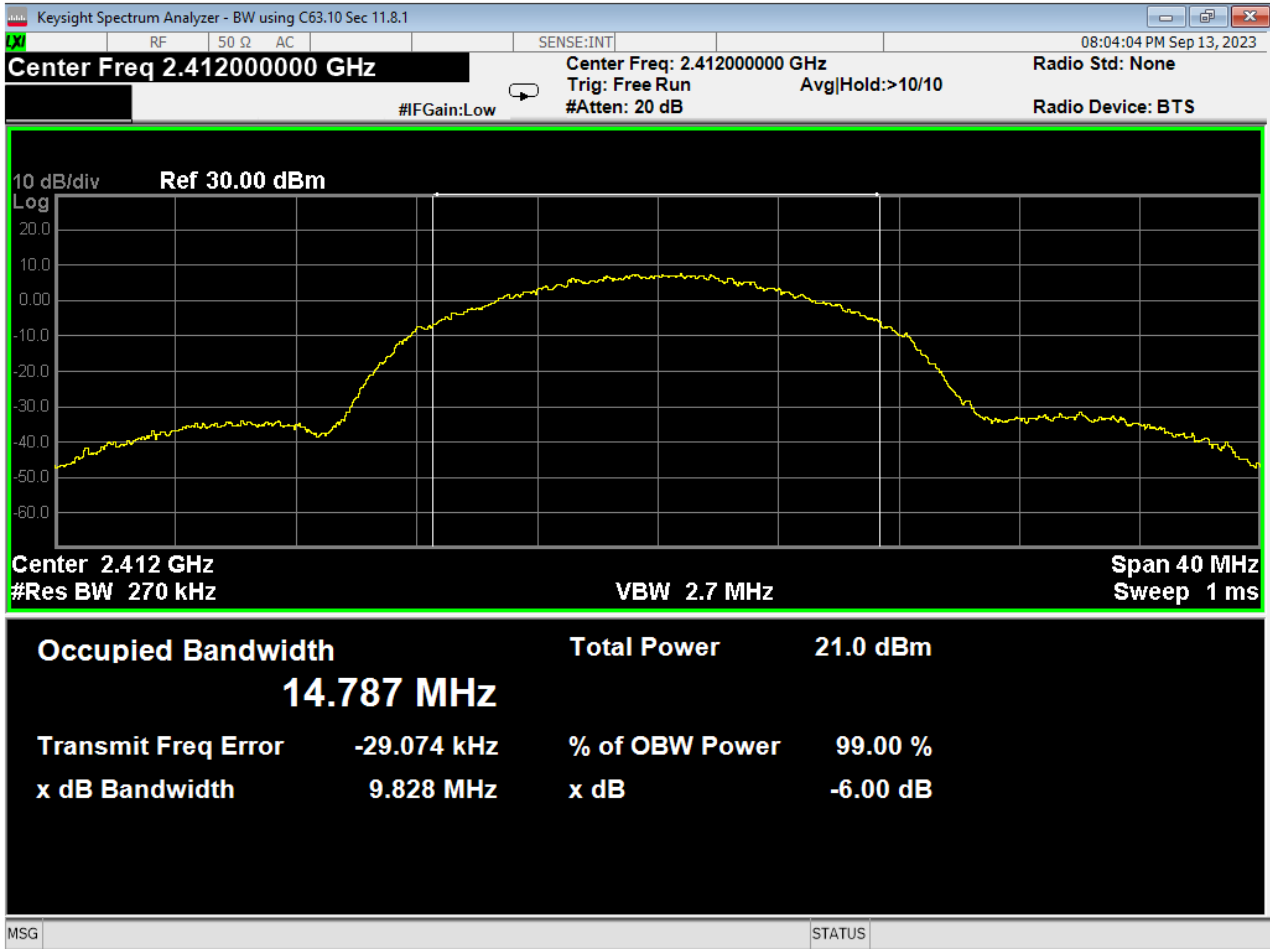

88 Occupied Bandwidth, Low, Wifi B, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

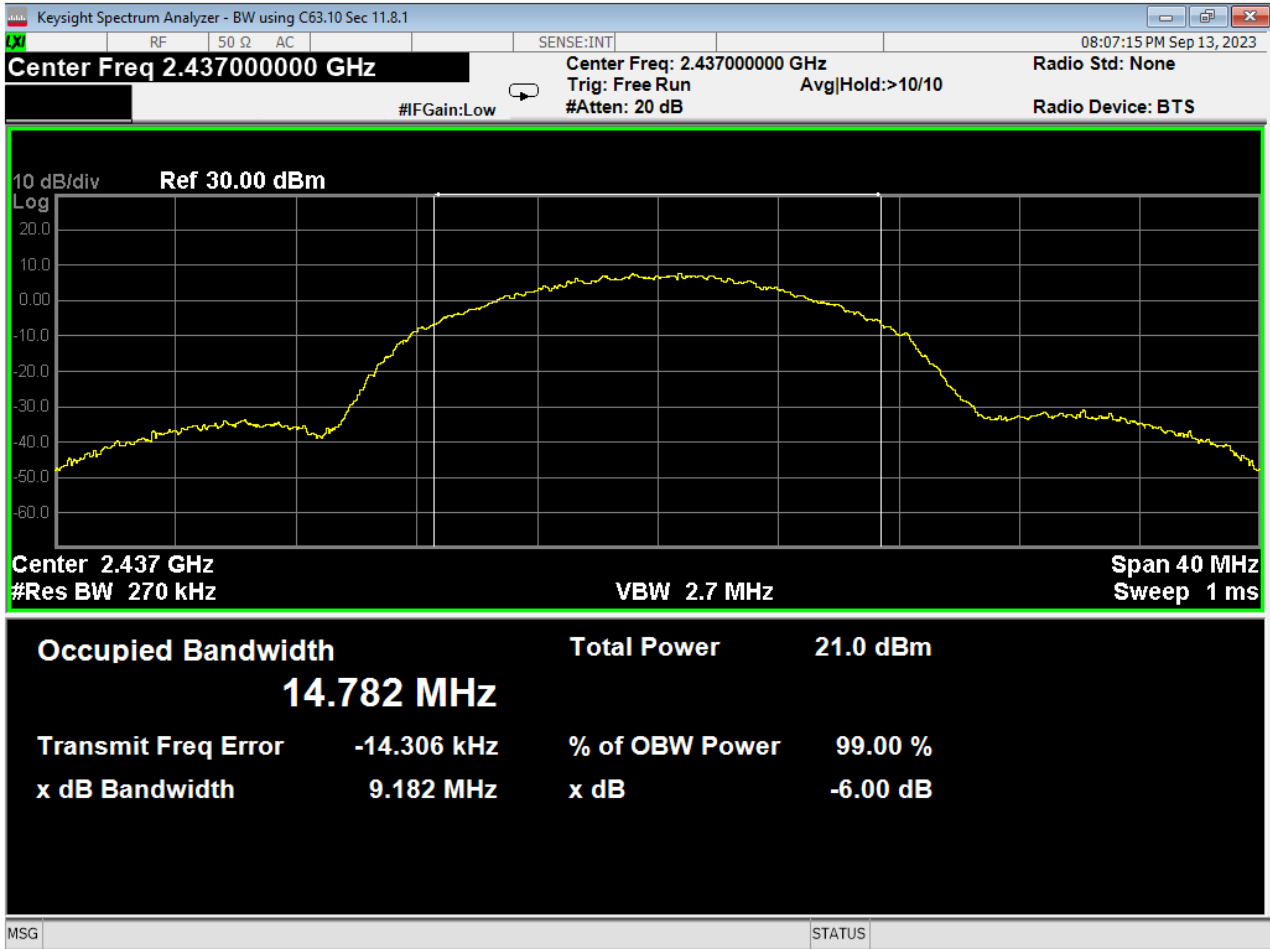

89 Occupied Bandwidth, Mid, Wifi B, High Data Rate



Report Number:


R20230808-00-E10A

Rev

A

Prepared for:


Garmin International, Inc.

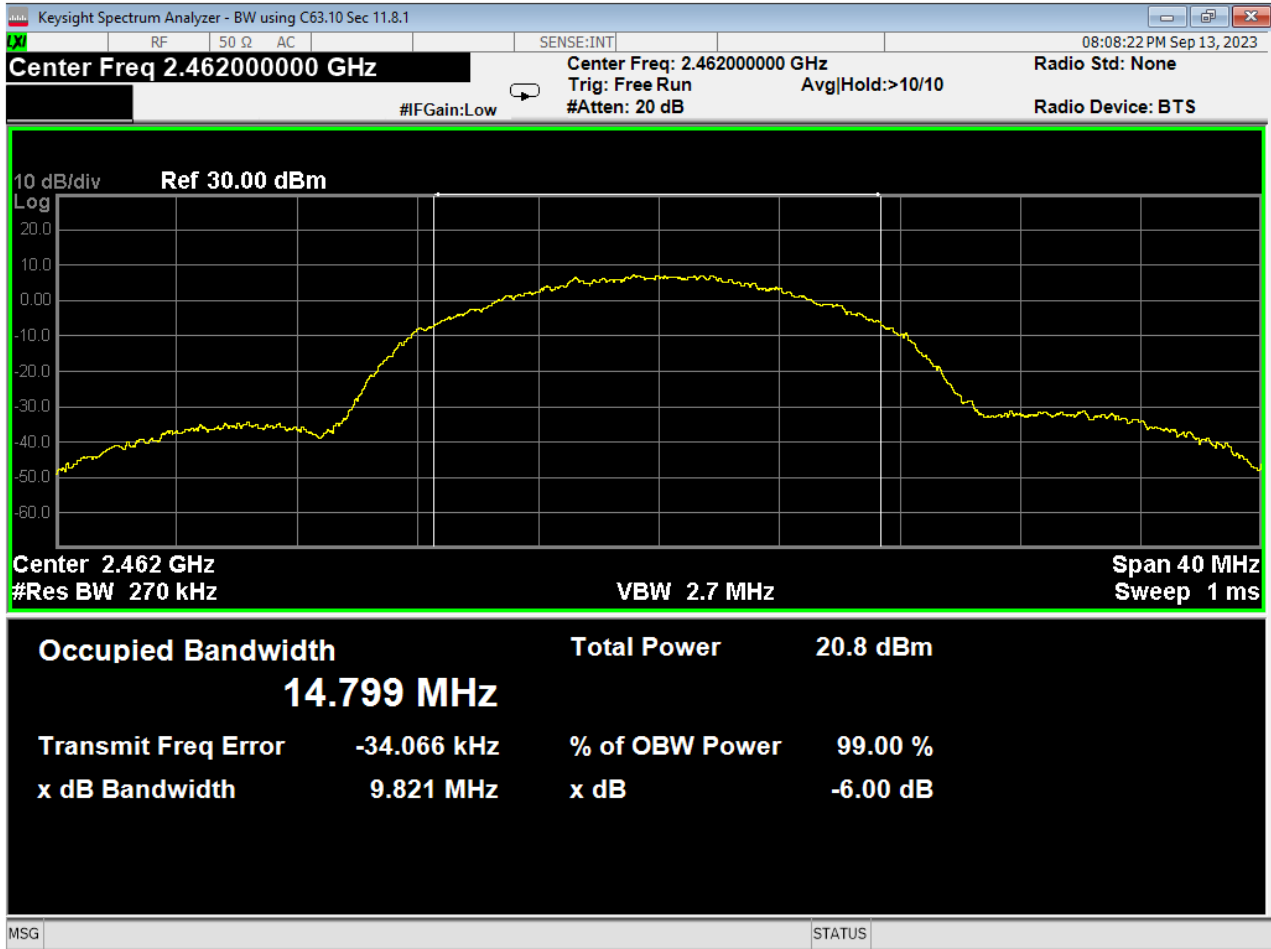

90 Occupied Bandwidth, High, Wifi B, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

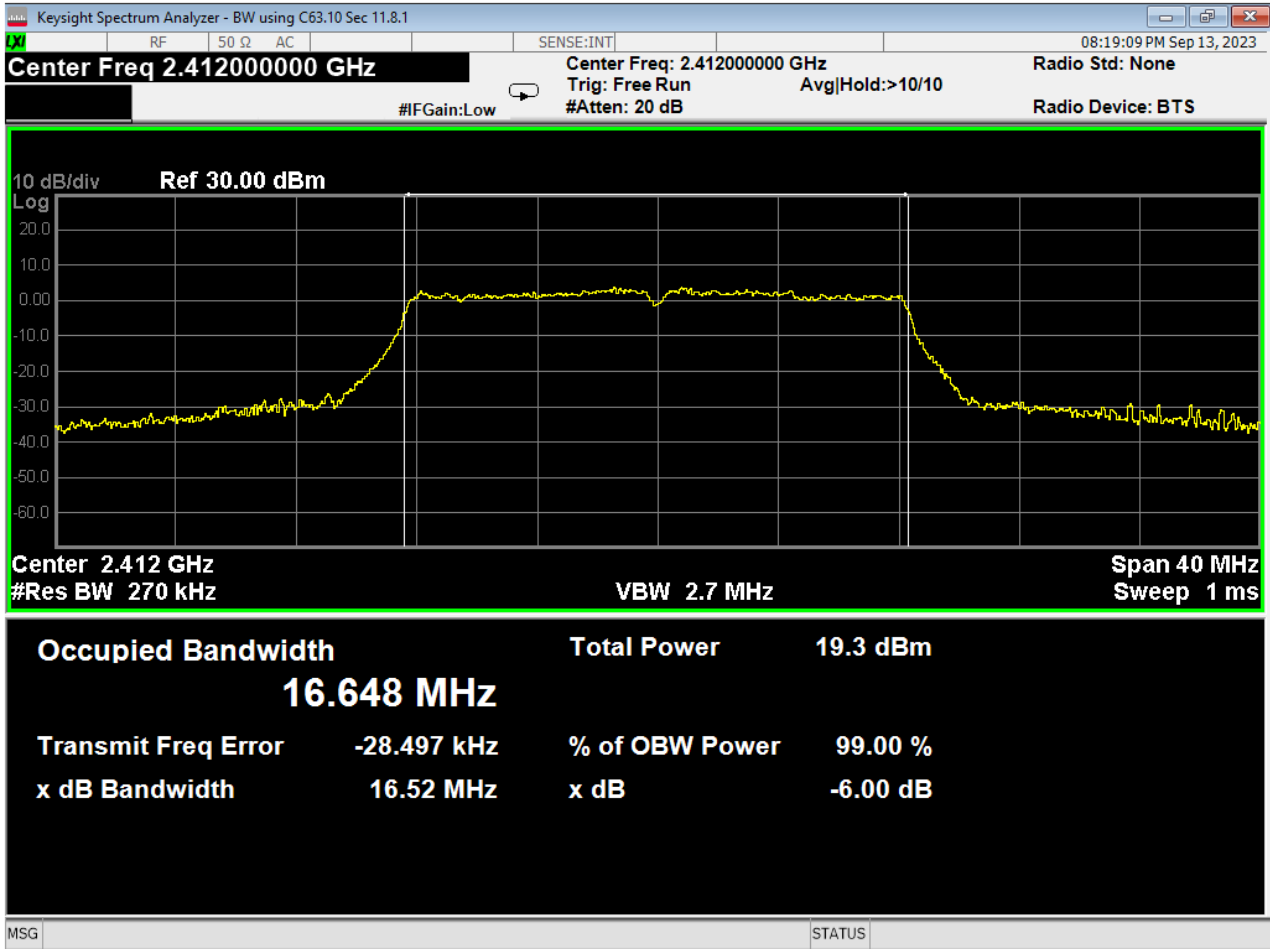

91 Occupied Bandwidth, Low, Wifi G, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

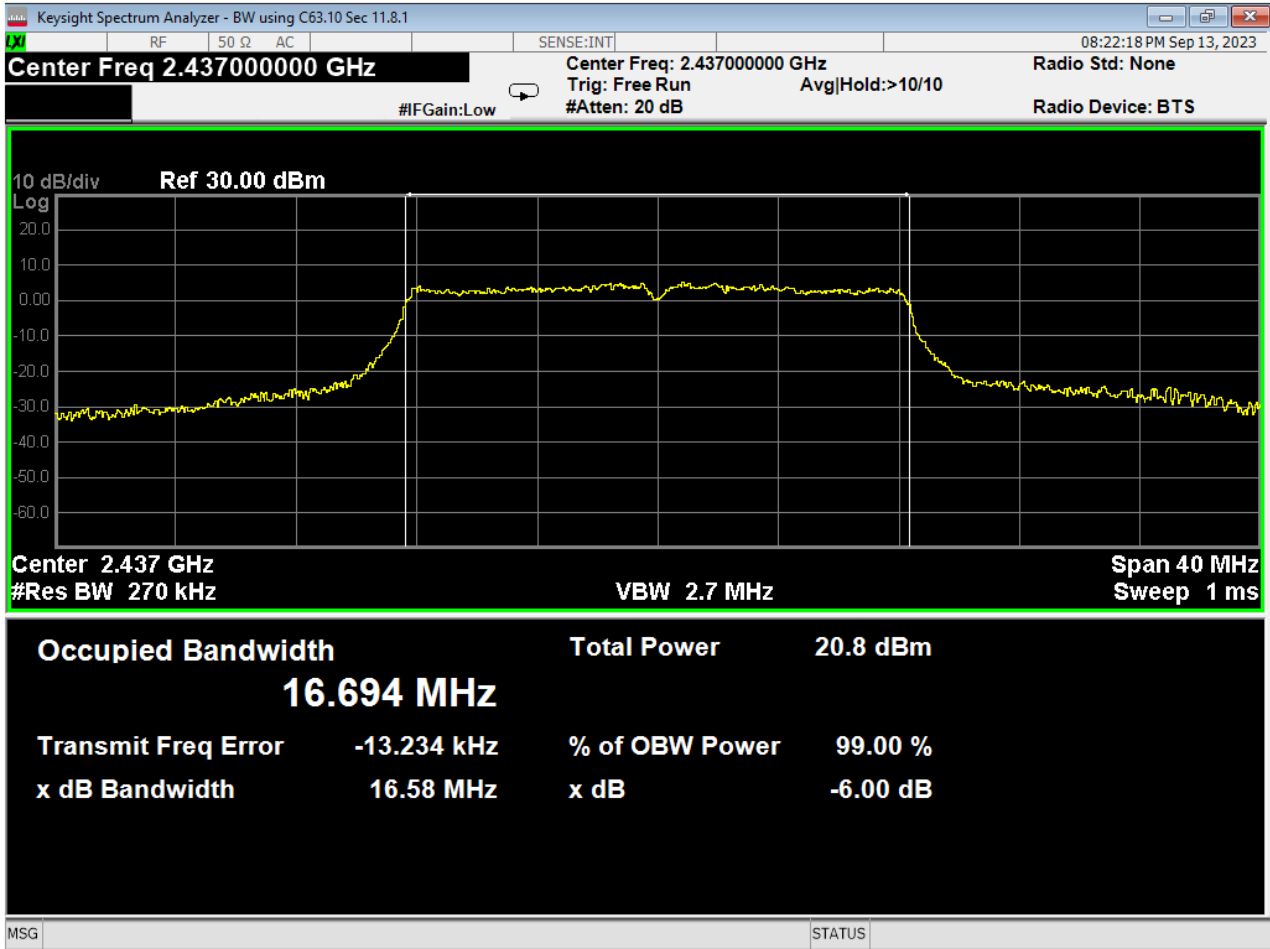

92 Occupied Bandwidth, Mid, Wifi G, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

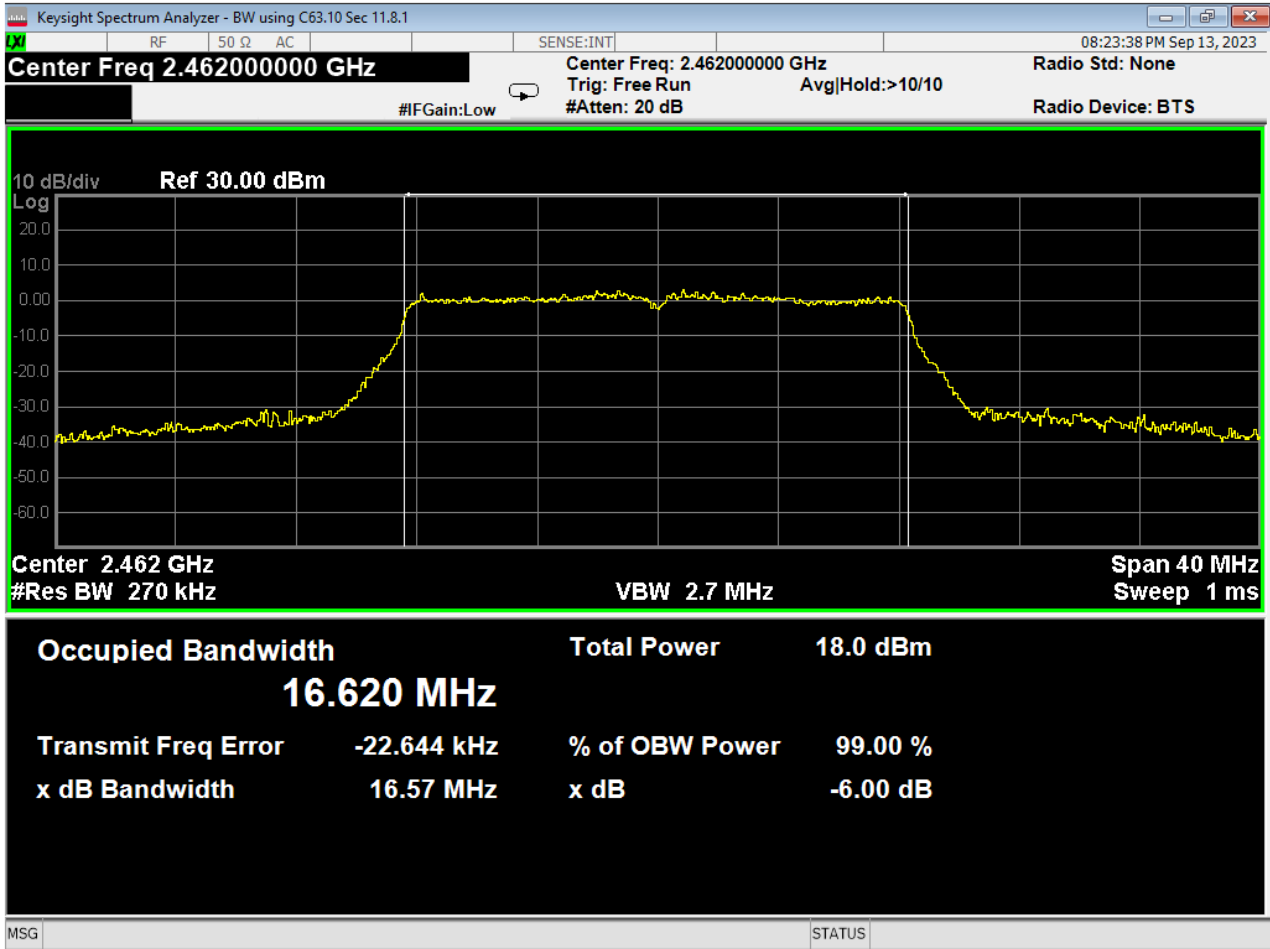

93 Occupied Bandwidth, High, Wifi G, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

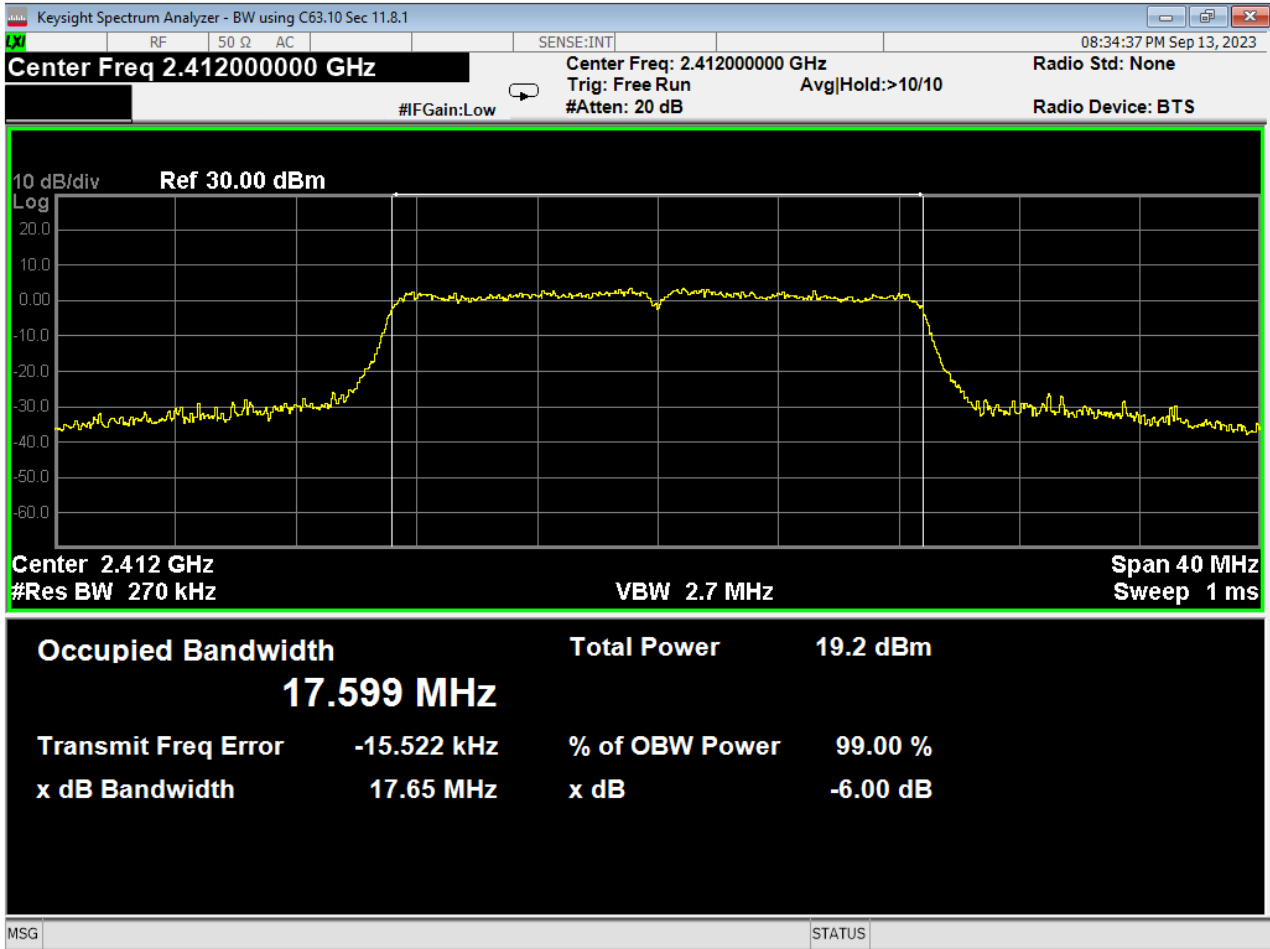

94 Occupied Bandwidth, Low, Wifi N, High Data Rate




Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

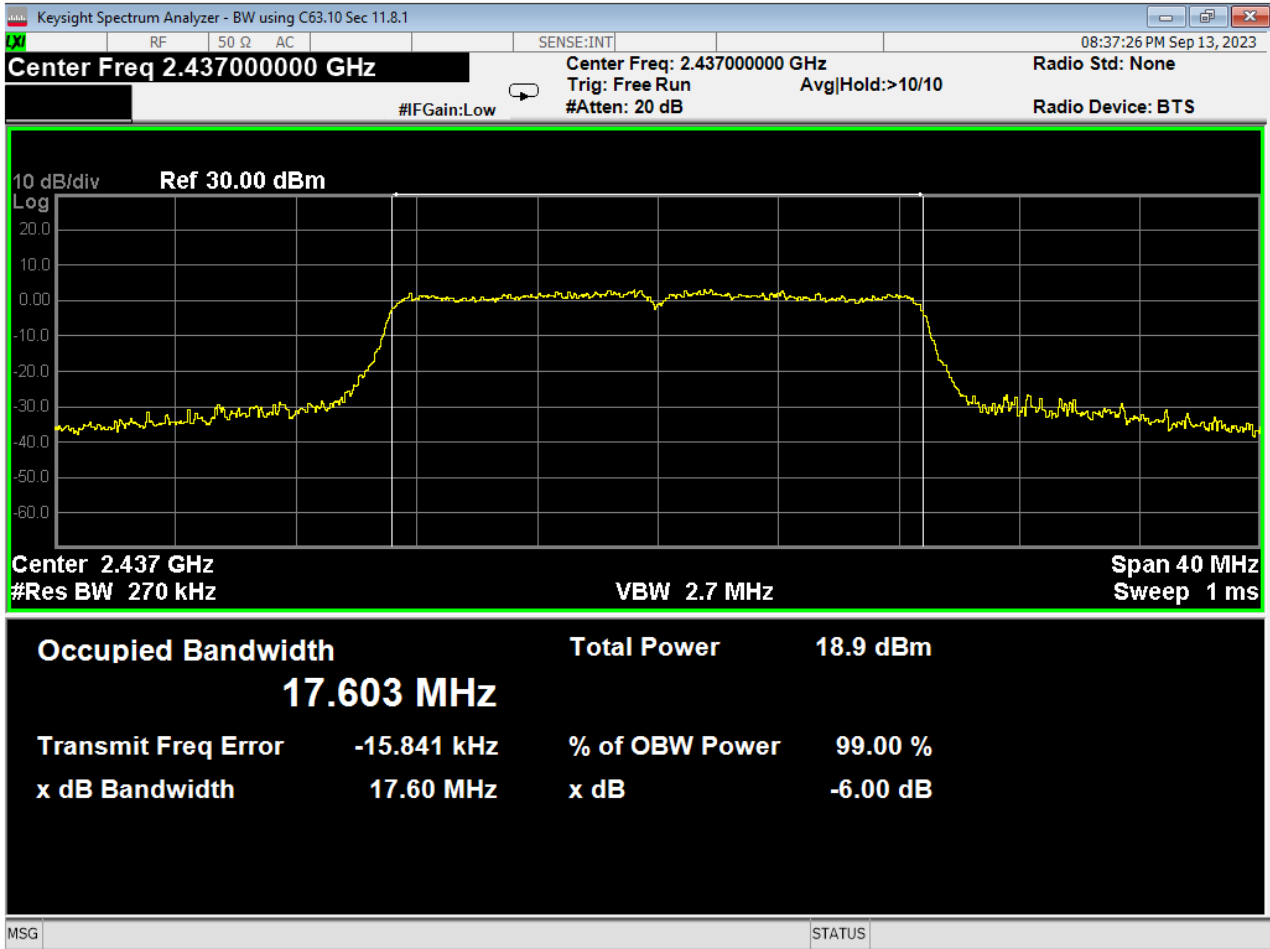

95 Occupied Bandwidth, Mid, Wifi N, High Data Rate



Report Number:	R20230808-00-E10A	Rev	A
Prepared for:	Garmin International, Inc.		

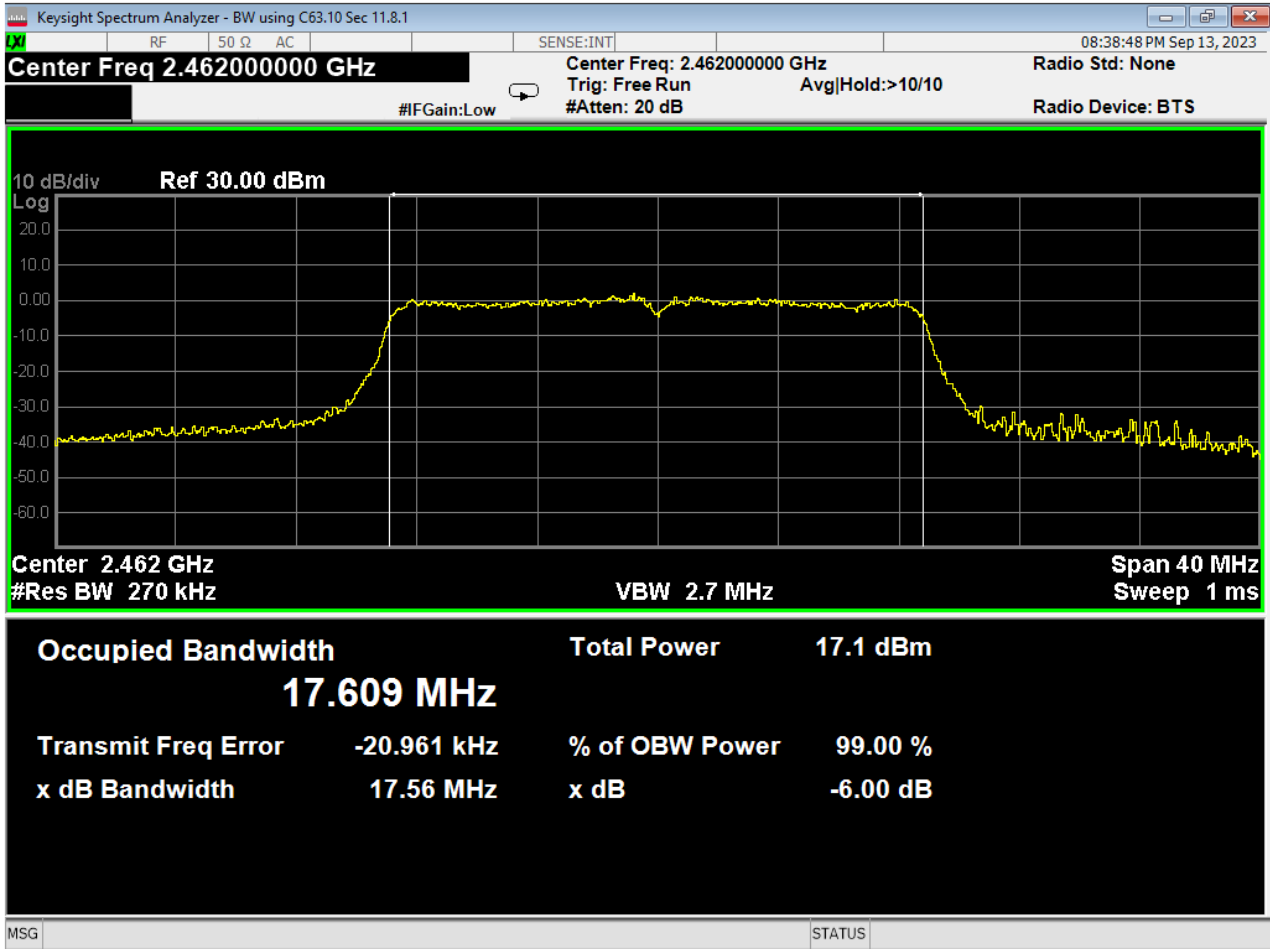

96 Occupied Bandwidth, High, Wifi N, High Data Rate



Report Number:

R20230808-00-E10A

Rev

A

Prepared for:

Garmin International, Inc.

REPORT END