

FCC/ISED Test Report


Prepared for: **Garmin International, Inc.**

Address: **1200 E. 151st Street**
 Olathe, Kansas, 66062, USA

Product: **A04453**

Test Report No: **R20220901-21-E5B**

Approved by:

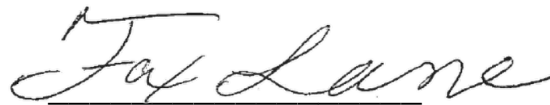

Fox Lane
EMC Test Engineer

DATE: **December 6, 2022**

Total Pages: **88**

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above-named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	14 November 2022	Issued by – FLane Reviewed by- KVepuri Prepared by FLane, GLarsen
A	18 November 2022	Corrected Model Number - FL
B	6 December 2022	Removed Antenna Gain - FL



Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page 2

1.0 Summary of test results 3

2.0 EUT Description 4

2.1 Equipment under test 5

2.2 Description of test modes 5

2.3 Description of support units 5

3.0 Laboratory and General Test Description 6

3.1 Laboratory description 6

3.2 Test personnel 6

3.3 Test equipment 7

3.4 General Test Procedure and Setup for Radio Measurements 8

4.0 Results 9

4.1 Output Power 13

4.2 Bandwidth 14

4.3 Duty Cycle 15

4.4 Radiated emissions 16

4.5 Conducted Spurious Emissions 25

4.6 Band edges 31

4.7 Power Spectral Density 33

4.8 Conducted AC Mains Emissions 34


Appendix A: Sample Calculation 37

Appendix B – Measurement Uncertainty 39

Appendix C – Graphs and Tables 40

REPORT END 88

1.0 SUMMARY OF TEST RESULTS

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass

2.0 EUT DESCRIPTION



Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	A04453
IC	1792A-04453
FCC ID	IPH-04453
EUT Received	3 October 2022
EUT Tested	3 October 2022- 7 November 2022
Serial No.	3426283246 (Radiated Measurements) 3426283239 (Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery / 5VDC Charger: Garmin (Phi Hong) Model: AQ27A-59CFA GPN: 362-00118-00 (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES


The operating range of the EUT is dependent on the device type found in section 2.1:

Data Rates:		For 802.11x Transmissions:	
Modulation	Low/High Data rate	Channel	Frequency
802.11b	1MB/11MB	Low	2412 MHz
802.11g	6MB/54MB	Mid	2437 MHz
802.11n	MCS0/MCS7	High	2462 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius




3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Karthik Vepuri	Test Engineer	Review and Editing
2	Blake Winter	Test Engineer	Testing
3	Grace Larsen	Test Engineer	Testing and Report
4	Ethan Schmidt	Test Technician	Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)**	N9038A	MY59050109	July 19, 2022	July 19, 2024
Keysight MXE Signal Analyzer (26.5GHz)**	N9038A	MY56400083	July 19, 2022	July 19, 2024
Keysight EXA Signal Analyzer**	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A082918-1	July 26, 2022	July 26, 2023
ETS EMCO Red Horn Antenna	3115	00218655	July 21, 2022	July 21, 2023
EMCO Horn Antenna***	3116	2576	March 9, 2020	March 9, 2023
Com-Power LISN, Single Phase**	LI-220C	20070017	July 18, 2022	July 18, 2024
8447F POT H64 Preampfier*	8447F POT H64	3113AD4667	March 21, 2022	March 21, 2024
Rohde & Schwarz Preampfier**	TS-PR18	3545700803	August 22, 2022	August 22, 2024
Trilithic High Pass Filter*	6HC330	23042	March 21, 2022	March 21, 2024
ETS – Lindgren- VSWR on 10m Chamber***	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber*	10m Semi-anechoic chamber-NSA	NCEE-001	May 25, 2022	May 25, 2024
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preampfier to antenna)*	MFR-57500	01-07-002	March 21, 2022	March 21, 2024
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)*	PE9128	NCEEBH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)*	PE9128	NCEEBH2	September 24, 2021	September 24, 2023

*Internal Characterization

**2 Year Cal Cycle

***3 Year Cal Cycle

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

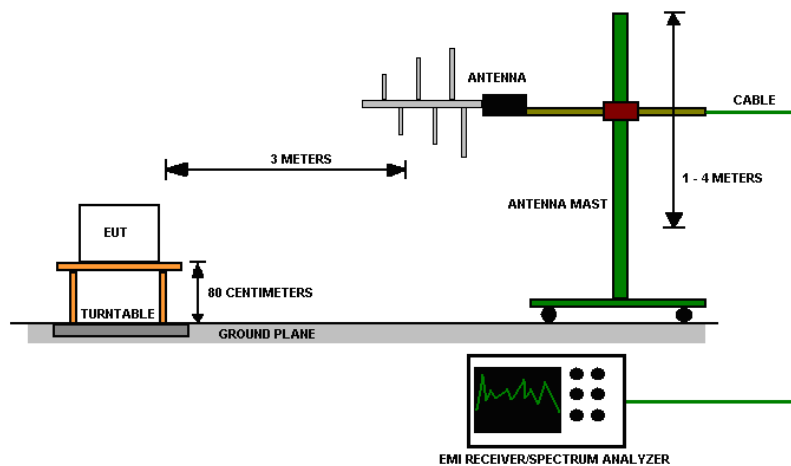


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DTS Radio Measurements Low Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.92	10.04	14.400	27.542	1.179	PASS
Mid	802.11 b	15.01	10.05	17.070	50.933	4.13	PASS
High	802.11 b	14.86	10.04	11.980	15.776	-1.046	PASS
Low	802.11 g	16.67	16.55	8.29	6.745	-15.725	PASS
Mid	802.11 g	16.67	16.48	12.82	19.143	-11.682	PASS
High	802.11 g	16.69	16.54	7.10	5.129	-16.826	PASS
Low	802.11 n	17.486	17.59	8.89	7.745	-15.281	PASS
Mid	802.11 n	17.476	17.58	12.99	19.907	-11.364	PASS
High	802.11 n	17.459	17.09	8.05	6.383	-17.056	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit =500 kHz				Output Power Limit = 30 dBm; PSD Limit = 8 dBm			
Unrestricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2400.00	77.17	112.57	35.41	30.00	PASS
Low	802.11 g	2400.00	66.83	102.92	36.09	30.00	PASS
Low	802.11 n	2400.00	66.18	102.54	36.36	30.00	PASS
High	802.11 b	2483.50	55.26	110.47	55.21	30.00	PASS
High	802.11 g	2483.50	56.67	102.40	45.73	30.00	PASS
High	802.11 n	2483.50	57.67	101.83	44.16	30.00	PASS
Radiated Peak Restricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	56.25	Peak	73.98	17.73	PASS
Low	802.11 g	2390.00	59.86	Peak	73.98	14.12	PASS
Low	802.11 n	2390.00	62.84	Peak	73.98	11.14	PASS
High	802.11 b	2483.50	56.83	Peak	73.98	17.16	PASS
High	802.11 g	2483.50	57.90	Peak	73.98	16.08	PASS
High	802.11 n	2483.50	59.72	Peak	73.98	14.26	PASS

*Limit shown is the peak limit taken from FCC Part 15.209




Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

Radiated Average Restricted Band-Edge Low Data Rate

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	44.52	Average	53.98	9.46	PASS
Low	802.11 g	2390.00	47.07	Average	53.98	6.91	PASS
Low	802.11 n	2390.00	48.59	Average	53.98	5.39	PASS
High	802.11 b	2483.50	46.02	Average	53.98	7.96	PASS
High	802.11 g	2483.50	46.91	Average	53.98	7.07	PASS
High	802.11 n	2483.50	47.86	Average	53.98	6.12	PASS

*Limit shown is the average limit taken from FCC Part 15.209


	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

DTS Radio Measurements High Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.57	9.17	13.820	24.099	-7.997	PASS
Mid	802.11 b	14.59	9.51	17.170	52.119	-4.964	PASS
High	802.11 b	14.58	9.16	11.710	14.825	-9.691	PASS
Low	802.11 g	16.50	16.50	9.380	8.670	-13.699	PASS
Mid	802.11 g	16.53	16.49	12.020	15.922	-10.695	PASS
High	802.11 g	16.51	16.50	7.990	6.295	-14.716	PASS
Low	802.11 n	17.43	17.59	9.160	8.241	-15.187	PASS
Mid	802.11 n	17.37	17.56	9.770	9.484	-14.719	PASS
High	802.11 n	17.45	17.45	8.400	6.918	-16.371	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit =500 kHz				Output Power Limit = 30 dBm; PSD Limit = 8 dBm			

Unrestricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2390.00	76.46	112.61	36.15	30.00	PASS
Low	802.11 g	2390.00	67.36	104.71	37.36	30.00	PASS
Low	802.11 n	2390.00	70.20	104.92	34.72	30.00	PASS
High	802.11 b	2483.50	55.06	110.58	55.52	30.00	PASS
High	802.11 g	2483.50	57.25	103.22	45.97	30.00	PASS
High	802.11 n	2483.50	60.83	103.81	42.98	30.00	PASS


Radiated Peak Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	56.45	Peak	73.98	17.53	PASS
Low	802.11 g	2390.00	61.35	Peak	73.98	12.63	PASS
Low	802.11 n	2390.00	63.97	Peak	73.98	10.01	PASS
High	802.11 b	2483.50	56.67	Peak	73.98	17.31	PASS
High	802.11 g	2483.50	60.93	Peak	73.98	13.05	PASS
High	802.11 n	2483.50	64.69	Peak	73.98	9.29	PASS

*Limit shown is the peak limit taken from FCC Part 15.209

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

Radiated Average Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	44.31	Average	53.98	9.67	PASS
Low	802.11 g	2390.00	47.70	Average	53.98	6.28	PASS
Low	802.11 n	2390.00	48.94	Average	53.98	5.04	PASS
High	802.11 b	2483.50	45.99	Average	53.98	7.99	PASS
High	802.11 g	2483.50	47.37	Average	53.98	6.61	PASS
High	802.11 n	2483.50	48.95	Average	53.98	5.03	PASS

*Limit shown is the average limit taken from FCC Part 15.209

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method: Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.




Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

All Modulations/Transmitters in this report had a duty cycle of >98%

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6


Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

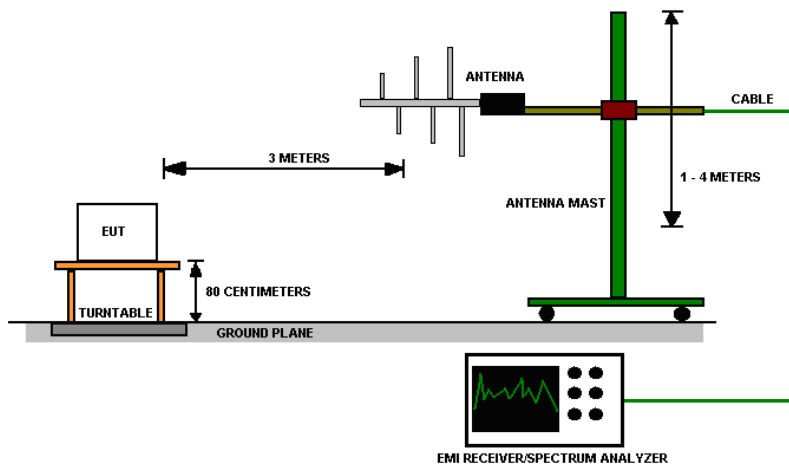


Figure 3 - Radiated Emissions Test Setup

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

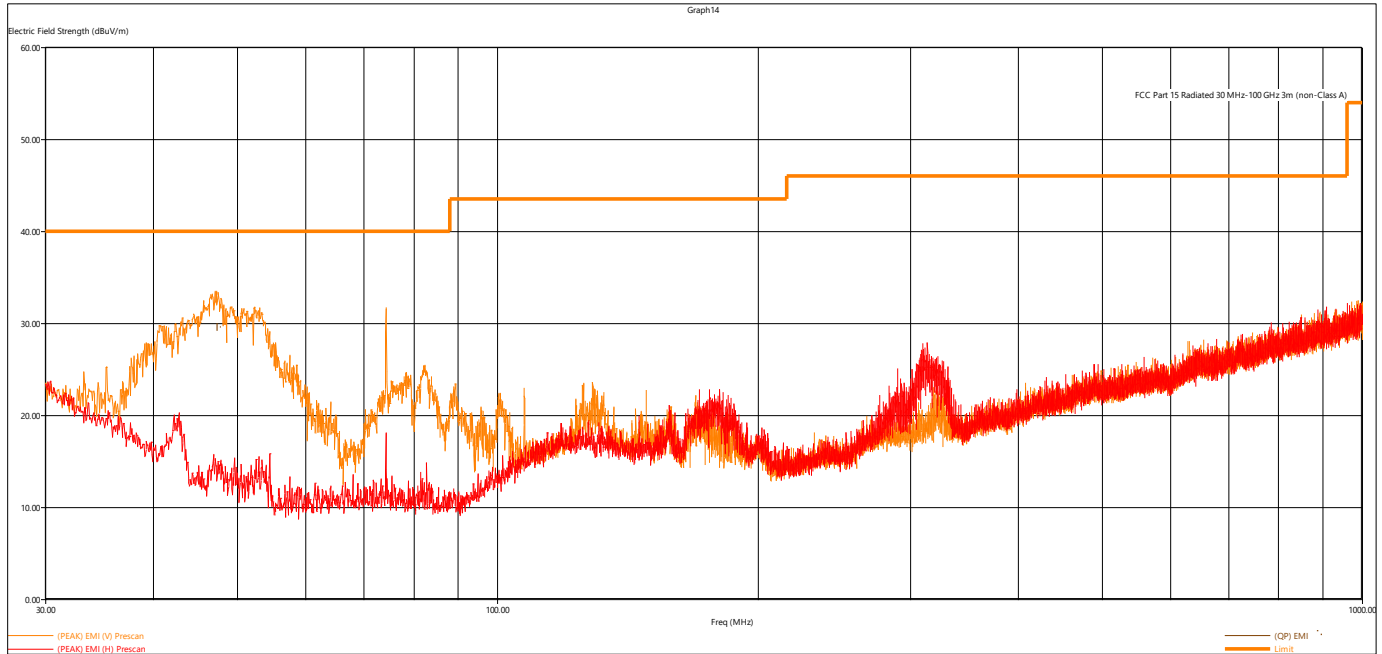


Figure 4 - Radiated Emissions Plot, Receive

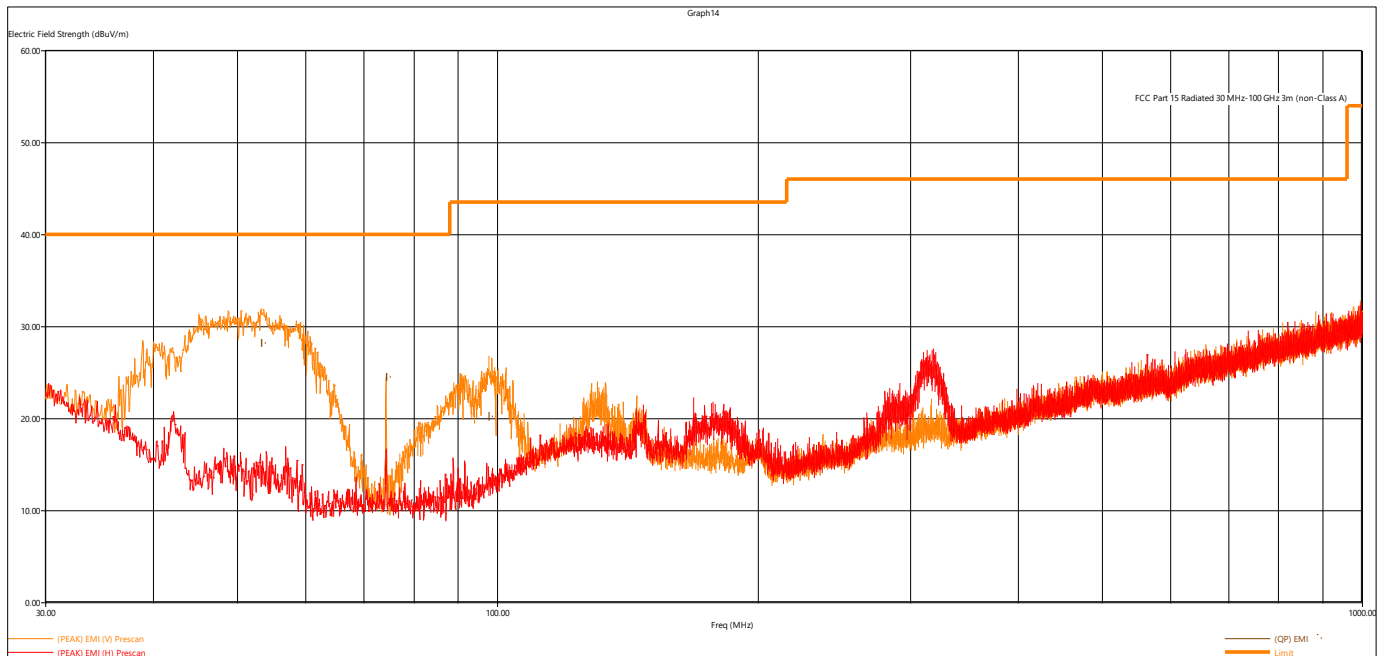


Figure 5 - Radiated Emissions Plot, 802.11b 1MB

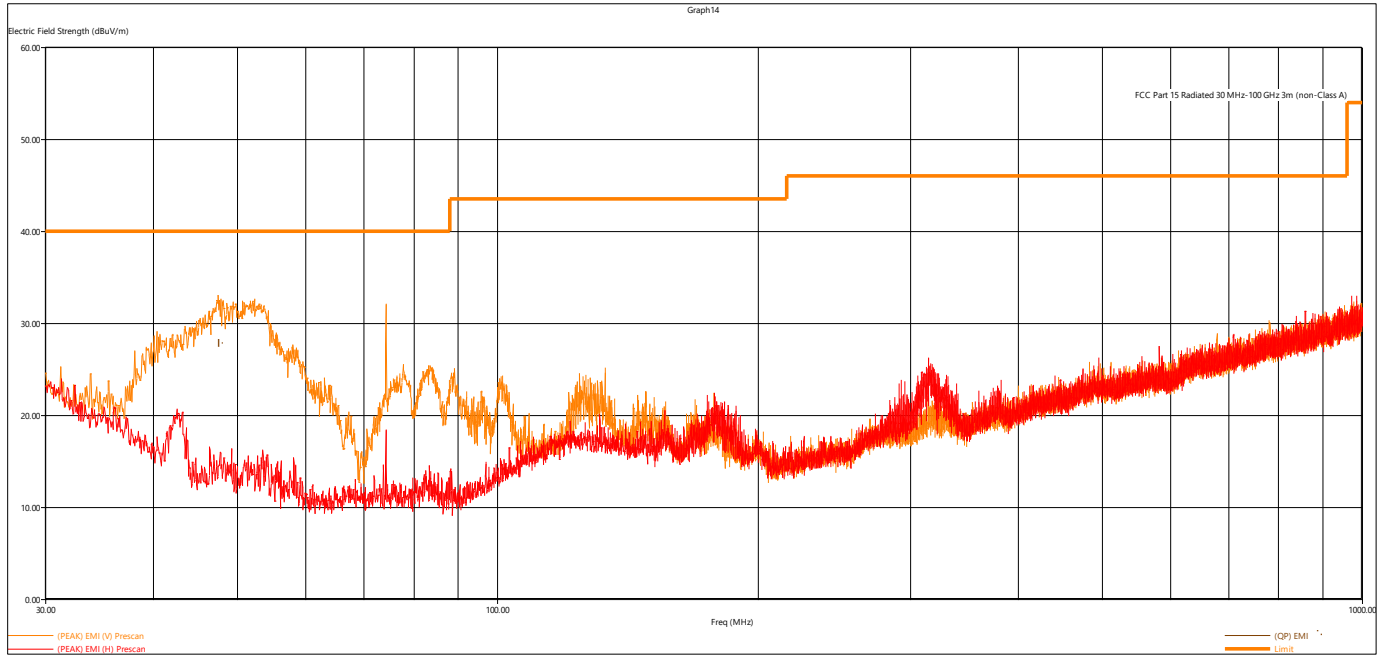


Figure 6 - Radiated Emissions Plot, 802.11b 11MB

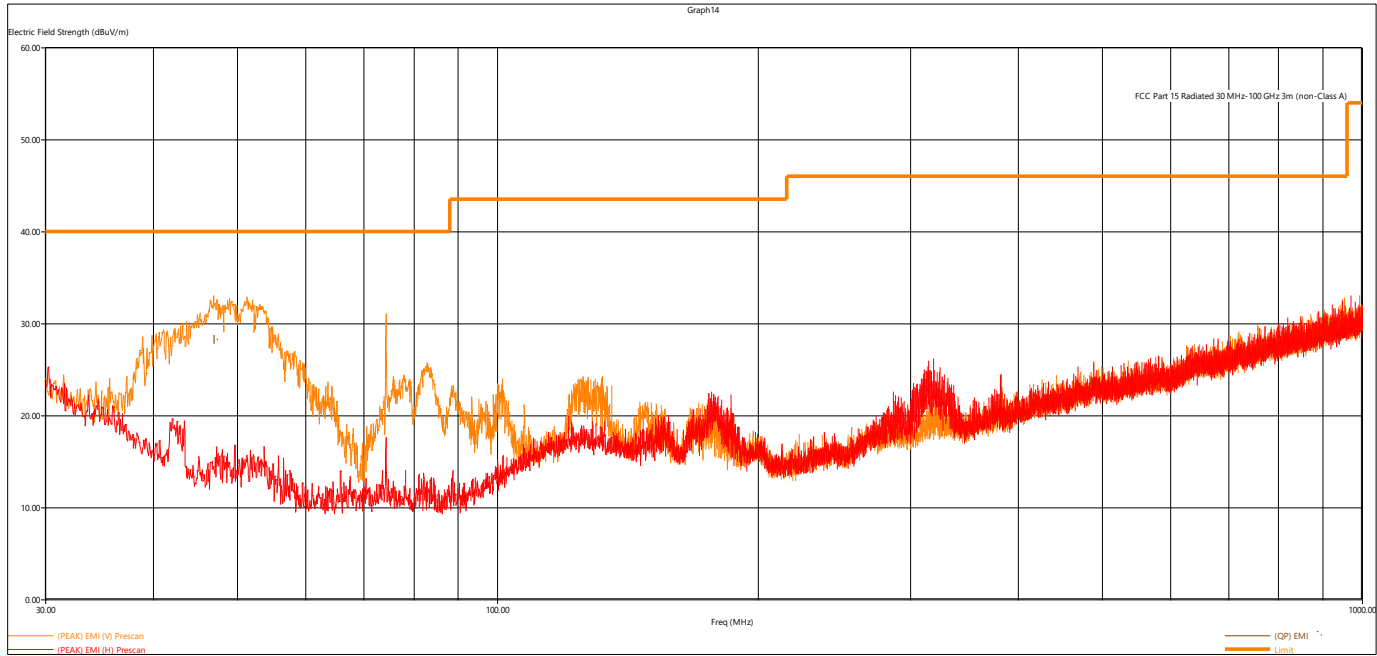


Figure 7 - Radiated Emissions Plot, 802.11g 6MB

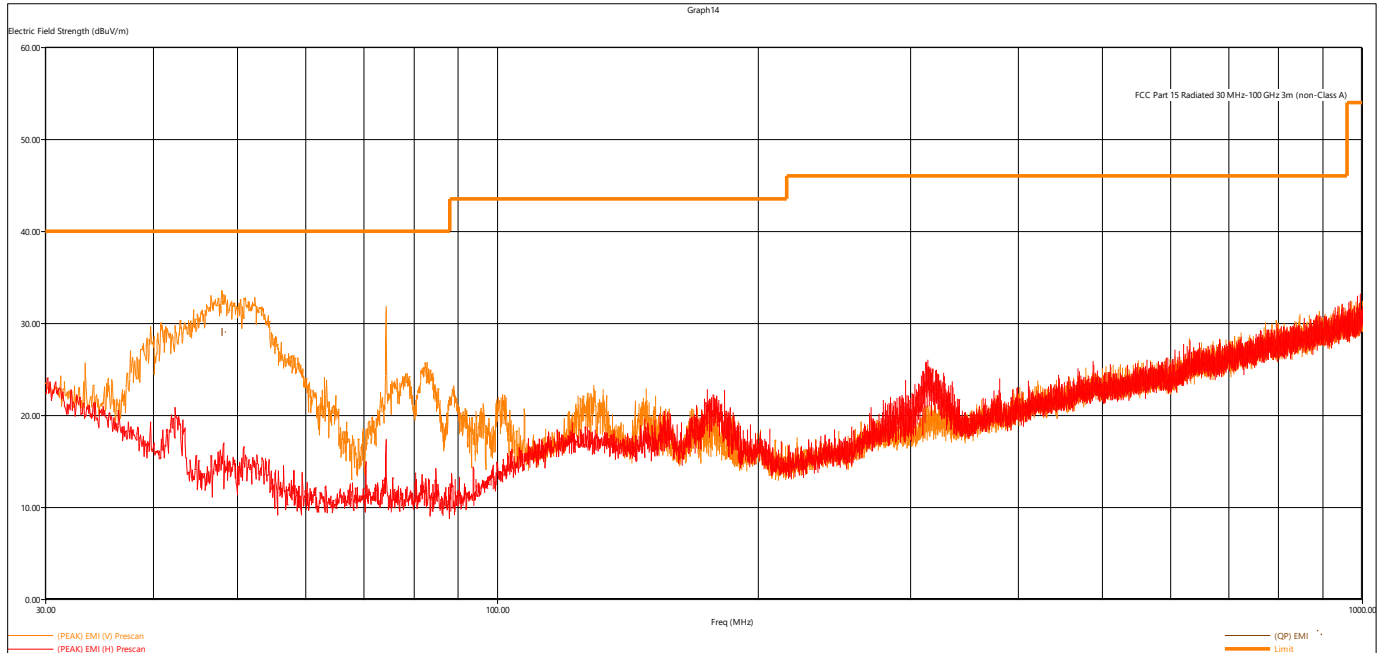


Figure 8 - Radiated Emissions Plot, 802.11g 54MB

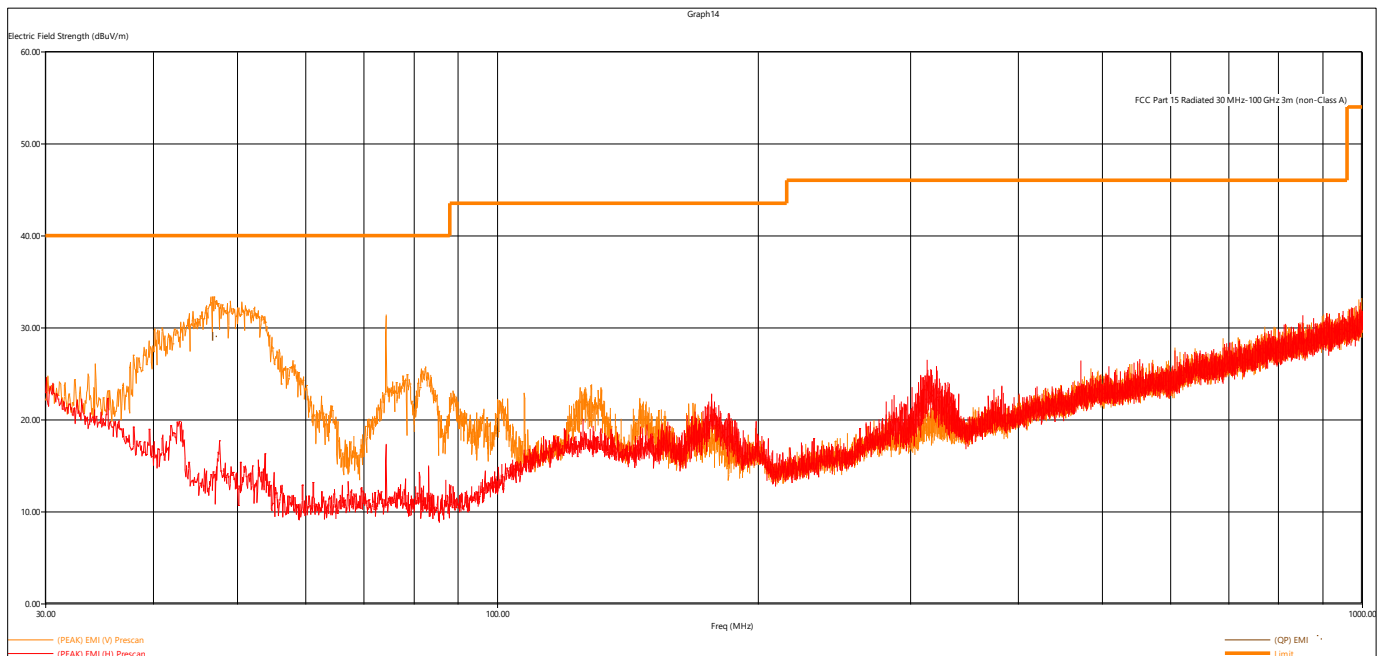


Figure 9 - Radiated Emissions Plot, 802.11n MCS0

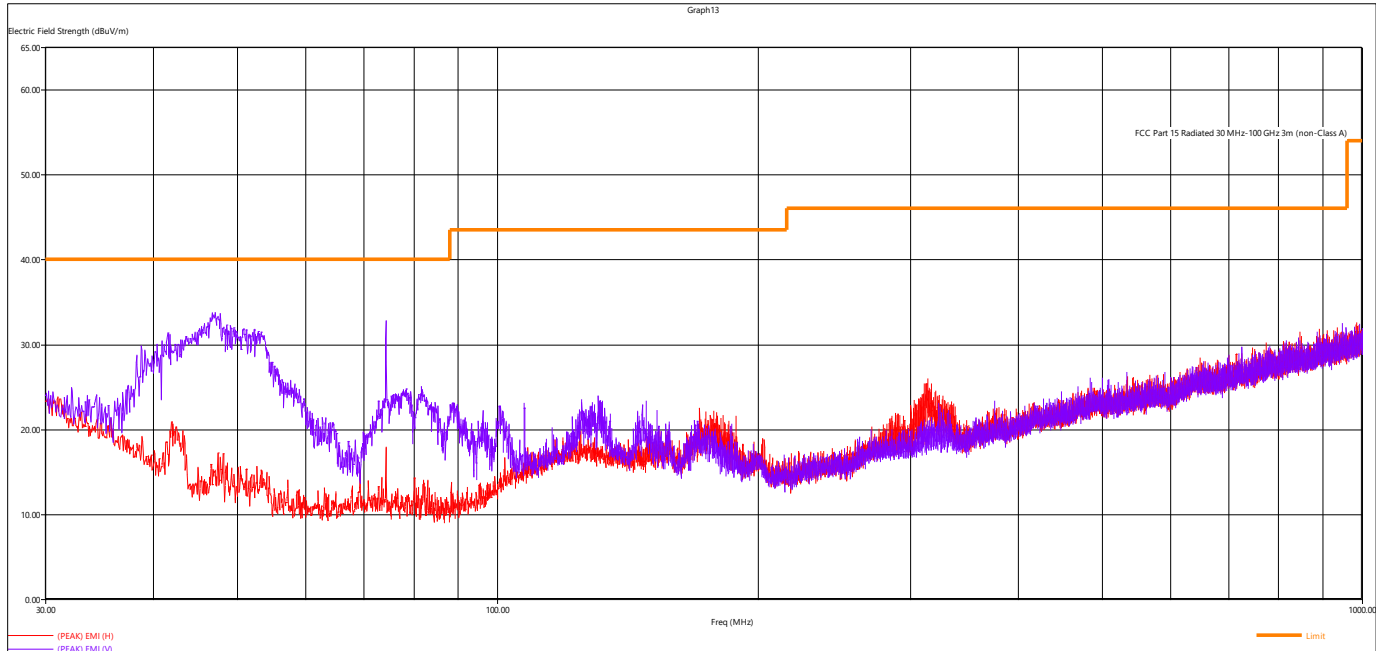


Figure 10 - Radiated Emissions Plot, 802.11n MCS7

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
53.13192	28.13	40	11.87	105	349	V	Low	WIFI B 1MB
74.226	24.42	40	15.58	258	4	V	Low	WIFI B 1MB
97.6344	20.18	43.52	23.34	110	268	V	Low	WIFI B 1MB
47.55408	27.82	40	12.18	104	145	V	Low	WIFI B 11MB
47.112	28.18	40	11.82	114	134	V	Low	WIFI G 6MHz
47.964	29.02	40	10.98	112	9	V	Low	WIFI G 54MHz
46.87392	28.97	40	11.03	107	222	V	Low	WIFI N MCS0
47.1144	29.51	40	10.49	106	229	V	Receive	

All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.




Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
2411.144	100.75	NA	NA	143	39	V	Low	WIFI B 1MB
2436.108	103.99	NA	NA	194	201	V	Mid	WIFI B 1MB
2461.098	100.11	NA	NA	124	45	V	High	WIFI B 1MB
2413.086	104.48	NA	NA	136	38	V	Low	WIFI B 11MB
2436.248	107.47	NA	NA	187	200	V	Mid	WIFI B 11MB
2461.33	103.71	NA	NA	128	43	V	High	WIFI B 11MB
2414.542	97.81	NA	NA	141	39	V	Low	WIFI G 6MHz
2438.446	103.58	NA	NA	203	201	V	Mid	WIFI G 6MHz
2462.716	98.85	NA	NA	123	45	V	High	WIFI G 6MHz
2409.966	101.18	NA	NA	155	38	V	Low	WIFI G 54MHz
2429.228	101.36	NA	NA	132	358	V	Mid	WIFI G 54MHz
2463.544	100.57	NA	NA	191	47	V	High	WIFI G 54MHz
2410.11	98.91	NA	NA	141	43	V	Low	WIFI N MCS0
2437.828	102.44	NA	NA	164	199	V	Mid	WIFI N MCS0
2463.898	99.58	NA	NA	127	42	V	High	WIFI N MCS0
2410.012	99.97	NA	NA	136	40	V	Low	WIFI N MCS7
2436.138	100.83	NA	NA	209	200	V	Mid	WIFI N MCS7
2463.468	100.41	NA	NA	203	202	V	High	WIFI N MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other measurements were found to be at least 6 dB Below the limit.

Average Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
2411.144	98.00	NA	NA	143	39	V	Low	WIFI B 1MB
2436.108	101.06	NA	NA	194	201	V	Mid	WIFI B 1MB
2461.098	97.11	NA	NA	124	45	V	High	WIFI B 1MB
2413.086	96.53	NA	NA	136	38	V	Low	WIFI B 11MB
2436.248	99.94	NA	NA	187	200	V	Mid	WIFI B 11MB
2461.33	96.29	NA	NA	128	43	V	High	WIFI B 11MB
2414.542	88.92	NA	NA	141	39	V	Low	WIFI G 6MHz
2438.446	94.28	NA	NA	203	201	V	Mid	WIFI G 6MHz
2462.716	89.91	NA	NA	123	45	V	High	WIFI G 6MHz
2409.966	89.99	NA	NA	155	38	V	Low	WIFI G 54MHz
2429.228	91.65	NA	NA	132	358	V	Mid	WIFI G 54MHz
2463.544	90.30	NA	NA	191	47	V	High	WIFI G 54MHz

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

2410.11	89.30	NA	NA	141	43	V	Low	WIFI N MCS0
2437.828	92.93	NA	NA	164	199	V	Mid	WIFI N MCS0
2463.898	90.30	NA	NA	127	42	V	High	WIFI N MCS0
2410.012	90.09	NA	NA	136	40	V	Low	WIFI N MCS7
2436.138	90.89	NA	NA	209	200	V	Mid	WIFI N MCS7
2463.468	90.17	NA	NA	203	202	V	High	WIFI N MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All other measurements were found to be at least 6 dB Below the limit.

Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

From FCC Part 15.247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plots is a reference line placed at -20dBm.

Deviations from test standard:

Test performed at 120kHz RBW

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Data rates and channels were investigated and worst case was reported, no emissions exceeded the limits.

There was no distinguishable difference between low and high data rate.

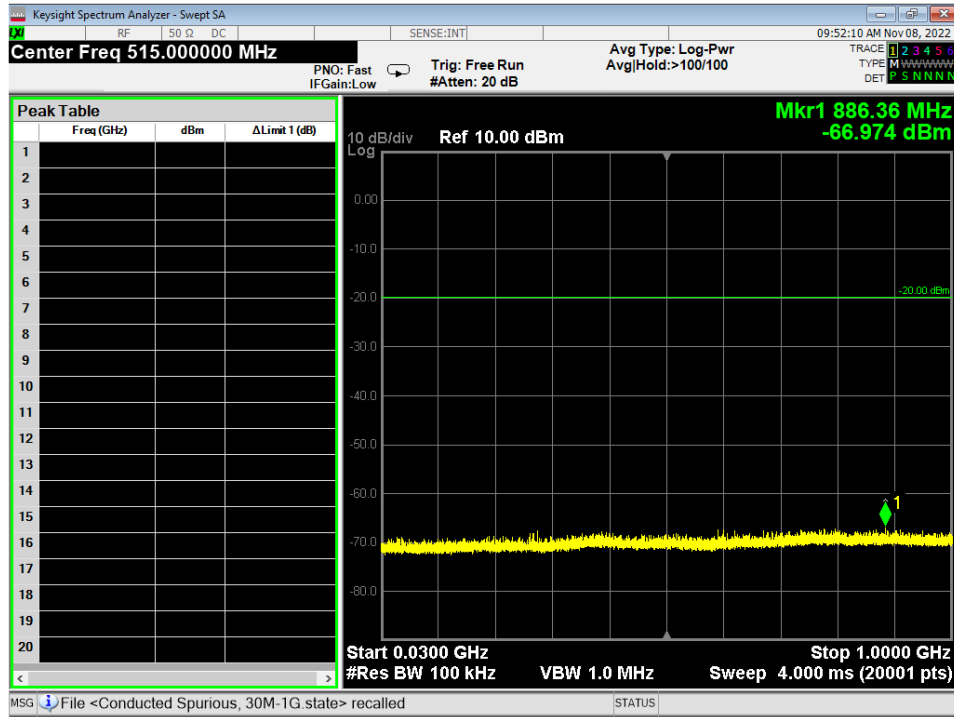


Figure 11 - Radiated Emissions Plot, WIFI 802.11b, 30M – 1G, Low

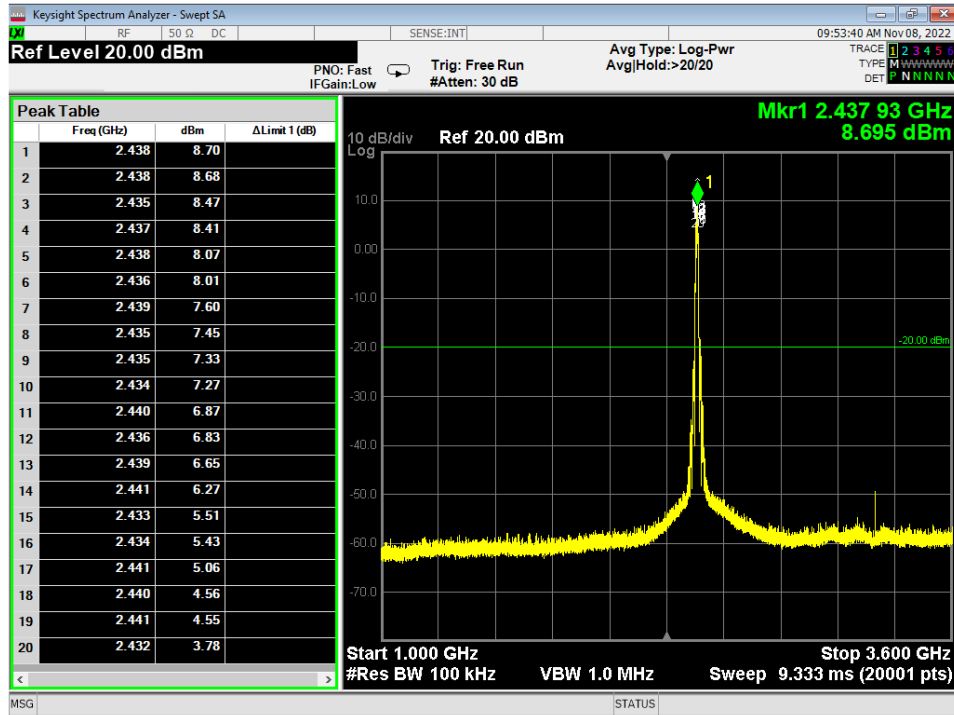


Figure 12 - Radiated Emissions Plot, WIFI 802.11b, 1G – 3.6G, Low

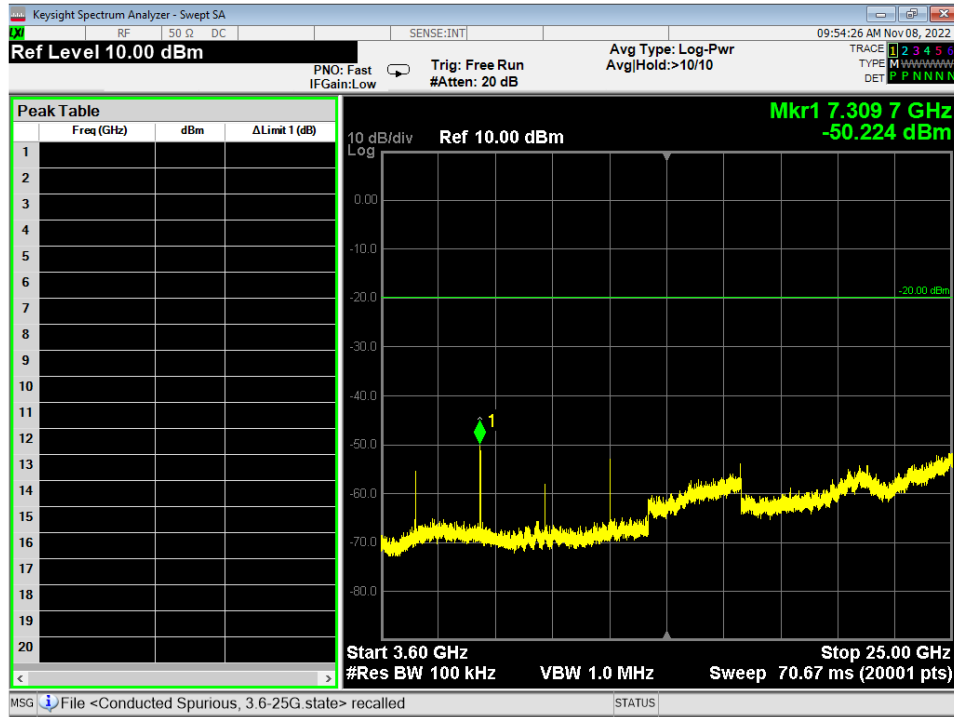


Figure 13 - Radiated Emissions Plot, WIFI 802.11b, 3.6G – 25G, Low

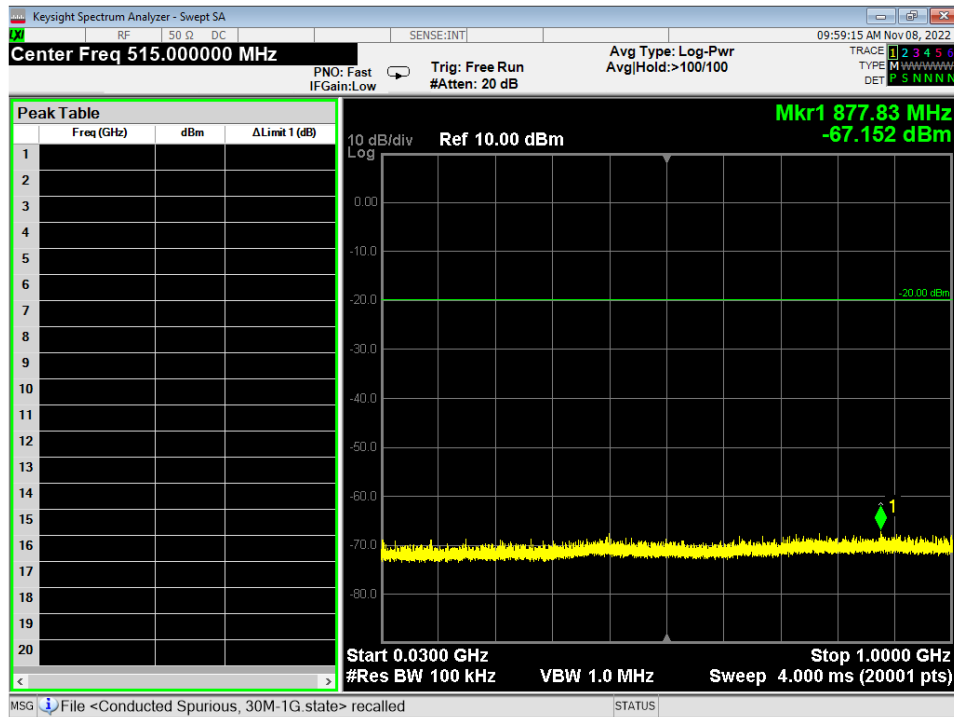


Figure 14 - Radiated Emissions Plot, WIFI 802.11g, 30M – 1G, Low

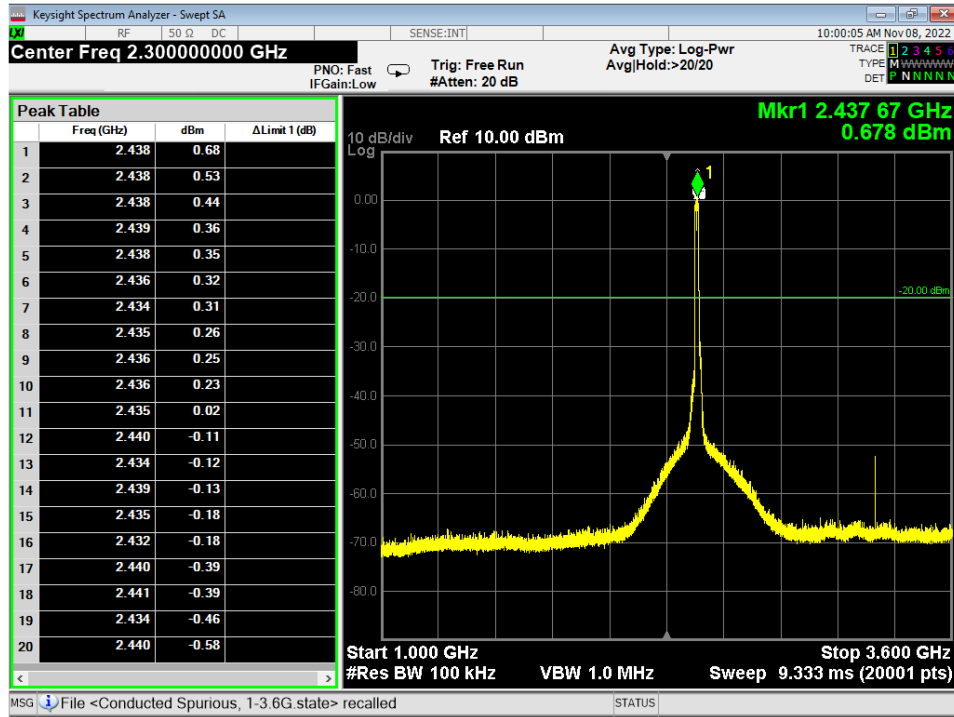


Figure 15 - Radiated Emissions Plot, WIFI 802.11g, 1G – 3.6G, Low

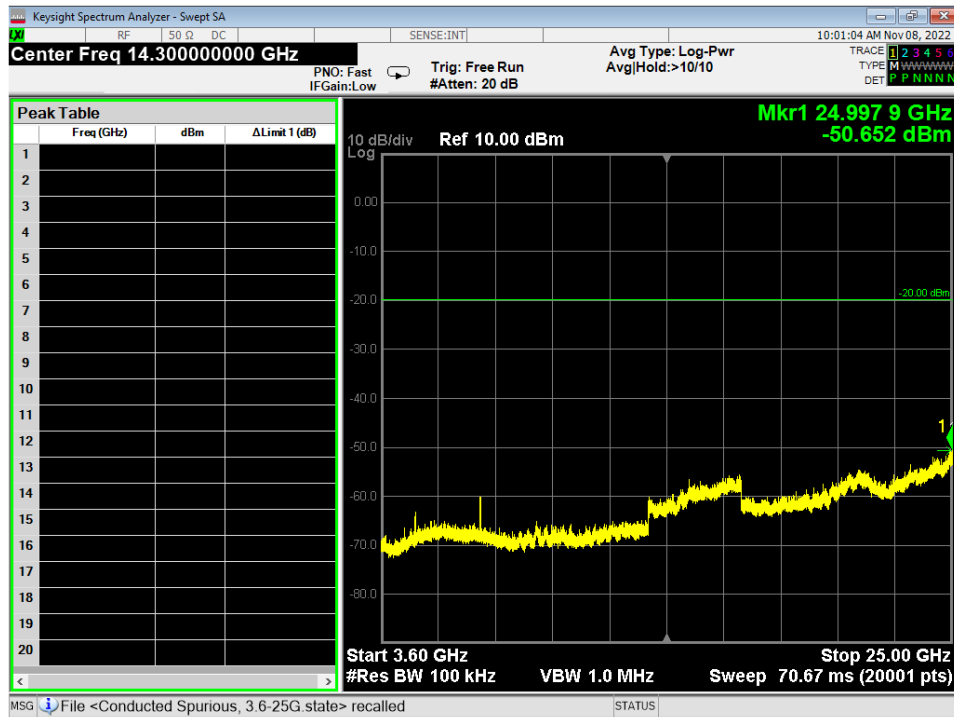


Figure 16 - Radiated Emissions Plot, WIFI 802.11g, 3.6G – 25G, Low

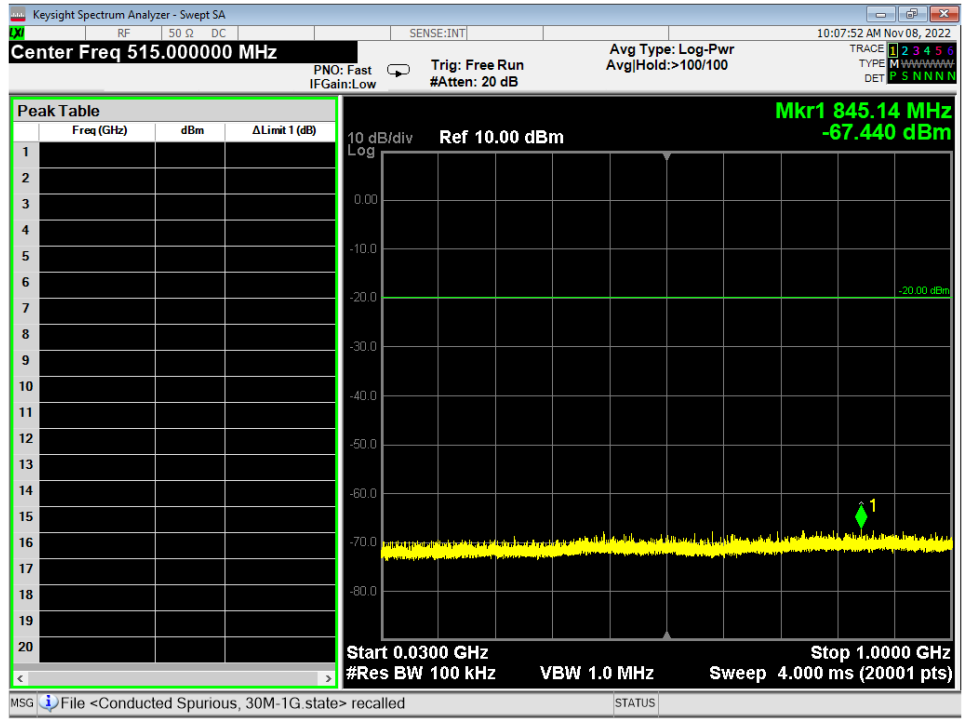


Figure 17 - Radiated Emissions Plot, WIFI 802.11n, 30M – 1G, Low

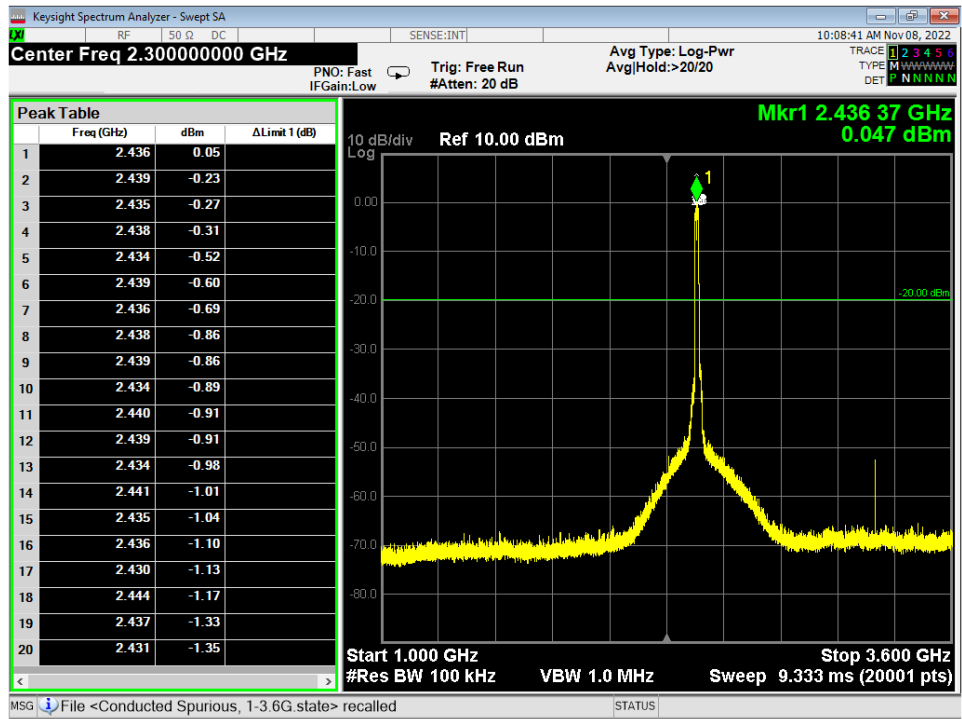


Figure 18 - Radiated Emissions Plot, WIFI 802.11n, 1G – 3.6G, Low

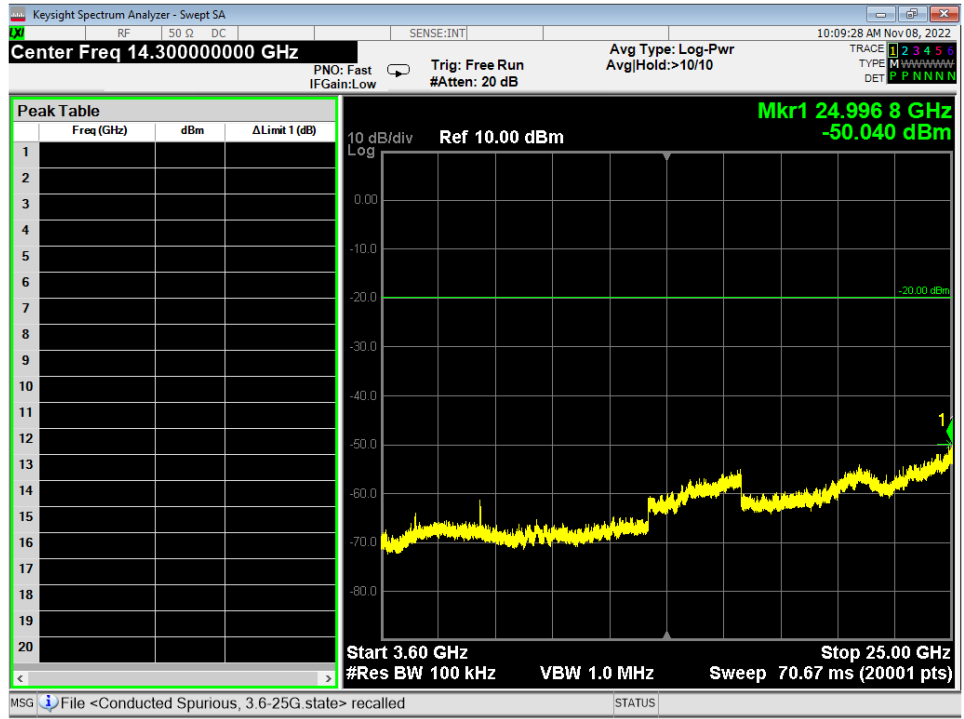


Figure 19 - Radiated Emissions Plot, WIFI 802.11n, 3.6G – 25G, Low

Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

4.6 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.




Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

4.7 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are reported on the graph.
4. The measurements are listed in the tables in section 4.0.

4.8 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

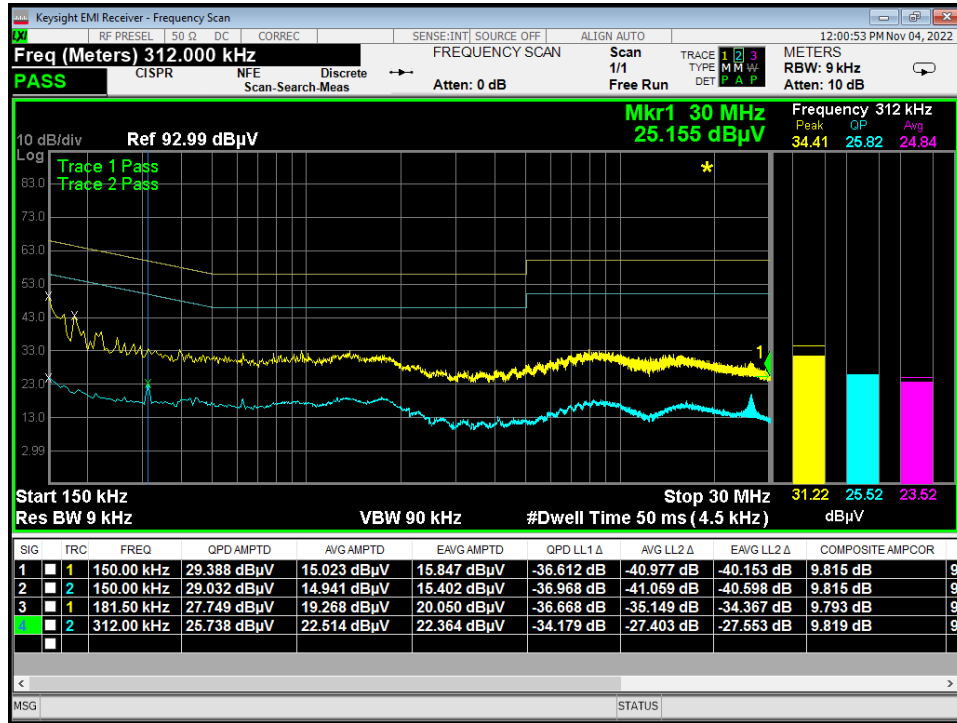


Figure 20 - Conducted Emissions Plot, Line, TX

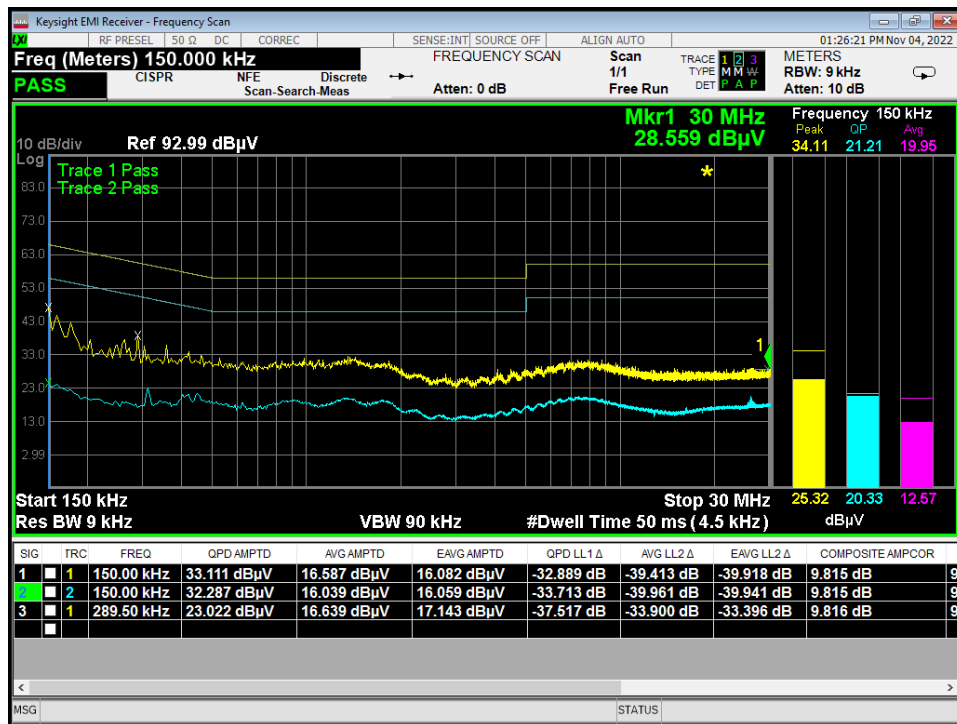


Figure 21 - Conducted Emissions Plot, Neutral, TX

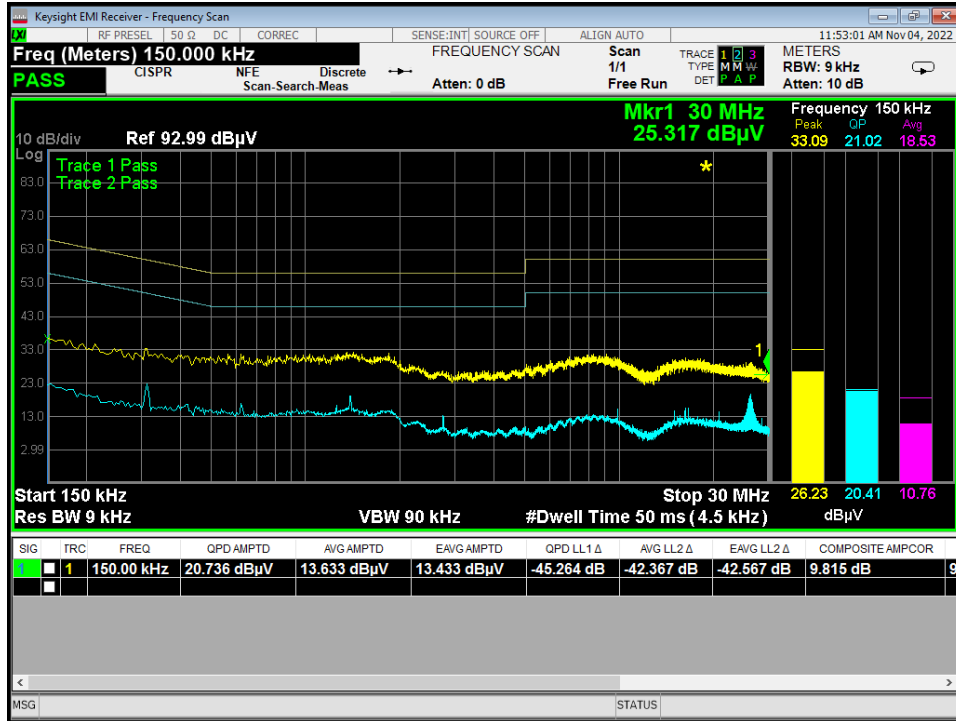


Figure 22 - Conducted Emissions Plot, Line, IDLE

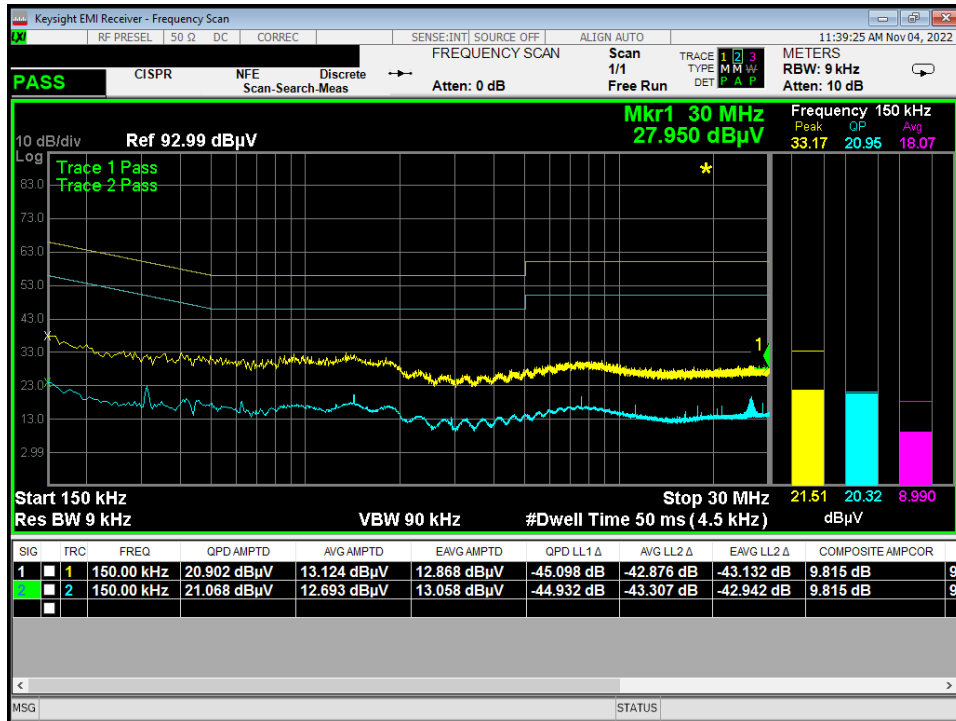


Figure 23 - Conducted Emissions Plot, Neutral, IDLE

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)


Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{[\text{Power (dBm)}/10]} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$


$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [\text{FS (V/m)} \times d^2] / 30 = \text{FS} [0.3] \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = \text{FS}(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = \text{FS}(\text{dB}\mu\text{V/m}) - 95.23$$

10log(10^9) is the conversion from micro to milli

	Report Number:	R20220901-21-E5B	Rev	B
	Prepared for:	Garmin International, Inc.		


APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±4.31
Radiated Emissions, 3m	1GHz - 18GHz	±5.08
Emissions limits, conducted	150kHz - 30MHz	±3.03

Expanded uncertainty values are calculated to a confidence level of 95%.


APPENDIX C – GRAPHS AND TABLES

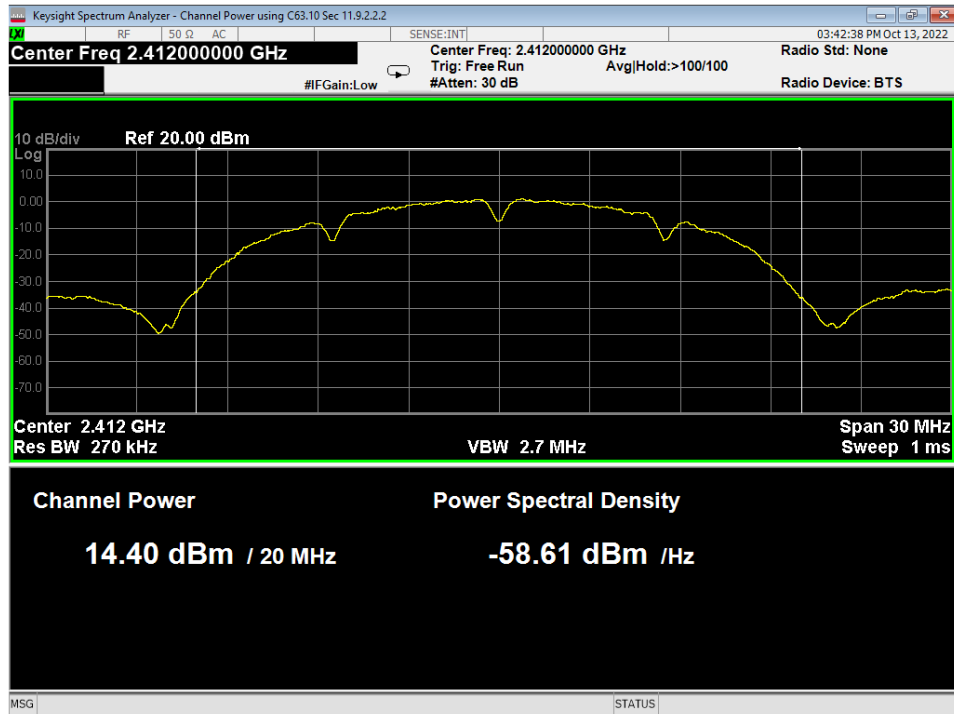


01 Average Power, Low, Wifi B, Low Data Rate

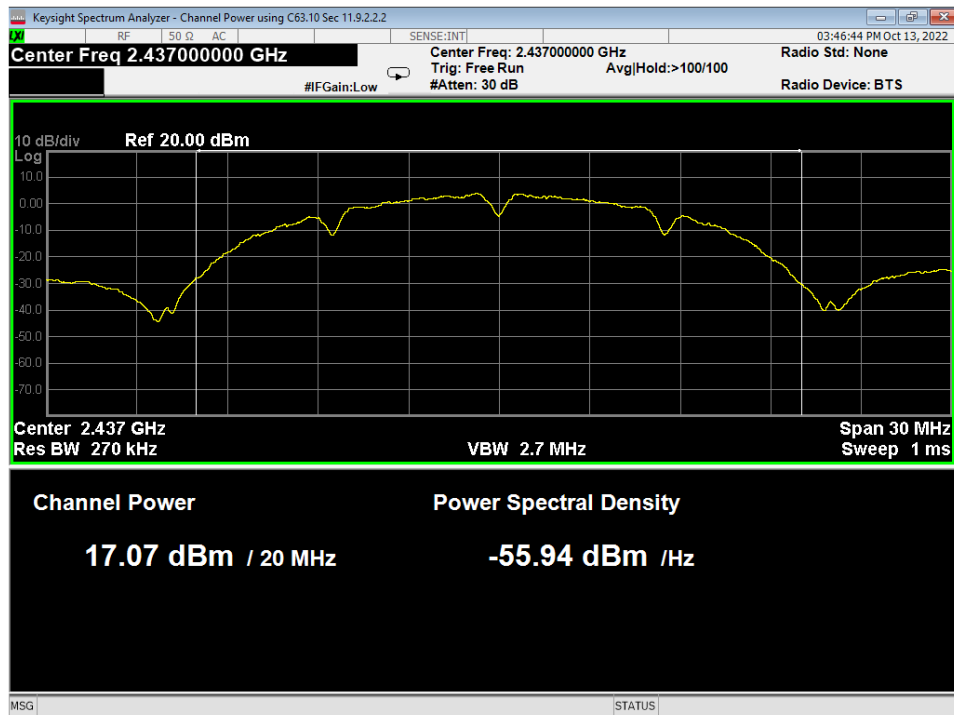


02 Average Power, Mid, Wifi B, Low Data Rate

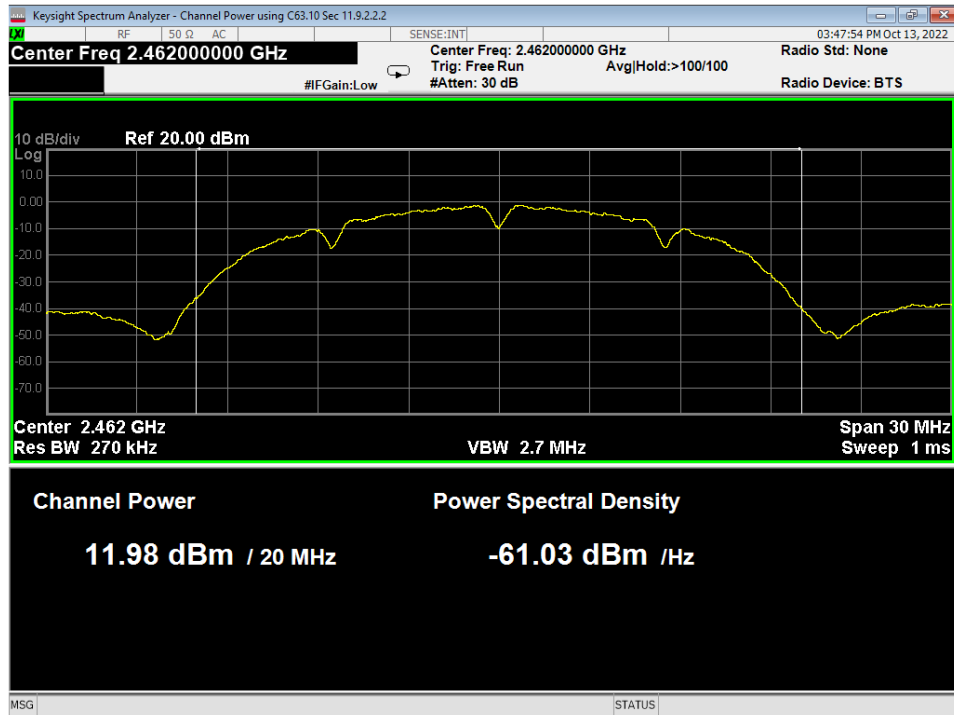


03 Average Power, High, Wifi B, Low Data Rate

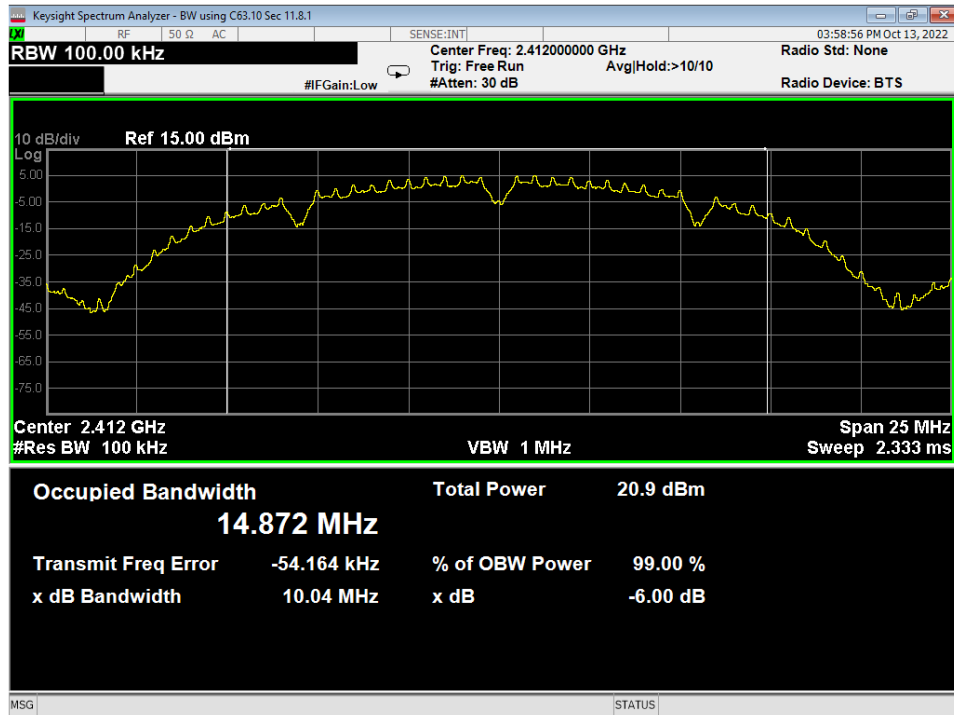


04 6dB Bandwidth, Low, Wifi B, Low Data Rate

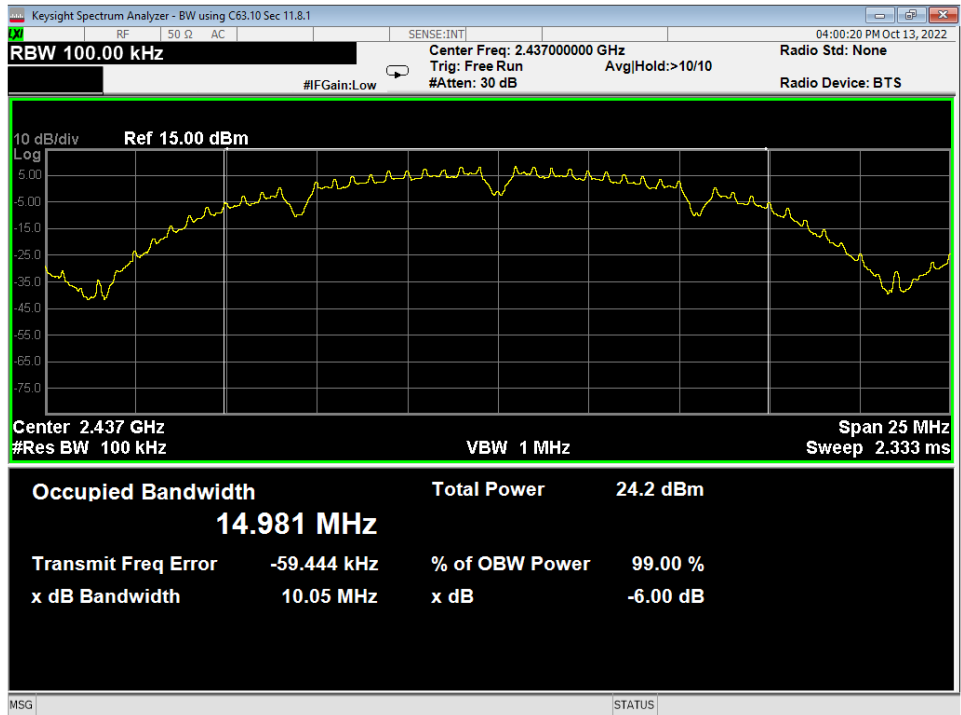


05 6dB Bandwidth, Mid, Wifi B, Low Data Rate

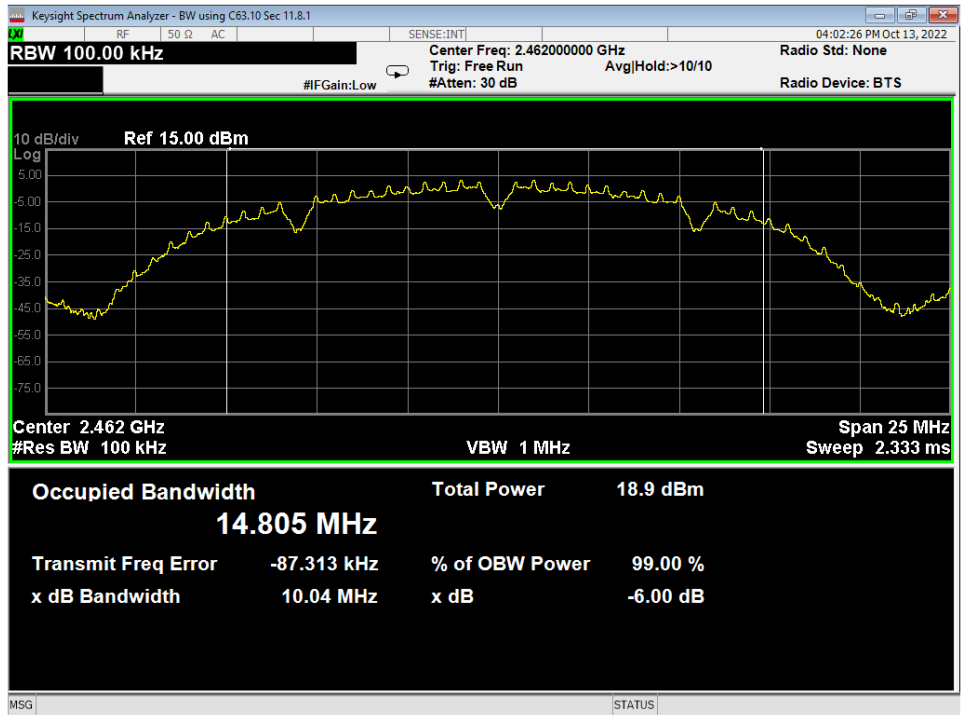


06 6dB Bandwidth, High, Wifi B, Low Data Rate

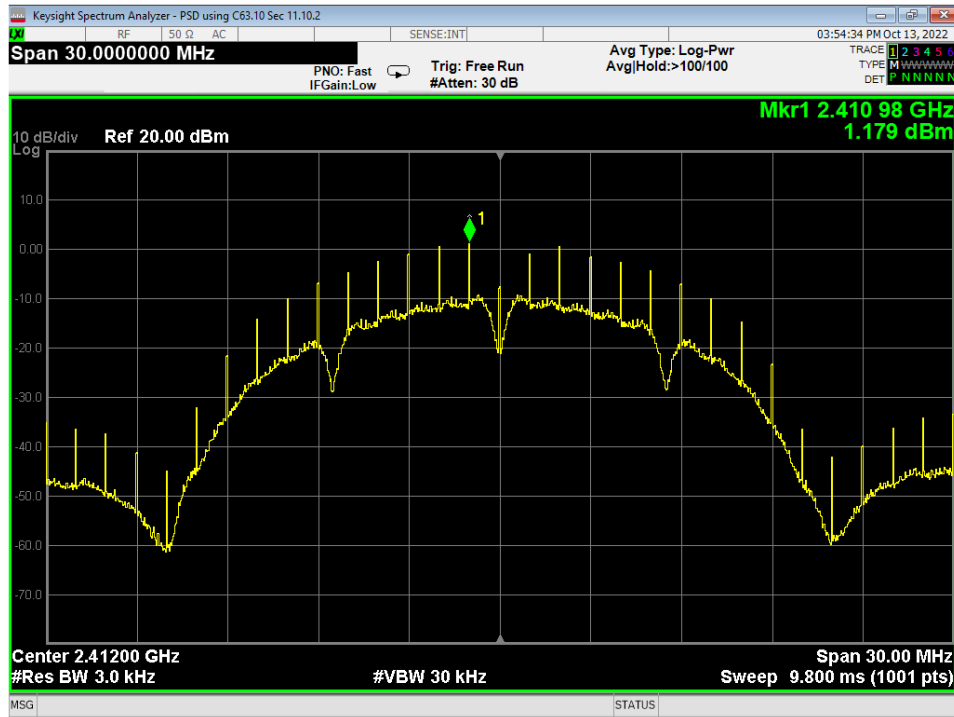


07 PSD, Low, Wifi B, Low Data Rate

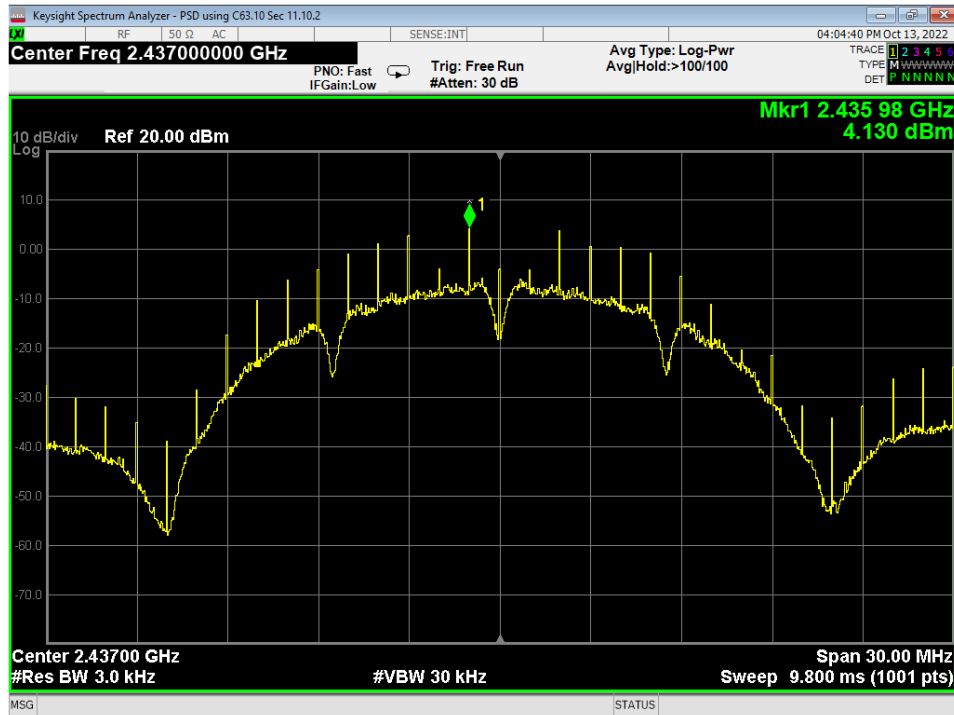


08 PSD, Mid, Wifi B, Low Data Rate

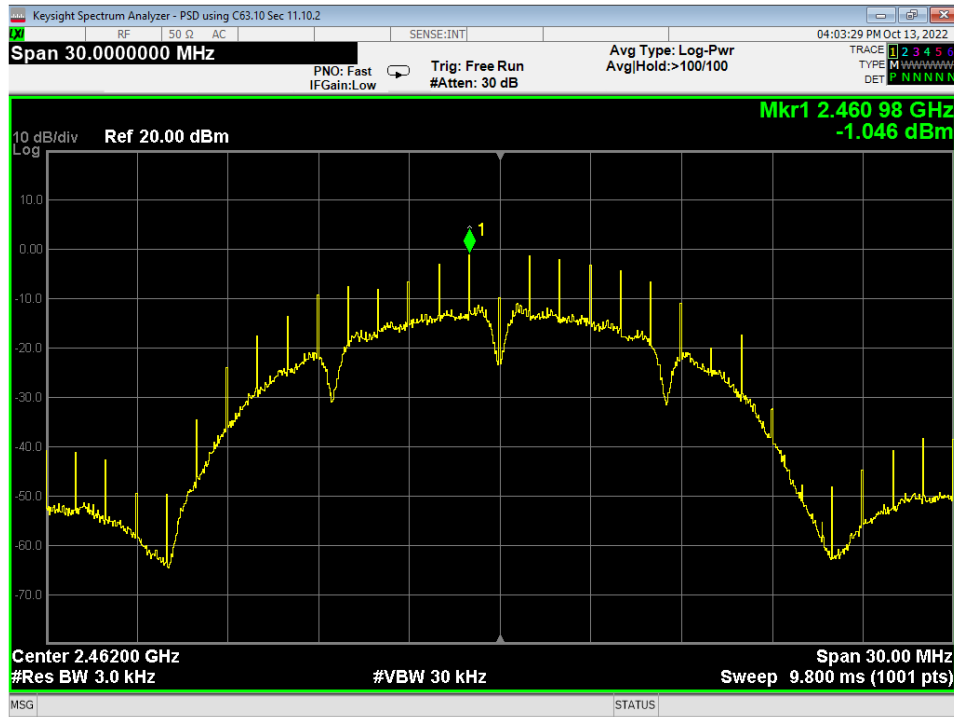


09 PSD, High, Wifi B, Low Data Rate

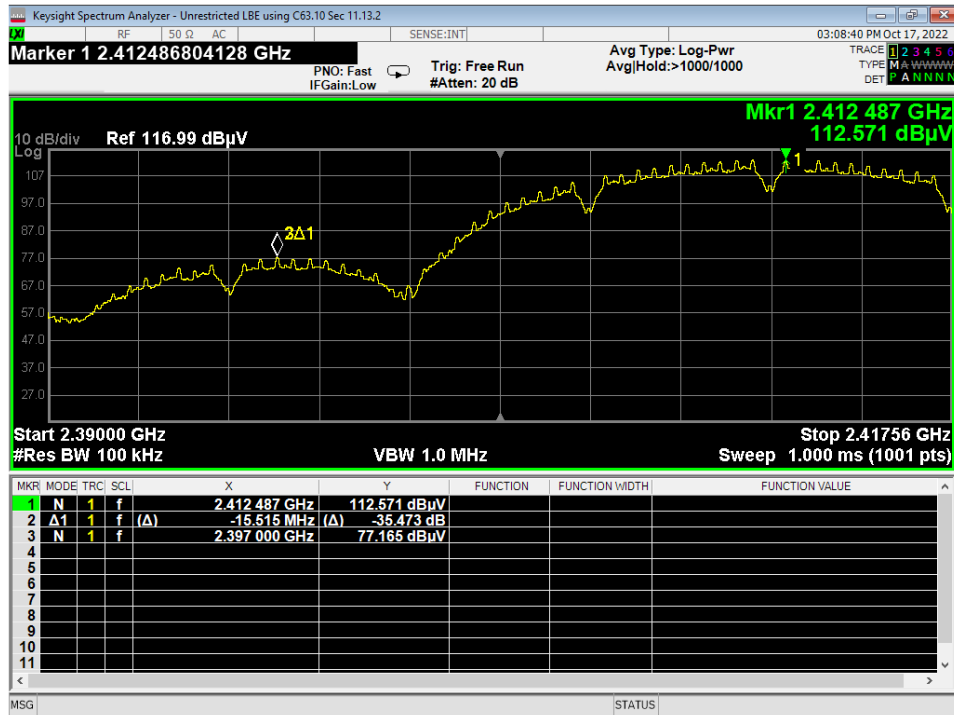


10 Lower Bandedge, Unrestricted, Wifi B, Low Data Rate

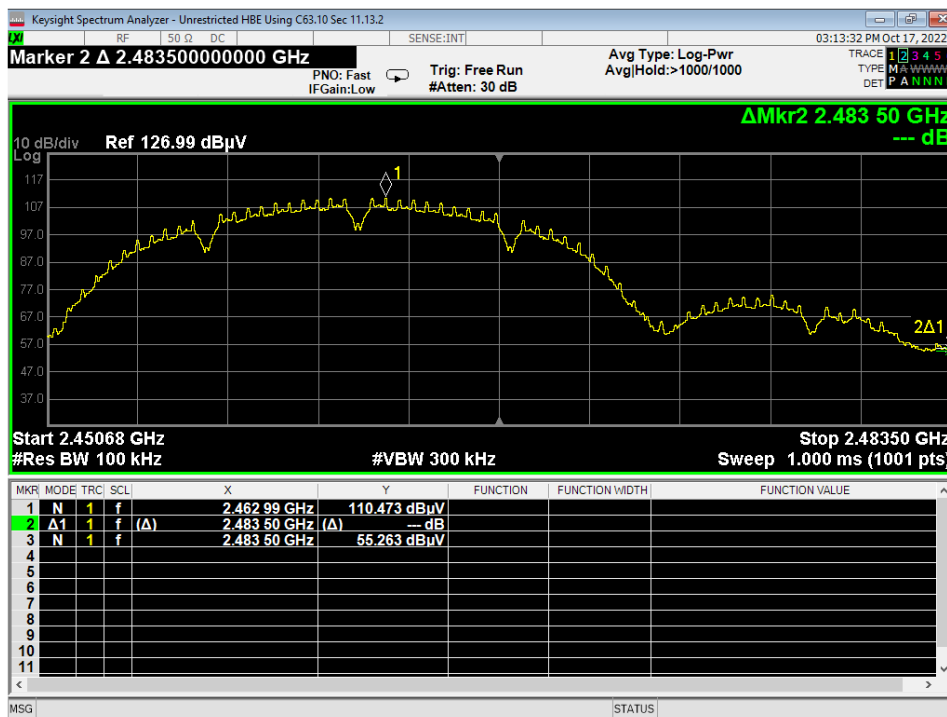


11 Higher Bandedge, Unrestricted, Wifi B, Low Data Rate

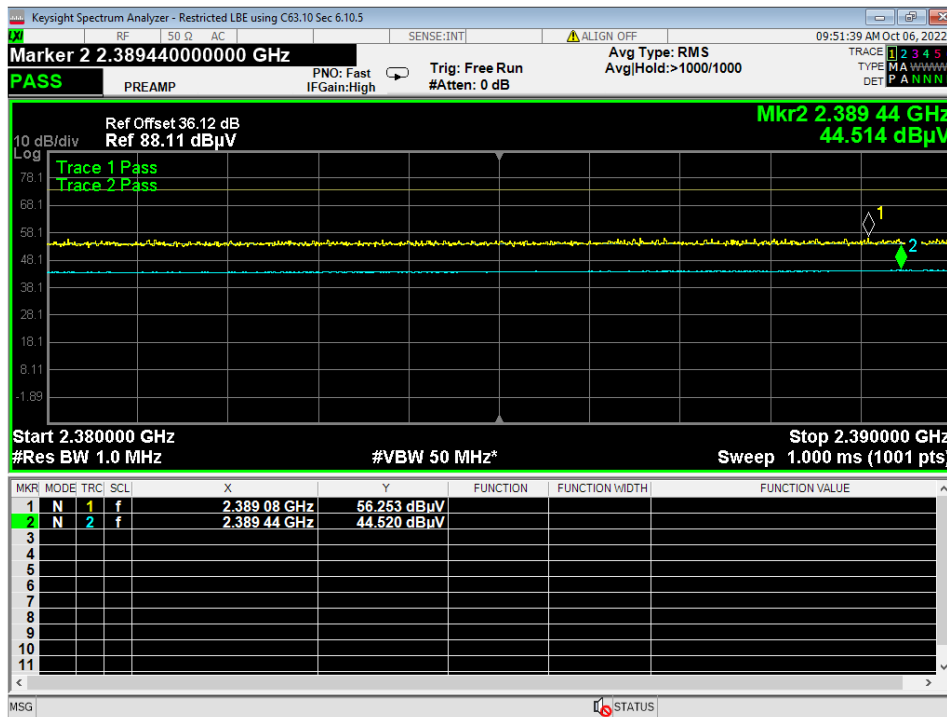


12 Lower Bandedge, Restricted, Wifi B, Low Data Rate

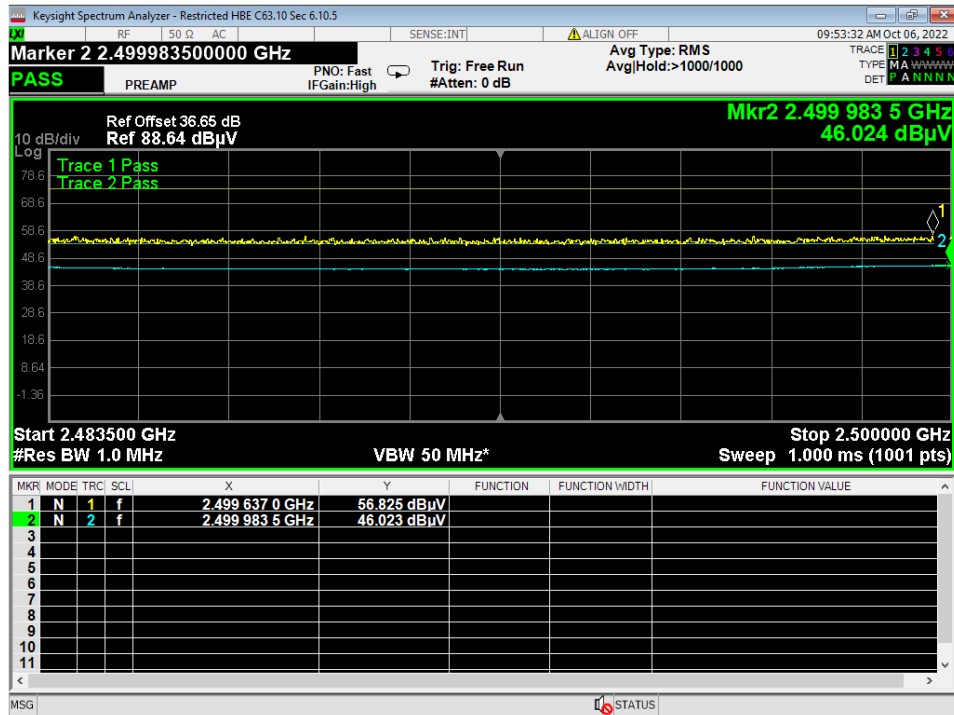


13 Higher Bandedge, Restricted, Wifi B, Low Data Rate

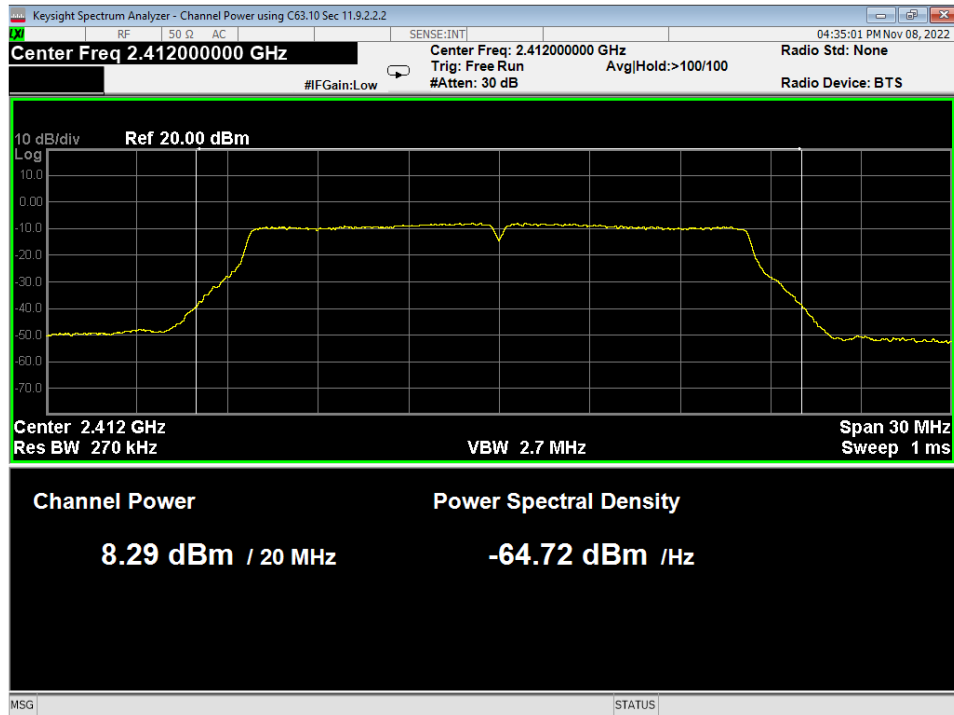


14 Average Power, Low, Wifi G, Low Data Rate

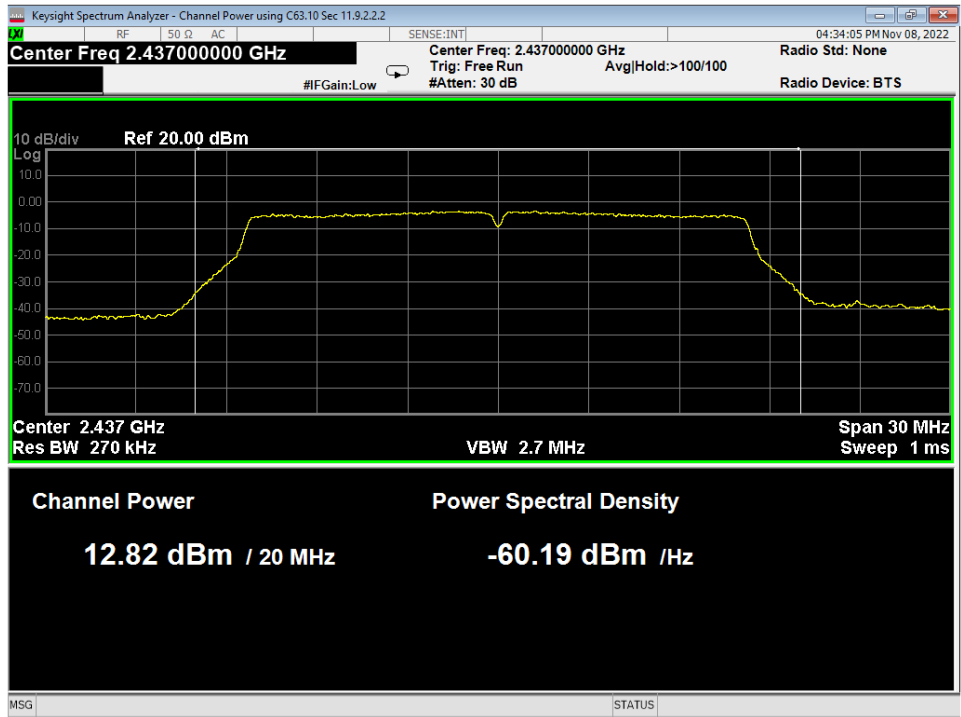


15 Average Power, Mid, Wifi G, Low Data Rate

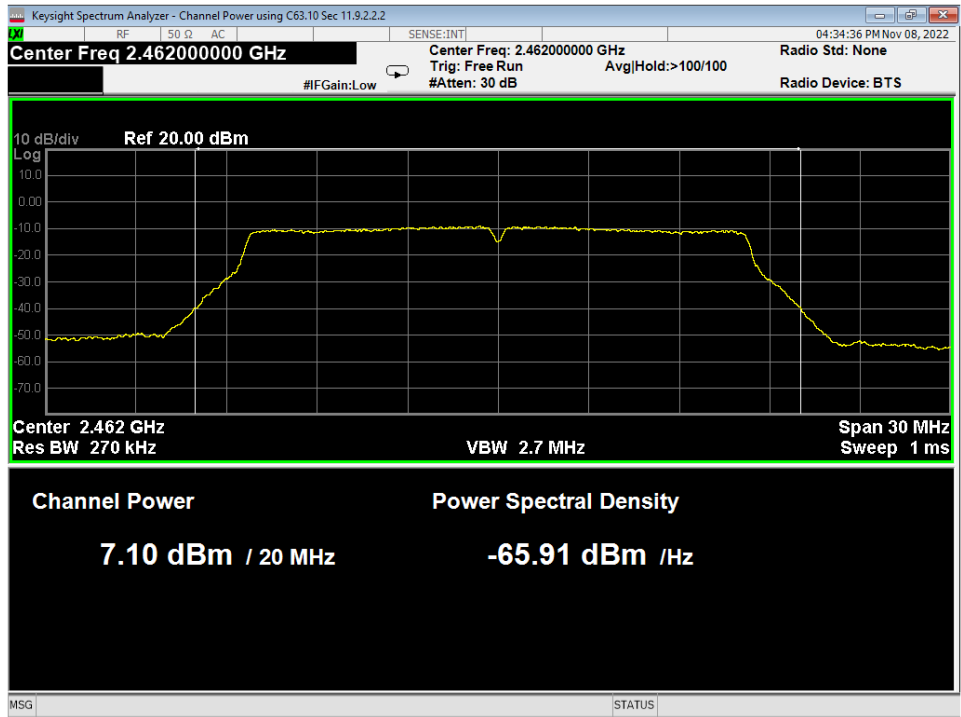


16 Average Power, High, Wifi G, Low Data Rate

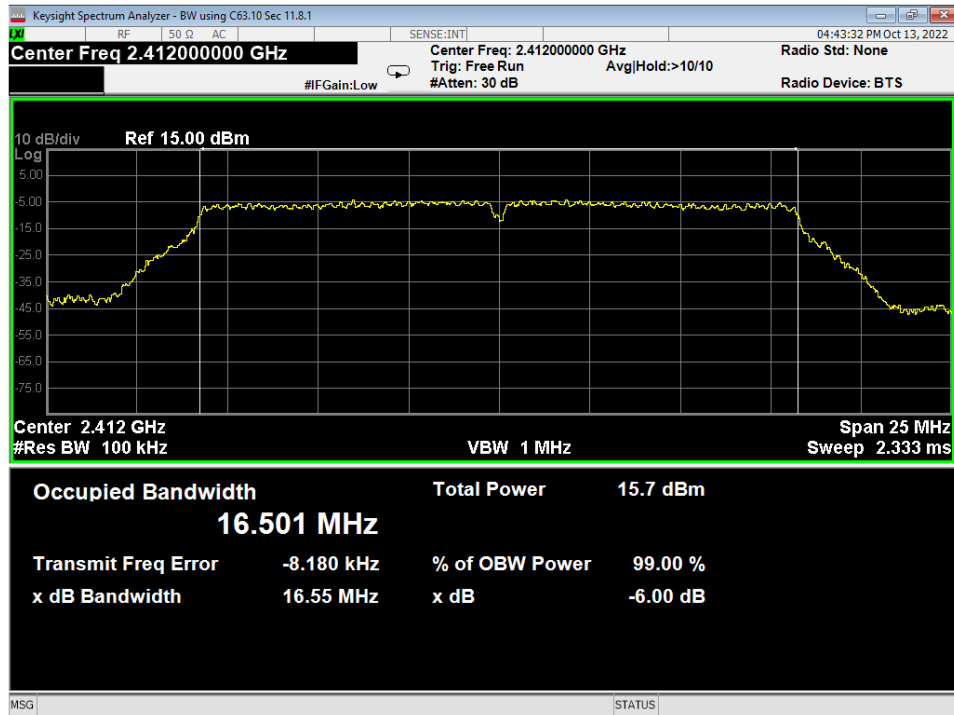


17 6dB Bandwidth, Low, Wifi G, Low Data Rate

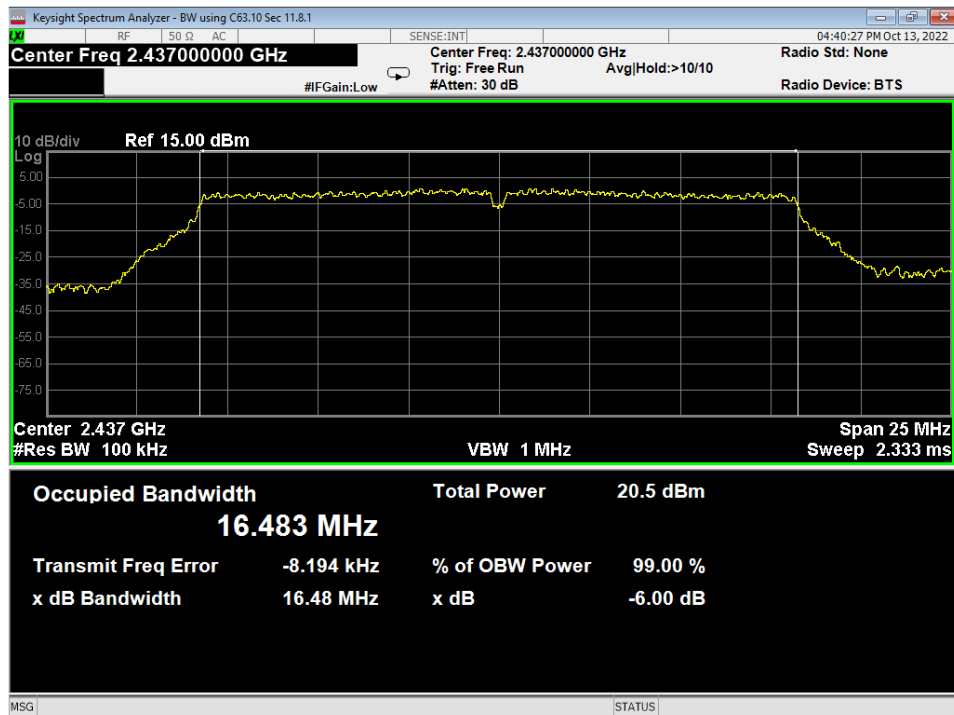


18 6dB Bandwidth, Mid, Wifi G, Low Data Rate

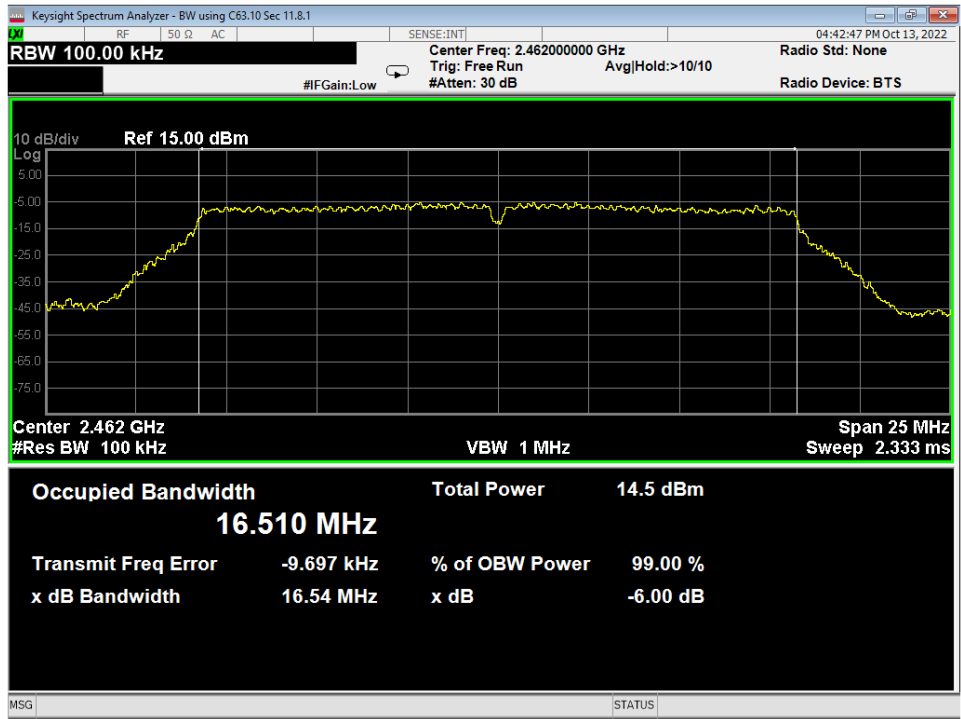


19 6dB Bandwidth, High, Wifi G, Low Data Rate

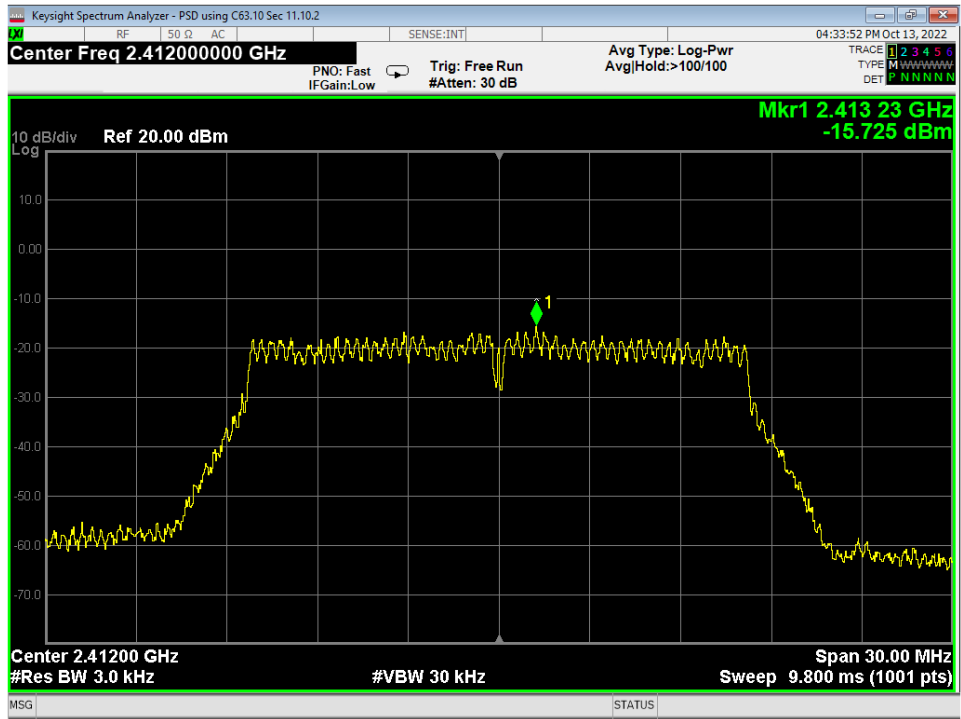


20 PSD, Low, Wifi G, Low Data Rate

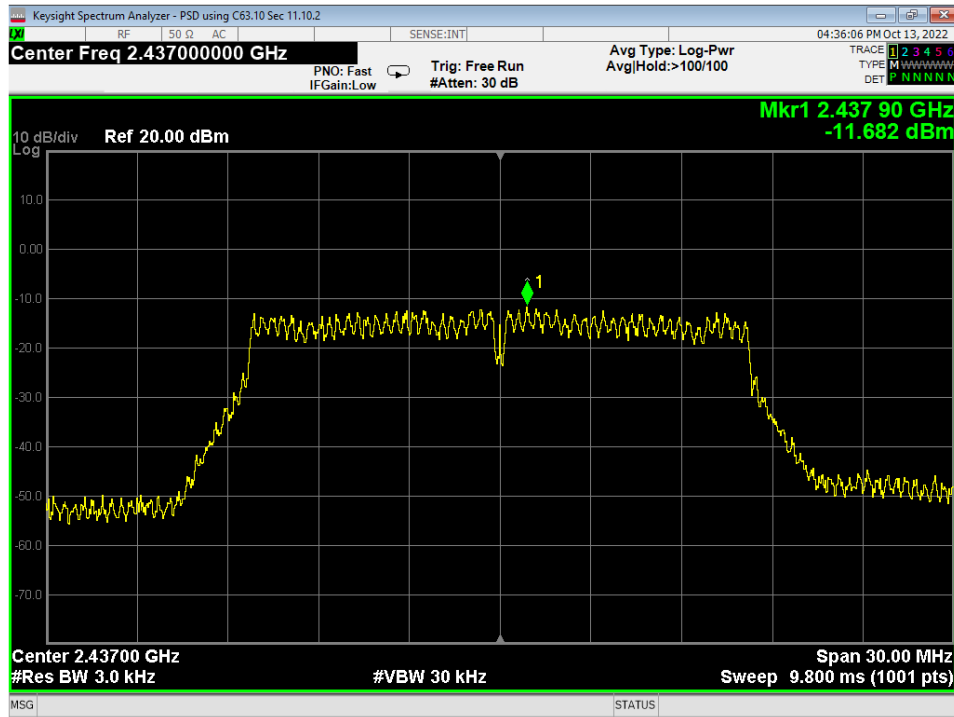


21 PSD, Mid, Wifi G, Low Data Rate

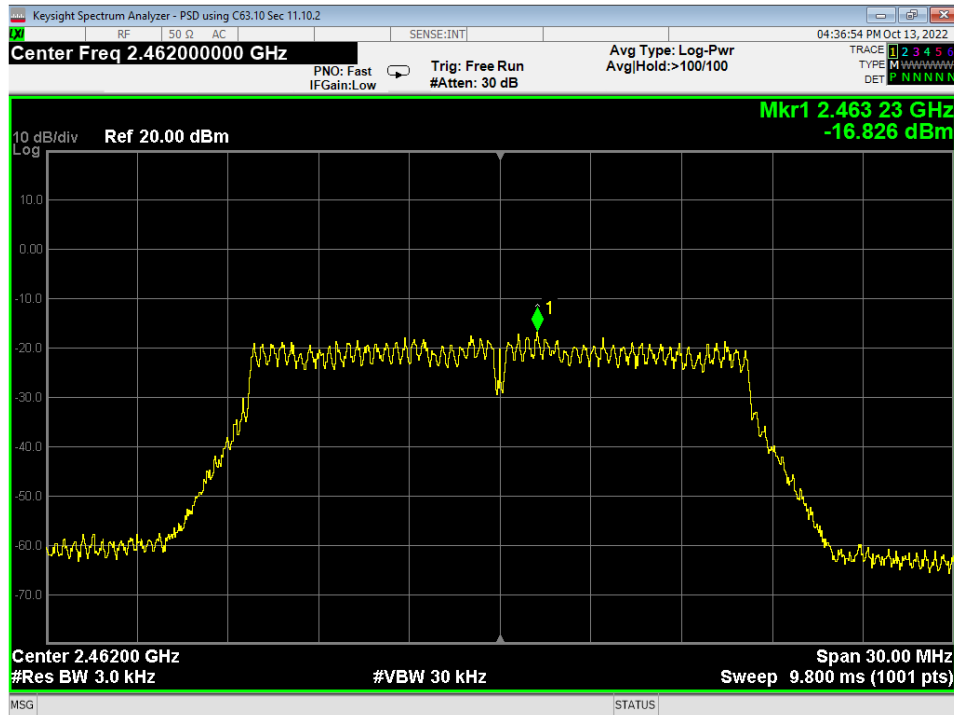


22 PSD, High, Wifi G, Low Data Rate

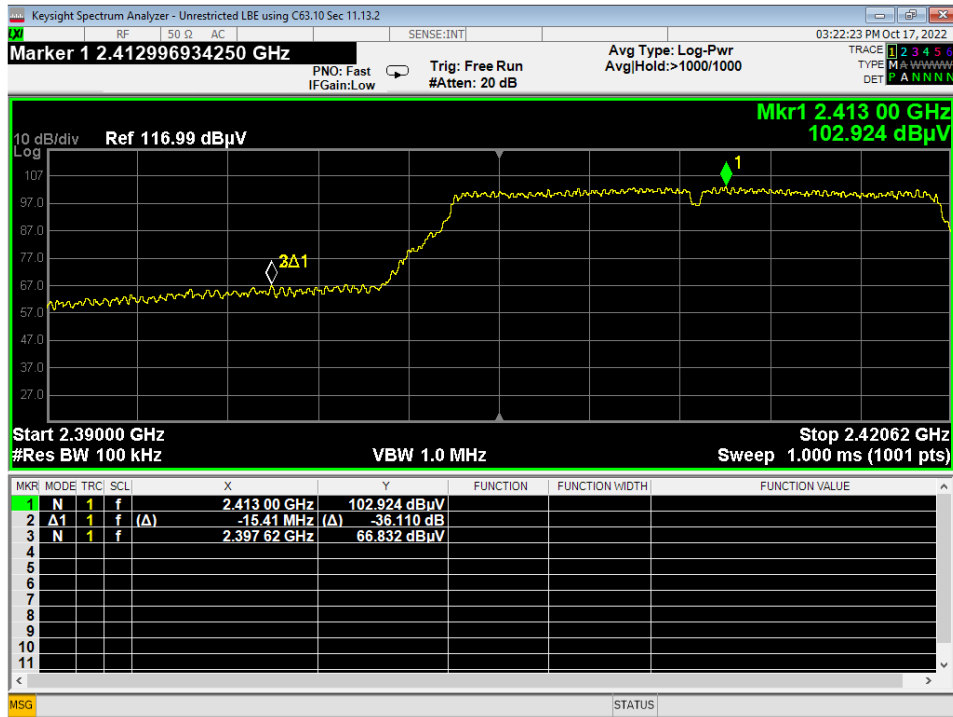


23 Lower Bandedge, Unrestricted, Wifi G, Low Data Rate

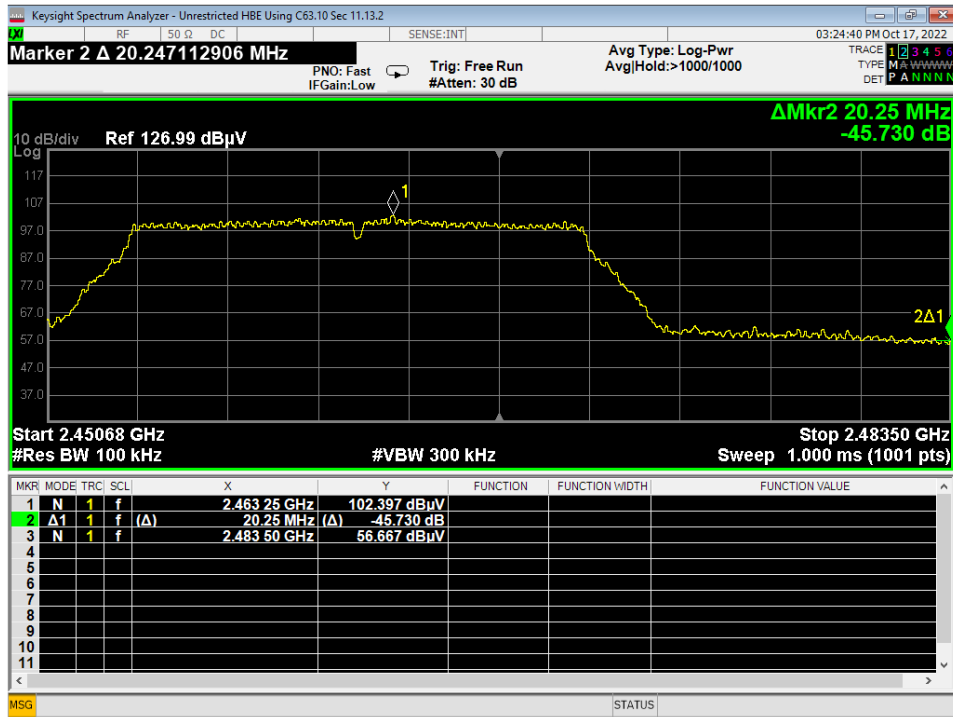


24 Higher Bandedge, Unrestricted, Wifi G, Low Data Rate

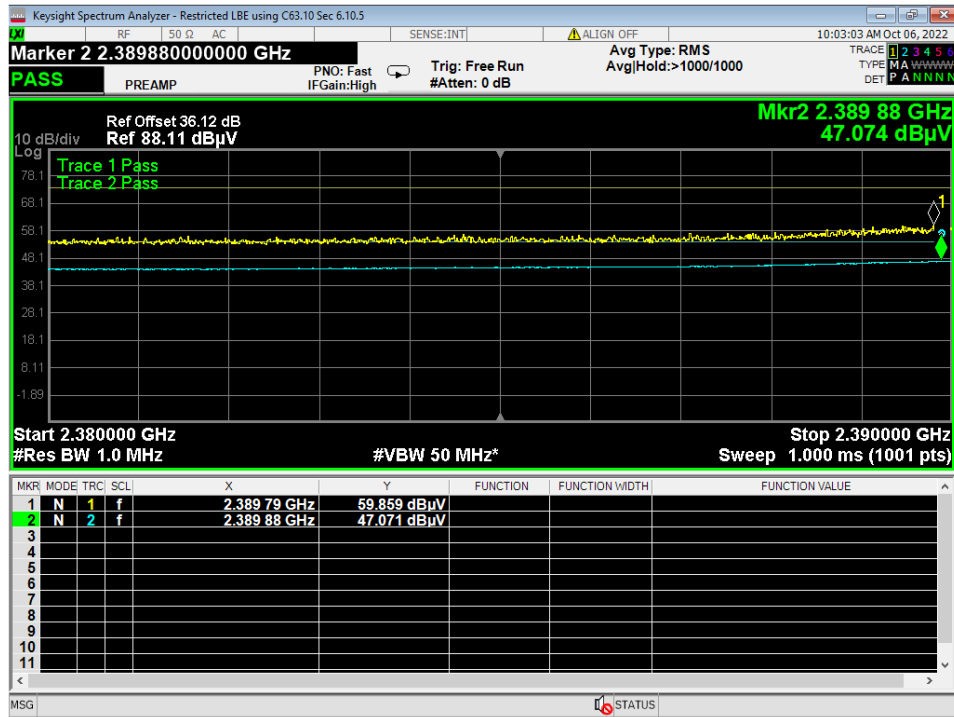


25 Lower Bandedge, Restricted, Wifi G, Low Data Rate

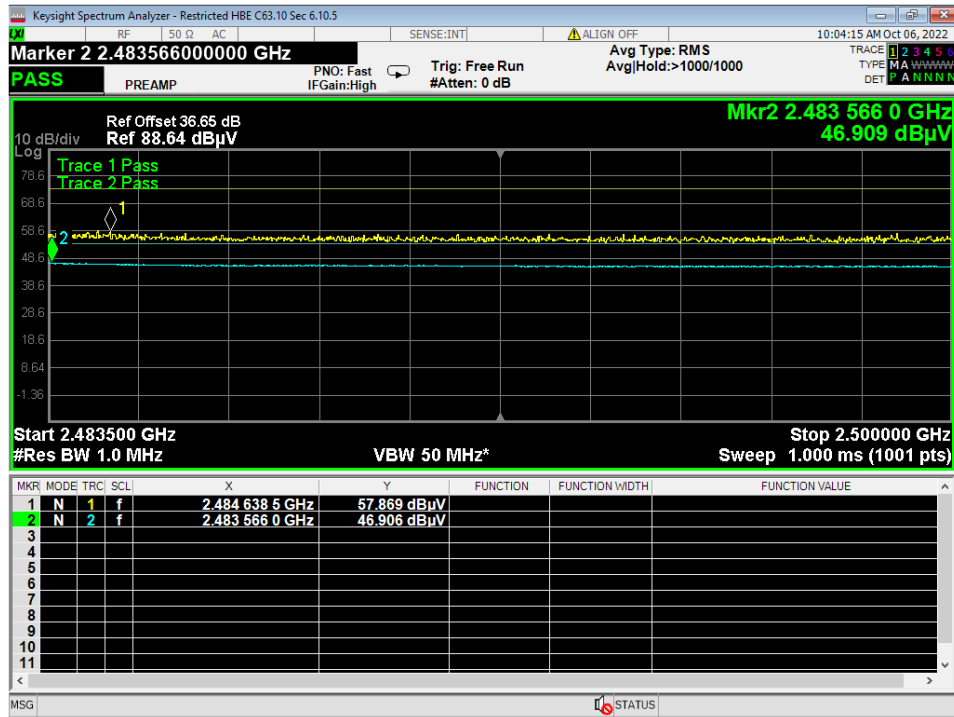


26 Higher Bandedge, Restricted, Wifi G, Low Data Rate

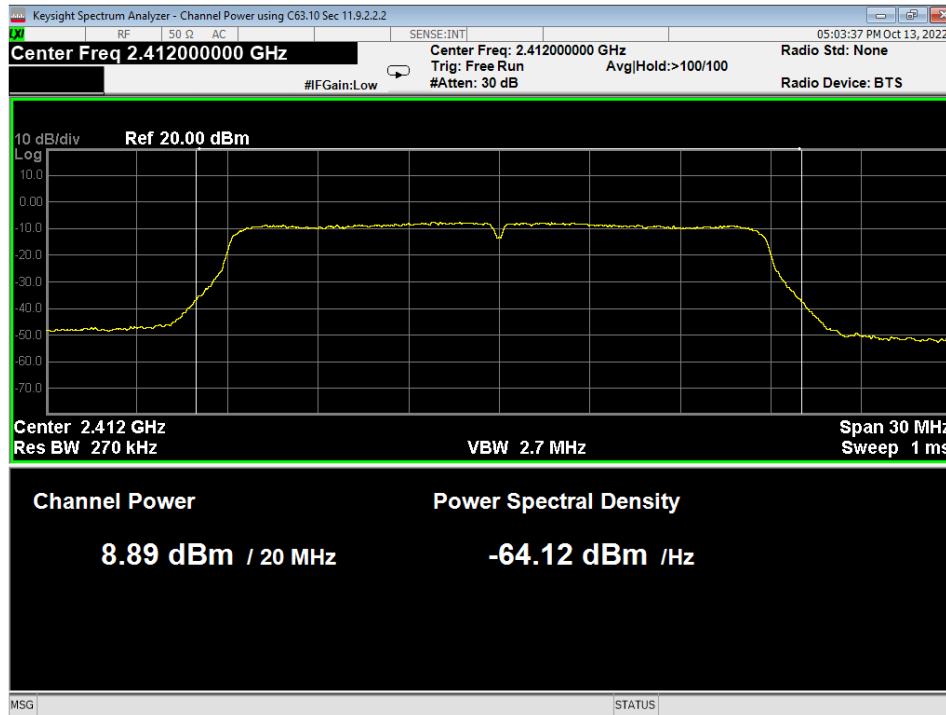


27 Average Power, Low, Wifi N, Low Data Rate

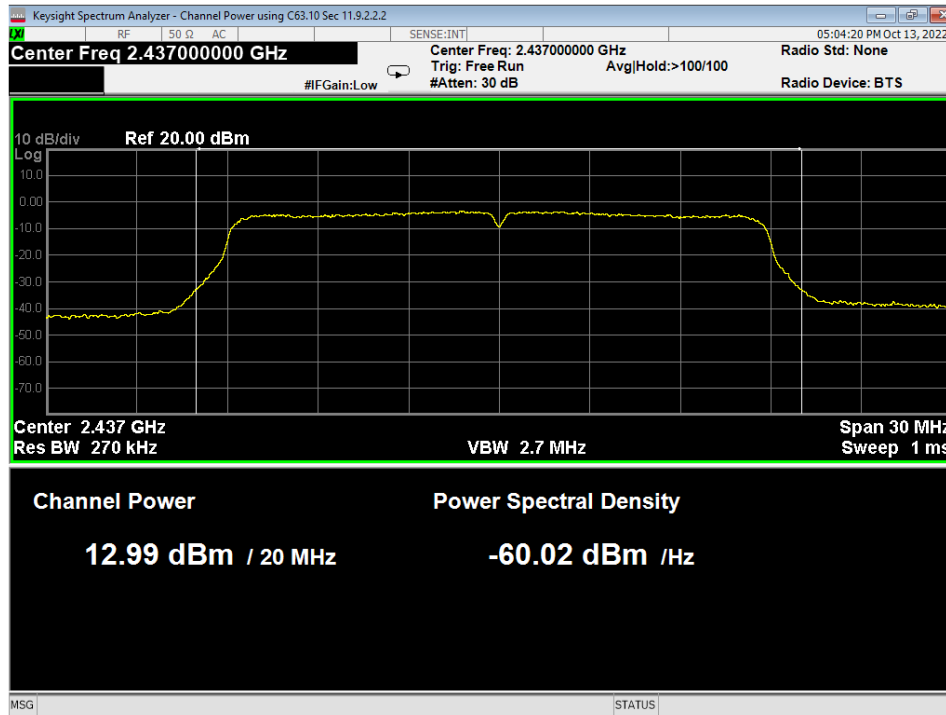


28 Average Power, Mid, Wifi N, Low Data Rate

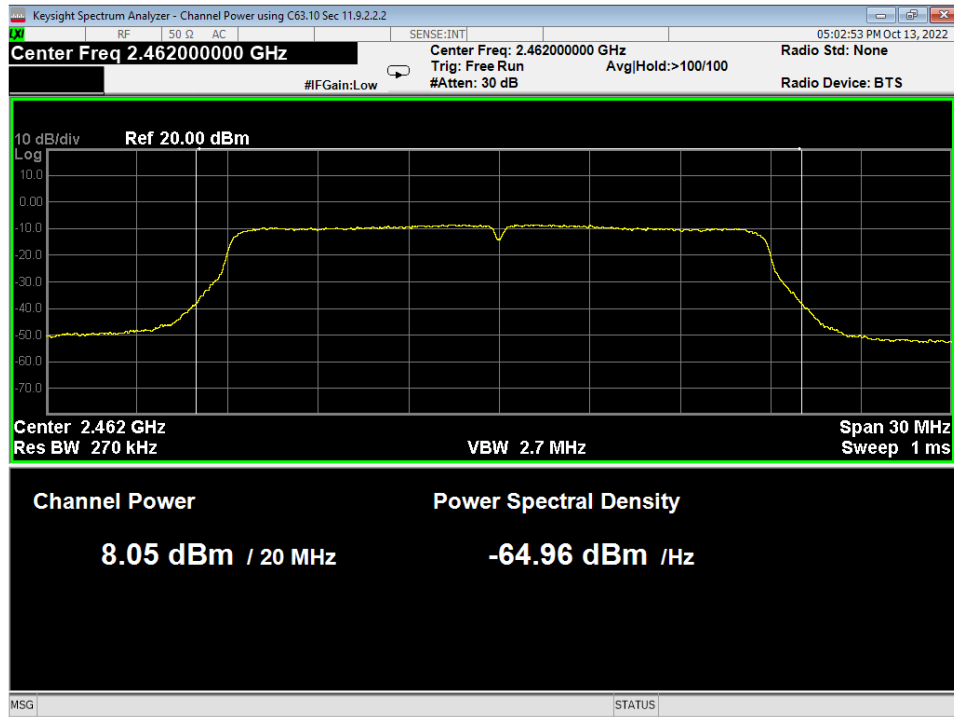


29 Average Power, High, Wifi N, Low Data Rate

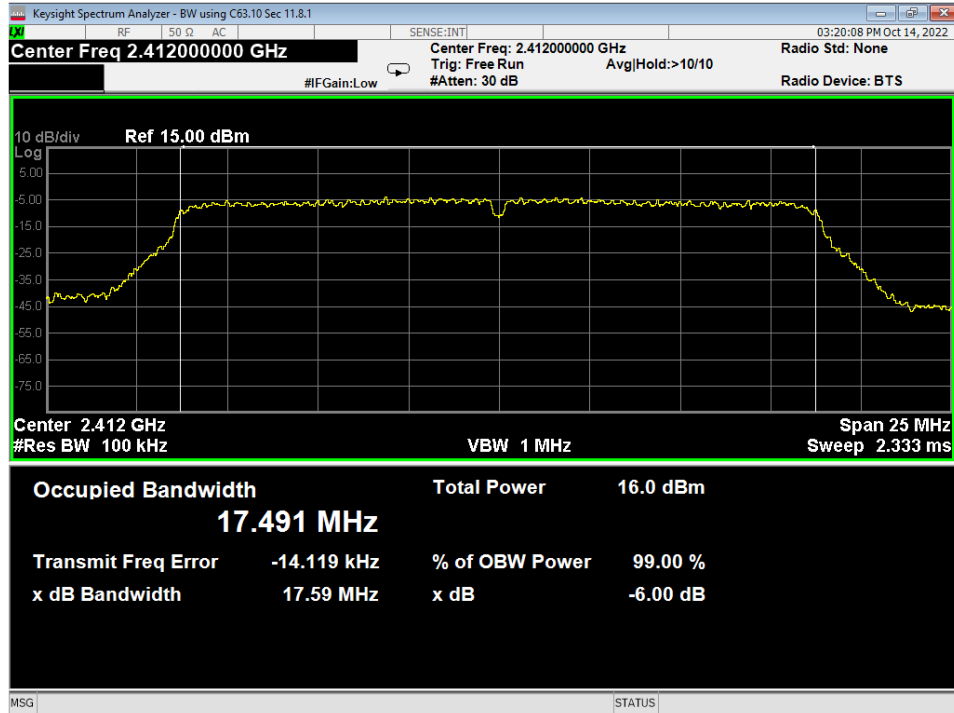


30 6dB Bandwidth, Low, Wifi N, Low Data Rate

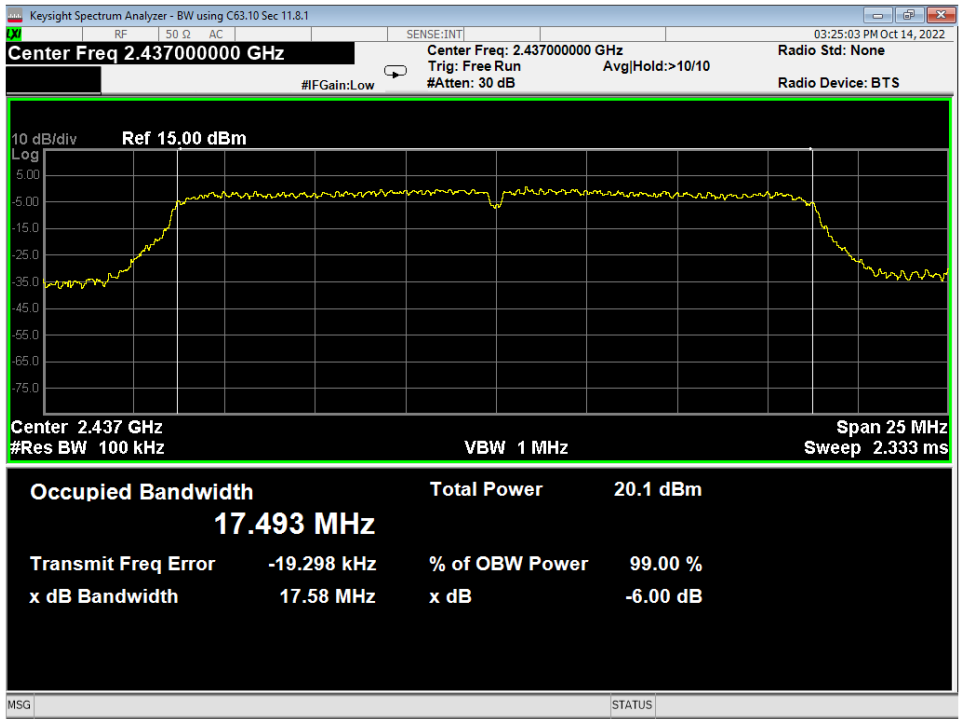


31 6dB Bandwidth, Mid, Wifi N, Low Data Rate

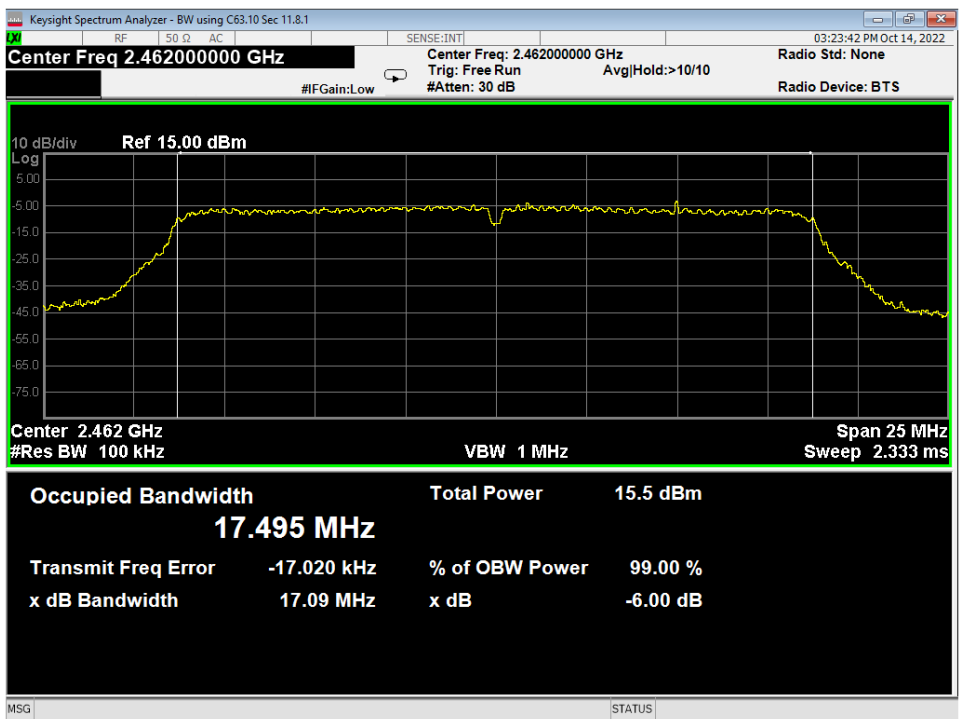


32 6dB Bandwidth, High, Wifi N, Low Data Rate

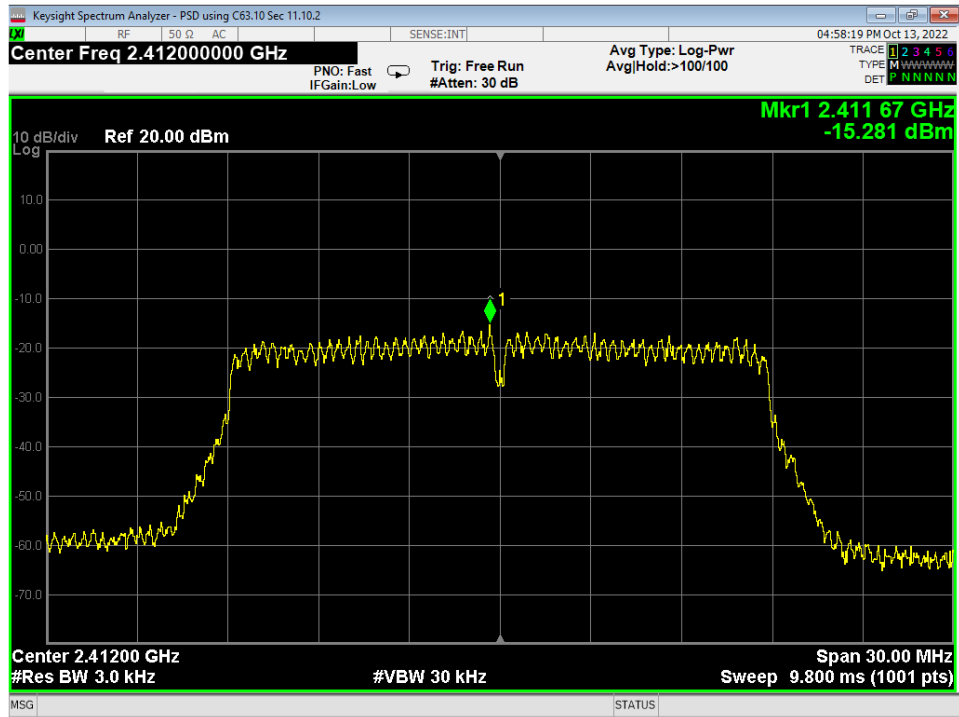


33 PSD, Low, Wifi N, Low Data Rate

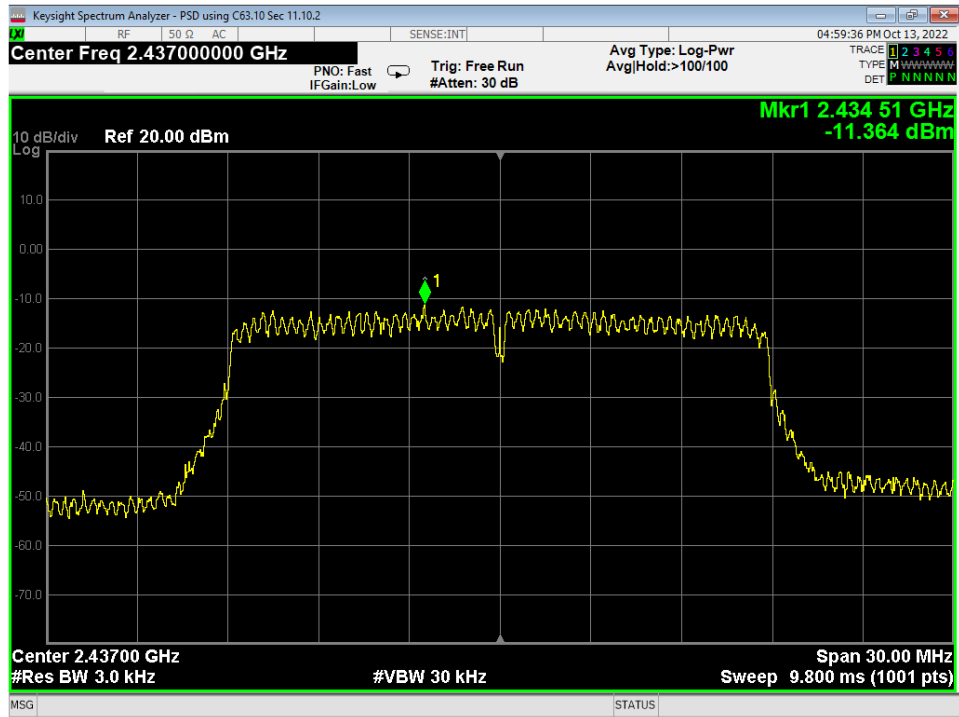


34 PSD, Mid, Wifi N, Low Data Rate

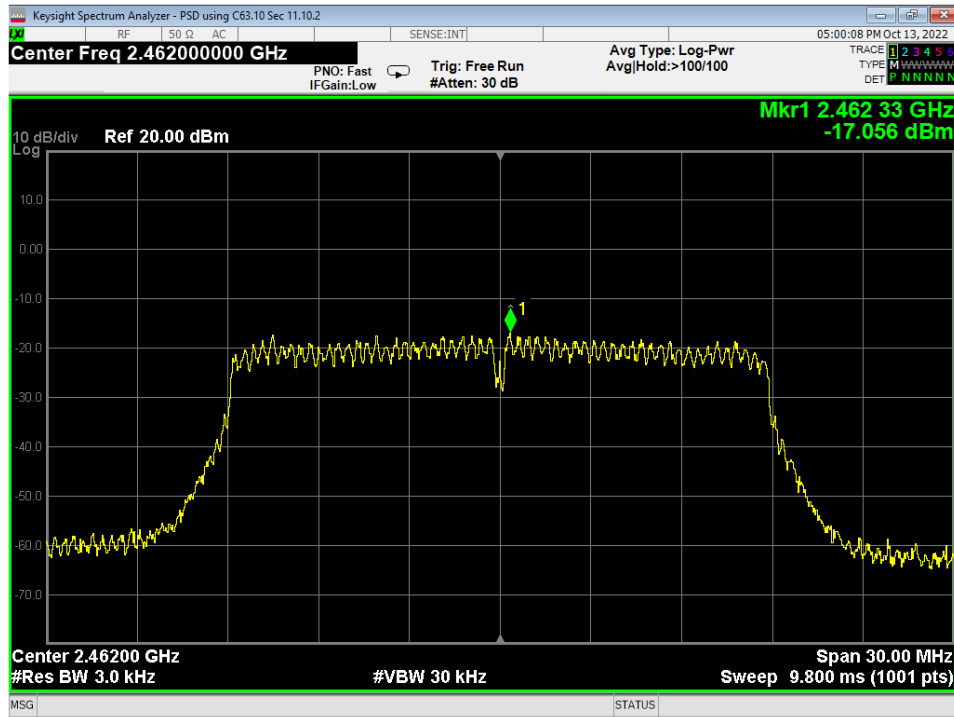


35 PSD, High, Wifi N, Low Data Rate

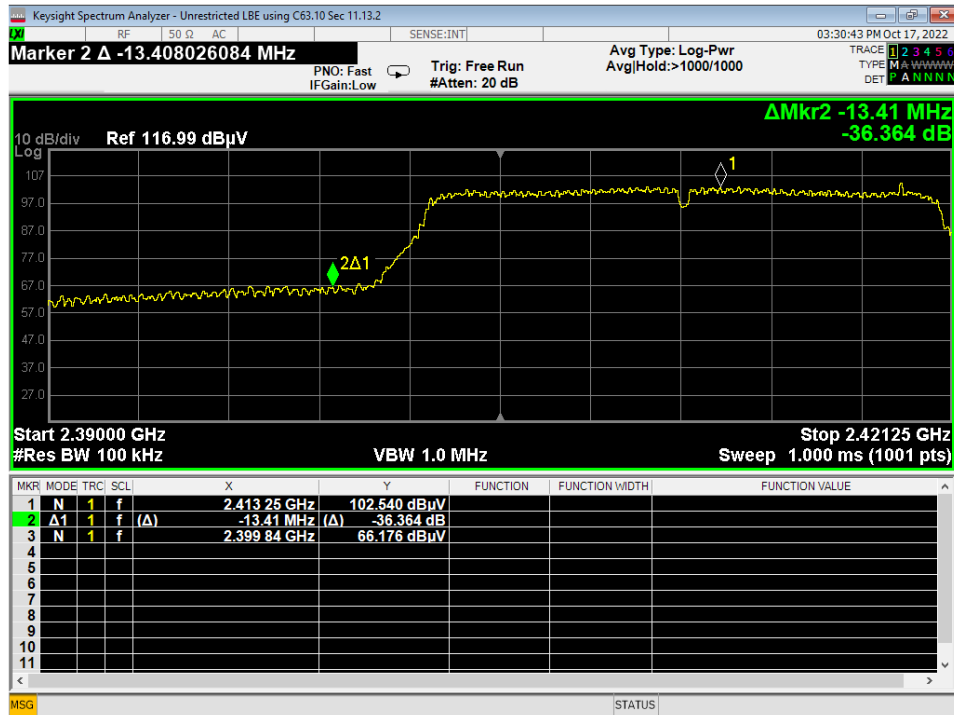


36 Lower Bandedge, Unrestricted, Wifi N, Low Data Rate

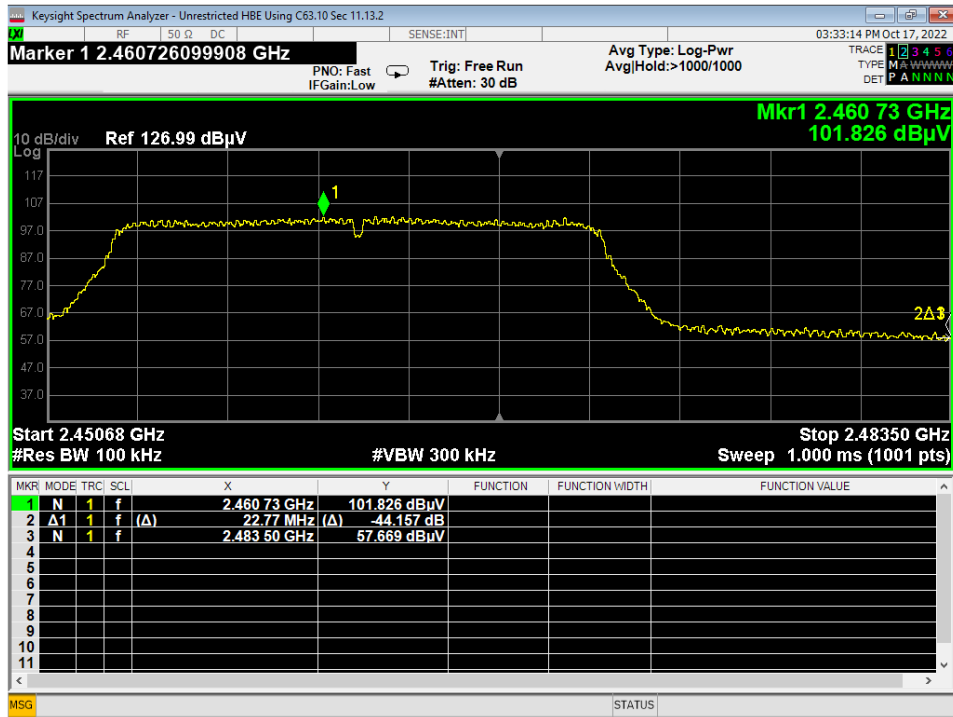


37 Higher Bandedge, Unrestricted, Wifi N, Low Data Rate

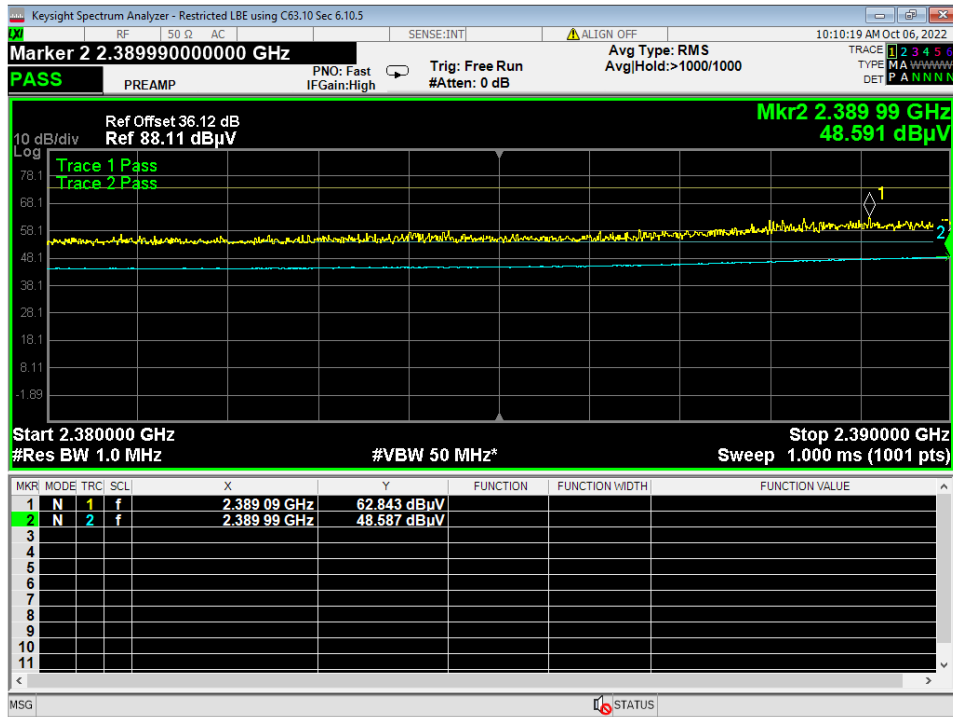


38 Lower Bandedge, Restricted, Wifi N, Low Data Rate

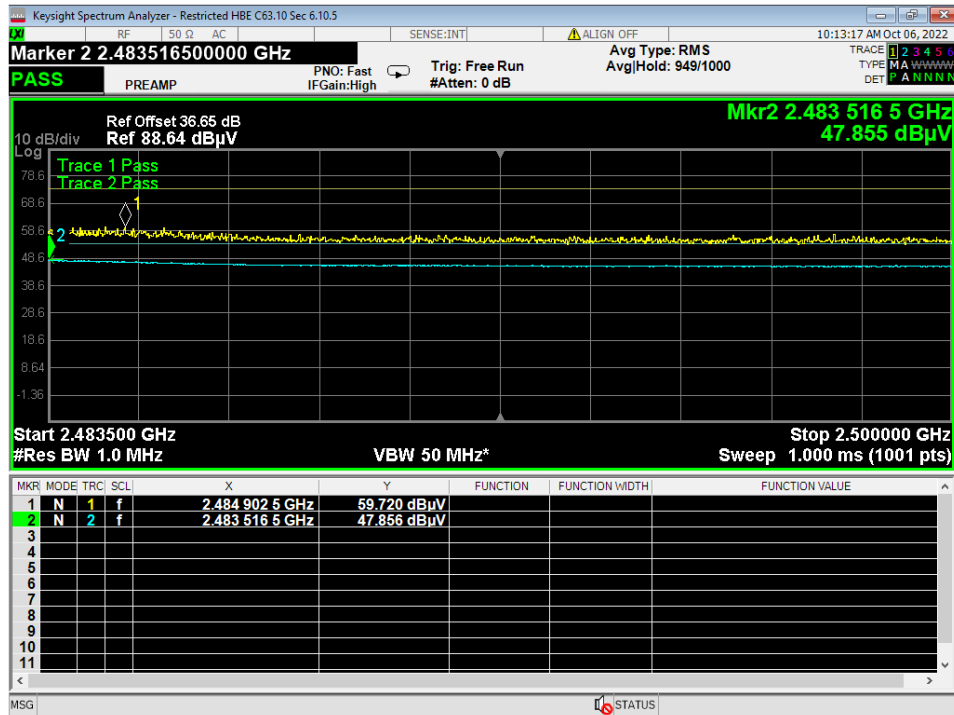


39 Higher Bandedge, Restricted, Wifi N, Low Data Rate

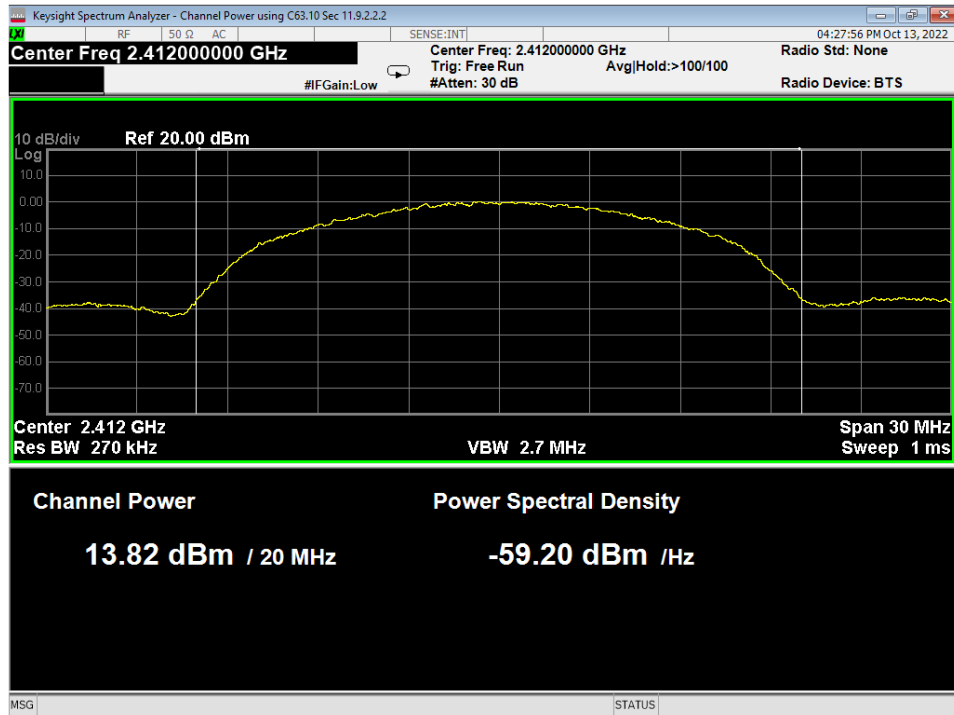


40 Average Power, Low, Wifi B, High Data Rate

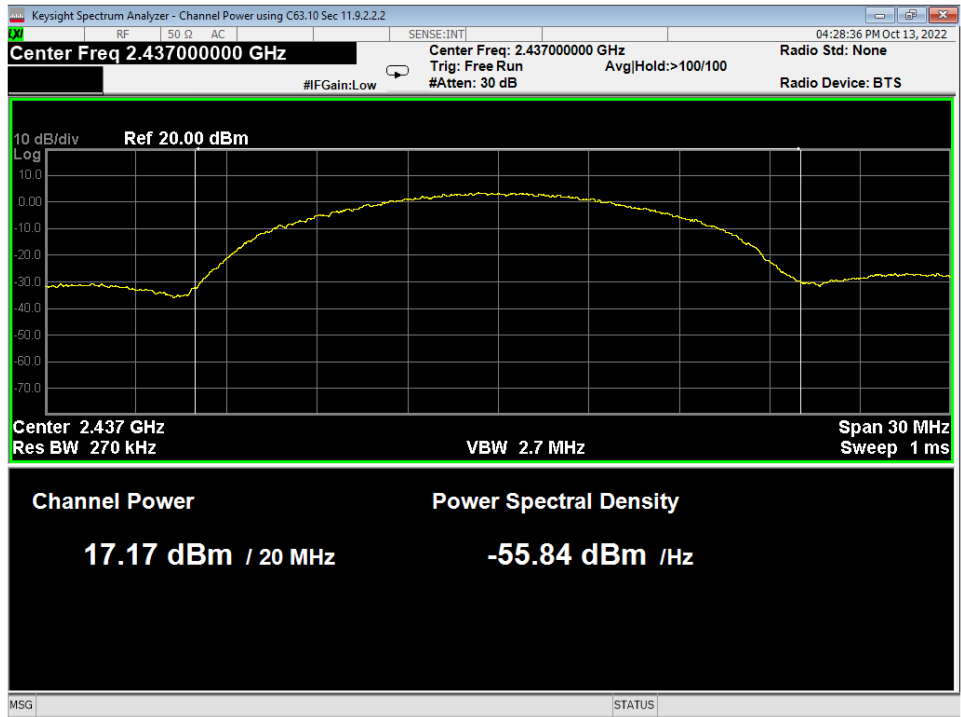


41 Average Power, Mid, Wifi B, High Data Rate

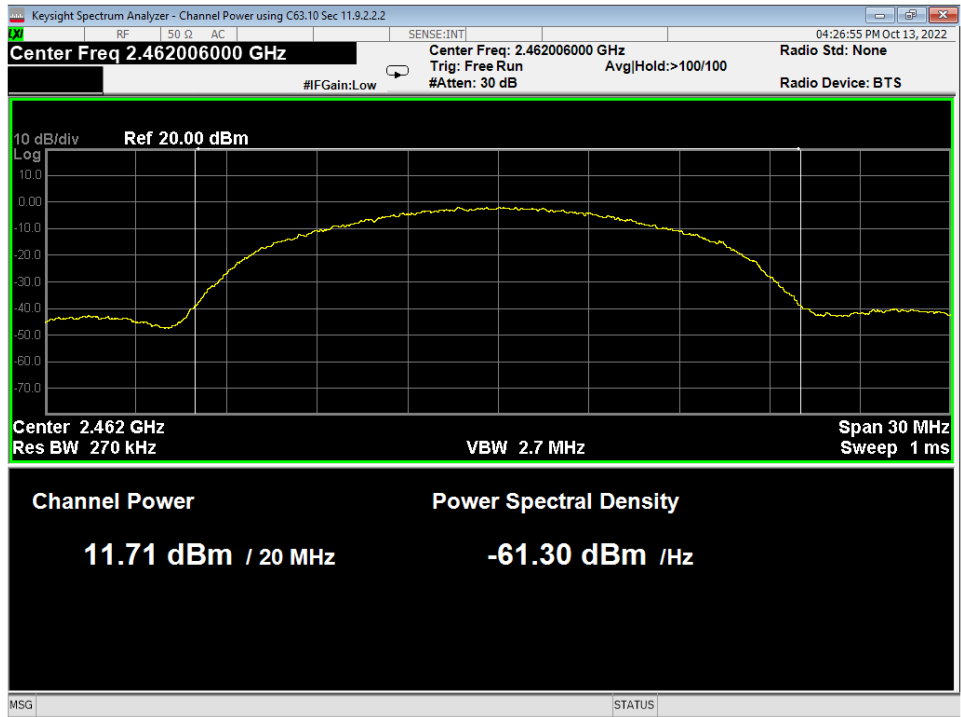


42 Average Power, High, Wifi B, High Data Rate

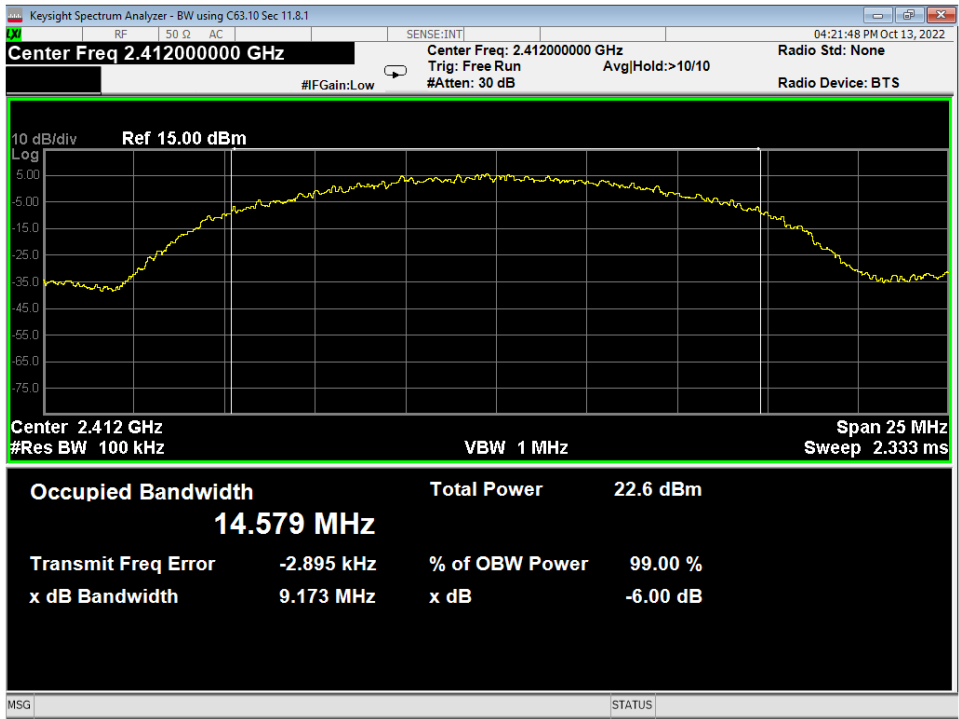


43 6dB Bandwidth, Low, Wifi B, High Data Rate

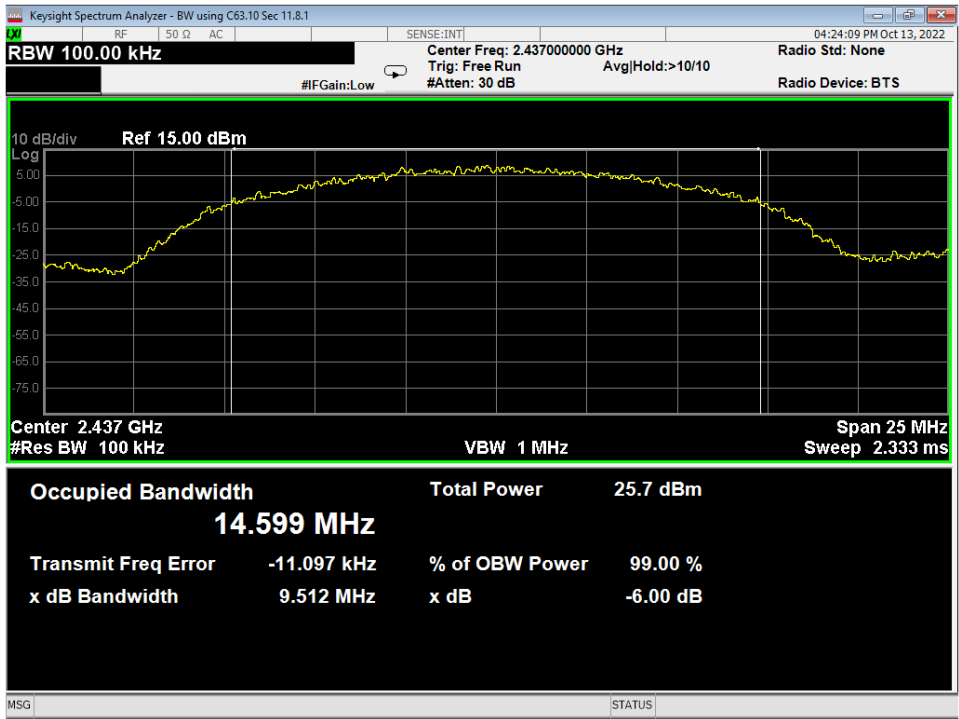


44 6dB Bandwidth, Mid, Wifi B, High Data Rate

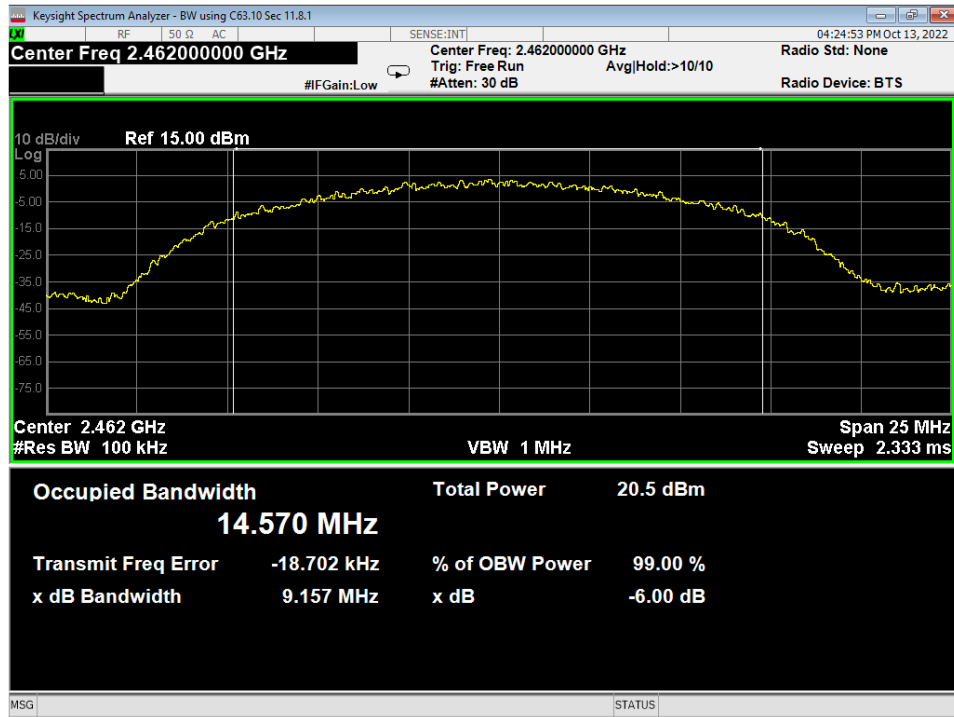


45 6dB Bandwidth, High, Wifi B, High Data Rate

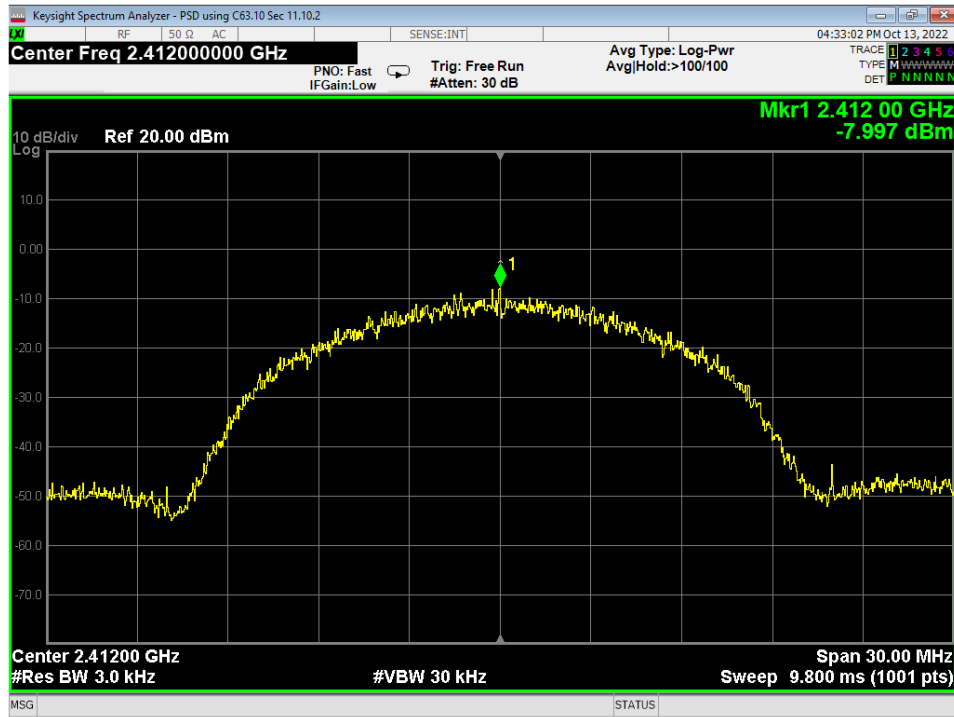


46 PSD, Low, Wifi B, High Data Rate

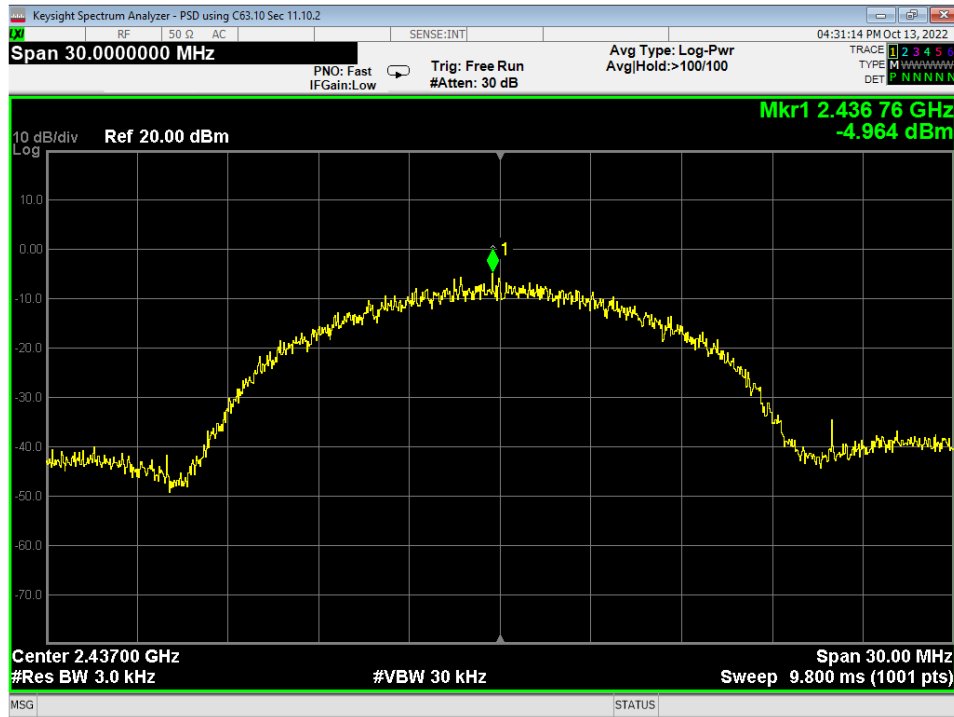


47 PSD, Mid, Wifi B, High Data Rate

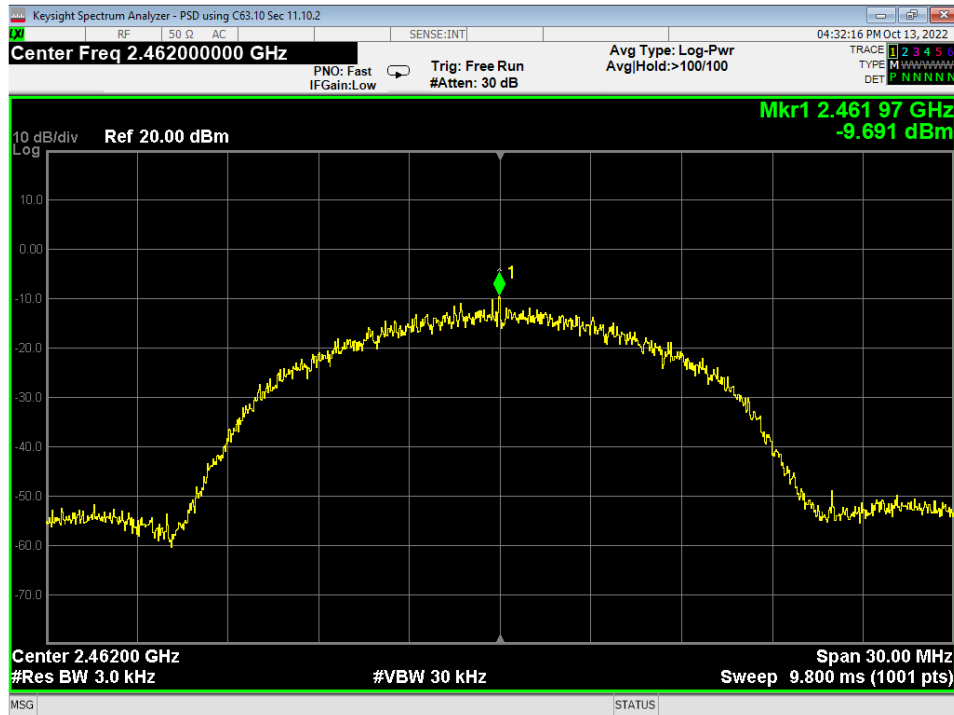


48 PSD, High, Wifi B, High Data Rate

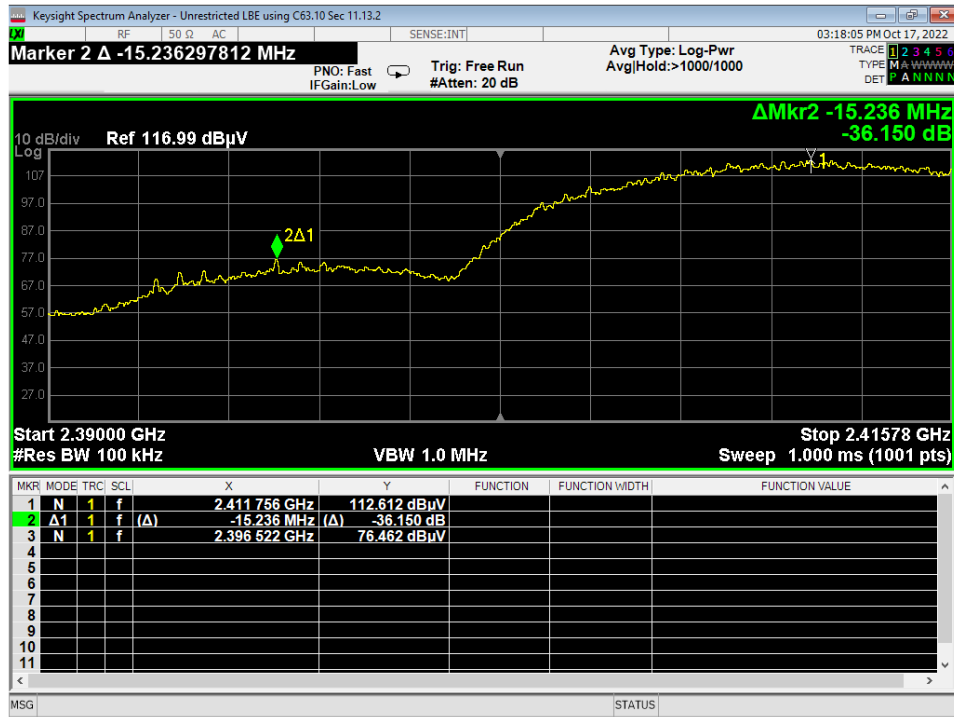


49 Lower Bandedge, Unrestricted, Wifi B, High Data Rate

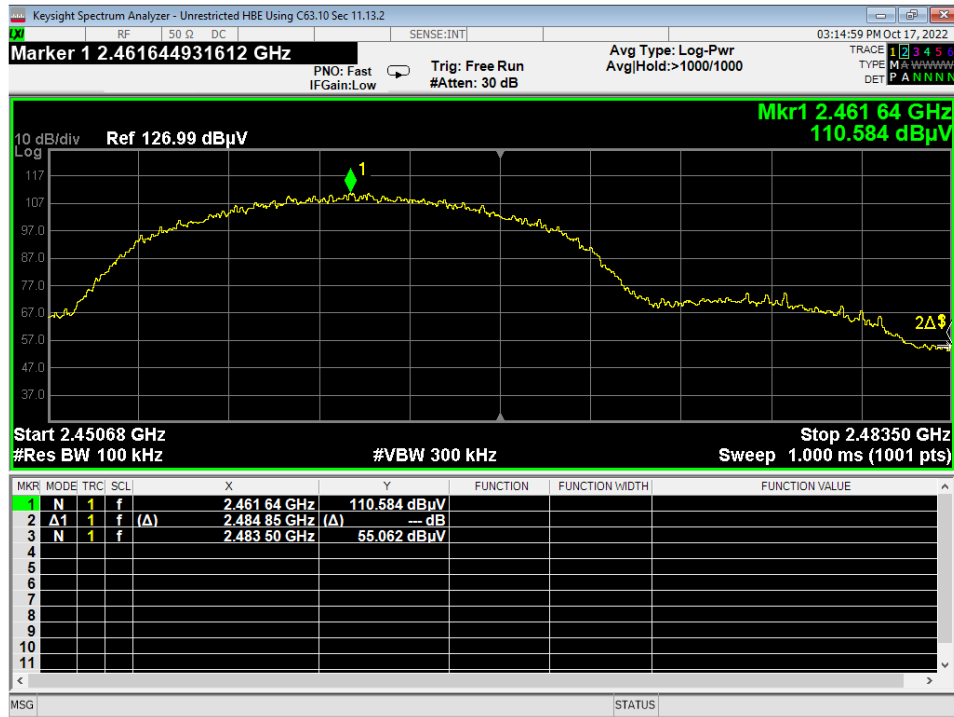


50 Higher Bandedge, Unrestricted, Wifi B, High Data Rate

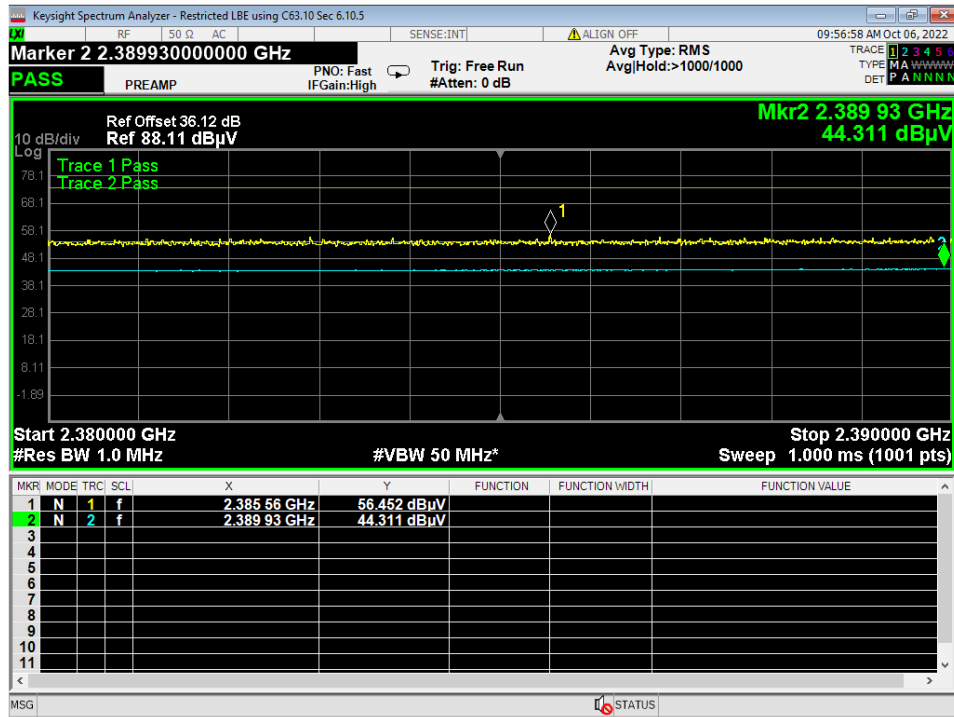


51 Lower Bandedge, Restricted, Wifi B, High Data Rate

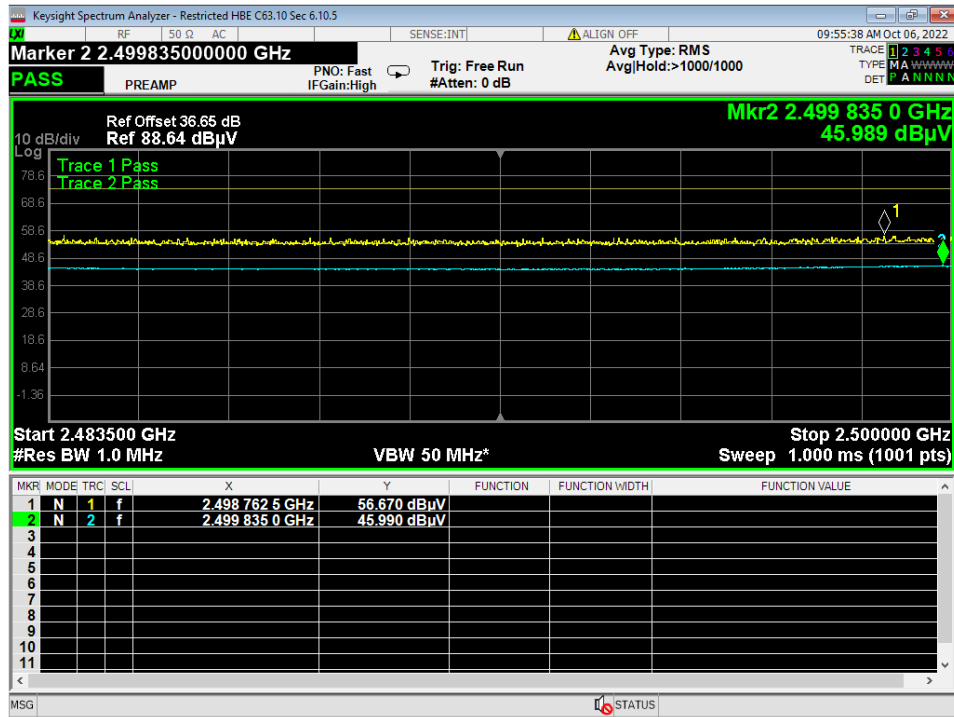


52 Higher Bandedge, Restricted, Wifi B, High Data Rate

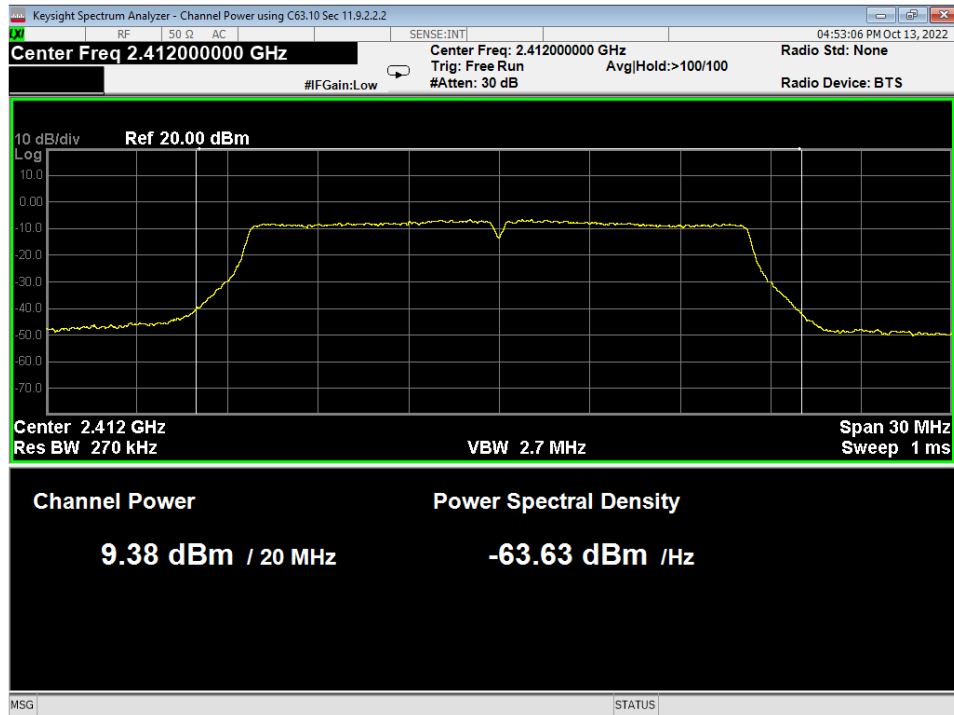


53 Average Power, Low, Wifi G, High Data Rate

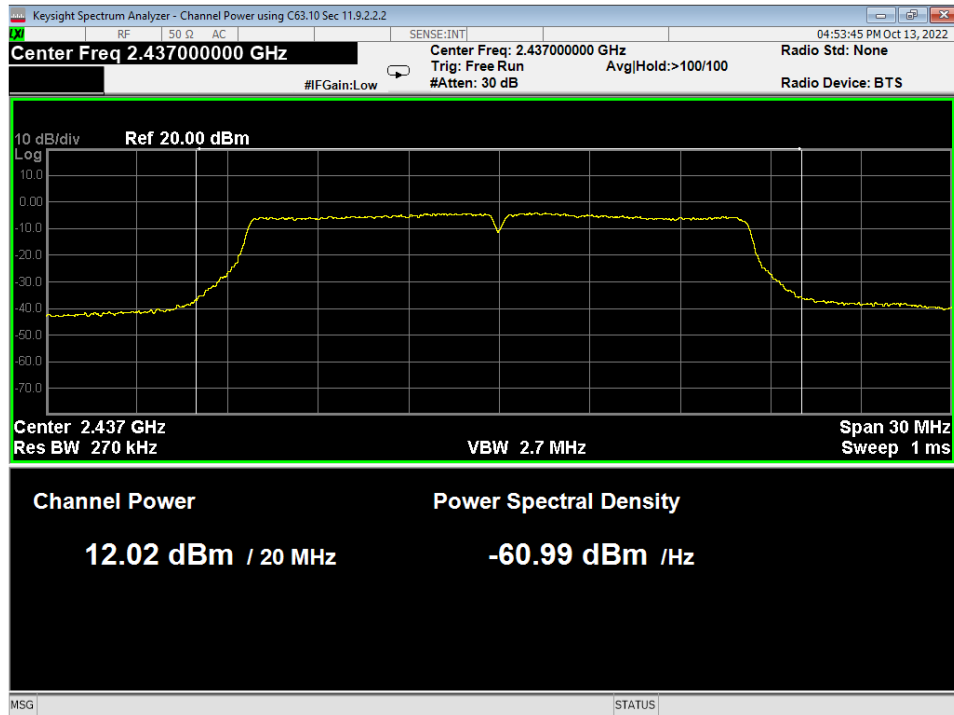


54 Average Power, Mid, Wifi G, High Data Rate

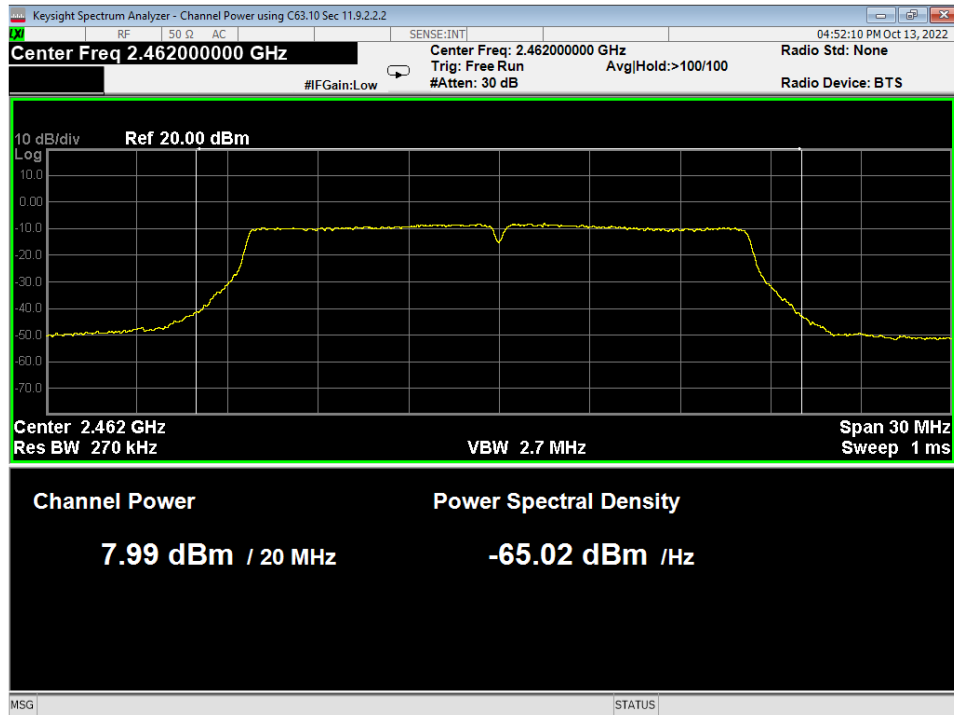


55 Average Power, High, Wifi G, High Data Rate

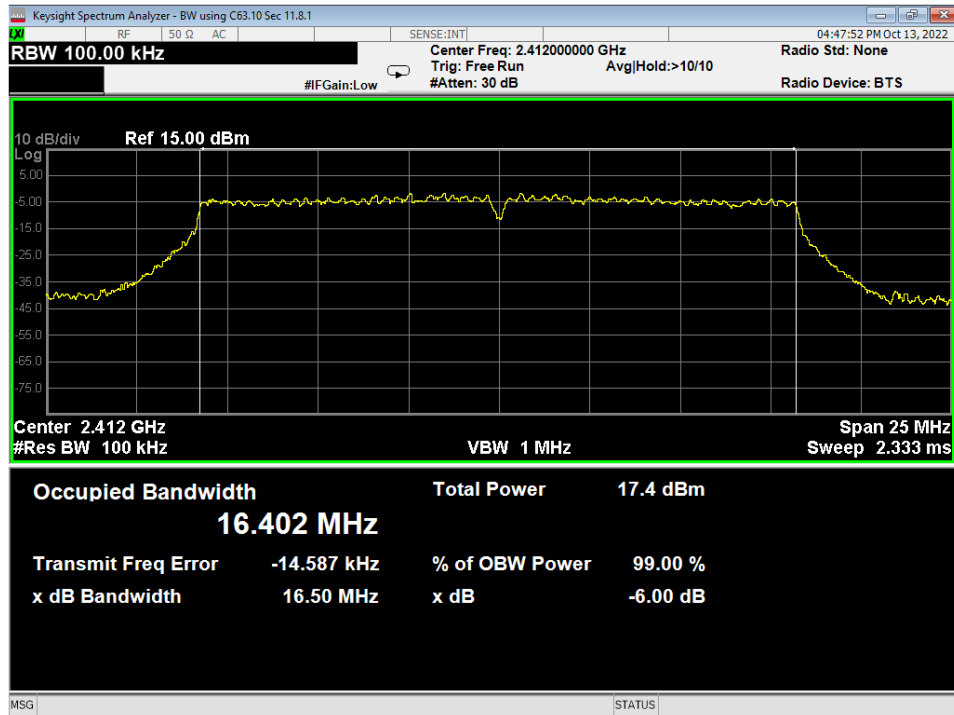


56 6dB Bandwidth, Low, Wifi G, High Data Rate

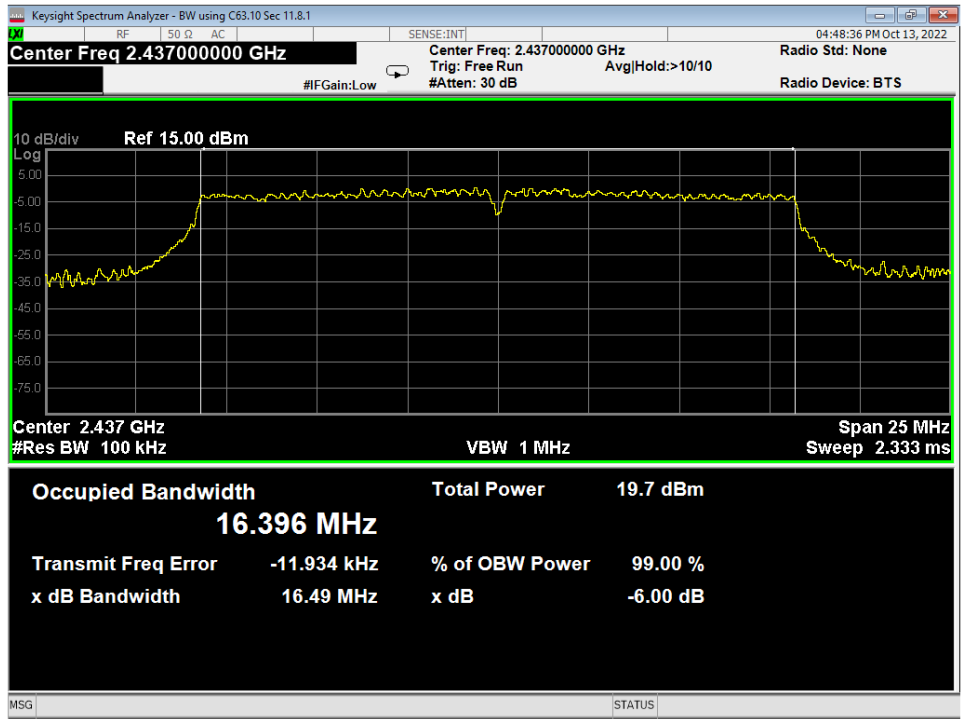


57 6dB Bandwidth, Mid, Wifi G, High Data Rate

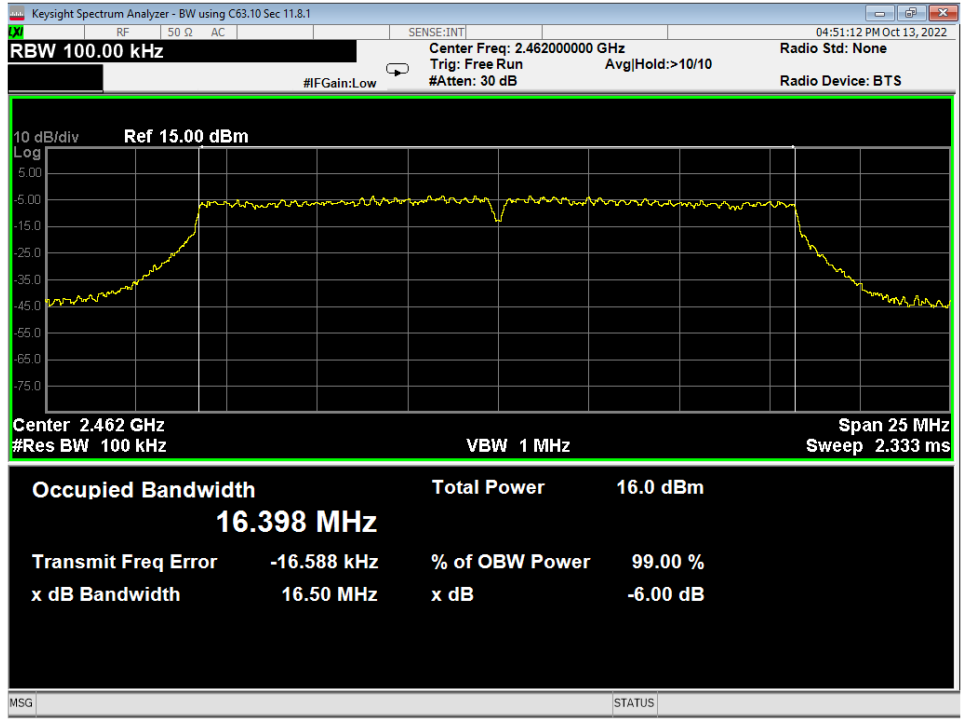


58 6dB Bandwidth, High, Wifi G, High Data Rate

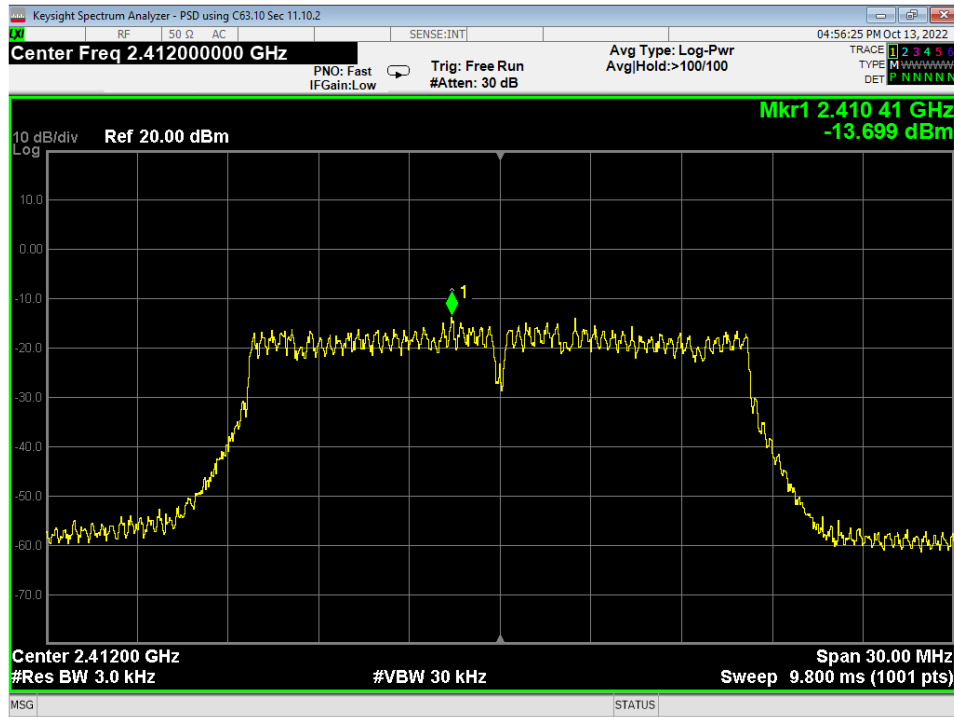


59 PSD, Low, Wifi G, High Data Rate

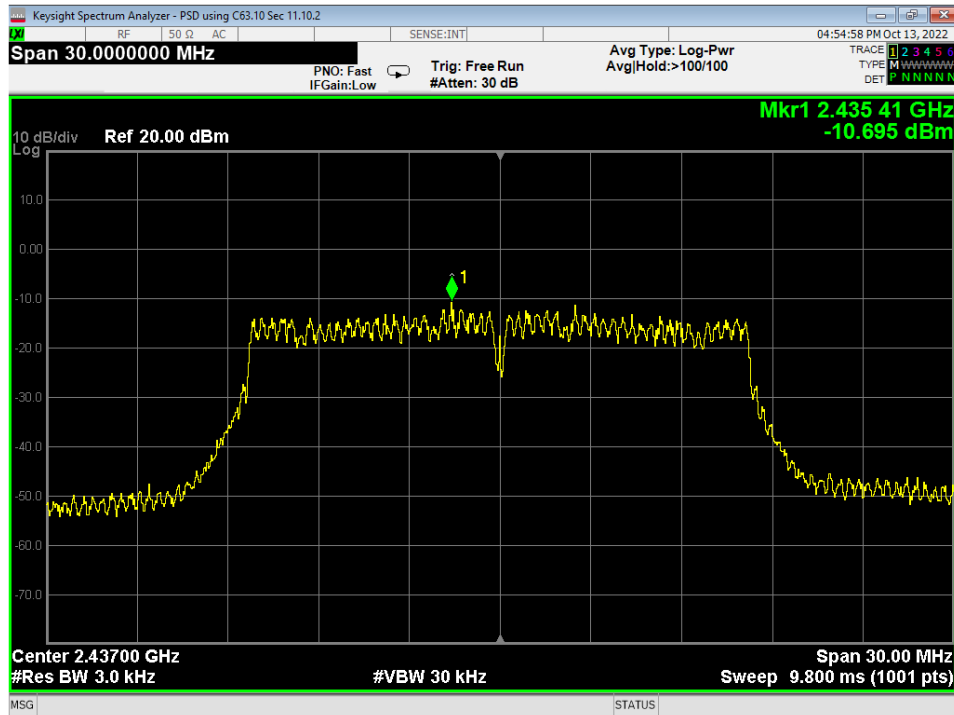


60 PSD, Mid, Wifi G, High Data Rate

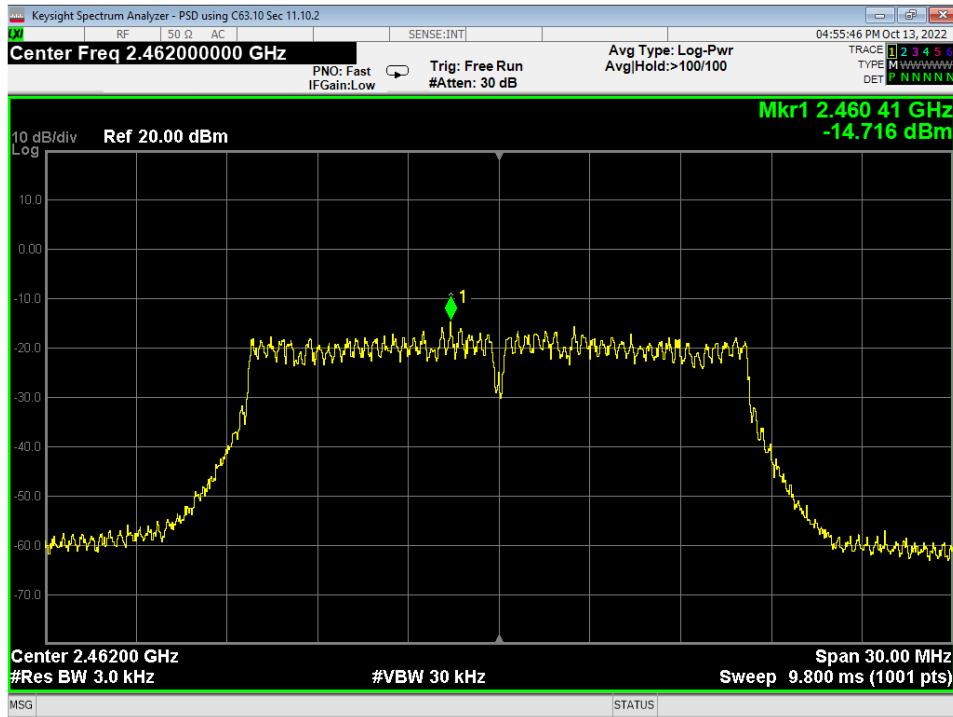


61 PSD, High, Wifi G, High Data Rate

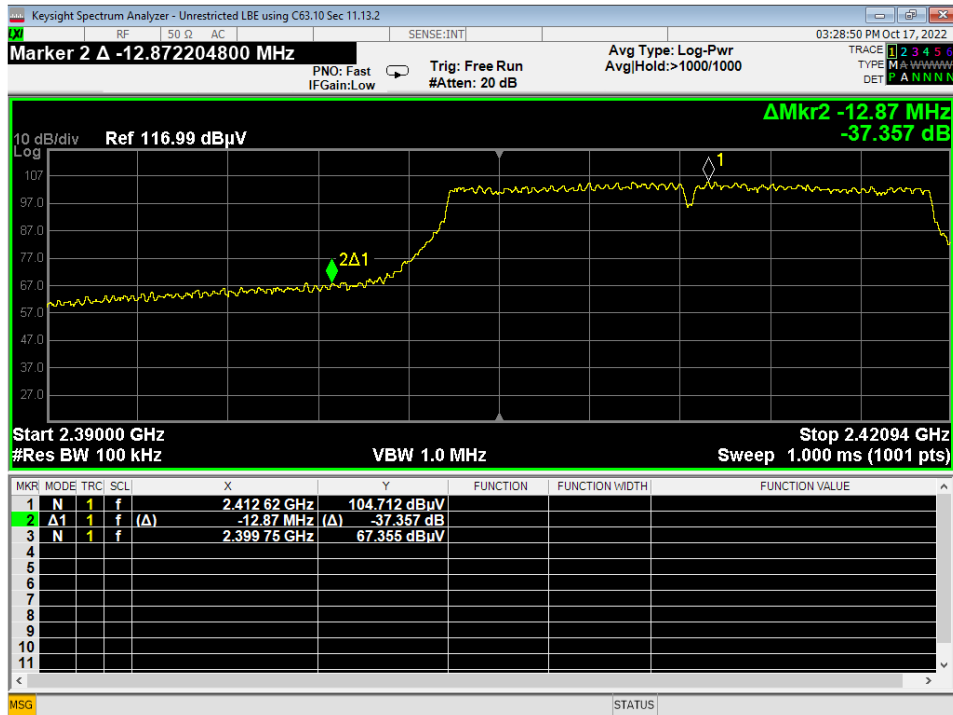


62 Lower Banded, Unrestricted, Wifi G, High Data Rate

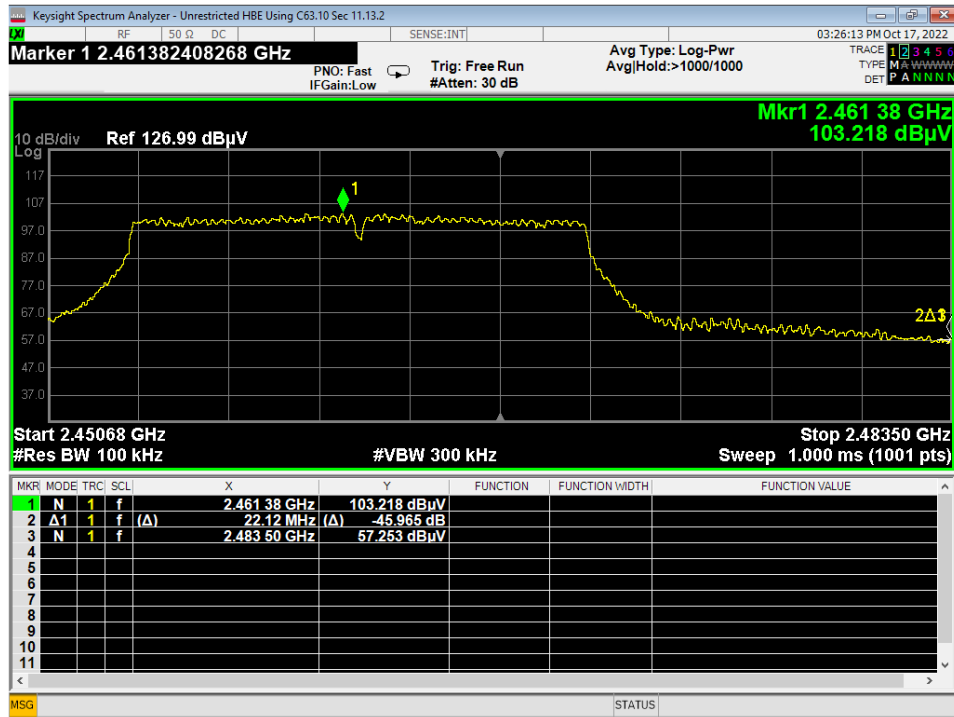


63 Higher Bandedge, Unrestricted, Wifi G, High Data Rate

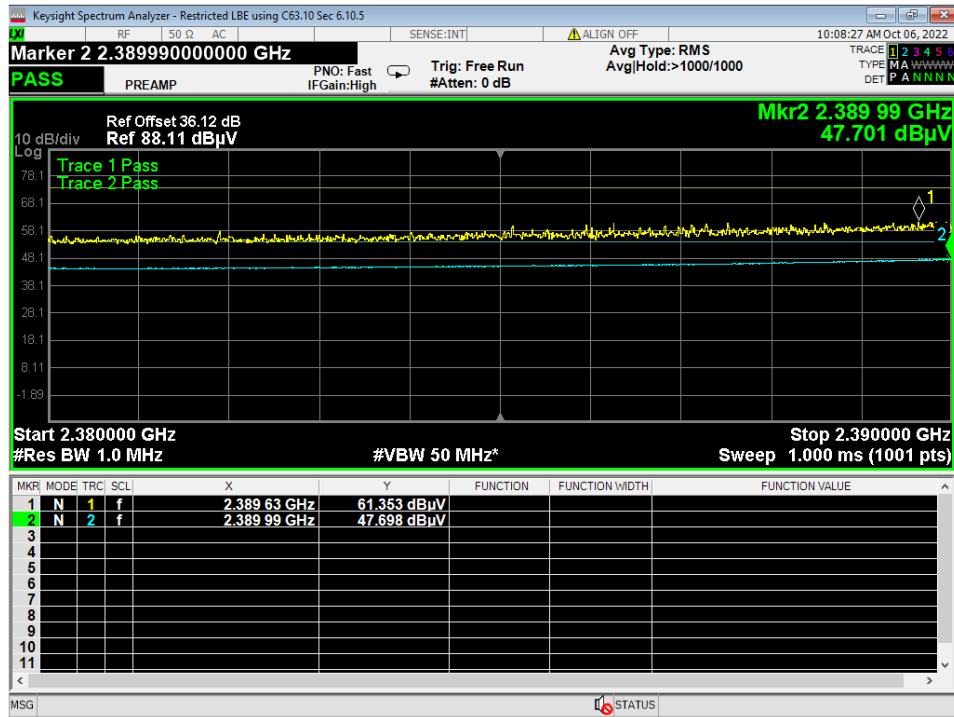


64 Lower Bandedge, Restricted, Wifi G, High Data Rate

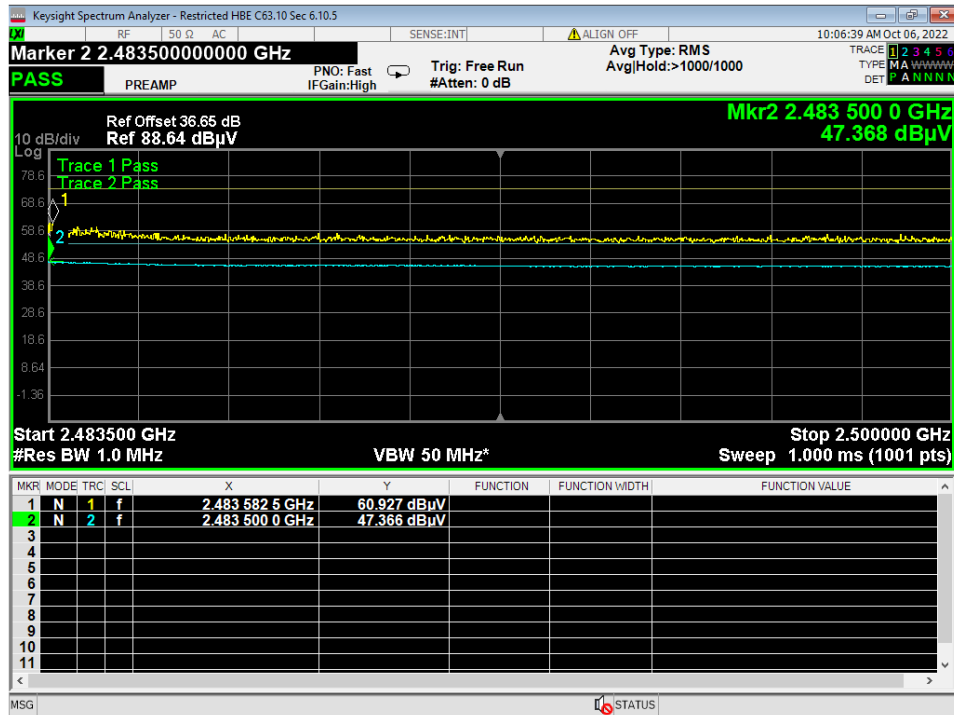


65 Higher Bandedge, Restricted, Wifi G, High Data Rate

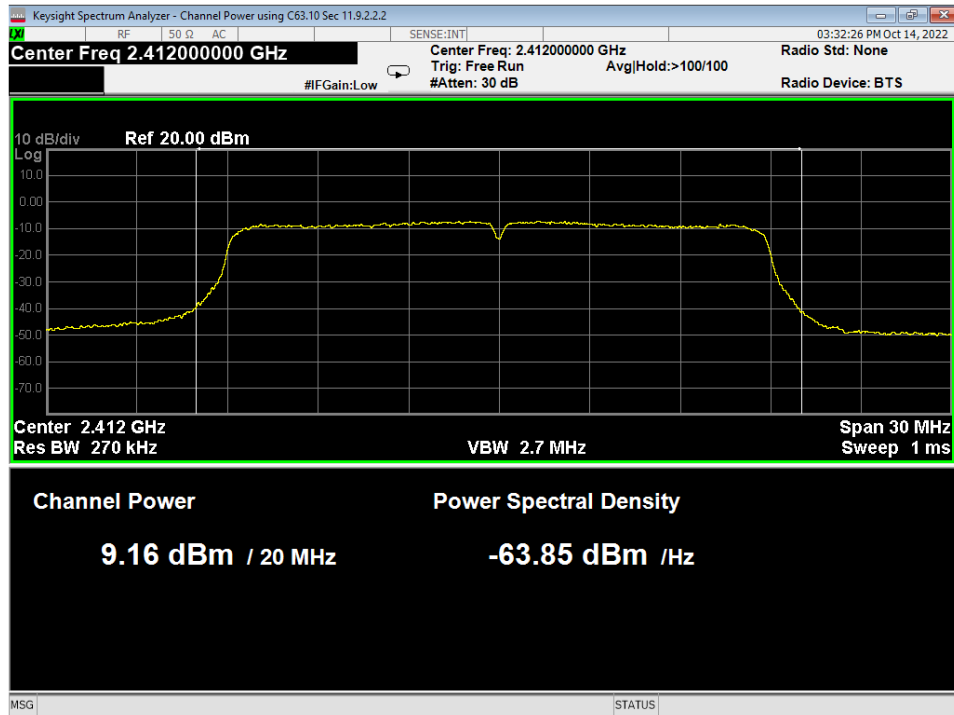


66 Average Power, Low, Wifi N, High Data Rate

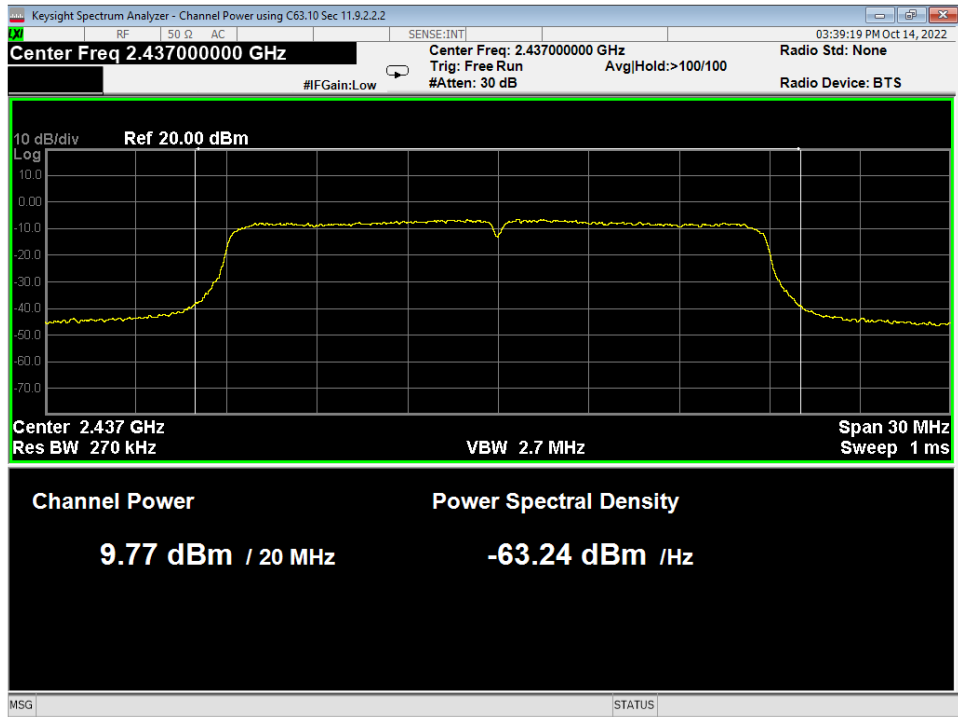


67 Average Power, Mid, Wifi N, High Data Rate

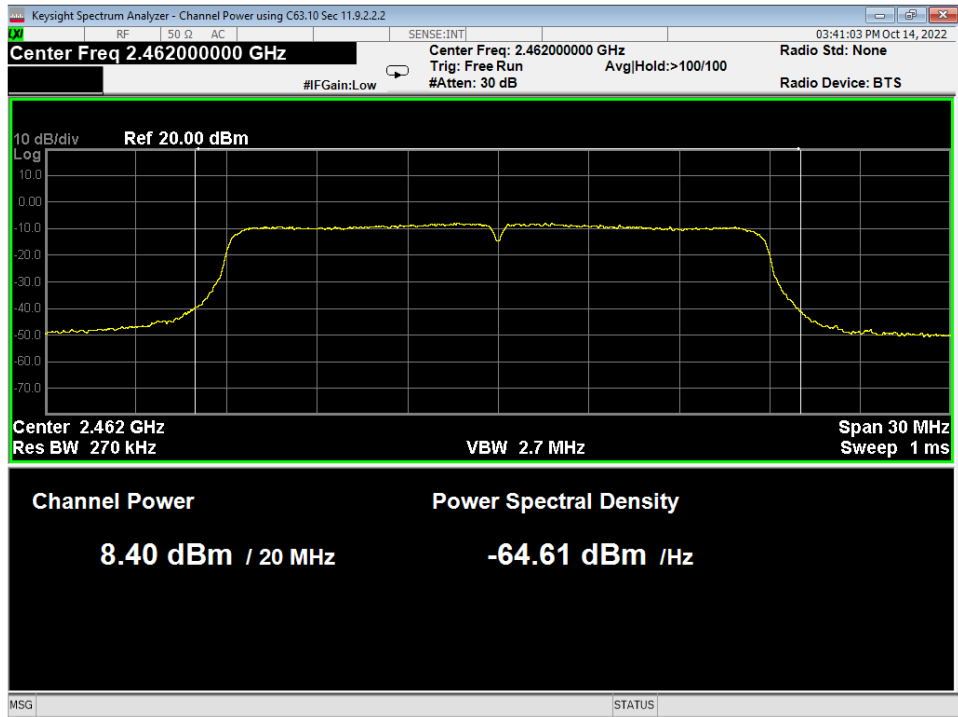


68 Average Power, High, Wifi N, High Data Rate

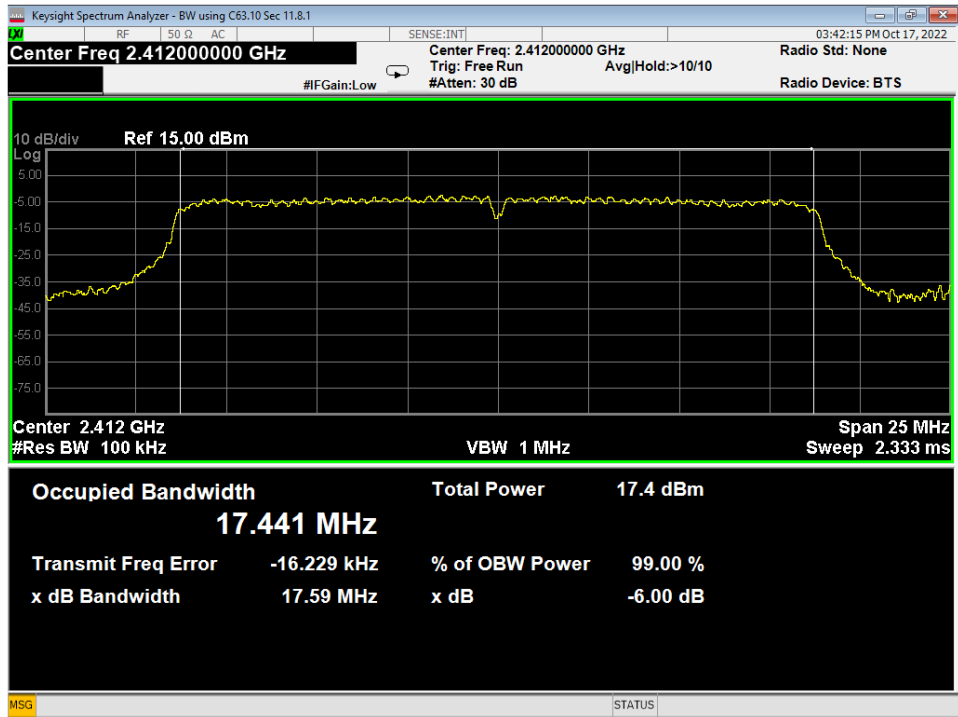


69 dB Bandwidth, Low, Wifi N, High Data Rate

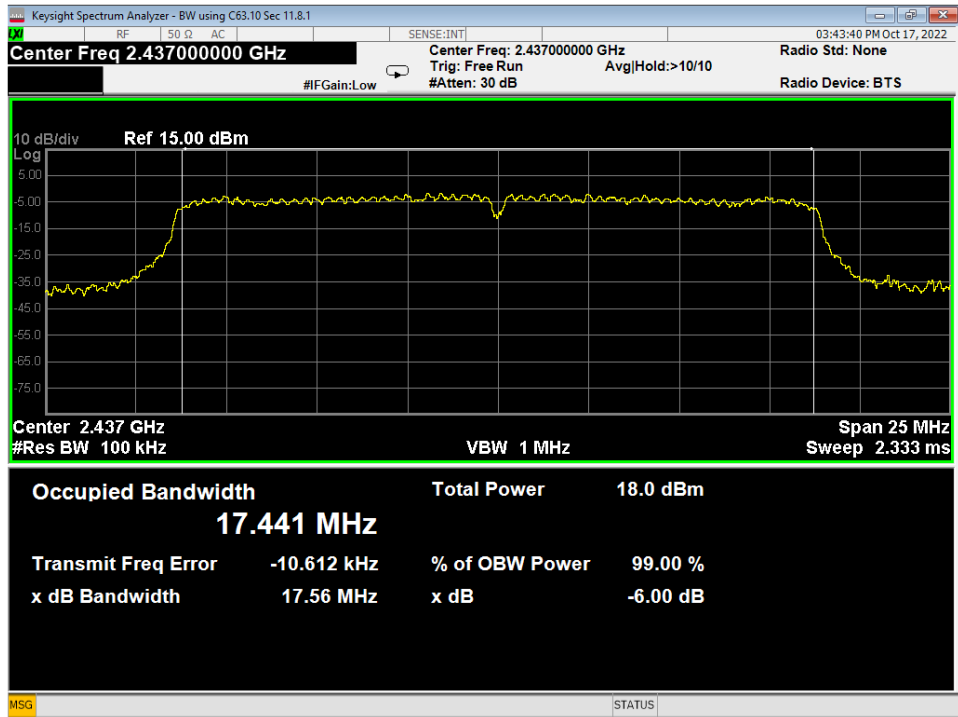


70 dB Bandwidth, Mid, Wifi N, High Data Rate

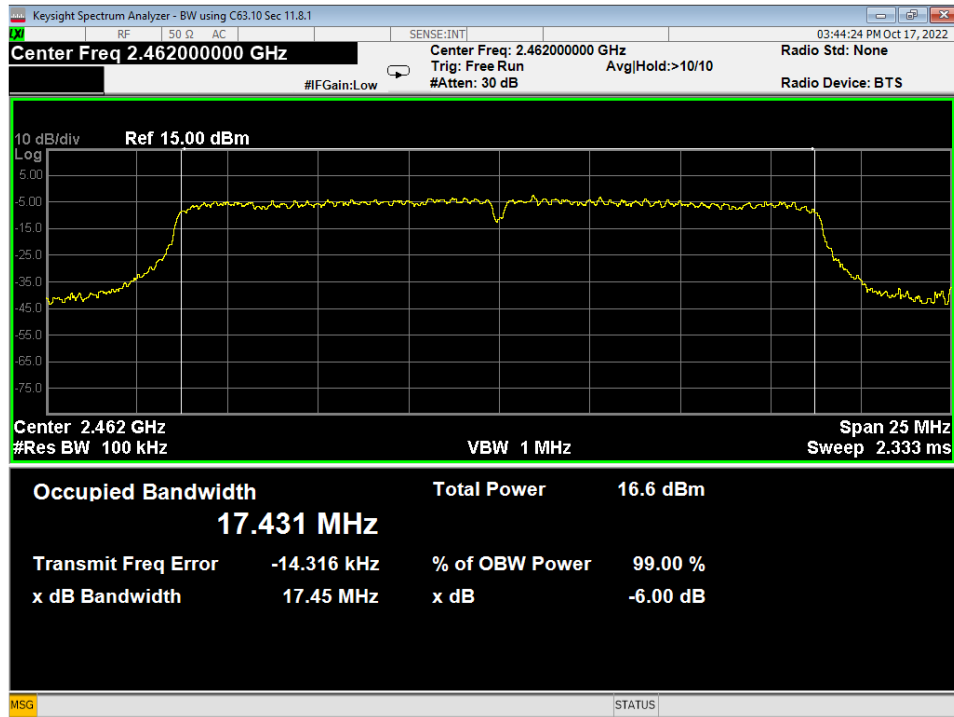


71 6dB Bandwidth, High, Wifi N, High Data Rate

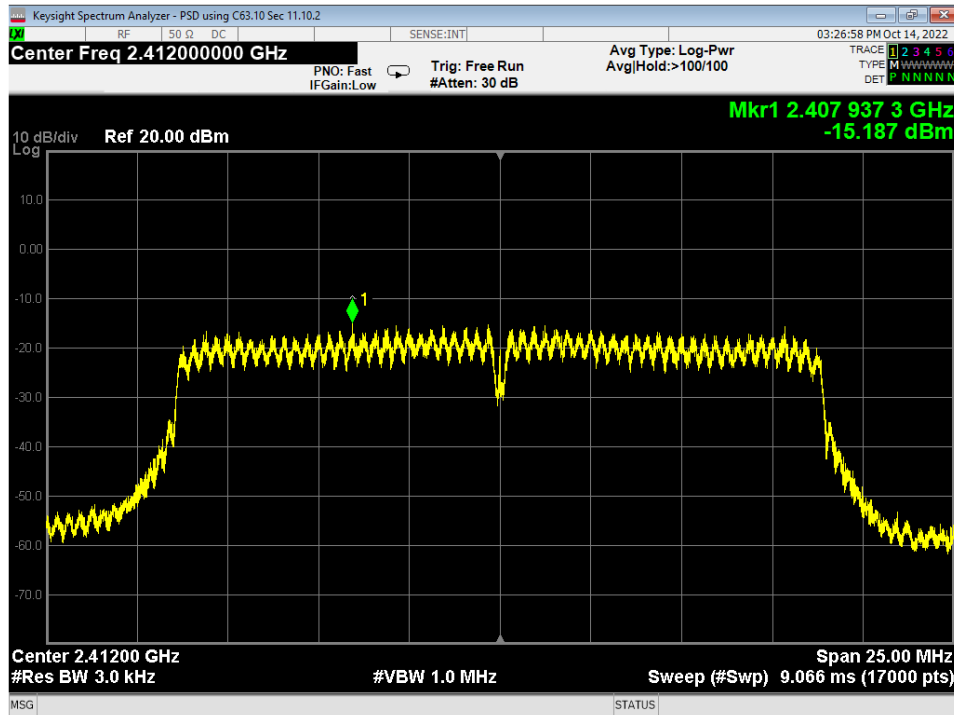

72 PSD, Low, Wifi N, High Data Rate

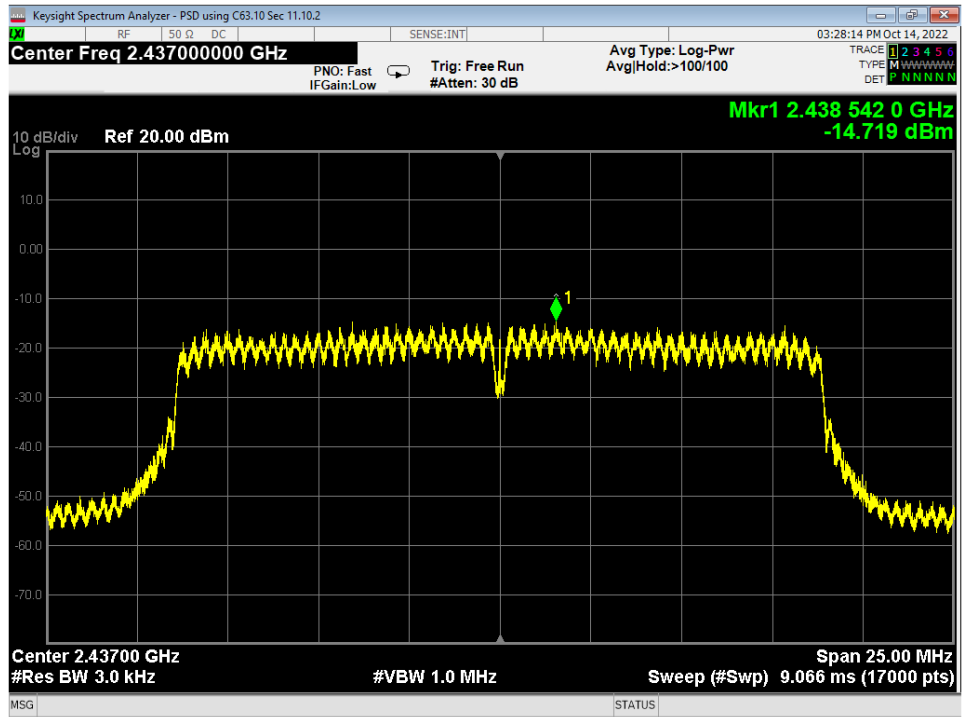


73 PSD, Mid, Wifi N, High Data Rate

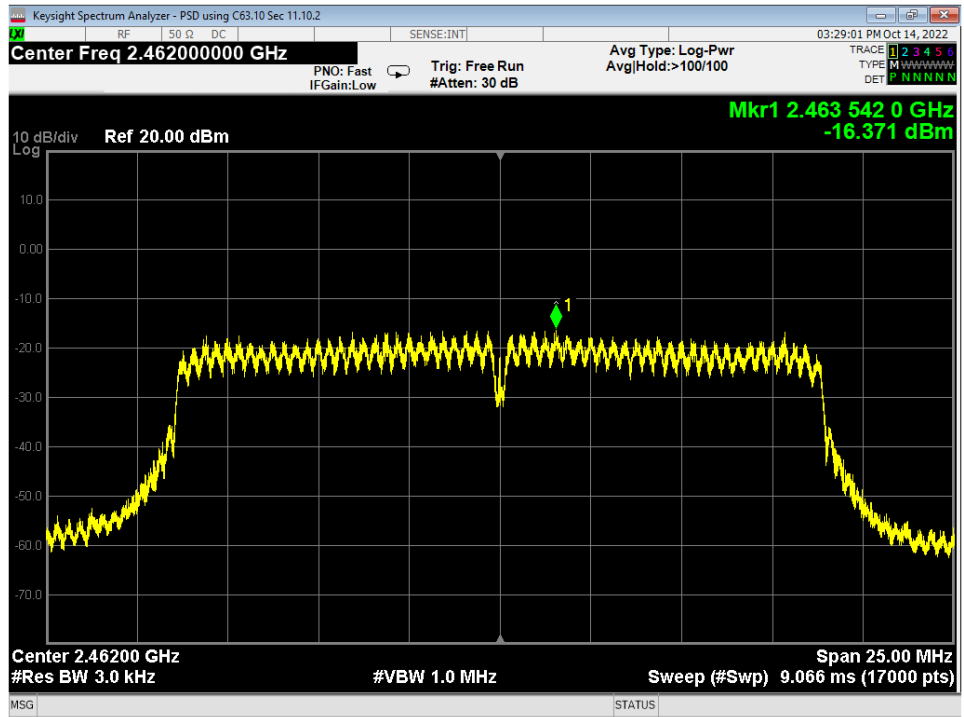


74 PSD, High, Wifi N, High Data Rate




75 Lower Bandedge, Unrestricted, Wifi N, High Data Rate

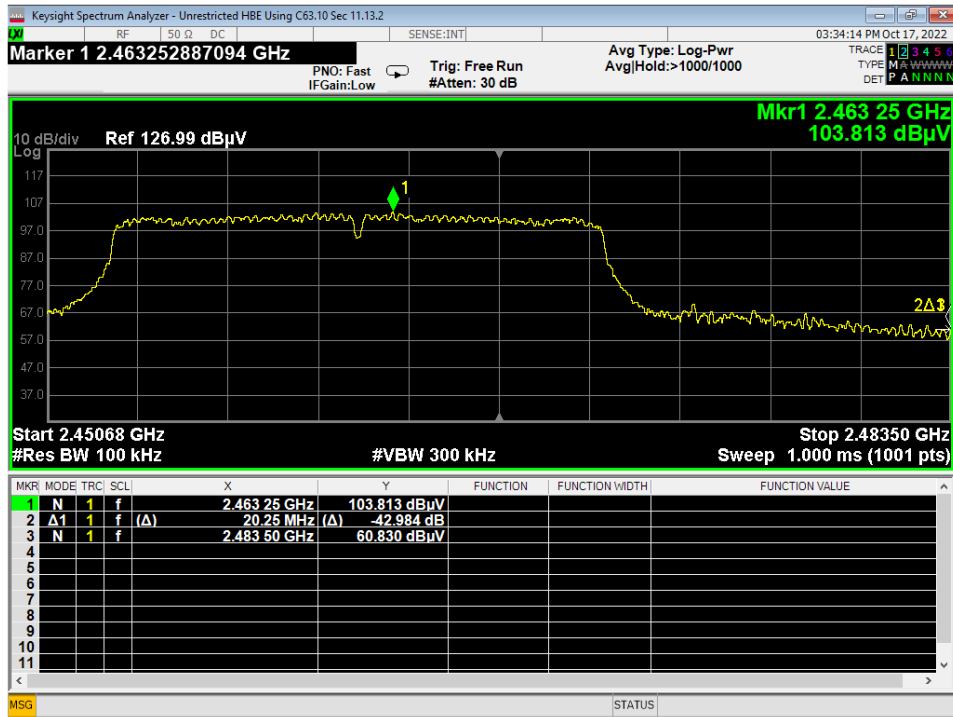


76 Higher Bandedge, Unrestricted, Wifi N, High Data Rate

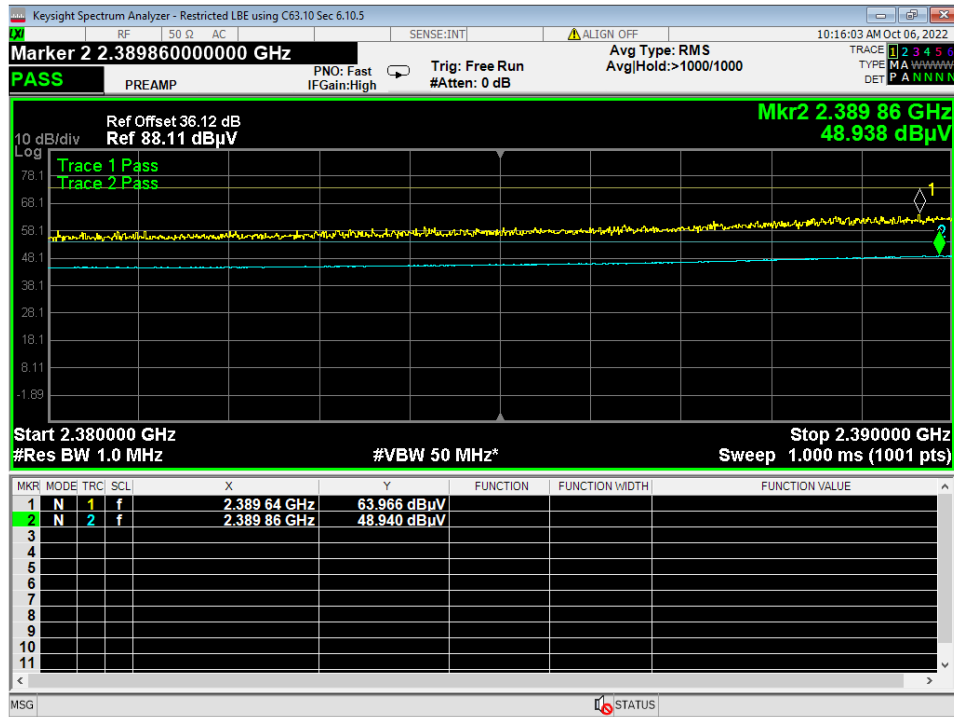


77 Lower Bandedge, Restricted, Wifi N, High Data Rate

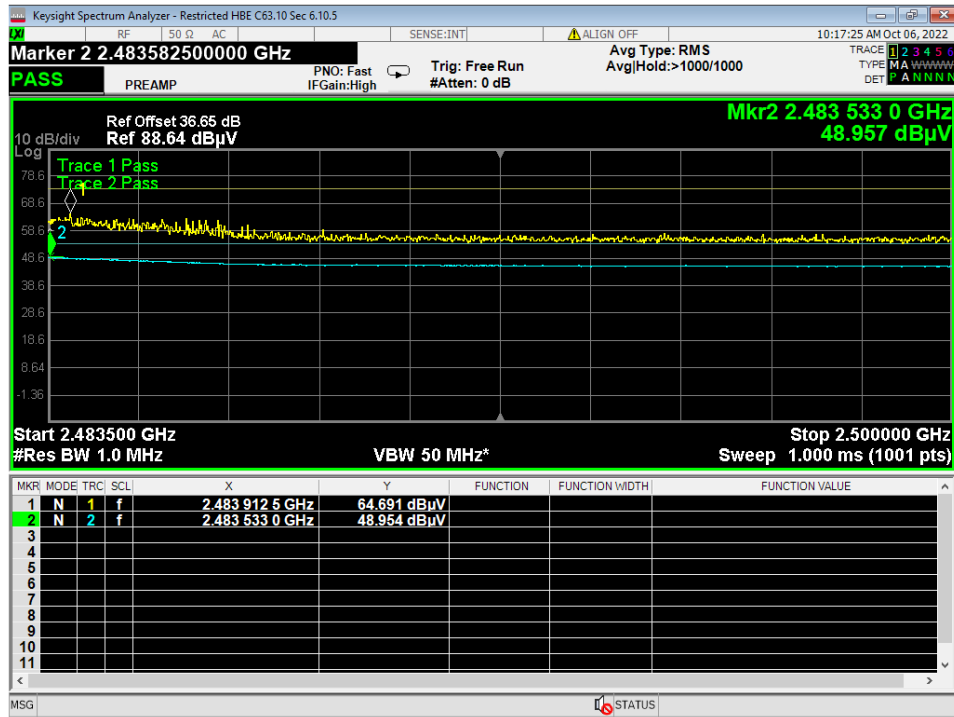


78 Higher Bandedge, Restricted, Wifi N, High Data Rate

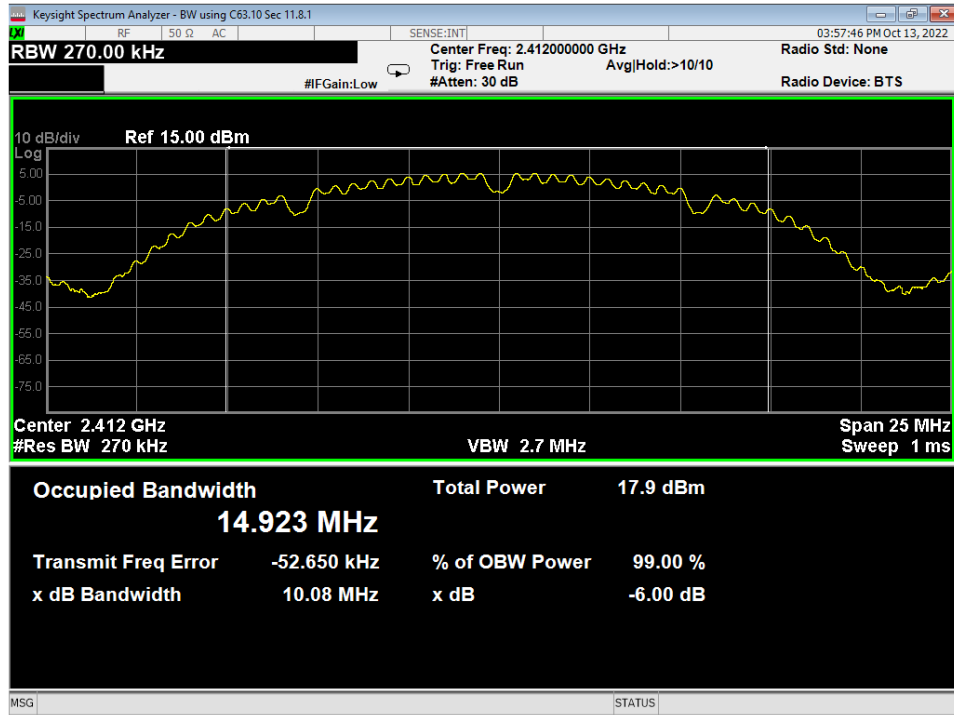


79 Occupied Bandwidth, Low, Wifi B, Low Data Rate

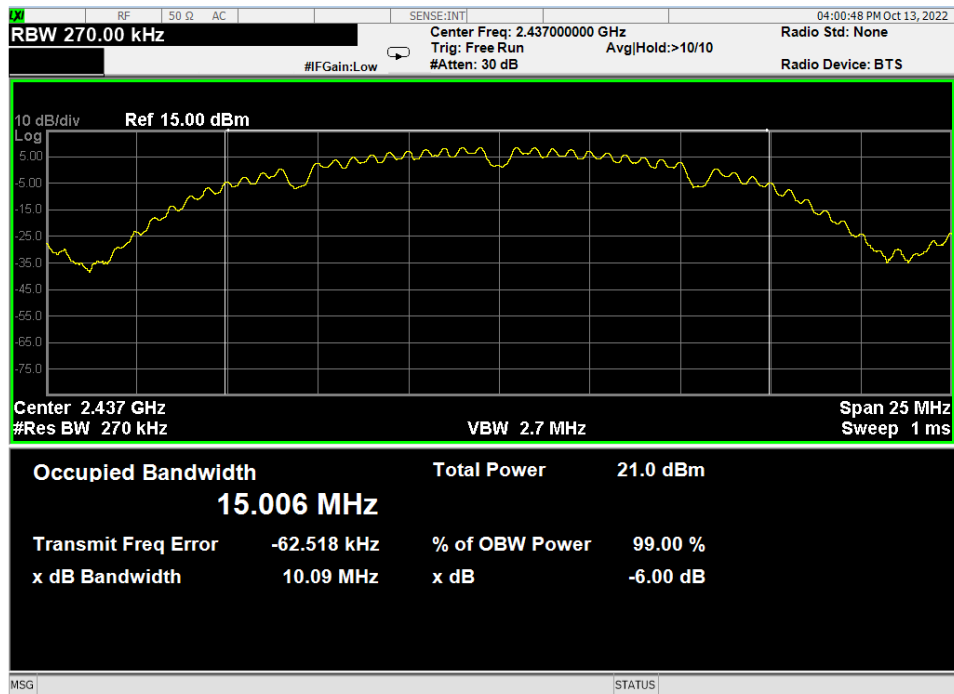


80 Occupied Bandwidth, Mid, Wifi B, Low Data Rate

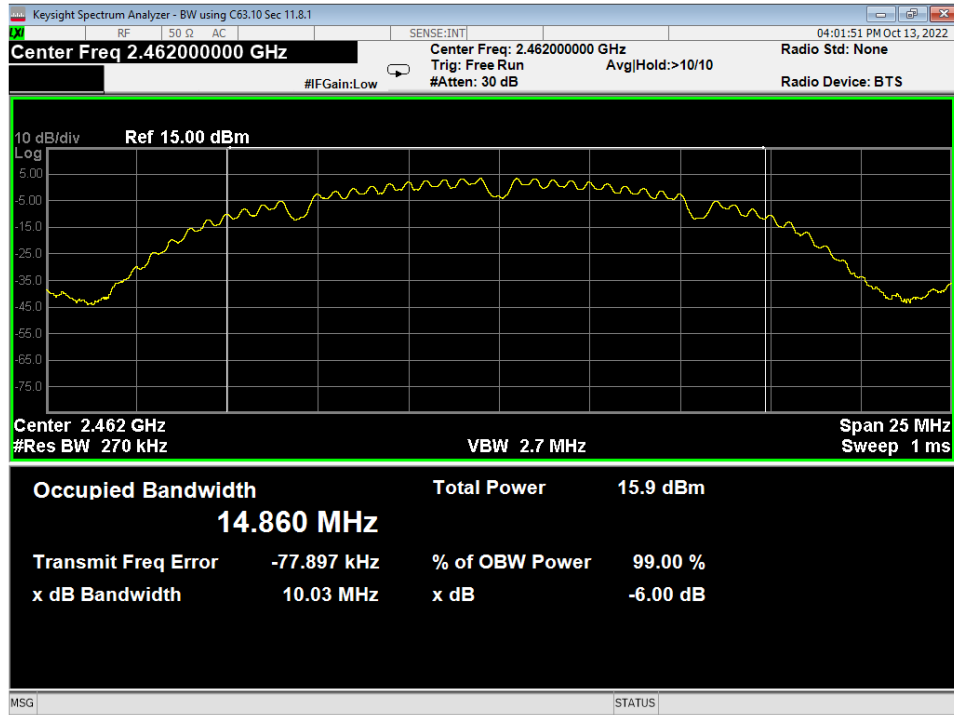


81 Occupied Bandwidth, High, Wifi B, Low Data Rate

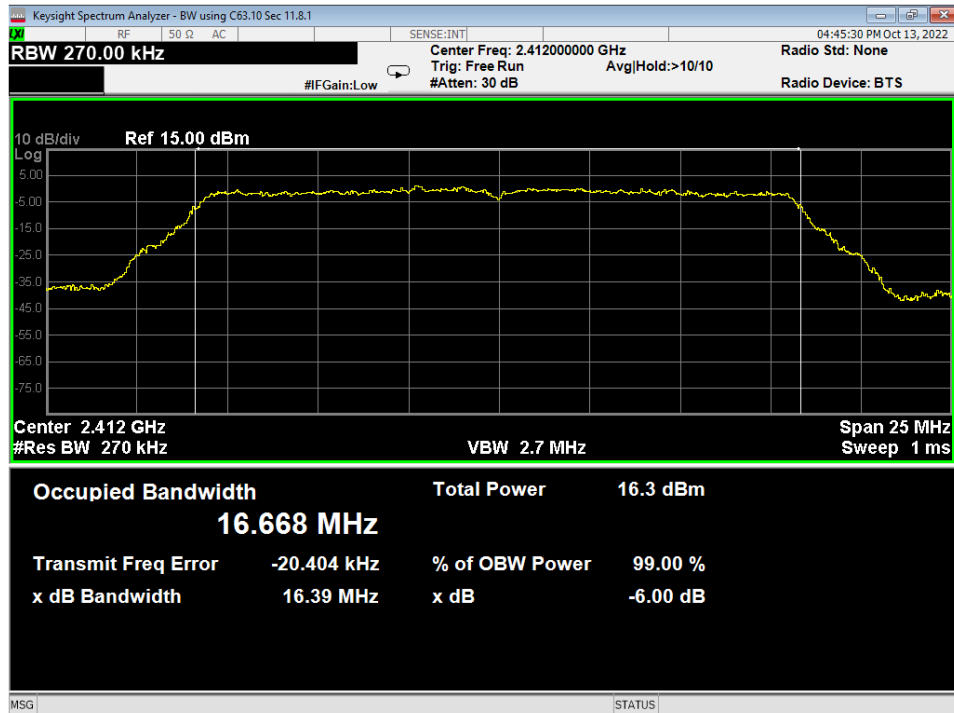


82 Occupied Bandwidth, Low, Wifi G, Low Data Rate

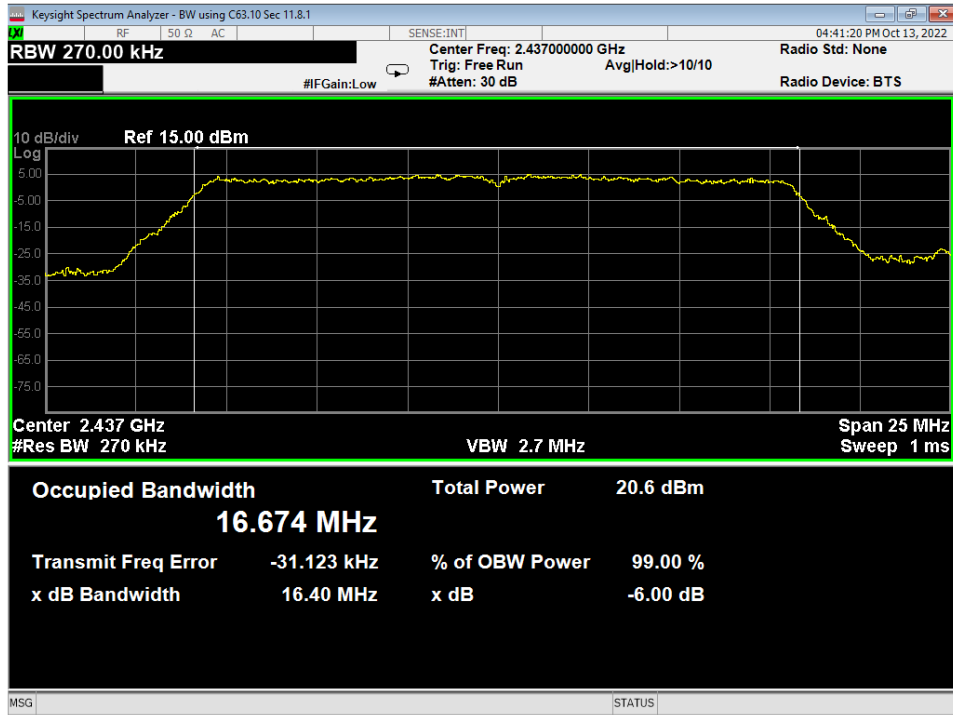


83 Occupied Bandwidth, Mid, Wifi G, Low Data Rate

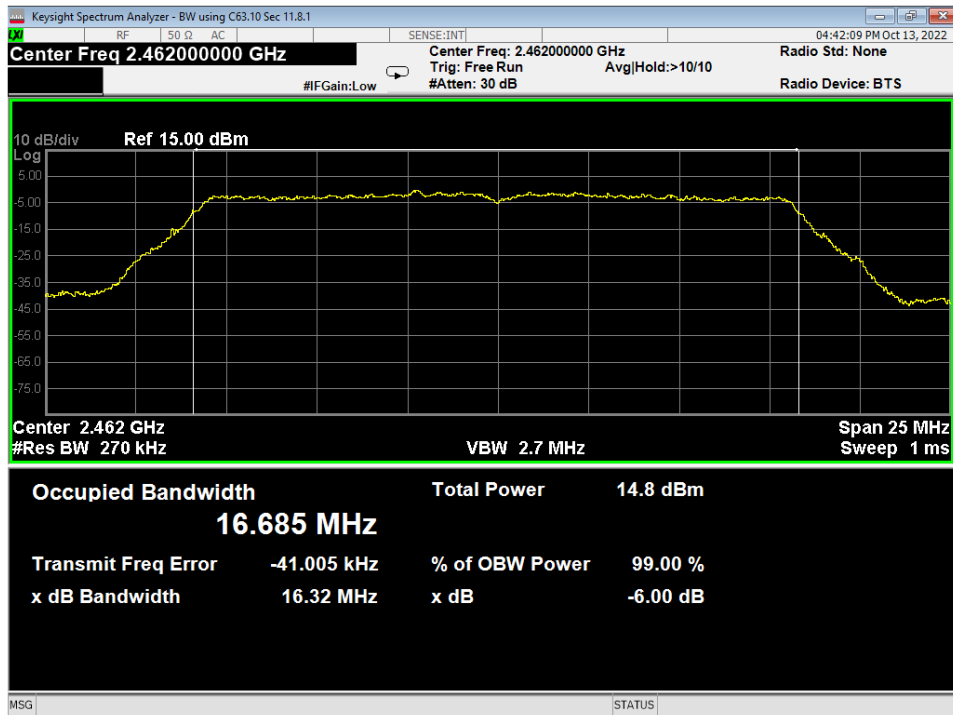


84 Occupied Bandwidth, High, Wifi G, Low Data Rate

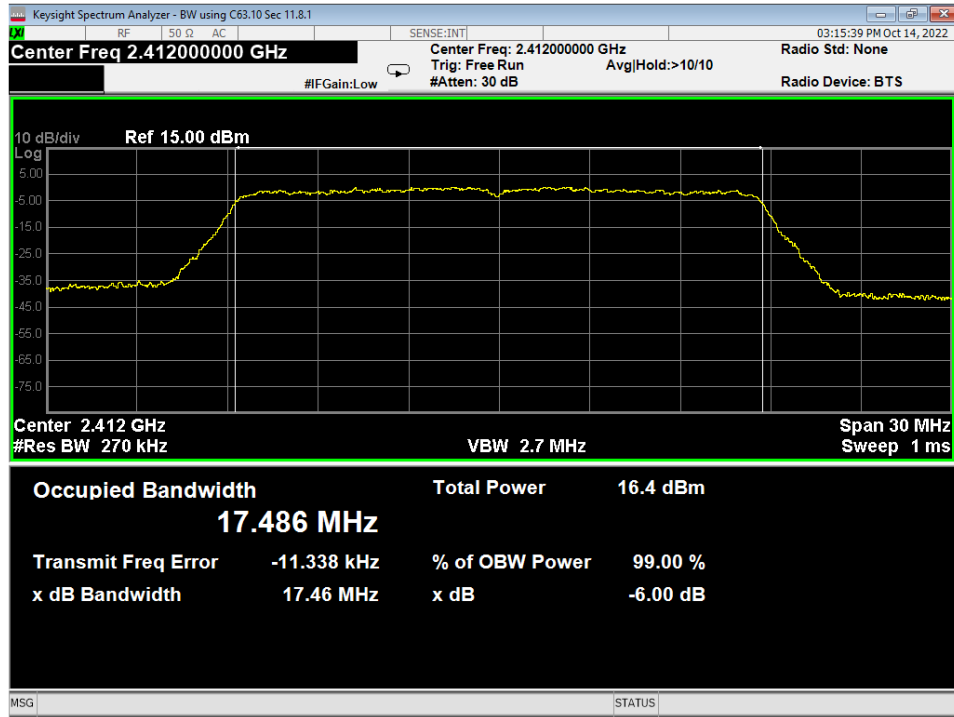


85 Occupied Bandwidth, Low, Wifi N, Low Data Rate

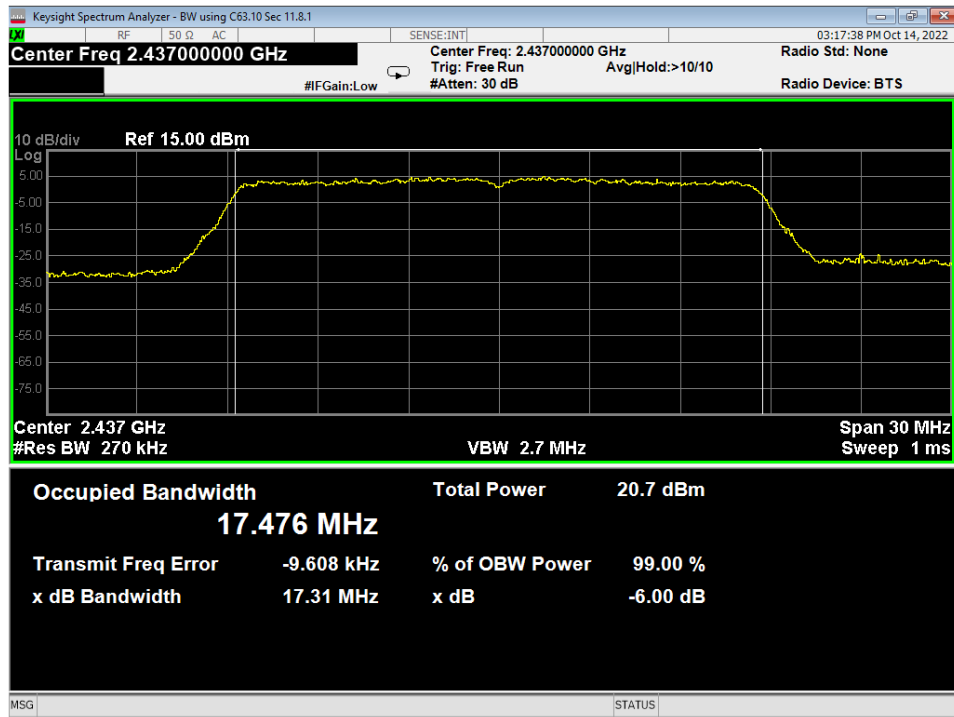


86 Occupied Bandwidth, Mid, Wifi N, Low Data Rate

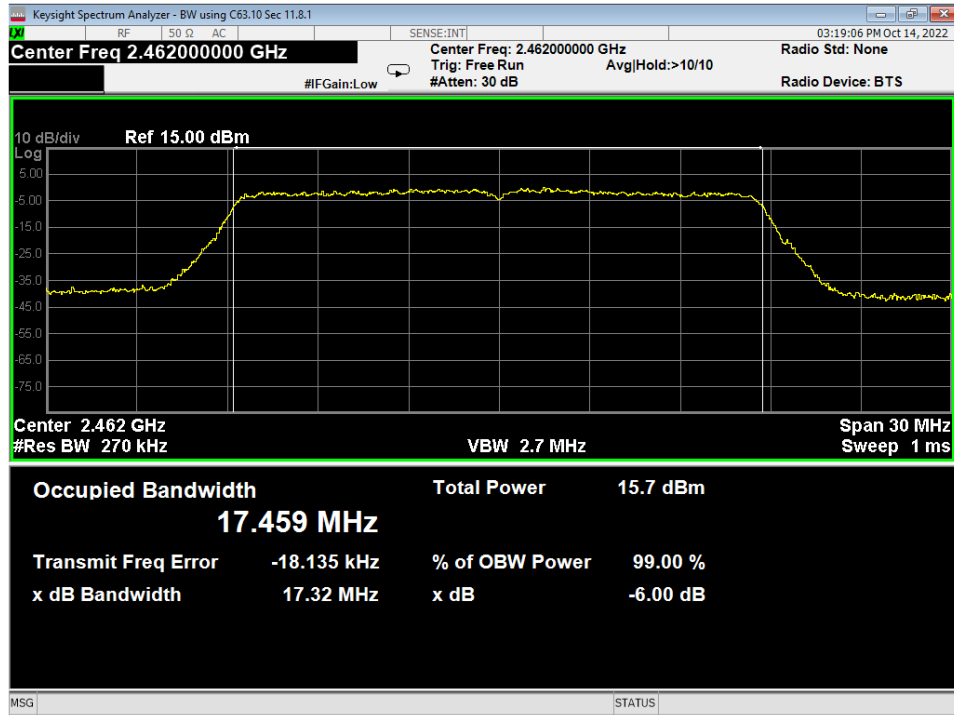


87 Occupied Bandwidth, High, Wifi N, Low Data Rate

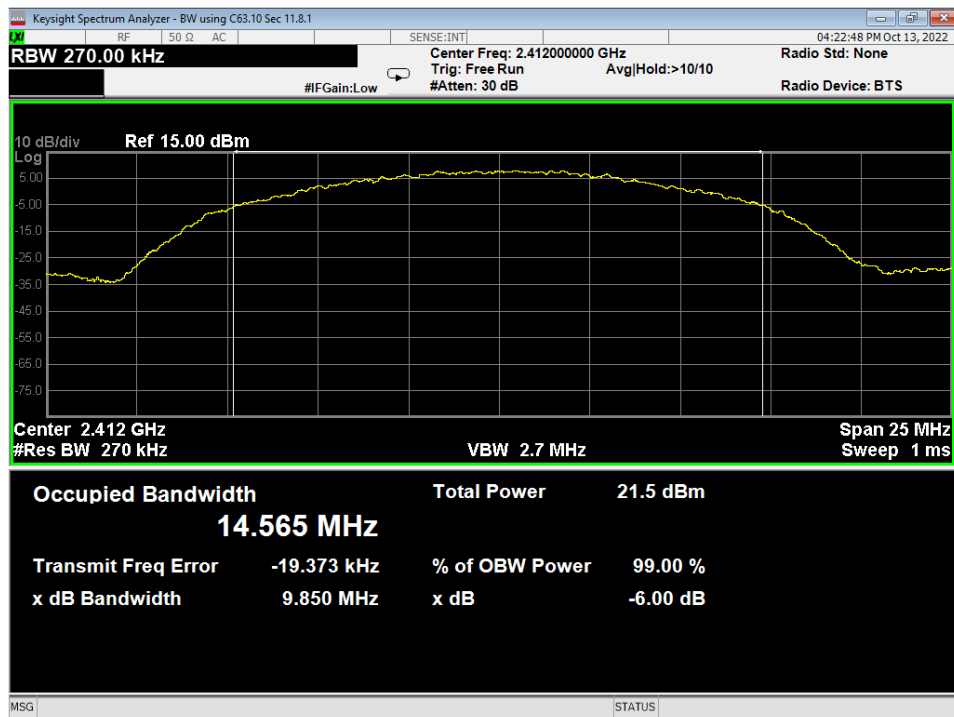


88 Occupied Bandwidth, Low, Wifi B, High Data Rate

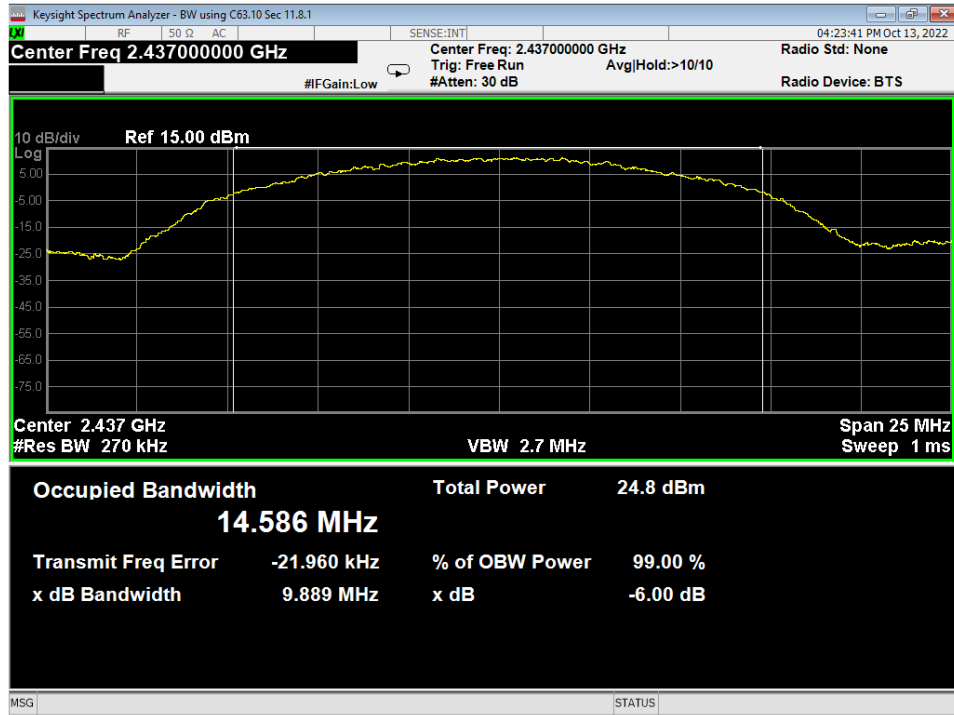


89 Occupied Bandwidth, Mid, Wifi B, High Data Rate

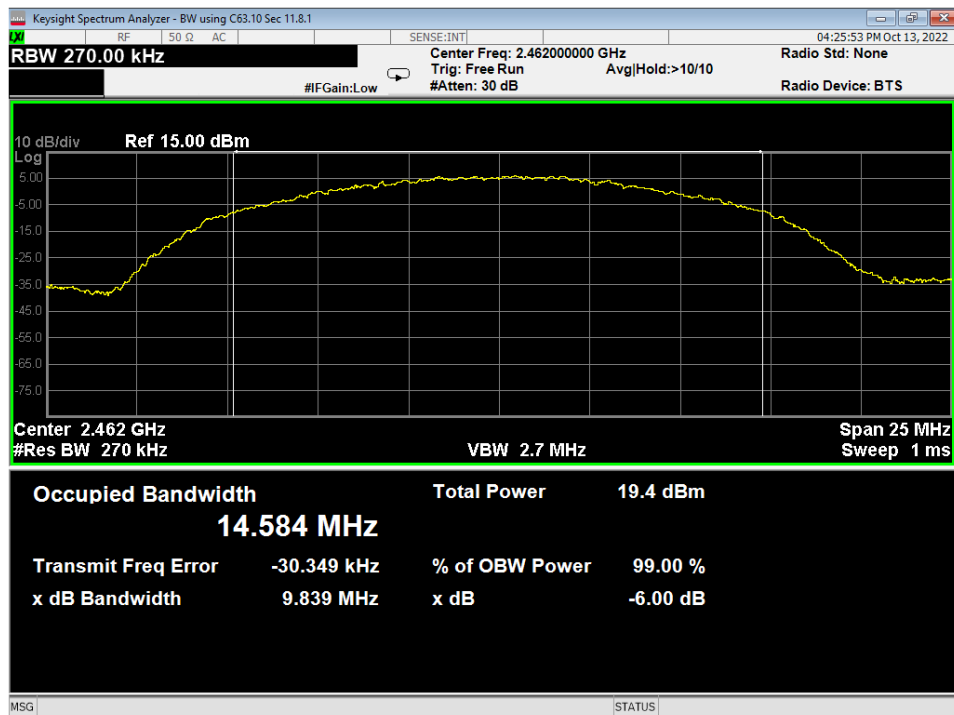


90 Occupied Bandwidth, High, Wifi B, High Data Rate

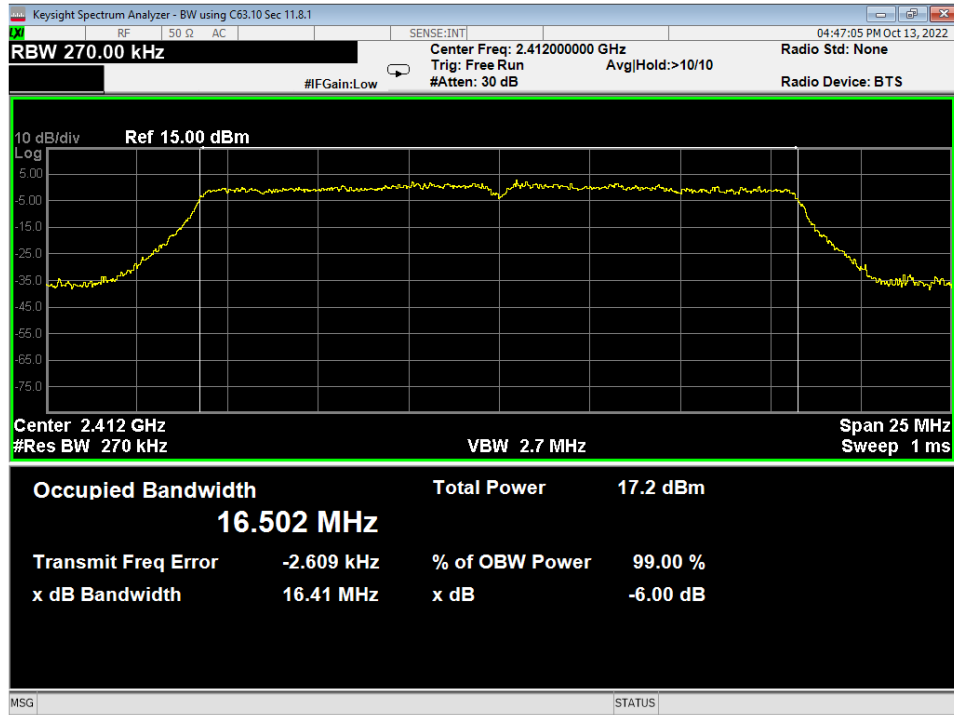


91 Occupied Bandwidth, Low, Wifi G, High Data Rate

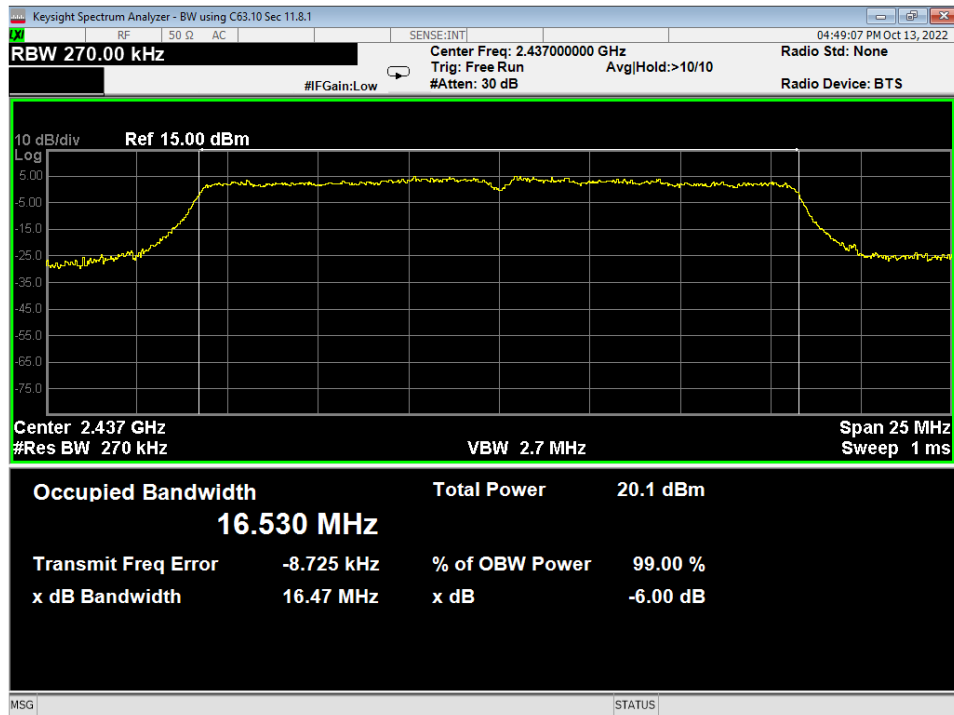


92 Occupied Bandwidth, Mid, Wifi G, High Data Rate

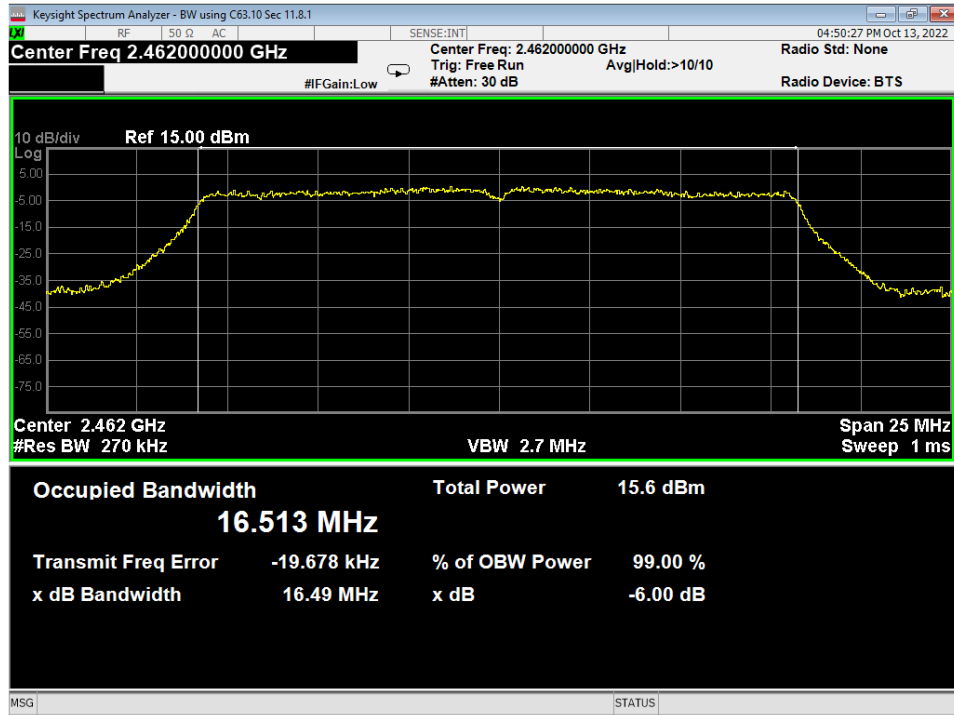


93 Occupied Bandwidth, High, Wifi G, High Data Rate

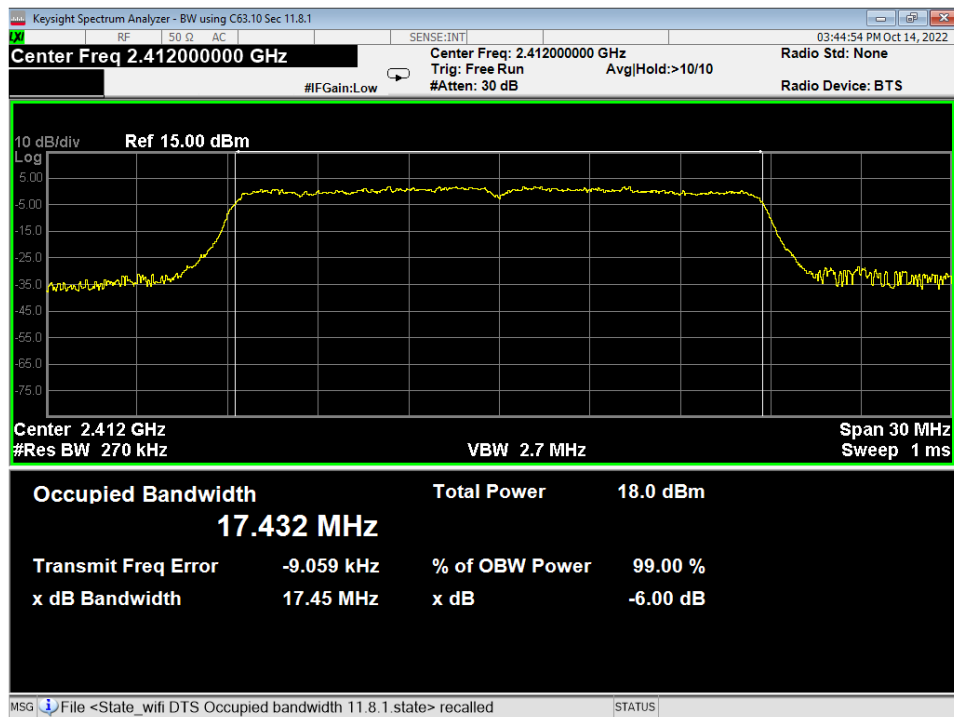

94 Occupied Bandwidth, Low, Wifi N, High Data Rate

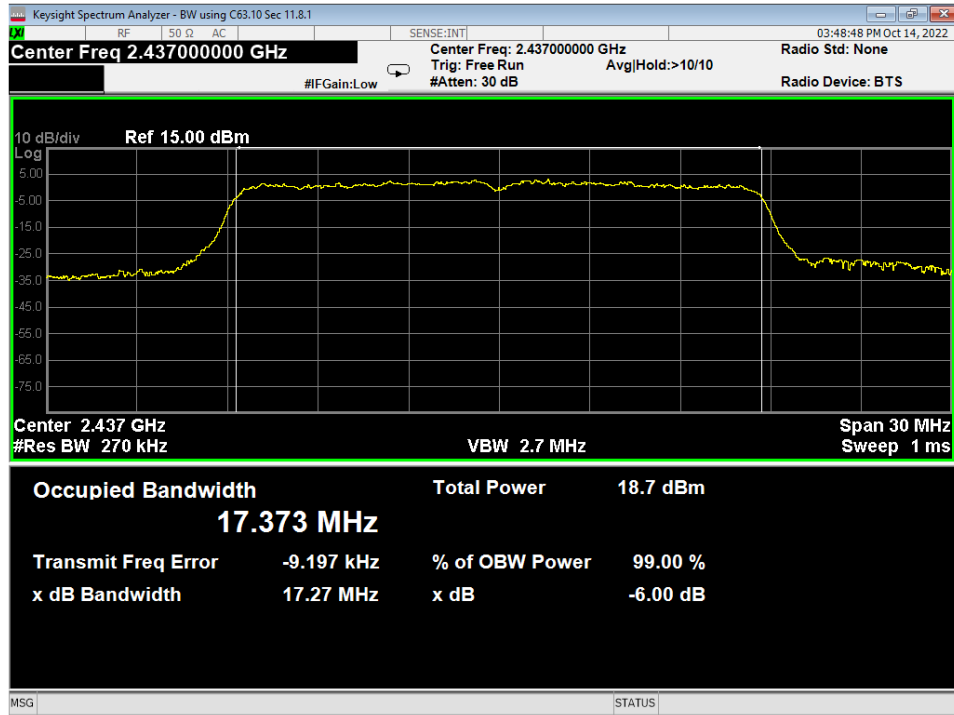

95 Occupied Bandwidth, Mid, Wifi N, High Data Rate

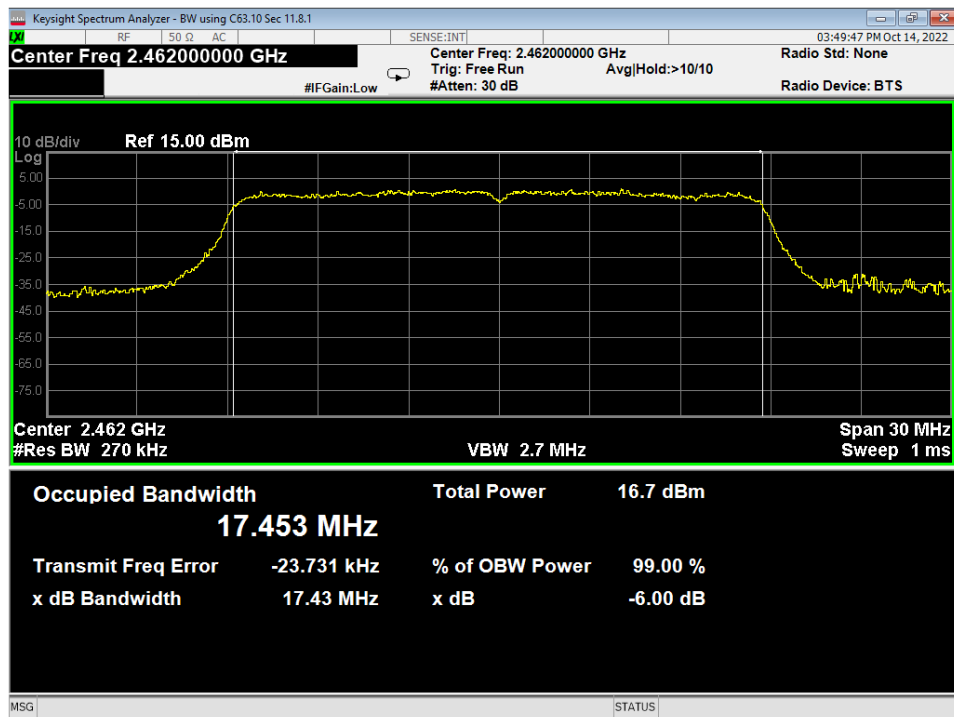

96 Occupied Bandwidth, High, Wifi N, High Data Rate



Report Number:	R20220901-21-E5B	Rev	B
Prepared for:	Garmin International, Inc.		

REPORT END