



Test Report Serial Number:

45461774 R1.0

Test Report Date:

16 December 2022

Project Number:

1603

EMC Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St
Olathe, KS, 66062
USA

FCC ID:

IPH-04578

Product Model Number / HVIN

A04578

IC Registration Number

1792A-04578

Product Marketing Name / PMN

A04578

In Accordance With:

CFR Title 47, Part 15 Subpart C (§15.249), (§15.225), Part 15 Subpart B

Part 15 Low Power Communication Device Transmitter (DXX)

RSS-Gen, RSS-210 Issue 10

Licence-Exempt Radio Apparatus: Category I Equipment

Approved By:

Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01



**Industry
Canada**

IC Registration 3874A



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2022 Celltech Labs Inc.

Table of Contents

| | |
|--|----|
| 1.0 DOCUMENT CONTROL..... | 4 |
| 2.0 CLIENT AND DUT INFORMATION | 5 |
| 3.0 SCOPE..... | 6 |
| 4.0 TEST RESULT SUMMARY | 7 |
| 5.0 NORMATIVE REFERENCES..... | 9 |
| 6.0 FACILITIES AND ACCREDITATIONS | 10 |
| 7.0 OCCUPIED BANDWIDTH | 11 |
| 8.0 FIELD STRENGTH | 13 |
| 9.0 20DB BW..... | 17 |
| 10.0 OUT-OF-BAND EMISSIONS- NFC | 19 |
| 11.0 RADIATED SPURIOUS EMISSIONS – RESTRICTED BANDS | 21 |
| 12.0 RADIATED RX SPURIOUS EMISSIONS..... | 24 |
| 13.0 FREQUENCY STABILITY (NFC)..... | 26 |
| 14.0 POWER LINE CONDUCTED EMISSIONS | 29 |
| APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT | 34 |
| APPENDIX B – EQUIPMENT LIST AND CALIBRATION..... | 40 |
| APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY..... | 41 |
| END OF REPORT..... | 41 |
| APPENDIX K – OCCUPIED BANDWIDTH MEASUREMENT PLOTS..... | 42 |
| APPENDIX L – FIELD STRENGTH MEASUREMENT PLOTS..... | 42 |
| APPENDIX M– 20DB BW (DXX) MEASUREMENT PLOTS | 42 |
| APPENDIX N– FIELD STRENGTH/20DB BW (NFC) MEASUREMENT PLOTS | 42 |
| APPENDIX O– RADIATED TX EMISSIONS MEASUREMENT PLOTS | 42 |
| APPENDIX P– RADIATED RX MEASUREMENT PLOTS | 42 |

Table of Plots

See Appendix K thru P

Table of Tables

| | |
|---|----|
| Table 7.1 - Summary of Occupied Bandwidth Measurements (DXX)..... | 12 |
| Table 7.2 - Summary of Occupied Bandwidth Measurements (NFC)..... | 12 |
| Table 8.1 - Summary of Field Strength Measurements (BT BLE) | 14 |
| Table 8.2 - Summary of Field Strength Measurements (ANT) | 15 |
| Table 8.3 - Summary of Field Strength Measurements (NFC) | 16 |
| Table 9.1 - Summary of 20dB BW Measurements | 18 |
| Table 10.1 - Summary of Field Strength Measurements (NFC) | 20 |
| Table 11.1 - Summary of Radiated Emissions, Restricted Band (DXX) | 22 |
| Table 11.2 - Summary of Radiated Emissions, Restricted Band (NFC) | 23 |
| Table 12.1 - Summary of Radiated Rx Emissions | 25 |
| Table 13.1 - Summary of Frequency Stability Measurements - FCC..... | 27 |
| Table 13.2 - Summary of Frequency Stability Measurements - ISED | 28 |
| Table 14.1 - Summary of Power Line Conducted Emissions - L1..... | 32 |
| Table 14.1 - Summary of Power Line Conducted Emissions - L2..... | 33 |
| Table A.1 - Setup - Conducted Measurements Equipment List..... | 34 |
| Table A.2 - Setup - Radiated Emissions Equipment List | 35 |
| Table A.3 - Setup - Frequency Stability Equipment List..... | 39 |

Table of Figures

| | |
|---|----|
| Figure A.1 - Test Setup Conducted Measurements..... | 34 |
| Figure A.2 - Test Setup Radiated Emissions Measurements Below 30MHz..... | 36 |
| Figure A.3 - Test Setup Radiated Emissions Measurements 30 - 1000MHz..... | 36 |
| Figure A.4 - Test Setup Radiated Emissions Measurements 30 - 1000MHz Signal Substitution..... | 37 |
| Figure A.5 - Test Setup Radiated Emissions Measurements 1 - 18GHz..... | 37 |
| Figure A.6 - Test Setup Radiated Emissions Measurements Above 18 GHz..... | 38 |
| Figure A.7 - Frequency Stability | 39 |

1.0 DOCUMENT CONTROL

| Revision History | | | | |
|---------------------|-------------------------|------------------------|------------|------------------|
| Samples Tested By: | | Date(s) of Evaluation: | | |
| Report Prepared By: | | Report Reviewed By: | | |
| Report Revision | Description of Revision | Revised Section | Revised By | Revision Date |
| 0.1 | Draft | n/a | Art Voss | 14 December 2022 |
| 1.0 | Initial Release | n/a | Art Voss | 16 December 2022 |

2.0 CLIENT AND DUT INFORMATION

| Client Information | |
|---------------------------------------|---|
| Applicant Name | Garmin International Inc. |
| Applicant Address | 1200 East 151 St |
| | Olathe, KS, 66062 |
| | USA |
| DUT Information | |
| Device Identifier(s): | FCC ID: IPH-04578 |
| | ISED ID: 1792A-04578 |
| Device Model(s) / HVIN: | A04578 |
| Device Marketing Name / PMN: | A04578 |
| Test Sample Serial No.: | 3361277594 - Conducted, 3361277722 - OTA |
| Device Type: | Extremity Worn Digital Transceiver |
| Equipment Class: | Wideband Transmission Systems |
| | Short Range Devices (SRD) |
| | Global Navigation Satellite System (GNSS) Receivers |
| | NFC - Low Power Communication Device Transmitter (DXX) |
| Transmit Frequency Range: | WiFi (DTS): 2412-2462MHz |
| | BT/BLE/ANT: 2402-2480MHz |
| | NFC: 13.56MHz |
| Manuf. Max. Rated Output Power: | WiFi - Digital Transmission System (DTS): 18.56dBm |
| | BlueTooth - Spread Spectrum Transmitter (DSS): 9.48dBm |
| | BLE/ANT - Low Power Communication Device Transmitter (DXX): 2.79dBm |
| | NFC - Low Power Communication Device Transmitter (DXX): -36dBm |
| Antenna Type and Gain: | -3.46dBi Max |
| Modulation: | WiFi: DSSS, OFDM, CCK, MCS0-7 |
| | BT BR: GFSK |
| | BT EDR: Pi/4-DQPSK |
| | BLE: GMSK |
| | ANT: GFSK |
| | NFC: ASK |
| DUT Power Source: | 3VDC Rechargeable Li-Ion |
| DUT Dimensions [LxWxH] | H x W x D: 65mm dia x 4.5mm |
| Deviation(s) from standard/procedure: | None |
| Modification of DUT: | None |

3.0 SCOPE

Preface:

This Certification Report was prepared on behalf of:

Garmin International Inc.

, (the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

Device:

The Garmin Model/HVIN: A04578 is an extremity worn digital transceiver device consisting of a WiFi, Bluetooth (BT), Bluetooth Low Energy (BLE), Adaptive Network Topology (ANT) and Near Field Communication (NFC) transceivers. The WiFi and BT/BLE/ANT transceivers share the same antenna and cannot simultaneously transmit.

Requirement:

The transceivers of this *equipment* are subject to emissions evaluation in accordance with FCC: 47 CFR 2, 15C, ISED: RSS-Gen, RSS-210 and RSS-247. As per FCC 47 CFR §2.1093 and Health Canada Safety Code 6, an RF Exposure (SAR) evaluation is required for this *Equipment* and the results of the RF Exposure (SAR) evaluation appear in a separate report.

Application:

This is an application for a New Certification.

Scope:

The scope of this investigation is limited to the evaluation and reporting of the wanted and spurious emissions in accordance with the rule parts cited in Normative References section of this report.

4.0 TEST RESULT SUMMARY

| TEST SUMMARY | | | | | | |
|--------------|--------------------------------|---------------------------------------|-----------------------------|----------------------------------|------------------------|--------|
| Section | Description of Test | Procedure Reference | Applicable Rule Part(s) FCC | Applicable Rule Part(s) ISSED | Test Date | Result |
| 7.0 | Occupied Bandwidth | ANSI C63.10-2013 KDB 558074 D01v05 | §2.1049 | RSS-Gen (6.7) | 16, 17, 21 Sep 2022 | Pass |
| 8.0 | Field Strength (Fundamental) | ANSI C63.10-2013 KDB 558074 D01v05 | §15.249(a)(e) | RSS-Gen (6.12) RSS-210 (B.10) | 3 Nov 2022 | Pass |
| 9.0 | 20dB BW | ANSI C63.10-2013 KDB 558074 D01v05 | §15.249(a)(e) | RSS-Gen (6.12) RSS-210 (B.10) | 16, 17, 21 Sep 2022 | Pass |
| 10.0 | Band Edge (NFC) | ANSI C63.10-2013 KDB 558074 D01v05 | §15.225(a)(c) | RSS-Gen (6.12) RSS-210 (B.10) | 21 Sep 2022 | Pass |
| 11.0 | Restricted Bands | ANSI C63.10-2013 KDB 558074 D01v05 | §15.249(d)(e) §15.209 | RSS-Gen (8.10) | 3 Nov 2022 | Pass |
| 12.0 | Radiated Rx Emissions | ANSI C63.10-2013 KDB 558074 D01v05 | §15.249(d)(e) §15.209 | RSS-Gen (8.10) | 3 Nov 2022 | Pass |
| 13.0 | Frequency Stability | ANSI C63.10-2013 KDB 558074 D01v05 | §15.225 | RSS-G210 B.6 | 26 Nov 2022 | Pass |
| 14.0 | Power Line Conducted Emissions | ANSI C63.4-2014 | §15.107 | ICES-003(6.1) | 26 Nov 2022 | Pass |

| Test Station Day Log | | | | | |
|----------------------|-------------------|-----------------------|---------------------------|--------------|----------------------------|
| Date | Ambient Temp (°C) | Relative Humidity (%) | Barometric Pressure (kPa) | Test Station | Tests Performed Section(s) |
| 16 Sep 2022 | 22.1 | 18 | 101.2 | EMC | 7, 9 |
| 17 Sep 2022 | 22.8 | 17 | 101.3 | EMC | 7, 9 |
| 21 Sep 2022 | 23.5 | 17 | 101.6 | EMC | 10, |
| 2 Nov 2022 | 0.0 | 87 | 101.5 | OATS | 8, 11, 12 |
| 3 Nov 2022 | -2.0 | 80 | 102.4 | OATS | 8, 11, 12 |
| 26 Nov 2022 | 22.6 | 16 | 103.3 | LISN | 14 |
| 26 Nov 2022 | 22.6 | 16 | 103.3 | TC | 13 |

EMC - EMC Test Bench

SAC - Semi-Anechoic Chamber

OATS - Open Area Test Site

TC - Temperature Chamber

LISN - LISN Test Area

ESD - ESD Test Bench

IMM - Immunity Test Area

RI - Radiated Immunity Chamber

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

14 December 2022

Date




5.0 NORMATIVE REFERENCES

| Normative References | |
|----------------------|--|
| ISO/IEC 17025:2017 | General requirements for the competence of testing and calibration laboratories |
| ANSI C63.4-2014 | American National Standard of Procedures for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electric and Electronic Equipment in the Range of 9kHz to 40GHz |
| ANSI C63.10-2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |
| CFR | Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations |
| CFR | Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.225) Intentional Radiators |
| CFR | Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.249) Intentional Radiators |
| ISED | Innovation, Science and Economic Development Canada RSS-Gen Issue 5A1: Spectrum Management and Telecommunications Radio Standards Specification March 2019 General Requirements and Information for the Certification of Radiocommunication Equipment |
| ISED | Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-210 Issue 10A1: Licence-Exempt Radio Apparatus: December 2020 Category I Equipment |
| ISED | Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-247 Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) February 2017 and Licensed-Exempt Local Area Network (LE_LAN) Devices |
| FCC KDB | OET Major Guidance Publications, Knowledge Data Base 558074 D01v05r02 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247 |

6.0 FACILITIES AND ACCREDITATIONS

Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874A-1 and Industry Canada under Test Site File Number IC 3874A. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

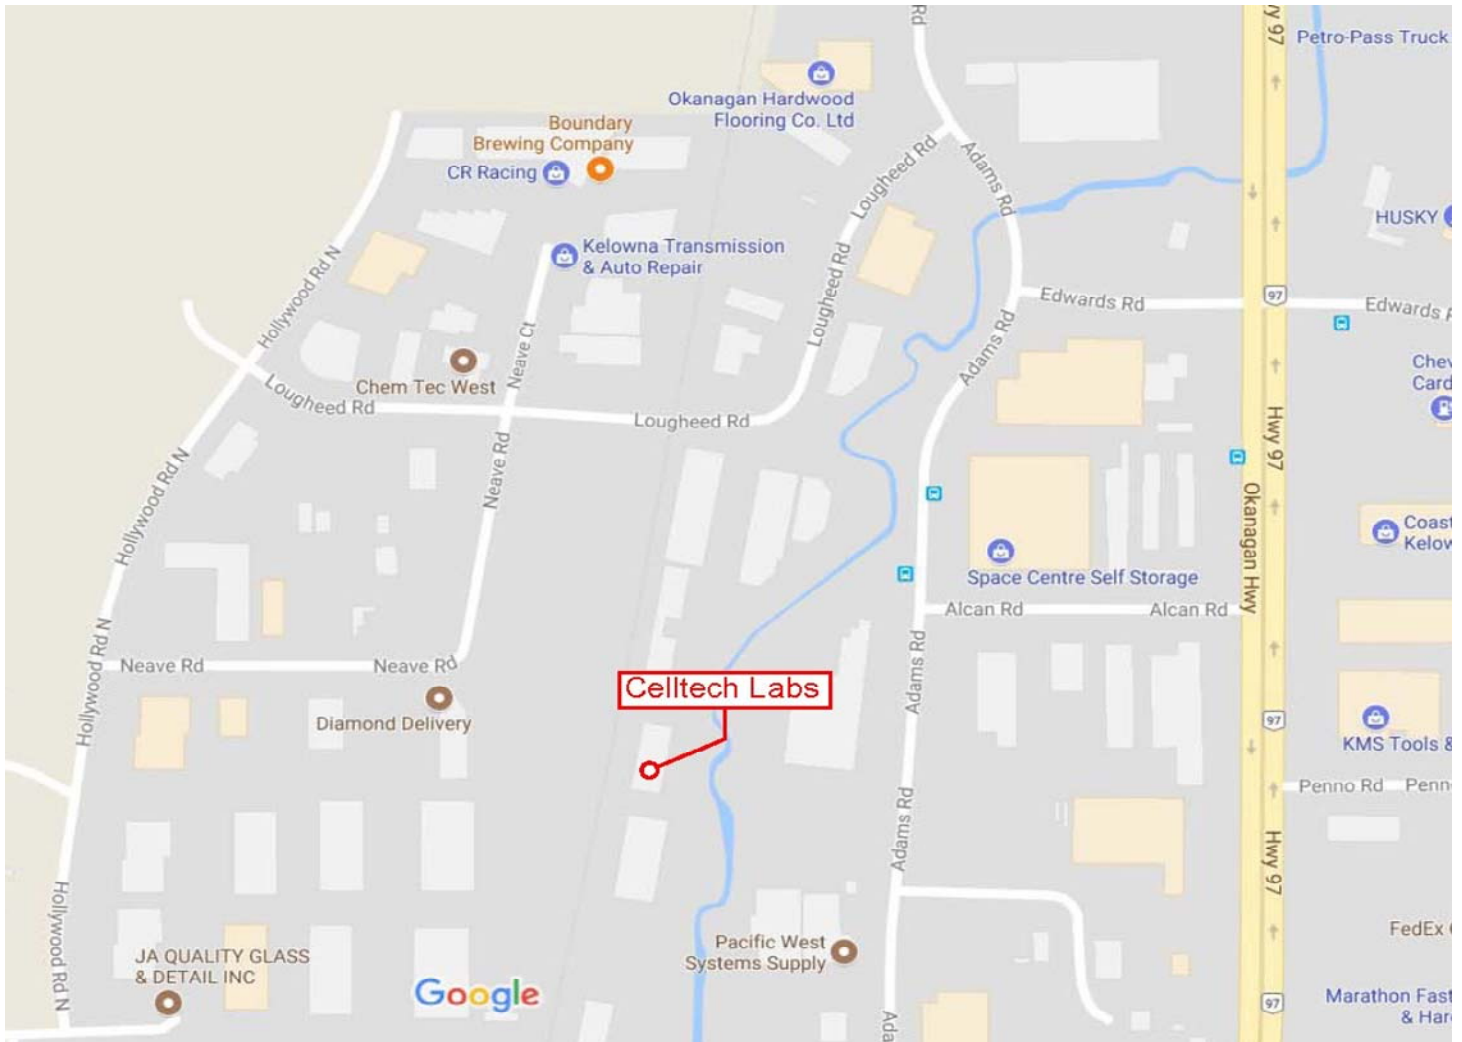

7.0 OCCUPIED BANDWIDTH

Test Procedure

| | |
|------------------|--|
| Normative | FCC 47 CFR §2.1046, RSS-Gen (6.1.2), RSS-247 (5.4)(d), |
| Reference | KDB 558074 (8.3.2.1), ANSI C63.10 (6.9.3) |

General Procedure

C63.10 (6.9.3)

6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

Test Setup

Appendix A - Figure A.1

Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above using the 99% Occupied Bandwidth function. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The 99% Occupied Bandwidth was measured and recorded.

Table 7.1 - Summary of Occupied Bandwidth Measurements (DXX)

See Appendix K for measurement plots

| Occupied Bandwidth Measurement Results: BlueTooth | | | | | | |
|---|----------------|-------------------------|------------|-----------------|-----------------------------------|---------------------|
| Mode | Channel Number | Channel Frequency (MHz) | Modulation | Bit Rate (Mbps) | Measured Occupied Bandwidth (MHz) | Emission Designator |
| BLE1 | 0 | 2402 | GMSK | 1 | 1.29 | 1M29D1D |
| | 19 | 2440 | | | 1.98 | 1M98D1D |
| | 39 | 2480 | | | 1.31 | 1M31D1D |
| BLE2 | 0 | 2402 | GMSK | 2 | 2.52 | 2M52D1D |
| | 19 | 2440 | | | 2.75 | 2M75D1D |
| | 39 | 2480 | | | 2.56 | 2M56D1D |
| ANT | 2 | 2402 | GFSK | - | 1.23 | 1M22D1D |
| | 41 | 2440 | | | 1.23 | 1M22D1D |
| | 80 | 2480 | | | 1.30 | 1M30D1D |
| | | | | | Result: | Complies |

Table 7.2 - Summary of Occupied Bandwidth Measurements (NFC)

See Appendix K for measurement plots

| Occupied Bandwidth Measurement Results: NFC | | | | | | |
|--|----------------|-------------------------|------------|-----------------|----------------------------------|---------------------|
| Mode | Channel Number | Channel Frequency (MHz) | Modulation | Bit Rate (Mbps) | Measured Occupied Bandwidth (Hz) | Emission Designator |
| NFC | - | 13.56 | ASK | - | 77.000 | 77HK1D |
| Result: | | | | | | Complies |

8.0 FIELD STRENGTH

Test Procedure

| | |
|----------------------------|--|
| Normative Reference | FCC 47 CFR §2.1046, §15.249, RSS-210 |
| | KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.6) |

Limits

| | |
|-----------------|--|
| §15.249(a) | <p>Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.</p> <p>(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <p>2400-2483.5MHz, Fundamental Field Strength: 50mV/m, Harmonic: 500uV/m</p> |
| RSS-210 B.10(a) | <p>Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz and 24-24.25 GHz</p> <p>(a) The field strength of fundamental and harmonic emissions measured at 3 m shall not exceed the limits in table B2.</p> <p>2400-2483.5MHz, Fundamental Field Strength: 50mV/m, Harmonic: 500uV/m</p> |

General Procedure

| | |
|----------------|---|
| C63.10 (6.5.4) | <p>6.5.4 Final radiated emission tests</p> <p>Using the orientation and equipment arrangement of the EUT, and based on the measurement results found during the exploratory measurement in 6.5.3, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable) and the frequency and amplitude of the six highest spurious emissions relative to the limit; emissions more than 20 dB below the limit do not need to be reported.</p> <p>Measurements are performed with the EUT rotated from 0° to 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.</p> |
|----------------|---|

| | | |
|-------------------|-------------------|-------------------|
| Test Setup | Appendix A | Figure A.2 |
|-------------------|-------------------|-------------------|

Measurement Procedure

The DUT place on a 80cm high turntable on an Open Area Test Site (OATS) at a distance of 3m from the measurement antenna. The DUT was set to transmit at maximum power and duty cycle. The DUT was rotated 360 degrees and scanned with the receive antenna elevated from 1 to 4m. The emissions were measured and recorded.

Table 8.1 - Summary of Field Strength Measurements (BT BLE)

See Appendix L for Measurement Plots

| FCC §15.249(a), RSS-210 Radiated Field Strength | | | | | | | | | | | |
|---|------|------------|-----------------------|----------|-----------------------------|--|--|-------------------------------------|--|-----------------|----------------|
| Frequency (MHz) | Mode | Modulation | Bit Rate (Mbps) | Detector | Antenna Polarization | Measured Field Strength [FS _{Meas}] (dBuV @ 3m) | Cable Loss(1) [L _c] (dBm) | Receive Antenna [ACF] (dB) | Corrected Field Strength [FS _{Corr}] (dBuV @3m) | Limit (dBuV) | Margin (dB) |
| 2402.0 | BLE2 | GMSK | 2 | RMS | Horizontal | 59.58 | 0 | 28.28 | 87.86 | 94.0 | 6.1 |
| 2440.0 | | | | | Horizontal | 62.35 | 0 | 28.28 | 90.63 | | 3.4 |
| 2480.0 | | | | | Horizontal | 57.50 | 0 | 28.28 | 85.78 | | 8.2 |
| 2402.0 | | | | | Vertical | 50.81 | 0 | 28.28 | 79.09 | | 14.9 |
| 2440.0 | | | | | Vertical | 50.76 | 0 | 28.28 | 79.04 | | 15.0 |
| 2480.0 | | | | | Vertical | 45.80 | 0 | 28.28 | 74.08 | | 19.9 |
| 2402.0 | | | | Peak | Horizontal | 62.94 | 0 | 28.28 | 91.22 | 114.0 | 22.8 |
| 2440.0 | | | | | Horizontal | 63.83 | 0 | 28.28 | 92.11 | | 21.9 |
| 2480.0 | | | | | Horizontal | 59.34 | 0 | 28.28 | 87.62 | | 26.4 |
| 2402.0 | | | | | Vertical | 50.66 | 0 | 28.28 | 78.94 | | 35.1 |
| 2440.0 | | | | | Vertical | 52.28 | 0 | 28.28 | 80.56 | | 33.4 |
| 2480.0 | | | | | Vertical | 47.70 | 0 | 28.28 | 75.98 | | 38.0 |
| Result: | | | | | | | | | | Complies | |

(1) Cable loss accounted for in instrument transducer factor

$$FS_{Corr} = FS_{Meas} + ACF + L_c$$

$$Margin = Limit - FS_{Corr}$$

Table 8.2 - Summary of Field Strength Measurements (ANT)

See Appendix L for Measurement Plots

| FCC §15.249(a), RSS-210 Radiated Field Strength | | | | | | | | | | | |
|---|------|------------|---------------------------|----------|-----------------------------|--|--|---|--|---------------------|--------------------|
| Frequency (MHz) | Mode | Modulation | Bit Rate (Mbps) | Detector | Antenna Polarization | Measured Field Strength [FS _{Meas}] (dBuV @ 3m) | Cable Loss(1) [L _c] (dBm) | Receive Antenna [ACF] (dB) | Corrected Field Strength [FS _{Corr}] (dBuV @3m) | Limit (dBuV) | Margin (dB) |
| 2402.0 | ANT | GFSK | - | RMS | Horizontal | 59.53 | 0 | 28.28 | 87.81 | 94.0 | 6.2 |
| 2440.0 | | | - | | | 63.59 | 0 | 28.28 | 91.87 | | 2.1 |
| 2480.0 | | | - | | | 62.69 | 0 | 28.28 | 90.97 | | 3.0 |
| 2402.0 | | | - | | Vertical | 49.55 | 0 | 28.28 | 77.83 | | 16.2 |
| 2440.0 | | | - | | | 50.24 | 0 | 28.28 | 78.52 | | 15.5 |
| 2480.0 | | | - | | | 50.11 | 0 | 28.28 | 78.39 | | 15.6 |
| 2402.0 | | | - | Peak | Horizontal | 60.25 | 0 | 28.28 | 88.53 | 114.0 | 25.5 |
| 2440.0 | | | - | | | 64.25 | 0 | 28.28 | 92.53 | | 21.5 |
| 2480.0 | | | - | | | 63.51 | 0 | 28.28 | 91.79 | | 22.2 |
| 2402.0 | | | - | | Vertical | 50.14 | 0 | 28.28 | 78.42 | | 35.6 |
| 2440.0 | | | - | | | 50.99 | 0 | 28.28 | 79.27 | | 34.7 |
| 2480.0 | | | - | | | 50.91 | 0 | 28.28 | 79.19 | | 34.8 |
| Result: | | | | | | | | | | Complies | |

(1) Cable loss accounted for in instrument transducer factor

$$FS_{Corr} = FS_{Meas} + ACF + L_c$$

$$Margin = Limit - FS_{Corr}$$

Table 8.3 - Summary of Field Strength Measurements (NFC)

See Appendix L for Measurement Plots

| Radiated Field Strength | | | | | | | | | | | |
|-------------------------|------|------------|----------|-----------------------------|--|---|-------------------------------------|--|--|---|--------|
| Frequency (MHz) | Mode | Modulation | Detector | Antenna Polarization | Measured Field Strength [FS _{Meas}] (dBuV @ 3m) | Cable Loss [L _c] (dBm) | Receive Antenna [ACF] (dB) | Corrected Field Strength [FS _{Corr}] (dBuV/m @3m) | Limit @30m [Lim _{30m}] (dBuV/m) | Limit* @3m [Lim _{3m}] (dBuV/m) | Margin |
| 13.56 | NFC | ASK | RMS | Front | 15.33 | 0.5 | 10.65 | 26.48 | 84.00 | 124.0 | 97.5 |
| | | | | Side | 7.91 | | | 19.06 | | | 104.9 |
| | | | Peak | Front | 24.41 | | | 35.56 | 104.00 | 144.0 | 108.4 |
| | | | | Side | 21.81 | | | 32.96 | | | 111.0 |
| | | | | Result: | | | | | | | |

* Limit @ 3m = Limit @ 30m + 40dB/decade = 84dBuV/m + 40dB = 124dBuV/m (Average)

* Limit @ 3m = Limit @ 30m + 40dB/decade = 104dBuV/m + 40dB = 144dBuV/m (Peak)

$FS_{Corr} = FS_{Meas} + ACF + L_c$

$Margin = Limit_{3m} - FS_{Corr}$

| Radiated Field Strength | | | | | | | | | | | |
|-------------------------|------|------------|----------|-----------------------------|--|---|---|---|--|--|--------|
| Frequency (MHz) | Mode | Modulation | Detector | Antenna Polarization | Measured Field Strength [FS _{Meas}] (dBuV @ 3m) | Cable Loss [L _c] (dBm) | Receive Antenna [ACF ^H] (dBuA/m) | Corrected Field Strength [H _{Corr}] (dBuA/m @3m) | Limit @30m [Lim _{30m}] (dBuV/m) | Limit** @3m [Lim _{3m}] (dBuA/m) | Margin |
| 13.56 | NFC | ASK | RMS | Front | 15.33 | 0.5 | -40.85 | -25.02 | 84.00 | 72.5 | 97.5 |
| | | | | Side | 7.91 | | | -32.44 | | | 104.9 |
| | | | Peak | Front | 24.41 | | | -15.94 | 104.00 | 92.5 | 108.4 |
| | | | | Side | 21.81 | | | -18.54 | | | 111.0 |
| Result: | | | | | | | | | | Complies | |

** Limit @ 3m = Limit @ 30m + 40dB/decade = 84dBuV/m + 40dB = 124dBuV/m (Average)

** Limit @ 3m = Limit @ 30m + 40dB/decade = 104dBuV/m + 40dB = 144dBuV/m (Peak)

In accordance with ISED Notice 2020 - DRS0023:

"Guidance on Magnetic Field Strength Radiated Emissions Measurements 9kHz - 30MHz"

Limit Correction

$Limit^H (dBuA/m) = Limit^E (dBuV/m) - Z_0 (dB\Omega)$

Where Z_0 = Free-Space Impedance = $120\pi\Omega = 377\Omega \Rightarrow 20\log 377\Omega = 51.5dB\Omega$

$Limit^H (dBuA/m) = Limit^E (dBuV/m) - Z_0 (dB\Omega) = 124dBuV/m - 51.5dB\Omega = 72.5dBuA/m @ 3m$ (Average)

$Limit^H (dBuA/m) = Limit^E (dBuV/m) - Z_0 (dB\Omega) = 144dBuV/m - 51.5dB\Omega = 92.5dBuA/m @ 3m$ (Peak)

Measurement Correction

$H_{Corr}(dBuA/m) = E_{Meas}(dBuV) + ACF^H(dB/\Omega m) + L_c - G_A$

Where ACF^H is the Magnetic Antenna Correction Factor, L_c is Cable Loss, G_A is Pre-Amplifier Gain

External Pre-Amplifier (G_A) not used

$Margin = Limit_{3m} - H_{Corr}$

9.0 20DB BW

Test Procedure

| | |
|---------------------|-----------------------------|
| Normative Reference | FCC 47 CFR §2.1051, §15.215 |
| | ANSI C63.10 (6.10.3) |

Limits

| | |
|------------|--|
| §15.215(c) | <p>Additional provisions to the general radiated emission limitations.</p> <p>(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.</p> |
|------------|--|

General Procedure

| | |
|-----------------|---|
| C63.10 (6.3.10) | <p>6.10.3 Unlicensed wireless device operational configuration</p> <p>Set the EUT to operate at 100% duty cycle or equivalent “normal mode of operation.”⁵⁴ Testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.⁵⁵ Testing shall be performed for each frequency with every applicable unlicensed wireless device configuration. If more than one power output level is available, then testing shall be done with the appropriate maximum power output for each antenna combination or modulation, as recorded in the unlicensed wireless device conducted power measurement results. The highest gain of each antenna type shall be used for this test.</p> |
|-----------------|---|

⁵⁴ For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the longest duration duty cycle supported.

⁵⁵ Some radios operating, for example, in the 2.4 GHz band, have hardware capability to operate at frequencies outside the band permitted by the regulatory authority. Testing shall only be done at the lowest and highest frequencies within the allowed frequency band (see Annex A for examples of regulatory requirements and frequency ranges).

| | | |
|------------|------------|------------|
| Test Setup | Appendix A | Figure A.1 |
|------------|------------|------------|

Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. The output power of the DUT was set to the manufacturer's highest output power setting at the Low and High frequency channels as permitted by the device. The unwanted band edge emissions were measured and recorded.

Table 9.1 - Summary of 20dB BW Measurements

See Appendix M for Measurement Plots

| 20dB BW Bandwidth Measurement Results | | | | | |
|---------------------------------------|----------------|-------------------------|------------|-----------------|-------------------------------|
| Mode | Channel Number | Channel Frequency (MHz) | Modulation | Bit Rate (Mbps) | Measured 20dB Bandwidth (MHz) |
| BLE1 | 0 | 2402 | GMSK | 1 | 1.33 |
| | 39 | 2480 | | | 1.36 |
| BLE2 | 1 | 2404 | GMSK | 2 | 2.71 |
| | 38 | 2478 | | | 2.48 |
| ANT | 2 | 2402 | GFSK | - | 1.41 |
| | 80 | 2480 | | | 2.15 |
| Result: | | | | | Complies |

Compliance to §15.215(c) :

Largest Measured 20dB BW < 2.48MHz, 50% BW < 1.24MHz

LBE = 2402MHz - 1.24MHz = 2400.79MHz > 2400MHz

UBE = 2480MHz + 1.24MHz = 2481.2MHz < 2483.5MHz

10.0 OUT-OF-BAND EMISSIONS- NFC

Test Procedure

| | |
|---------------------|--|
| Normative Reference | FCC 47 CFR §2.1046, §15.225, RSS-210 |
| | KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.6) |

Limits

| | |
|-----------------|--|
| §15.225 | <p>Operation within the band 13.110-14.010 MHz.</p> <p>(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p> |
| RSS-210 B.10(6) | <p>Band 13.110-14.010 MHz</p> <p>(a) the field strength of any emission shall not exceed the following limits:</p> <p>(i) 15.848 mV/m (84 dBµV/m) at 30 m, within the band 13.553-13.567 MHz</p> <p>(ii) 334 µV/m (50.5 dBµV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz</p> <p>(iii) 106 µV/m (40.5 dBµV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz</p> <p>(iv) RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz</p> |

General Procedure

| | |
|----------------|---|
| C63.10 (6.5.4) | <p>6.5.4 Final radiated emission tests</p> <p>Using the orientation and equipment arrangement of the EUT, and based on the measurement results found during the exploratory measurement in 6.5.3, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable) and the frequency and amplitude of the six highest spurious emissions relative to the limit; emissions more than 20 dB below the limit do not need to be reported.</p> <p>Measurements are performed with the EUT rotated from 0° to 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.</p> |
|----------------|---|

Test Setup

Appendix A Figure A.2

Measurement Procedure

The DUT place on a 80cm high turntable on an Open Area Test Site (OATS) at a distance of 3m from the measurement antenna. The DUT was set to transmit at maximum power and duty cycle. The DUT was rotated 360 degrees and scanned with the receive antenna elevated from 1 to 4m. The emissions were measured and recorded.

Table 10.1 – Summary of Field Strength Measurements (NFC)

See Appendix N for Measurement Plots

| Radiated Field Strength | | | | | | | | | | | | | | |
|-------------------------|------|------------|----------|-----------------------------|---------------------------------|--|---|-------------------------------------|--|--|---|--------------------|------|------|
| Frequency (MHz) | Mode | Modulation | Detector | Antenna Polarization | Frequency Range (MHz) | Measured Field Strength [FS _{Meas}] (dBuV @ 3m) | Cable Loss [L _C] (dBm) | Receive Antenna [ACF] (dB) | Corrected Field Strength [FS _{Corr}] (dBuV/m @3m) | Limit @30m [Lim _{30m}] (dBuV/m) | Limit* @3m [Lim _{3m}] (dBuV/m) | Margin (dB) | | |
| 13.56 | NFC | ASK | RMS | Front | 13.410 - 13.553 | 10.68 | 0.5 | 10.65 | 21.83 | 50.50 | 90.5 | 68.7 | | |
| | | | | | 13.567 - 13.710 | 10.07 | | | 21.22 | | | | 69.3 | |
| | | | | | 13.110 - 13.410 | -0.24 | | | 10.91 | 40.50 | 80.5 | | | 69.6 |
| | | | | | 13.710 - 14.010 | -1.06 | | | 10.09 | | | | | |
| Result: | | | | | | | | | | Complies | | | | |

* Limit @ 3m = Limit @ 30m + 40dB/decade = 50.5dBuV/m + 40dB = 90.5dBuV/m

* Limit @ 3m = Limit @ 30m + 40dB/decade = 40.5dBuV/m + 40dB = 80.5dBuV/m

FS_{Corr} = FS_{Meas} + ACF + L_C

Margin = Limit_{3m} - FS_{Corr}

| Radiated Field Strength | | | | | | | | | | | | |
|-------------------------|------|------------|----------|-----------------------------|-----------------|--|---|---|---|--|--|--------|
| Frequency (MHz) | Mode | Modulation | Detector | Antenna Polarization | | Measured Field Strength [FS _{Meas}] (dBuV @ 3m) | Cable Loss [L _c] (dBm) | Receive Antenna [ACF ^H] (dBuA/m) | Corrected Field Strength [H _{Corr}] (dBuA/m @3m) | Limit @30m [Lim _{30m}] (dBuV/m) | Limit** @3m [Lim _{3m}] (dBuA/m) | Margin |
| 13.56 | NFC | ASK | RMS | Front | 13.410 - 13.553 | 10.68 | 0.5 | -40.85 | -29.67 | 50.50 | 39.0 | 68.7 |
| | | | | | 13.567 - 13.710 | 10.07 | | | -30.28 | | | 69.3 |
| | | | | | 13.110 - 13.410 | -0.24 | | | -40.59 | 40.50 | 29.0 | 69.6 |
| | | | | | 13.710 - 14.010 | -1.06 | | | -41.41 | | | 70.4 |
| Result: | | | | | | | | | | Complies | | |

** Limit @ 3m = Limit @ 30m + 40dB/decade = 50.5dBuV/m + 40dB = 90.5dBuV/m

** Limit @ 3m = Limit @ 30m + 40dB/decade = 40.5dBuV/m + 40dB = 80.5dBuV/m

In accordance with ISED Notice 2020 - DRS0023:

"Guidance on Magnetic Field Strength Radiated Emissions Measurements 9kHz - 30MHz"

Limit Correction

Limit^H (dBuA/m) = Limit^E (dBuV/m) - Z₀ (dBΩ)

Where Z₀ = Free-Space Impedance = 120πΩ = 377Ω => 20Log377Ω = 51.5dBΩ

Limit^H (dBuA/m) = Limit^E (dBuV/m) - Z₀ (dBΩ) = 90.5dBuV/m - 51.5dBΩ = 39dBuA/m @ 3m

Limit^H (dBuA/m) = Limit^E (dBuV/m) - Z₀ (dBΩ) = 80.5dBuV/m - 51.5dBΩ = 29dBuA/m @ 3m

Measurement Correction

H_{Corr}(dBuA/m) = E_{Meas}(dBuV) + ACF^H(dB/Ωm) + L_C - G_A

Where ACF^H is the Magnetic Antenna Correction Factor, L_C is Cable Loss, G_A is Pre-Amplifier Gain

External Pre-Amplifier (G_A) not used

Margin = Limit_{3m} - H_{Corr}

11.0 RADIATED SPURIOUS EMISSIONS – RESTRICTED BANDS

Test Procedure

| | |
|---------------------|--|
| Normative Reference | FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a) |
| | KDB 558074 (8.6), ANSI C63.10 (11.12) |

Limits

| 47 CFR §15.247(d) | (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). | | | | | | | | | | | | | | | | |
|-------------------|--|-----------------|-----------------------------------|---------------|--------------------|---------------|--------------------|------------|----------|---------|---------|----------|---------|-----------|---------|-----------|---------|
| 47 CFR §15.209(a) | <p>§15.209 Radiated emission limits; general requirements.</p> <p>(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field Strength (microvolts/meter)</th></tr> </thead> <tbody> <tr> <td>0.009 - 0.490</td><td>2400/F (kHz) @300m</td></tr> <tr> <td>0.490 - 1.705</td><td>24000/F (kHz) @30m</td></tr> <tr> <td>1.705 - 30</td><td>30 @ 30m</td></tr> <tr> <td>30 - 88</td><td>100 @3m</td></tr> <tr> <td>88 - 216</td><td>150 @3m</td></tr> <tr> <td>216 - 960</td><td>200 @3m</td></tr> <tr> <td>Above 960</td><td>500 @3m</td></tr> </tbody> </table> | Frequency (MHz) | Field Strength (microvolts/meter) | 0.009 - 0.490 | 2400/F (kHz) @300m | 0.490 - 1.705 | 24000/F (kHz) @30m | 1.705 - 30 | 30 @ 30m | 30 - 88 | 100 @3m | 88 - 216 | 150 @3m | 216 - 960 | 200 @3m | Above 960 | 500 @3m |
| Frequency (MHz) | Field Strength (microvolts/meter) | | | | | | | | | | | | | | | | |
| 0.009 - 0.490 | 2400/F (kHz) @300m | | | | | | | | | | | | | | | | |
| 0.490 - 1.705 | 24000/F (kHz) @30m | | | | | | | | | | | | | | | | |
| 1.705 - 30 | 30 @ 30m | | | | | | | | | | | | | | | | |
| 30 - 88 | 100 @3m | | | | | | | | | | | | | | | | |
| 88 - 216 | 150 @3m | | | | | | | | | | | | | | | | |
| 216 - 960 | 200 @3m | | | | | | | | | | | | | | | | |
| Above 960 | 500 @3m | | | | | | | | | | | | | | | | |

Table 11.1 – Summary of Radiated Emissions, Restricted Band (DXX)

See Appendix O for Measurement Plots

| Summary of Radiated Tx Emissions (Restricted Band) | | | | | | | | | | | |
|---|-------------------|----------------------|--------------------|---|------------------------|-----------------------------------|---------------------------------------|--|-----------------|-------------|--|
| Measured Frequency Range (MHz) | Channel Frequency | Antenna Polarization | Emission Frequency | Measured Emission [E _{Meas}] (dBuV) | Antenna ACF [ACF] (dB) | Cable Loss [L _C] (dB) | Amplifier Gain [G _A] (dB) | Corrected Emission [E _{Corr}] (dBuV/m) | Limit (dBuV) | Margin (dB) | |
| 9kHz - 30MHz | 2412.0 | Front | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 9kHz - 30MHz | 2412.0 | Side | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 30-1000MHz | 2412.0 | Horizontal | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 30-1000MHz | 2412.0 | Vertical | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 1 - 3GHz | 2412.0 | Horizontal | ND | ND (1) | 27.40 | 4.58 | 0.00 (3) | ND | 54.0 | n/a | |
| 1 - 3GHz | 2412.0 | Vertical | ND | ND (1) | 27.40 | 4.58 | 0.00 (3) | ND | 54.0 | n/a | |
| 3-13GHz | 2412.0 | Horizontal | ND | ND (1) | 36.76 | 9.86 | 0.00 (3) | ND | 54.0 | n/a | |
| 3-13GHz | 2412.0 | Vertical | ND | ND (1) | 36.76 | 9.86 | 0.00 (3) | ND | 54.0 | n/a | |
| 13-18GHz | 2412.0 | Horizontal | ND | ND (1) | 38.75 | 16.54 | 0.00 (3) | ND | 54.0 | n/a | |
| 13-18GHz | 2412.0 | Vertical | ND | ND (1) | 38.75 | 16.54 | 0.00 (3) | ND | 54.0 | n/a | |
| 18-26GHz | 2412.0 | Horizontal | ND | ND (1) | 43.50 | 21.86 | 26.00 | ND | 54.0 | n/a | |
| 18-26GHz | 2412.0 | Vertical | ND | ND (1) | 43.50 | 21.86 | 26.00 | ND | 54.0 | n/a | |
| Results: | | | | | | | | | Complies | | |

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF} + L_C - G_A$$

Table 11.2 – Summary of Radiated Emissions, Restricted Band (NFC)

See Appendix O for Measurement Plots

| Summary of Radiated Tx Emissions (Restricted Band) | | | | | | | | | | | |
|---|-------------------|----------------------|--------------------|---|------------------------|-----------------------------------|---------------------------------------|--|-----------------|-------------|--|
| Measured Frequency Range (MHz) | Channel Frequency | Antenna Polarization | Emission Frequency | Measured Emission [E _{Meas}] (dBuV) | Antenna ACF [ACF] (dB) | Cable Loss [L _C] (dB) | Amplifier Gain [G _A] (dB) | Corrected Emission [E _{Corr}] (dBuV/m) | Limit (dBuV) | Margin (dB) | |
| 9kHz - 30MHz | 2412.0 | Front | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 9kHz - 30MHz | 2412.0 | Side | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 30-1000MHz | 2412.0 | Horizontal | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 30-1000MHz | 2412.0 | Vertical | ND | ND (1) | 0.00 | 0.00 | 0.00 (3) | ND (2) | n/a | n/a | |
| 1 - 3GHz | 2412.0 | Horizontal | ND | ND (1) | 27.40 | 4.58 | 0.00 (3) | ND | 54.0 | n/a | |
| 1 - 3GHz | 2412.0 | Vertical | ND | ND (1) | 27.40 | 4.58 | 0.00 (3) | ND | 54.0 | n/a | |
| Results: | | | | | | | | | Complies | | |

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF} + L_C - G_A$$

12.0 RADIATED RX SPURIOUS EMISSIONS

Test Procedure

| | |
|---------------------|--|
| Normative Reference | FCC 47 CFR §2.1046 |
| | KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.6) |

General Procedure

| | |
|----------------|---|
| C63.10 (6.5.4) | <p>6.5.4 Final radiated emission tests</p> <p>Using the orientation and equipment arrangement of the EUT, and based on the measurement results found during the exploratory measurement in 6.5.3, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable) and the frequency and amplitude of the six highest spurious emissions relative to the limit; emissions more than 20 dB below the limit do not need to be reported.</p> <p>Measurements are performed with the EUT rotated from 0° to 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.</p> |
|----------------|---|

| | | |
|------------|------------|------------|
| Test Setup | Appendix A | Figure A.2 |
|------------|------------|------------|

Measurement Procedure

The DUT place on a 80cm high turntable on an Open Area Test Site (OATS) at a distance of 3m from the measurement antenna. The DUT was set to transmit at maximum power and duty cycle. The DUT was rotated 360 degrees and scanned with the receive antenna elevated from 1 to 4m. The emissions were measured and recorded.

Table 12.1 – Summary of Radiated Rx Emissions

See Appendix P for Measurement Plots

| Measurement Results | | | | |
|------------------------|-----------------------------|---|--|--------------------|
| Frequency Range | Antenna Polarization | Measured Emission [E _{Meas}] (dBm) | Limit e.r.p./e.r.i.p. [A _L] (dBm) | Margin (dB) |
| 9kHz - 30MHz | Front | ND | -57.0 | n/a |
| 30-1000MHz | Horizontal | ND | -57.0 | n/a |
| 1 - 3GHz | | ND | -47.0 | n/a |
| 3 - 13.6GHz | | ND | -47.0 | n/a |
| 13.6 - 18GHz | | ND | -47.0 | n/a |
| 18 - 25GHz | | ND | -47.0 | n/a |
| 9kHz - 30MHz | Side | ND | -57.0 | n/a |
| 30-1000MHz | Vertical | ND | -57.0 | n/a |
| 1 - 3GHz | | ND | -47.0 | n/a |
| 3 - 13.6GHz | | ND | -47.0 | n/a |
| 13.6 - 18GHz | | ND | -47.0 | n/a |
| 18 - 25GHz | | ND | -47.0 | n/a |
| Results: | | | Complies | |

13.0 FREQUENCY STABILITY (NFC)

Test Conditions

| | |
|----------------------------|---|
| Normative Reference | FCC 47 CFR §2.1055, §15.225, RSS-Gen, RSS-210 |
|----------------------------|---|

Limits

| | |
|----------------|--|
| 47 CFR §15.225 | (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery. |
| RSS-210 B.6 | (b) the carrier frequency stability shall not exceed ± 100 ppm |

Measurement Procedure

47 CFR §2.1055 Frequency Stability

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
 - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.
 - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

Test Setup

Appendix A

5

Table 13.1 – Summary of Frequency Stability Measurements – FCC


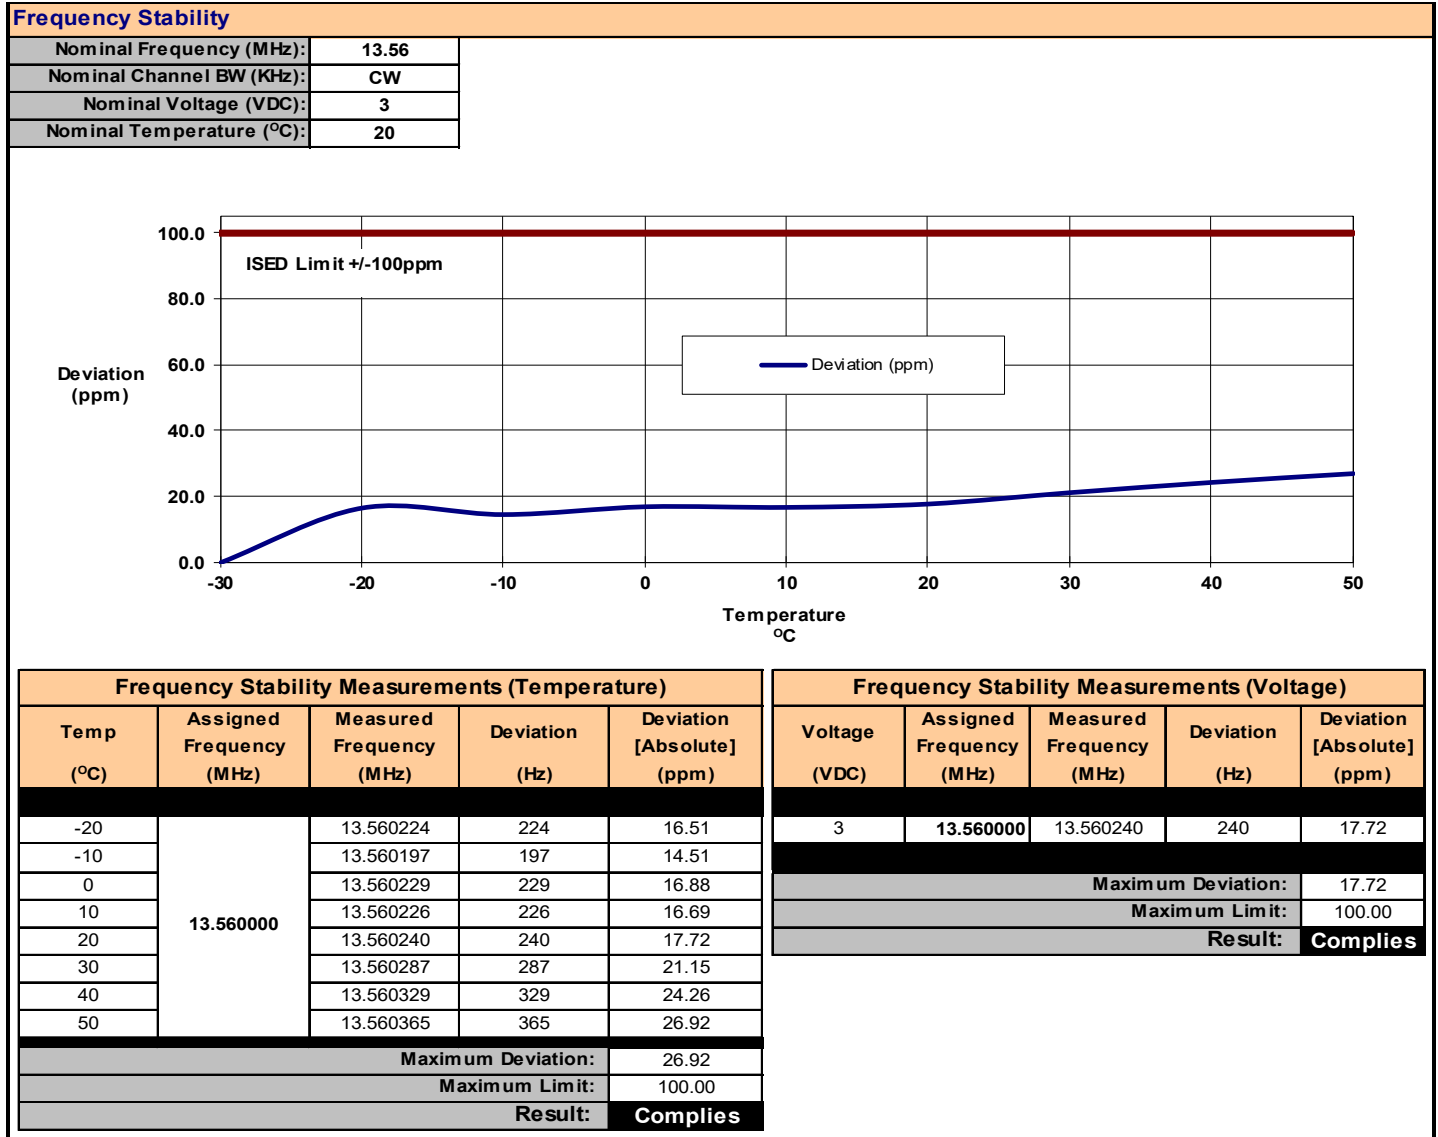


Table 13.2 – Summary of Frequency Stability Measurements – ISED

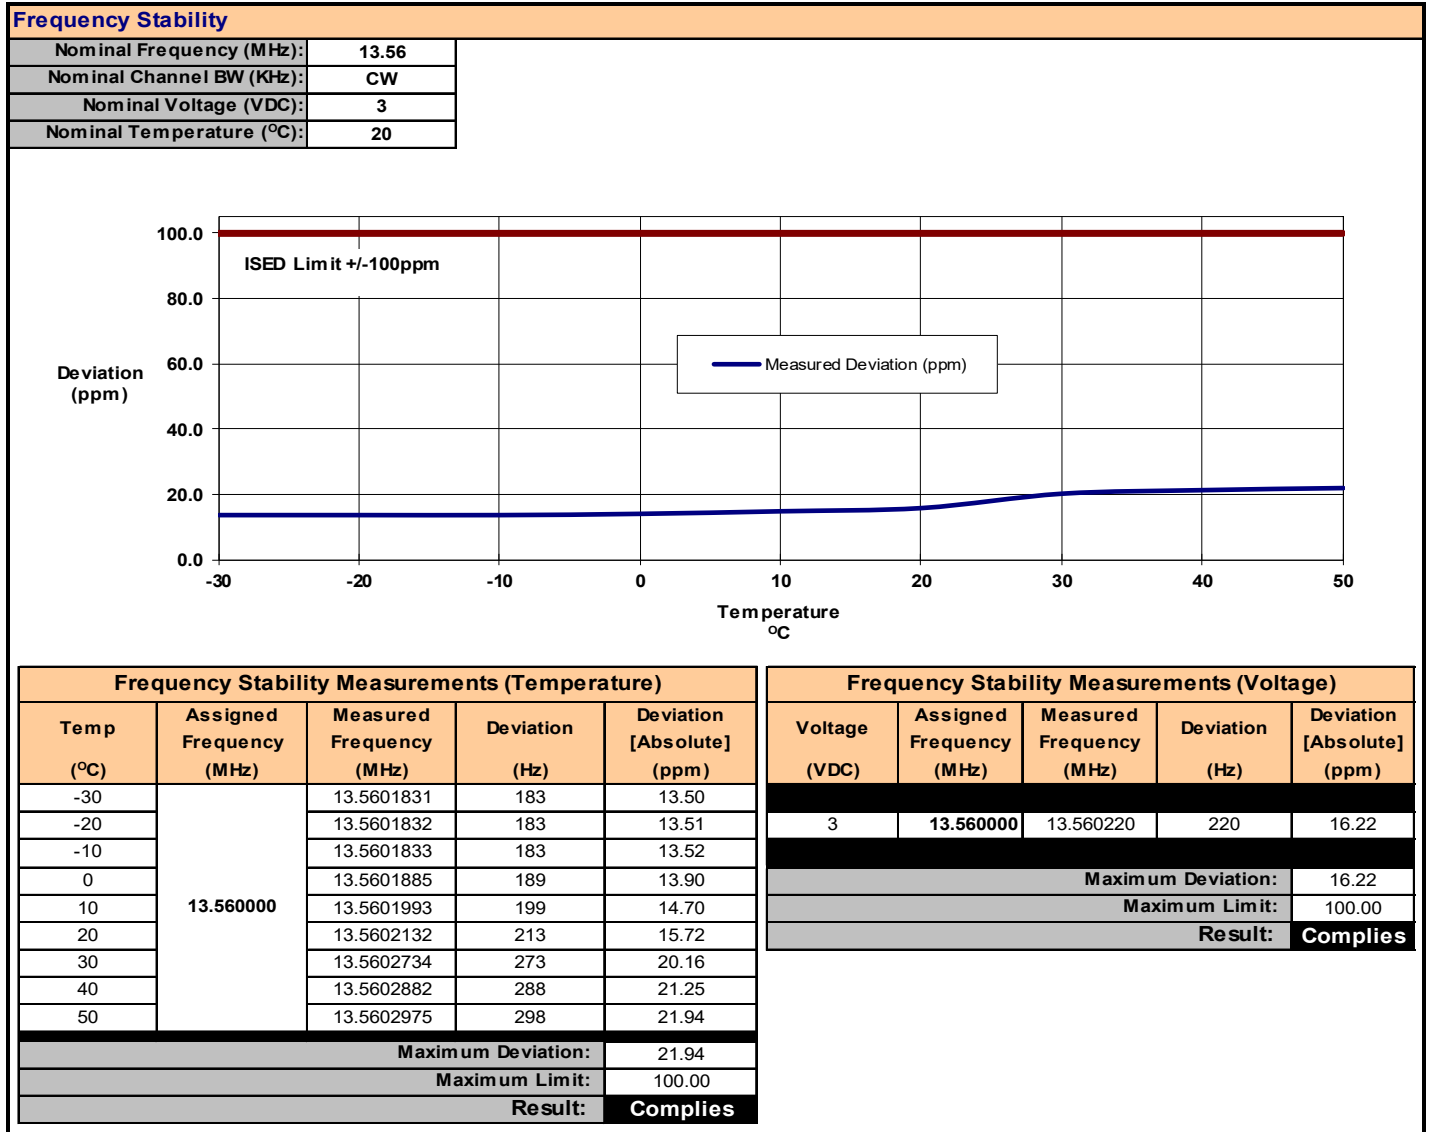

14.0 POWER LINE CONDUCTED EMISSIONS

Test Procedure

Normative Reference

FCC 47 CFR §15.107, ICES-003(6.1)
ANSI C63.4-2014

Limits

47 CFR §15.107

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the frequency

0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average

5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average

ICES-003(6.1)

6.1 - AC Power Line Conducted Emissions Limits

Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 2.

0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the frequency


0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average

5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average

Test Setup

Appendix A Figure A.7

Plot 14.1 – Power Line Conducted Emissions, Line 1

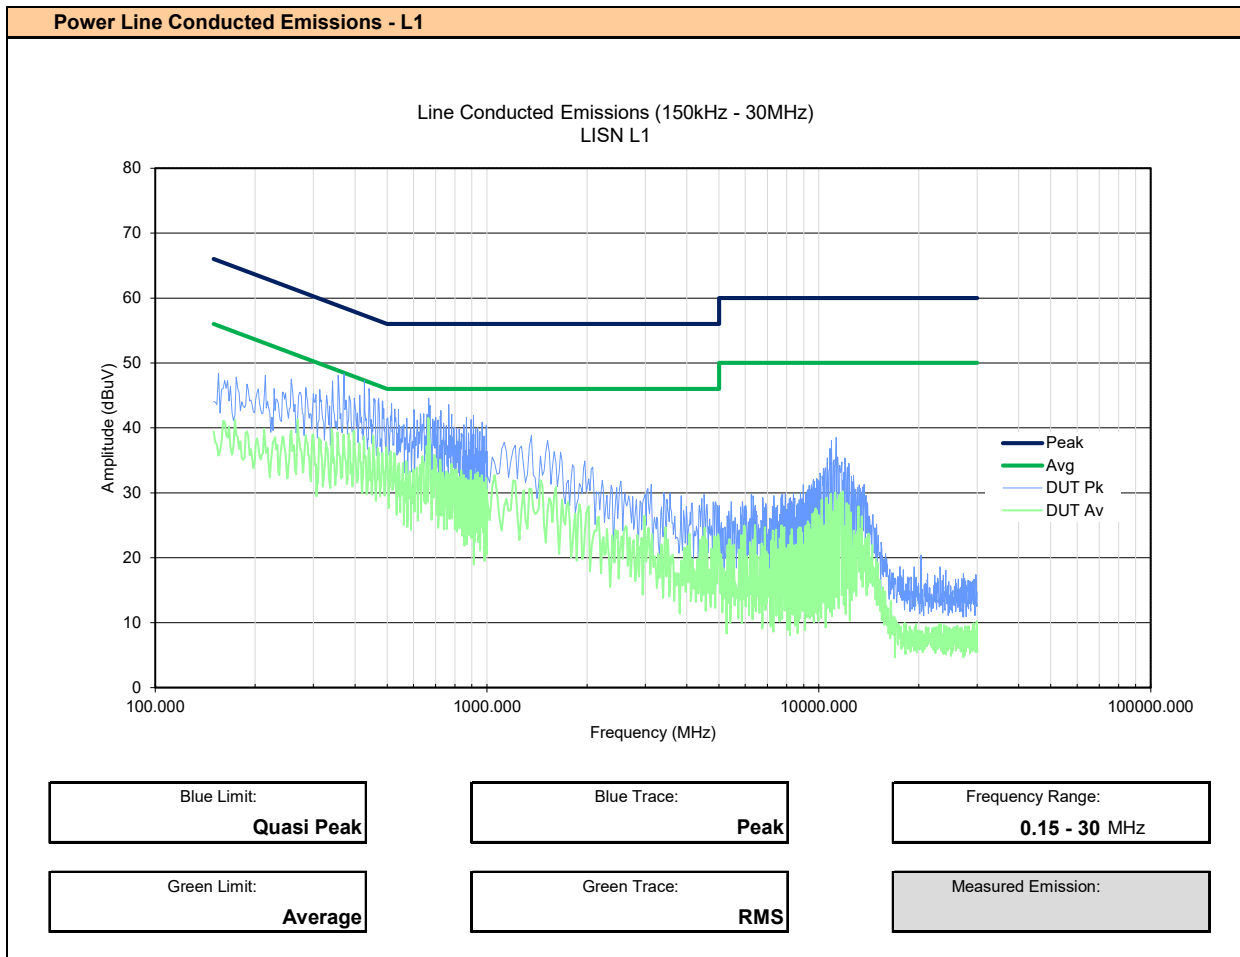

Plot 14.2 – Power Line Conducted Emissions, Line 2

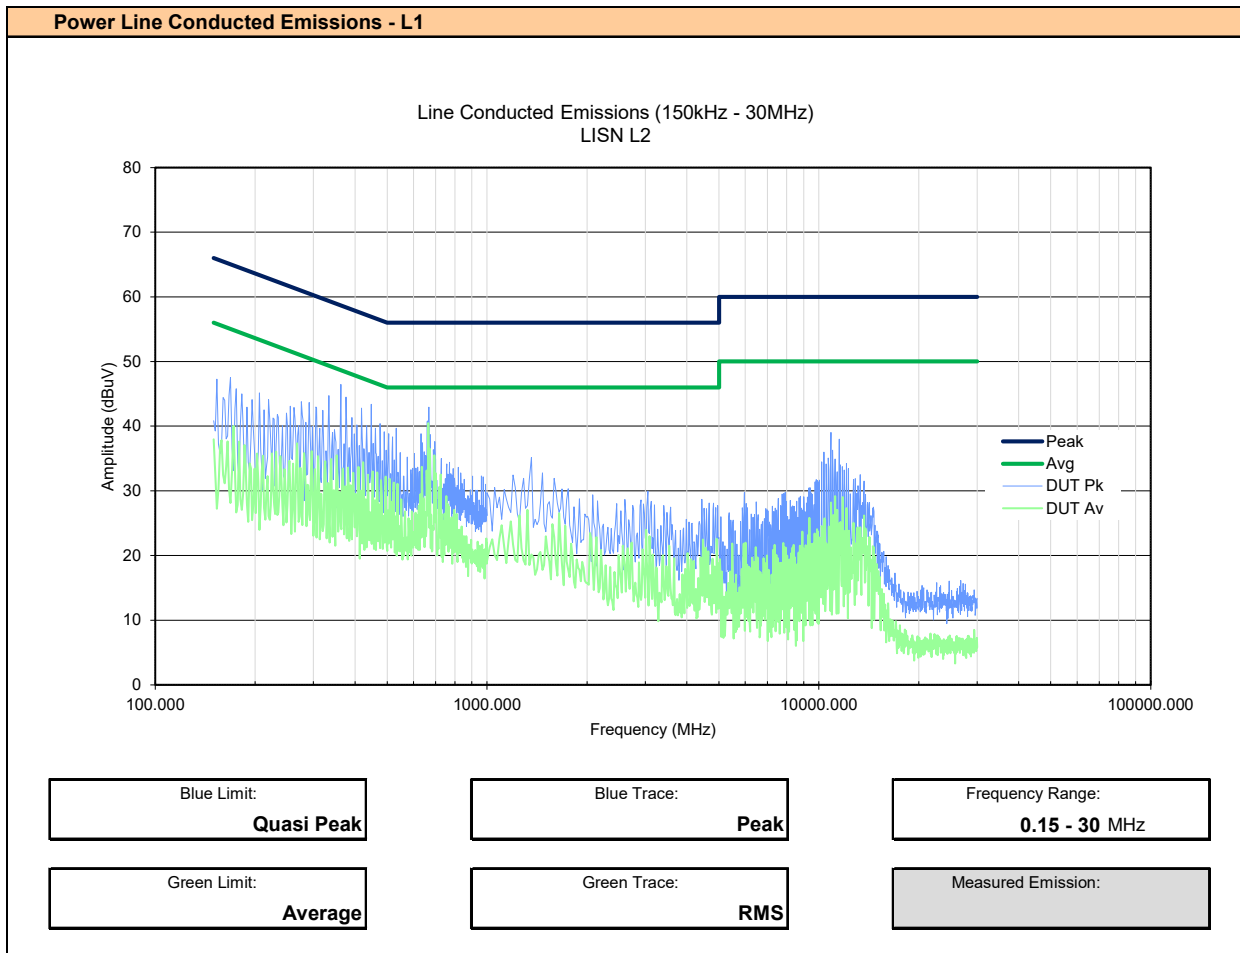


Table 14.1 – Summary of Power Line Conducted Emissions – L1

| Summary of Power Line Conducted Tx Emissions | | | | | | | | | | | |
|--|-------------------------|-----------|--|---|-----------|--|-----------------------------------|---------------------------------------|--|-----------------|-------------|
| Measured Frequency Range (MHz) | Channel Frequency (MHz) | LISN Port | Emission Frequency [f _{Emm}] (kHz) | Measured Emission [E _{Meas}] (dBuV) | Detector* | Insertion Loss [L _{LISN}] (dB) | Cable Loss [L _c] (dB) | Amplifier Gain [G _A] (dB) | Corrected Emission [E _{Corr}] (dBuV) | Limit (dBuV) | Margin (dB) |
| 150kHz - 30MHz | 2442.0 | L1 | 666.80 kHz | 40.71 | Average | 0.30 | 0.26 | 0.00 (3) | 41.27 (2) | 46.0 | 4.7 |
| Results: | | | | | | | | | | Complies | |

* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_c - G_A$$

Class B QP Limit = 56 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f_{Emm} = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f_{Emm} = 150kHz to 500kHz

$$\text{Margin} = \text{Limit} - E_{Corr}$$

Table 14.1 – Summary of Power Line Conducted Emissions – L2

| Summary of Power Line Conducted Tx Emissions | | | | | | | | | | | |
|--|-------------------------|-----------|--|---|-----------|--|-----------------------------------|---------------------------------------|--|-----------------|-------------|
| Measured Frequency Range (MHz) | Channel Frequency (MHz) | LISN Port | Emission Frequency [f _{Emm}] (kHz) | Measured Emission [E _{Meas}] (dBuV) | Detector* | Insertion Loss [L _{LISN}] (dB) | Cable Loss [L _c] (dB) | Amplifier Gain [G _A] (dB) | Corrected Emission [E _{Corr}] (dBuV) | Limit (dBuV) | Margin (dB) |
| 150kHz - 30MHz | 2442.0 | L2 | 666.80 kHz | 39.91 | Average | 0.30 | 0.26 | 0.00 (3) | 40.47 (2) | 46.0 | 5.5 |
| Results: | | | | | | | | | | Complies | |

* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_c - G_A$$

Class B QP Limit = 56 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f_{Emm} = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f_{Emm} = 150kHz to 500kHz

$$\text{Margin} = \text{Limit} - E_{Corr}$$

APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT

Table A.1 – Setup - Conducted Measurements Equipment List

| Equipment List | | | | |
|----------------|--------------|---------------|---------------|-------------------|
| Asset Number | Manufacturer | Model Number | Serial Number | Description |
| 00241 | R&S | FSU40 | 100500 | Spectrum Analyzer |
| 00263 | Koaxis | KP10-1.00M-TD | 263 | 1m Armoured Cable |

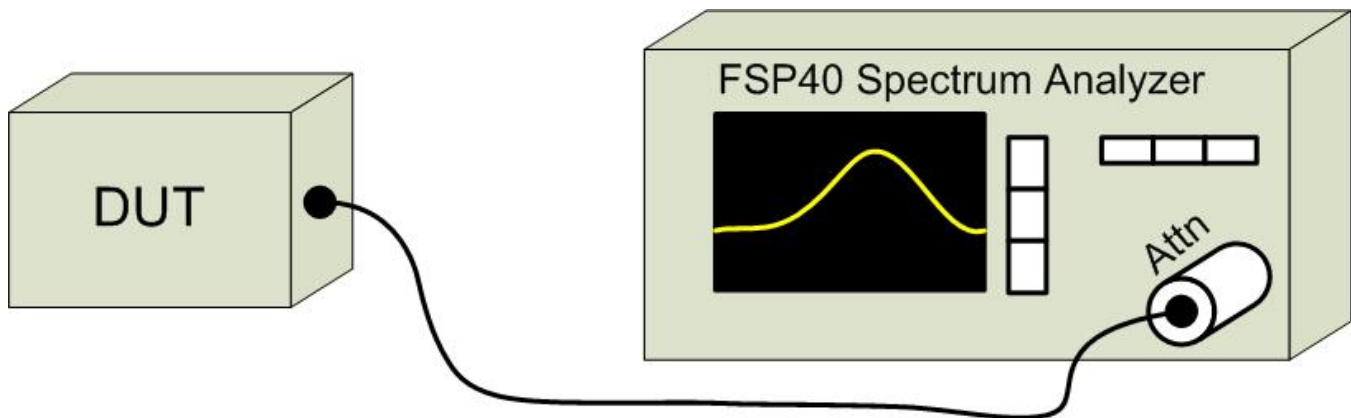


Figure A.1 – Test Setup Conducted Measurements

Table A.2 – Setup - Radiated Emissions Equipment List

| Equipment List | | | | |
|-----------------------|---------------------|---------------------|----------------------|-----------------------------|
| Asset Number | Manufacturer | Model Number | Serial Number | Description |
| 00050 | Chase | CBL-6111A | 1607 | Bilog Antenna |
| 00034 | ETS | 3115 | 6267 | Double Ridged Guide Horn |
| 00035 | ETS | 3115 | 6276 | Double Ridged Guide Horn |
| 00085 | EMCO | 6502 | 9203-2724 | Loop Antenna |
| 00161 | Waveline Inc. | 889 | | Standard Gain Horn 18-26GHz |
| 00162 | Waveline Inc. | 889 | | Standard Gain Horn 18-26GHz |
| 00165 | Waveline Inc. | 801-KF | | Waveguide Adapter 18-26GHz |
| 00166 | Waveline Inc. | 801-KF | | Waveguide Adapter 18-26GHz |
| 00333 | HP | 85685A | 3010A01095 | RF Preselector |
| 00049 | HP | 85650A | 2043A00162 | Quasi-peak Adapter |
| 00051 | HP | 8566B | 2747A05510 | Spectrum Analyzer |
| 00241 | R&S | FSU40 | 100500 | Spectrum Analyzer |
| 00265 | Miteq | JS32-00104000-58-5P | 1939850 | Microwave L/N Amplifier |
| 00071 | EMCO | 2090 | 9912-1484 | Multi-Device Controller |
| 00072 | EMCO | 2075 | 0001-2277 | Mini-mast |
| 00073 | EMCO | 2080 | 0002-1002 | Turn Table |
| 00263 | Koaxis | KP10-1.00M-TD | 263 | 1m Armoured Cable |
| 00263B | Koaxis | KP10-1.00M-TD | 263B | 1m Armoured Cable |
| 00275 | TMS | LMR400 | n/a | 25m Cable |
| 00278 | TILE | 34G3 | n/a | TILE Test Software |

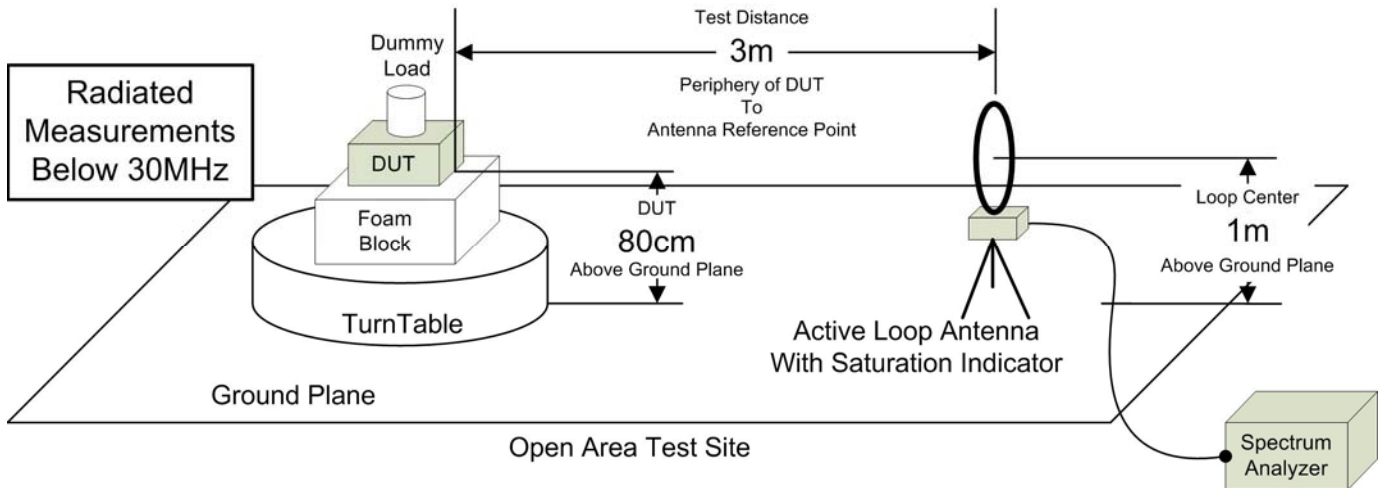


Figure A.2 – Test Setup Radiated Emissions Measurements Below 30MHz

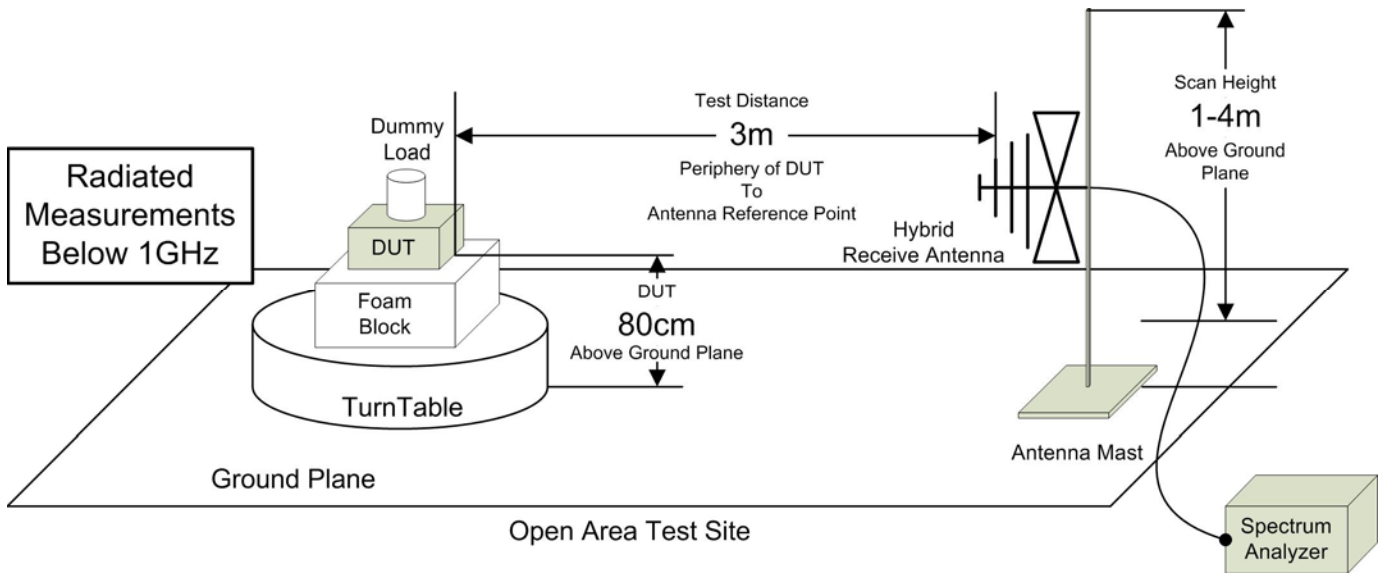


Figure A.3 – Test Setup Radiated Emissions Measurements 30 – 1000MHz

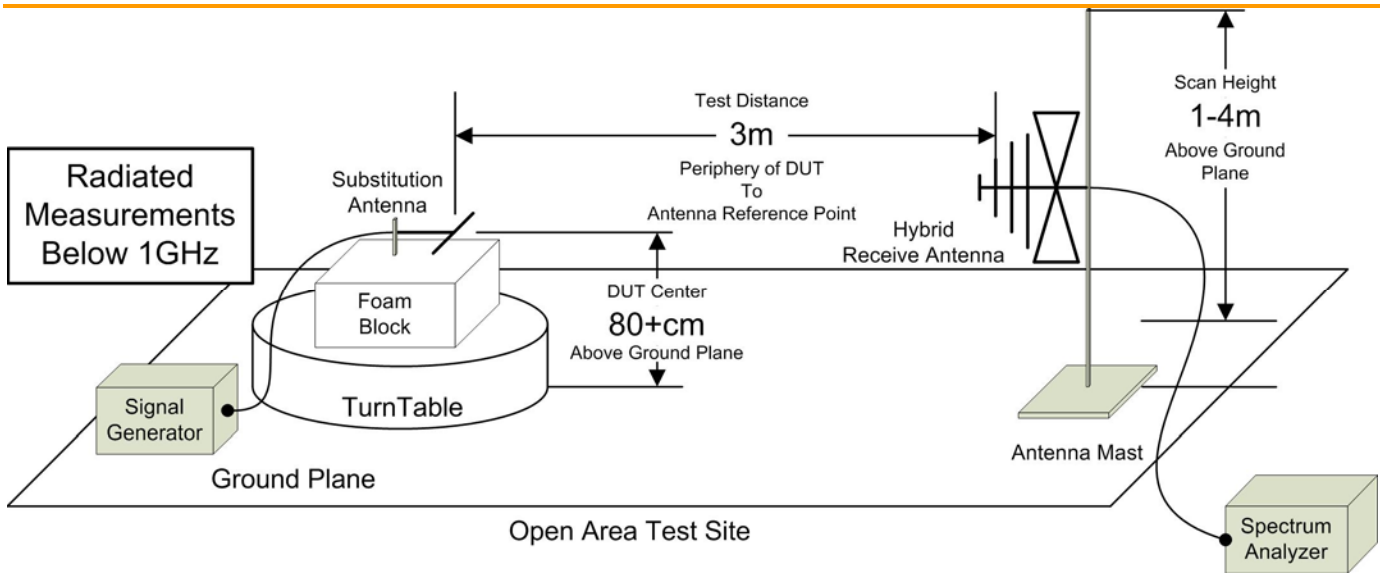


Figure A.4 – Test Setup Radiated Emissions Measurements 30 – 1000MHz Signal Substitution

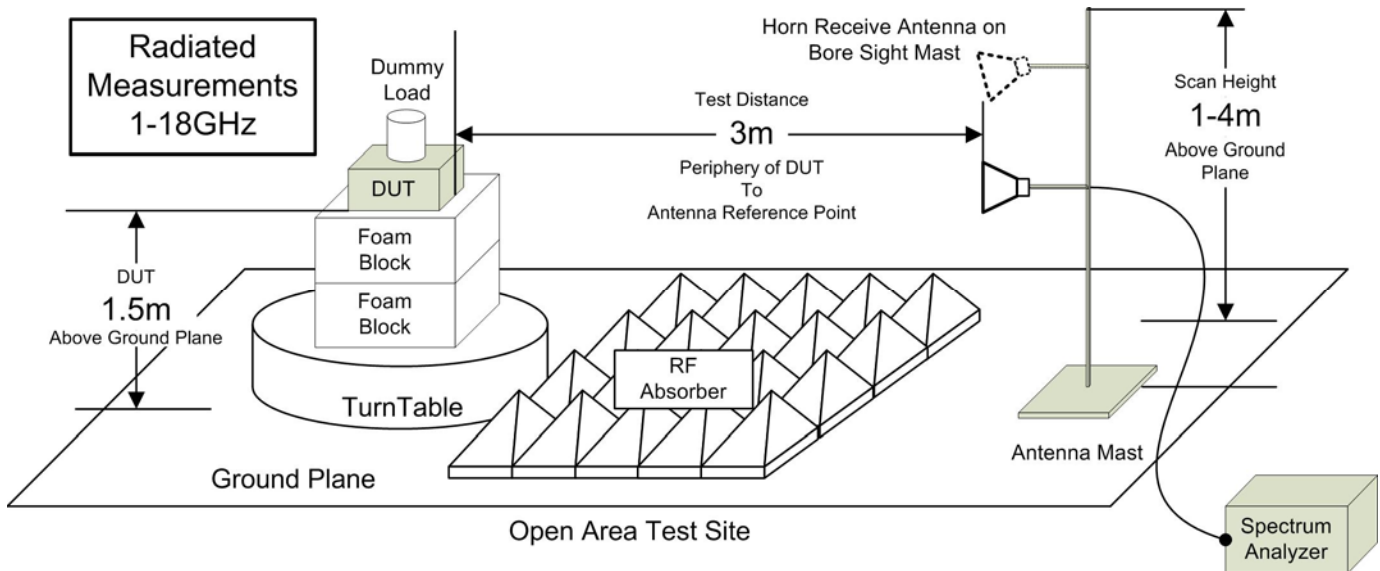


Figure A.5 – Test Setup Radiated Emissions Measurements 1 – 18GHz

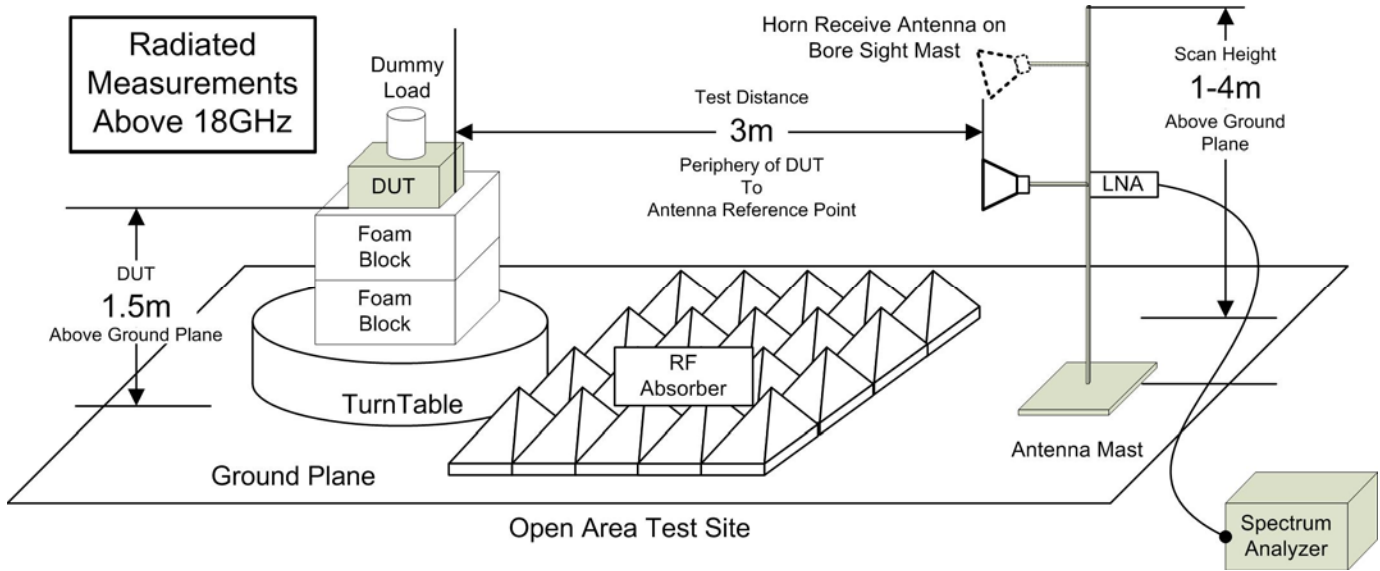


Figure A.6 – Test Setup Radiated Emissions Measurements Above 18 GHz

Table A.3 – Setup – Frequency Stability Equipment List

| Equipment List | | | | |
|----------------|--------------|--------------|---------------|-----------------------|
| Asset Number | Manufacturer | Model Number | Serial Number | Description |
| 00241 | R&S | FSU40 | 100500 | Spectrum Analyzer |
| 00081 | ESPEC | ECT-2 | 0510154-B | Environmental Chamber |
| 00234 | VWR | 61161-378 | 140320430 | Temp/Humidity Meter |

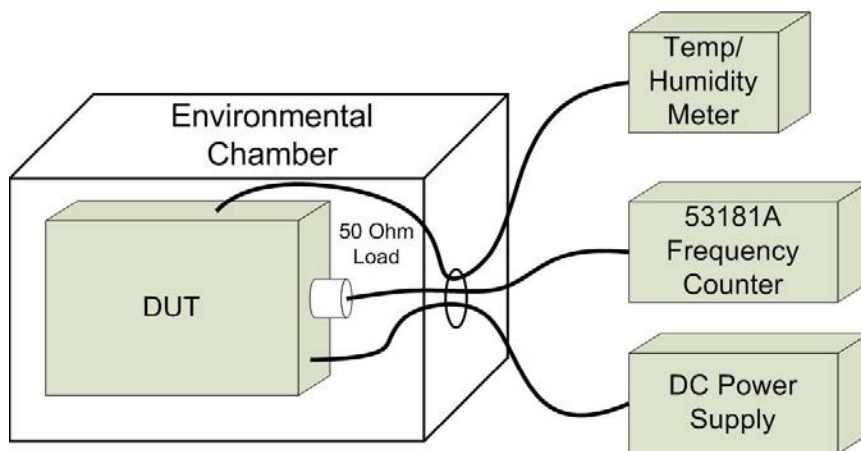


Figure A.7 – Frequency Stability

APPENDIX B – EQUIPMENT LIST AND CALIBRATION

| Equipment List | | | | | | | |
|----------------|---------------|---------------|---------------|-----------------------------|-----------------|----------------------|-----------------|
| Asset Number | Manufacturer | Model Number | Serial Number | Description | Last Calibrated | Calibration Interval | Calibration Due |
| 00050 | Chase | CBL-6111A | 1607 | Bilog Antenna | 16 Nov 2020 | Triennial | 16 Nov 2023 |
| 00034 | ETS | 3115 | 6267 | Double Ridged Guide Horn | 26 Nov 2018 | Triennial | 26 Nov 2021 |
| 00085 | EMCO | 6502 | 9203-2724 | Loop Antenna | 6 Sep 2022 | Triennial | 6 Sep 2025 |
| 00161 | Waveline Inc. | 889 | | Standard Gain Horn 18-26GHz | NCR | n/a | NCR |
| 00165 | Waveline Inc. | 801-KF | | Waveguide Adapter 18-26GHz | NCR | n/a | NCR |
| 00333 | HP | 85685A | 3010A01095 | RF Preselector | 23 Jun 2020 | Triennial | 30 Jun 2023 |
| 00049 | HP | 85650A | 2043A00162 | Quasi-peak Adapter | 23 Jun 2020 | Triennial | 23 Jun 2023 |
| 00051 | HP | 8566B | 2747A05510 | Spectrum Analyzer | 23 Jun 2020 | Triennial | 23 Jun 2023 |
| 00241 | R&S | FSU40 | 100500 | Spectrum Analyzer | 10 Aug 2021 | Triennial | 10 Aug 2024 |
| 00005 | HP | 8648D | 3847A00611 | Signal Generator | 23 Jun 2020 | Triennial | 23 Jun 2023 |
| 00257 | Com-Power | LI-215A | 191934 | LISN | 27 Dec 2021 | Triennial | 27 Dec 2024 |
| 00071 | EMCO | 2090 | 9912-1484 | Multi-Device Controller | n/a | n/a | n/a |
| 00072 | EMCO | 2075 | 0001-2277 | Mini-mast | n/a | n/a | n/a |
| 00073 | EMCO | 2080 | 0002-1002 | Turn Table | n/a | n/a | n/a |
| 00081 | ESPEC | ECT-2 | 0510154-B | Environmental Chamber | NCR | n/a | CNR |
| 00234 | VWR | 61161-378 | 140320430 | Temp/Humidity Meter | New | Triennial | New |
| 00263 | Koaxis | KP10-1.00M-TD | 263 | 1m Armoured Cable | COU | n/a | COU |
| 00263B | Koaxis | KP10-1.00M-TD | 263B | 1m Armoured Cable | COU | n/a | COU |
| 00275 | TMS | LMR400 | n/a | 25m Cable | COU | n/a | COU |
| 00278 | TILE | 34G3 | n/a | TILE Test Software | NCR | n/a | NCR |

NCR: No Calibration Required

COU: Calibrate On Use

APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

CISPR 16-4 Measurement Uncertainty (U_{LAB})

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of $k=2$

Radiated Emissions 30MHz - 200MHz

$$U_{LAB} = 5.14\text{dB} \quad U_{CISPR} = 6.3\text{dB}$$

Radiated Emissions 200MHz - 1000MHz

$$U_{LAB} = 5.90\text{dB} \quad U_{CISPR} = 6.3\text{dB}$$

Radiated Emissions 1GHz - 6GHz

$$U_{LAB} = 4.80\text{dB} \quad U_{CISPR} = 5.2\text{dB}$$

Radiated Emissions 6GHz - 18GHz

$$U_{LAB} = 5.1\text{dB} \quad U_{CISPR} = 5.5\text{dB}$$

Power Line Conducted Emissions 9kHz to 150kHz

$$U_{LAB} = 2.96\text{dB} \quad U_{CISPR} = 3.8\text{dB}$$

Power Line Conducted Emissions 150kHz to 30MHz

$$U_{LAB} = 3.12\text{dB} \quad U_{CISPR} = 3.4\text{dB}$$

If the calculated uncertainty U_{lab} is **less** than U_{CISPR} then:

- | | |
|---|---|
| 1 | Compliance is deemed to occur if NO measured disturbance exceeds the disturbance limit |
| 2 | Non-Compliance is deemed to occur if ANY measured disturbance EXCEEDS the disturbance limit |

If the calculated uncertainty U_{lab} is **greater** than U_{CISPR} then:

- | | |
|---|--|
| 3 | Compliance is deemed to occur if NO measured disturbance, increased by ($U_{lab} - U_{CISPR}$), exceeds the disturbance limit |
| 4 | Non-Compliance is deemed to occur if ANY measured disturbance, increased by ($U_{lab} - U_{CISPR}$), EXCEEDS the disturbance limit |

Other Measurement Uncertainties (U_{LAB})

RF Conducted Emissions 9kHz - 40GHz

$$U_{LAB} = 1.0\text{dB} \quad U_{CISPR} = \text{n/a}$$

Frequency/Bandwidth 9kHz - 40GHz

$$U_{LAB} = 0.1\text{ppm} \quad U_{CISPR} = \text{n/a}$$

Temperature

$$U_{LAB} = 1^{\circ}\text{C} \quad U_{CISPR} = \text{n/a}$$

END OF REPORT

APPENDIX K – OCCUPIED BANDWIDTH MEASUREMENT PLOTS

APPENDIX L – FIELD STRENGTH MEASUREMENT PLOTS

APPENDIX M– 20DB BW (DXX) MEASUREMENT PLOTS

APPENDIX N– FIELD STRENGTH/20DB BW (NFC) MEASUREMENT PLOTS

APPENDIX O– RADIATED TX EMISSIONS MEASUREMENT PLOTS

APPENDIX P– RADIATED RX MEASUREMENT PLOTS