


# FCC Test Report

**FCC ID** : IPH-A3697  
**Equipment** : Watch and activity monitor  
**Model No.** : AA3697  
**Brand Name** : GARMIN  
**Applicant** : Garmin International, Inc.  
**Address** : 1200 E. 151st Street Olathe, KS 66062 United States  
**Standard** : 47 CFR FCC Part 15.249  
**Received Date** : May 29, 2019  
**Tested Date** : Jul. 17 ~ Jul. 22, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Test Standards .....	9
1.6	Deviation from Test Standard and Measurement Procedure.....	9
1.7	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	Radiated Emission .....	14
3.3	20dB and Occupied Bandwidth .....	28
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>29</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR952803	Rev. 01	Initial issue	Aug. 05, 2019

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.788MHz 25.92 (Margin -20.08dB) - AV	Pass
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Modulation	Ch. Freq. (MHz)	Channel Number	Data Rate
2402-2479	GFSK	2402-2479	1-78 [78]	1 Mbps

### 1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	Slot	0.92	N/A	---

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	5Vdc from host 3.8Vdc from battery
--------------------------	---------------------------------------

### 1.1.4 Accessories

No.	Equipment	Description
1	Battery	Brand: Garmin Model: 361-00129-00 Power Rating: 3.8Vdc, 72mAh
2	USB cable	0.52m shielded without core

### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	---	---
20	2421	40	2441	60	2461	---	---

### 1.1.6 Test Tool and Duty Cycle


<b>Test Tool</b>	Hardware control, Version: 1750-3	
<b>Duty Cycle and Duty Factor</b>	<b>Duty Cycle (%)</b>	<b>Duty Factor (dB)</b>
	6.42	11.92

## 1.2 Local Support Equipment List


Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Apple	A1385	---	---

## 1.3 Test Setup Chart

### Battery Mode

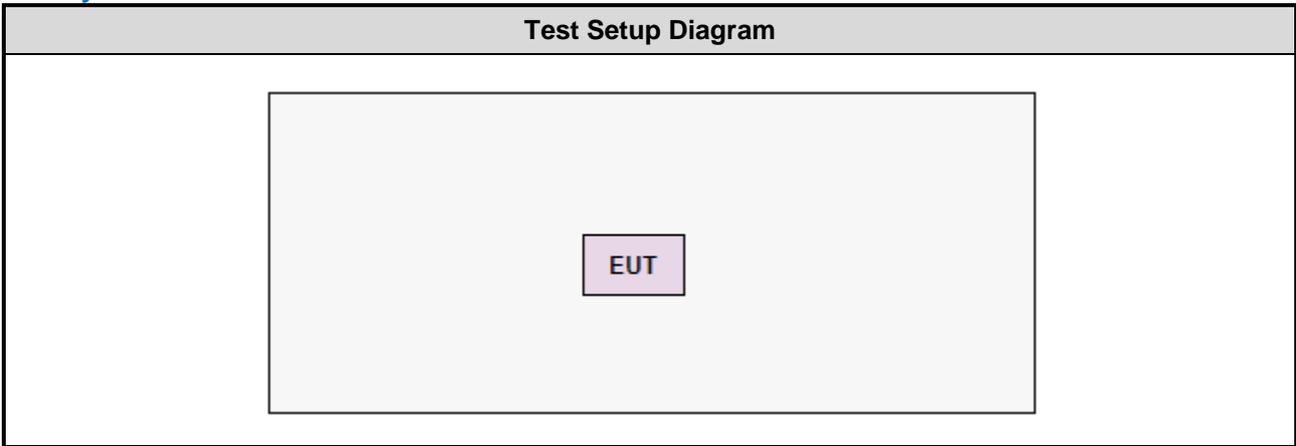

### Charging Mode

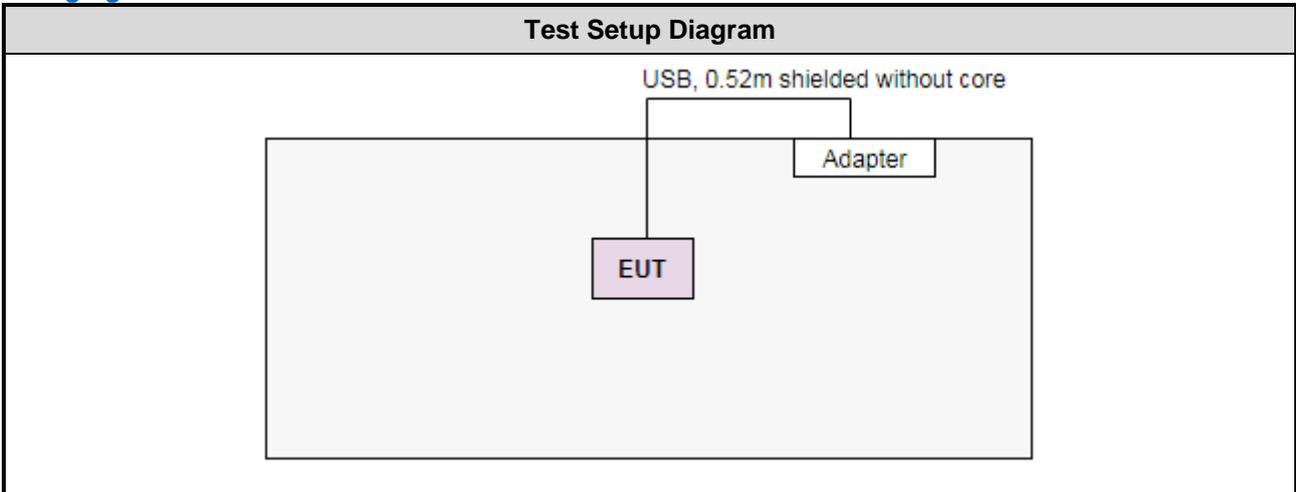

## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Jul. 22, 2019				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 05, 2018	Nov. 04, 2019
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 23, 2019
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 3 / (03CH03-WS)				
<b>Tested Date</b>	Jul. 15 ~ Jul. 17, 2019				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 07, 2019	Jan. 06, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019
Preamplifier	EMC	EMC02325	980187	Aug. 24, 2018	Aug. 23, 2019
Preamplifier	Agilent	83017A	MY53270014	Aug. 09, 2018	Aug. 08, 2019
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Oct. 01, 2018	Sep. 30, 2019
RF cable-8M	EMC	EMC104-SM-SM-80 00	181107	Oct. 01, 2018	Sep. 30, 2019
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Oct. 01, 2018	Sep. 30, 2019
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Oct. 01, 2018	Sep. 30, 2019
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Oct. 01, 2018	Sep. 30, 2019
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Oct. 01, 2018	Sep. 30, 2019
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.249

ANSI C63.10-2013

## 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor  $k=2$ )

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.130$ Hz
AC conducted emission	$\pm 2.92$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.96$ dB
Radiated emission $> 1$ GHz	$\pm 4.51$ dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 60%	Alex Tsai
Radiated Emissions	03CH03-WS	25°C / 65%	Aska Huang

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C-1
- CAB identifier: TW0009

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	Charging	---	---	2
Field Strength of Fundamental	GFSK	2402, 2441, 2479	1 Mbps	1
Radiated Emissions ≤ 1GHz	GFSK	2479	1 Mbps	1, 2
	Charging	---	---	2
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2479	1 Mbps	1
20dB bandwidth	GFSK	2402, 2441, 2479	1 Mbps	1

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. The test configurations are listed as follows:  
 Configuration 1 : Battery mode  
 Configuration 2 : Charging mode

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

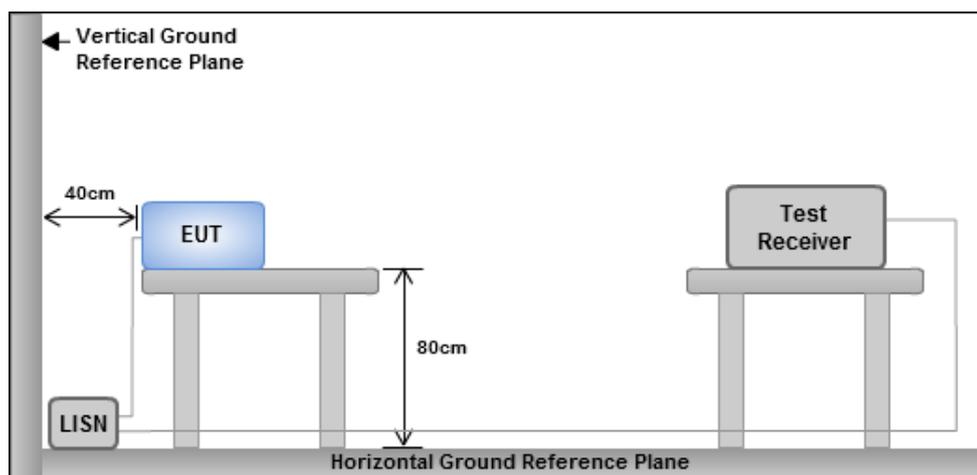


- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

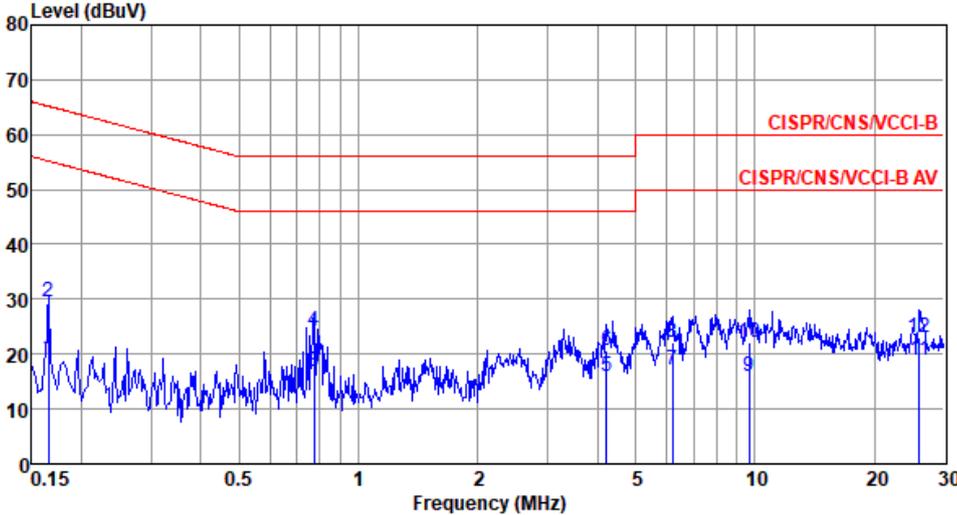Mode	Charging	Test Freq. (MHz)	---																																																																																																																																		
Power Phase	Line																																																																																																																																				
																																																																																																																																					
	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>LISN</th> <th>cable</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>factor</th> <th>loss</th> <th></th> </tr> <tr> <th></th> <th></th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.165</td> <td>19.06</td> <td>55.21</td> <td>-36.15</td> <td>9.33</td> <td>9.53</td> <td>0.06</td> <td>Average</td> </tr> <tr> <td>2</td> <td>0.165</td> <td>29.38</td> <td>65.21</td> <td>-35.83</td> <td>19.65</td> <td>9.53</td> <td>0.06</td> <td>QP</td> </tr> <tr> <td>3*</td> <td>0.771</td> <td>16.84</td> <td>46.00</td> <td>-29.16</td> <td>6.87</td> <td>9.59</td> <td>0.09</td> <td>Average</td> </tr> <tr> <td>4</td> <td>0.771</td> <td>24.28</td> <td>56.00</td> <td>-31.72</td> <td>14.31</td> <td>9.59</td> <td>0.09</td> <td>QP</td> </tr> <tr> <td>5</td> <td>4.224</td> <td>15.99</td> <td>46.00</td> <td>-30.01</td> <td>5.71</td> <td>9.61</td> <td>0.29</td> <td>Average</td> </tr> <tr> <td>6</td> <td>4.224</td> <td>20.62</td> <td>56.00</td> <td>-35.38</td> <td>10.34</td> <td>9.61</td> <td>0.29</td> <td>QP</td> </tr> <tr> <td>7</td> <td>6.186</td> <td>17.01</td> <td>50.00</td> <td>-32.99</td> <td>6.63</td> <td>9.63</td> <td>0.36</td> <td>Average</td> </tr> <tr> <td>8</td> <td>6.186</td> <td>22.21</td> <td>60.00</td> <td>-37.79</td> <td>11.83</td> <td>9.63</td> <td>0.36</td> <td>QP</td> </tr> <tr> <td>9</td> <td>9.654</td> <td>15.92</td> <td>50.00</td> <td>-34.08</td> <td>5.44</td> <td>9.65</td> <td>0.43</td> <td>Average</td> </tr> <tr> <td>10</td> <td>9.654</td> <td>22.00</td> <td>60.00</td> <td>-38.00</td> <td>11.52</td> <td>9.65</td> <td>0.43</td> <td>QP</td> </tr> <tr> <td>11</td> <td>26.001</td> <td>18.79</td> <td>50.00</td> <td>-31.21</td> <td>7.75</td> <td>9.63</td> <td>0.70</td> <td>Average</td> </tr> <tr> <td>12</td> <td>26.001</td> <td>22.94</td> <td>60.00</td> <td>-37.06</td> <td>11.90</td> <td>9.63</td> <td>0.70</td> <td>QP</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Read	LISN	cable	Remark	MHz	dBuV	Line	Limit	Level	factor	loss				dBuV	dB	dBuV	dB	dB		1	0.165	19.06	55.21	-36.15	9.33	9.53	0.06	Average	2	0.165	29.38	65.21	-35.83	19.65	9.53	0.06	QP	3*	0.771	16.84	46.00	-29.16	6.87	9.59	0.09	Average	4	0.771	24.28	56.00	-31.72	14.31	9.59	0.09	QP	5	4.224	15.99	46.00	-30.01	5.71	9.61	0.29	Average	6	4.224	20.62	56.00	-35.38	10.34	9.61	0.29	QP	7	6.186	17.01	50.00	-32.99	6.63	9.63	0.36	Average	8	6.186	22.21	60.00	-37.79	11.83	9.63	0.36	QP	9	9.654	15.92	50.00	-34.08	5.44	9.65	0.43	Average	10	9.654	22.00	60.00	-38.00	11.52	9.65	0.43	QP	11	26.001	18.79	50.00	-31.21	7.75	9.63	0.70	Average	12	26.001	22.94	60.00	-37.06	11.90	9.63	0.70	QP
Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																														
MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																															
		dBuV	dB	dBuV	dB	dB																																																																																																																															
1	0.165	19.06	55.21	-36.15	9.33	9.53	0.06	Average																																																																																																																													
2	0.165	29.38	65.21	-35.83	19.65	9.53	0.06	QP																																																																																																																													
3*	0.771	16.84	46.00	-29.16	6.87	9.59	0.09	Average																																																																																																																													
4	0.771	24.28	56.00	-31.72	14.31	9.59	0.09	QP																																																																																																																													
5	4.224	15.99	46.00	-30.01	5.71	9.61	0.29	Average																																																																																																																													
6	4.224	20.62	56.00	-35.38	10.34	9.61	0.29	QP																																																																																																																													
7	6.186	17.01	50.00	-32.99	6.63	9.63	0.36	Average																																																																																																																													
8	6.186	22.21	60.00	-37.79	11.83	9.63	0.36	QP																																																																																																																													
9	9.654	15.92	50.00	-34.08	5.44	9.65	0.43	Average																																																																																																																													
10	9.654	22.00	60.00	-38.00	11.52	9.65	0.43	QP																																																																																																																													
11	26.001	18.79	50.00	-31.21	7.75	9.63	0.70	Average																																																																																																																													
12	26.001	22.94	60.00	-37.06	11.90	9.63	0.70	QP																																																																																																																													
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).            2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																																					

<b>Mode</b>	Charging	<b>Test Freq. (MHz)</b>	---
<b>Power Phase</b>	Neutral		

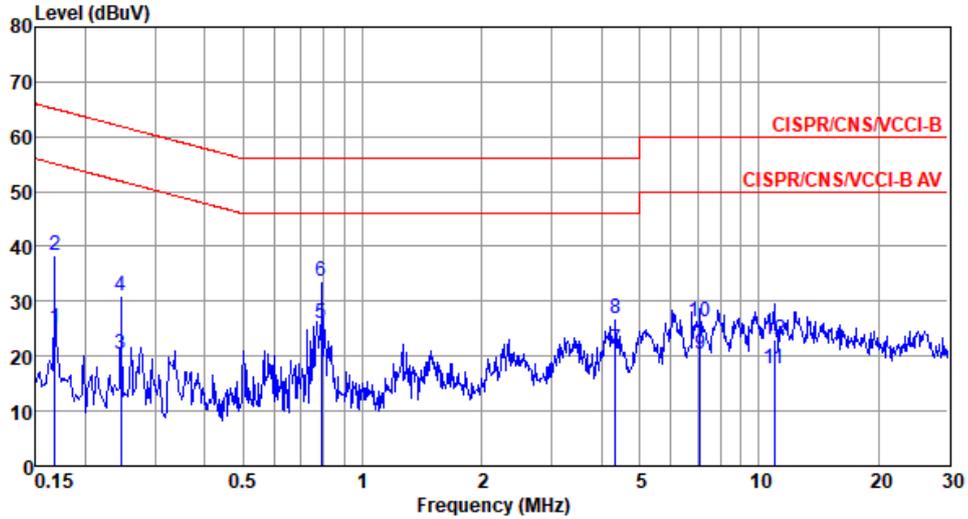

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.168	25.01	55.08	-30.07	15.26	9.57	0.06	Average
2	0.168	38.49	65.08	-26.59	28.74	9.57	0.06	QP
3	0.246	20.33	51.91	-31.58	10.54	9.59	0.07	Average
4	0.246	31.13	61.91	-30.78	21.34	9.59	0.07	QP
5*	0.788	25.92	46.00	-20.08	16.00	9.63	0.09	Average
6	0.788	33.56	56.00	-22.44	23.64	9.63	0.09	QP
7	4.338	21.13	46.00	-24.87	10.92	9.66	0.29	Average
8	4.338	26.96	56.00	-29.04	16.75	9.66	0.29	QP
9	7.100	20.42	50.00	-29.58	10.07	9.69	0.38	Average
10	7.100	26.40	60.00	-33.60	16.05	9.69	0.38	QP
11	10.905	17.59	50.00	-32.41	7.10	9.72	0.46	Average
12	10.905	23.06	60.00	-36.94	12.57	9.72	0.46	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Radiated Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

### 3.2.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400–2483.5 MHz	50	500

### 3.2.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.2.3 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. Radiated emission below 1GHz  
120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
2. Radiated emission above 1GHz / Peak value except fundamental  
RBW=1MHz, VBW=3MHz and Peak detector
3. Radiated emission above 1GHz / Average value for field strength of fundamental and harmonics  
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:


$$20\log (\text{Duty cycle}) = 20\log \frac{0.17101 * 2 \text{ ms}}{100 \text{ ms}} = -49.32\text{dB}$$

Please see page 27 for plotted duty


4. Radiated emission above 1GHz / Average value for other emissions  
RBW=1MHz, VBW=10Hz and Peak detector
5. Radiated emission Peak value for fundamental  
RBW=3MHz, VBW=10MHz and Peak detector

### 3.2.4 Test Setup

#### Radiated Emissions below 1 GHz

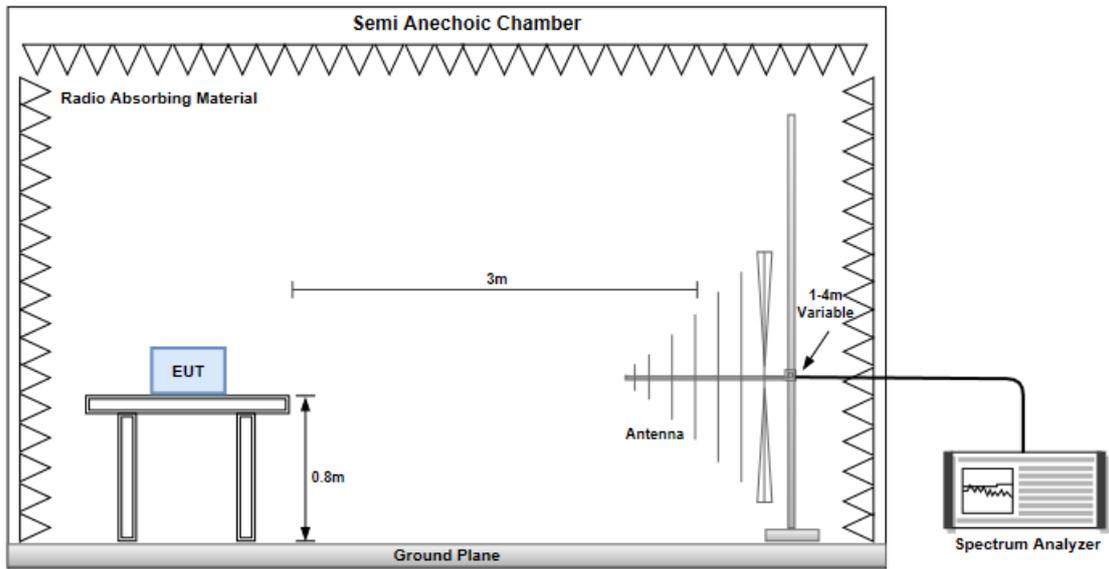


#### Radiated Emissions above 1 GHz

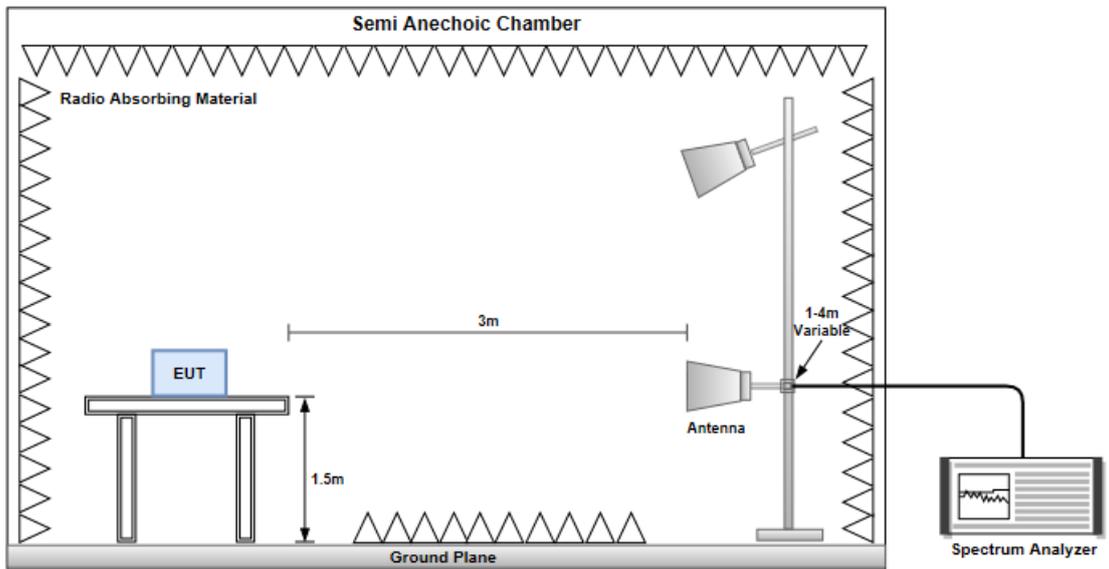

### 3.2.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2479
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

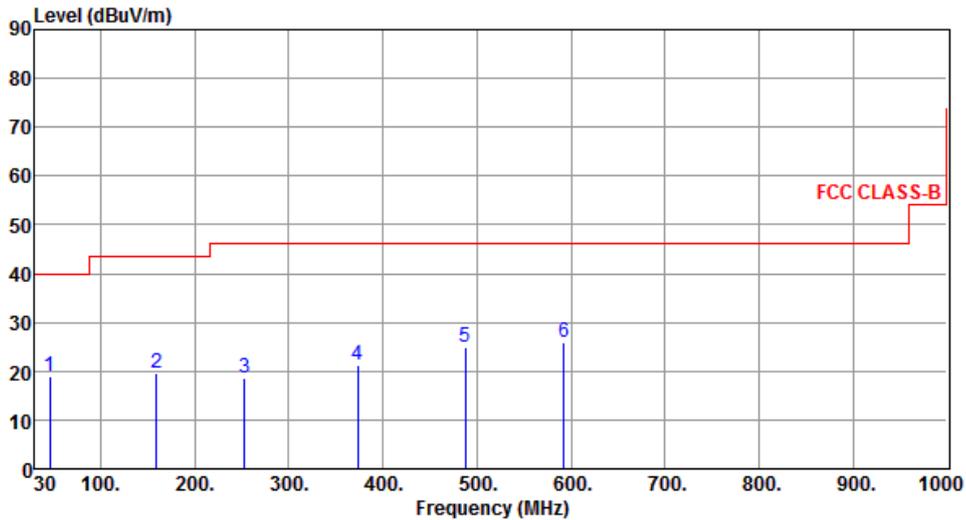

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.52	18.84	40.00	-21.16	27.55	-8.71	Peak	---	---
2	159.01	19.44	43.50	-24.06	28.05	-8.61	Peak	---	---
3	253.10	18.72	46.00	-27.28	28.78	-10.06	Peak	---	---
4	373.38	21.34	46.00	-24.66	27.83	-6.49	Peak	---	---
5	487.84	25.04	46.00	-20.96	28.63	-3.59	Peak	---	---
6	592.60	25.97	46.00	-20.03	27.20	-1.23	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2479
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

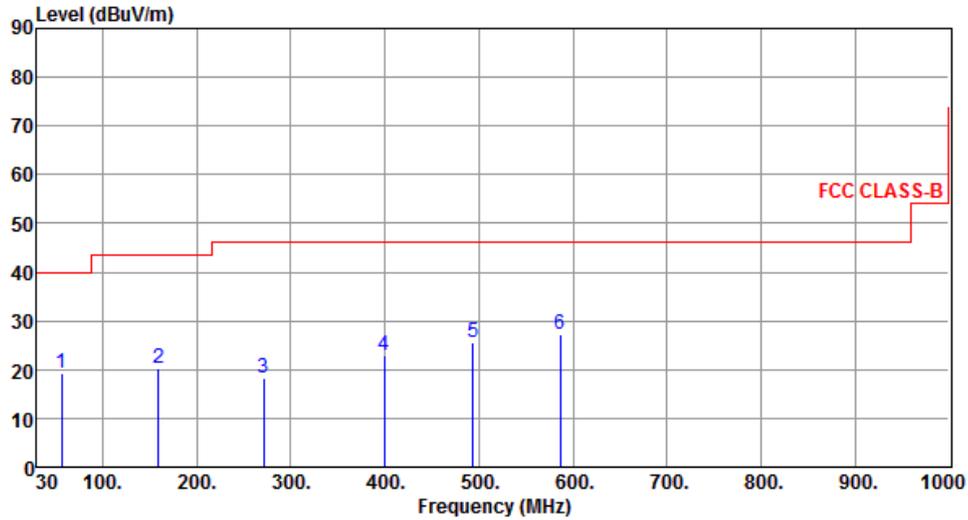

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	56.19	19.22	40.00	-20.78	28.19	-8.97	Peak	---	---
2	159.01	20.25	43.50	-23.25	28.86	-8.61	Peak	---	---
3	271.53	18.31	46.00	-27.69	27.64	-9.33	Peak	---	---
4	399.57	22.84	46.00	-23.16	28.66	-5.82	Peak	---	---
5	493.66	25.47	46.00	-20.53	28.93	-3.46	Peak	---	---
6	586.78	27.21	46.00	-18.79	28.70	-1.49	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Mode</b>	Charging	<b>Test Freq. (MHz)</b>	---
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

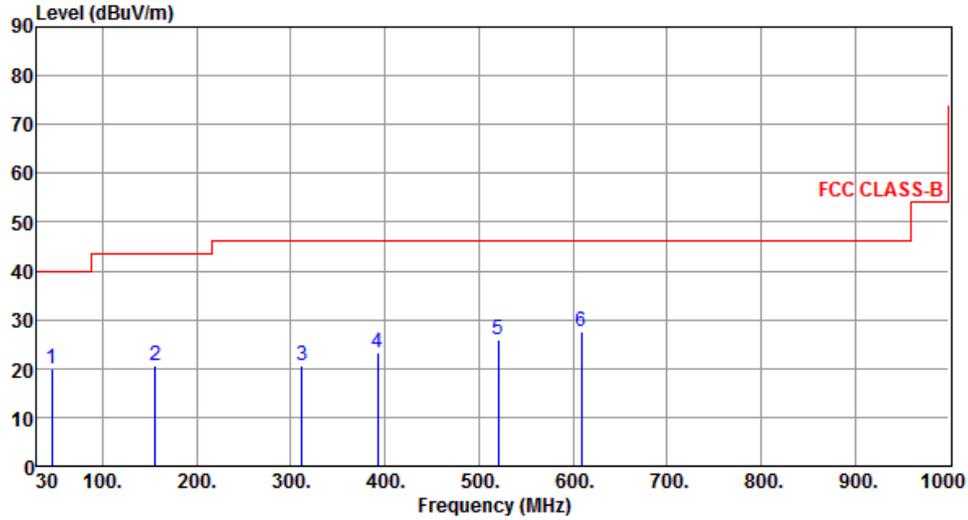

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.52	19.84	40.00	-20.16	28.55	-8.71	Peak	---	---
2	156.10	20.56	43.50	-22.94	29.19	-8.63	Peak	---	---
3	312.27	20.73	46.00	-25.27	28.75	-8.02	Peak	---	---
4	392.78	23.12	46.00	-22.88	29.01	-5.89	Peak	---	---
5	520.82	25.90	46.00	-20.10	28.74	-2.84	Peak	---	---
6	609.09	27.67	46.00	-18.33	28.26	-0.59	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Mode</b>	Charging	<b>Test Freq. (MHz)</b>	---
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

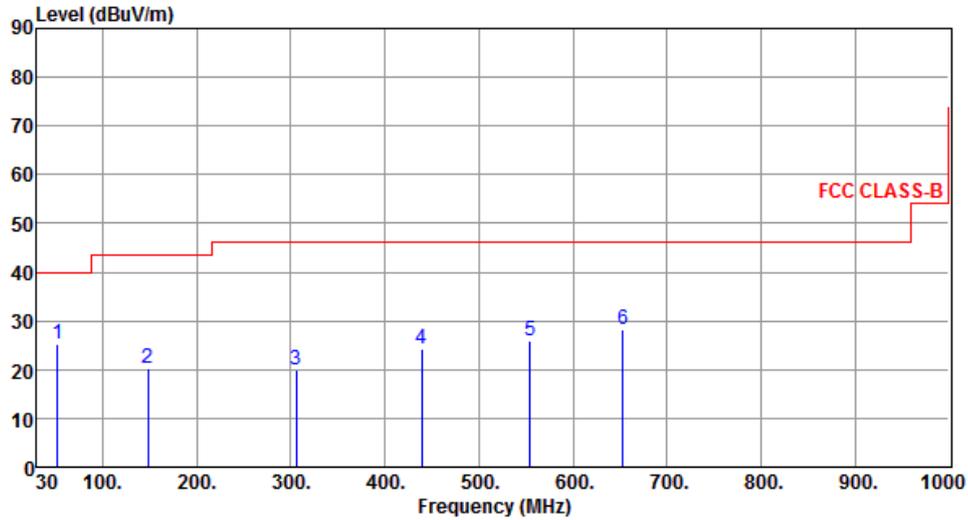

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.31	25.24	40.00	-14.76	34.04	-8.80	Peak	---	---
2	148.34	20.14	43.50	-23.36	28.97	-8.83	Peak	---	---
3	305.48	19.88	46.00	-26.12	28.20	-8.32	Peak	---	---
4	439.34	24.28	46.00	-21.72	28.78	-4.50	Peak	---	---
5	554.77	26.04	46.00	-19.96	28.41	-2.37	Peak	---	---
6	652.74	28.07	46.00	-17.93	28.14	-0.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

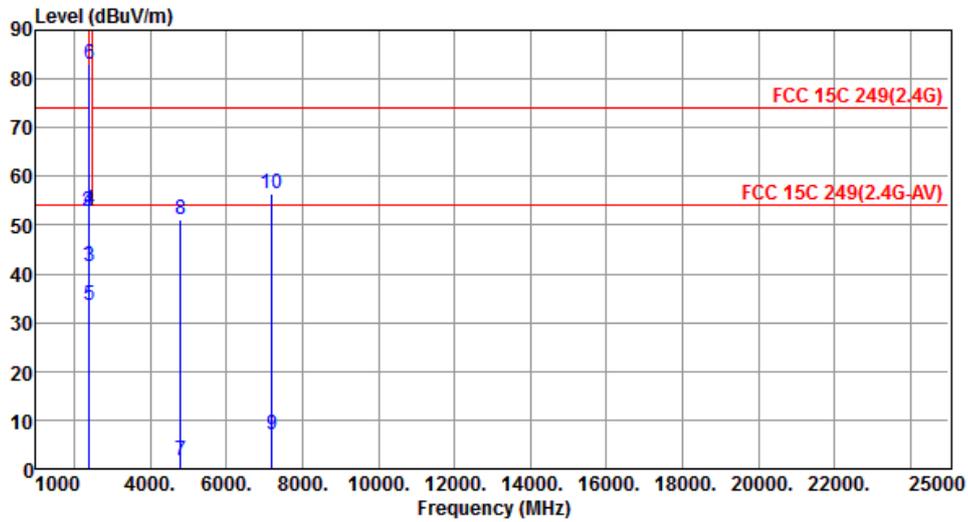


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.79	54.00	-12.21	42.75	-0.96	Average	222	112
2	2390.00	52.82	74.00	-21.18	53.78	-0.96	Peak	222	112
3	2400.00	41.57	54.00	-12.43	42.56	-0.99	Average	222	112
4	2400.00	53.04	74.00	-20.96	54.03	-0.99	Peak	222	112
5	2402.00	33.57	94.00	-60.43	34.56	-0.99	Average	222	112
6	2402.00	82.89	114.00	-31.11	83.88	-0.99	Peak	222	112
7	4804.00	1.68	54.00	-52.32	-3.12	4.80	Average	232	142
8	4804.00	51.00	74.00	-23.00	46.20	4.80	Peak	232	142
9	7206.00	7.11	54.00	-46.89	-3.14	10.25	Average	342	20
10	7206.00	56.43	74.00	-17.57	46.18	10.25	Peak	342	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

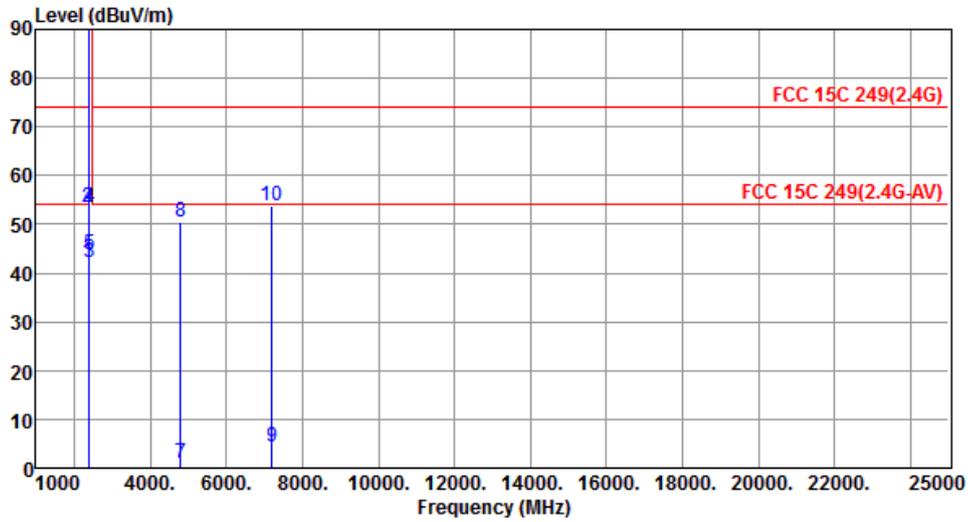


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.07	54.00	-11.93	43.03	-0.96	Average	276	191
2	2390.00	53.35	74.00	-20.65	54.31	-0.96	Peak	276	191
3	2400.00	42.26	54.00	-11.74	43.25	-0.99	Average	276	191
4	2400.00	53.51	74.00	-20.49	54.50	-0.99	Peak	276	191
5	2402.00	43.86	94.00	-50.14	44.85	-0.99	Average	276	191
6	2402.00	93.18	114.00	-20.82	94.17	-0.99	Peak	276	191
7	4804.00	1.13	54.00	-52.87	-3.67	4.80	Average	163	70
8	4804.00	50.45	74.00	-23.55	45.65	4.80	Peak	163	70
9	7206.00	4.41	54.00	-49.59	-5.84	10.25	Average	100	63
10	7206.00	53.73	74.00	-20.27	43.48	10.25	Peak	100	63

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

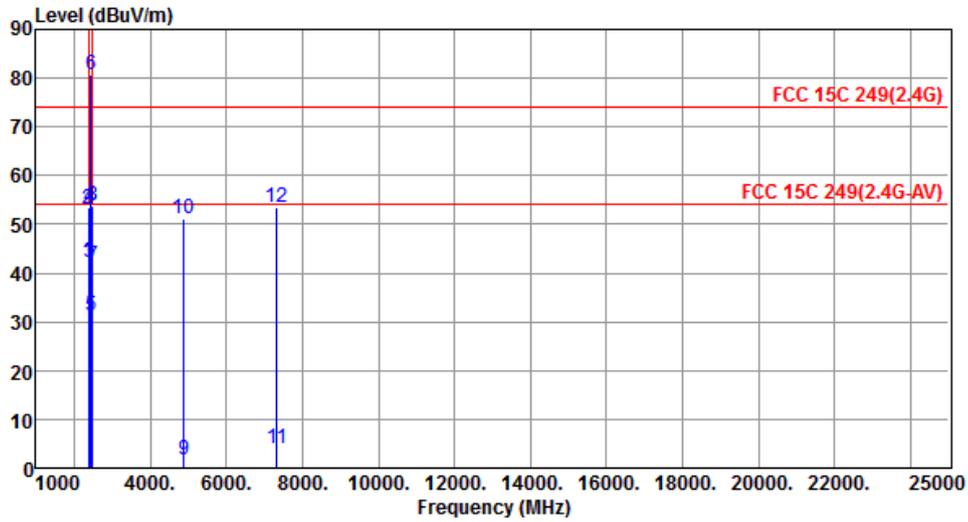


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.06	54.00	-11.94	43.02	-0.96	Average	100	113
2	2390.00	53.27	74.00	-20.73	54.23	-0.96	Peak	100	113
3	2400.00	42.12	54.00	-11.88	43.11	-0.99	Average	100	113
4	2400.00	53.52	74.00	-20.48	54.51	-0.99	Peak	100	113
5	2441.00	31.33	94.00	-62.67	32.35	-1.02	Average	100	113
6	2441.00	80.65	114.00	-33.35	81.67	-1.02	Peak	100	113
7	2483.50	41.39	54.00	-12.61	42.51	-1.12	Average	100	113
8	2483.50	53.69	74.00	-20.31	54.81	-1.12	Peak	100	113
9	4882.00	1.76	54.00	-52.24	-3.15	4.91	Average	178	181
10	4882.00	51.08	74.00	-22.92	46.17	4.91	Peak	178	181
11	7323.00	4.02	54.00	-49.98	-6.29	10.31	Average	100	63
12	7323.00	53.34	74.00	-20.66	43.03	10.31	Peak	100	63

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

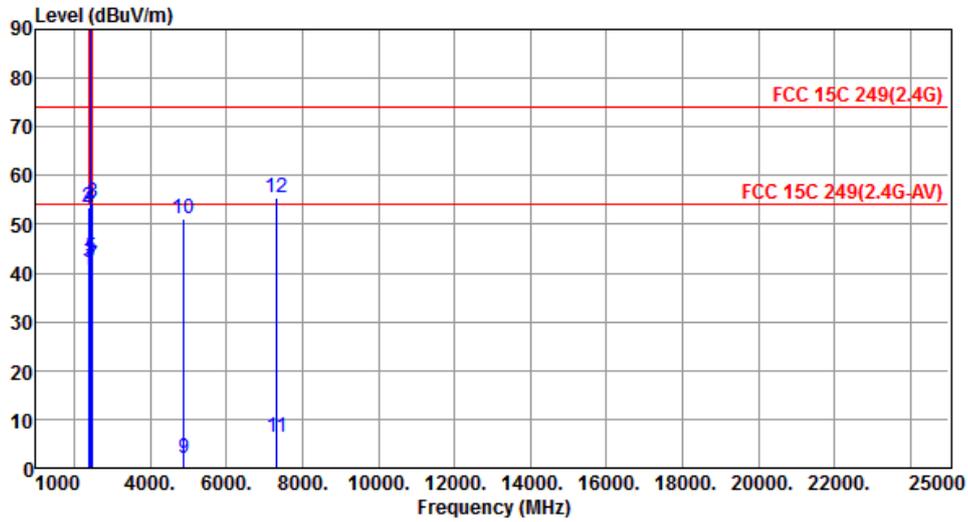


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.63	54.00	-13.37	41.59	-0.96	Average	240	190
2	2390.00	53.40	74.00	-20.60	54.36	-0.96	Peak	240	190
3	2400.00	42.08	54.00	-11.92	43.07	-0.99	Average	240	190
4	2400.00	53.54	74.00	-20.46	54.53	-0.99	Peak	240	190
5	2441.00	43.30	94.00	-50.70	44.32	-1.02	Average	240	190
6	2441.00	92.62	114.00	-21.38	93.64	-1.02	Peak	240	190
7	2483.50	41.44	54.00	-12.56	42.56	-1.12	Average	240	190
8	2483.50	54.53	74.00	-19.47	55.65	-1.12	Peak	240	190
9	4882.00	1.86	54.00	-52.14	-3.05	4.91	Average	213	133
10	4882.00	51.18	74.00	-22.82	46.27	4.91	Peak	213	133
11	7323.00	6.15	54.00	-47.85	-4.16	10.31	Average	346	22
12	7323.00	55.47	74.00	-18.53	45.16	10.31	Peak	346	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2479
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

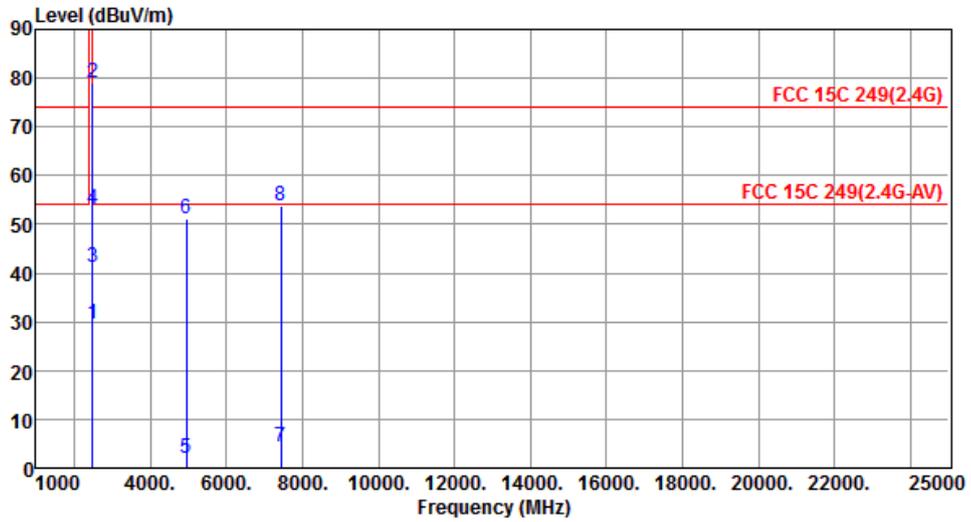


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2479.00	29.69	94.00	-64.31	30.80	-1.11	Average	113	113
2	2479.00	79.01	114.00	-34.99	80.12	-1.11	Peak	113	113
3	2483.50	41.20	54.00	-12.80	42.32	-1.12	Average	113	113
4	2483.50	53.08	74.00	-20.92	54.20	-1.12	Peak	113	113
5	4958.00	1.87	54.00	-52.13	-3.30	5.17	Average	100	172
6	4958.00	51.19	74.00	-22.81	46.02	5.17	Peak	100	172
7	7437.00	4.40	54.00	-49.60	-5.94	10.34	Average	100	63
8	7437.00	53.72	74.00	-20.28	43.38	10.34	Peak	100	63

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2479
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1


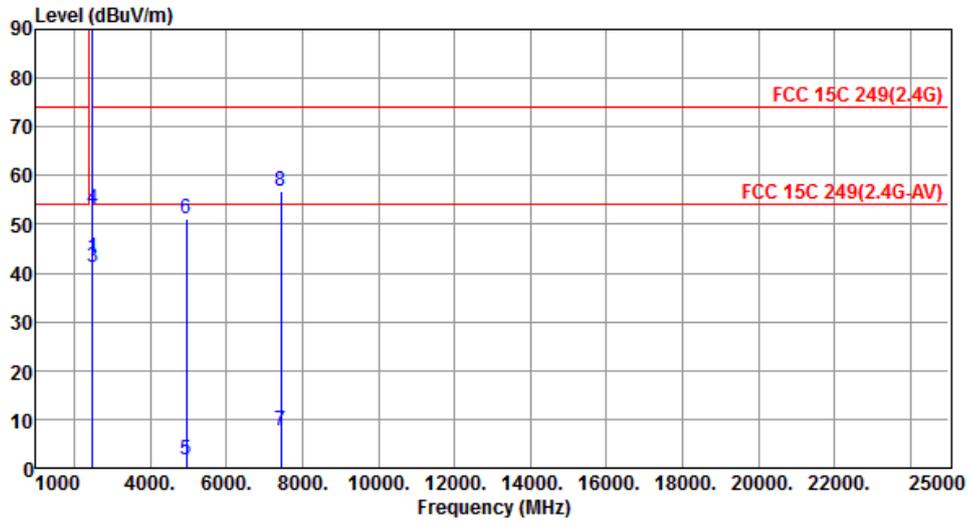


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2479.00	43.06	94.00	-50.94	44.17	-1.11	Average	230	181
2	2479.00	92.38	114.00	-21.62	93.49	-1.11	Peak	230	181
3	2483.50	41.29	54.00	-12.71	42.41	-1.12	Average	230	181
4	2483.50	53.25	74.00	-20.75	54.37	-1.12	Peak	230	181
5	4958.00	1.73	54.00	-52.27	-3.44	5.17	Average	213	131
6	4958.00	51.05	74.00	-22.95	45.88	5.17	Peak	213	131
7	7437.00	7.64	54.00	-46.36	-2.70	10.34	Average	347	19
8	7437.00	56.96	74.00	-17.04	46.62	10.34	Peak	347	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

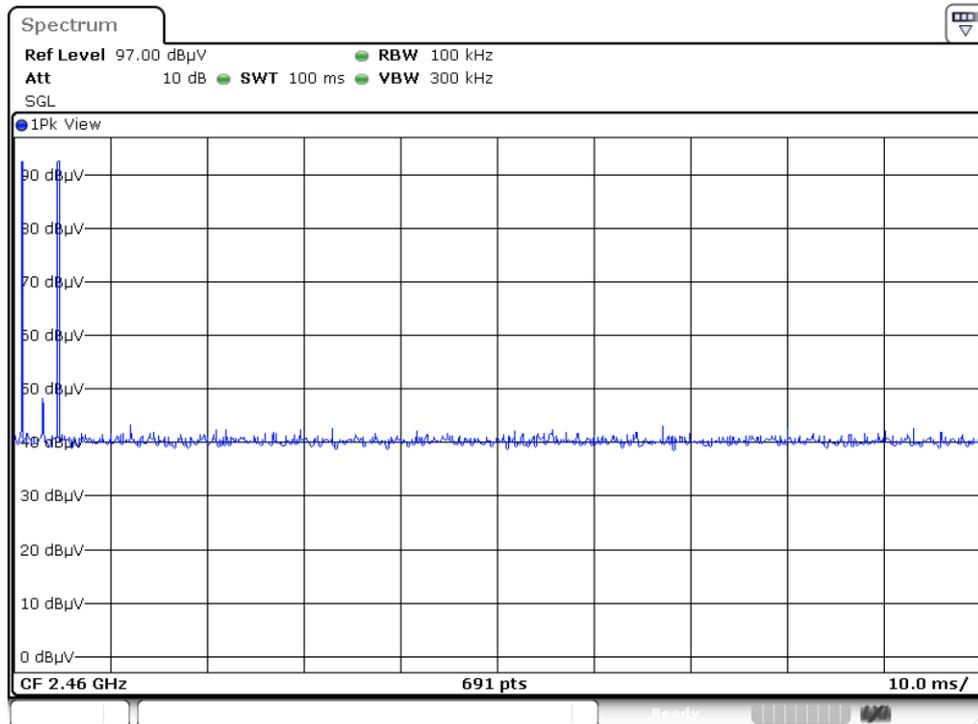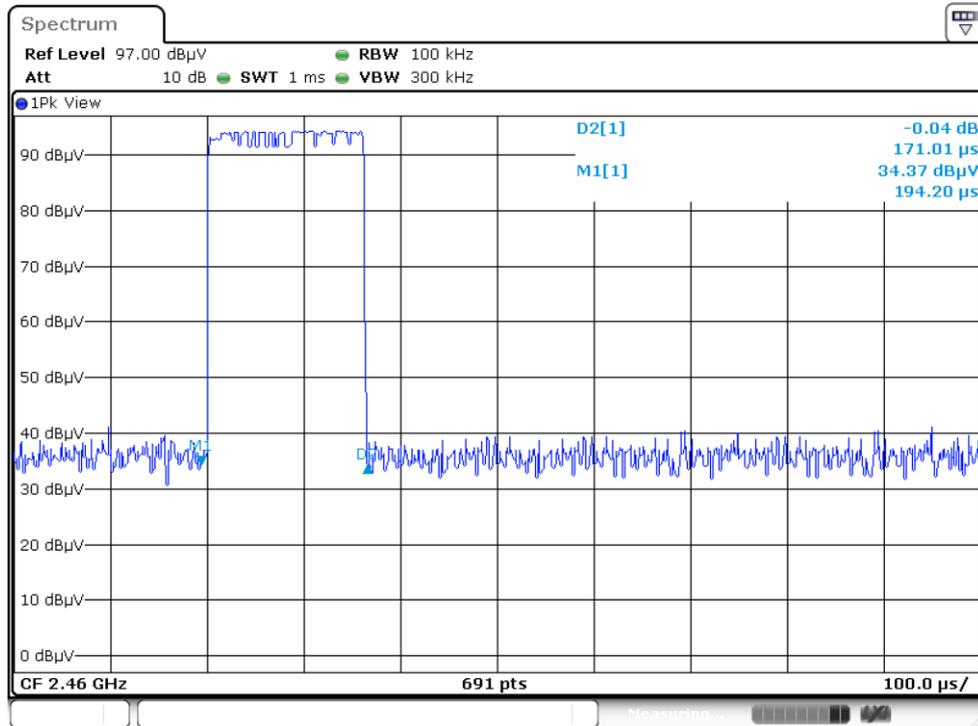


$$20\log(\text{Duty cycle}) = 20\log\left(\frac{0.17101 \times 2 \text{ ms}}{100 \text{ ms}}\right) = -49.32\text{dB}$$

### 3.3 20dB and Occupied Bandwidth

#### 3.3.1 Test Procedures


1. Set resolution bandwidth (RBW) = 20 kHz, Video bandwidth = 100 kHz.
2. Detector = Peak, Trace mode = max hold
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
5. Use the occupied measurement function of spectrum analyzer to measure 99% occupied bandwidth.

#### 3.3.2 Test Setup



#### 3.3.3 20dB and Occupied Bandwidth

Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
2402	0.530	0.886
2441	0.530	0.899
2479	0.530	0.890

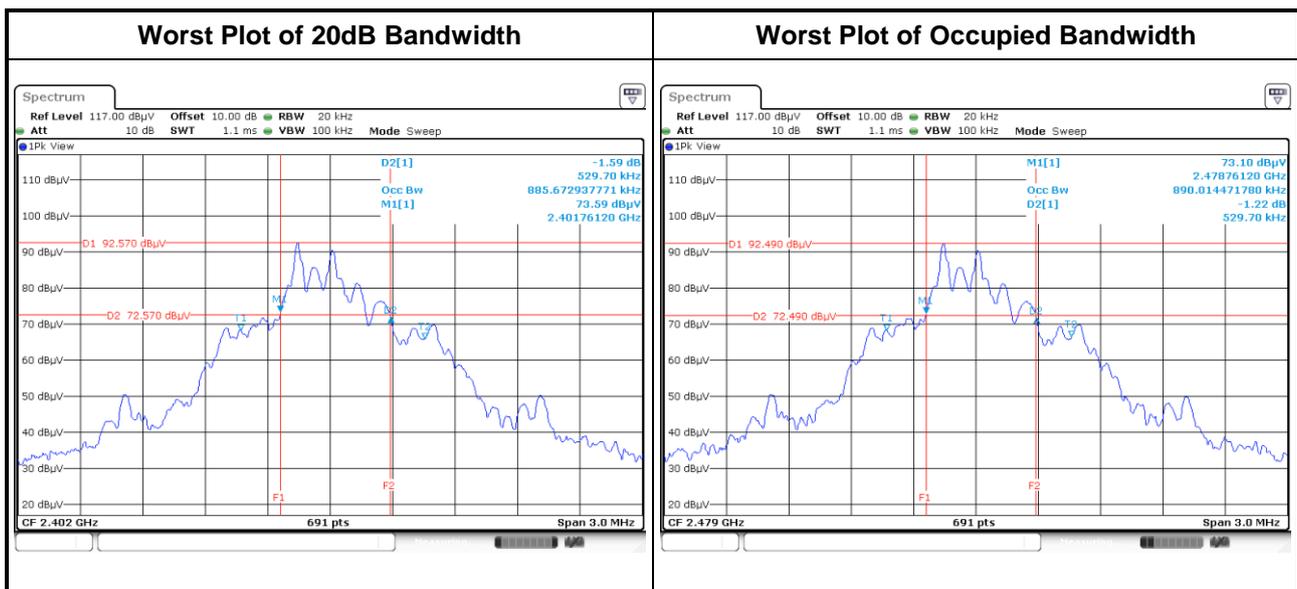

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==