

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

DEI Sales Inc. dba Definitive Technology

JMDD Module

Model Number: JMDD

FCC ID: IPUJMDD

Prepared for:	DEI Sales Inc. dba Definitive Technology
	One Viper Way Vista, California 92081, United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808




Report Number:	ESTE-R1810001
Date of Test:	September 10 ~ November 13, 2018
Date of Report:	November 15, 2018

## TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty.....	8
2.4. Assistant equipment used for test.....	9
2.5. Block Diagram.....	9
2.6. Test mode.....	10
2.7. Channel List.....	10
2.8. Test Equipment.....	11
3. POWER LINE CONDUCTED EMISSION TEST.....	13
3.1. Limit.....	13
3.2. Test Procedure.....	13
3.3. Test Result.....	13
3.4. Test data.....	14
4. RADIATED EMISSION TEST.....	18
4.1. Limit.....	18
4.2. Block Diagram of Test setup.....	19
4.3. Test Procedure.....	20
4.4. Test Result.....	20
4.5. Test Data.....	21
5. BAND EDGE COMPLIANCE TEST.....	37
5.1. Limit.....	37
5.2. Block Diagram of Test setup.....	37
5.3. Test Procedure.....	37
5.4. Test Result.....	37
5.5. Test Data.....	38
6. 6dB Bandwidth Test.....	46
6.1. Limit.....	46
6.2. Test Procedure.....	46
6.3. Test Result.....	46
6.4. Test Data.....	47
7. OUTPUT POWER TEST.....	50
7.1. Limit.....	50
7.2. Test Procedure.....	50
7.3. Test Result.....	51
7.4. Test Data.....	52
8. POWER SPECTRAL DENSITY TEST.....	55
8.1. Limit.....	55
8.2. Test Procedure.....	55
8.3. Test Result.....	55

8.4	Test Data .....	56
9	ANTENNA REQUIREMENTS .....	59
9.1	Limit .....	59
9.2	Result .....	59
10	TEST SETUP PHOTO .....	60
11	PHOTO EUT .....	62

## EST Technology Co., Ltd.
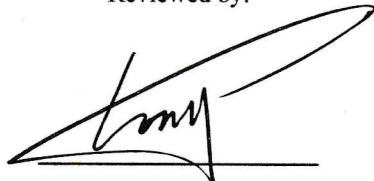
<b>Applicant:</b>	DEI Sales Inc. dba Definitive Technology		
<b>Address:</b>	One Viper Way Vista, California 92081, United States		
<b>Manufacturer:</b>	DEI Sales Inc. dba Definitive Technology		
<b>Address:</b>	One Viper Way Vista, California 92081, United States		
<b>E.U.T:</b>	JMDD Module		
<b>Model Number:</b>	JMDD		
<b>Power Supply:</b>	DC 4.0V From base board; base board use DC 12V From adapter input AC 100-240V ~ 50/60Hz.		
<b>Test Voltage:</b>	AC 120V/60Hz AC 240V/60Hz		
<b>Trade Name:</b>	POLK	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	September 07, 2018	<b>Date of Test:</b>	September 10 ~ November 13, 2018
<b>Test Specification:</b>	FCC Rules and Regulations Part 15 Subpart C:2018 ANSI C63.10:2013		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		<b>Date:</b>	November 15, 2018
<b>Prepared by:</b>	<b>Reviewed by:</b>	<b>Approved by:</b>	
 <hr/> Ring / Assistant	 <hr/> Tony / Engineer	 <hr/> Iceman Hu / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Product Name	:	JMDD Module																										
FCC ID	:	IPUJMDD																										
Model Number	:	JMDD																										
Operation frequency	:	2402MHz~2480MHz																										
Number of channel	:	79	40																									
Antenna	:	<p style="text-align: center;">PIFA Antenna</p> <table border="1"> <thead> <tr> <th>Frequency Range</th> <th>Antenna 0</th> <th>Antenna 1</th> <th>Antenna 2</th> </tr> </thead> <tbody> <tr> <td>2400~2483.5 MHz</td> <td>4.03 dBi</td> <td>4.10 dBi</td> <td>3.17 dBi</td> </tr> <tr> <td>5150~5250 MHz</td> <td>/</td> <td>2.39 dBi</td> <td>2.91 dBi</td> </tr> <tr> <td>5250~5350 MHz</td> <td>/</td> <td>1.65 dBi</td> <td>3.12 dBi</td> </tr> <tr> <td>5470~5725 MHz</td> <td>/</td> <td>2.97 dBi</td> <td>4.50 dBi</td> </tr> <tr> <td>5725~5850 MHz</td> <td>/</td> <td>3.90 dBi</td> <td>3.56 dBi</td> </tr> </tbody> </table> <p>2.4G Directional gain: 6.66dBi            5G(Band I) Directional gain: 5.64dBi            5G(Band II) Directional gain: 5.43dBi            5G(Band III) Directional gain: 6.78dBi            5G(Band IV) Directional gain: 6.74dBi            Directional gain = <math>10\log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]</math> dBi            Note: KDB 662911 D01 Multiple Transmitter Output v02r01            Note: Bluetooth uses Antenna 0            11a,b,g,n,ac uses Antenna 1 / Antenna 2            11n,ac uses MIMO</p>			Frequency Range	Antenna 0	Antenna 1	Antenna 2	2400~2483.5 MHz	4.03 dBi	4.10 dBi	3.17 dBi	5150~5250 MHz	/	2.39 dBi	2.91 dBi	5250~5350 MHz	/	1.65 dBi	3.12 dBi	5470~5725 MHz	/	2.97 dBi	4.50 dBi	5725~5850 MHz	/	3.90 dBi	3.56 dBi
Frequency Range	Antenna 0	Antenna 1	Antenna 2																									
2400~2483.5 MHz	4.03 dBi	4.10 dBi	3.17 dBi																									
5150~5250 MHz	/	2.39 dBi	2.91 dBi																									
5250~5350 MHz	/	1.65 dBi	3.12 dBi																									
5470~5725 MHz	/	2.97 dBi	4.50 dBi																									
5725~5850 MHz	/	3.90 dBi	3.56 dBi																									
Modulation	:	Dual-mode Bluetooth 5.0 BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK BT EDR: 8-DPSK	Dual-mode Bluetooth 5.0 BLE: GFSK (1M) BLE: GFSK (2M)																									
Hardware Version	:	40-JMDDAC-RFF4G																										
Software Version	:	OIM6																										
Sample Type	:	Prototype production																										

## 2. SUMMARY OF TEST

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: KDB 558074 D01 15.247 Meas Guidance v05		

## 2.2. Test Facilities

EMC Lab	:	<p>Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2017</p> <p>Certificated by FCC, USA Designation Number: CN1215 Test Firm Registration Number: 722932 Date of registration: November 21, 2017</p> <p>Certificated by A2LA, USA Registration No.: 4366.01 Date of registration: November 07, 2017</p> <p>Certificated by Industry Canada CAB identifier No.: CN0035 Date of registration: January 04, 2019</p> <p>Certificated by VCCI, Japan Registration No.: R-13663; C-14103 Date of registration: July 25, 2017 This Certificate is valid until: July 24, 2020</p> <p>Certificated by TUV Rheinland, Germany Registration No.: UA 50413872 0001 Date of registration: July 31, 2018</p> <p>Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011</p> <p>Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L2-64 Date of registration: April 28, 2011</p> <p>Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011</p>
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

### 2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (9Khz-30MHz)	3.11
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	$7 \times 10^{-8}$
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4.0\%$
Volatage DC	$\pm 1.0\%$
Volatage (AC, <10KHz)	$\pm 1.5\%$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 2.4. Assistant equipment used for test

### 2.4.1. Notebook


Manufacturer : Lenovo  
M/N : Thinkpad X250  
S/N : 2014AP6082

### 2.4.2. Adapter

M/N : S018BAC1200150  
Input : AC 100-240V ~ 50/60Hz  
Output : DC 12V

## 2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: JMDD Module)

## 2.6. Test mode

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Mode	Data Rate	Channel	Frequency
BT 5.0-BLE GFSK	1Mbps	Low	2402MHz
		Middle	2440MHz
		High	2480MHz
BT 5.0-BLE GFSK	2Mbps	Low	2402MHz
		Middle	2440MHz
		High	2480MHz

## 2.7. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2404
3	2406	4	2408
5	2410	6	2412
7	2414	8	2416
9	2418	10	2420
11	2422	12	2424
13	2426	14	2428
15	2430	16	2432
17	2434	18	2436
19	2438	20	2440
21	2442	22	2444
23	2446	24	2448
25	2450	26	2452
27	2454	28	2456
29	2458	30	2460
31	2462	32	2464
33	2466	34	2468
35	2470	36	2472
37	2474	38	2476
39	2478	40	2480

## 2.8. Test Equipment

### 2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	CEPREI	June 15,18	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	CEPREI	June 15,18	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

### 2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB1519	1519-038	CEPREI	October 08,17	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

### 2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

### 2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA912 0D1002	CEPREI	June 18,18	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	BBHA917 0242	CEPREI	June 18,18	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
PSA Series Spertrum Analyzer	Agilent	E4447A	MY50180 031	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

## 2.8.5. For connect EUT antenna terminal test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211 139	CEPREI	June 15,18	1 Year

### 3 POWER LINE CONDUCTED EMISSION TEST

#### 3.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 3.2 Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.


#### 3.3. Test Result

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

### 3.4. Test data

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

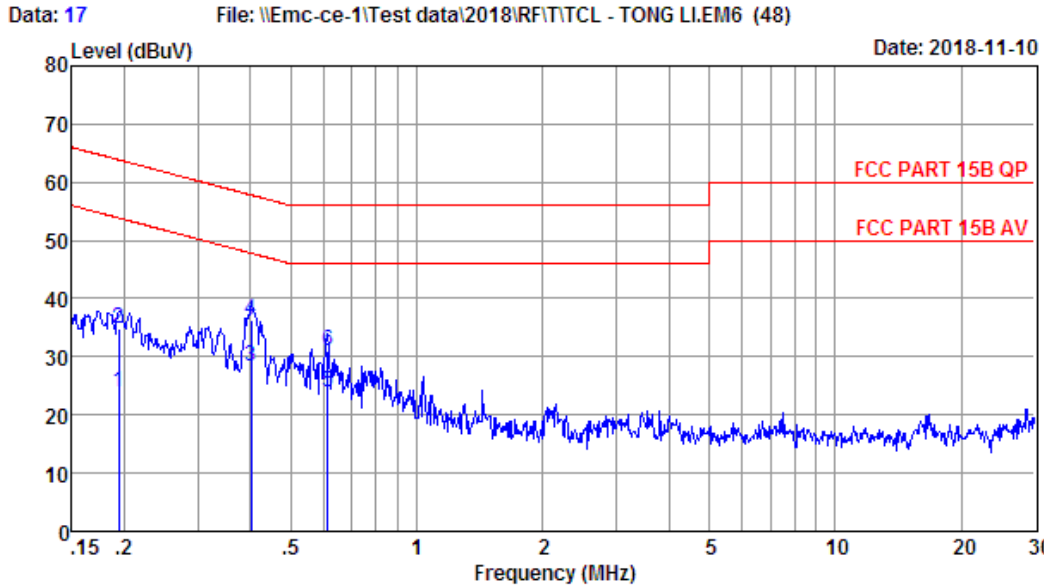

Site no : 844 Shield Room Data no. : 17  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Herman  
 EUT : JMDD Module  
 Power : AC 240V/60Hz  
 M/N : JMDD  
 Test Mode : TX Mode


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.19	9.62	9.77	4.38	23.77	53.84	30.07	Average
2	0.19	9.62	9.77	15.38	34.77	63.84	29.07	QP
3	0.40	9.64	9.92	8.86	28.42	47.81	19.39	Average
4	0.40	9.64	9.92	16.86	36.42	57.81	21.39	QP
5	0.61	9.67	9.92	4.46	24.05	46.00	21.95	Average
6	0.61	9.67	9.92	11.46	31.05	56.00	24.95	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 19 File: \\Emc-ce-1\Test data\2018\RF\TCL - TONG LIEM6 (48) Date: 2018-11-10

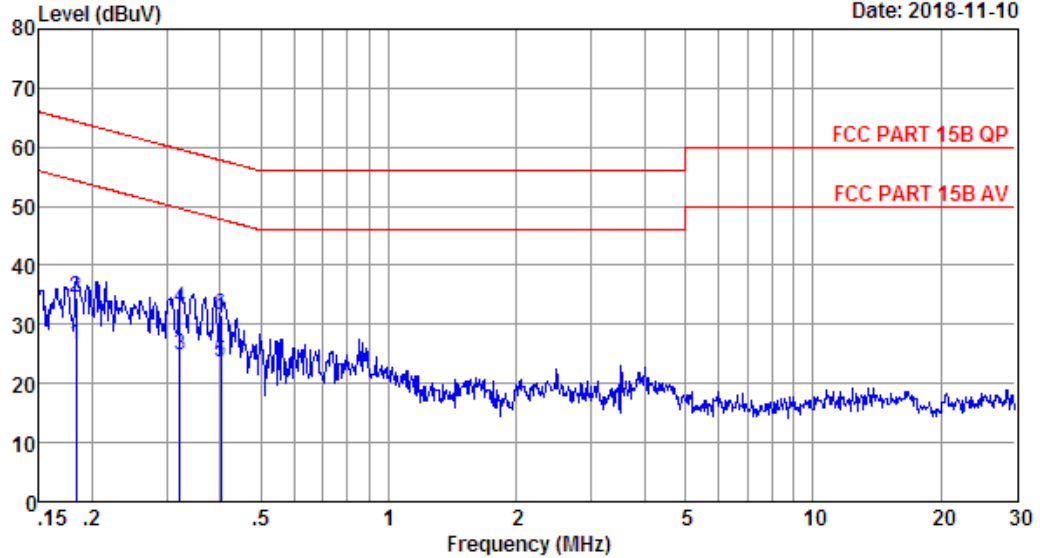

Site no : 844 Shield Room Data no. : 19  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Herman  
 EUT : JMDD Module  
 Power : AC 240V/60Hz  
 M/N : JMDD  
 Test Mode : TX Mode


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.18	9.73	9.77	7.15	26.65	54.33	27.68	Average
2	0.18	9.73	9.77	15.15	34.65	64.33	29.68	QP
3	0.32	9.72	9.92	5.15	24.79	49.66	24.87	Average
4	0.32	9.72	9.92	13.15	32.79	59.66	26.87	QP
5	0.40	9.72	9.92	3.90	23.54	47.81	24.27	Average
6	0.40	9.72	9.92	11.90	31.54	57.81	26.27	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 21 File: \\Emc-ce-1\Test data\2018\RF\TCL - TONG LIEM6 (48) Date: 2018-11-10

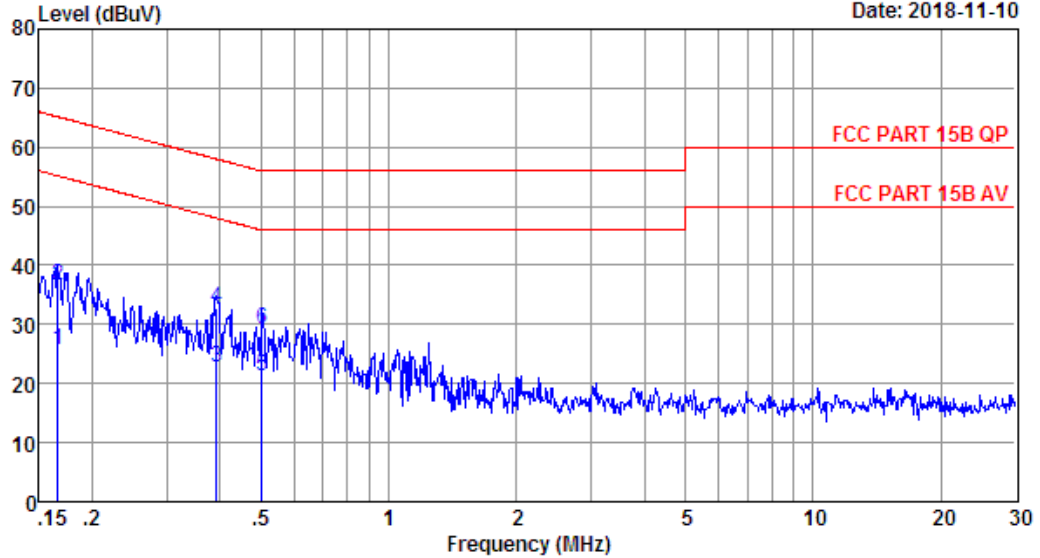

Site no : 844 Shield Room Data no. : 21  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Herman  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.73	9.69	6.29	25.71	55.16	29.45	Average
2	0.17	9.73	9.69	17.29	36.71	65.16	28.45	QP
3	0.39	9.72	9.92	3.12	22.76	47.99	25.23	Average
4	0.39	9.72	9.92	13.12	32.76	57.99	25.23	QP
5	0.50	9.72	9.92	1.71	21.35	46.00	24.65	Average
6	0.50	9.72	9.92	9.71	29.35	56.00	26.65	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.



EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 23 File: \\Emc-ce-1\Test data\2018\RF\TCL - TONG LIEM6 (48) Date: 2018-11-10

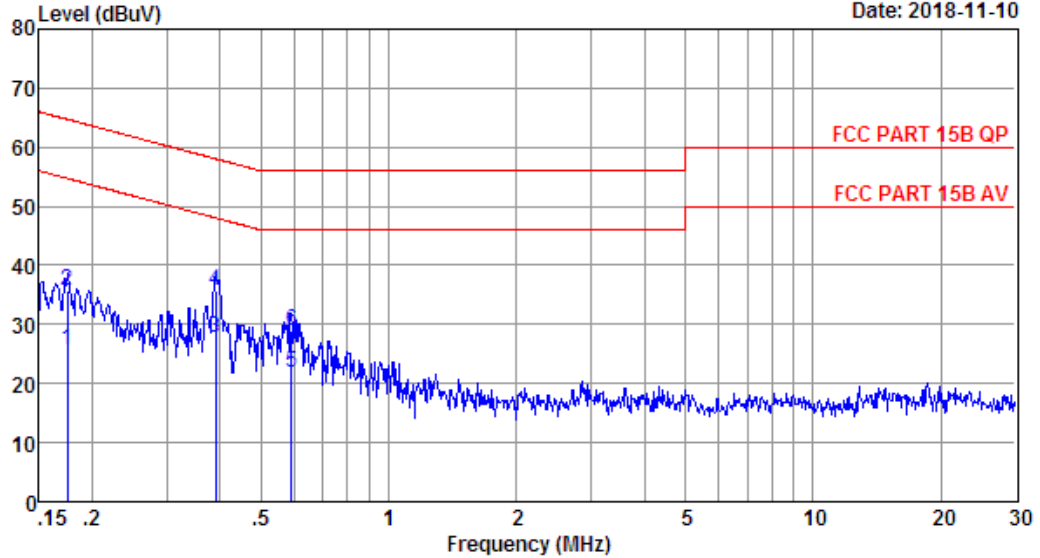

Site no : 844 Shield Room Data no. : 23  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Herman  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.61	9.77	6.35	25.73	54.72	28.99	Average
2	0.17	9.61	9.77	16.35	35.73	64.72	28.99	QP
3	0.39	9.64	9.92	8.26	27.82	48.03	20.21	Average
4	0.39	9.64	9.92	16.26	35.82	58.03	22.21	QP
5	0.59	9.66	9.92	2.27	21.85	46.00	24.15	Average
6	0.59	9.66	9.92	9.27	28.85	56.00	27.15	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

## 4 RADIATED EMISSION TEST

### 4.1 Limit

#### 4.1.1 15.209 limits

Frequency (MHz)	Field Strength( $\mu\text{V}/\text{m}$ )	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remark : (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V}/\text{m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.


#### 4.1.2 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )


All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

## 4.2. Block Diagram of Test setup


9kHz~30MHz

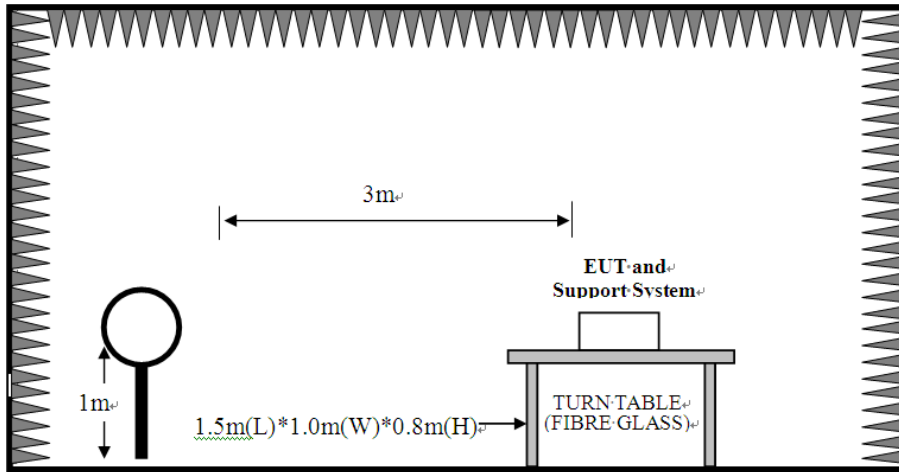

30~1000MHz

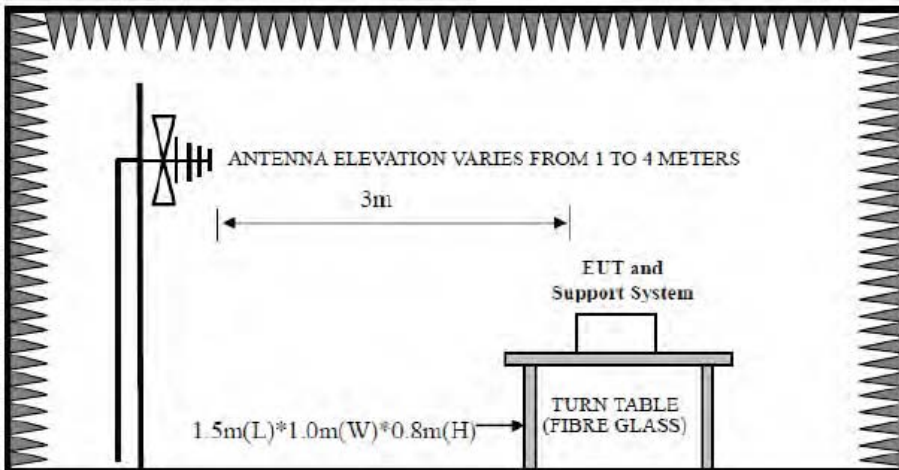

Above 1GHz

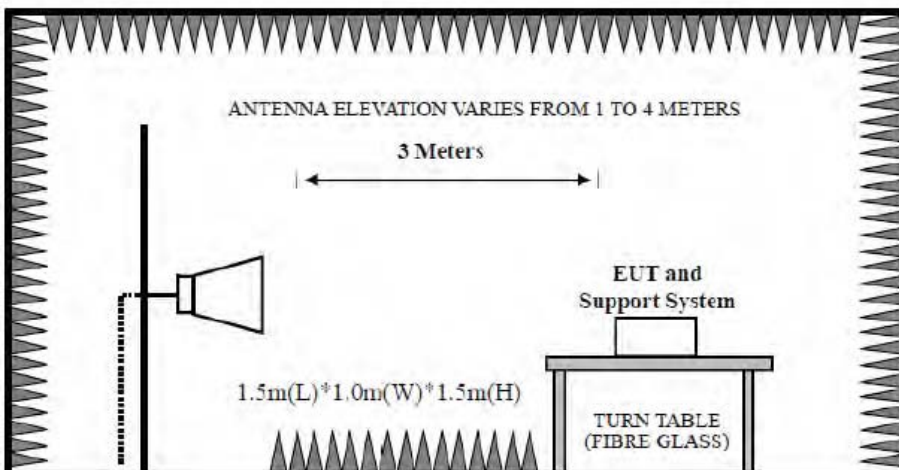

### 4.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

### 4.4. Test Result

#### **PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、 2440MHz and 2480 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

#### 4.5. Test Data

9 kHz – 30 MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30-1000 MHz

# EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 356 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli.EM6 (465) Date: 2018-11-10

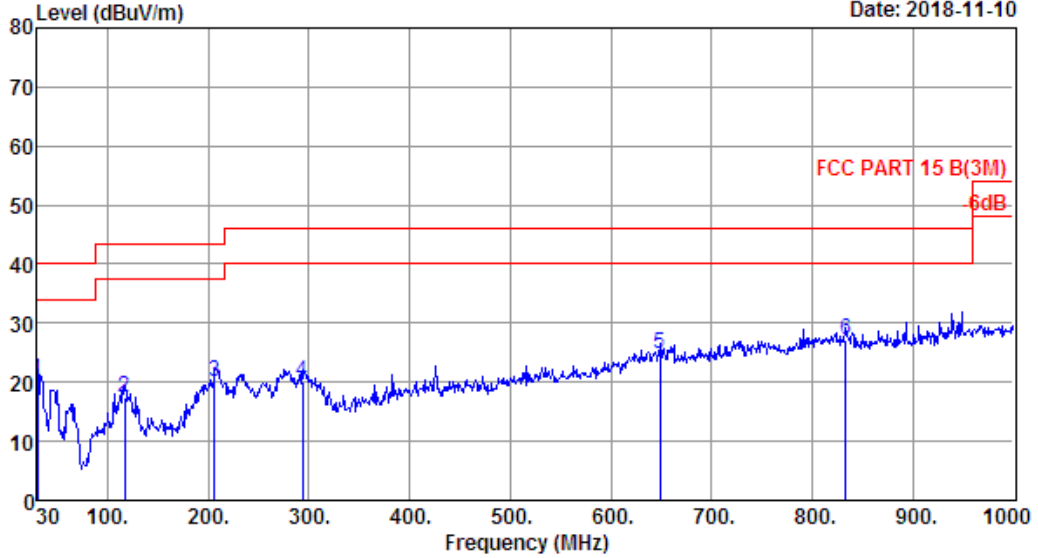

Site no. : site Data no. : 356  
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:26.9';Humi:53.4%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/50Hz  
 M/N : JMDD  
 Test Mode : TX Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.10	0.31	1.85	20.26	40.00	19.74	QP
2	117.30	11.42	1.13	4.84	17.39	43.50	26.11	QP
3	206.54	8.57	1.52	9.98	20.07	43.50	23.43	QP
4	293.84	13.54	2.03	4.48	20.05	46.00	25.95	QP
5	648.86	20.89	3.40	0.36	24.65	46.00	21.35	QP
6	833.16	23.06	3.89	0.14	27.09	46.00	18.91	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 357 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli.EM6 (465) Date: 2018-11-10

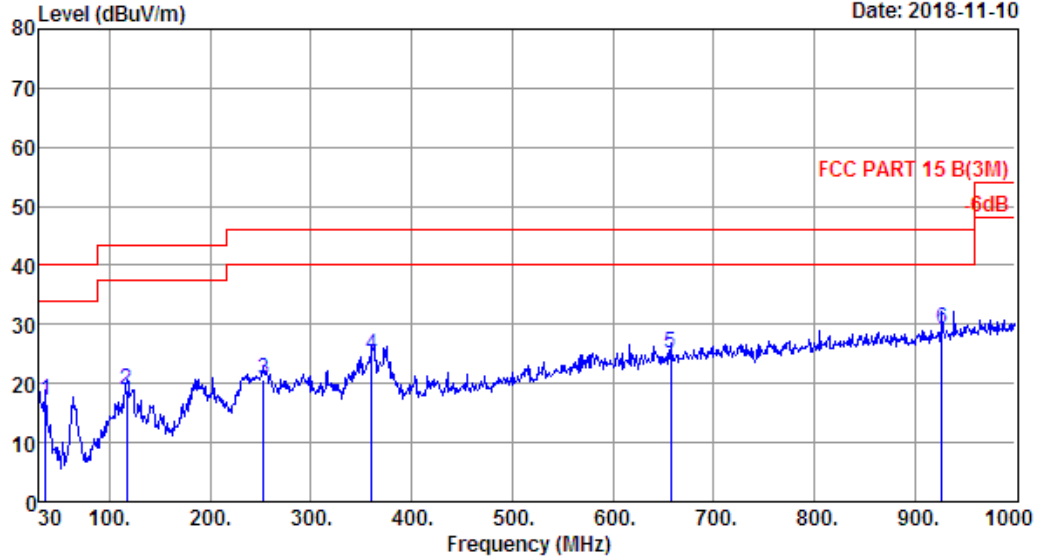

Site no. : 1# 966 Chamber Data no. : 357  
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:26.9';Humi:53.4%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/50Hz  
 M/N : JMDD  
 Test Mode : TX Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	36.79	14.45	0.40	2.13	16.98	40.00	23.02	QP
2	117.30	11.42	1.13	6.21	18.76	43.50	24.74	QP
3	253.10	12.78	1.85	5.98	20.61	46.00	25.39	QP
4	360.77	15.21	2.38	7.07	24.66	46.00	21.34	QP
5	657.59	21.06	3.42	0.52	25.00	46.00	21.00	QP
6	927.25	24.20	4.25	0.78	29.23	46.00	16.77	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

1000-18000MHz

# EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

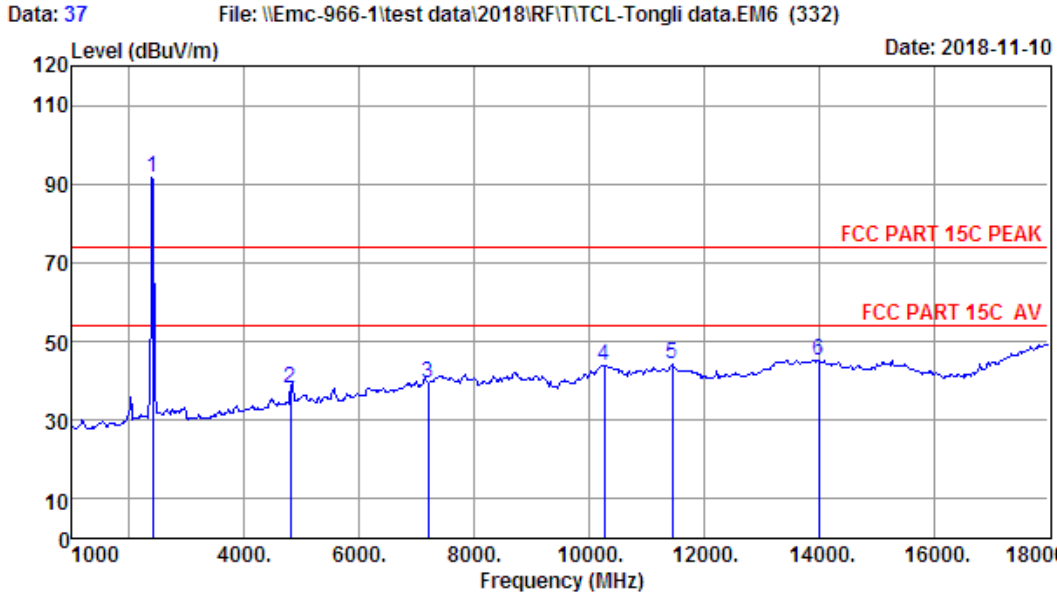

Site no. : 1# 966 Chamber Data no. : 37  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	96.09	91.71	74.00	-17.71	Peak
2	4804.00	32.06	4.67	35.06	36.32	37.99	74.00	36.01	Peak
3	7206.00	36.56	5.99	33.45	30.40	39.50	74.00	34.50	Peak
4	10265.00	39.21	9.98	34.39	29.12	43.92	74.00	30.08	Peak
5	11455.00	40.08	8.28	32.62	28.58	44.32	74.00	29.68	Peak
6	14005.00	41.70	10.13	32.88	26.40	45.35	74.00	28.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.





EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

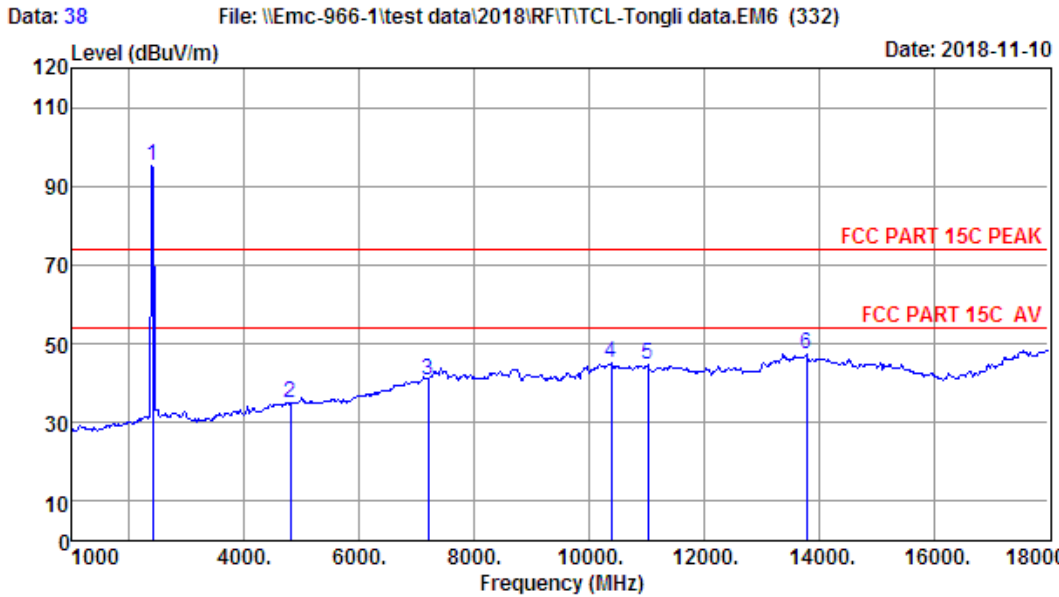

Site no. : 1# 966 Chamber Data no. : 38  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	99.39	95.01	74.00	-21.01	Peak
2	4804.00	32.06	4.67	35.06	33.21	34.88	74.00	39.12	Peak
3	7206.00	36.56	5.99	33.45	31.71	40.81	74.00	33.19	Peak
4	10384.00	39.25	10.00	34.26	30.21	45.20	74.00	28.80	Peak
5	11030.00	39.91	8.55	33.39	29.52	44.59	74.00	29.41	Peak
6	13784.00	41.53	10.05	32.72	28.54	47.40	74.00	26.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 39 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

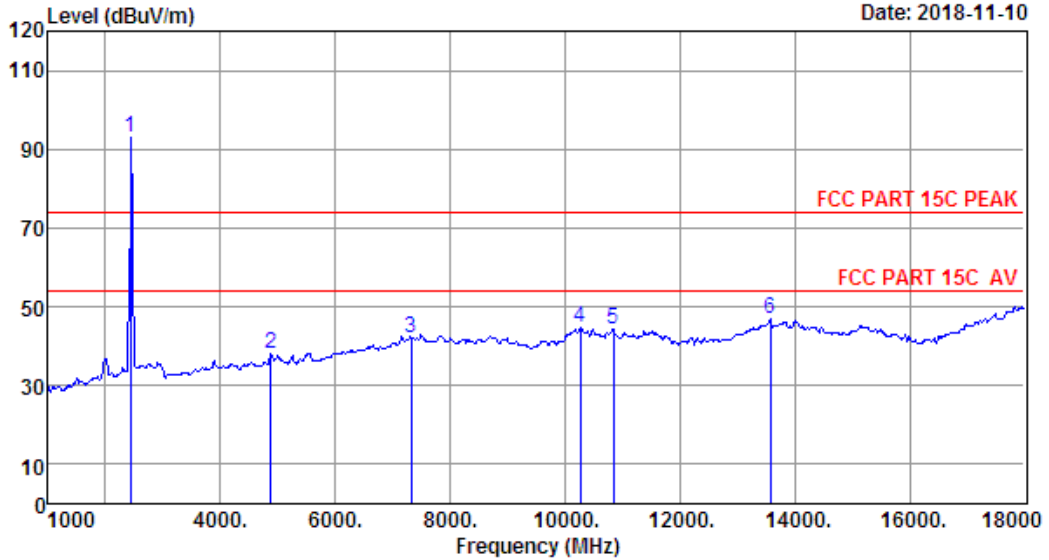


Site no. : 1# 966 Chamber Data no. : 39  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	97.15	92.82	74.00	-18.82	Peak
2	4880.00	32.18	4.73	35.14	36.09	37.86	74.00	36.14	Peak
3	7320.00	36.82	6.10	33.28	32.43	42.07	74.00	31.93	Peak
4	10265.00	39.21	9.98	34.39	29.86	44.66	74.00	29.34	Peak
5	10843.00	39.71	8.69	33.65	29.39	44.14	74.00	29.86	Peak
6	13580.00	41.37	9.78	32.57	28.18	46.76	74.00	27.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

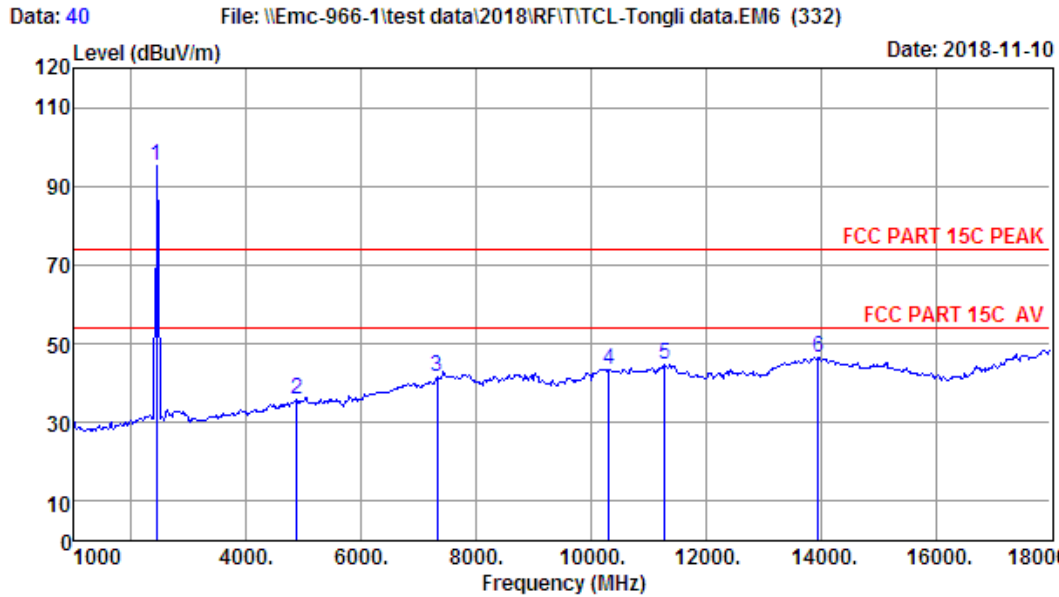


Site no. : 1# 966 Chamber Data no. : 40  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	99.74	95.41	74.00	-21.41	Peak
2	4880.00	32.18	4.73	35.14	33.91	35.68	74.00	38.32	Peak
3	7320.00	36.82	6.10	33.28	31.93	41.57	74.00	32.43	Peak
4	10316.00	39.23	10.20	34.34	28.46	43.55	74.00	30.45	Peak
5	11285.00	40.01	8.36	32.94	29.35	44.78	74.00	29.22	Peak
6	13954.00	41.66	10.12	32.84	27.73	46.67	74.00	27.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

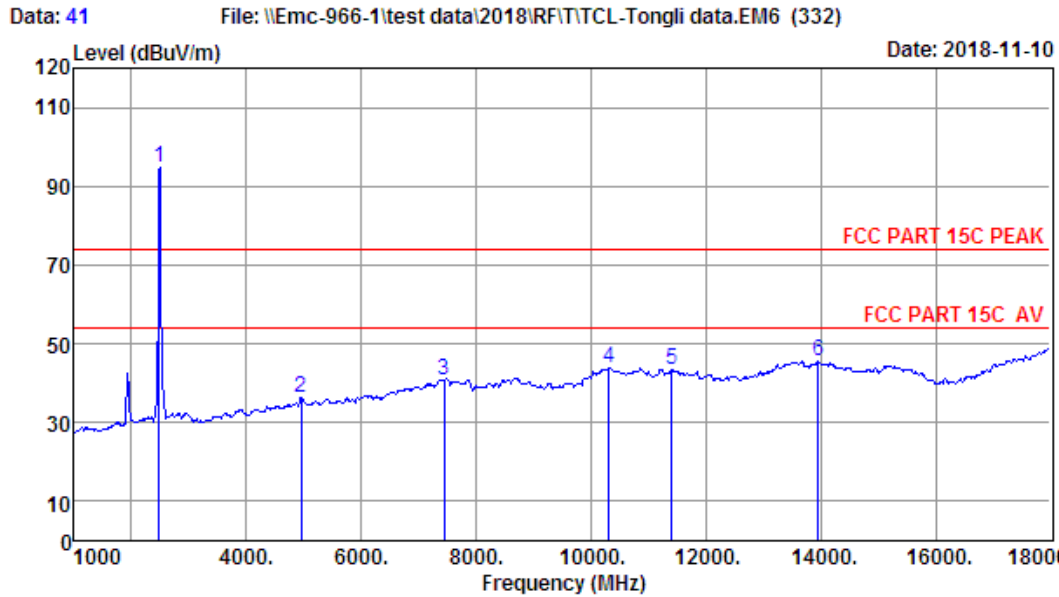


Site no. : 1# 966 Chamber Data no. : 41  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	99.15	94.79	74.00	-20.79	Peak
2	4960.00	32.34	4.80	35.24	34.19	36.09	74.00	37.91	Peak
3	7440.00	37.09	6.13	33.08	30.58	40.72	74.00	33.28	Peak
4	10316.00	39.23	10.20	34.34	28.71	43.80	74.00	30.20	Peak
5	11404.00	40.06	8.29	32.71	27.79	43.43	74.00	30.57	Peak
6	13954.00	41.66	10.12	32.84	26.64	45.58	74.00	28.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

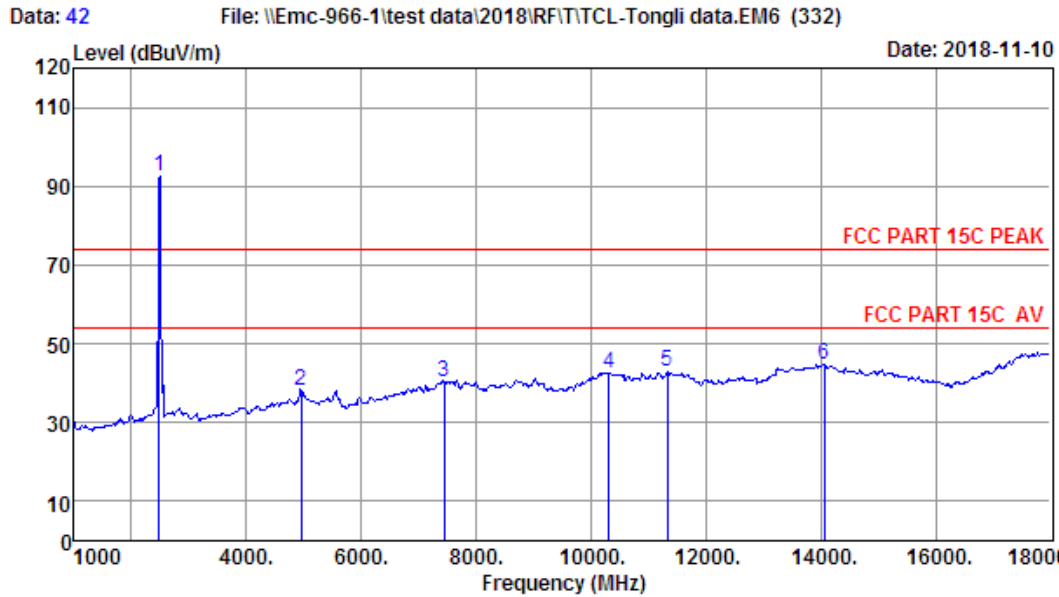

Site no. : 1# 966 Chamber Data no. : 42  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	96.88	92.52	74.00	-18.52	Peak
2	4960.00	32.34	4.80	35.24	36.19	38.09	74.00	35.91	Peak
3	7440.00	37.09	6.13	33.08	30.13	40.27	74.00	33.73	Peak
4	10316.00	39.23	10.20	34.34	27.64	42.73	74.00	31.27	Peak
5	11336.00	40.03	8.32	32.84	27.43	42.94	74.00	31.06	Peak
6	14056.00	41.65	10.13	32.95	25.89	44.72	74.00	29.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 43 File: \\Emc-966-1\test data\2018\RF\T\TCL-Tongli data.EM6 (332) Date: 2018-11-10

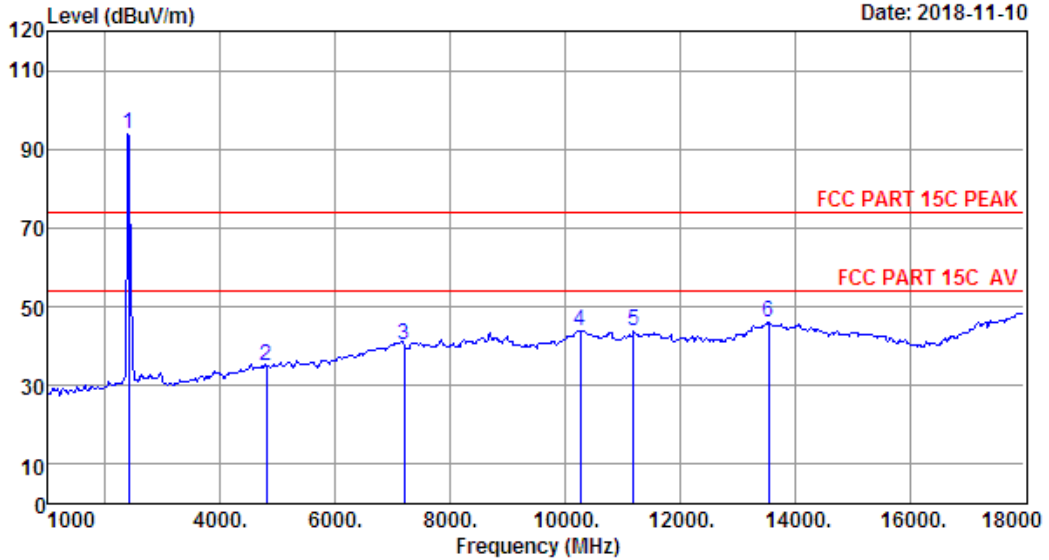

Site no. : 1# 966 Chamber Data no. : 43  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	98.46	94.08	74.00	-20.08	Peak
2	4804.00	32.06	4.67	35.06	33.48	35.15	74.00	38.85	Peak
3	7206.00	36.56	5.99	33.45	31.38	40.48	74.00	33.52	Peak
4	10265.00	39.21	9.98	34.39	29.21	44.01	74.00	29.99	Peak
5	11200.00	39.98	8.43	33.10	28.47	43.78	74.00	30.22	Peak
6	13546.00	41.34	9.73	32.54	27.61	46.14	74.00	27.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 44 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

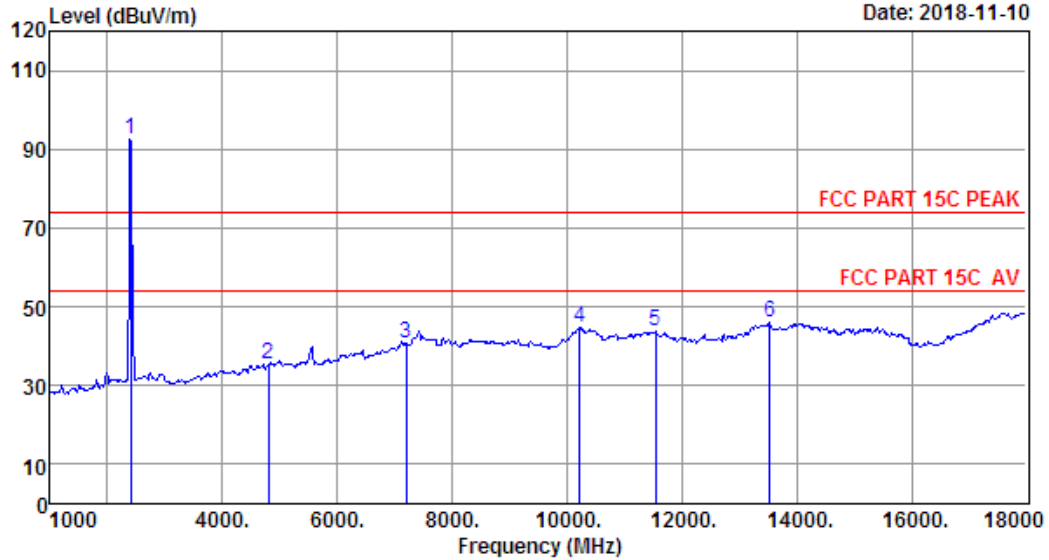


Site no. : 1# 966 Chamber Data no. : 44  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	96.83	92.45	74.00	-18.45	Peak
2	4804.00	32.06	4.67	35.06	33.73	35.40	74.00	38.60	Peak
3	7206.00	36.56	5.99	33.45	31.66	40.76	74.00	33.24	Peak
4	10214.00	39.19	9.77	34.43	30.28	44.81	74.00	29.19	Peak
5	11540.00	40.05	8.27	32.49	27.79	43.62	74.00	30.38	Peak
6	13529.00	41.33	9.71	32.55	27.34	45.83	74.00	28.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

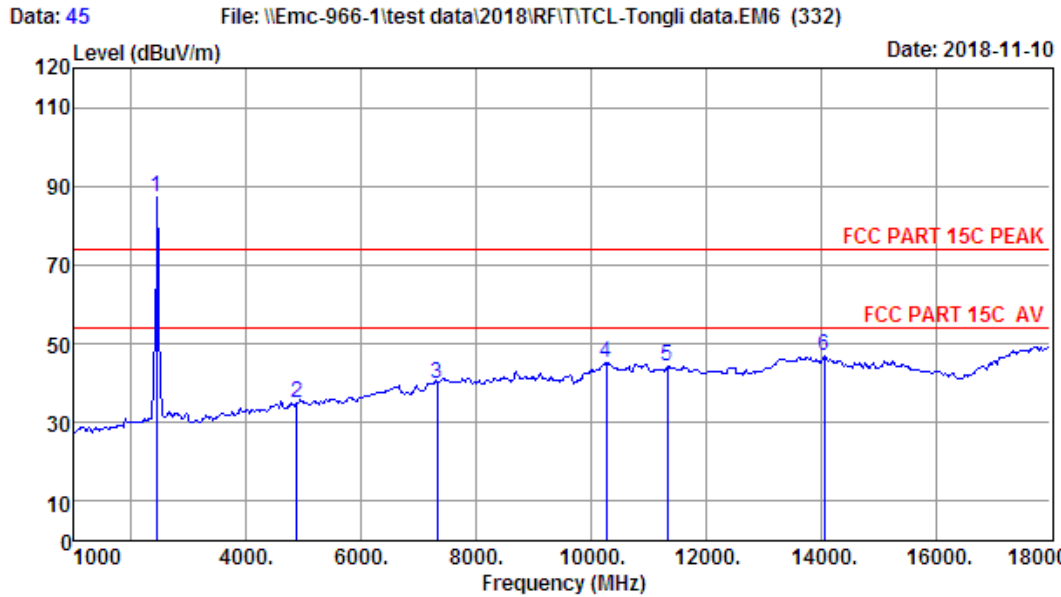

Site no. : 1# 966 Chamber Data no. : 45  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	91.60	87.27	74.00	-13.27	Peak
2	4880.00	32.18	4.73	35.14	33.15	34.92	74.00	39.08	Peak
3	7320.00	36.82	6.10	33.28	30.35	39.99	74.00	34.01	Peak
4	10265.00	39.21	9.98	34.39	30.34	45.14	74.00	28.86	Peak
5	11336.00	40.03	8.32	32.84	28.76	44.27	74.00	29.73	Peak
6	14056.00	41.65	10.13	32.95	27.94	46.77	74.00	27.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.




# EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 46

File: \\Emc-966-1\test data\2018\RF\T\TCL-Tongli data.EM6 (332)

Date: 2018-11-10

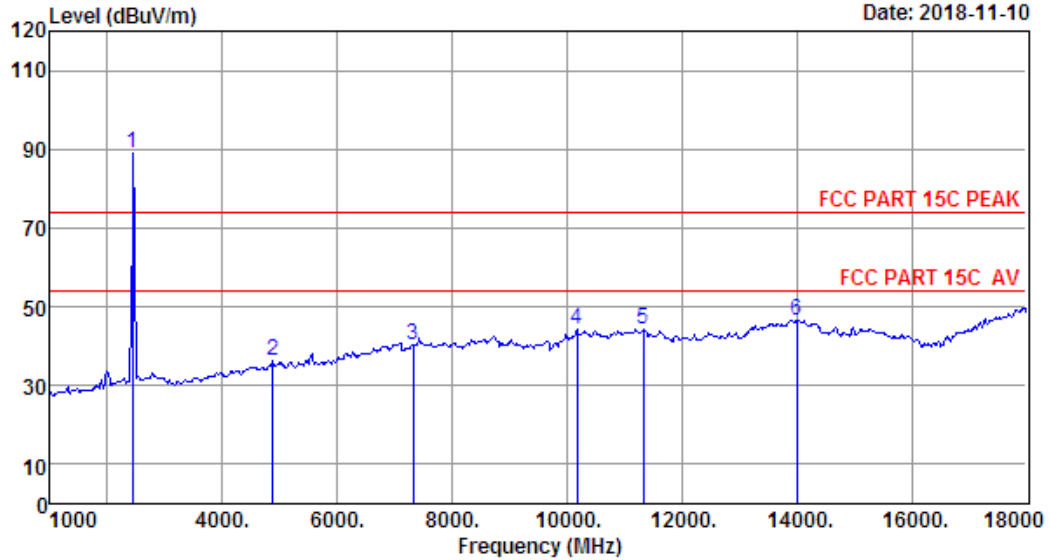

Site no. : 1# 966 Chamber                      Data no. : 46  
 Dis. / Ant. : 3m ANT9120D 1-18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2440MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	93.55	89.22	74.00	-15.22	Peak
2	4880.00	32.18	4.73	35.14	34.46	36.23	74.00	37.77	Peak
3	7320.00	36.82	6.10	33.28	30.66	40.30	74.00	33.70	Peak
4	10180.00	39.17	9.62	34.47	29.83	44.15	74.00	29.85	Peak
5	11336.00	40.03	8.32	32.84	28.80	44.31	74.00	29.69	Peak
6	14005.00	41.70	10.13	32.88	27.55	46.50	74.00	27.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 47 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

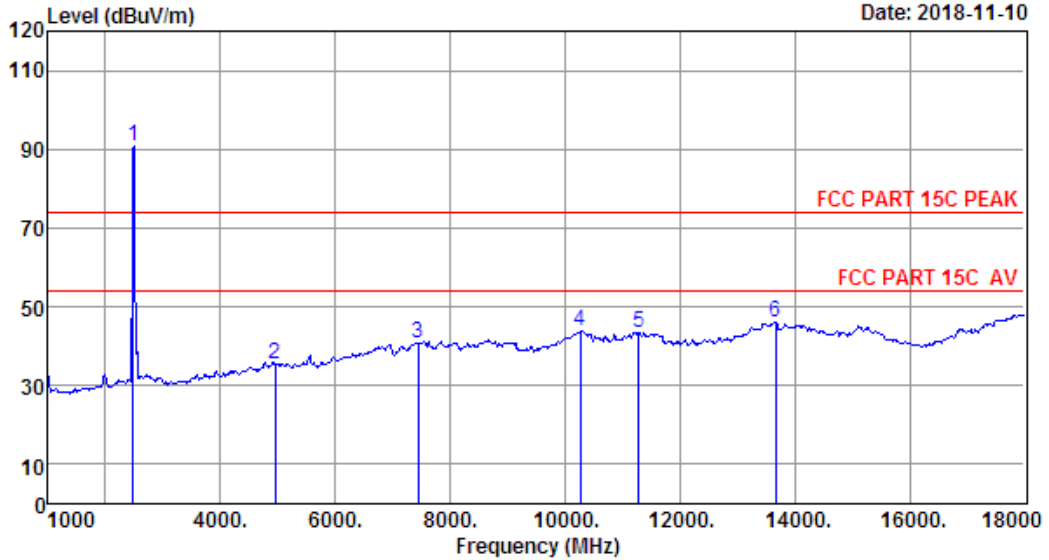


Site no. : 1# 966 Chamber Data no. : 47  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	95.32	90.96	74.00	-16.96	Peak
2	4960.00	32.34	4.80	35.24	33.69	35.59	74.00	38.41	Peak
3	7440.00	37.09	6.13	33.08	30.59	40.73	74.00	33.27	Peak
4	10265.00	39.21	9.98	34.39	28.89	43.69	74.00	30.31	Peak
5	11285.00	40.01	8.36	32.94	28.14	43.57	74.00	30.43	Peak
6	13665.00	41.43	9.89	32.62	27.20	45.90	74.00	28.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

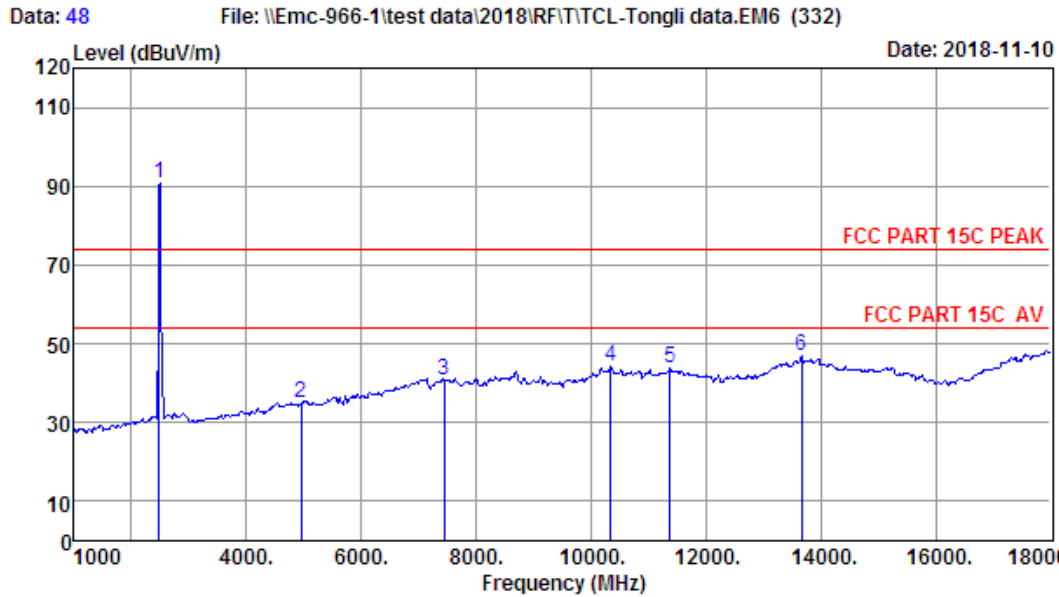

Site no. : 1# 966 Chamber Data no. : 48  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	95.01	90.65	74.00	-16.65	Peak
2	4960.00	32.34	4.80	35.24	32.97	34.87	74.00	39.13	Peak
3	7440.00	37.09	6.13	33.08	30.64	40.78	74.00	33.22	Peak
4	10350.00	39.24	10.10	34.30	29.35	44.39	74.00	29.61	Peak
5	11370.00	40.05	8.30	32.78	28.08	43.65	74.00	30.35	Peak
6	13665.00	41.43	9.89	32.62	28.11	46.81	74.00	27.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

**18000MHz – 25000MHz**

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

## 5 BAND EDGE COMPLIANCE TEST

### 5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

### 5.2 Block Diagram of Test setup

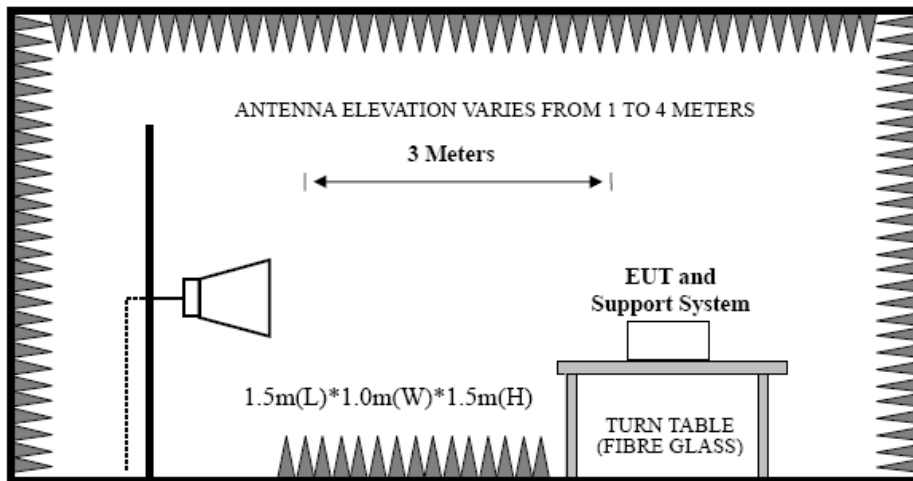

### 5.3 Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.

### 5.4 Test Result

Pass (The testing data was attached in the next pages.)

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


- 2、 The frequency 2402MHz and 2480 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

### 5.5 Test Data

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 265 File: \\Emc-966-1\test data\2018\RFIT\TCL-Tongli data.EM6 (332)

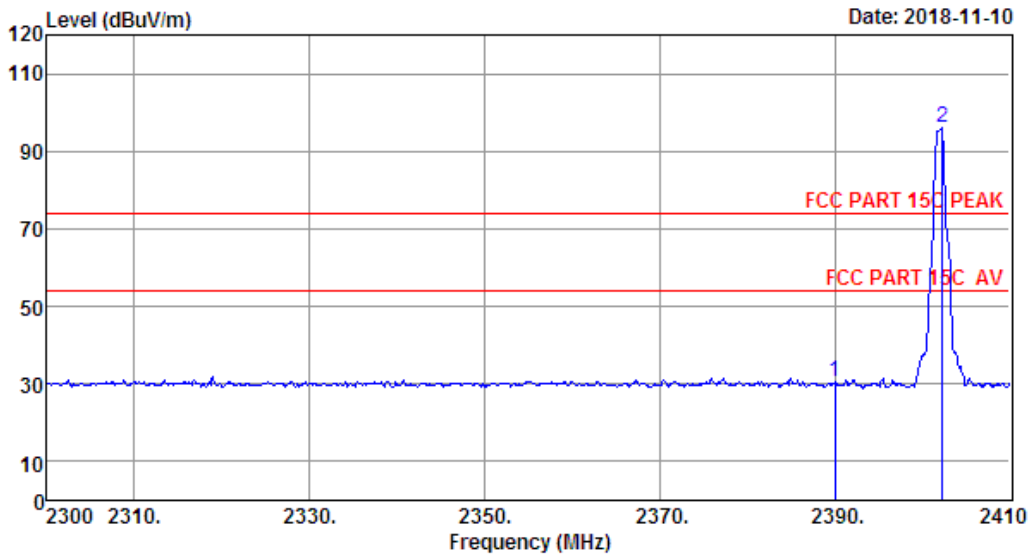

Site no. : 1# 966 Chamber Data no. : 265  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.35	3.21	34.87	34.68	30.37	74.00	43.63	Peak
2	2402.30	27.35	3.21	34.94	100.26	95.88	74.00	-21.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 266 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

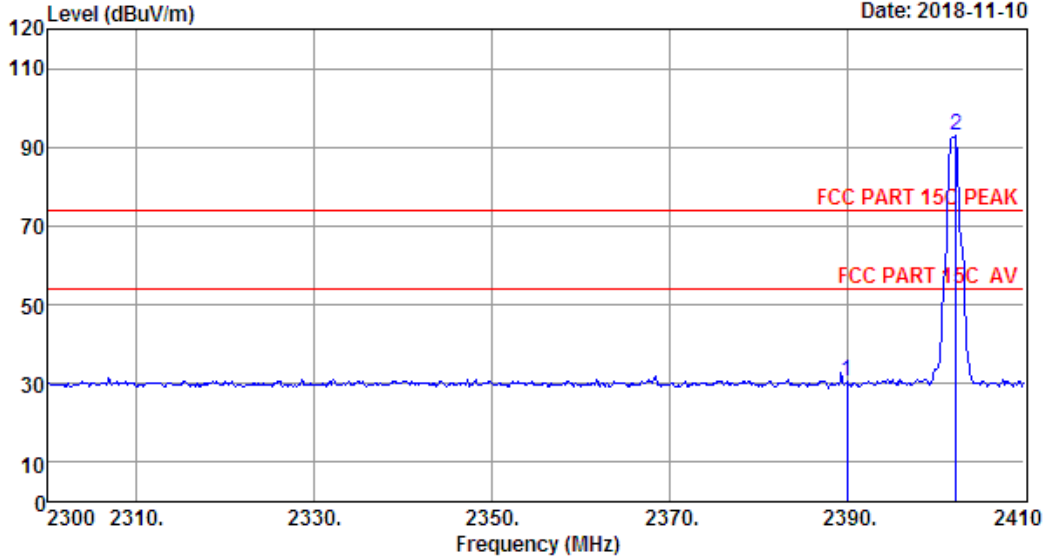

Site no. : 1# 966 Chamber Data no. : 266  
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.35	3.21	34.87	34.72	30.41	74.00	43.59	Peak
2	2402.30	27.35	3.21	34.94	97.34	92.96	74.00	-18.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 267 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

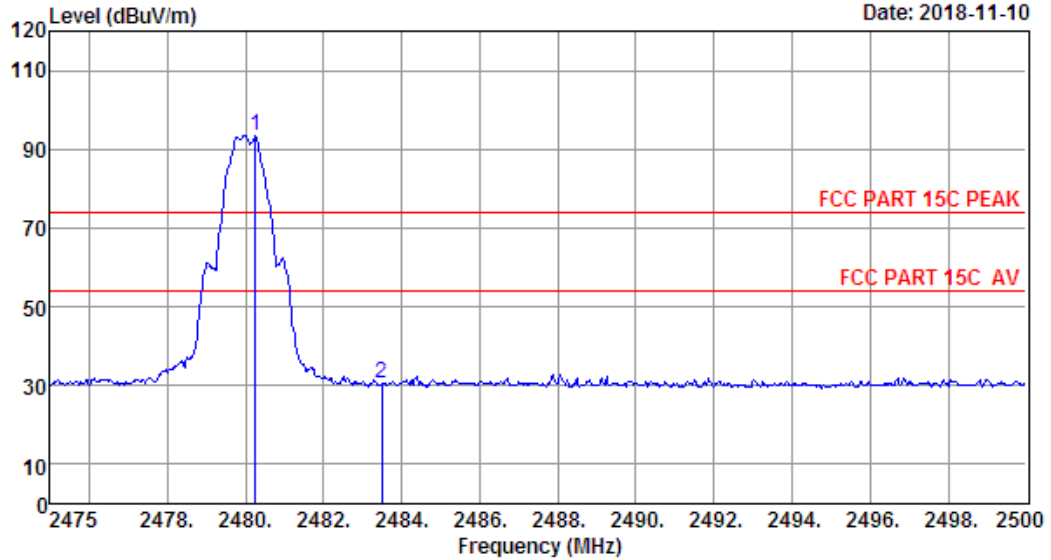

Site no. : 1# 966 Chamber Data no. : 267  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.25	27.56	3.29	35.21	97.98	93.62	74.00	-19.62	Peak
2	2483.50	27.56	3.29	35.21	34.79	30.43	74.00	43.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 268 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

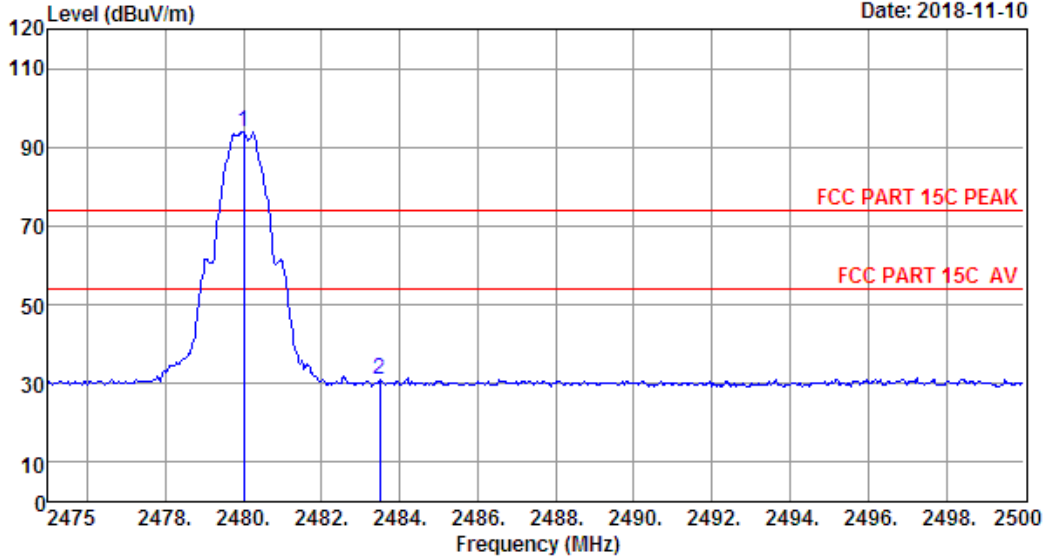


Site no. : 1# 966 Chamber Data no. : 268  
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 1M TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	98.34	93.98	74.00	-19.98	Peak
2	2483.50	27.56	3.29	35.21	35.19	30.83	74.00	43.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

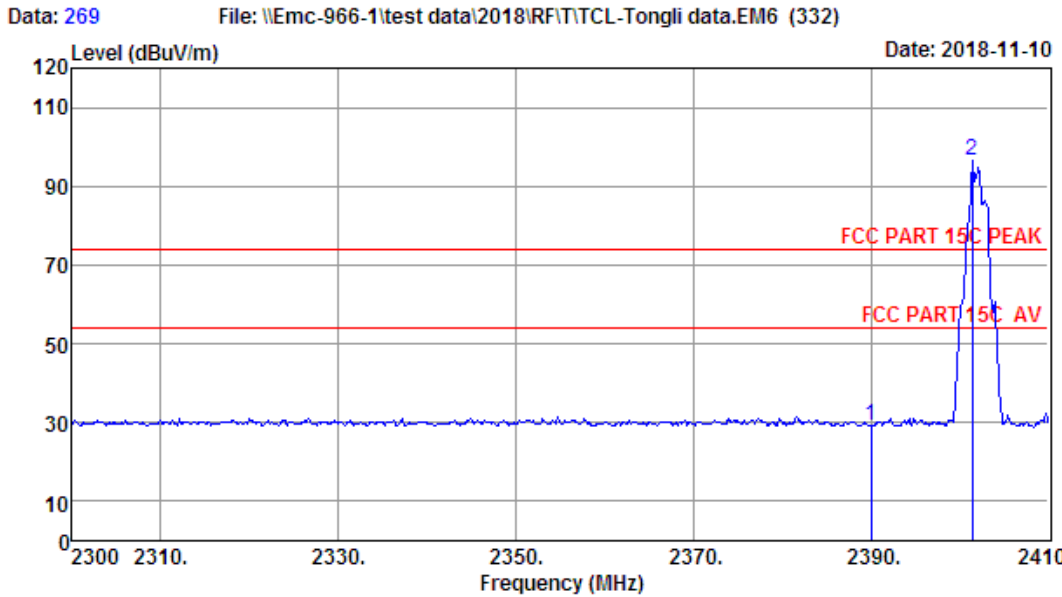


Site no. : 1# 966 Chamber Data no. : 269  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.35	3.21	34.87	33.72	29.41	74.00	44.59	Peak
2	2401.42	27.35	3.21	34.94	100.89	96.51	74.00	-22.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

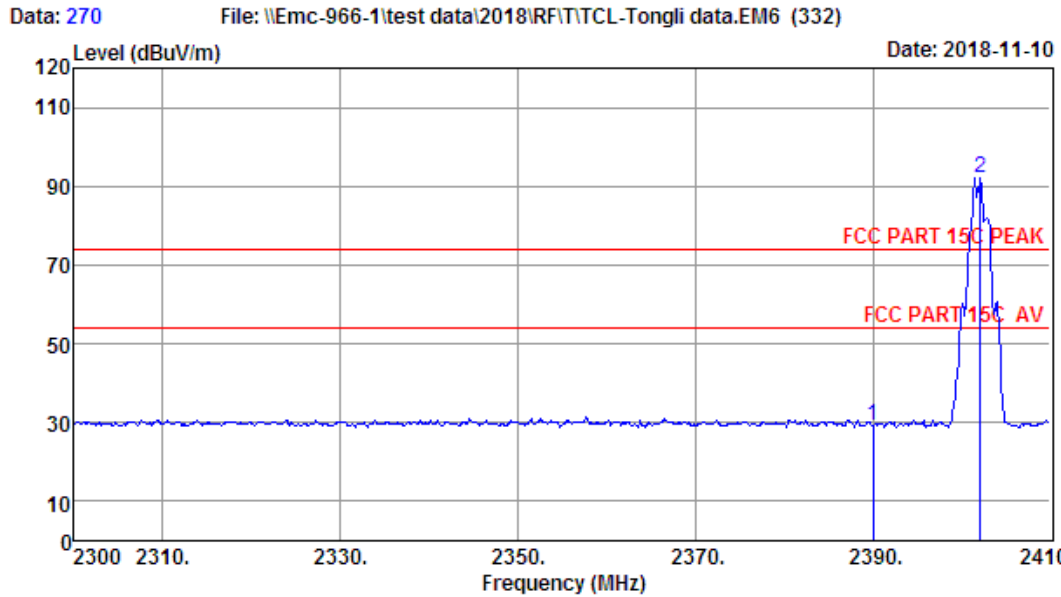

Site no. : 1# 966 Chamber Data no. : 270  
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.35	3.21	34.87	33.38	29.07	74.00	44.93	Peak
2	2402.08	27.35	3.21	34.94	96.67	92.29	74.00	-18.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 271 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

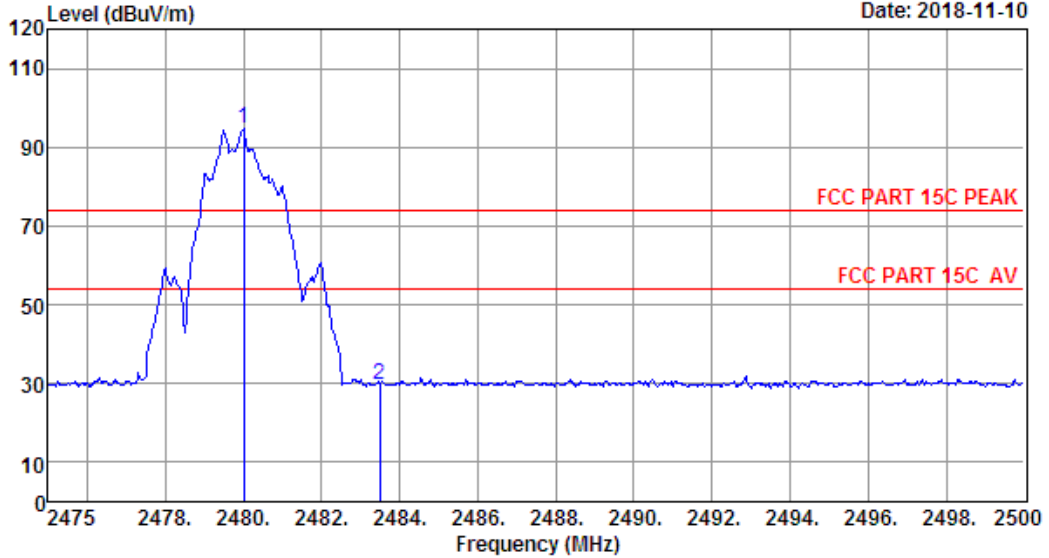

Site no. : 1# 966 Chamber Data no. : 271  
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	98.98	94.62	74.00	-20.62	Peak
2	2483.50	27.56	3.29	35.21	33.90	29.54	74.00	44.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 272 File: \\Emc-966-1\test data\2018\RF\TCL-Tongli data.EM6 (332) Date: 2018-11-10

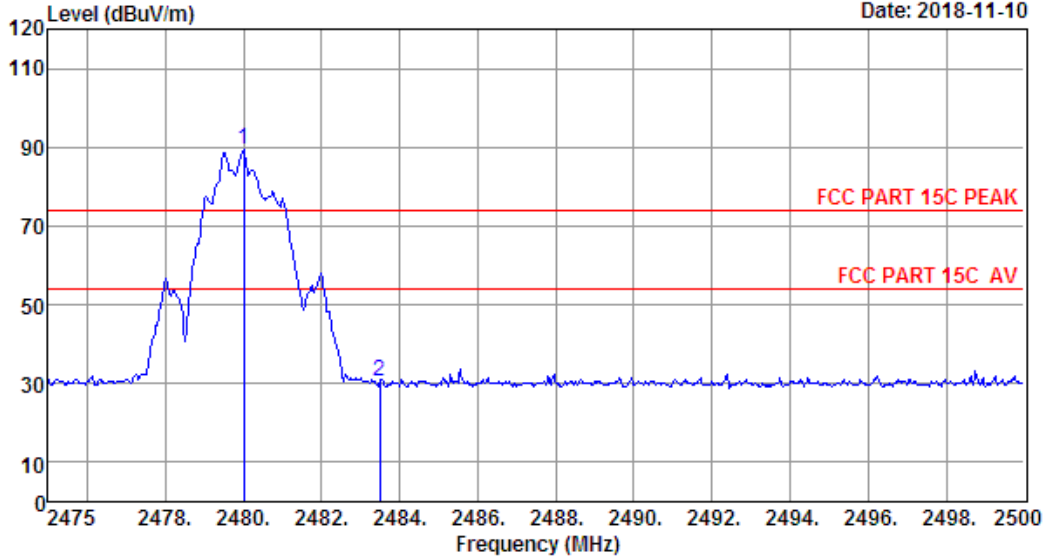

Site no. : 1# 966 Chamber Data no. : 272  
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:24.5';Humi:58%;Press:101.52kPa  
 Engineer : Viking  
 EUT : JMDD Module  
 Power : AC 120V/60Hz  
 M/N : JMDD  
 Test Mode : GFSK 2M TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	93.59	89.23	74.00	-15.23	Peak
2	2483.50	27.56	3.29	35.21	35.10	30.74	74.00	43.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

## 6 6dB Bandwidth Test

### 6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 6.2 Test Procedure


- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set resolution bandwidth (RBW) = 100 kHz.
  - (2). Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - (3). Detector = Peak.
  - (4). Trace mode = max hold.
  - (5). Sweep = auto couple.
  - (6). Allow the trace to stabilize.
  - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Test Result


EUT: JMDD Module			
M/N: JMDD			
Test date: 2018-09-18		Test site: RF Site	Tested by: Tony
Test Mode	CH	6dB bandwidth ( MHz )	Limit (KHz)
BT 5.0-BLE GFSK 1M	CH1	0.556	>500
	CH20	0.539	>500
	CH40	0.556	>500
BT 5.0-BLE GFSK 2M	CH1	0.916	>500
	CH20	0.913	>500
	CH40	0.897	>500
Conclusion : PASS			

### 6.4 Test Data


Test Mode: BT 5.0-BLE GFSK 2402MHz 1Mbps

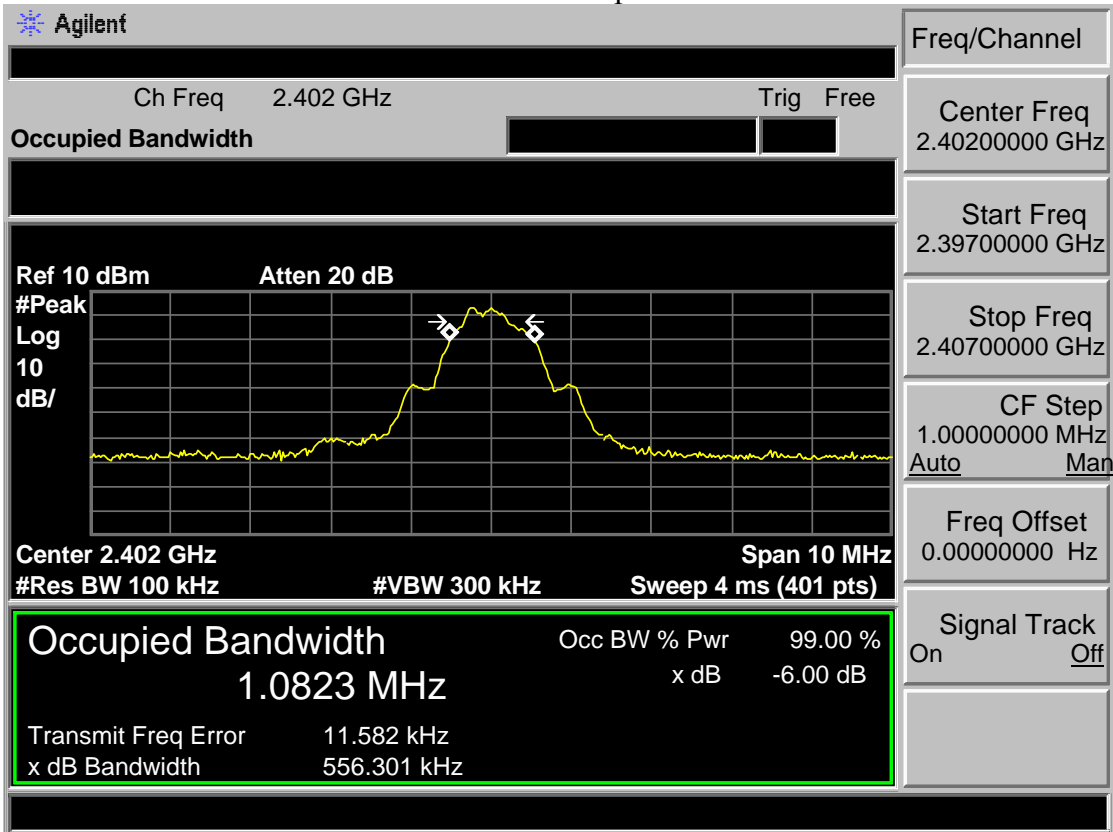


Test Mode: BT 5.0-BLE GFSK 2440MHz 1Mbps

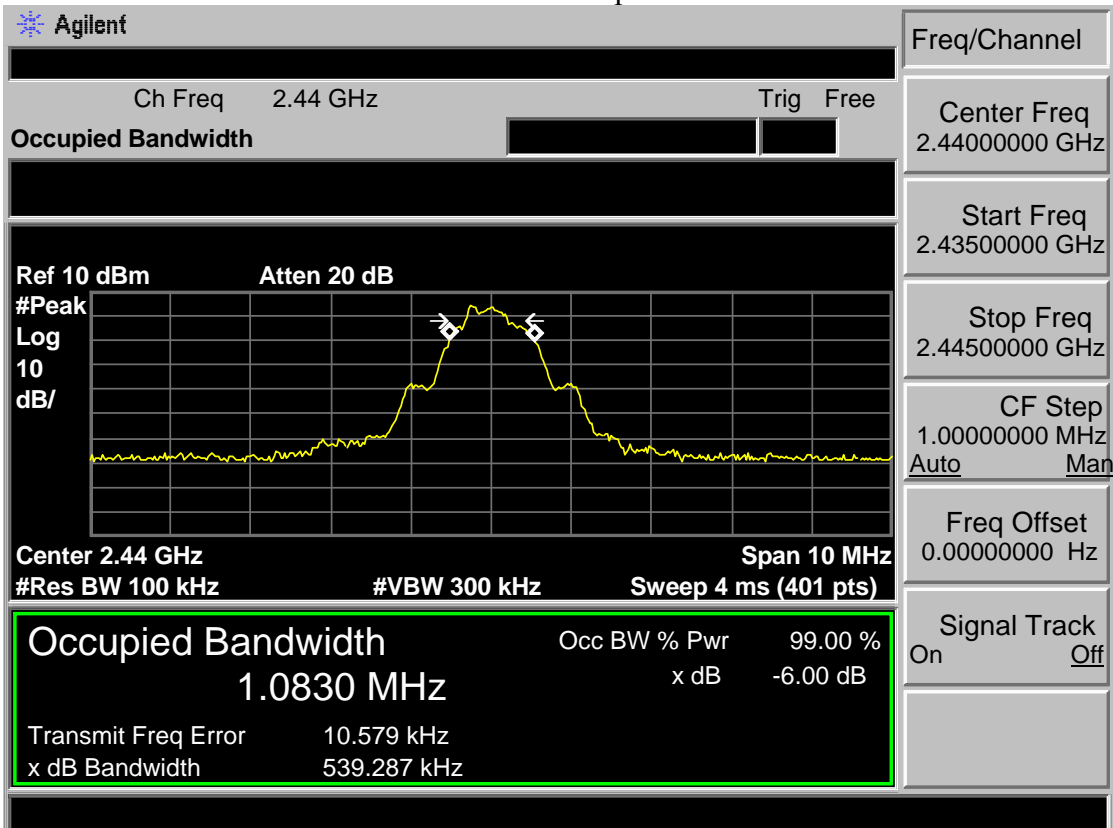

Test Mode: BT 5.0-BLE GFSK 2480MHz 1Mbps

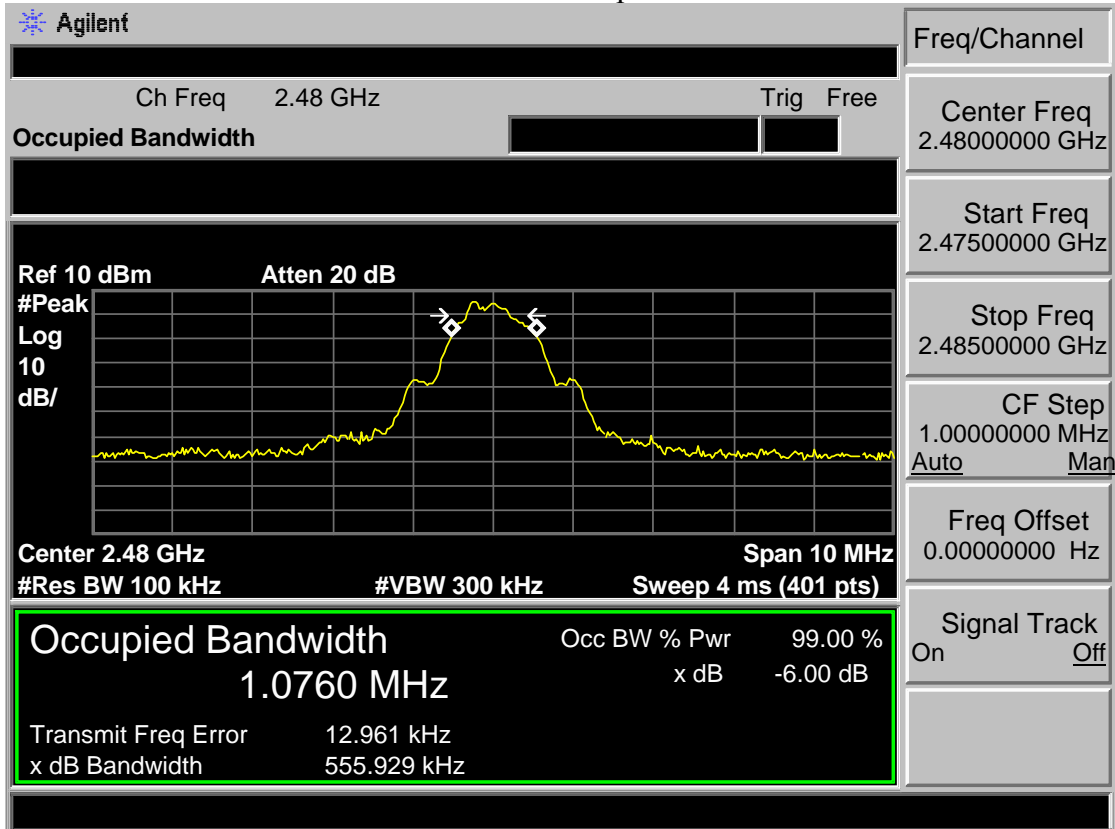


Test Mode: BT 5.0-BLE GFSK 2402MHz 2Mbps

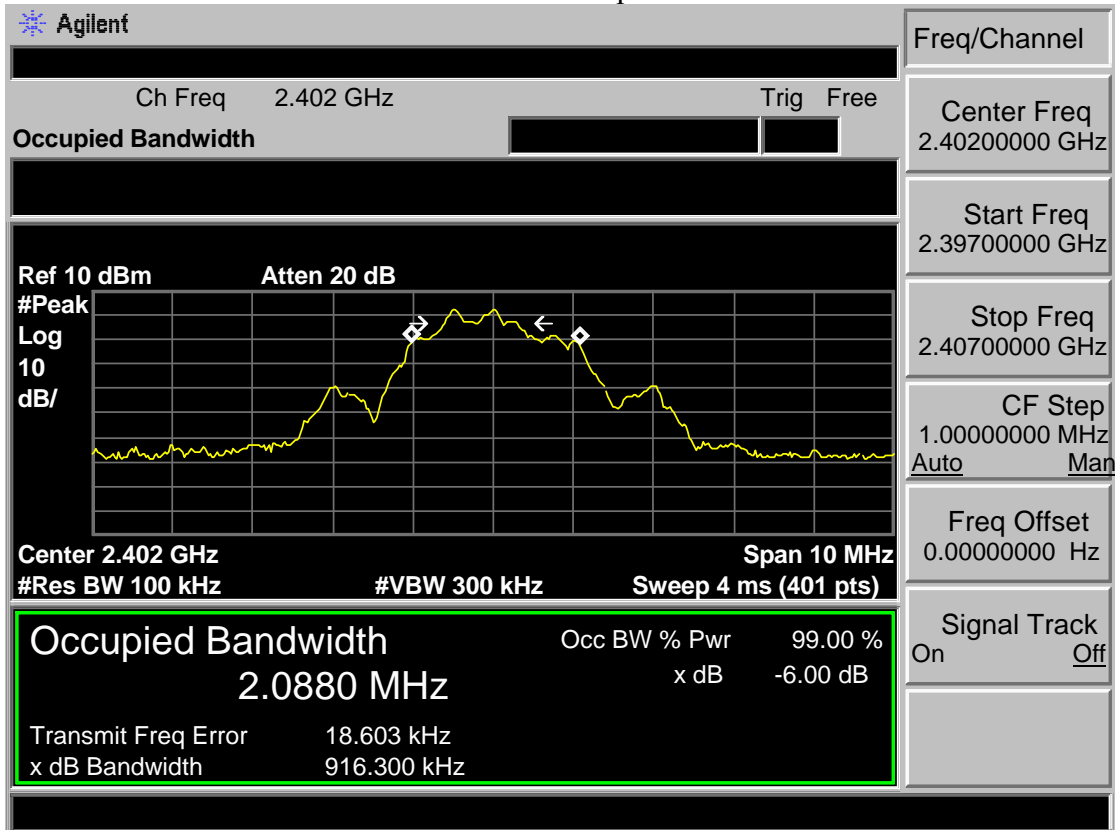




Test Mode: BT 5.0-BLE GFSK 2440MHz 2Mbps

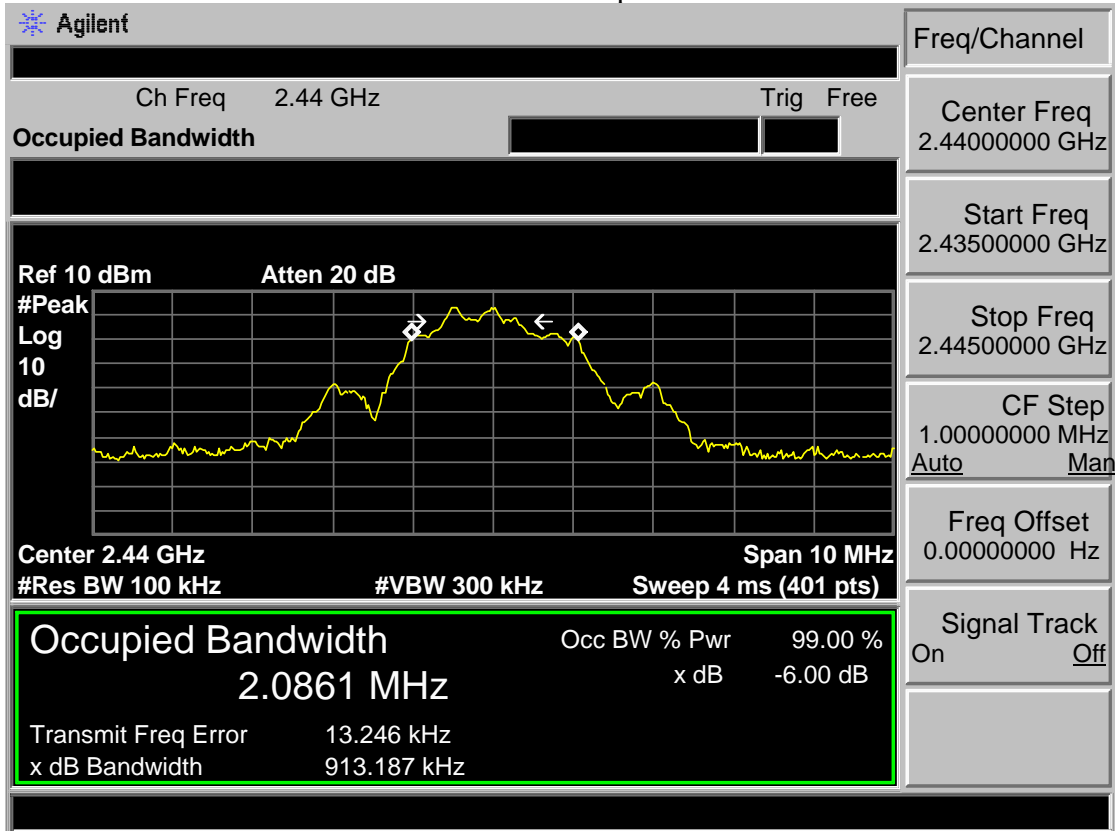

Test Mode: BT 5.0-BLE GFSK 2480MHz 2Mbps

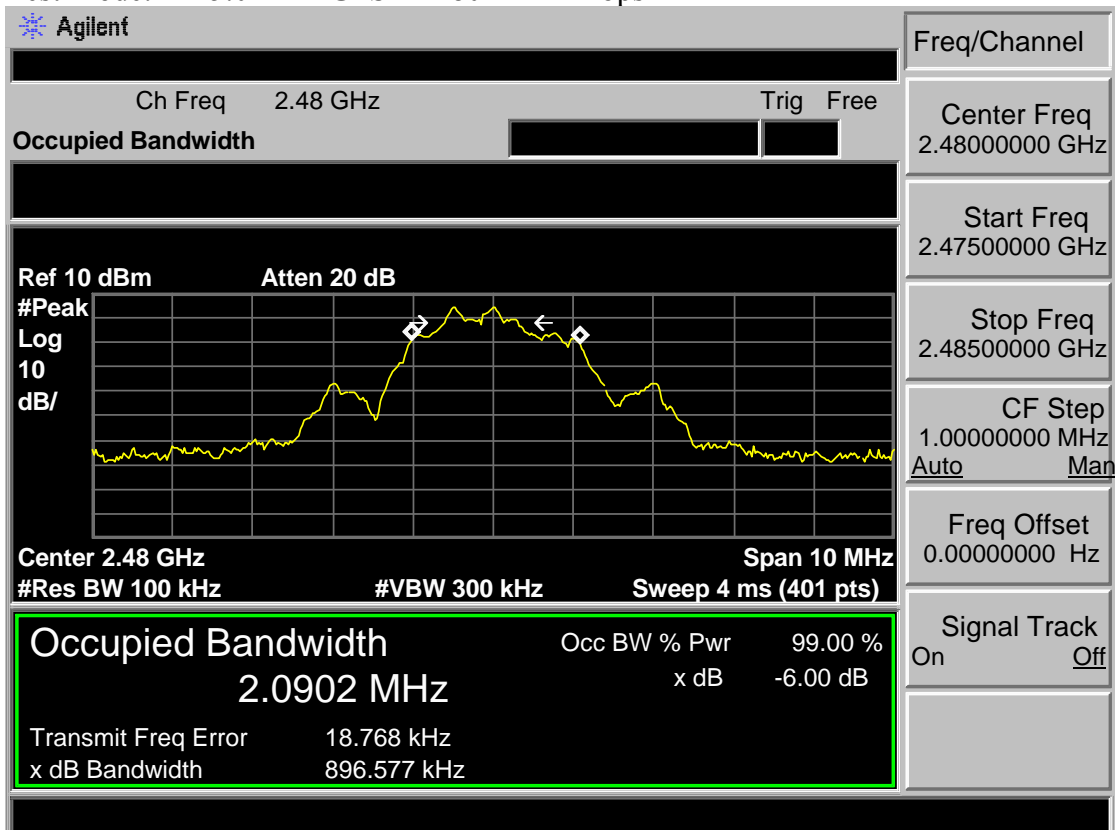

## 7 OUTPUT POWER TEST

### 7.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

### 7.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set the RBW  $\geq$  DTS bandwidth.
  - (2). Set VBW  $\geq$  3 x RBW.
  - (3). Set span  $\geq$  3 x RBW.
  - (4). Sweep time = auto couple.
  - (5). Detector = peak.
  - (6). Trace mode = max hold.
  - (7). Allow trace to fully stabilize.
  - (8). Use peak marker function to determine the peak amplitude level.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

## 7.3 Test Result

EUT:JMDD Module			
M/N:JMDD			
Test date: 2018-09-18		Test site: RF Site	
Tested by: Tony			
Pass			
Test Mode	CH	Peak output Power ( dBm )	Limit (dBm)
BT 5.0-BLE GFSK 1M	CH1	3.49	30
	CH20	4.40	30
	CH40	4.69	30
BT 5.0-BLE GFSK 2M	CH1	3.59	30
	CH20	4.53	30
	CH40	4.81	30
Conclusion : PASS			


### 7.4 Test Data

Test Mode: BT 5.0-BLE GFSK 2402MHz 1Mbps

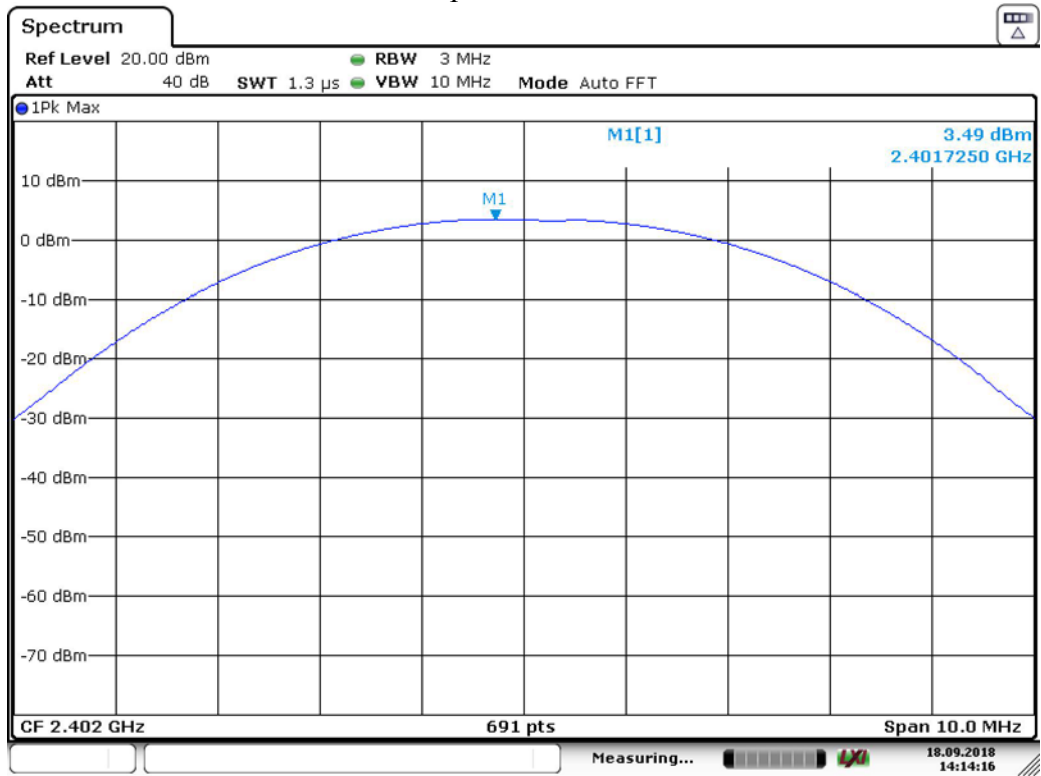


Date: 18.SEP.2018 14:14:17

Test Mode: BT 5.0-BLE GFSK 2440MHz 1Mbps

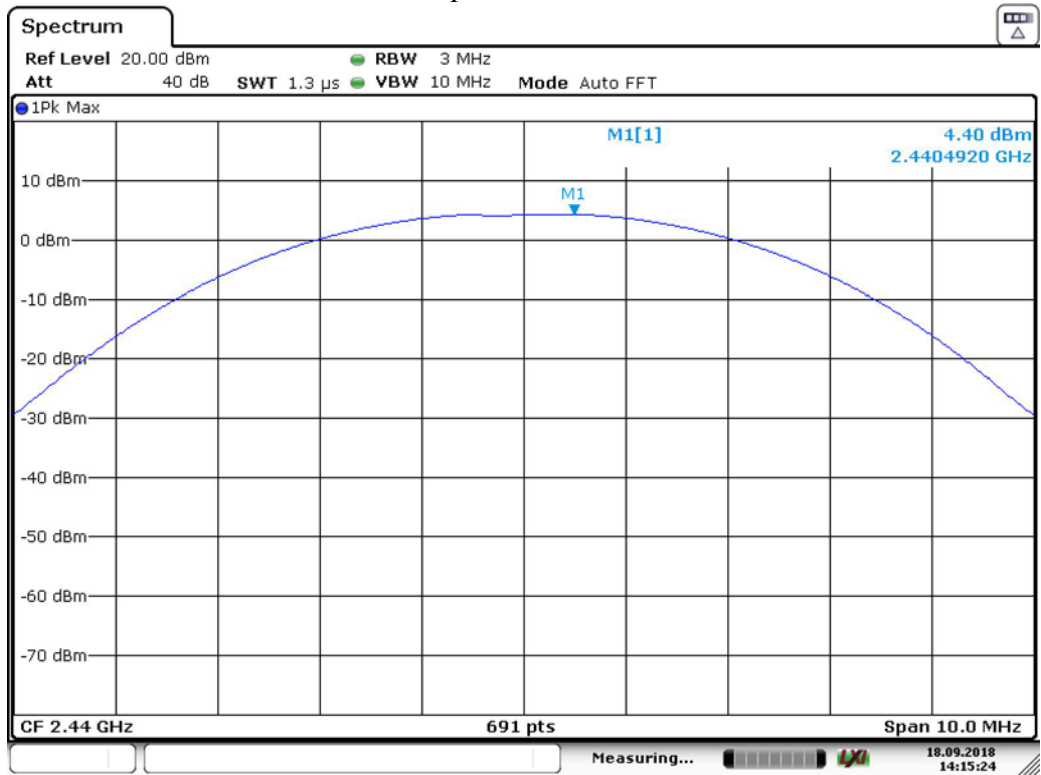


Date: 18.SEP.2018 14:15:25

Test Mode: BT 5.0-BLE GFSK 2480MHz 1Mbps

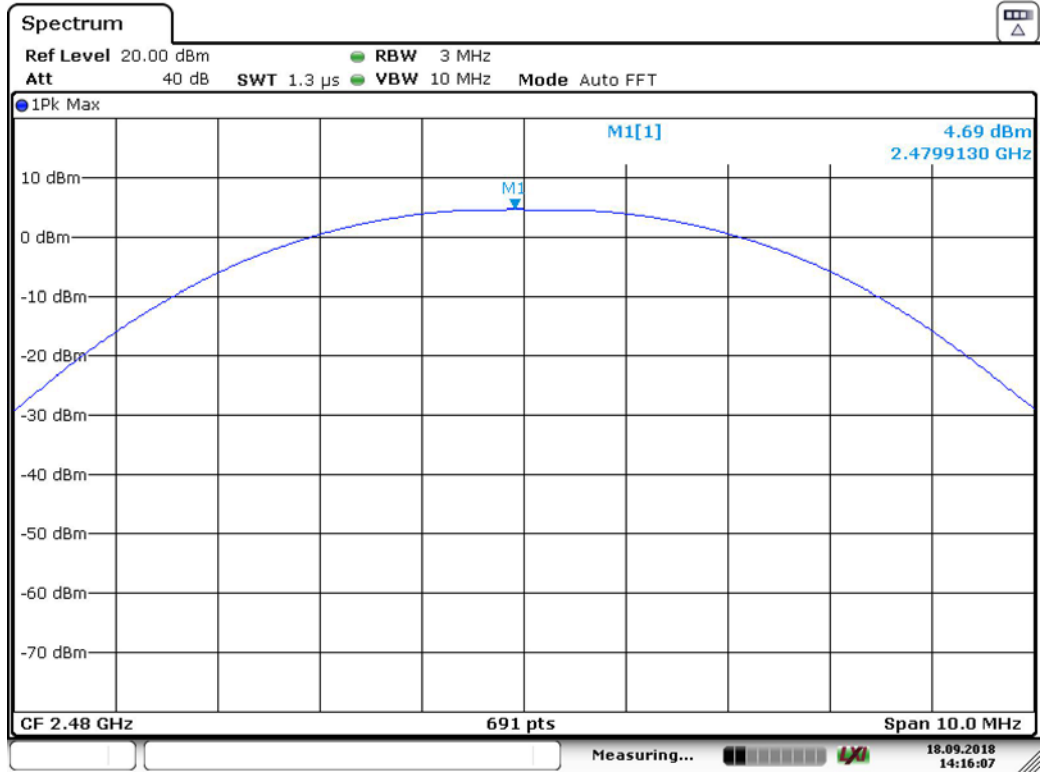


Date: 18.SEP.2018 14:16:07

Test Mode: BT 5.0-BLE GFSK 2402MHz 2Mbps

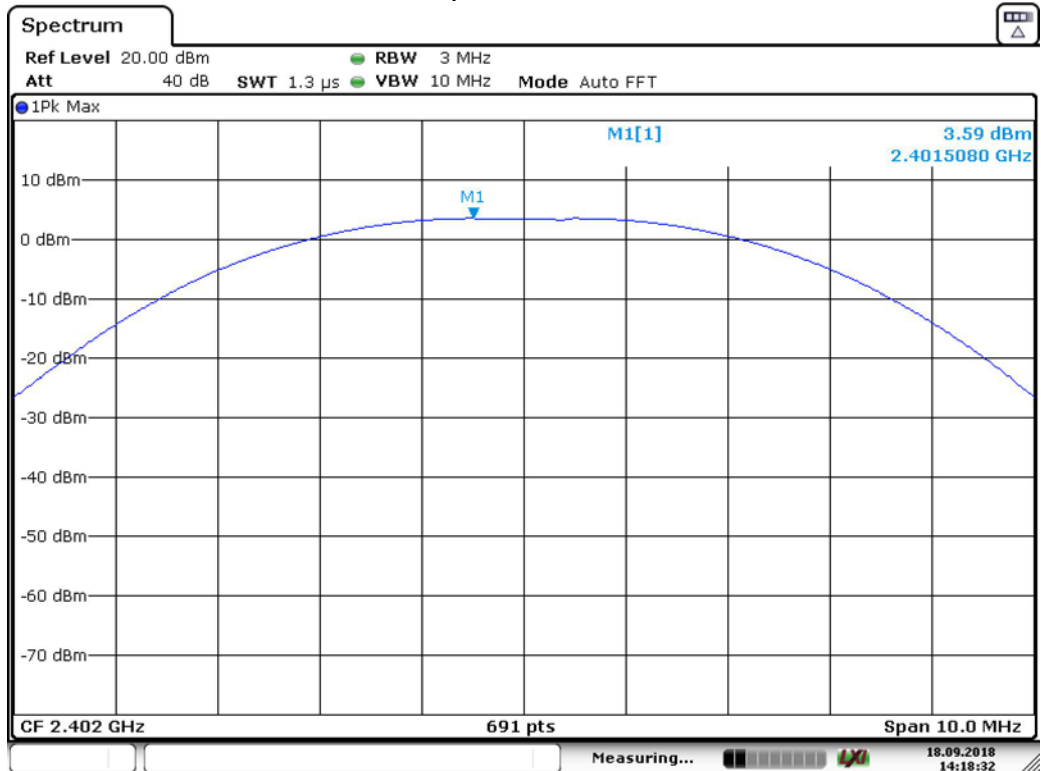


Date: 18.SEP.2018 14:18:32

Test Mode: BT 5.0-BLE GFSK 2440MHz 2Mbps

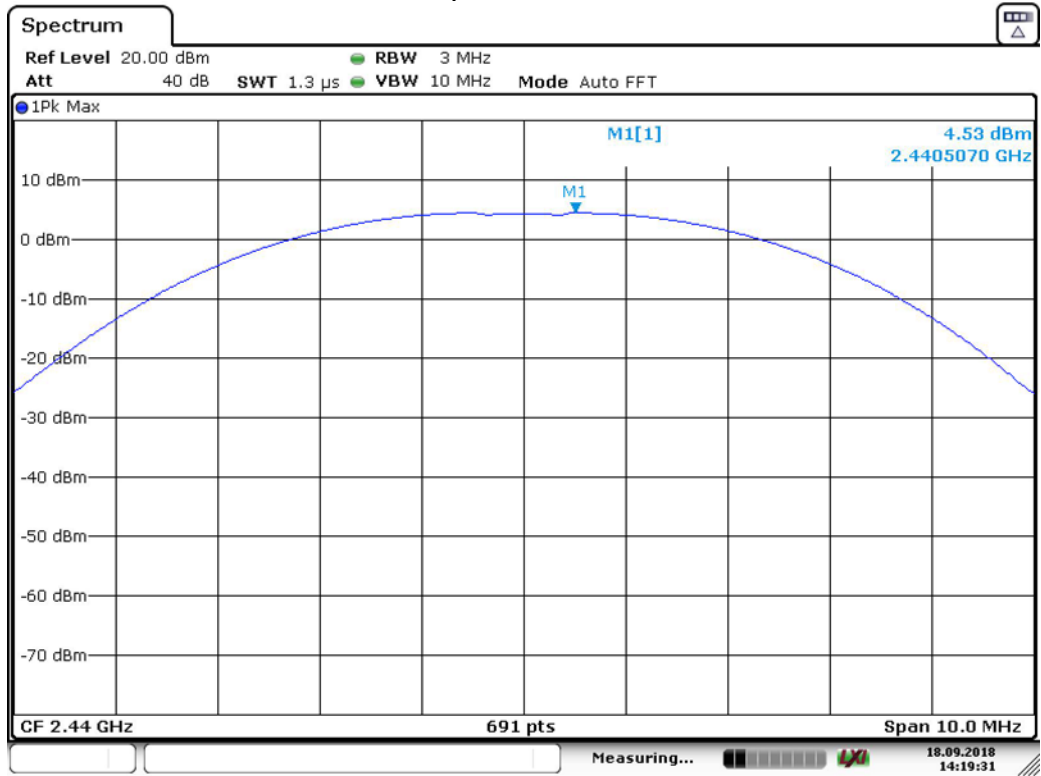

Date: 18.SEP.2018 14:19:32

Test Mode: BT 5.0-BLE GFSK 2480MHz 2Mbps

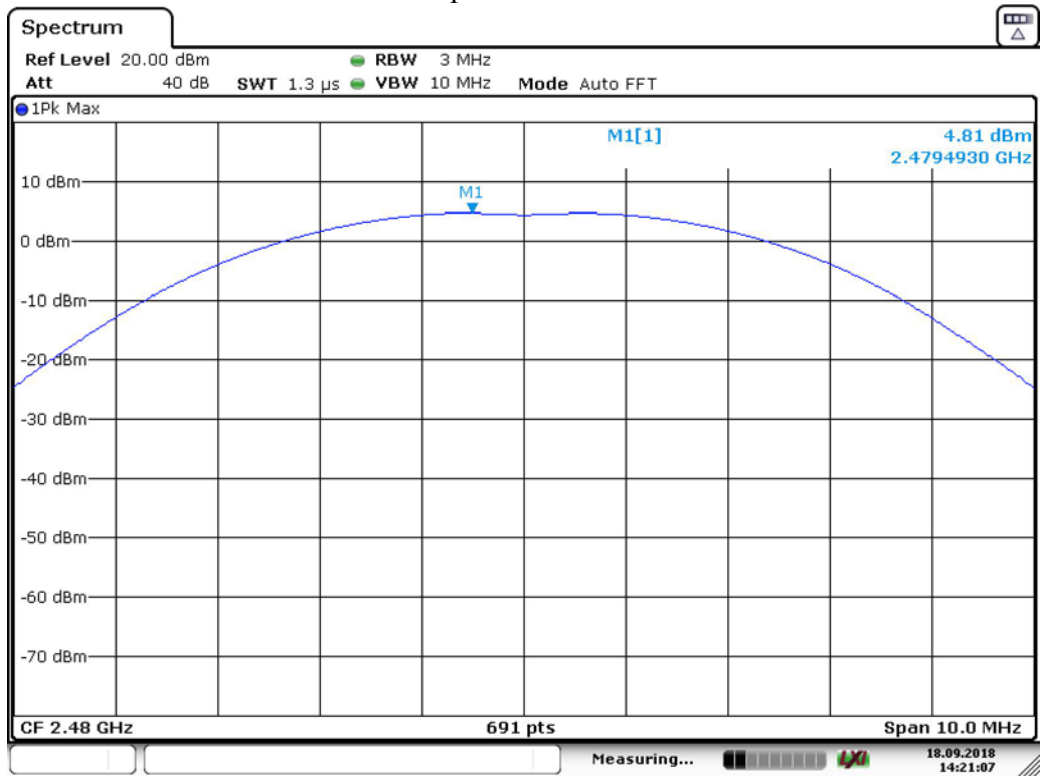

Date: 18.SEP.2018 14:21:08

## 8 POWER SPECTRAL DENSITY TEST

### 8.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 8.2 Test Procedure


- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set analyzer center frequency to DTS channel center frequency.
  - (2). Set the span to 1.5 times the DTS bandwidth.
  - (3). Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - (4). Set the VBW  $\geq 3 \text{ RBW}$ .
  - (5). Detector = peak.
  - (6). Sweep time = auto couple.
  - (7). Trace mode = max hold.
  - (8). Allow trace to fully stabilize.
  - (9). Use the peak marker function to determine the maximum amplitude level.
  - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 8.3 Test Result


EUT: JMDD Module			
M/N: JMDD			
Test date: 2018-09-18		Test site: RF Site	Tested by: Tony
Pass			
Test Mode	CH	Power density (dBm/3kHz)	Limit (dBm/3kHz)
BT 5.0-BLE GFSK 1M	CH1	-15.43	8
	CH20	-14.12	8
	CH40	-13.37	8
BT 5.0-BLE GFSK 2M	CH1	-19.70	8
	CH20	-18.35	8
	CH40	-17.55	8
Conclusion : PASS			

### 8.4 Test Data

Test Mode: BT 5.0-BLE GFSK 2402MHz 1Mbps

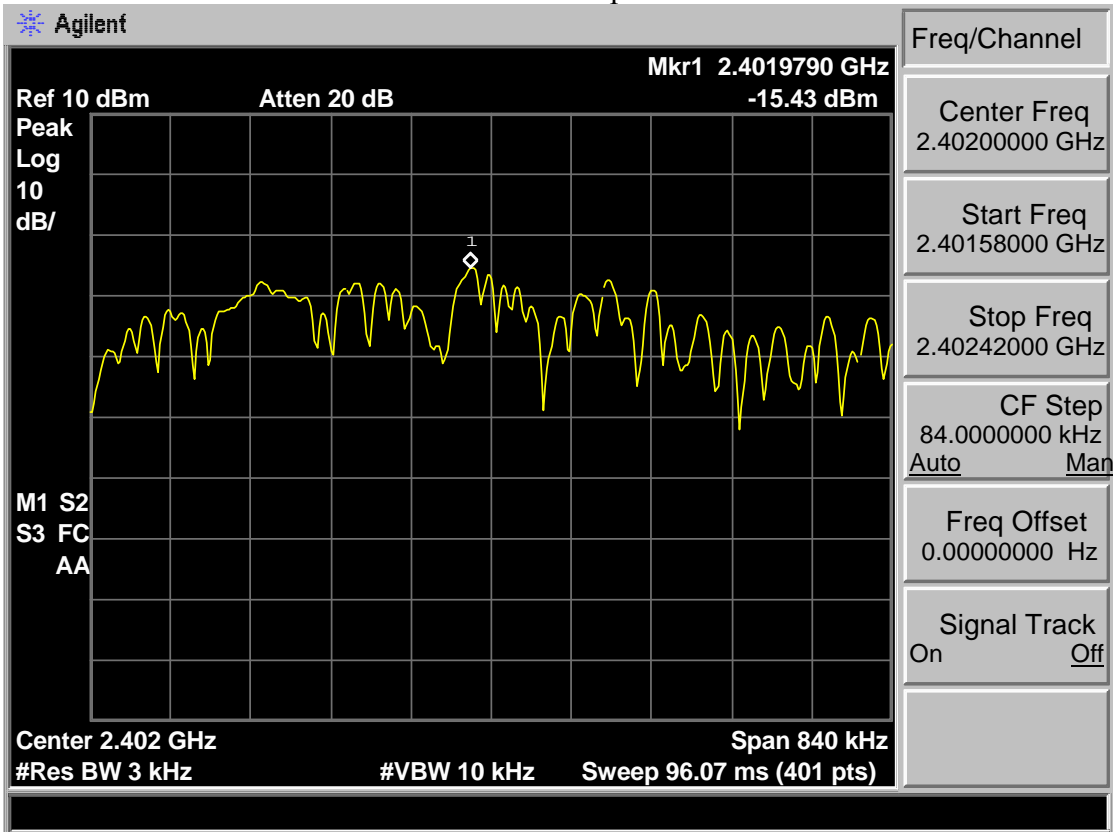


Test Mode: BT 5.0-BLE GFSK 2440MHz 1Mbps

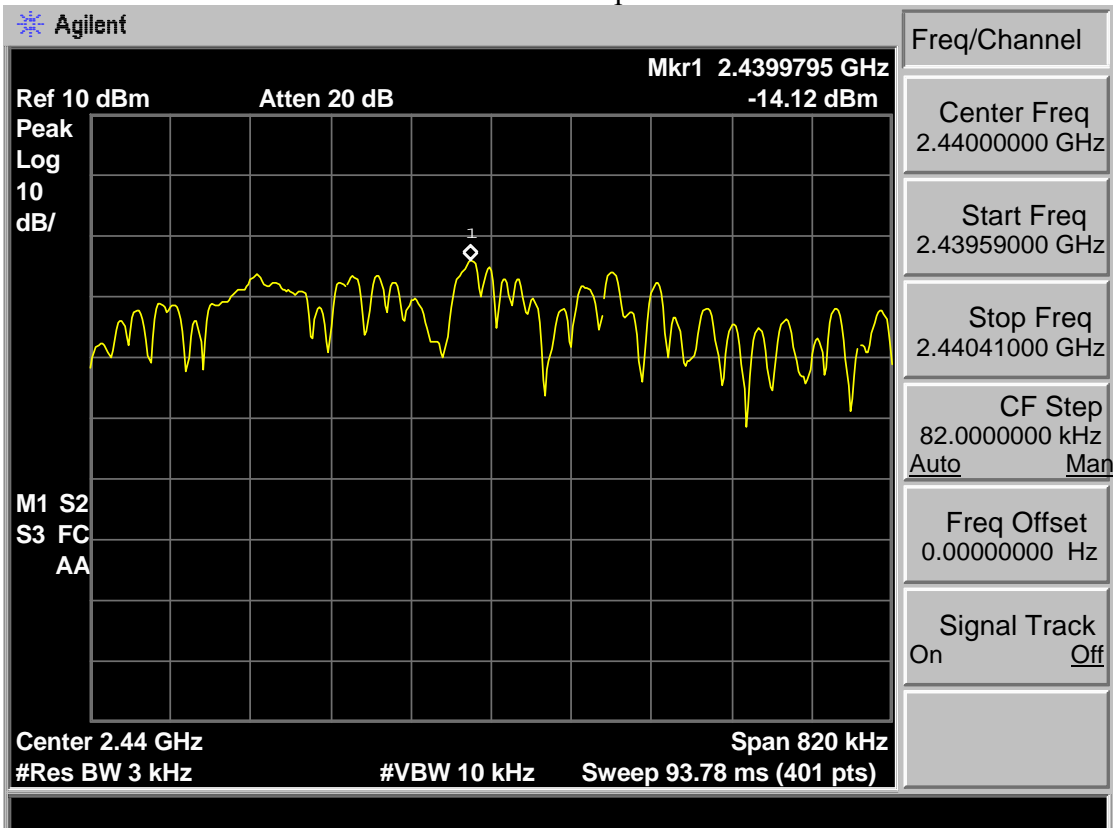





Test Mode: BT 5.0-BLE GFSK 2480MHz 1Mbps

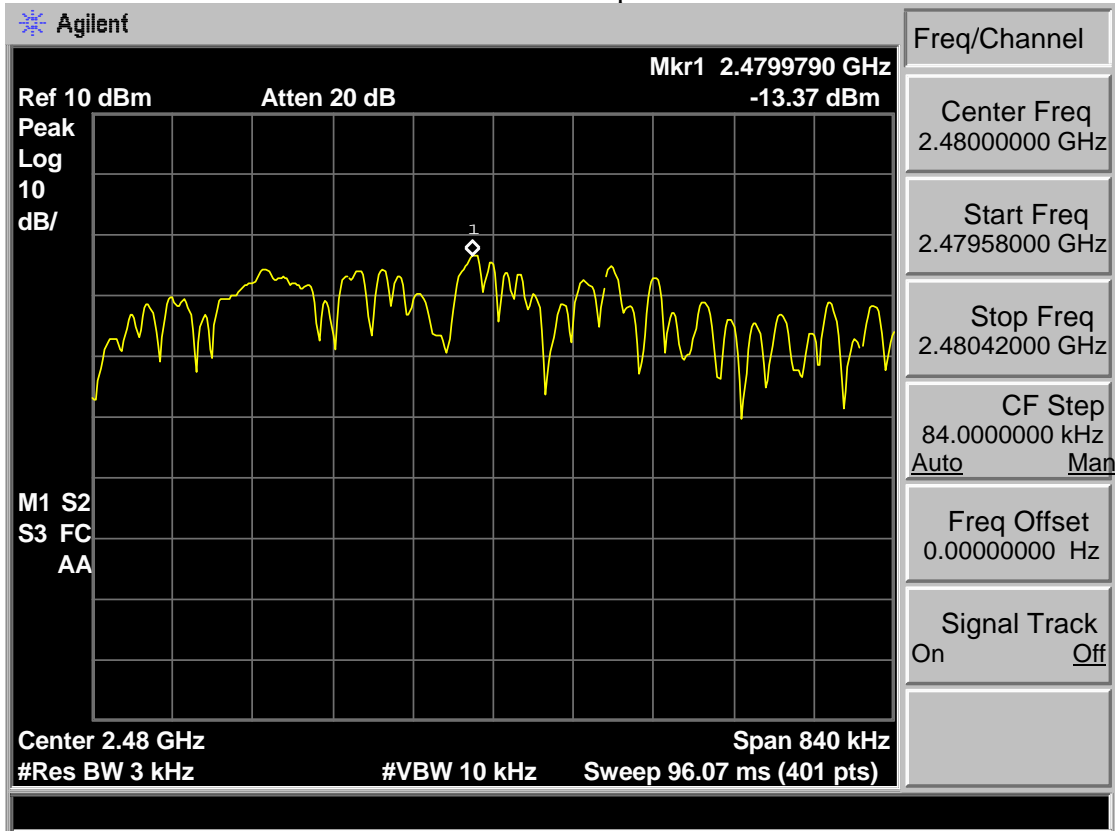


Test Mode: BT 5.0-BLE GFSK 2402MHz 2Mbps

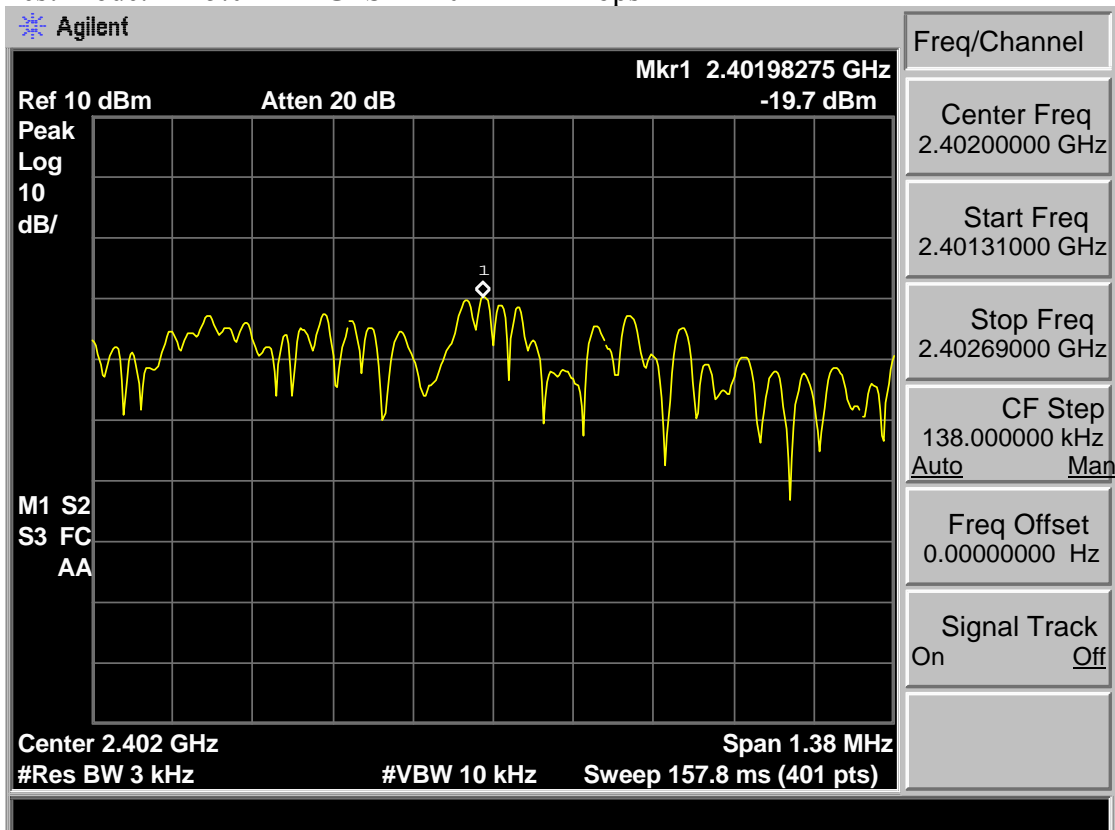

Test Mode: BT 5.0-BLE GFSK 2440MHz 2Mbps

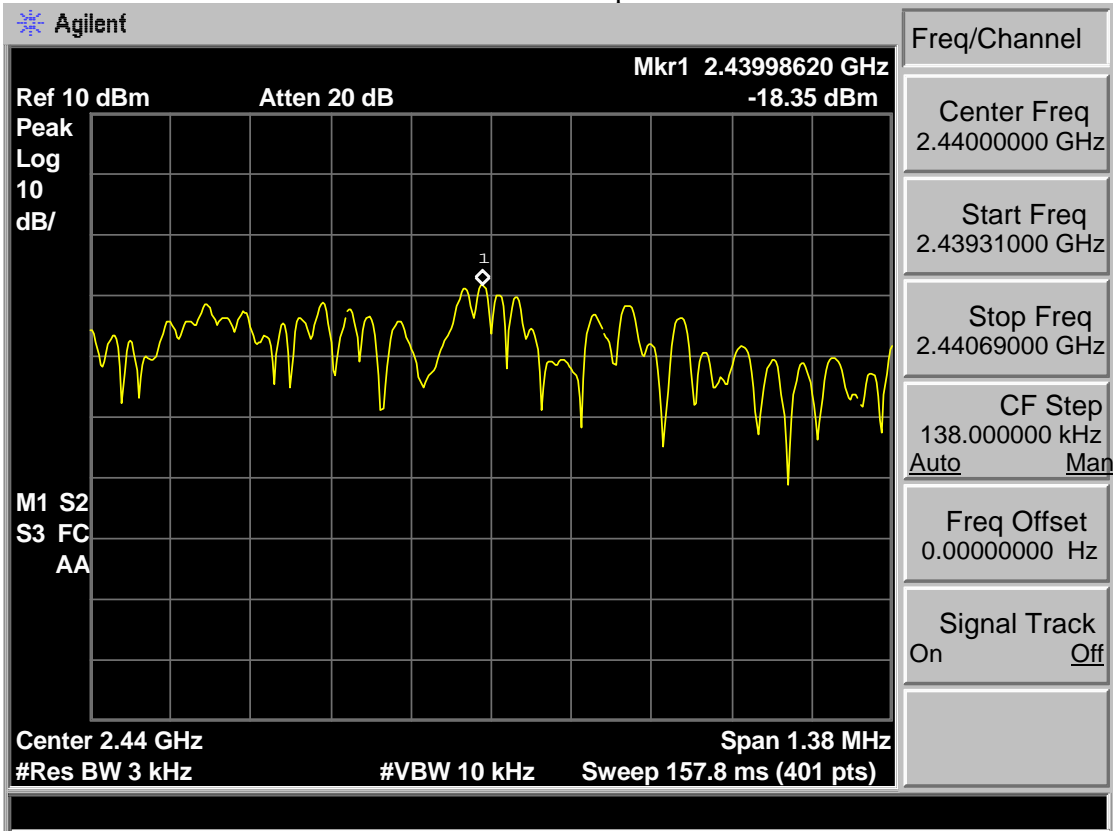

Test Mode: BT 5.0-BLE GFSK 2480MHz 2Mbps

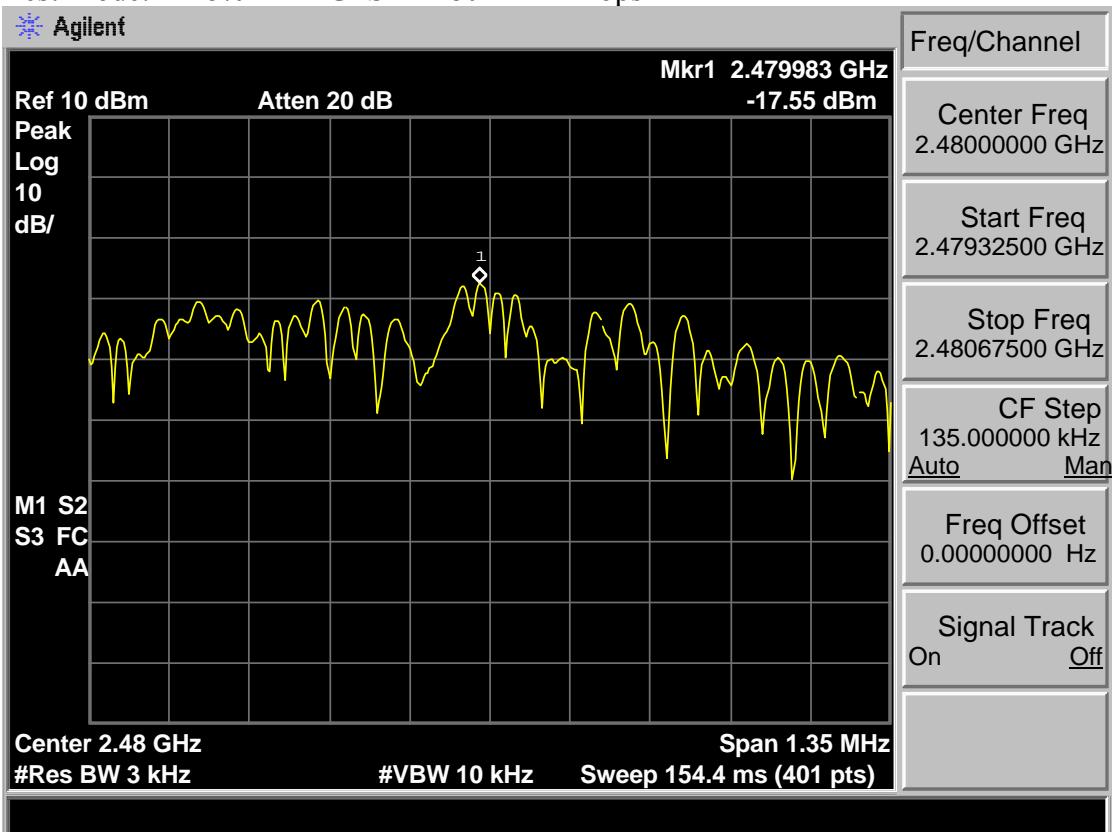

## 9 ANTENNA REQUIREMENTS

### 9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2 Result

The antennas used for this product are PIFA antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna as follow.


Frequency Range	Antenna 0	Antenna 1	Antenna 2
2400~2483.5 MHz	4.03 dBi	4.10 dBi	3.17 dBi
5150~5250 MHz	/	2.39 dBi	2.91 dBi
5250~5350 MHz	/	1.65 dBi	3.12 dBi
5470~5725 MHz	/	2.97 dBi	4.50 dBi
5725~5850 MHz	/	3.90 dBi	3.56 dBi
2.4G Directional gain: 6.66dBi 5G(Band I) Directional gain: 5.64dBi 5G(Band II) Directional gain: 5.43dBi 5G(Band III) Directional gain: 6.78dBi 5G(Band IV) Directional gain: 6.74dBi Directional gain = $10\log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ dBi Note: KDB 662911 D01 Multiple Transmitter Output v02r01			
Note: Bluetooth uses Antenna 0 11a,b,g,n,ac uses Antenna 1 / Antenna 2 11n,ac uses MIMO			

# 10 TEST SETUP PHOTO


Conducted Test



Radiated Test (30-1000 MHz)

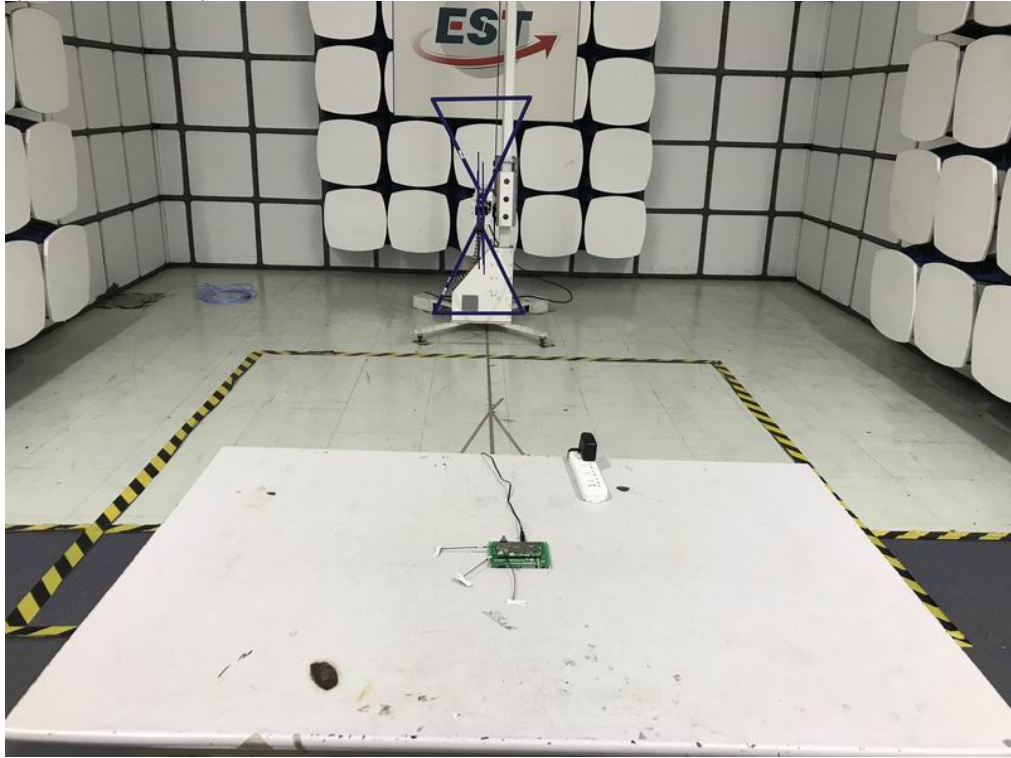



Radiated Test (Above 1GHz)

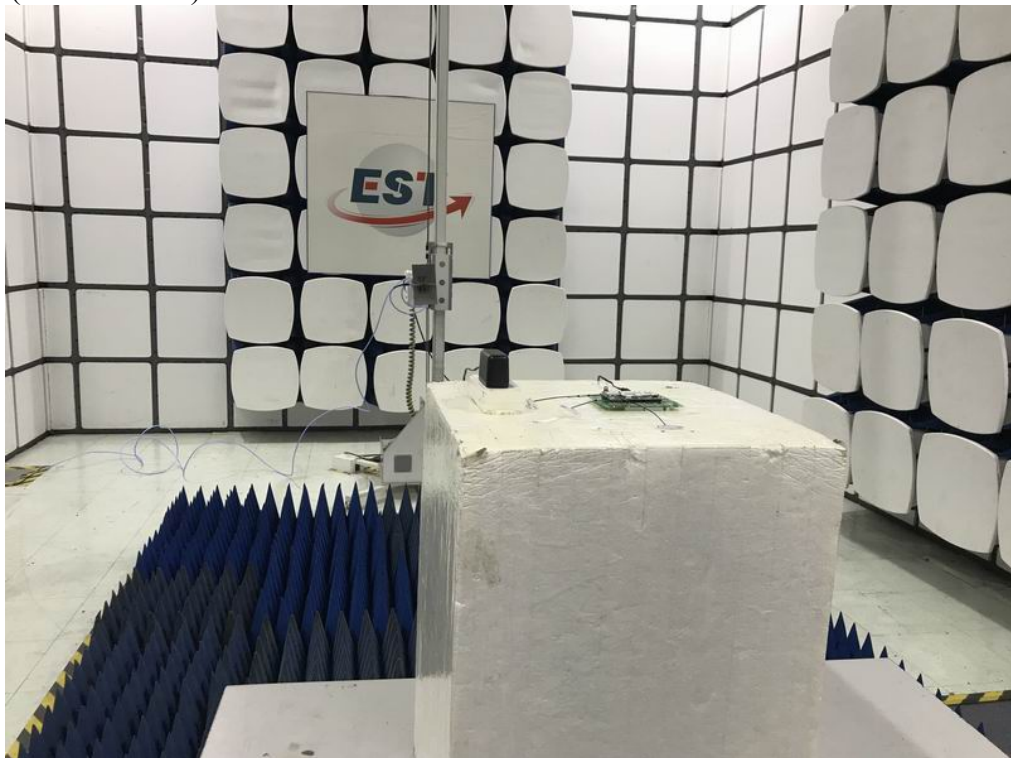





# 11 PHOTO EUT

External Photos  
M/N: JMDD

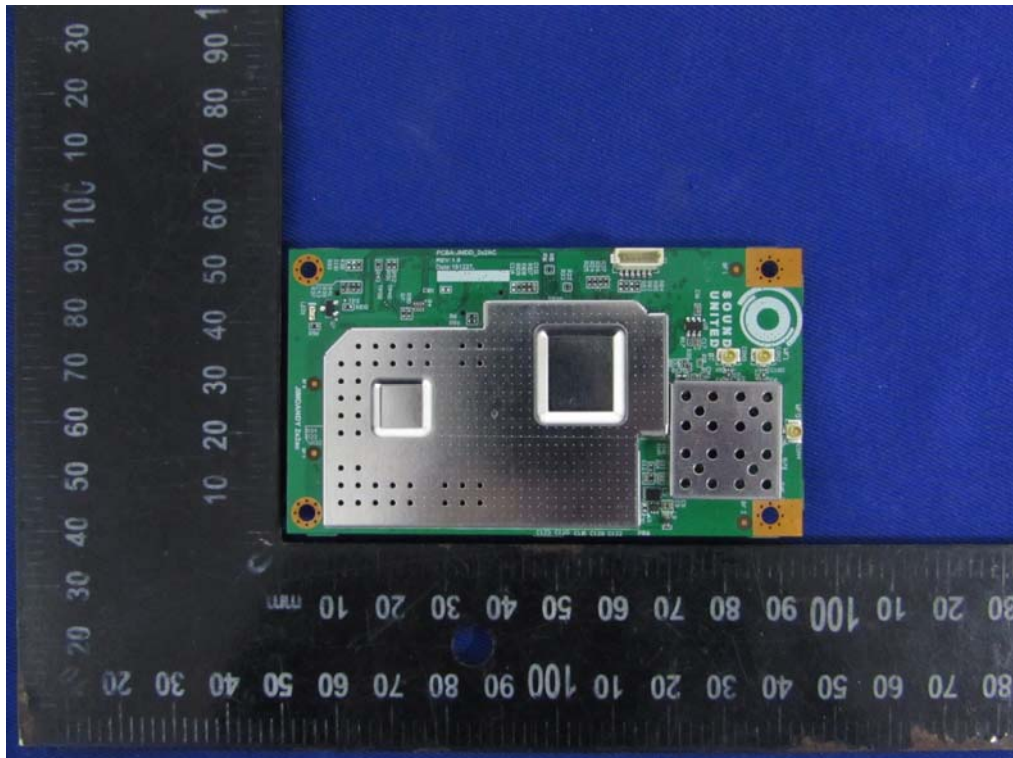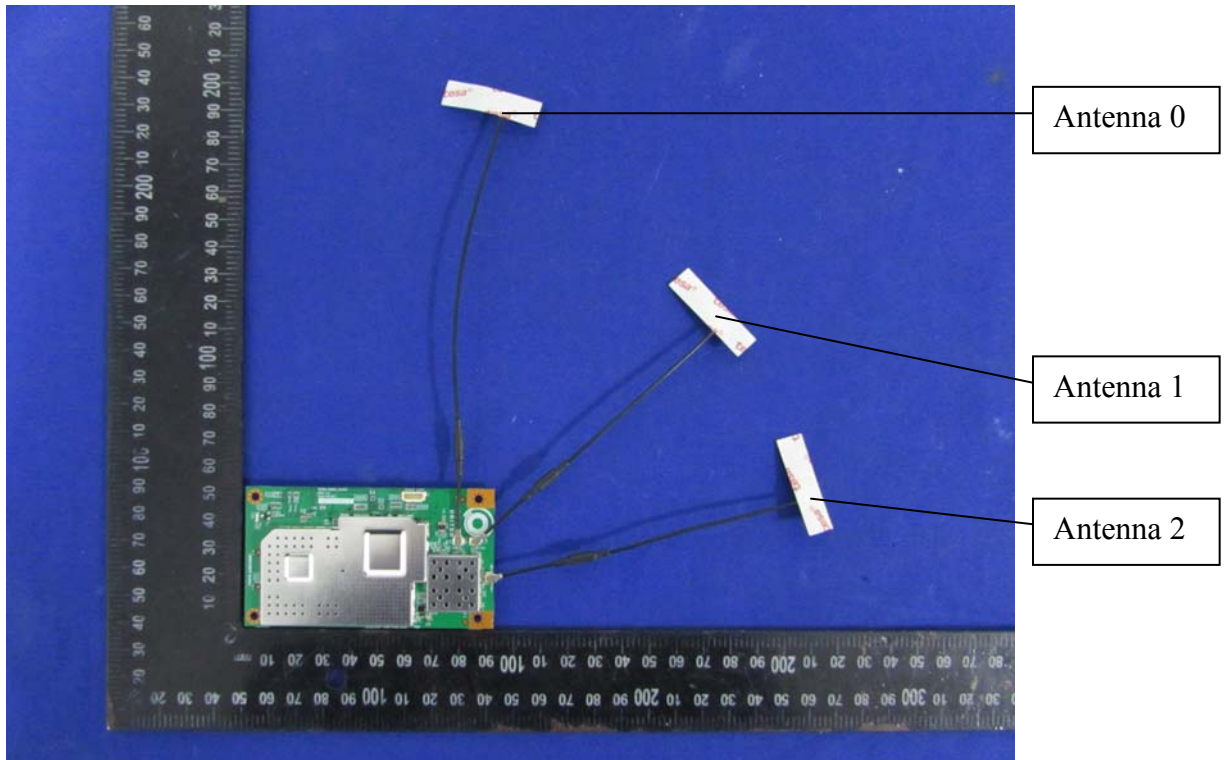

**Internal Photos**  
M/N: JMDD

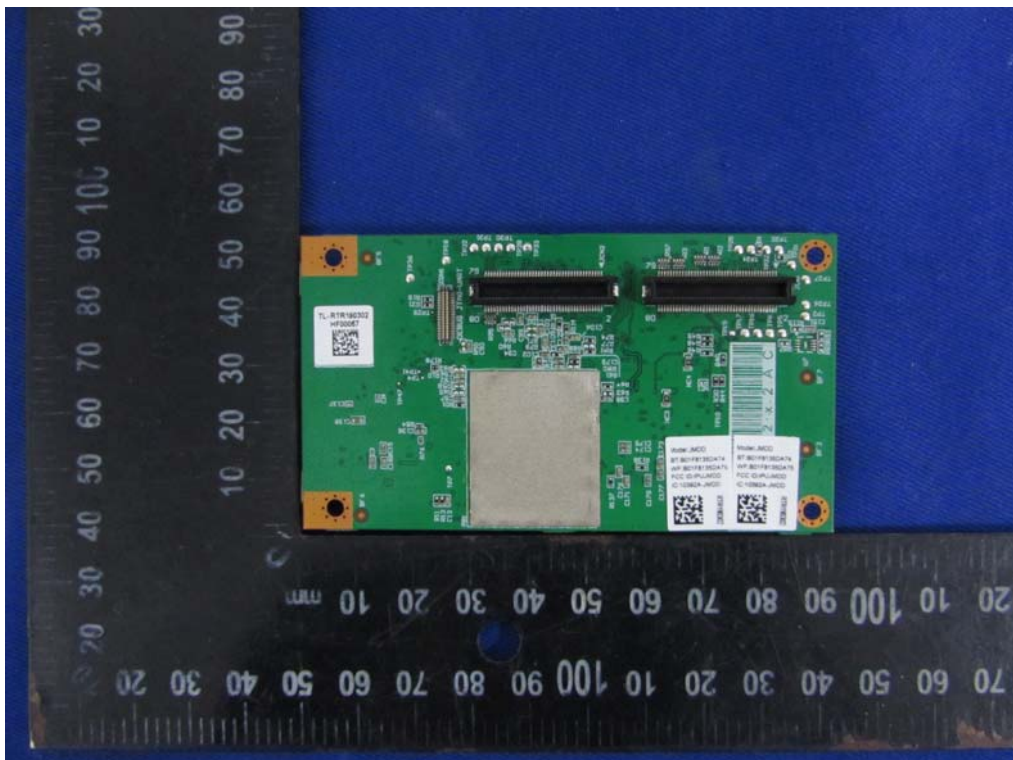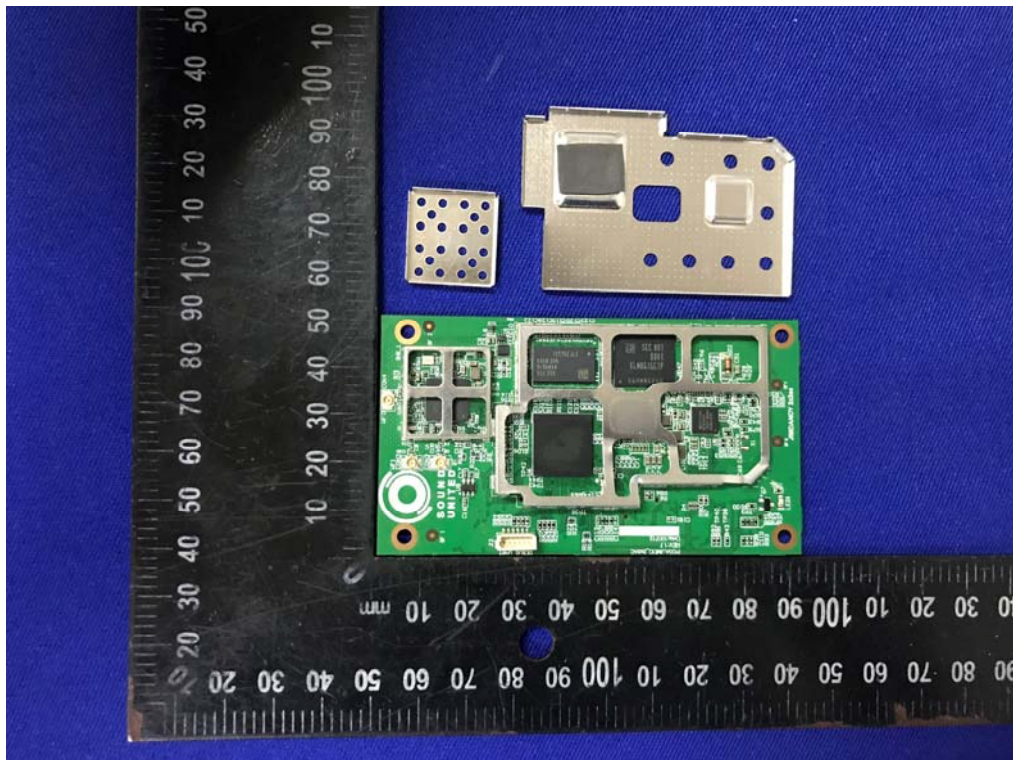



**Internal Photos**  
M/N: JMDD

