

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

DEI Sales Inc. dba Definitive Technology

3.1 Home Theater Sound Bar and Wireless Subwoofer System

Model Number: STUDIO SLIM

FCC ID: IPUSTUDIOSLIM

Prepared for:	DEI Sales Inc. dba Definitive Technology
	One Viper Way, Vista CA 92081 United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R1811059
Date of Test:	Nov. 07 ~ 19, 2018
Date of Report:	Nov. 21, 2018

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test	8
2.5. Block Diagram.....	8
2.6. Test mode	9
2.7. Channel List.....	9
2.8. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER.....	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Result	12
3.4. Test Data.....	13
4. 20 DB BANDWIDTH	15
4.1. Limit	15
4.2. Test Procedure	15
4.3. Test Result	15
4.4. Test Data.....	16
5. CARRIER FREQUENCY SEPARATION.....	18
5.1. Limit	18
5.2. Test Procedure	18
5.3. Test Result	18
5.4. Test Data.....	19
6. NUMBER OF HOPPING CHANNEL	21
6.1. Limit	21
6.2. Test Procedure	21
6.3. Test Result	21
6.4. Test Data.....	22
7. DWELL TIME.....	23
7.1. Limit	23
7.2. Test Procedure	23
7.3. Test Result	23
7.4. Test Data.....	24
8. RADIATED EMISSIONS	25
8.1. Limit	25
8.2. Block Diagram of Test setup	26
8.3. Test Procedure	27
8.4. Test Result	27
8.5. Test Data.....	28

9.	BAND EDGE COMPLIANCE	38
9.1.	Limit	38
9.2.	Block Diagram of Test setup	38
9.3.	Test Procedure	38
9.4.	Test Result	38
9.5.	Test Data	39
10.	POWER LINE CONDUCTED EMISSIONS	47
10.1.	Limit	47
10.2.	Test Procedure	47
11.	ANTENNA REQUIREMENTS	52
11.1.	Limit	52
11.2.	Result	52
12.	TEST SETUP PHOTO	53
13.	PHOTO EUT	55

EST Technology Co., Ltd.

Applicant:	DEI Sales Inc. dba Definitive Technology One Viper Way, Vista CA 92081 United States		
Manufacturer:	DEI Sales Inc. dba Definitive Technology One Viper Way, Vista CA 92081 United States		
E.U.T:	3.1 Home Theater Sound Bar and Wireless Subwoofer System		
Model Number:	STUDIO SLIM		
Power Supply:	DC 24V From Adapter Input AC 100-240 ~ 50/60Hz		
Test Voltage:	DC 24V From Adapter Input AC 120V/60Hz DC 24V From Adapter Input AC 240V/60Hz		
Trade Name:	D.(DEFINITIVE TECHNOLOGY)	Serial No.:	-----
Date of Receipt:	Oct. 08, 2018	Date of Test:	Nov. 07 ~ 19, 2018
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2018 ANSI C63.10:2013		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
Date: Nov. 21, 2018			
Prepared by:	Reviewed by:	 Approved by: Iceman Hu / Manager	
 Ring / Assistant	 Tony / Engineer		
Other Aspects: None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	3.1 Home Theater Sound Bar and Wireless Subwoofer System
FCC ID	:	IPUSTUDIOSLIM
Model Number	:	STUDIO SLIM
Operation frequency	:	2403.5MHz~2477.3MHz
Number of channel	:	49
Antenna	:	Internal antenna, 5.97dBi
Modulation	:	FHSS (GFSK)
Sample Type	:	Prototype production

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) KDB 558074	PASS
20dB Bandwidth	FCC Part 15: 15.247a1 KDB 558074	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) KDB 558074	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) KDB 558074	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) KDB 558074	PASS
Radiated Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) KDB 558074	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: KDB 558074 D01 15.247 Meas Guidance v05		

2.2. Test Facilities

EMC Lab	:	<p>Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2017</p> <p>Certificated by A2LA, USA Registration No.: 4366.01 Date of registration: November 07, 2017</p> <p>Certificated by FCC, USA Designation Number: CN1215 Registration No.: 722932 Date of registration: November 21, 2017</p> <p>Certificated by Industry Canada CAB identifier No.: CN0035 Date of registration: January 04, 2019</p> <p>Certificated by VCCI, Japan Registration No.: R-13663; C-14103 Date of registration: July 25, 2017 This Certificate is valid until: July 24, 2020</p> <p>Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015</p> <p>Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011</p> <p>Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L2-64 Date of registration: April 28, 2011</p> <p>Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011</p>
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60 \text{ dB}(\text{Polarize: H})$
	$\pm 4.68 \text{ dB}(\text{Polarize: V})$
Uncertainty for spurious emissions test (1GHz to 18GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

2.4.1. Adapter

M/N	:	DYS902-240400W
Input	:	AC 100-240V~50/60Hz, 1.5A Max
Output	:	DC 24V/4A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was set into Wireless test mode by software before test.



(EUT: 3.1 Home Theater Sound Bar and Wireless Subwoofer System)

2.6. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2403.5MHz
	Middle	2440.4MHz
	High	2477.3MHz

2.7. Channel List

Channel No.	Frequency (MHz)						
1	2403.5	2	2405.1	3	2406.6	4	2408.1
5	2409.7	6	2411.2	7	2412.8	8	2414.3
9	2415.8	10	2417.4	11	2418.9	12	2420.4
13	2422.0	14	2423.5	15	2425.1	16	2426.6
17	2428.1	18	2429.7	19	2431.2	20	2432.7
21	2434.3	22	2435.8	23	2437.4	24	2438.9
25	2440.4	26	2442.0	27	2443.5	28	2445.0
29	2446.6	30	2448.1	31	2449.6	32	2451.2
33	2452.7	34	2454.3	35	2455.8	36	2457.3
37	2458.9	38	2460.4	39	2461.9	40	2463.5
41	2465.0	42	2466.6	43	2468.1	44	2469.6
45	2471.2	46	2472.7	47	2474.2	48	2475.8
49	2477.3						

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	CEPREI	June 15,18	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	CEPREI	June 15,18	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Active Loop Antenna	SCHWAREB ECK	FMZB 1519B	1519B-088	N/A	Aug. 01,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA912 0D1002	CEPREI	June 18,18	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	BBHA917 0242	CEPREI	June 18,18	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
PSA Series Spertrum Analyzer	Agilent	E4447A	MY50180 031	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.5. For connect EUT antenna terminal test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211 139	CEPREI	June 15,18	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset employing at least 75 non-overlapping hopping channels; shall not exceed 0.125 W if the hopset employing at greater than or equal to 15 and less than 75 non-overlapping hopping channels.

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.

3.3. Test Result


EUT: 3.1 Home Theater Sound Bar and Wireless Subwoofer System					
M/N: STUDIO SLIM					
Test date: 2018-11-15	Test site: RF site		Tested by: Viking		
Mode	Freq (MHz)	Result (dBm)	Limit		Conclusion
			dBm	W	
GFSK	2403.5	12.31	21.00	0.125	Pass
	2440.4	12.07	21.00	0.125	Pass
	2477.3	11.58	21.00	0.125	Pass


3.4. Test Data

GFSK 2403.5 MHz

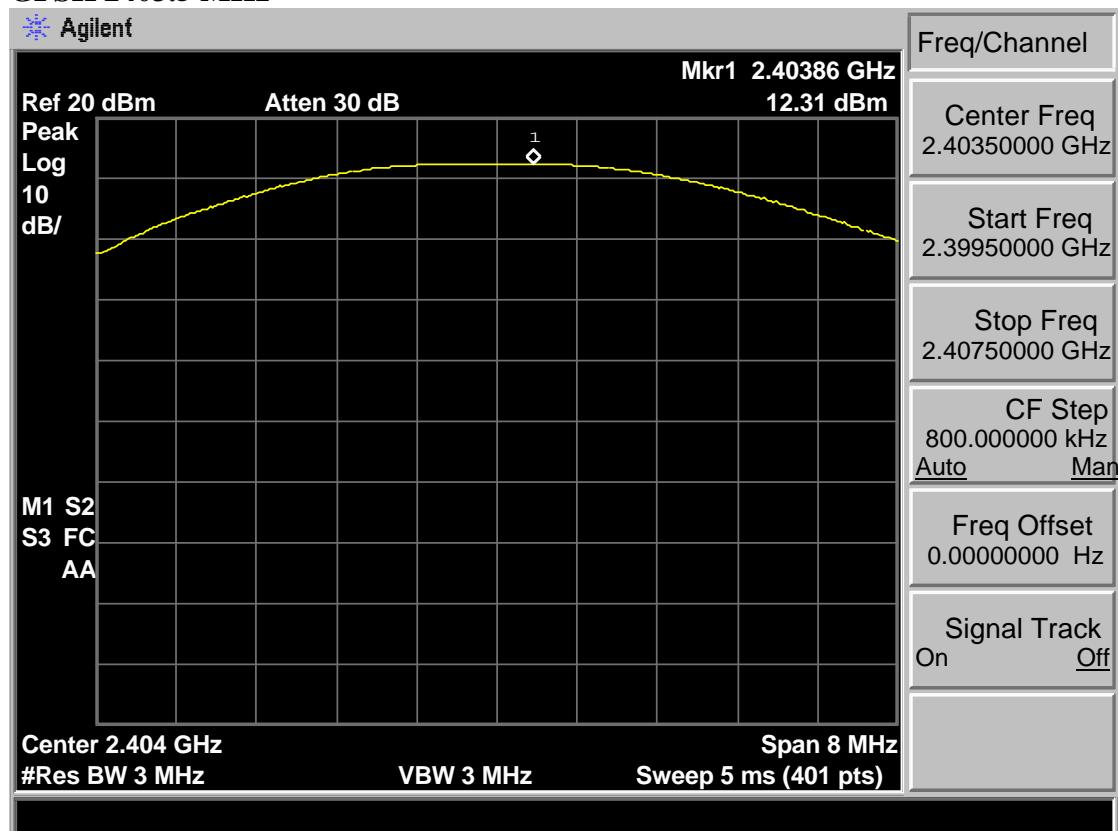

GFSK 2440.4 MHz

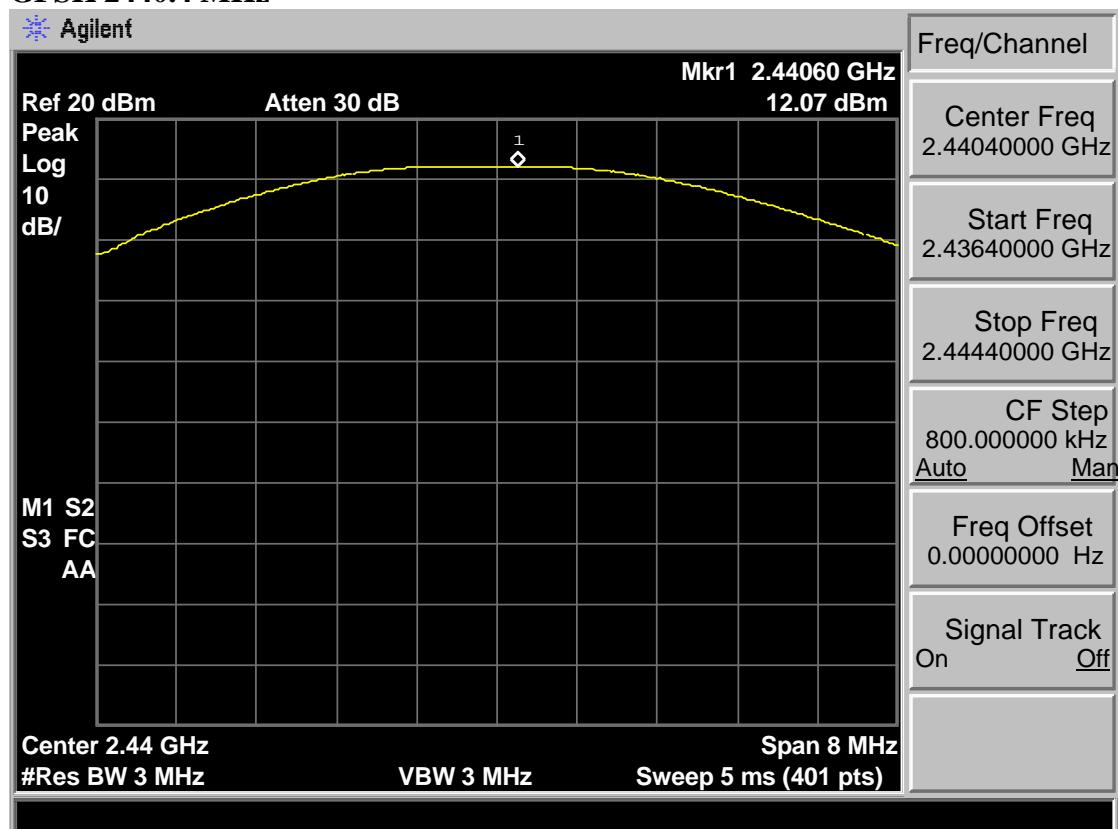

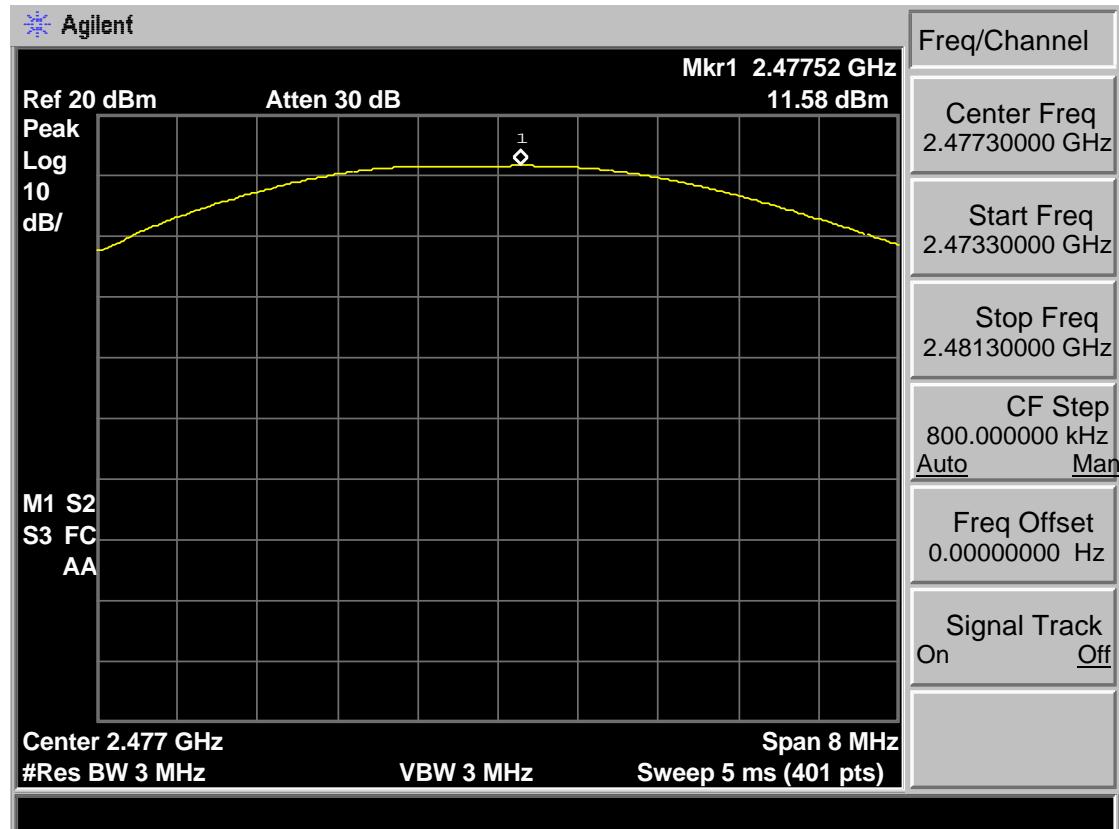GFSK 2477.3 MHz

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: 3.1 Home Theater Sound Bar and Wireless Subwoofer System				
M/N: STUDIO SLIM				
Test date: 2018-11-15	Test site: RF site		Tested by: Viking	
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2403.5	2.282	/	PASS
	2440.4	2.278	/	PASS
	2477.3	2.282	/	PASS

4.4. Test Data


GFSK 2403.5MHz

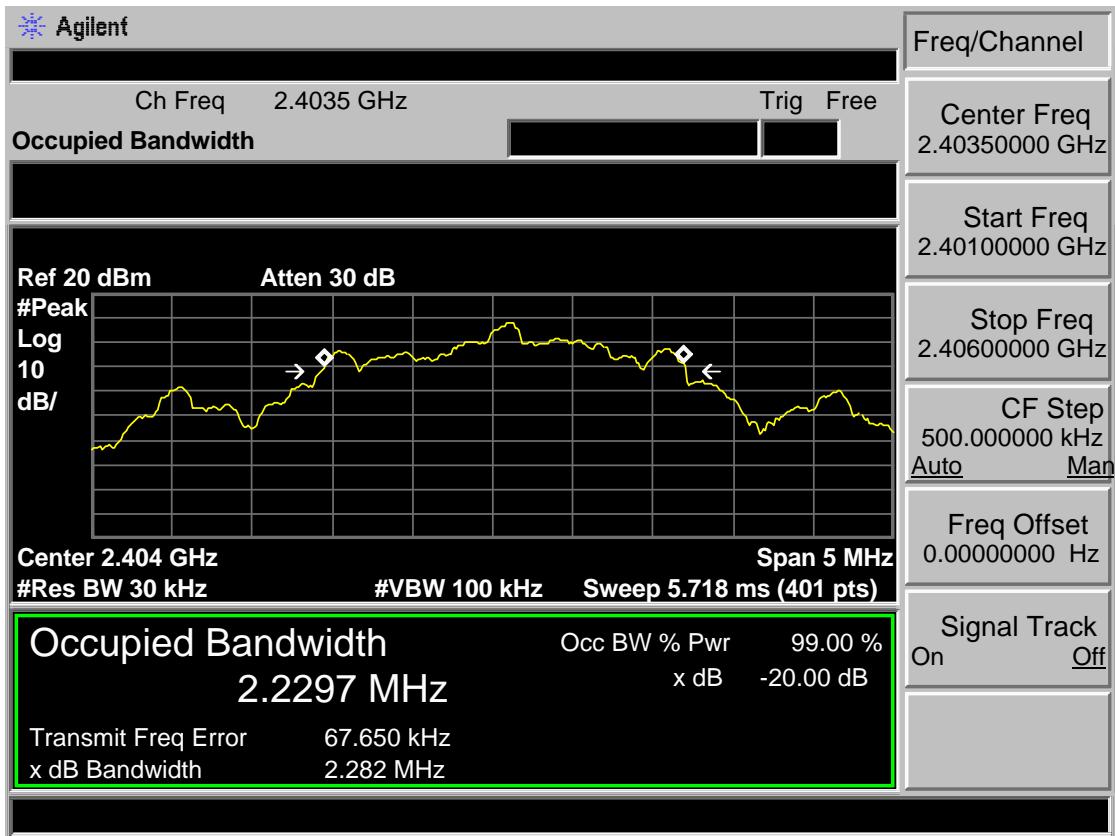

GFSK 2440.4MHz

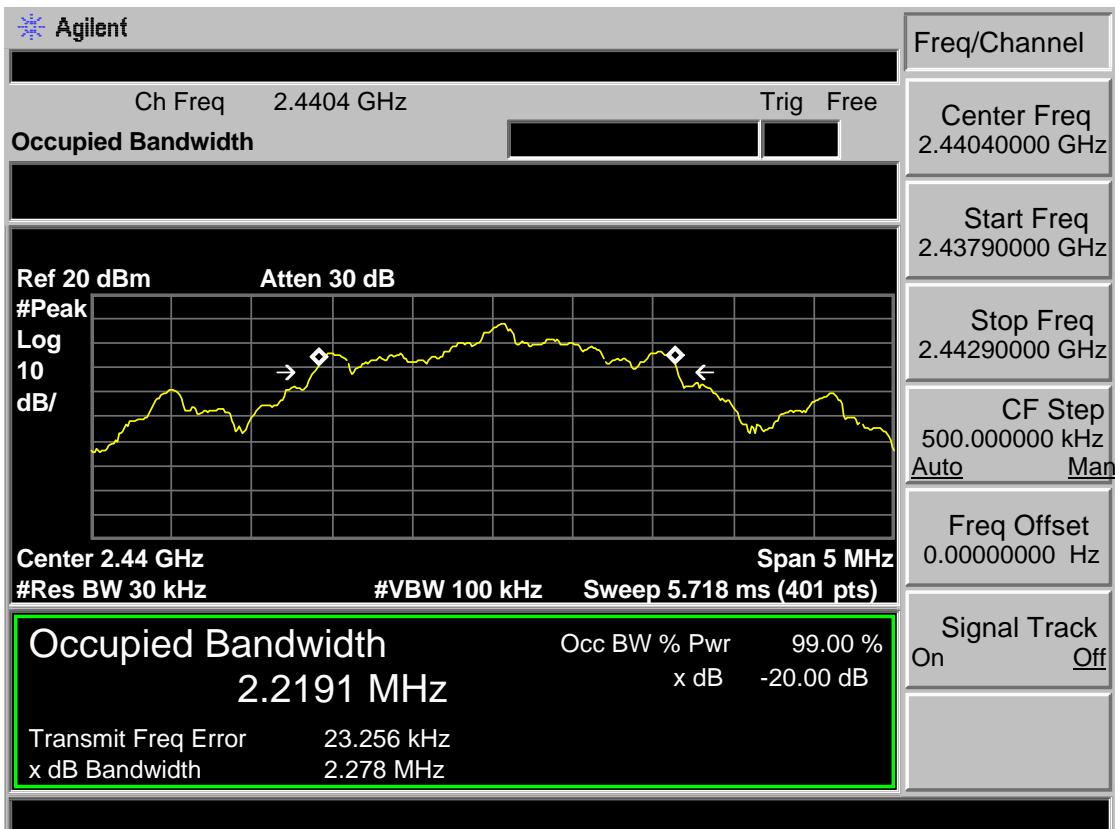

GFSK 2477.3MHz

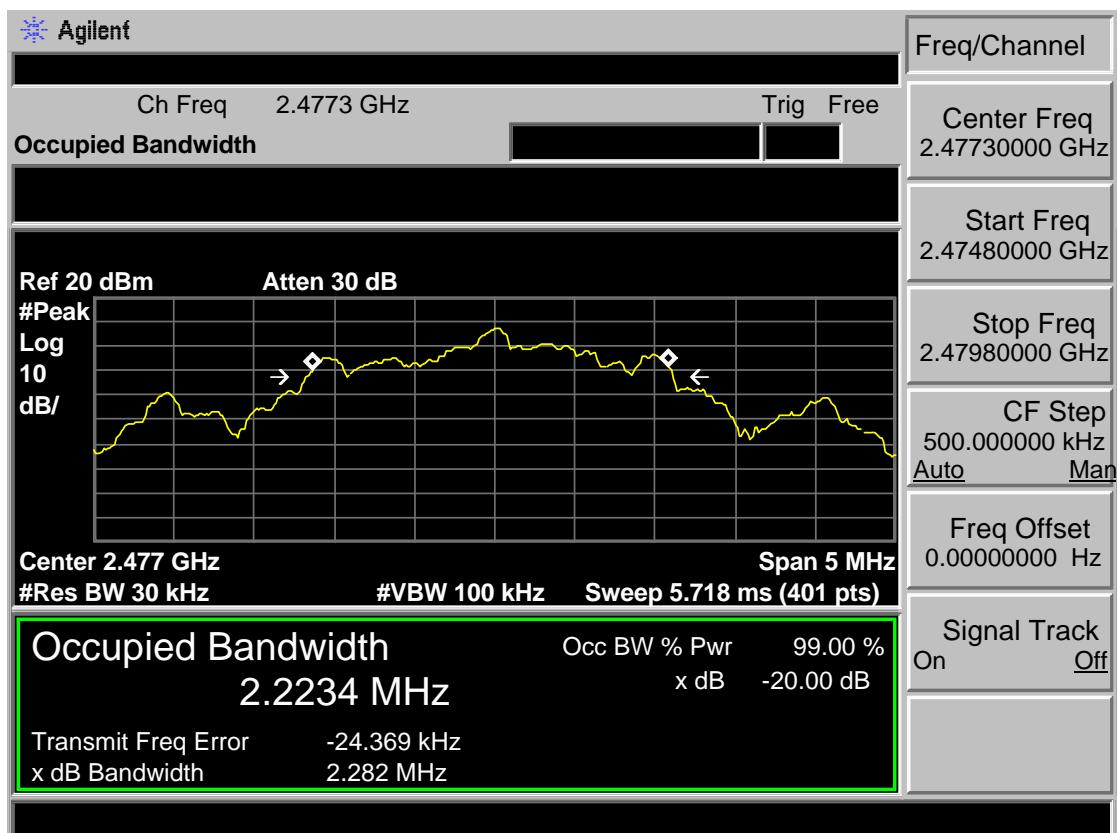

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



5.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.3. Test Result

EUT: 3.1 Home Theater Sound Bar and Wireless Subwoofer System				
M/N: STUDIO SLIM				
Test date: 2018-11-15		Test site: RF site		Tested by: Viking
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.53	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.53		PASS
	High CH	1.53		PASS

5.4. Test Data

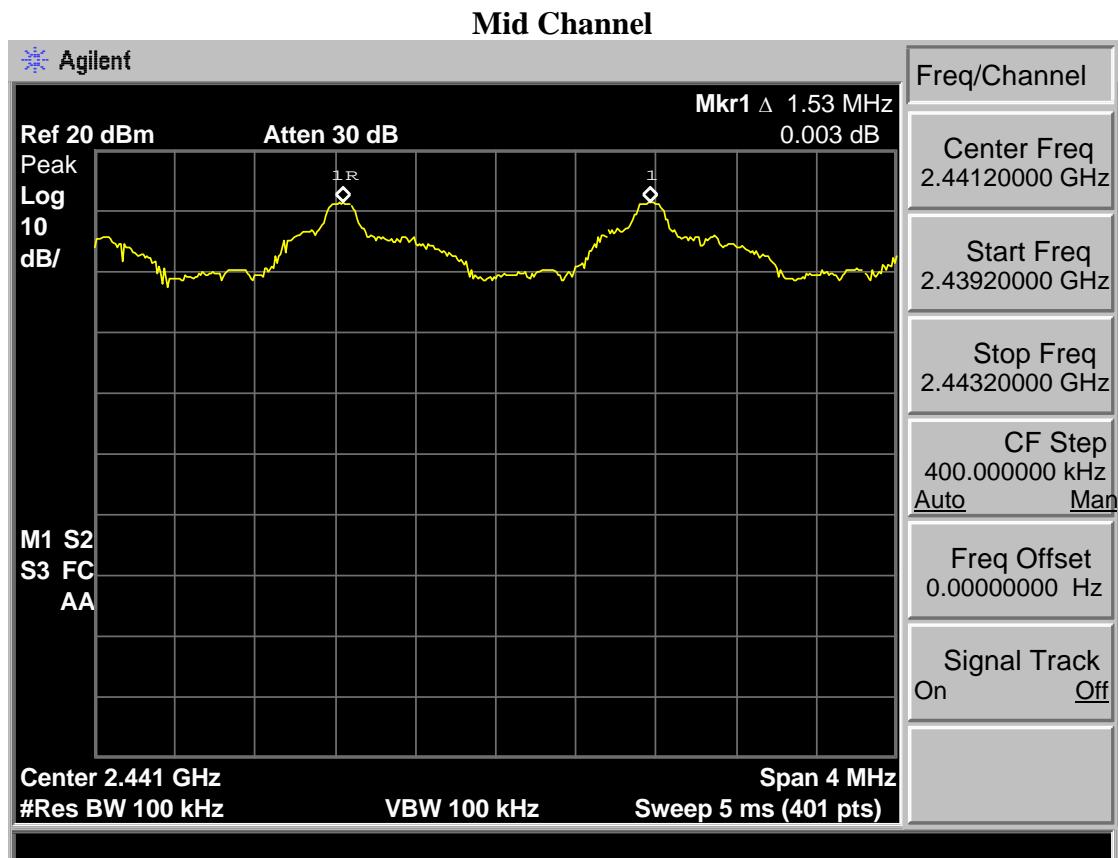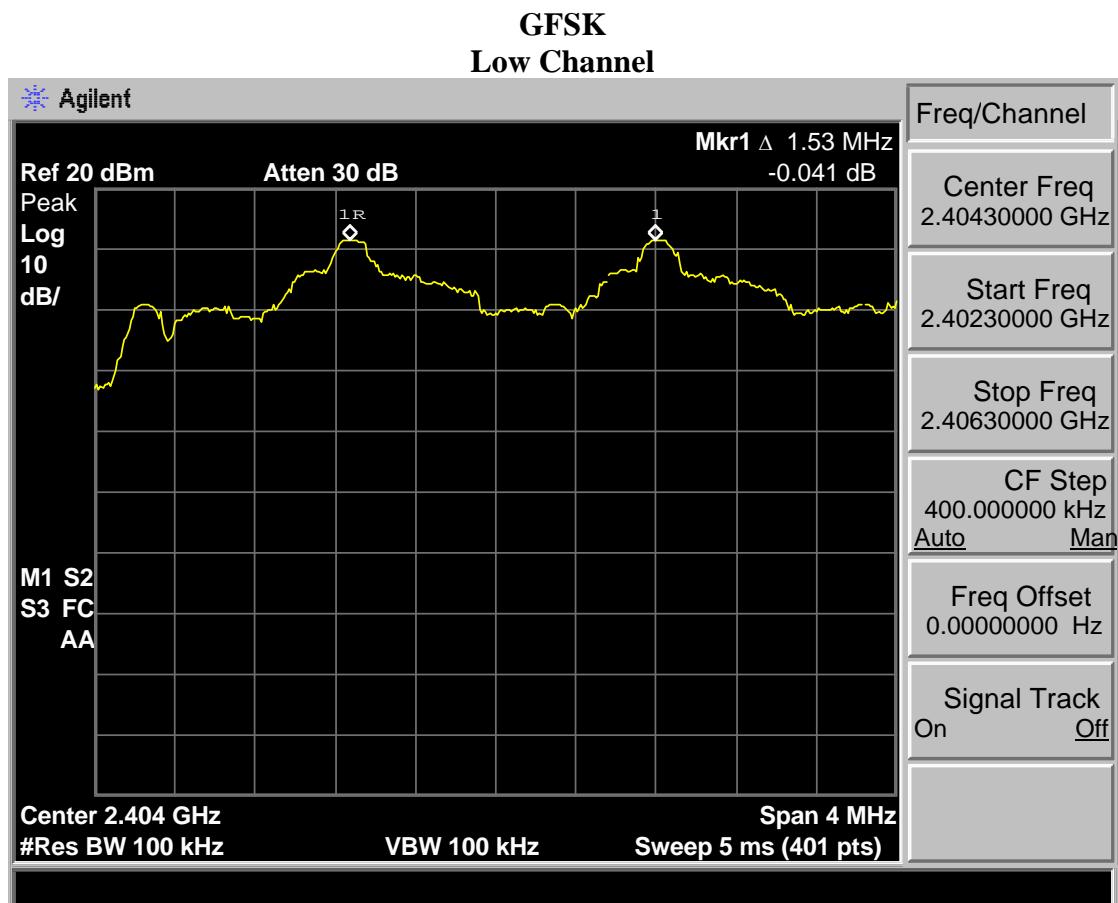

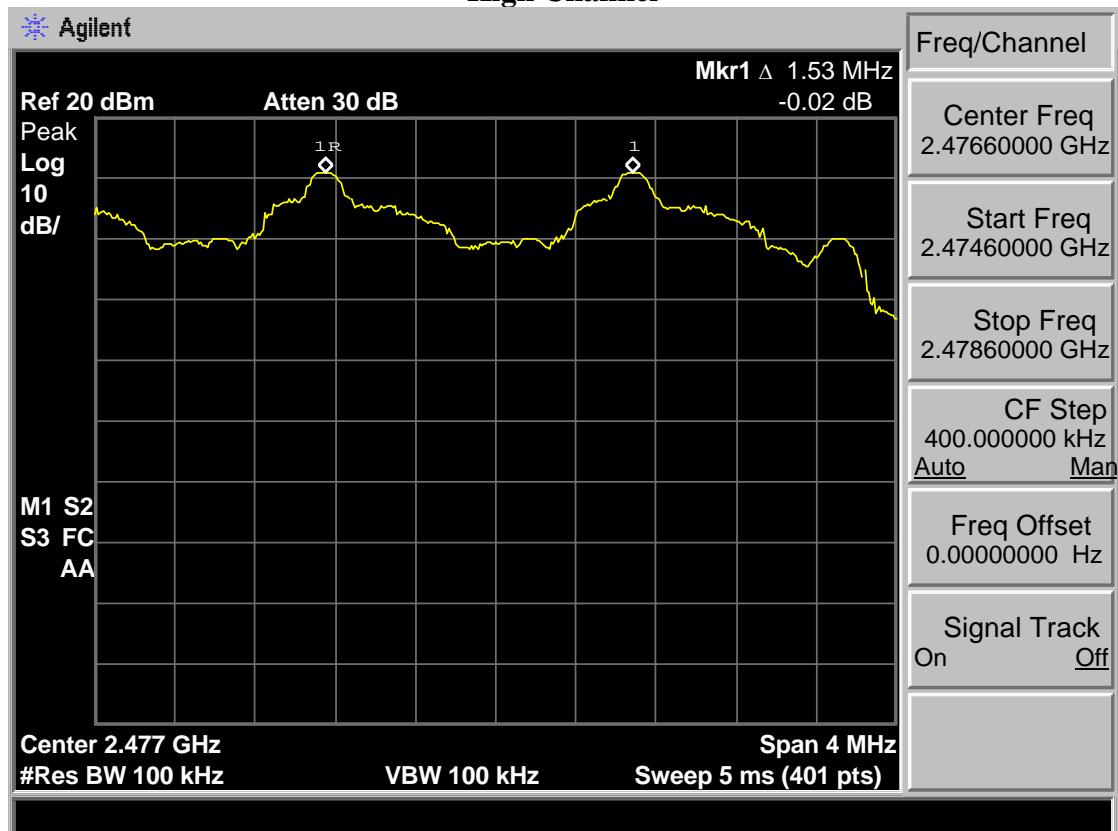High Channel

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result

EUT: 3.1 Home Theater Sound Bar and Wireless Subwoofer System			
M/N: STUDIO SLIM			
Test date: 2018-11-15	Test site: RF site	Tested by: Viking	
Mode	Number of hopping channel	Limit	Conclusion
GFSK	49	>15	PASS

6.4. Test Data

GFSK

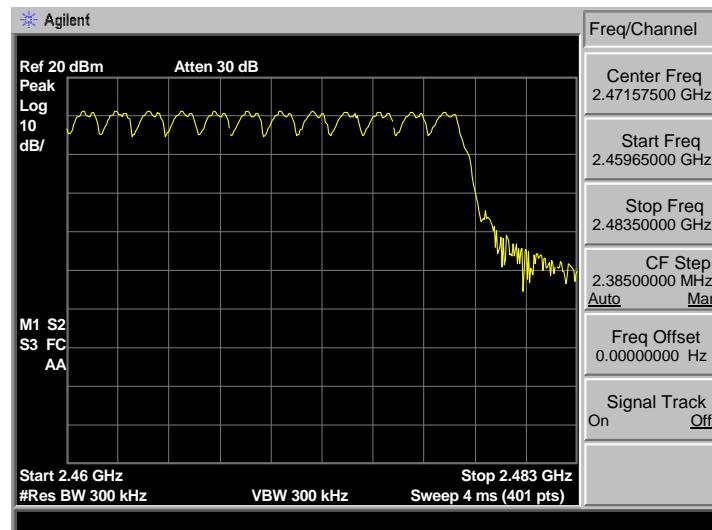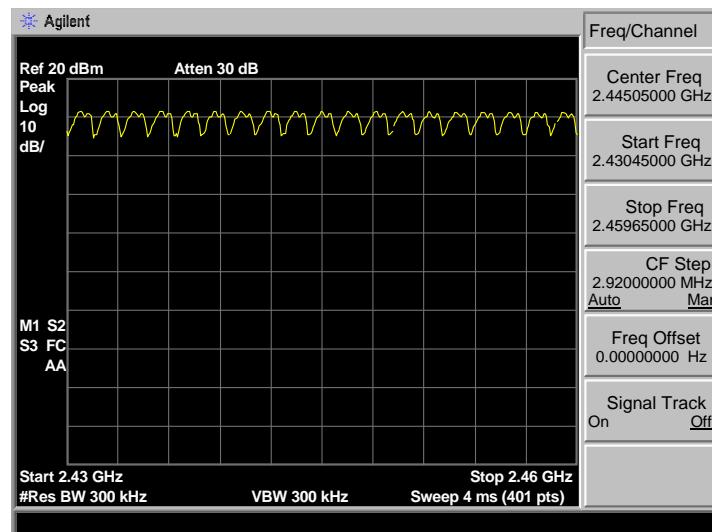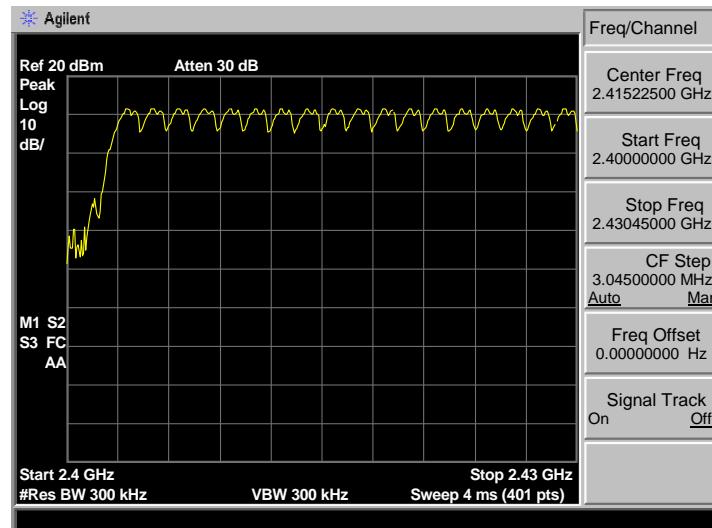

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure



1. The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW= 1MHz, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

7.3. Test Result

EUT: 3.1 Home Theater Sound Bar and Wireless Subwoofer System						
M/N: STUDIO SLIM						
Test date: 2018-11-15		Test site: RF site			Tested by: Viking	
Mode	Hopping number	Measure time (s)	Burst on time (ms)	Dwell time (ms)	Limit	Conclusion
GFSK	18	5	4.35	306.94	<400ms	PASS

Dwell time = Hopping number/measure time *0.4*49*burst on time.

7.4. Test Data

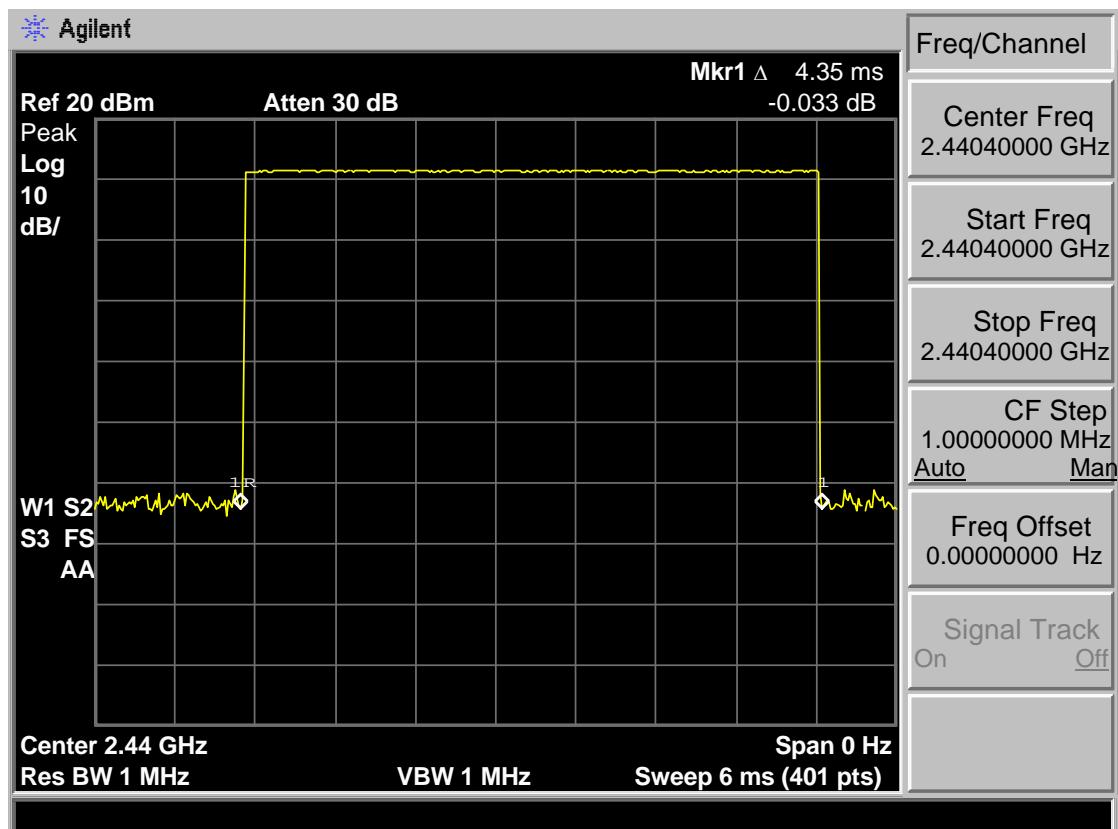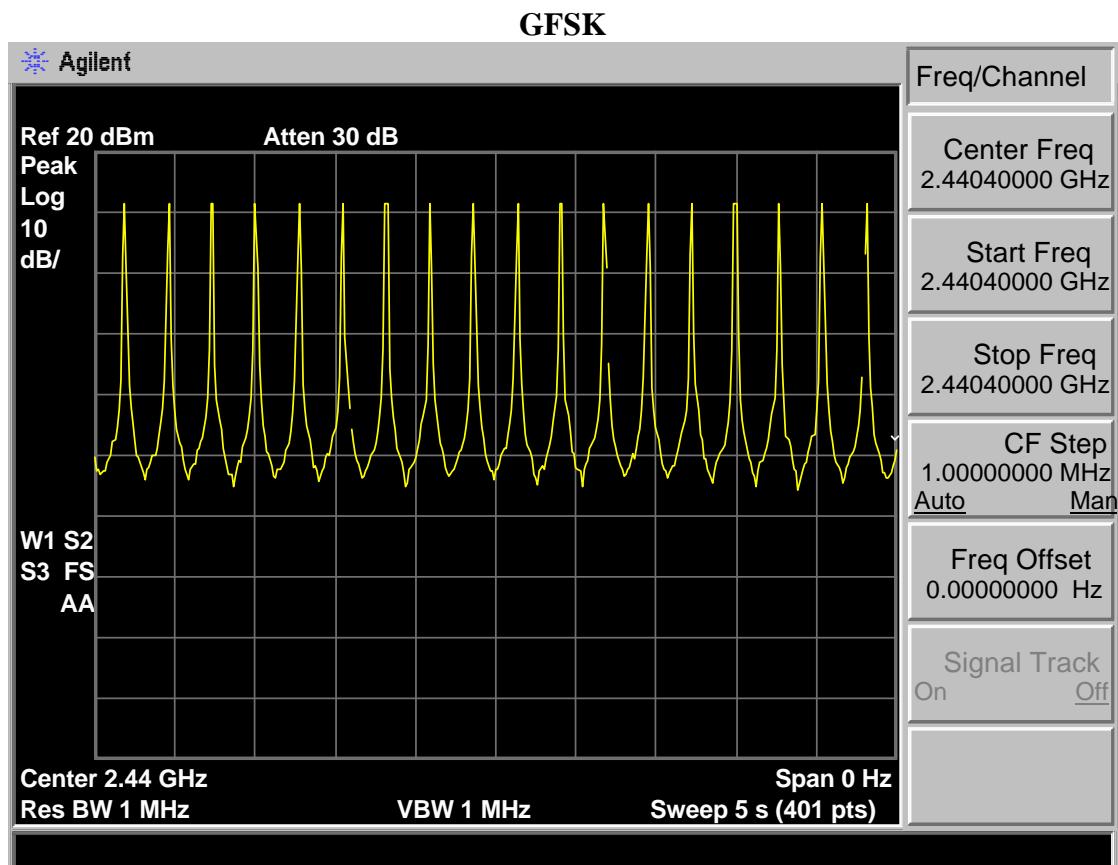

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Block Diagram of Test setup

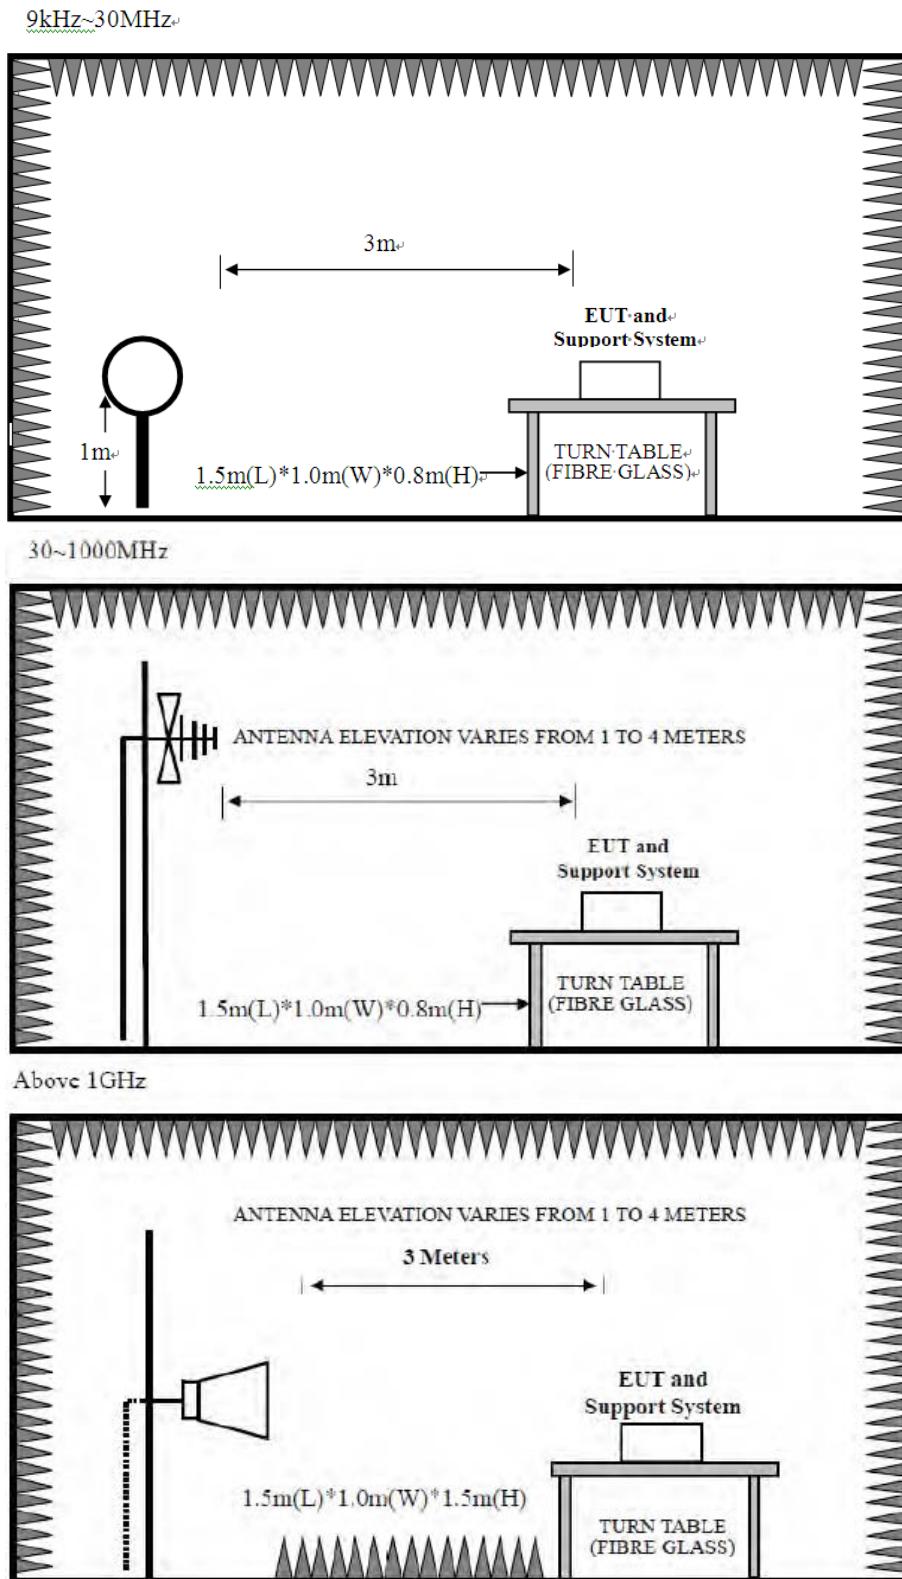

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result

Pass

- Note:
- 1、For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
 - 2、The frequency 2403.5MHz 、 2440.4MHz and 2477.3MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

8.5. Test Data

9 kHz – 30 MHz


Pass

Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30 MHz – 1000 MHz

EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

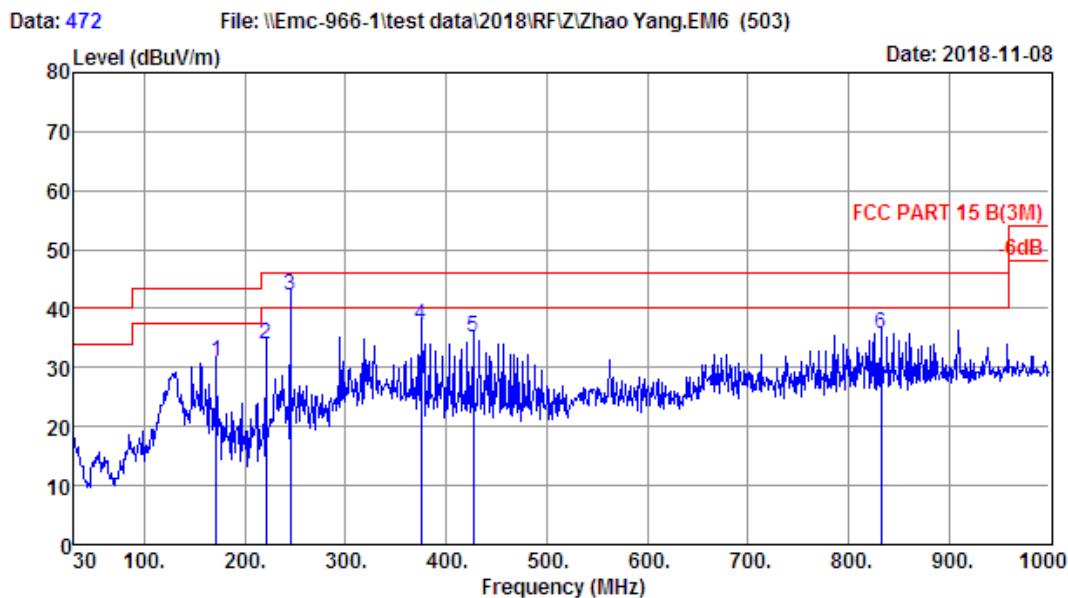

Site no. : 1# 966 Chamber Data no. : 472
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Emission				Remark
			Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
1 171.62	9.82	1.42	19.68	30.92	43.50	12.58	QP
2 221.09	9.86	1.66	22.44	33.96	46.00	12.04	QP
3 245.34	11.60	1.82	28.66	42.08	46.00	3.92	QP
4 375.32	15.40	2.37	19.48	37.25	46.00	8.75	QP
5 426.73	16.64	2.47	16.07	35.18	46.00	10.82	QP
6 832.19	23.04	3.90	8.78	35.72	46.00	10.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 473

File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

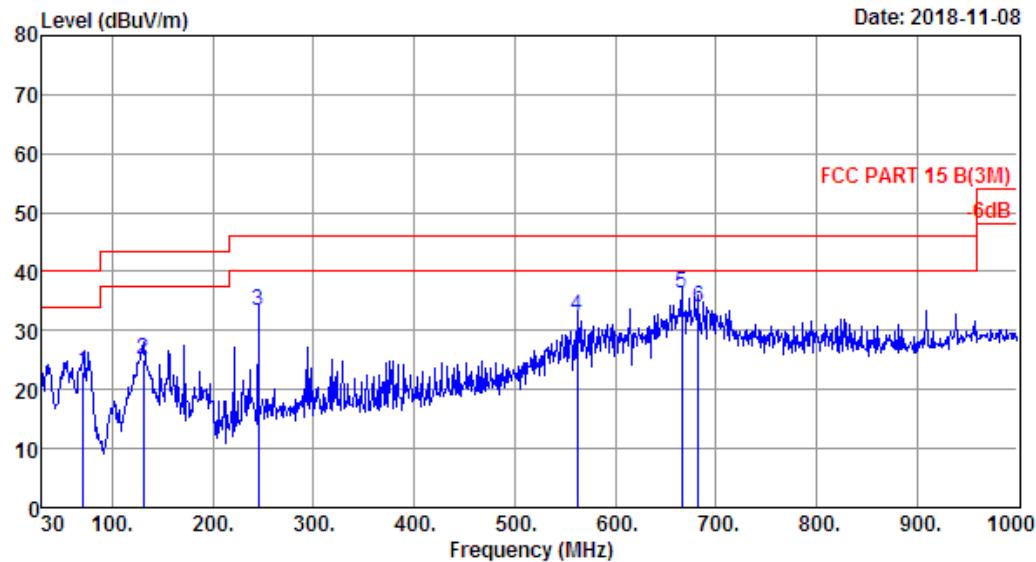

Site no. : 1# 966 Chamber Data no. : 473
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Emission				Remark
			Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
1 70.74	6.20	0.71	16.13	23.04	40.00	16.96	QP
2 130.88	11.90	1.20	11.95	25.05	43.50	18.45	QP
3 245.34	11.60	1.82	19.79	33.21	46.00	12.79	QP
4 562.53	19.43	3.08	9.99	32.50	46.00	13.50	QP
5 666.32	21.10	3.45	11.81	36.36	46.00	9.64	QP
6 682.81	21.23	3.40	9.35	33.98	46.00	12.02	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

1000-18000MHz**EST Technology**

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 490 File: \Emc-966-1\test data\2018\RFI\Z\Zhao Yang.EM6 (503)

Date: 2018-11-08

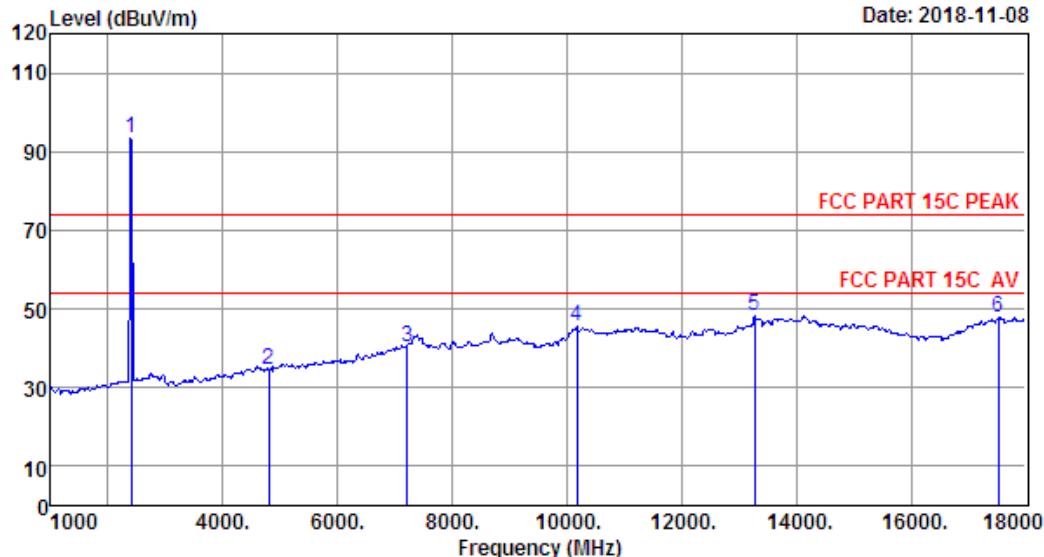

Site no. : 1# 966 Chamber Data no. : 490
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2403.5MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission				Remark
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2403.50	27.39	3.23	34.94	97.56	93.24	74.00	-19.24		Peak
2 4807.00	32.06	4.67	35.06	32.96	34.63	74.00	39.37		Peak
3 7210.50	36.56	5.99	33.45	31.31	40.41	74.00	33.59		Peak
4 10180.00	39.17	9.62	34.47	31.40	45.72	74.00	28.28		Peak
5 13274.00	40.76	9.36	32.66	30.65	48.11	74.00	25.89		Peak
6 17524.00	43.44	11.60	31.18	23.99	47.85	74.00	26.15		Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 491 File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

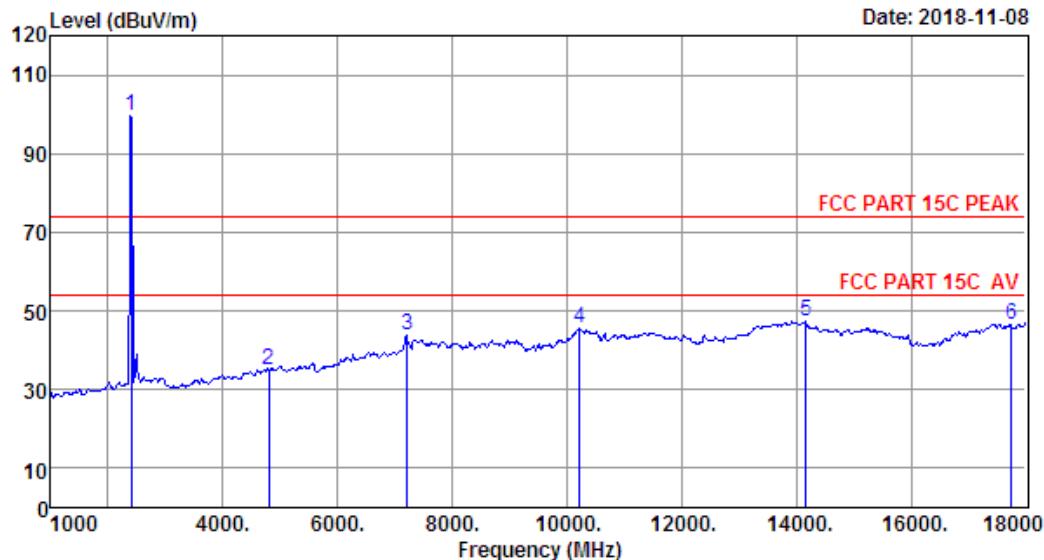

Site no. : 1# 966 Chamber Data no. : 491
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2403.5MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2403.50	27.39	3.23	34.94	103.89	99.57	74.00	-25.57	Peak	
2 4807.00	32.06	4.67	35.06	33.23	34.90	74.00	39.10	Peak	
3 7210.50	36.56	5.99	33.45	34.69	43.79	74.00	30.21	Peak	
4 10214.00	39.19	9.77	34.43	30.92	45.45	74.00	28.55	Peak	
5 14175.00	41.53	10.15	33.11	28.77	47.34	74.00	26.66	Peak	
6 17745.00	44.03	12.08	31.18	21.64	46.57	74.00	27.43	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 492 File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

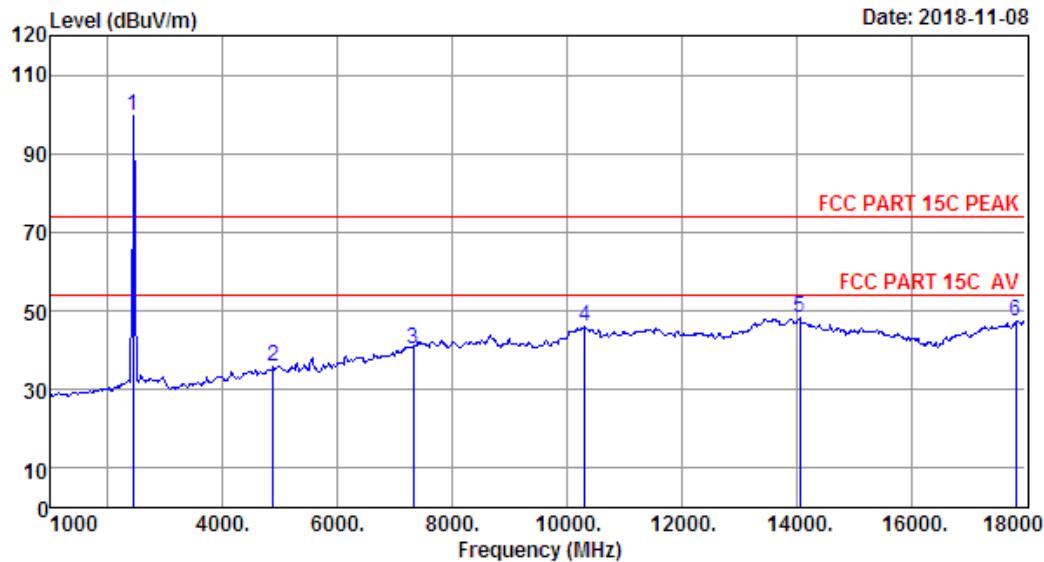

Site no. : 1# 966 Chamber Data no. : 492
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2440.4MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2440.40	27.48	3.26	35.07	103.87	99.54	74.00	-25.54	Peak	
2 4880.80	32.18	4.73	35.14	34.22	35.99	74.00	38.01	Peak	
3 7321.20	36.82	6.10	33.28	30.72	40.36	74.00	33.64	Peak	
4 10316.00	39.23	10.20	34.34	30.87	45.96	74.00	28.04	Peak	
5 14056.00	41.65	10.13	32.95	29.40	48.23	74.00	25.77	Peak	
6 17830.00	44.25	12.27	31.21	22.28	47.59	74.00	26.41	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 493 File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

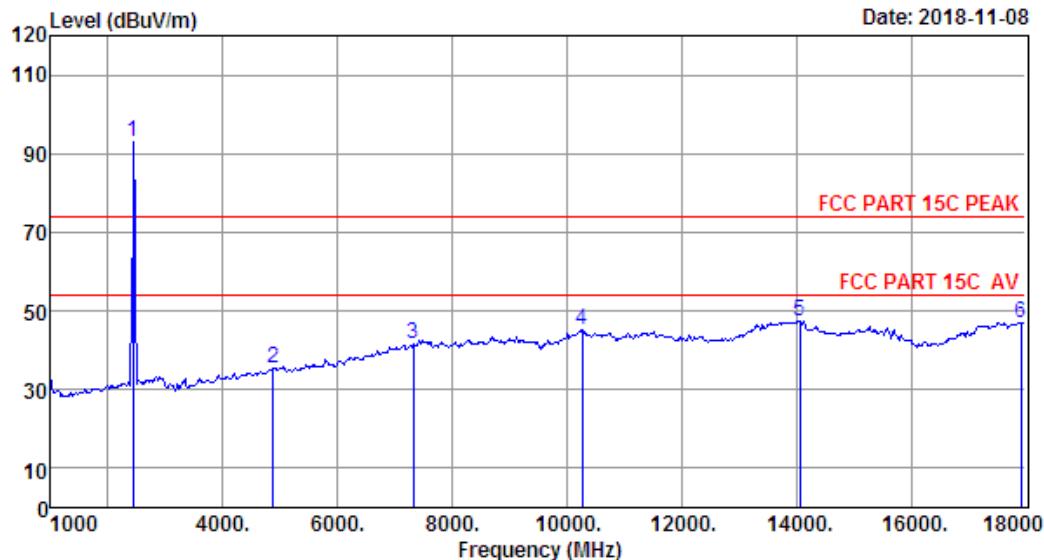

Site no. : 1# 966 Chamber Data no. : 493
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2440.4MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2440.40	27.48	3.26	35.07	97.13	92.80	74.00	-18.80	Peak
2 4880.80	32.18	4.73	35.14	33.59	35.36	74.00	38.64	Peak
3 7321.20	36.82	6.10	33.28	32.00	41.64	74.00	32.36	Peak
4 10265.00	39.21	9.98	34.39	30.45	45.25	74.00	28.75	Peak
5 14056.00	41.65	10.13	32.95	28.62	47.45	74.00	26.55	Peak
6 17915.00	44.48	12.45	31.40	21.54	47.07	74.00	26.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 494 File: \Emc-966-1\test data\2018\RF\Z\Zhao Yang.EM6 (503)

Date: 2018-11-08

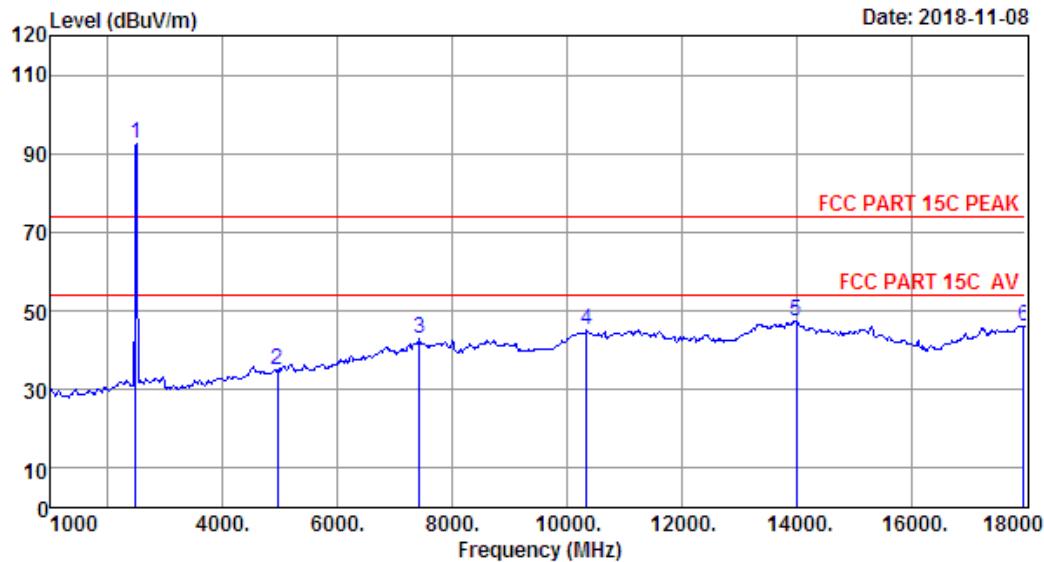

Site no. : 1# 966 Chamber Data no. : 494
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2477.3MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2477.30	27.56	3.29	35.21	96.79	92.43	74.00	-18.43	Peak	
2 4954.60	32.34	4.80	35.22	33.00	34.92	74.00	39.08	Peak	
3 7431.90	37.05	6.13	33.11	32.84	42.91	74.00	31.09	Peak	
4 10350.00	39.24	10.10	34.30	30.22	45.26	74.00	28.74	Peak	
5 14005.00	41.70	10.13	32.88	28.55	47.50	74.00	26.50	Peak	
6 17966.00	44.61	12.57	31.48	20.43	46.13	74.00	27.87	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 495 File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

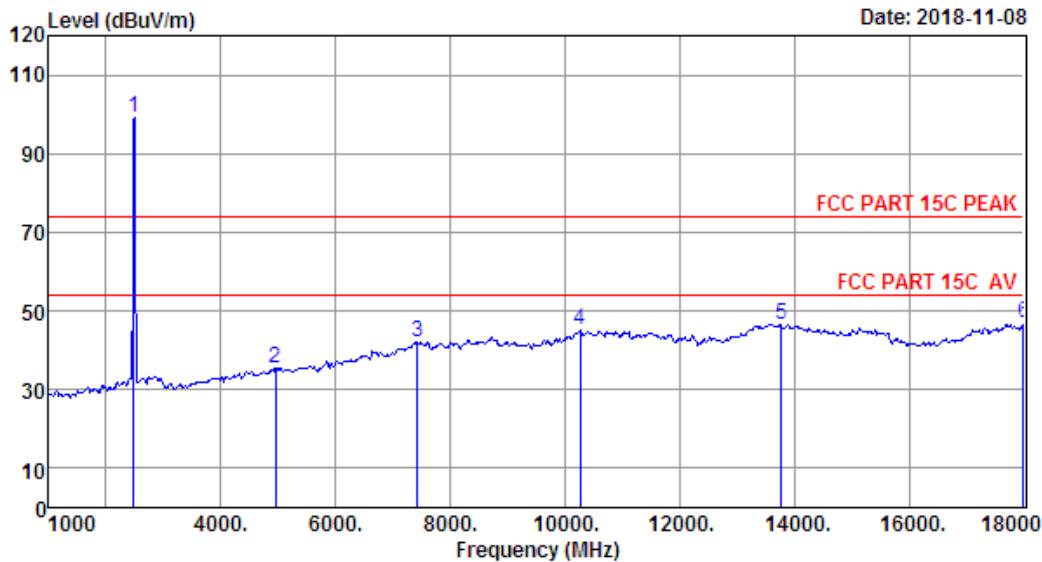

Site no. : 1# 966 Chamber Data no. : 495
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2477.3MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2477.30	27.56	3.29	35.21	103.47	99.11	74.00	-25.11	Peak	
2 4954.60	32.34	4.80	35.22	33.56	35.48	74.00	38.52	Peak	
3 7431.90	37.05	6.13	33.11	32.03	42.10	74.00	31.90	Peak	
4 10265.00	39.21	9.98	34.39	30.26	45.06	74.00	28.94	Peak	
5 13767.00	41.51	10.03	32.70	27.76	46.60	74.00	27.40	Peak	
6 18000.00	44.70	12.64	31.56	21.32	47.10	74.00	26.90	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

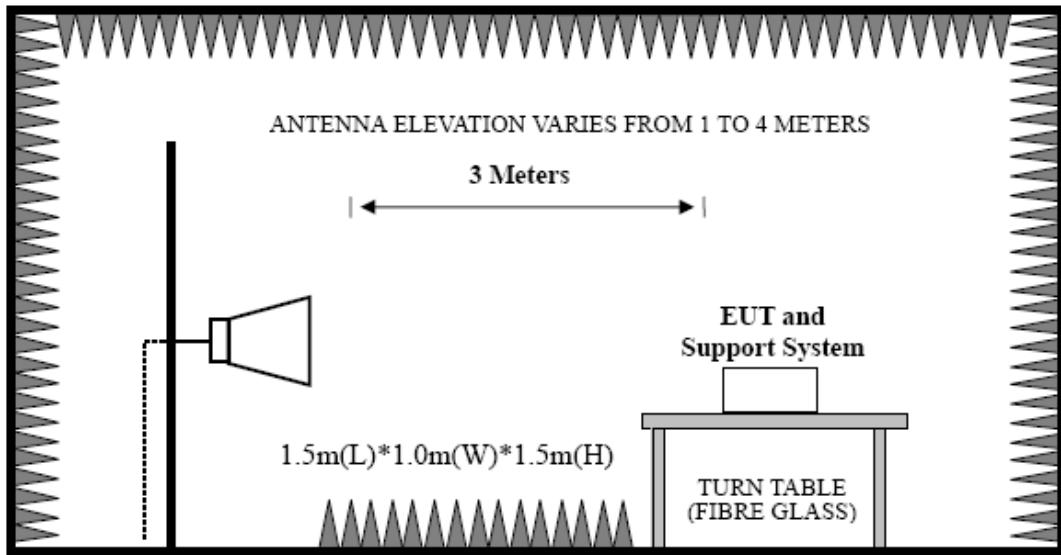

9.3. Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.

9.4. Test Result

Pass (The testing data was attached in the next pages.)

Note: 1、For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


2、The frequency 2403.5MHz and 2477.3MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

9.5. Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 496 File: \Emc-966-1\test data\2018\RF\Z\Zhao Yang.EM6 (503)

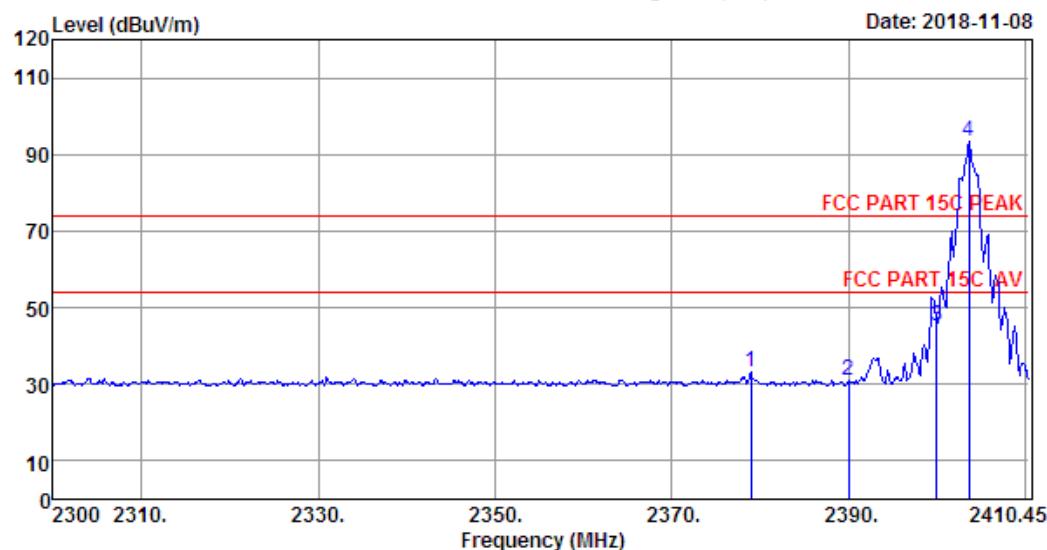

Site no. : 1# 966 Chamber Data no. : 496
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2403.5MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2378.97	27.31	3.20	34.80	37.44	33.15	74.00	40.85	Peak
2	2390.00	27.35	3.21	34.87	35.16	30.85	74.00	43.15	Peak
3	2400.00	27.35	3.21	34.94	49.67	45.29	74.00	28.71	Peak
4	2403.60	27.39	3.23	34.94	97.65	93.33	74.00	-19.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 497

File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

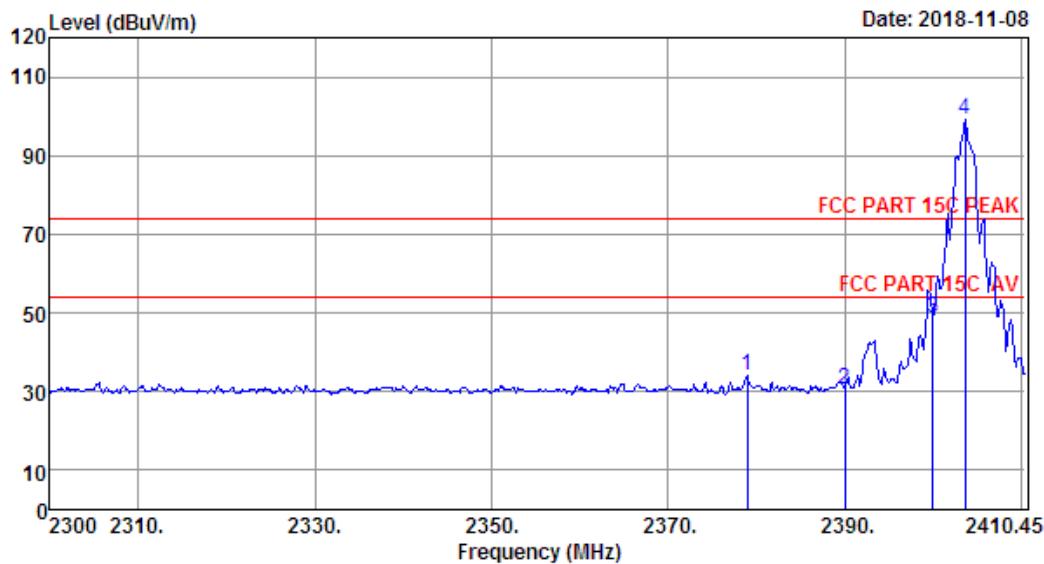

Site no. : 1# 966 Chamber Data no. : 497
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2403.5MHz(No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission				Remark
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2378.97	27.31	3.20	34.80	38.40	34.11	74.00	39.89		Peak
2 2390.00	27.35	3.21	34.87	34.89	30.58	74.00	43.42		Peak
3 2400.00	27.35	3.21	34.94	53.13	48.75	74.00	25.25		Peak
4 2403.60	27.39	3.23	34.94	103.61	99.29	74.00	-25.29		Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 498 File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

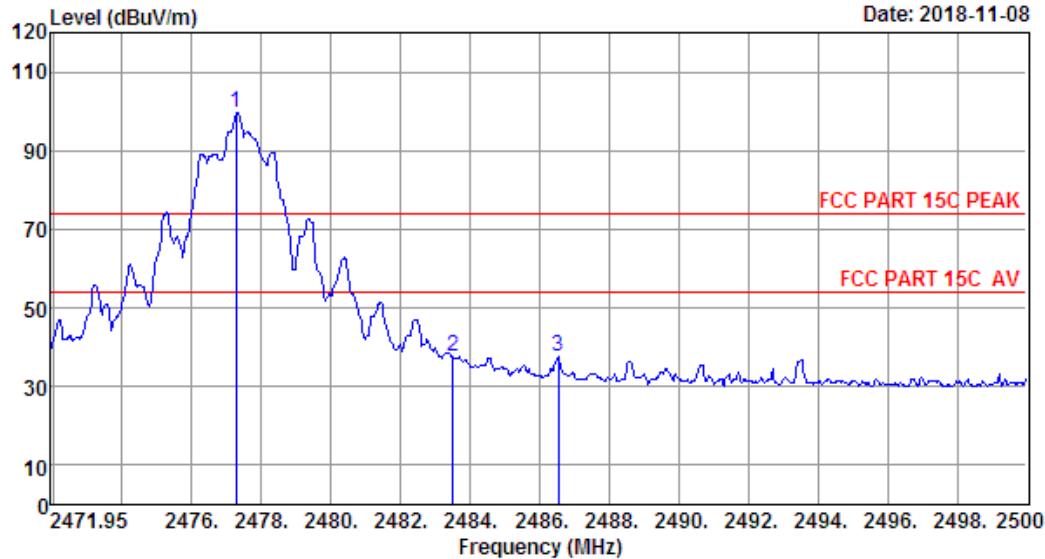

Site no. : 1# 966 Chamber Data no. : 498
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2477.3MHz(No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1 2477.28	27.56	3.29	35.21	104.05	99.69	74.00	-25.69	Peak	
2 2483.50	27.56	3.29	35.21	41.89	37.53	74.00	36.47	Peak	
3 2486.54	27.56	3.29	35.21	42.02	37.66	74.00	36.34	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

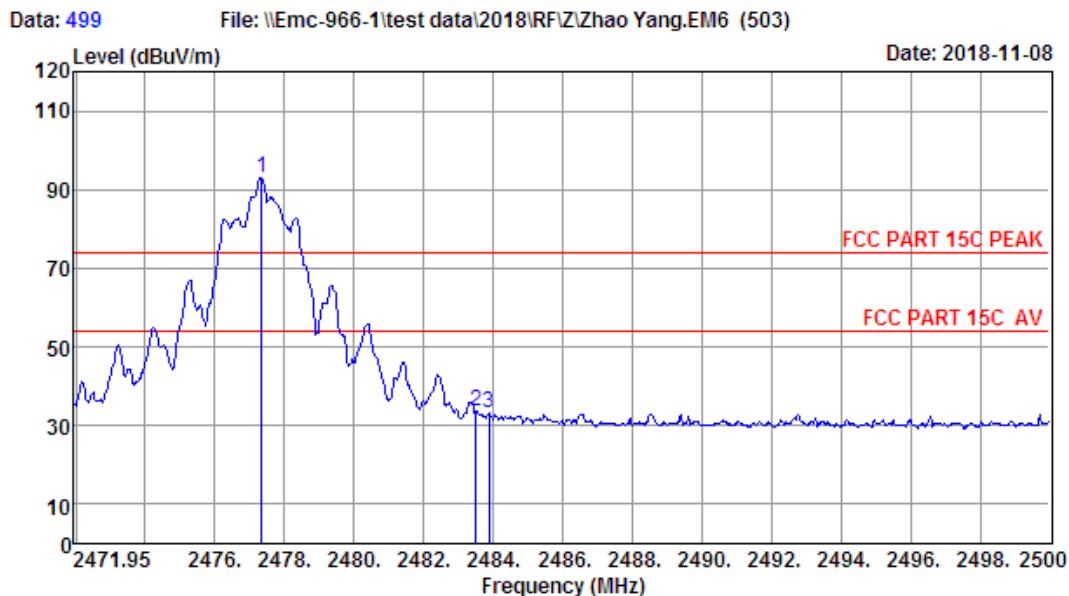

Site no. : 1# 966 Chamber Data no. : 499
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2477.3MHz(No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission			
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2477.34	27.56	3.29	35.21	97.42	93.06	74.00	-19.06	Peak
2 2483.50	27.56	3.29	35.21	38.19	33.83	74.00	40.17	Peak
3 2483.87	27.56	3.29	35.21	37.53	33.17	74.00	40.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

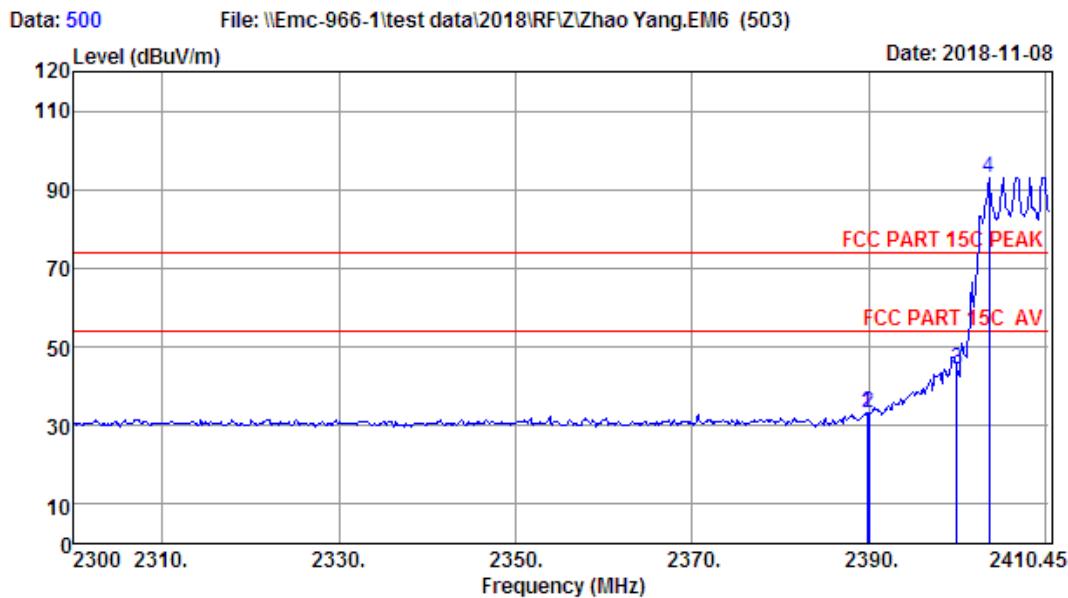

Site no. : 1# 966 Chamber Data no. : 500
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2403.5MHz(Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2389.80	27.35	3.21	34.87	37.45	33.14	74.00	40.86	Peak	
2 2390.00	27.35	3.21	34.87	37.52	33.21	74.00	40.79	Peak	
3 2400.00	27.35	3.21	34.94	48.64	44.26	74.00	29.74	Peak	
4 2403.60	27.39	3.23	34.94	97.45	93.13	74.00	-19.13	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 501 File: \\Emc-966-1\\test data\\2018\\RF\\Z\\Zhao Yang.EM6 (503)

Date: 2018-11-08

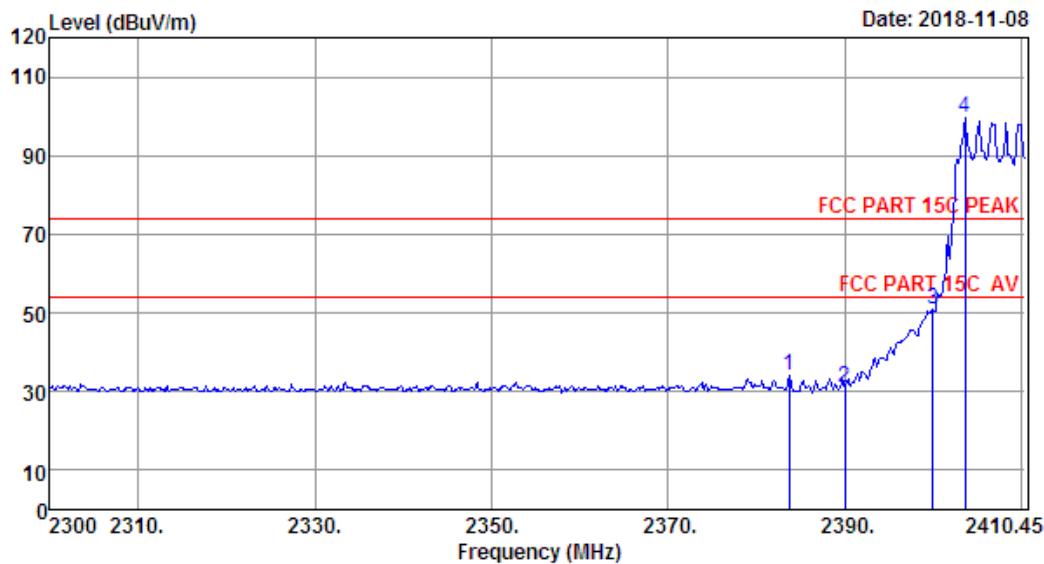


Site no. : 1# 966 Chamber Data no. : 501
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2403.5MHz(Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2383.72	27.31	3.20	34.87	38.45	34.09	74.00	39.91	Peak	
2 2390.00	27.35	3.21	34.87	35.10	30.79	74.00	43.21	Peak	
3 2400.00	27.35	3.21	34.94	55.24	50.86	74.00	23.14	Peak	
4 2403.60	27.39	3.23	34.94	103.90	99.58	74.00	-25.58	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

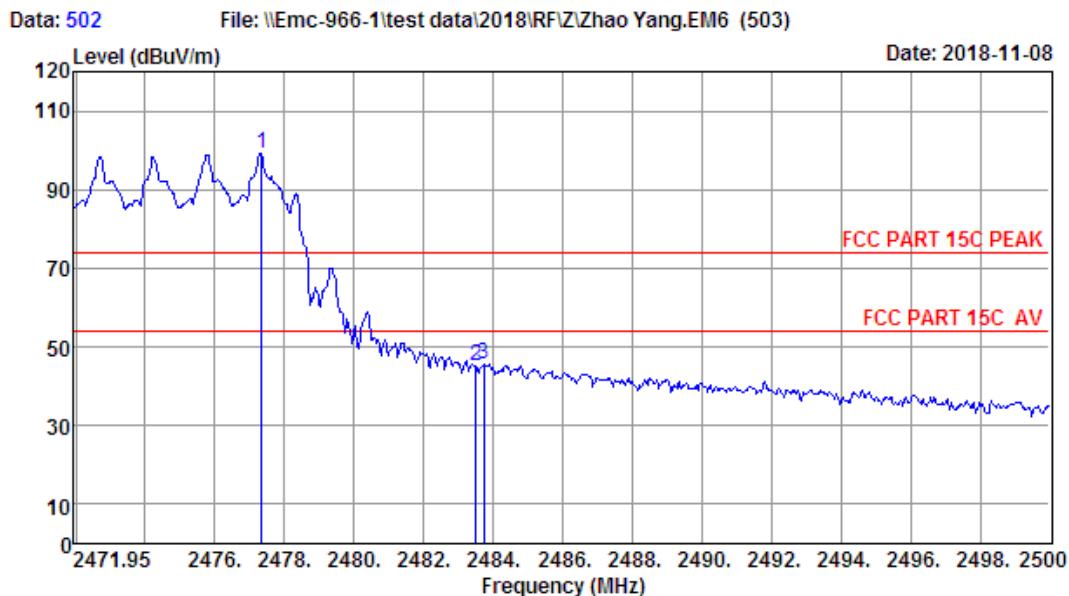

Site no. : 1# 966 Chamber Data no. : 502
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2477.3MHz(Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	2477.34	27.56	3.29	35.21	103.56	99.20	74.00	-25.20	Peak
2	2483.50	27.56	3.29	35.21	49.36	45.00	74.00	29.00	Peak
3	2483.73	27.56	3.29	35.21	50.07	45.71	74.00	28.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official
limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

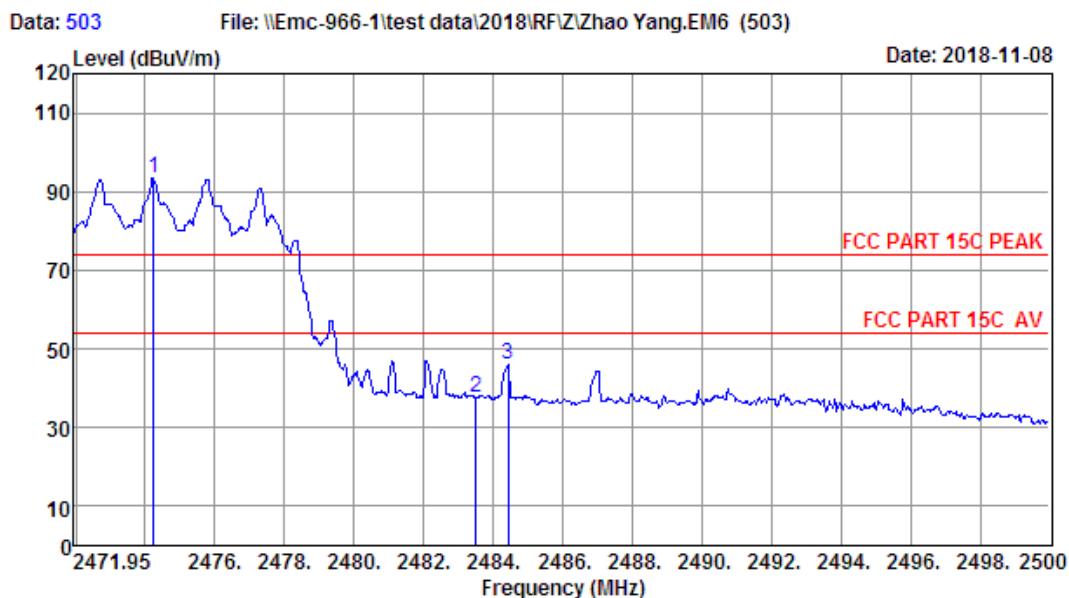

Site no. : 1# 966 Chamber Data no. : 503
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and
 Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : FSK TX 2477.3MHz(Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	2474.25	27.56	3.29	35.21	97.74	93.38	74.00	-19.38	Peak
2	2483.50	27.56	3.29	35.21	42.05	37.69	74.00	36.31	Peak
3	2484.43	27.56	3.29	35.21	50.44	46.08	74.00	27.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.

10. POWER LINE CONDUCTED EMISSIONS

10.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.


10.3. Test Result

PASS. (All emissions not reported below are too low against the prescribed limits.)

10.4. Test data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

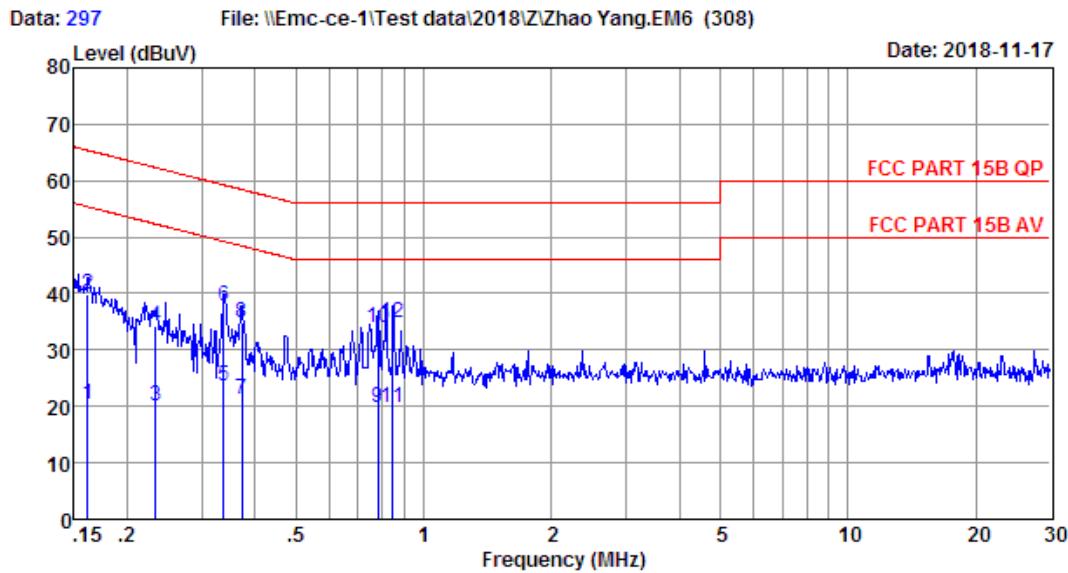

Site no : 844 Shield Room Data no. : 297
Env. / Ins. : Temp:23.9'C Humi:50.5% Press:101.50kPaNE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : Viking
EUT : 3.1 Home Theater Sound Bar and Wireless Subwoofer System
Power : DC 24V From Adapter Input AC 240V/60Hz
M/N : STUDIO SLIM
Test Mode : TX Mode

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Emission				Remark
			Reading (dBuV)	Level (dBuv)	Limits (dBuv)	Margin (dB)	
1	0.16	9.61	9.69	1.20	20.50	55.38	Average
2	0.16	9.61	9.69	20.53	39.83	65.38	QP
3	0.23	9.62	9.84	0.67	20.13	52.35	Average
4	0.23	9.62	9.84	14.89	34.35	62.35	QP
5	0.34	9.63	9.92	4.20	23.75	49.27	Average
6	0.34	9.63	9.92	18.19	37.74	59.27	QP
7	0.37	9.64	9.92	1.59	21.15	48.43	Average
8	0.37	9.64	9.92	15.26	34.82	58.43	QP
9	0.78	9.70	9.93	0.26	19.89	46.00	Average
10	0.78	9.70	9.93	14.18	33.81	56.00	QP
11	0.84	9.71	9.93	0.20	19.84	46.00	Average
12	0.84	9.71	9.93	15.11	34.75	56.00	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 299 File: \Emc-ce-1\Test data\2018\Zhao Yang.EM6 (308)

Date: 2018-11-17

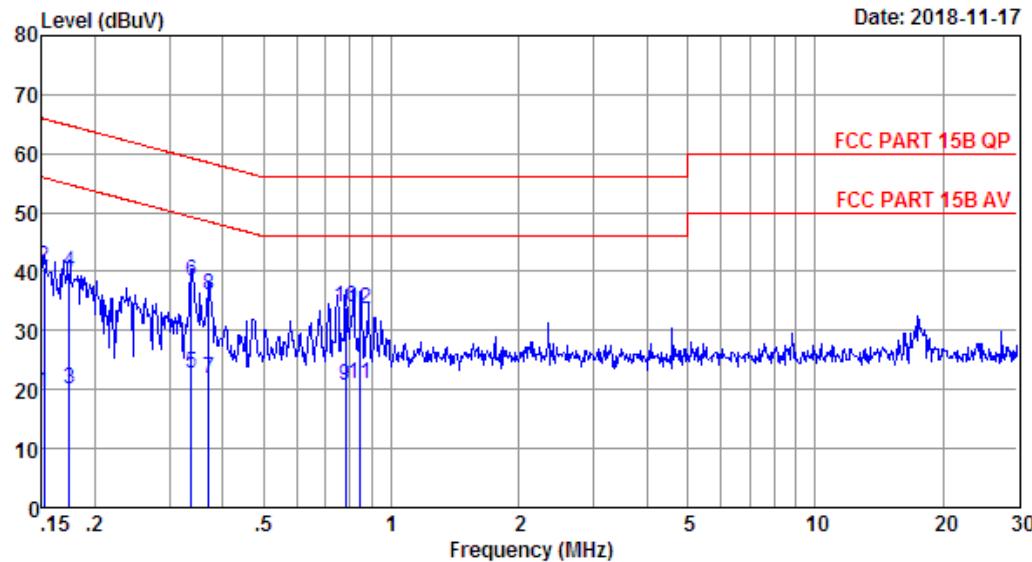

Site no : 844 Shield Room Data no. : 299
 Env. / Ins. : Temp:23.9'C Humi:50.5% Press:101.50kPa INE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : STUDIO SLIM
 Test Mode : TX Mode

	LISN	Cable	Emission				
Freq. (MHz)	Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.73	9.69	0.20	19.62	55.91	36.29 Average
2	0.15	9.73	9.69	21.45	40.87	65.91	25.04 QP
3	0.17	9.73	9.77	0.43	19.93	54.77	34.84 Average
4	0.17	9.73	9.77	20.43	39.93	64.77	24.84 QP
5	0.34	9.72	9.92	3.20	22.84	49.27	26.43 Average
6	0.34	9.72	9.92	18.80	38.44	59.27	20.83 QP
7	0.37	9.72	9.92	2.10	21.74	48.47	26.73 Average
8	0.37	9.72	9.92	16.48	36.12	58.47	22.35 QP
9	0.78	9.72	9.93	0.93	20.58	46.00	25.42 Average
10	0.78	9.72	9.93	14.26	33.91	56.00	22.09 QP
11	0.84	9.72	9.93	1.20	20.85	46.00	25.15 Average
12	0.84	9.72	9.93	14.00	33.65	56.00	22.35 QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 301 File: \Emc-ce-1\Test data\2018\Zhao Yang.EM6 (308)

Date: 2018-11-17

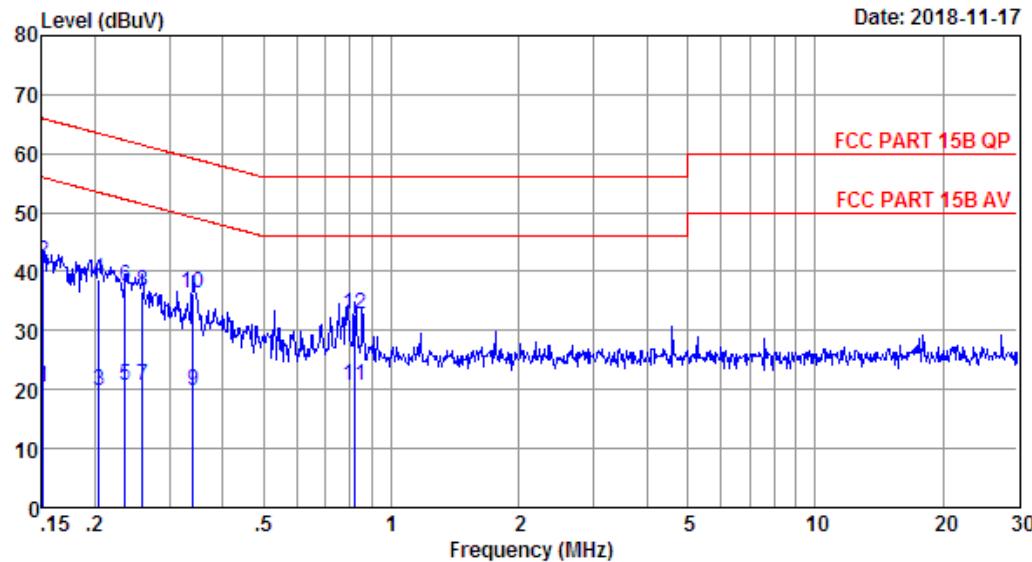

Site no : 844 Shield Room Data no. : 301
 Env. / Ins. : Temp:23.9'C Humi:50.5% Press:101.50kPa INE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : TX Mode

	LISN	Cable	Emission				
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)	
1	0.15	9.73	9.69	1.01	20.43	55.96	35.53 Average
2	0.15	9.73	9.69	22.23	41.65	65.96	24.31 QP
3	0.20	9.73	9.84	0.17	19.74	53.45	33.71 Average
4	0.20	9.73	9.84	19.24	38.81	63.45	24.64 QP
5	0.24	9.72	9.92	0.90	20.54	52.26	31.72 Average
6	0.24	9.72	9.92	17.85	37.49	62.26	24.77 QP
7	0.26	9.72	9.92	0.90	20.54	51.47	30.93 Average
8	0.26	9.72	9.92	16.85	36.49	61.47	24.98 QP
9	0.34	9.72	9.92	0.20	19.84	49.18	29.34 Average
10	0.34	9.72	9.92	16.56	36.20	59.18	22.98 QP
11	0.82	9.72	9.93	1.07	20.72	46.00	25.28 Average
12	0.82	9.72	9.93	13.08	32.73	56.00	23.27 QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 303

File: \Emc-ce-1\Test data\2018\Zhao Yang.EM6 (308)

Date: 2018-11-17

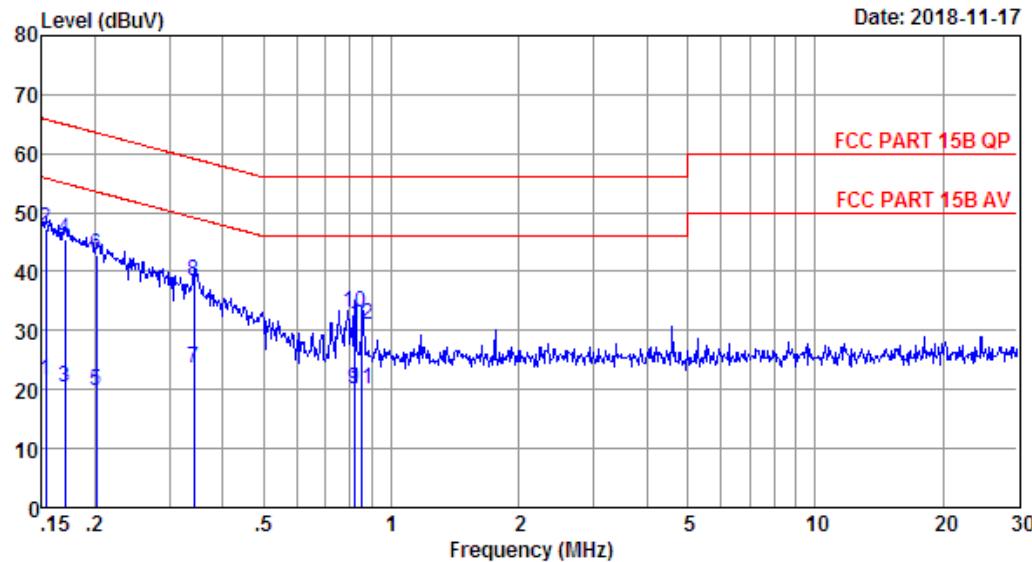

Site no : 844 Shield Room Data no. : 303
 Env. / Ins. : Temp:23.9'C Humi:50.5% Press:101.50kPa INE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : 3.1 Home Theater Sound Bar and Wireless Subwoofer System
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : STUDIO SLIM
 Test Mode : TX Mode

	LISN	Cable	Emission				
Freq. (MHz)	Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.69	21.50	55.82	34.32	Average
2	0.15	9.61	9.69	47.21	65.82	18.61	QP
3	0.17	9.61	9.69	1.20	20.50	54.94	Average
4	0.17	9.61	9.69	26.17	45.47	64.94	QP
5	0.20	9.62	9.77	0.43	19.82	53.54	Average
6	0.20	9.62	9.77	23.54	42.93	63.54	QP
7	0.34	9.63	9.92	4.20	23.75	49.13	Average
8	0.34	9.63	9.92	18.81	38.36	59.13	QP
9	0.82	9.70	9.93	0.57	20.20	46.00	Average
10	0.82	9.70	9.93	13.36	32.99	56.00	QP
11	0.85	9.71	9.93	0.32	19.96	46.00	Average
12	0.85	9.71	9.93	11.23	30.87	56.00	QP

Remarks: 1. Emission Level = LISN Factor + Cable Loss + Reading.
 2. Margin = Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

11. ANTENNA REQUIREMENTS

11.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result


The antennas used for this product are Internal antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 5.97dBi.

12. TEST SETUP PHOTO


Conducted Test

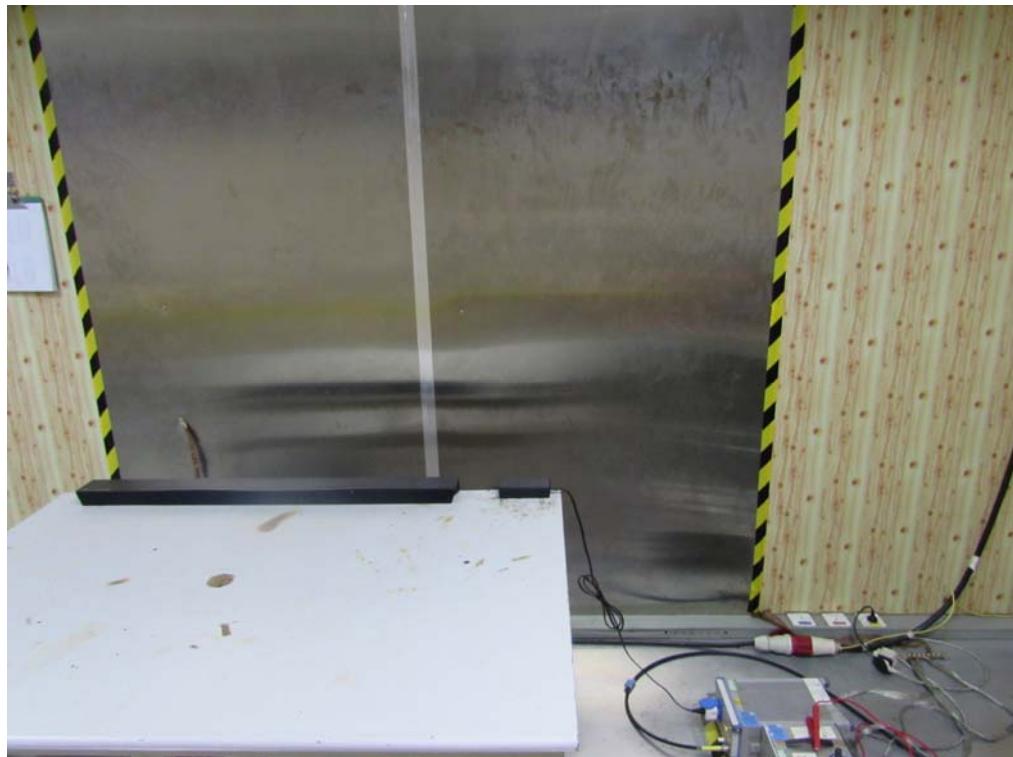

Radiated Test (30-1000 MHz)

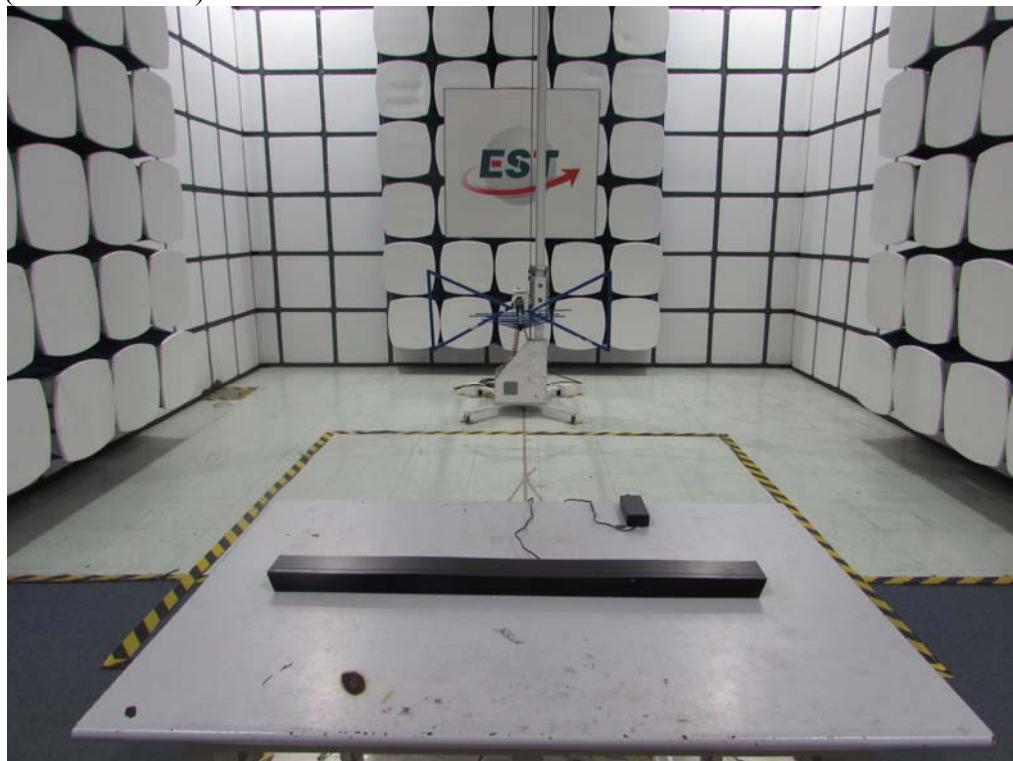


Radiated Test (Above 1GHz)

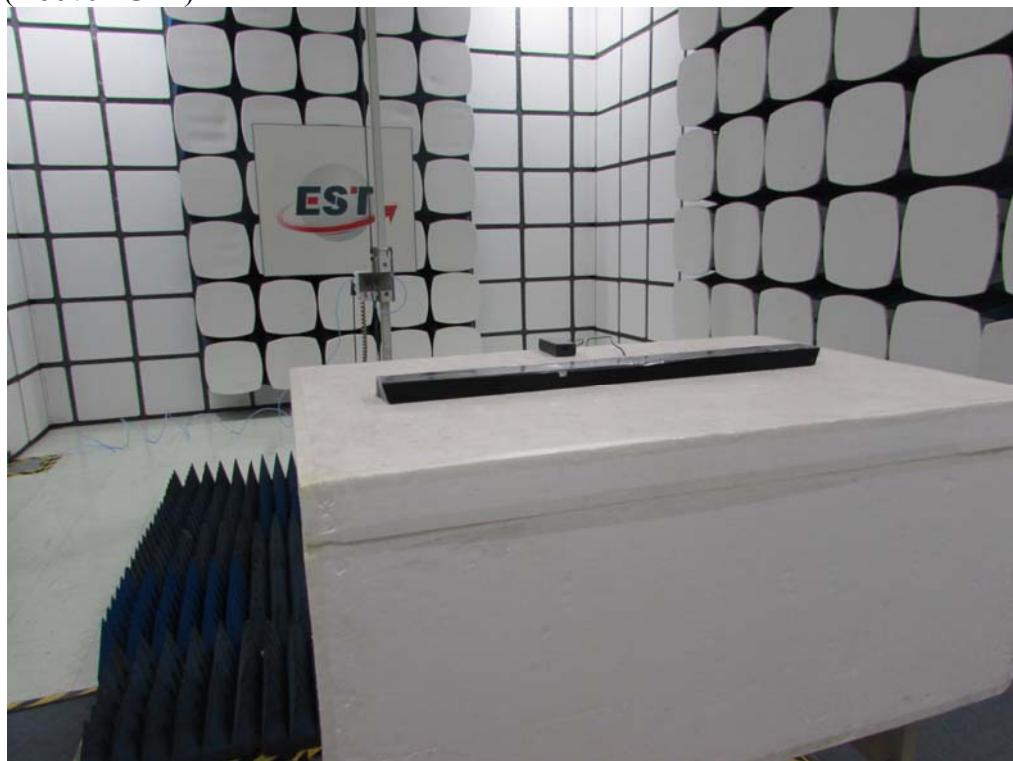

13.PHOTO EUT

External Photos
M/N: STUDIO SLIM

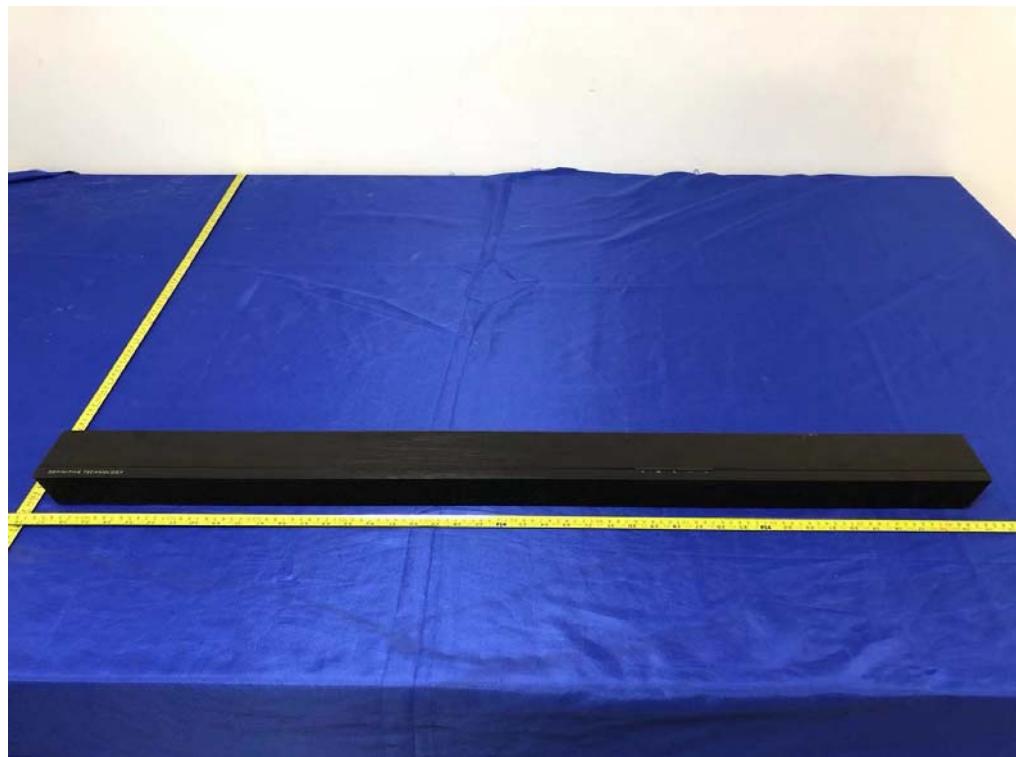

External Photos
M/N: STUDIO SLIM



External Photos
M/N: STUDIO SLIM



External Photos
M/N: STUDIO SLIM




External Photos
M/N: STUDIO SLIM




Internal Photos
M/N: STUDIO SLIM





Internal Photos
M/N: STUDIO SLIM

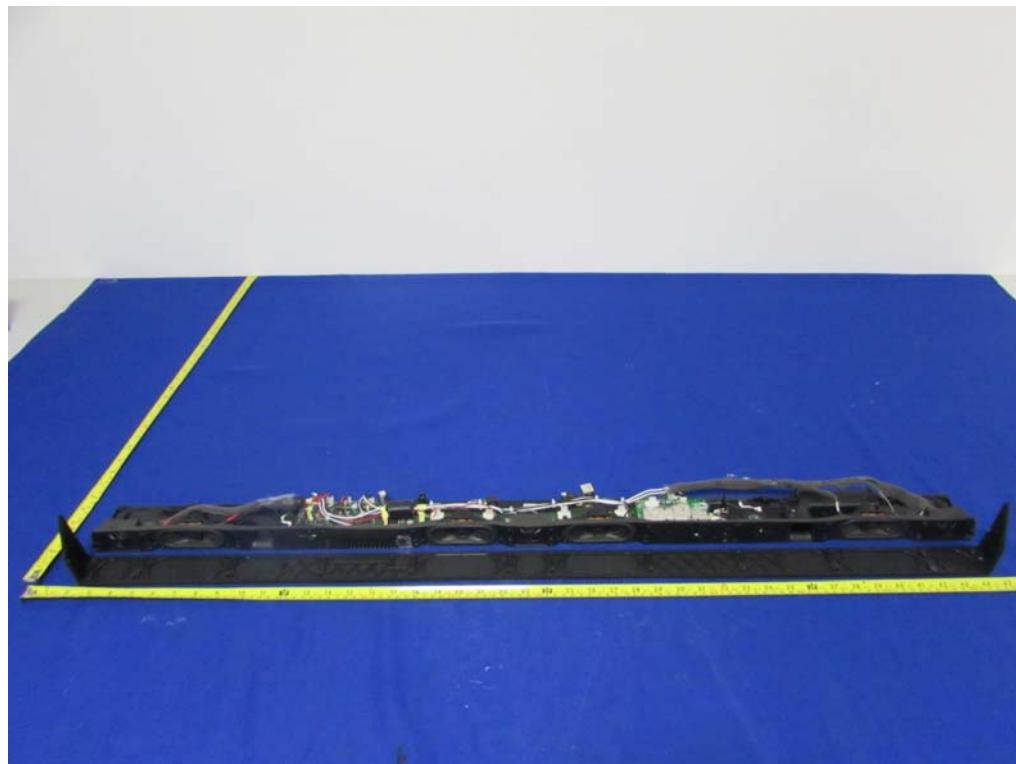



Internal Photos
M/N: STUDIO SLIM

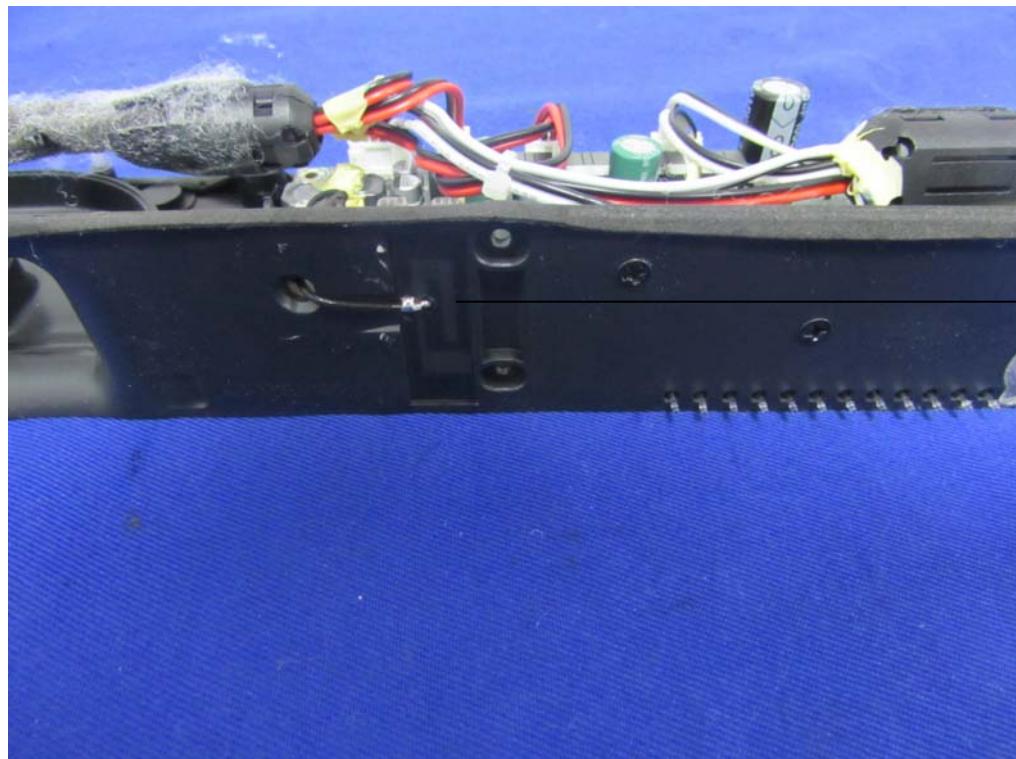



Internal Photos
M/N: STUDIO SLIM

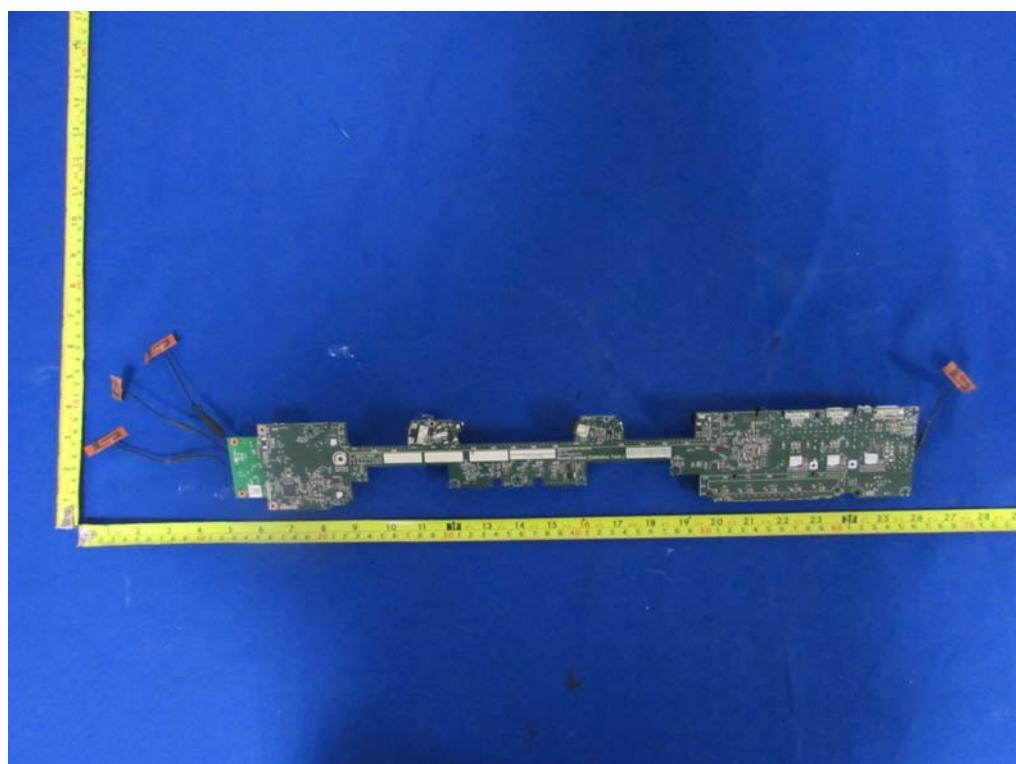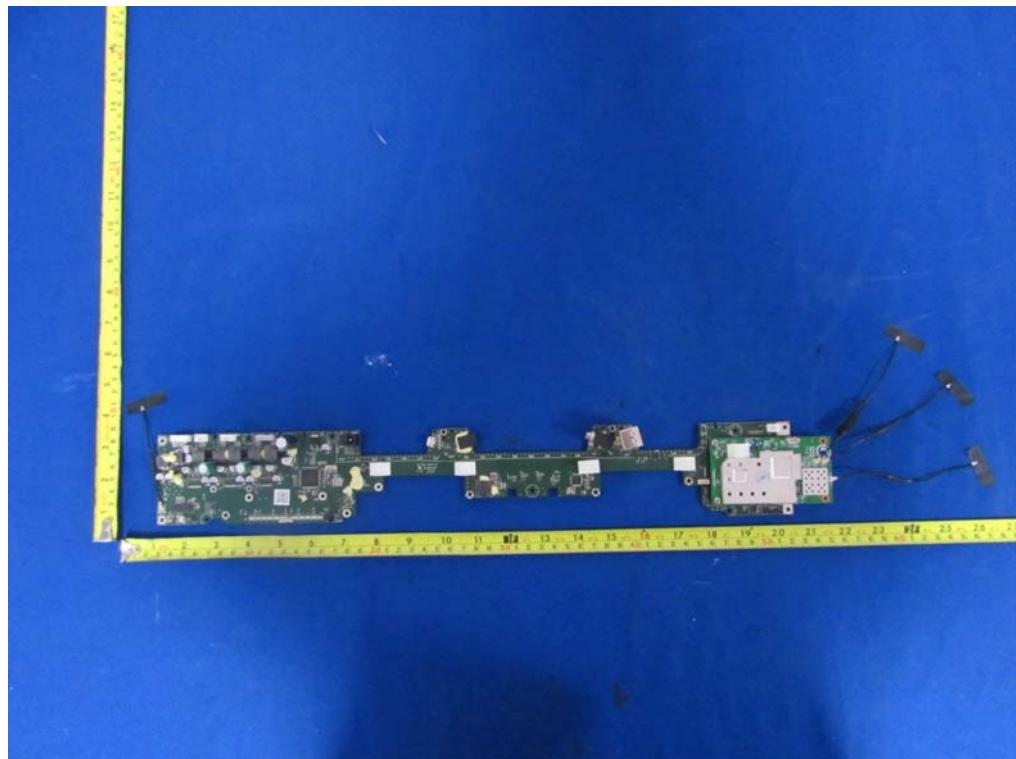



Internal Photos
M/N: STUDIO SLIM

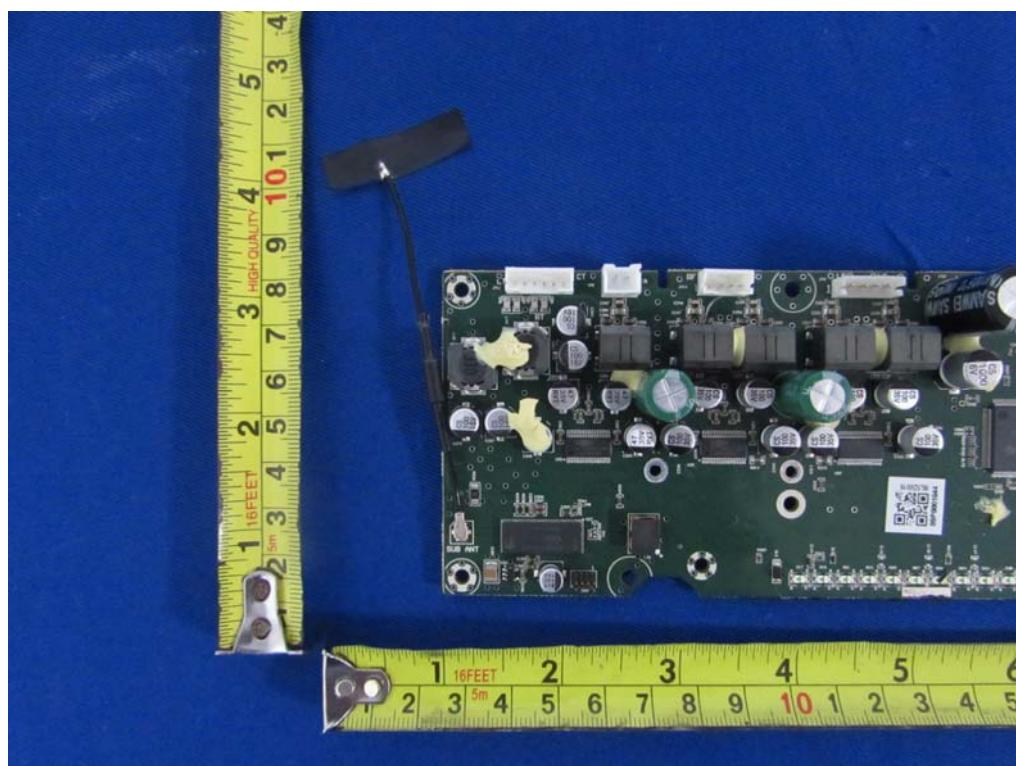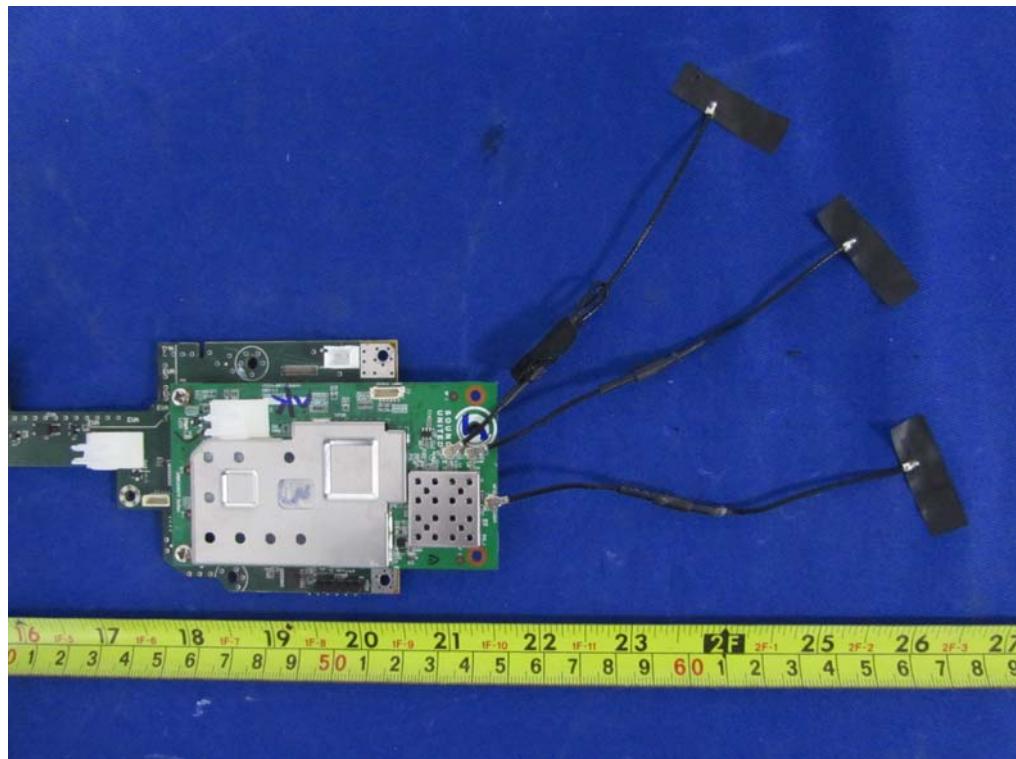



Internal Photos
M/N: STUDIO SLIM

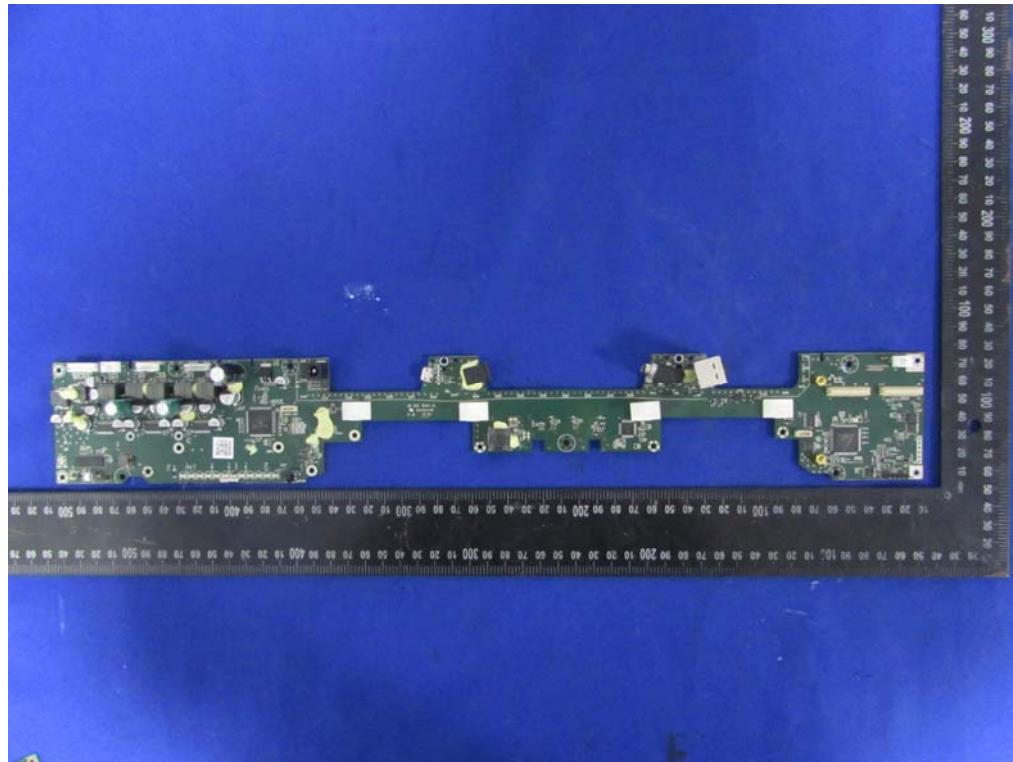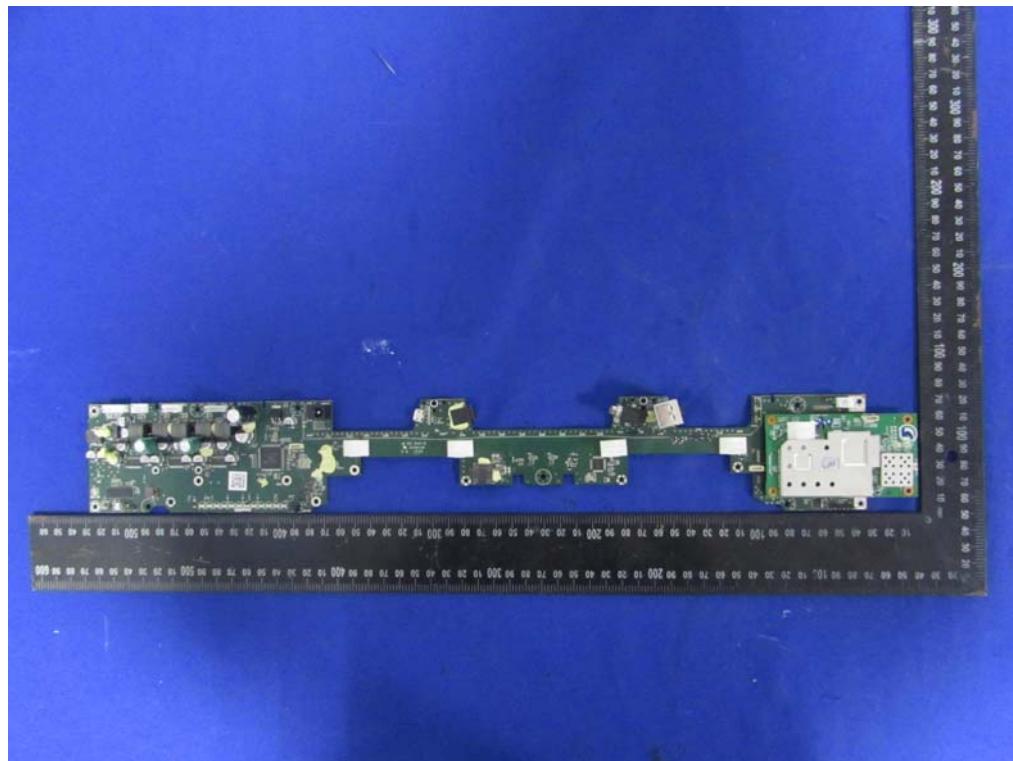

Internal Photos
M/N: STUDIO SLIM

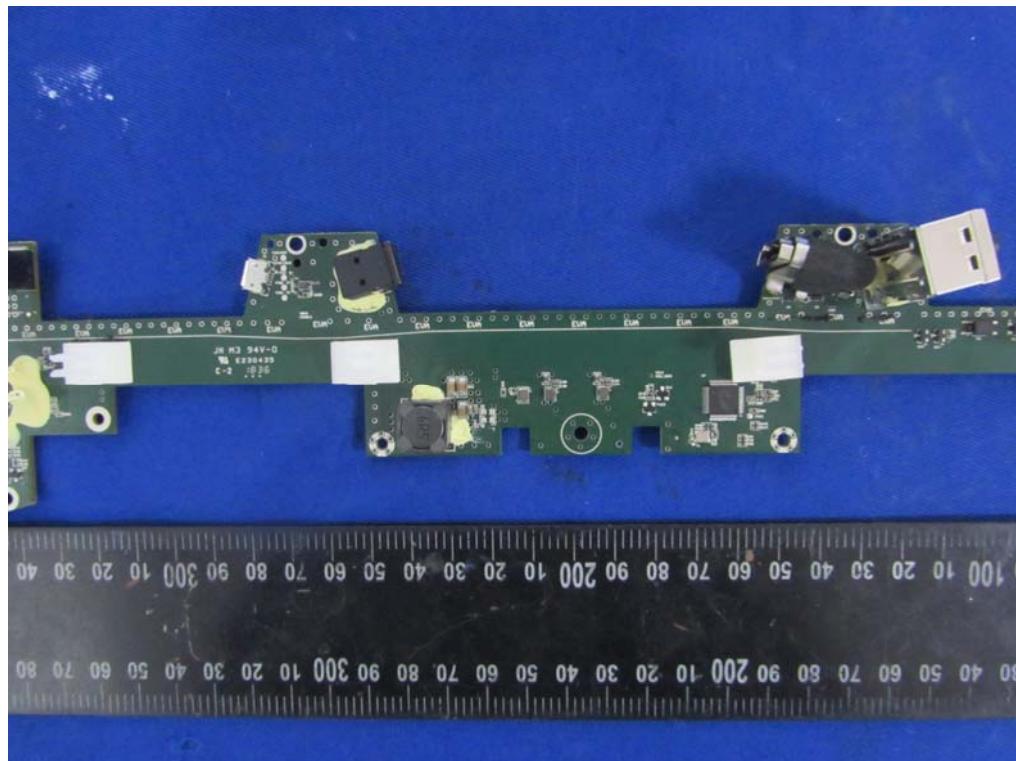
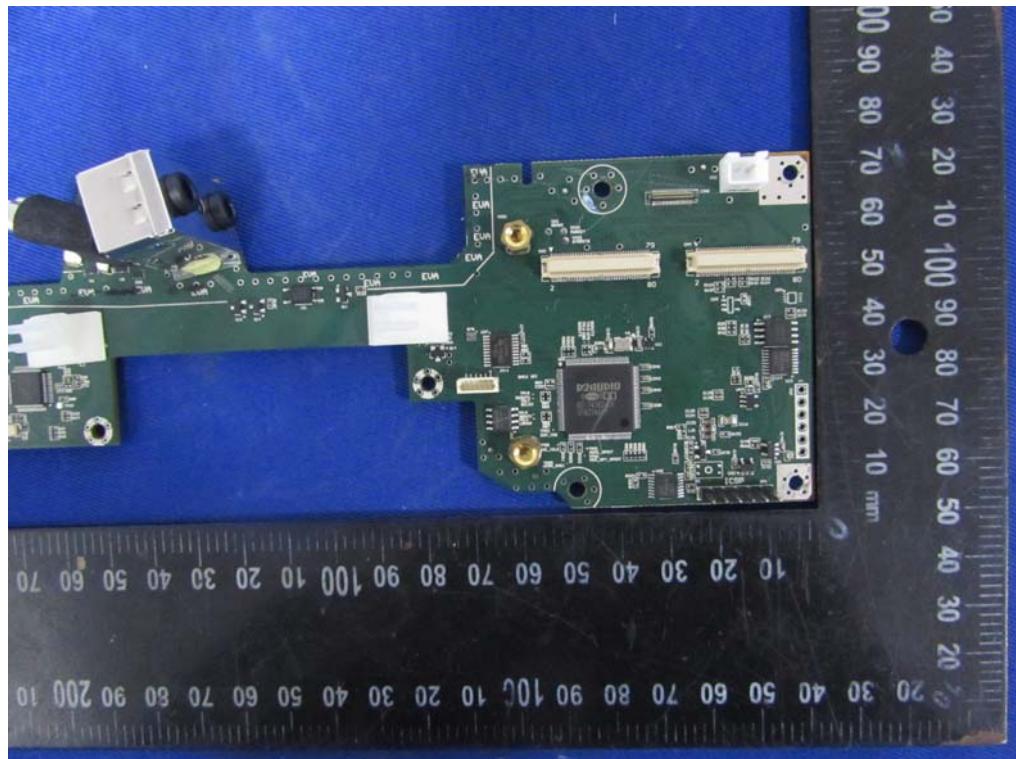


Internal Photos
M/N: STUDIO SLIM

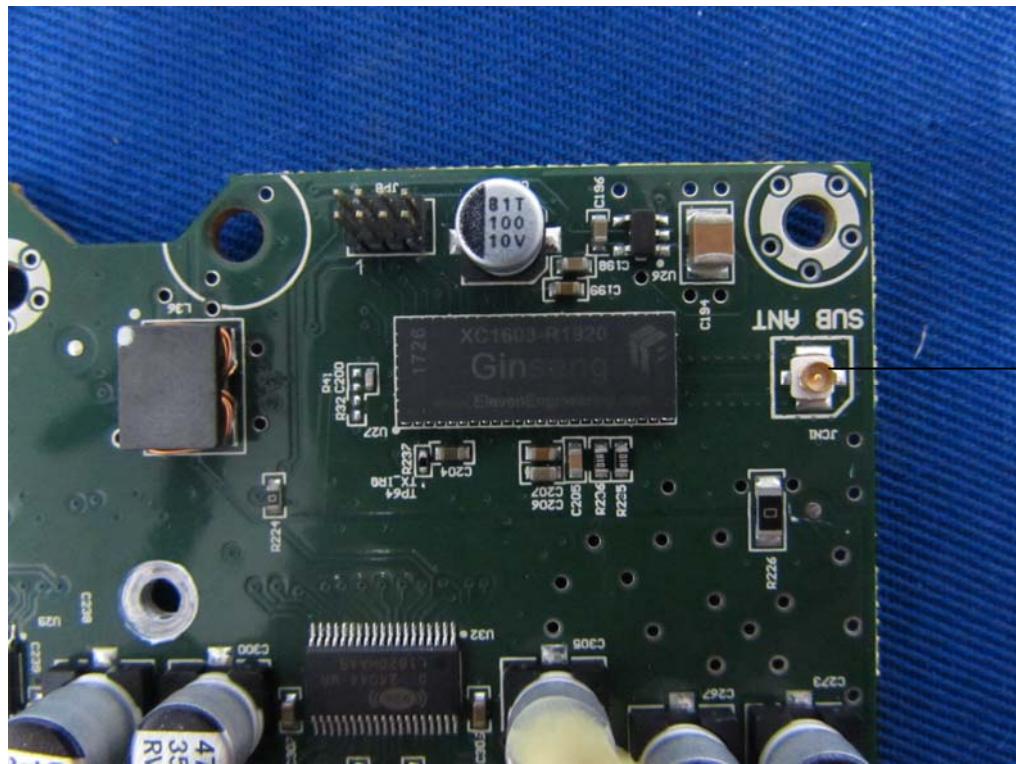
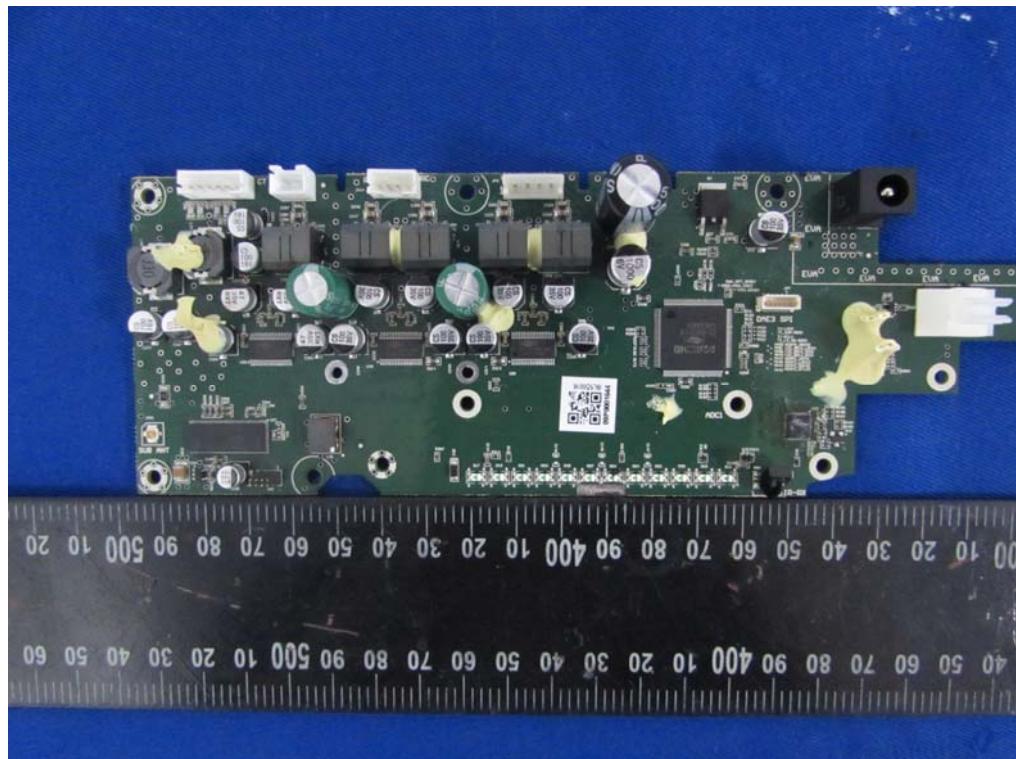


2.4G
ipex
connector


Internal Photos
M/N: STUDIO SLIM

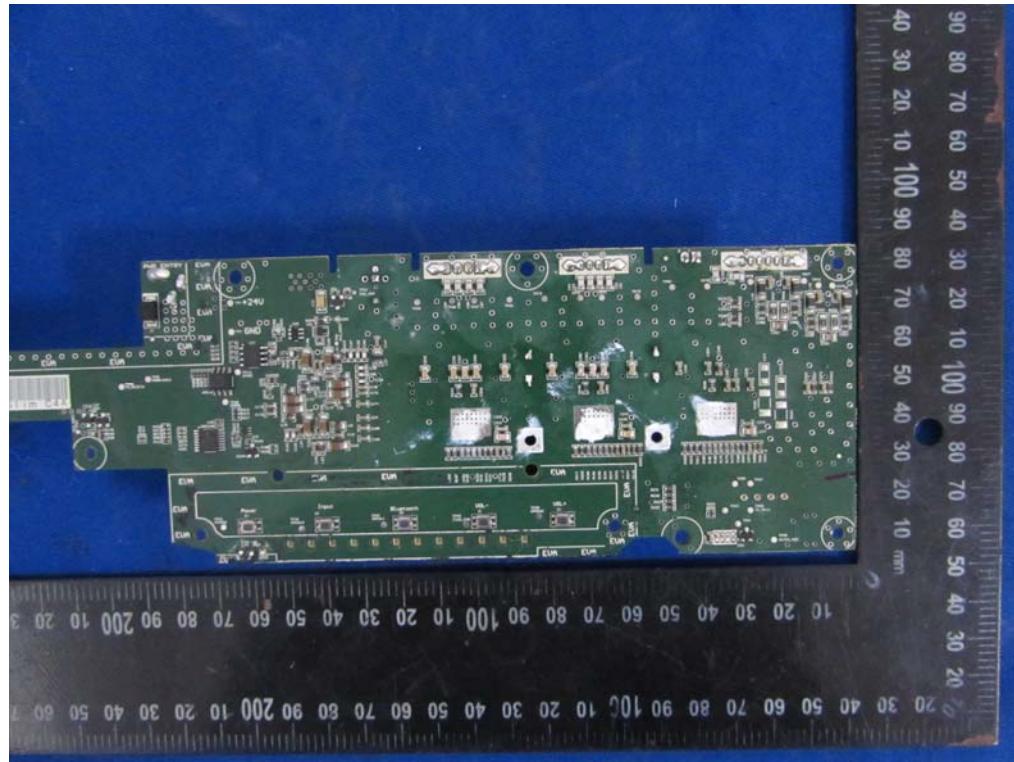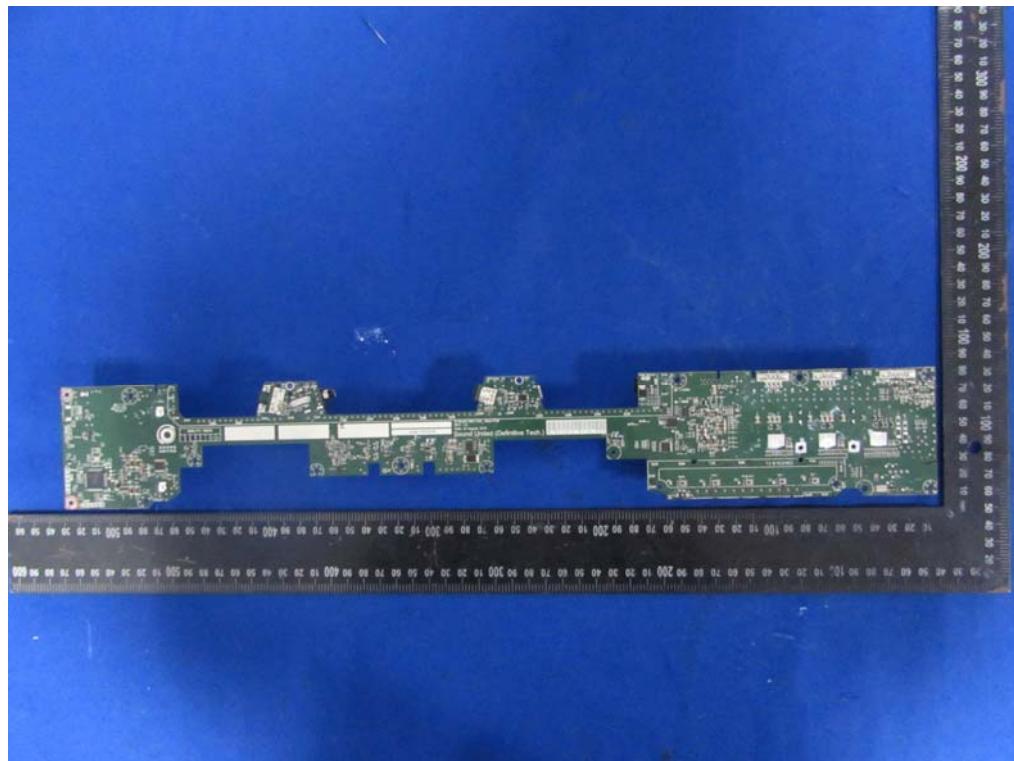

Internal Photos
M/N: STUDIO SLIM

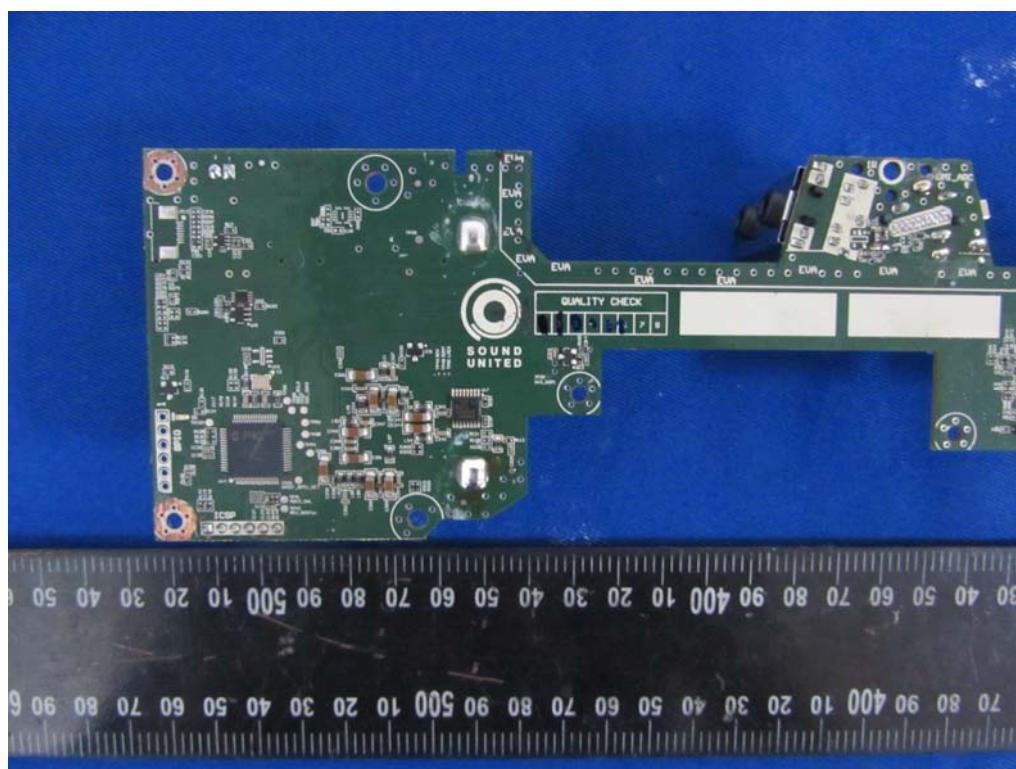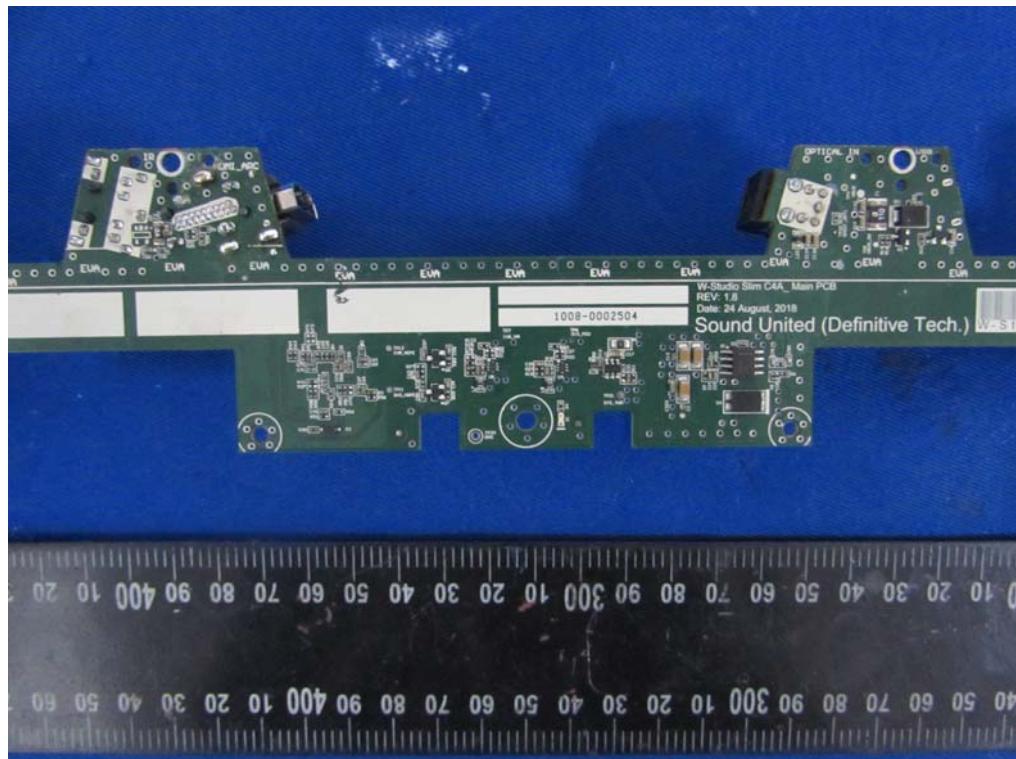

Internal Photos
M/N: STUDIO SLIM

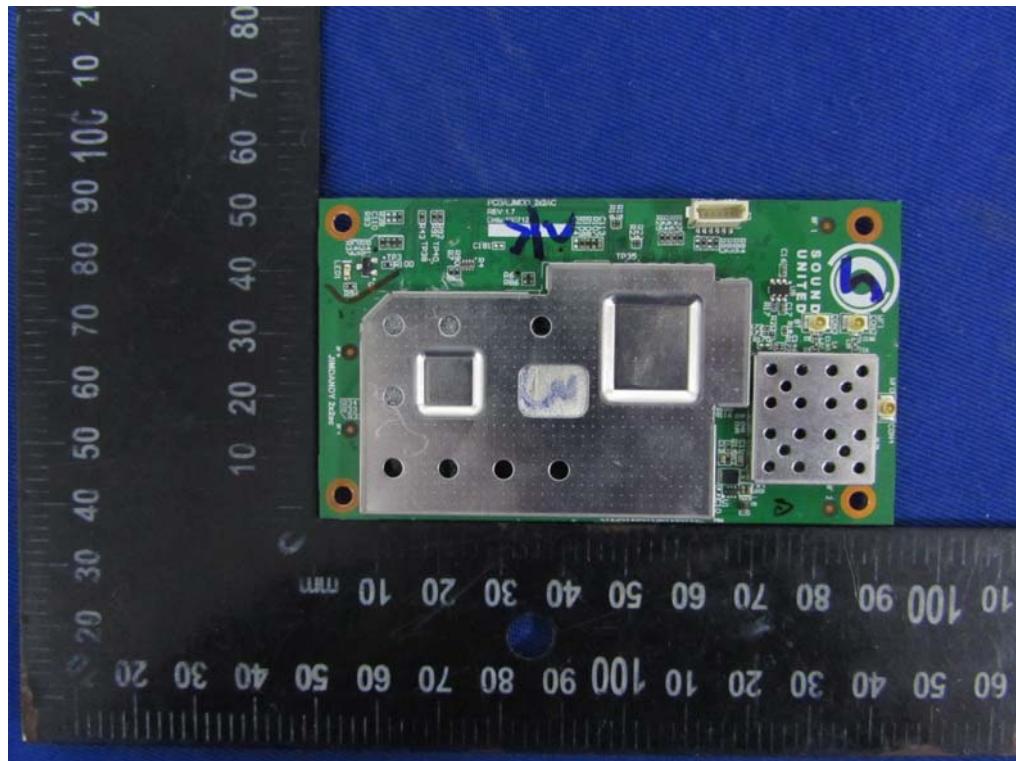

Internal Photos
M/N: STUDIO SLIM

