



FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Marson Technology Co., Ltd.
Address	: 9F., No.108-3, Mincyuan Rd., Sindian Dist., New Taipei City 231, Taiwan
Equipment	: Mini Wireless RFID Reader
Model No.	: MR10A7
Trade Name	: Marson
FCC ID	: IRJ-MR10A7

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Laboratory Accreditation





Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Feature of Equipment under Test	7
2.2 Carrier Frequency of Channels	7
2.3 Test Mode & Test Software	8
2.4 Description of Test System	8
2.5 General Information of Test	9
2.6 Measurement Uncertainty	9
3. Antenna Requirements	10
3.1 Standard Applicable	10
3.2 Antenna Construction and Directional Gain	10
4. Test of Conducted Emission	11
4.1 Test Limit	11
4.2 Test Procedures	11
4.3 Typical Test Setup	12
4.4 Measurement Equipment	12
4.5 Test Result and Data	13
4.6 Test Photographs	19
5. Test of Radiated Emission	20
5.1 Test Limit	20
5.2 Test Procedures	20
5.3 Typical Test Setup	21
5.4 Measurement equipment	21
5.5 Test Result and Data (9kHz ~ 30MHz)	22
5.6 Test Result and Data (30MHz ~ 1GHz)	22
5.7 Test Result and Data (1GHz ~ 25GHz)	28
5.8 Test Photographs (30MHz ~ 1GHz)	46
5.9 Test Photographs (1GHz ~ 25GHz)	47
6. 20dB Bandwidth Measurement Data	48
6.1 Test Limit	48
6.2 Test Procedures	48
6.3 Test Setup Layout	48
6.4 Measurement Equipment	48
6.5 Test Result and Data	49
7. Frequencies Separation	55
7.1 Test Limit	55
7.2 Test Procedures	55
7.3 Test Setup Layout	55
7.4 Measurement Equipment	55
7.5 Test Result and Data	56



8. Dwell Time on each channel	62
8.1 Test Limit	62
8.2 Test Procedures	62
8.3 Test Setup Layout	62
8.4 Measurement Equipment	62
8.5 Test Result and Data	63
9. Number of Hopping Channels	72
9.1 Test Limit	72
9.2 Test Procedures	72
9.3 Test Setup Layout	72
9.4 Measurement Equipment	72
9.5 Test Result and Data	72
10. Maximum Peak Output Power	75
10.1 Test Limit	75
10.2 Test Procedures	75
10.3 Test Setup Layout	75
10.4 Measurement Equipment	75
10.5 Test Result and Data	76
11. Band Edges Measurement	82
11.1 Test Limit	82
11.2 Test Procedure	82
11.3 Test Setup Layout	82
11.4 Measurement Equipment	82
11.5 Test Result and Data	82
11.6 Restrict band emission Measurement Data	89
12. Restricted Bands of Operation	91
12.1 Labeling Requirement	91
Appendix A. Photographs of EUT	A1 ~ A5



■ ORIGINAL.

☐ Additional attachment as following record:

[illegible]



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Marson Technology Co., Ltd.
Address	: 9F., No.108-3, Mincyuan Rd., Sindian Dist., New Taipei City 231, Taiwan
Equipment	: Mini Wireless RFID Reader
Model No.	: MR10A7
FCC ID	: IRJ-MR10A7

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4**. The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The sample was received on Dec. 09, 2014 and the testing was carried out on Dec. 10, 2014 at Cerpass Technology Corp.

Approval by :

Test Engineer:

Hill Chen
EMC/RF B.U. Assistant Manager

Dian
Engineer



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	. Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth Measurement	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass
15.247(d)	. Band Edges Measurement Data	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

RFID Specifications	Frequency	13.56 MHz
	Standard	Support ISO-15693 & ISO-14443
	Reading Distance	ISO-15693 0 ~ 5 cm / ISO-14443 0 ~ 2.5cm
Communications	Bluetooth	Version 2.1 Class 2 V2.0, support SPP & HID
	Wireless Range	10 m
	Operating Frequency	2.4 GHz – 2.48 GHz
	USB	Virtual COM Port or HID
Electrical	Battery	Rechargeable 3.7V Li-Polymer 1000 mAh
	Battery Life	>10,000 times (1 read/ 5 sec)
	Working Current	Typ.: 200 mA, Max.: 250 mA
	Standby Current	Typ.: 55 mA, Max.: 75 mA
	Idle Current	< 500 μ A
Physical	Dimensions	L 102 x W 42.5 x H 21.5 mm
	Weight	Approx 70g
	Sealing	IP55
Environmental	Operating Temperature	0°C ~ 45°C (Lithium Polymer Battery Charge) 10°C ~ 50°C (Lithium Polymer Battery Discharge)
	Storage Temperature	-20°C ~ 60°C
	Humidity	0% RH~ 90% RH (Non Condensing)
Type of Antenna	Chip Antenna	
Antenna Gain	2.66 dBi	

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---



2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. The complete test system included PC, Monitor, Keyboard, Mouse, Test Fixture and EUT for RF test.
- c. An executive program, "Blue test" under WIN XP was executed to transmit and receive data via Bluetooth.
- d. The following test mode was performed for conduction and radiation test:
 - GFSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - $\pi/4$ -DQPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - 8DPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
PC	DELL	D02M	Power Cable, Unshielding, 1.8m
Monitor	DELL	2408WFPb	Power Cable, Unshielding 1.8m VGA Cable, Shielding 1.35m
Keyboard	DELL	SK-8175	USB Cable, Shielding 1.85m
Mouse	DELL	M-UV83	USB Cable, Shielding 1.85m
Test Fixture	N/A	N/A	Lpt Cable, Shielding 1.5m

Use Cable:

Cable	Quantity	Description
Micro USB	1	Shielding, 1.8m



2.5 General Information of Test

Test Site :	Cerpass Technology Corporation Test Laboratory No.10, Lane 2, Lianfu Street, Luzhu Township, Taoyuan County 33848, Taiwan(R.O.C.)
Test Site Location :	No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	☐ TW1079, ☐ TW1061, ☐ 390316, ☐ 228391, ☒ 641184
IC Registration Number :	☐ 4934B-1, ☐ 4934E-1, ☒ 4934E-2
VCCI Registration Number :	☐ T-2205 for Telecommunication Test ☒ C-4463 for Conducted emission test ☒ R-3428 for Radiated emission test ☒ G-812 for radiated disturbance above 1GHz ☐ G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24800MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	3.25 dB
Radiated Emission	30 MHz ~ 1,000 MHz	Vertical / Horizontal	3.93 dB
	1,000 MHz ~ 18,000 MHz	Vertical / Horizontal	5.18dB
6 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	2.2 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: Chip Antenna

Antenna Gain: 2.66 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

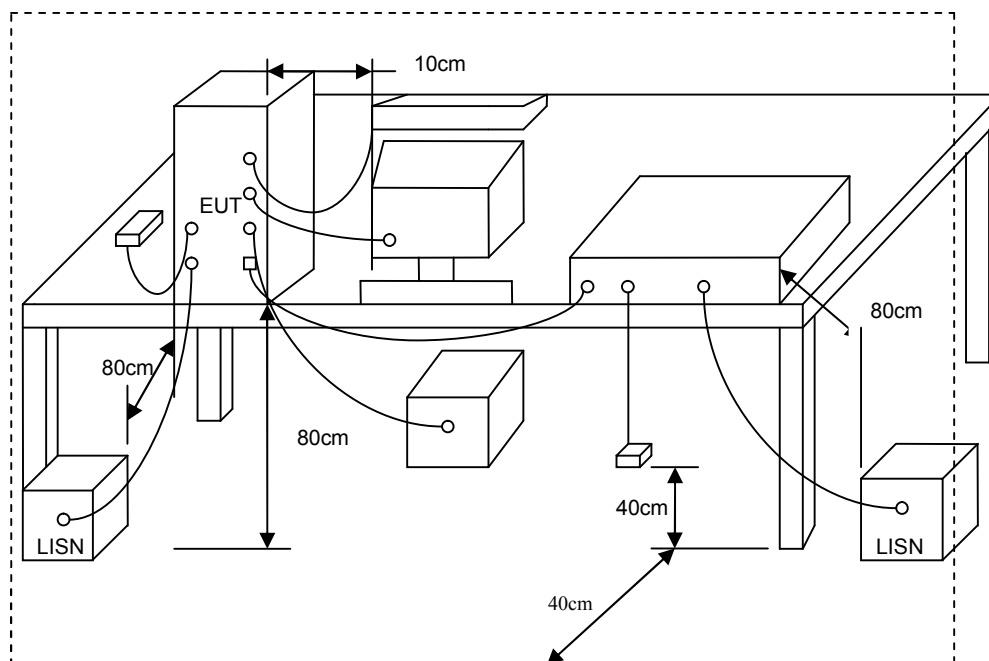


4.4 Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	101423	2014/06/05	2015/06/04
LISN	Schwarzbeck	NSLK 8127	8127-740	2014/08/14	2015/08/13
LISN	Schwarzbeck	NSLK 8127	8127-516	2014/03/10	2015/03/09
Pulse Limiter	R&S	ESH3-Z2	101933	2014/08/12	2015/08/11
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A



4.5 Test Result and Data

Power	: From System	Pol/Phase	: LINE
Test Mode 1	: GFSK(1Mbps) CH00	Temperature	: 26 °C
		Humidity	: 48 %
Test Date	: Dec. 10, 2014	Atmospheric Pressure	: 1008 hpa

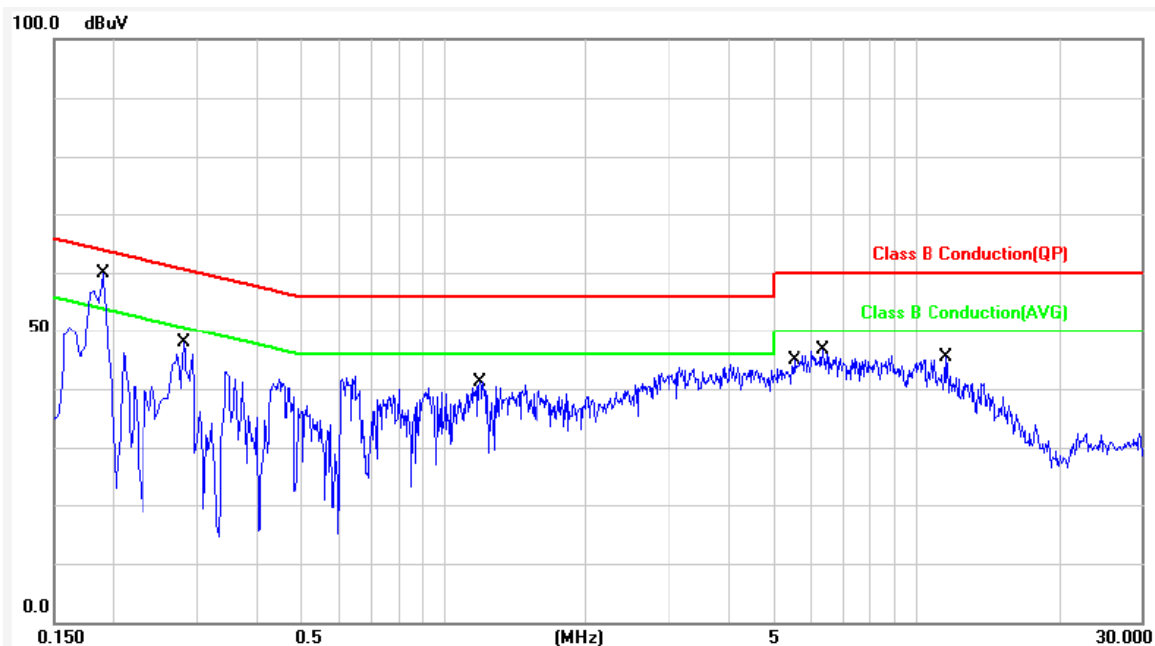

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1900	9.89	47.79	57.68	64.03	-6.35	QP	P
2	0.1900	9.89	33.39	43.28	54.03	-10.75	AVG	P
3	0.2819	9.89	35.49	45.38	60.76	-15.38	QP	P
4	0.2819	9.89	22.03	31.92	50.76	-18.84	AVG	P
5	1.1940	9.90	27.21	37.11	56.00	-18.89	QP	P
6	1.1940	9.90	14.43	24.33	46.00	-21.67	AVG	P
7	5.4699	9.97	27.52	37.49	60.00	-22.51	QP	P
8	5.4699	9.97	18.40	28.37	50.00	-21.63	AVG	P
9	6.3820	9.99	27.17	37.16	60.00	-22.84	QP	P
10	6.3820	9.99	17.87	27.86	50.00	-22.14	AVG	P
11	11.5620	10.09	23.27	33.36	60.00	-26.64	QP	P
12	11.5620	10.09	17.07	27.16	50.00	-22.84	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode 1	: GFSK(1Mbps) CH00	Temperature	: 26 °C
		Humidity	: 48 %
Test Date	: Dec. 10, 2014	Atmospheric Pressure	: 1008 hpa

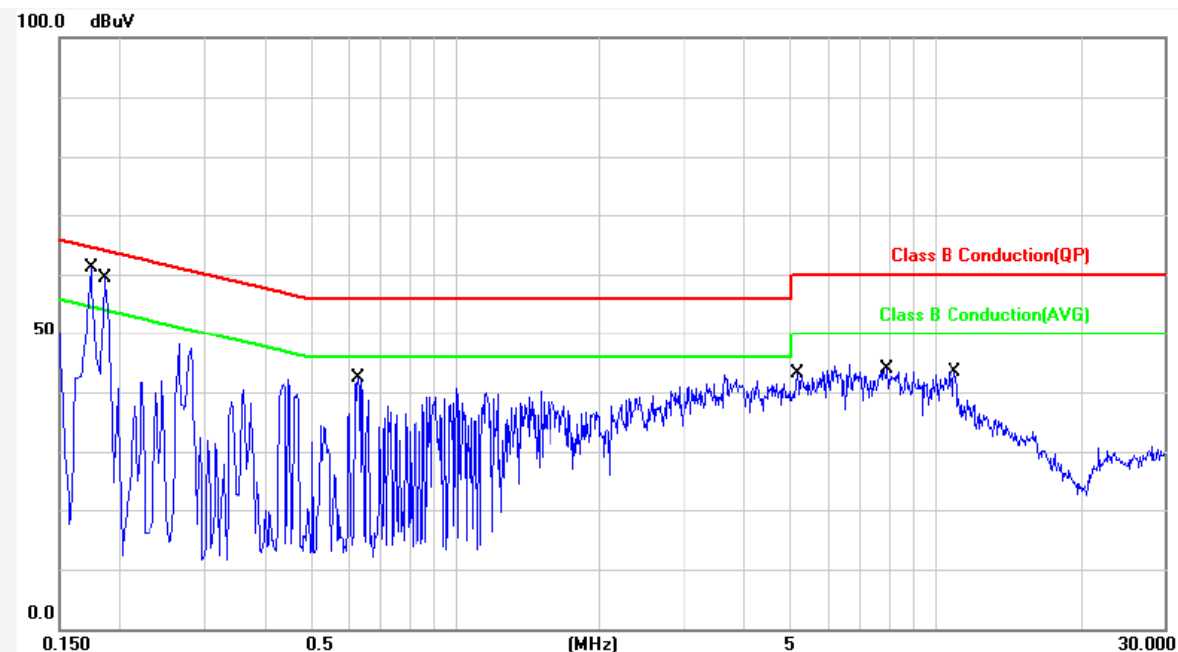

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1740	9.89	49.03	58.92	64.76	-5.84	QP	P
2	0.1740	9.89	36.46	46.35	54.76	-8.41	AVG	P
3	0.1860	9.88	42.93	52.81	64.21	-11.40	QP	P
4	0.1860	9.88	25.52	35.40	54.21	-18.81	AVG	P
5	0.6300	9.89	29.67	39.56	56.00	-16.44	QP	P
6	0.6300	9.89	18.69	28.58	46.00	-17.42	AVG	P
7	5.1460	9.96	23.57	33.53	60.00	-26.47	QP	P
8	5.1460	9.96	16.72	26.68	50.00	-23.32	AVG	P
9	7.9700	10.01	23.50	33.51	60.00	-26.49	QP	P
10	7.9700	10.01	17.51	27.52	50.00	-22.48	AVG	P
11	10.9819	10.07	22.32	32.39	60.00	-27.61	QP	P
12	10.9819	10.07	16.49	26.56	50.00	-23.44	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



Power	: From System	Pol/Phase	: LINE
Test Mode 2	: $\pi/4$ -DQPSK(2Mbps), CH00	Temperature	: 26 °C
		Humidity	: 48 %
Test Date	: Dec. 10, 2014	Atmospheric Pressure	: 1008 hpa

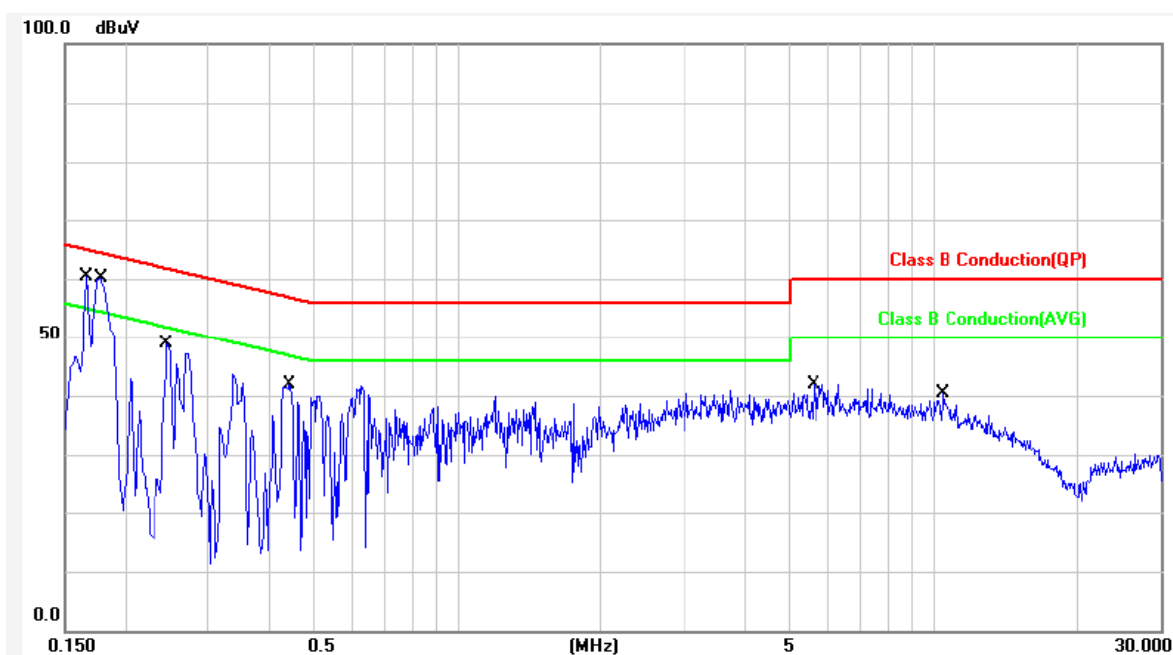

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1660	9.89	50.70	60.59	65.15	-4.56	QP	P
2	0.1660	9.89	32.23	42.12	55.15	-13.03	AVG	P
3	0.1780	9.89	46.41	56.30	64.57	-8.27	QP	P
4	0.1780	9.89	35.19	45.08	54.57	-9.49	AVG	P
5	0.2460	9.89	35.37	45.26	61.89	-16.63	QP	P
6	0.2460	9.89	17.41	27.30	51.89	-24.59	AVG	P
7	0.4460	9.88	30.04	39.92	56.95	-17.03	QP	P
8	0.4460	9.88	20.03	29.91	46.95	-17.04	AVG	P
9	5.6100	9.97	24.41	34.38	60.00	-25.62	QP	P
10	5.6100	9.97	17.40	27.37	50.00	-22.63	AVG	P
11	10.4819	10.06	23.22	33.28	60.00	-26.72	QP	P
12	10.4819	10.06	17.41	27.47	50.00	-22.53	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode 2	: $\pi/4$ -DQPSK(2Mbps), CH00	Temperature	: 26 °C
		Humidity	: 48 %
Test Date	: Dec. 10, 2014	Atmospheric Pressure	: 1008 hpa

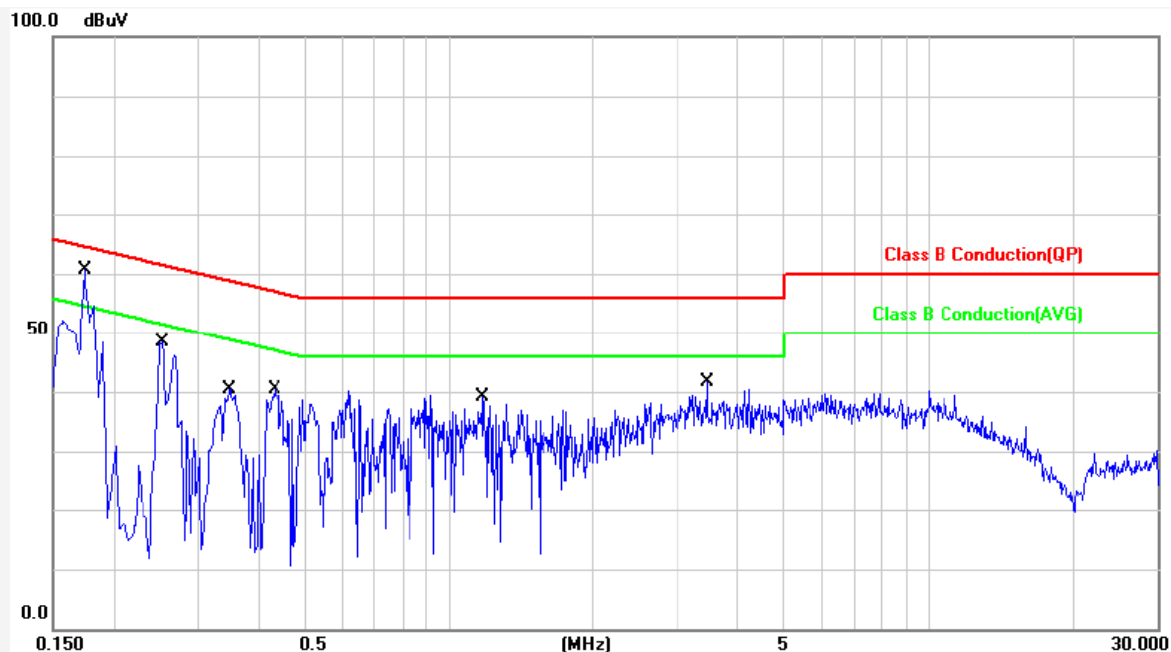

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1739	9.89	29.83	39.72	64.77	-25.05	QP	P
2	0.1739	9.89	6.20	16.09	54.77	-38.68	AVG	P
3	0.2540	9.88	20.32	30.20	61.62	-31.42	QP	P
4	0.2540	9.88	0.29	10.17	51.62	-41.45	AVG	P
5	0.3499	9.88	10.11	19.99	58.96	-38.97	QP	P
6	0.3499	9.88	-2.38	7.50	48.96	-41.46	AVG	P
7	0.4339	9.88	5.60	15.48	57.18	-41.70	QP	P
8	0.4339	9.88	-2.82	7.06	47.18	-40.12	AVG	P
9	1.1818	9.90	17.67	27.57	56.00	-28.43	QP	P
10	1.1818	9.90	1.41	11.31	46.00	-34.69	AVG	P
11	3.4580	9.94	24.79	34.73	56.00	-21.27	QP	P
12	3.4580	9.94	13.63	23.57	46.00	-22.43	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



Power	: From System	Pol/Phase	: LINE
Test Mode 3	: 8DPSK(3Mbps) CH00	Temperature	: 26 °C
		Humidity	: 48 %
Test Date	: Dec. 10, 2014	Atmospheric Pressure	: 1008 hpa

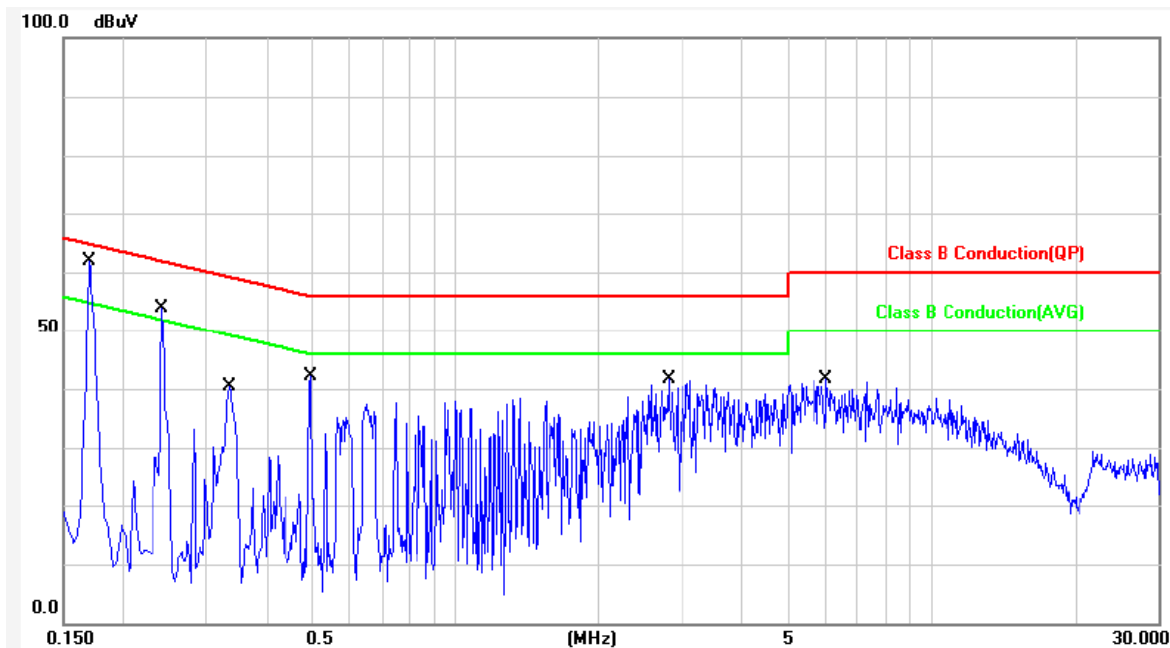

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1700	9.89	52.38	62.27	64.96	-2.69	QP	P
2	0.1700	9.89	39.53	49.42	54.96	-5.54	AVG	P
3	0.2420	9.88	41.61	51.49	62.02	-10.53	QP	P
4	0.2420	9.88	27.91	37.79	52.02	-14.23	AVG	P
5	0.3339	9.88	30.61	40.49	59.35	-18.86	QP	P
6	0.3339	9.88	17.27	27.15	49.35	-22.20	AVG	P
7	0.4980	9.88	31.58	41.46	56.03	-14.57	QP	P
8	0.4980	9.88	22.76	32.64	46.03	-13.39	AVG	P
9	2.7980	9.94	28.22	38.16	56.00	-17.84	QP	P
10	2.7980	9.94	16.10	26.04	46.00	-19.96	AVG	P
11	6.0460	9.97	26.24	36.21	60.00	-23.79	QP	P
12	6.0460	9.97	17.09	27.06	50.00	-22.94	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode 3	: 8DPSK(3Mbps) CH00	Temperature	: 26 °C
		Humidity	: 48 %
Test Date	: Dec. 10, 2014	Atmospheric Pressure	: 1008 hpa

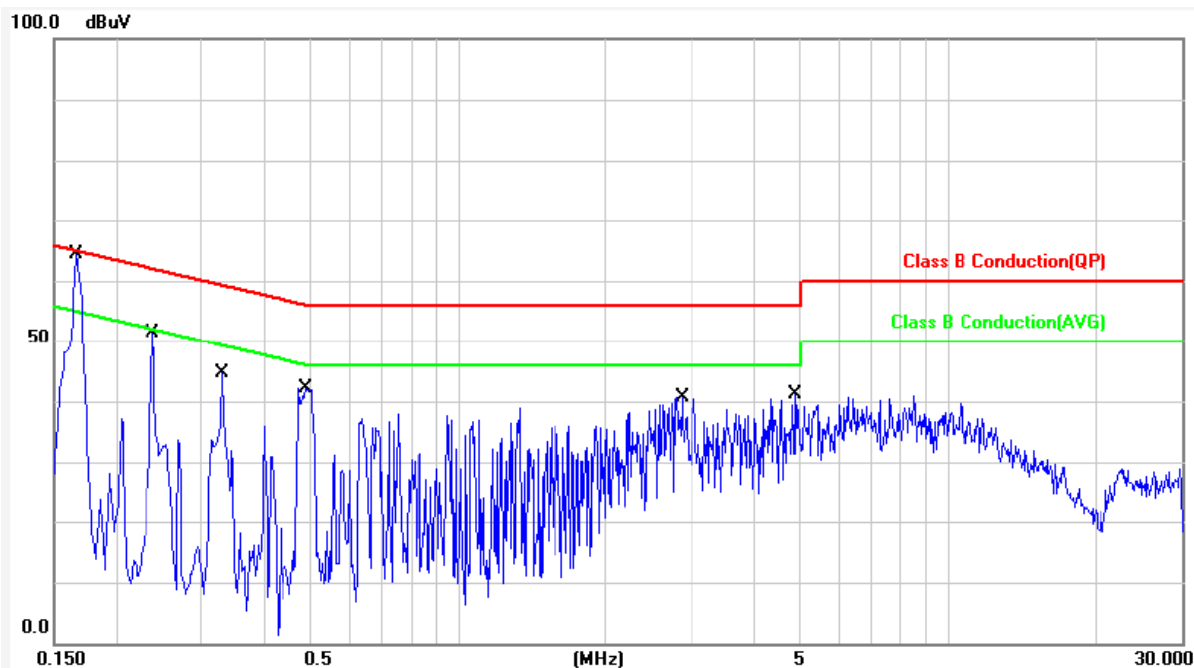

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1660	9.89	52.61	62.50	65.15	-2.65	QP	P
2	0.1660	9.89	40.40	50.29	55.15	-4.86	AVG	P
3	0.2380	9.88	41.37	51.25	62.16	-10.91	QP	P
4	0.2380	9.88	27.09	36.97	52.16	-15.19	AVG	P
5	0.3300	9.88	32.16	42.04	59.45	-17.41	QP	P
6	0.3300	9.88	20.32	30.20	49.45	-19.25	AVG	P
7	0.4900	9.88	31.75	41.63	56.17	-14.54	QP	P
8	0.4900	9.88	23.24	33.12	46.17	-13.05	AVG	P
9	2.8580	9.94	28.00	37.94	56.00	-18.06	QP	P
10	2.8580	9.94	15.34	25.28	46.00	-20.72	AVG	P
11	4.8700	9.96	26.54	36.50	56.00	-19.50	QP	P
12	4.8700	9.96	15.86	25.82	46.00	-20.18	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator




4.6 Test Photographs

Front View



Rear View

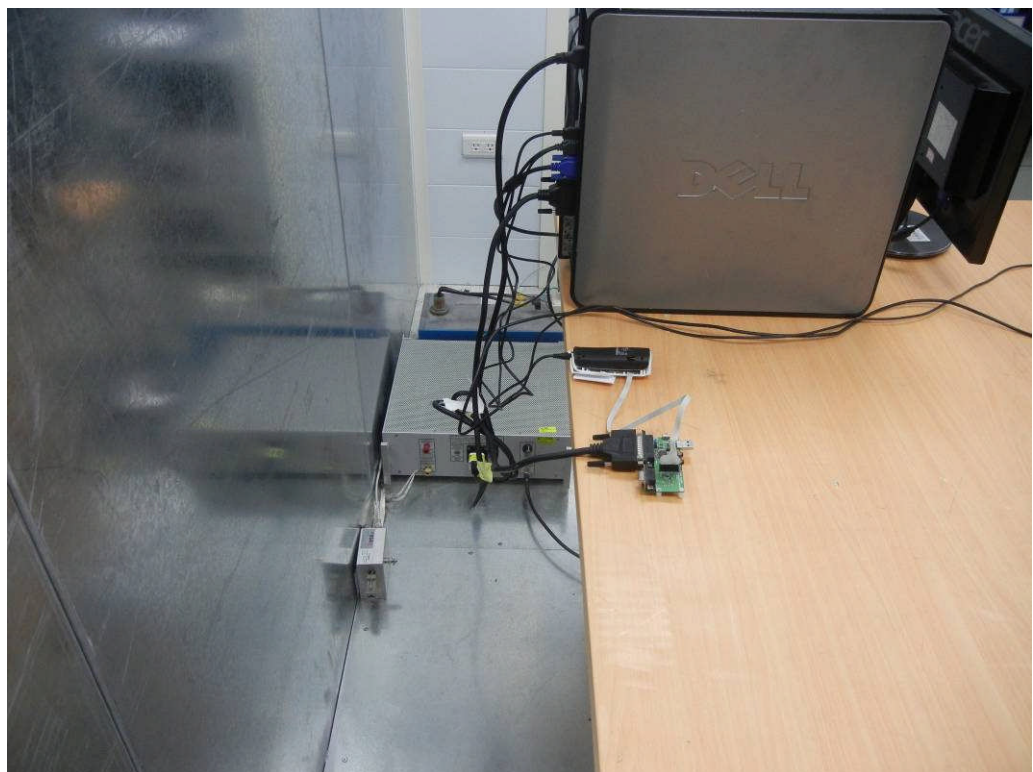



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V/ M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37


5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




5.3 Typical Test Setup

For radiated emissions below 30MHz

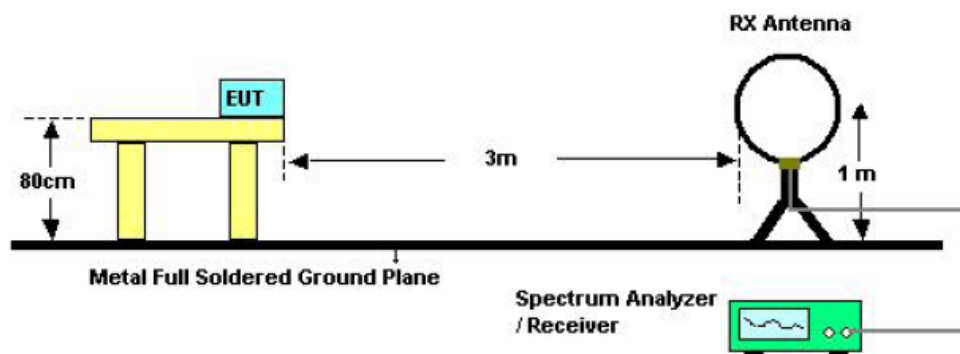

For radiated emissions above 30MHz

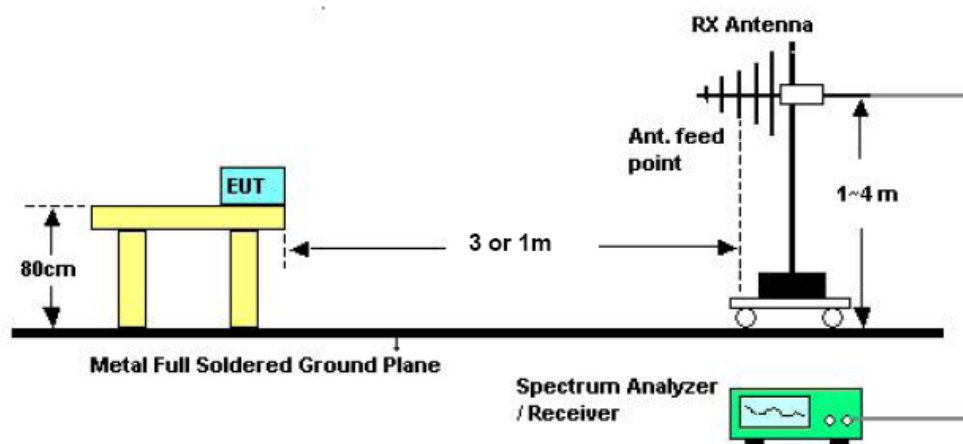

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

5.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100443	2014/04/09	2015/04/08
Bilog Antenna	Schwarzbeck	VULB 9168	275	2014/09/18	2015/09/17
Amplifier	QuieTek	AP/0100A	CHM0906075	2014/09/17	2015/09/16
Spectrum Analyzer	R&S	FSP40	100219	2014/09/03	2015/09/02
Horn Antenna	EMCO	3115	31601	2014/07/09	2015/07/08
Preamplifier	AGILENT	8449B	3008A01954	2014/03/28	2015/03/27
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A




5.5 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

5.6 Test Result and Data (30MHz ~ 1GHz)

Power	:	From System	Pol/Phase	:	VERTICAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	GFSK (1 Mbps), CH00	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

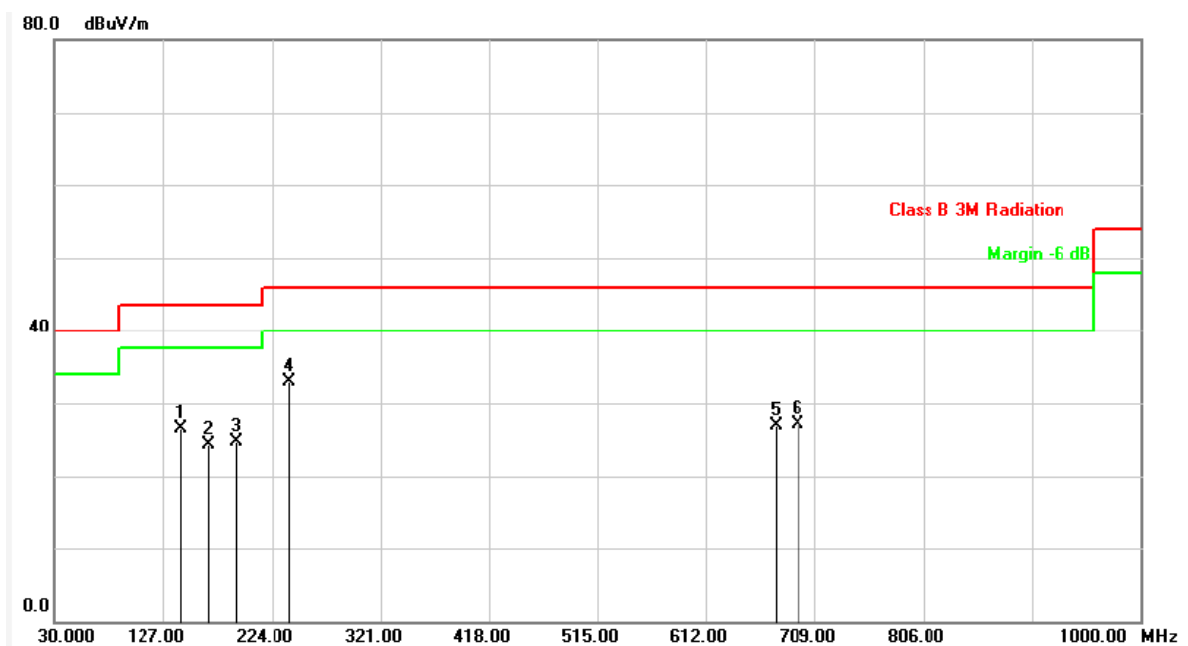

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	143.4900	-19.00	45.57	26.57	43.50	-16.93	peak	100	0	P
2	167.7400	-18.94	43.18	24.24	43.50	-19.26	peak	100	0	P
3	191.9900	-21.07	45.75	24.68	43.50	-18.82	peak	100	0	P
4	239.5200	-20.03	52.89	32.86	46.00	-13.14	peak	100	0	P
5	675.0499	-9.25	36.07	26.82	46.00	-19.18	peak	100	0	P
6	693.4800	-8.90	35.99	27.09	46.00	-18.91	peak	100	0	P

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: GFSK (1 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	95.9599	-24.05	51.38	27.33	43.50	-16.17	peak	100	0	P
2	133.7899	-19.80	48.60	28.80	43.50	-14.70	peak	100	0	P
3	191.9900	-21.07	46.01	24.94	43.50	-18.56	peak	100	0	P
4	239.5200	-20.03	47.07	27.04	46.00	-18.96	peak	100	0	P
5	685.7199	-9.05	31.95	22.90	46.00	-23.10	peak	100	0	P
6	699.2999	-8.79	34.29	25.50	46.00	-20.50	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: $\pi/4$ -DQPSK (2 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

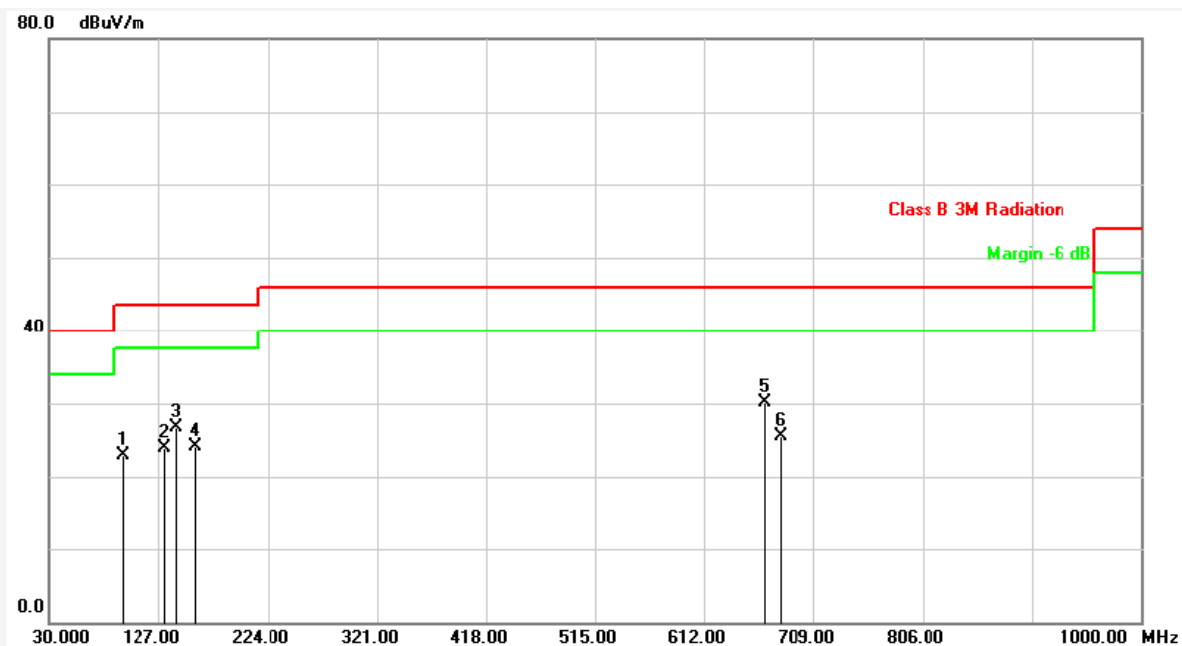

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	95.9599	-24.05	46.96	22.91	43.50	-20.59	peak	100	0	P
2	132.8199	-19.90	43.84	23.94	43.50	-19.56	peak	100	0	P
3	143.4900	-19.00	45.80	26.80	43.50	-16.70	peak	100	0	P
4	159.9798	-18.67	42.76	24.09	43.50	-19.41	peak	100	0	P
5	665.3500	-9.44	39.60	30.16	46.00	-15.84	peak	100	0	P
6	679.8999	-9.15	34.72	25.57	46.00	-20.43	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: $\pi/4$ -DQPSK (2 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

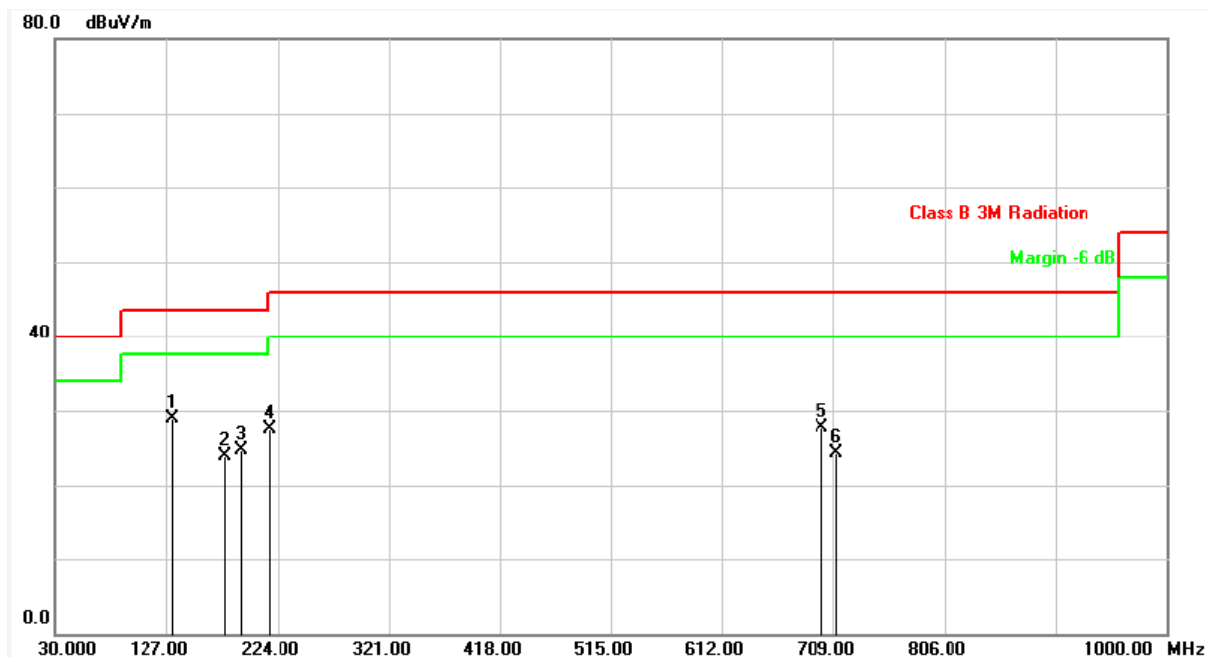

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	132.8199	-19.90	48.76	28.86	43.50	-14.64	peak	100	0	P
2	178.4099	-19.84	43.72	23.88	43.50	-19.62	peak	100	0	P
3	191.9900	-21.07	45.84	24.77	43.50	-18.73	peak	100	0	P
4	216.2400	-21.29	48.88	27.59	46.00	-18.41	peak	100	0	P
5	699.2999	-8.79	36.44	27.65	46.00	-18.35	peak	100	0	P
6	711.9099	-8.53	32.88	24.35	46.00	-21.65	peak	100	0	P

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: 8DPSK (3 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	95.9599	-24.05	45.30	21.25	43.50	-22.25	peak	100	0	P
2	127.9699	-20.38	38.23	17.85	43.50	-25.65	peak	100	0	P
3	159.9798	-18.67	42.39	23.72	43.50	-19.78	peak	100	0	P
4	250.1899	-19.64	37.99	18.35	46.00	-27.65	peak	100	0	P
5	680.8700	-9.14	27.22	18.08	46.00	-27.92	peak	100	0	P
6	697.3600	-8.83	25.98	17.15	46.00	-28.85	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: 8DPSK (3 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

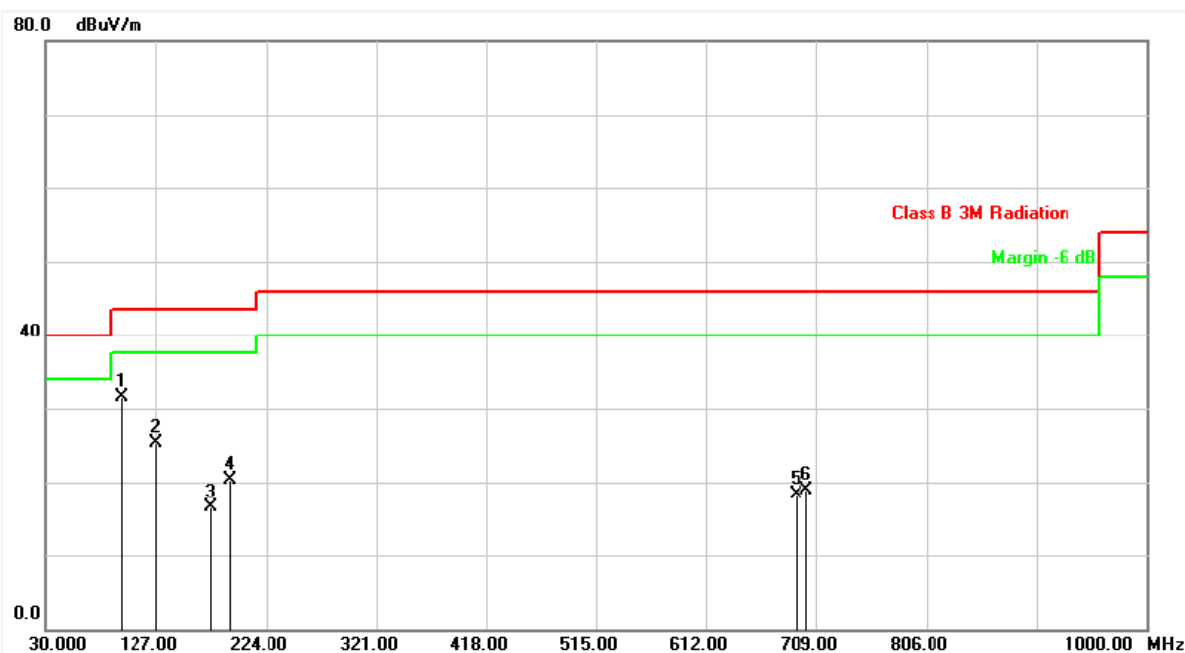

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	95.9600	-24.05	55.53	31.48	43.50	-12.02	peak	100	0	P
2	127.9699	-20.38	45.71	25.33	43.50	-18.17	peak	100	0	P
3	175.5000	-19.56	36.12	16.56	43.50	-26.94	peak	100	0	P
4	191.9900	-21.07	41.29	20.22	43.50	-23.28	peak	100	0	P
5	691.5399	-8.94	27.25	18.31	46.00	-27.69	peak	100	0	P
6	700.2698	-8.78	27.78	19.00	46.00	-27.00	peak	100	0	P

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



5.7 Test Result and Data (1GHz ~ 25GHz)

Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: GFSK (1Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

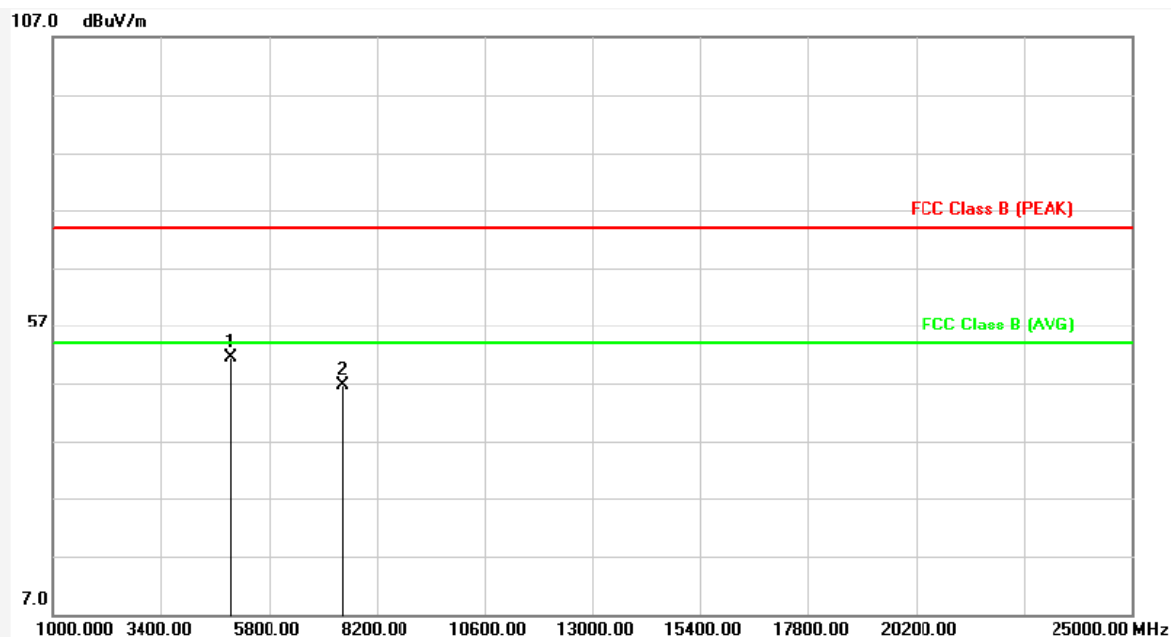

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	69.05	51.26	74.00	-22.74	peak	100	0	P
2	7432.000	-11.38	58.07	46.69	74.00	-27.31	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: GFSK (1Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

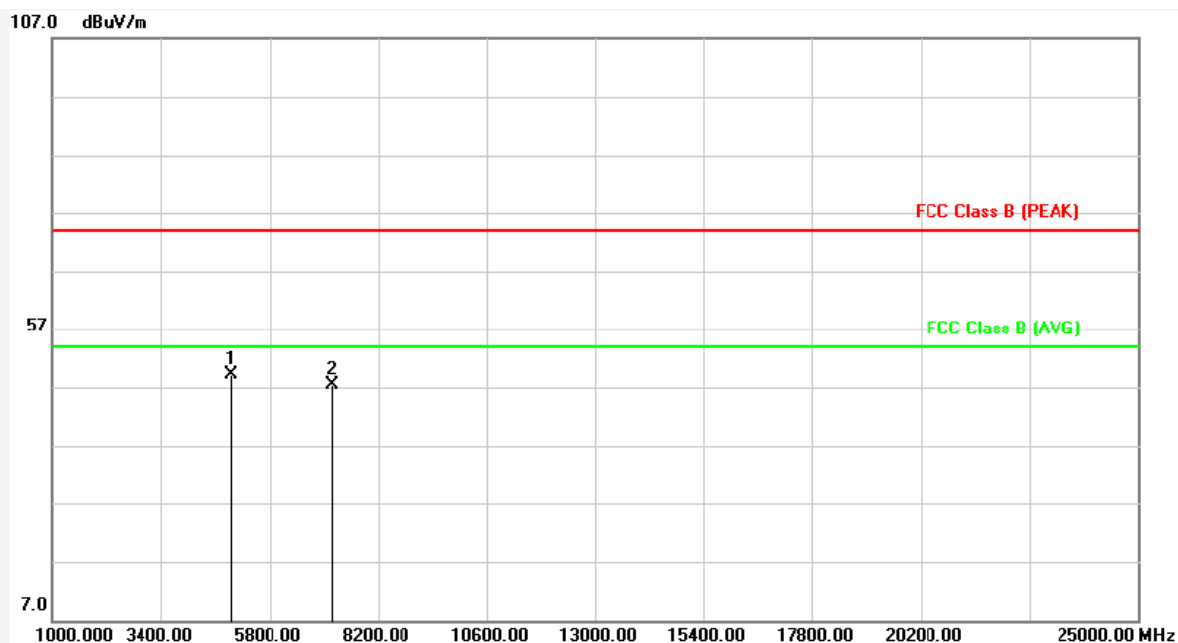

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	66.97	49.18	74.00	-24.82	peak	100	0	P
2	7192.000	-12.86	60.19	47.33	74.00	-26.67	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	VERTICAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	GFSK (1Mbps), CH39	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

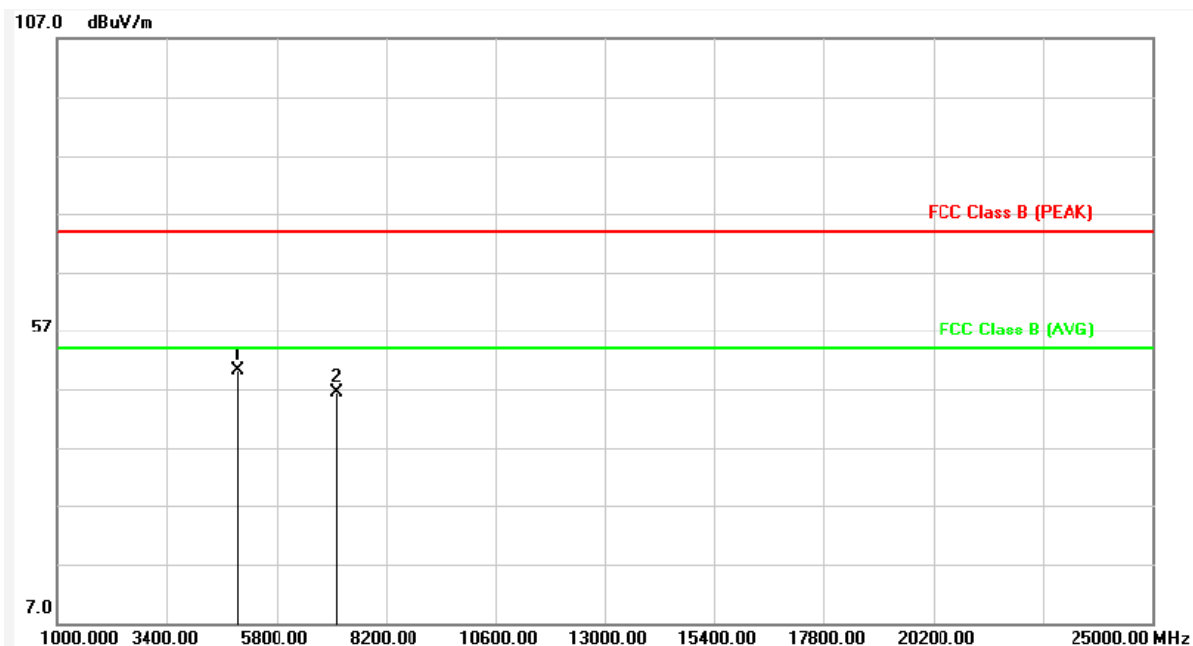

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	68.02	50.23	74.00	-23.77	peak	100	0	P
2	7120.000	-13.31	59.64	46.33	74.00	-27.67	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	HORIZONTAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	GFSK (1Mbps), CH39	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

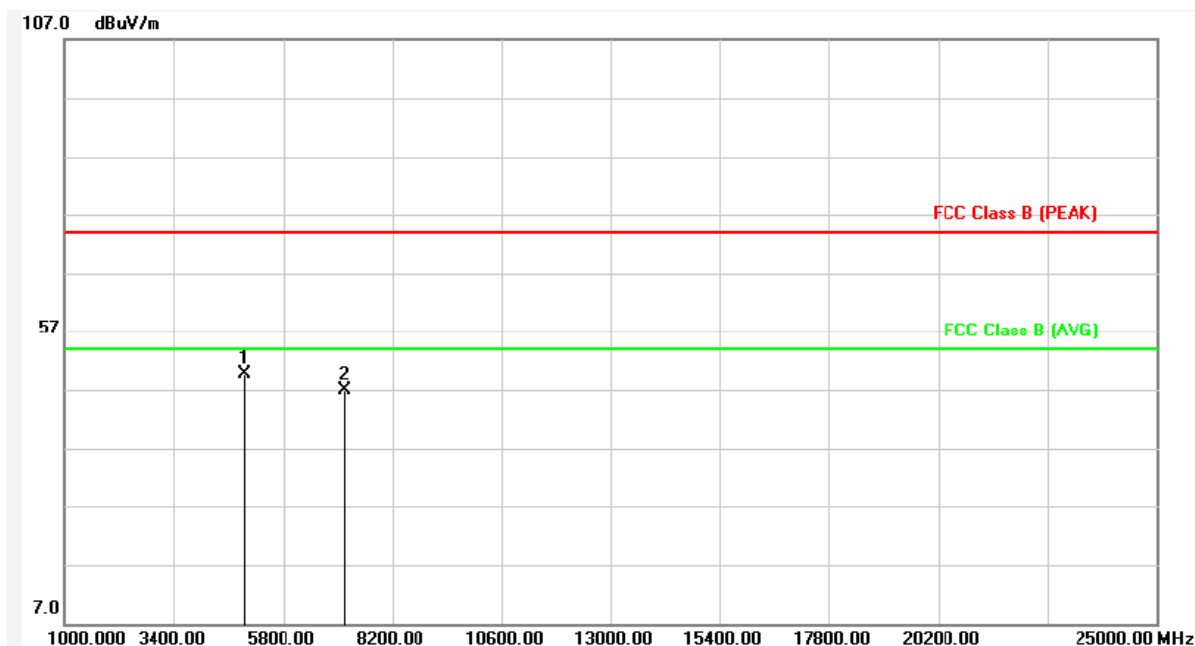

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.39	49.60	74.00	-24.40	peak	100	0	P
2	7144.000	-13.17	59.96	46.79	74.00	-27.21	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: GFSK (1Mbps), CH78	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

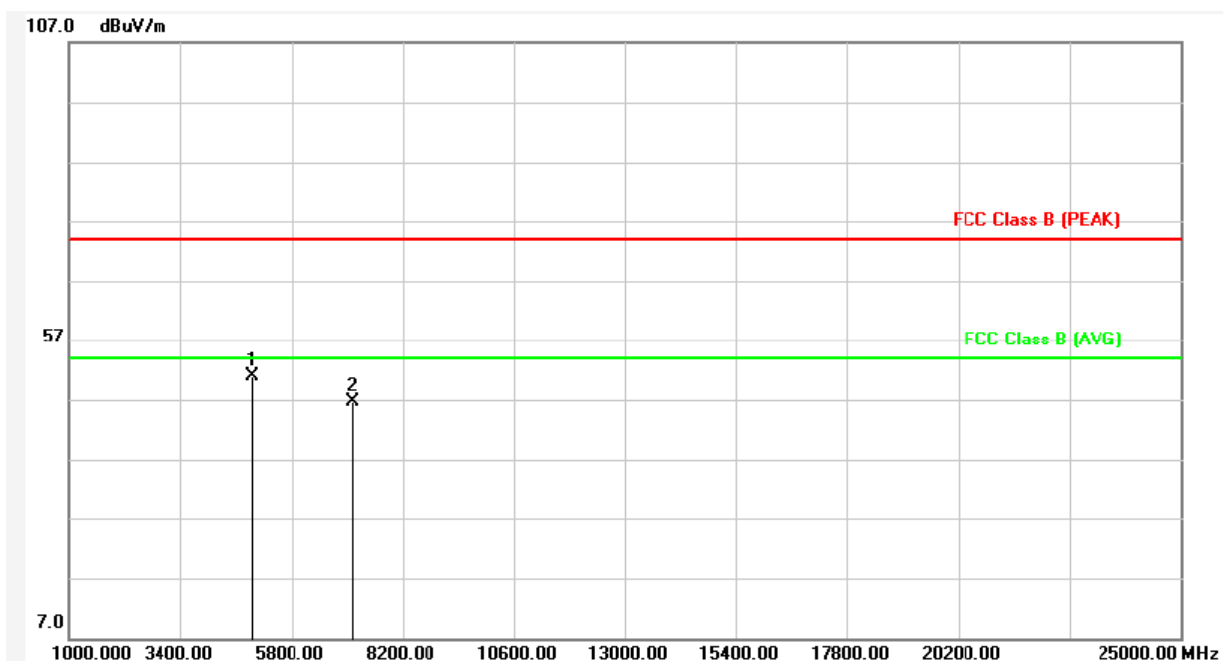

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	68.73	50.94	74.00	-23.06	peak	100	0	P
2	7120.000	-13.31	59.97	46.66	74.00	-27.34	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: GFSK (1Mbps), CH78	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

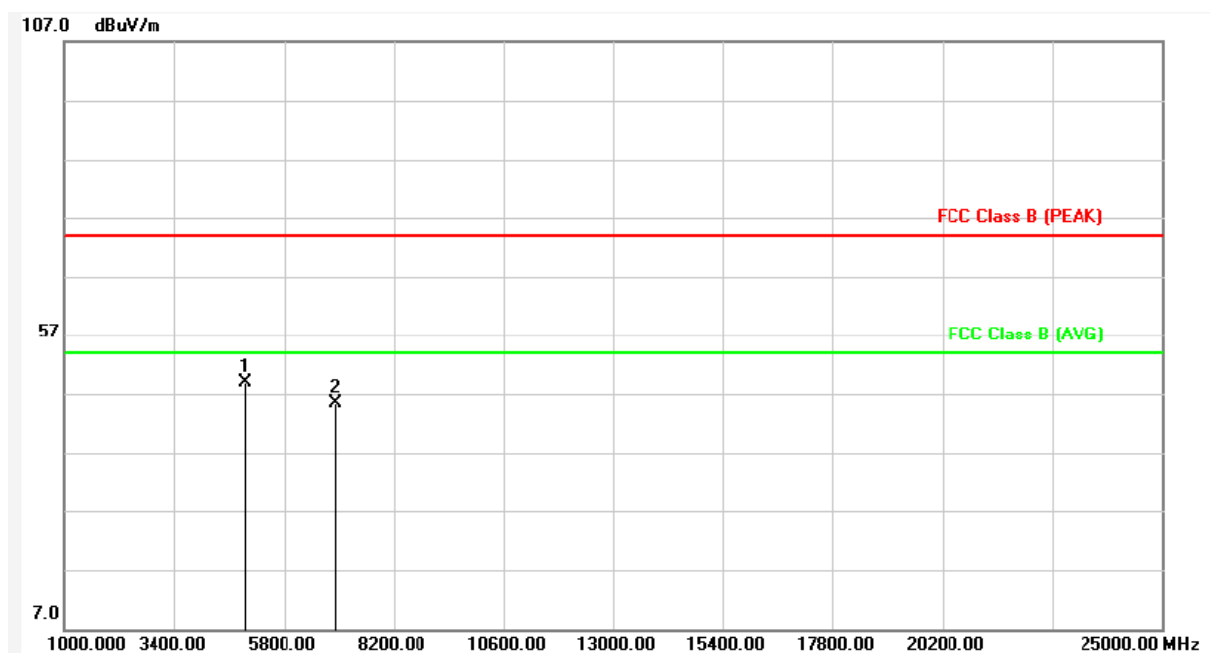

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	66.72	48.93	74.00	-25.07	peak	100	0	P
2	6928.000	-14.44	59.78	45.34	74.00	-28.66	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	VERTICAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	$\pi/4$ -DQPSK (2 Mbps), CH00	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

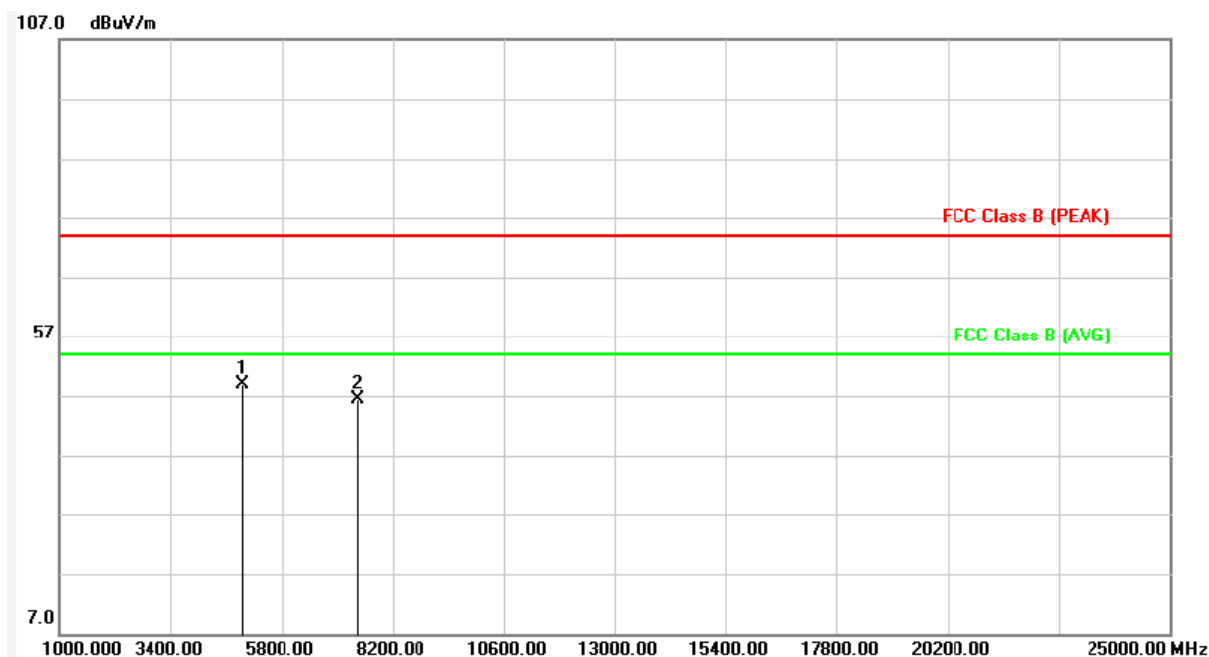

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	66.71	48.92	74.00	-25.08	peak	100	0	P
2	7432.000	-11.38	57.73	46.35	74.00	-27.65	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: $\pi/4$ -DQPSK (2 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

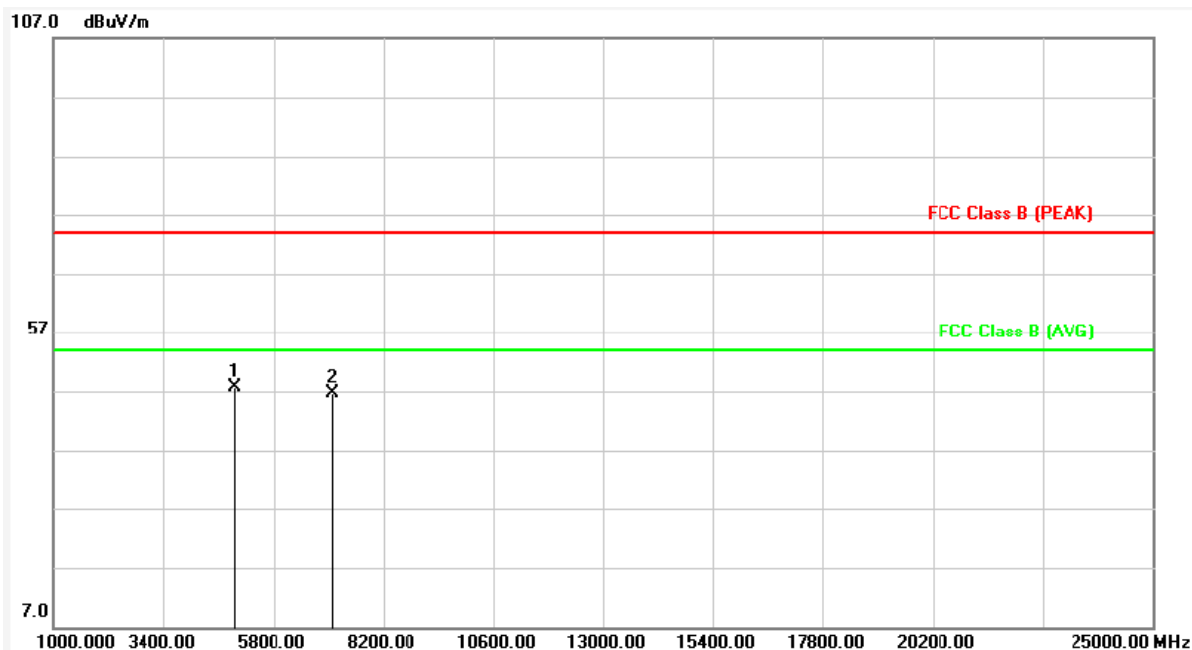

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	65.54	47.75	74.00	-26.25	peak	100	0	P
2	7096.000	-13.46	60.19	46.73	74.00	-27.27	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	VERTICAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	$\pi/4$ -DQPSK (2 Mbps), CH39	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

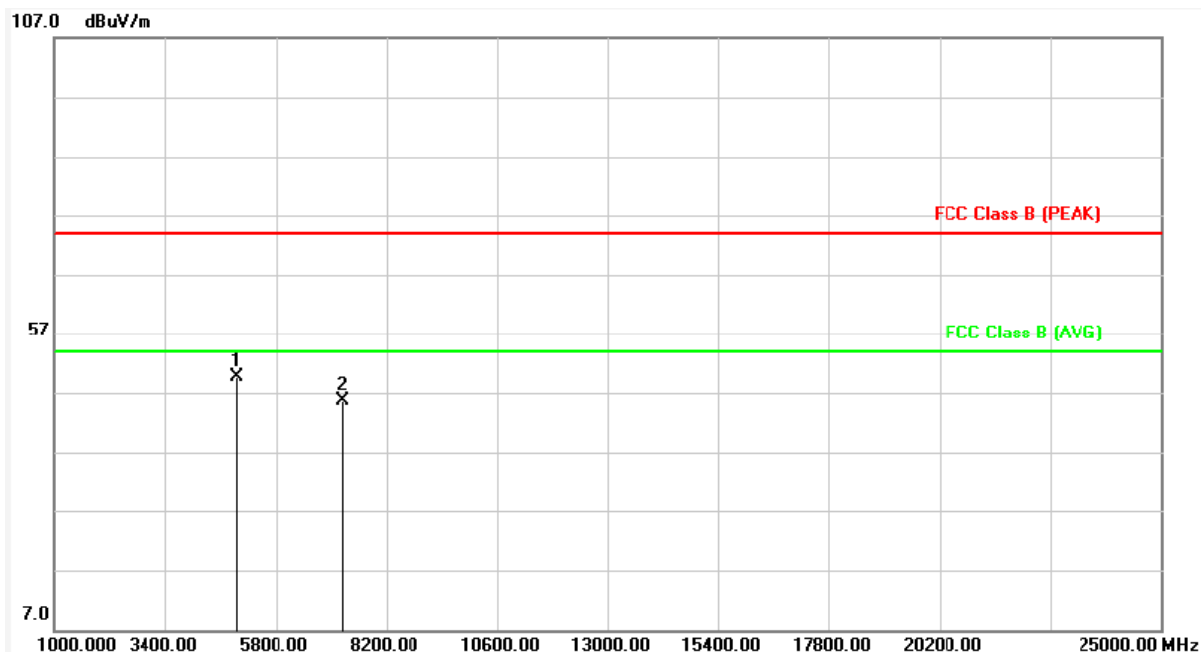

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.42	49.63	74.00	-24.37	peak	100	0	P
2	7240.000	-12.57	58.30	45.73	74.00	-28.27	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: $\pi/4$ -DQPSK (2 Mbps), CH39	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

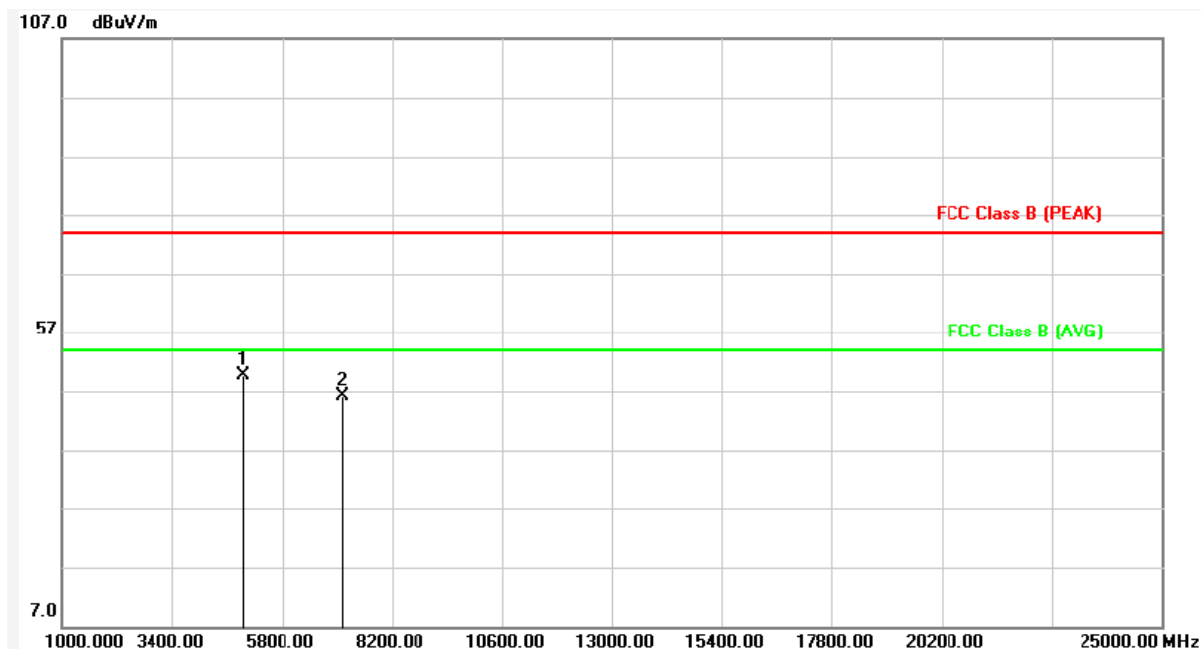

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.42	49.63	74.00	-24.37	peak	100	0	P
2	7120.000	-13.31	59.39	46.08	74.00	-27.92	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: $\pi/4$ -DQPSK (2 Mbps), CH78	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

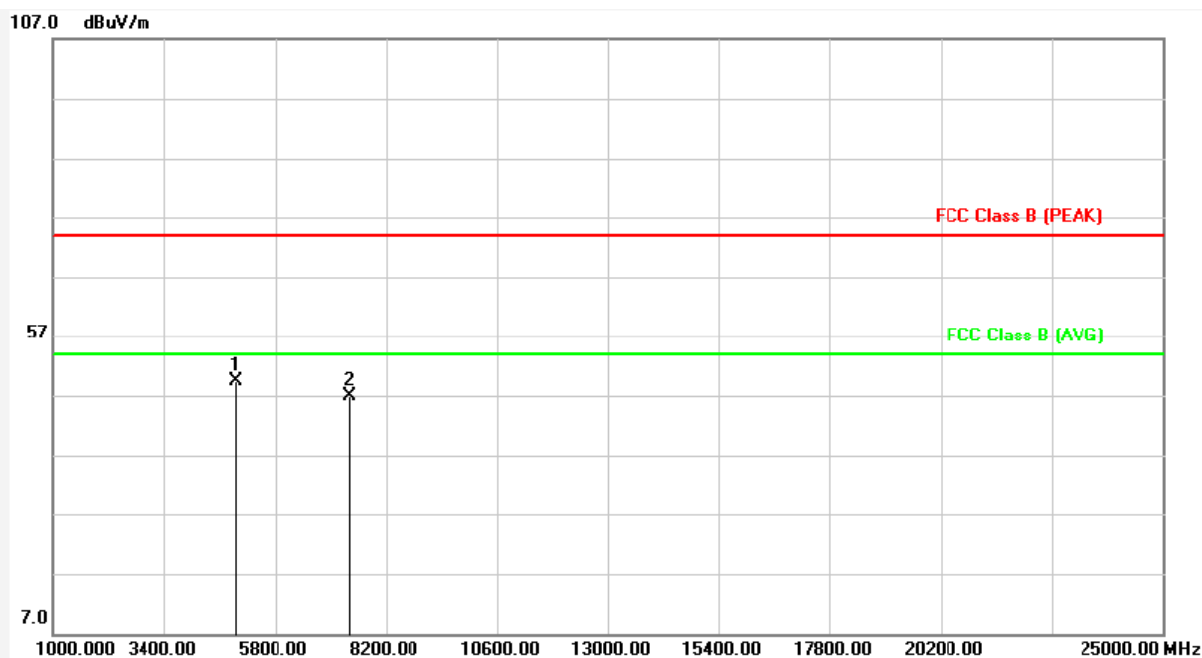

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.29	49.50	74.00	-24.50	peak	100	0	P
2	7408.000	-11.53	58.29	46.76	74.00	-27.24	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: $\pi/4$ -DQPSK (2 Mbps), CH78	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

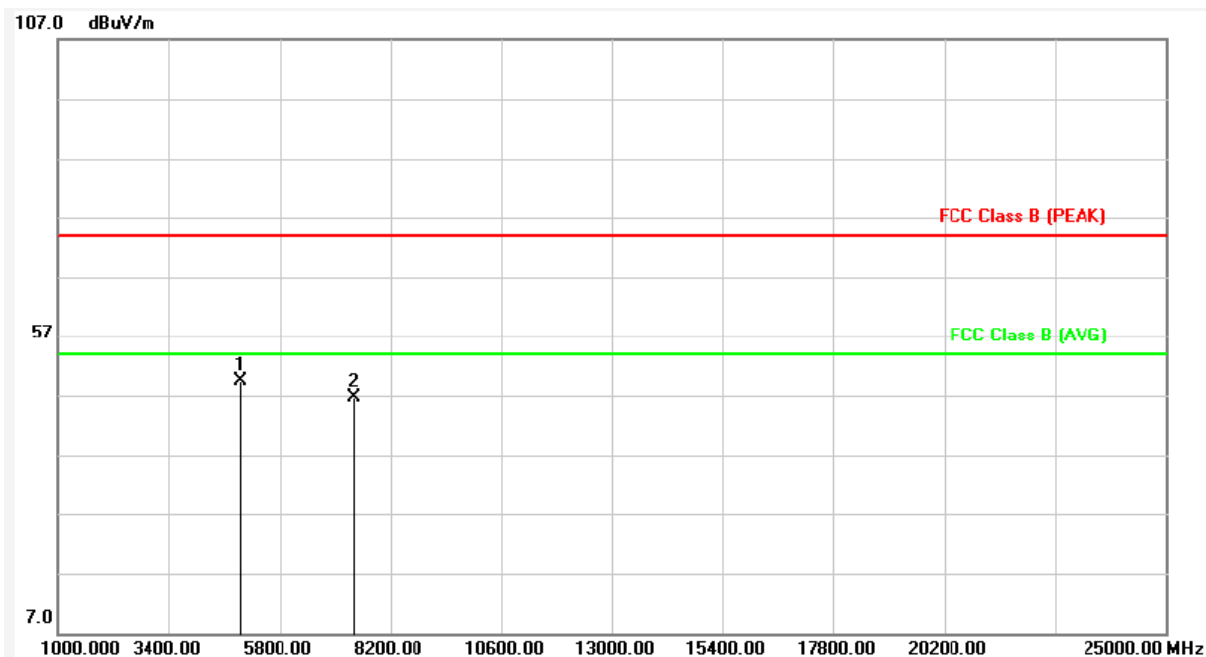

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.29	49.50	74.00	-24.50	peak	100	0	P
2	7408.000	-11.53	58.27	46.74	74.00	-27.26	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: 8DPSK (3 Mbps), CH00	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

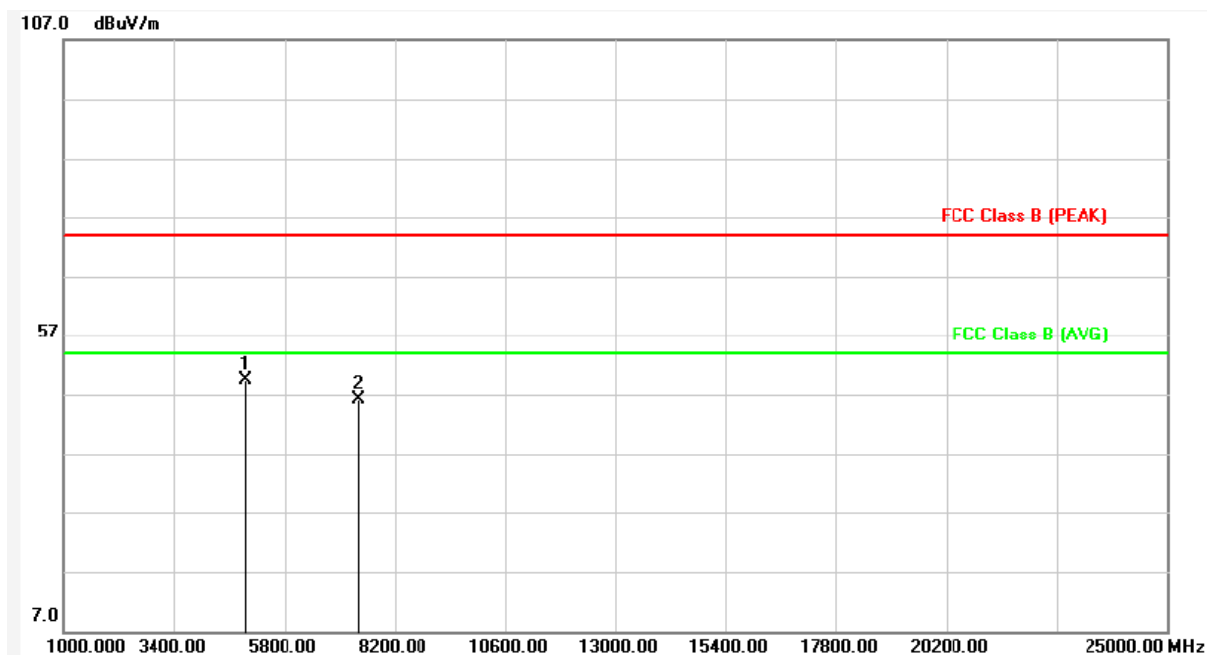

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.28	49.49	74.00	-24.51	peak	100	0	P
2	7408.000	-11.53	57.59	46.06	74.00	-27.94	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	HORIZONTAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	8DPSK (3 Mbps), CH00	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

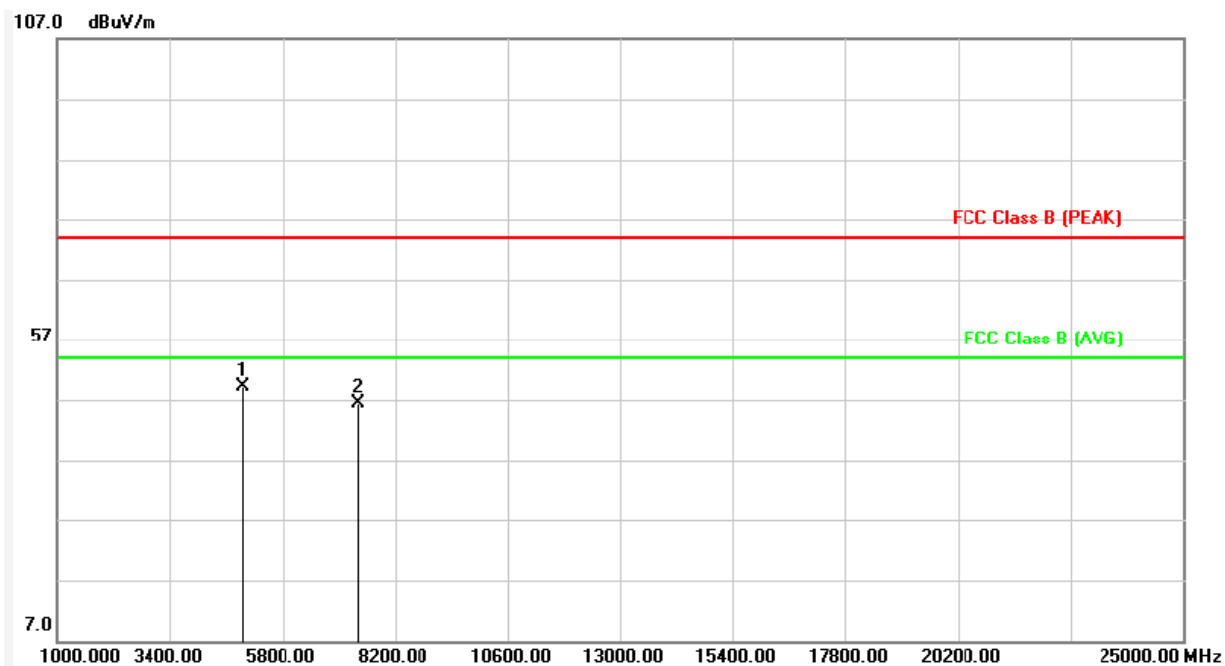

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.00	49.21	74.00	-24.79	peak	100	0	P
2	7408.000	-11.53	57.88	46.35	74.00	-27.65	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	VERTICAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	8DPSK (3 Mbps), CH39	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

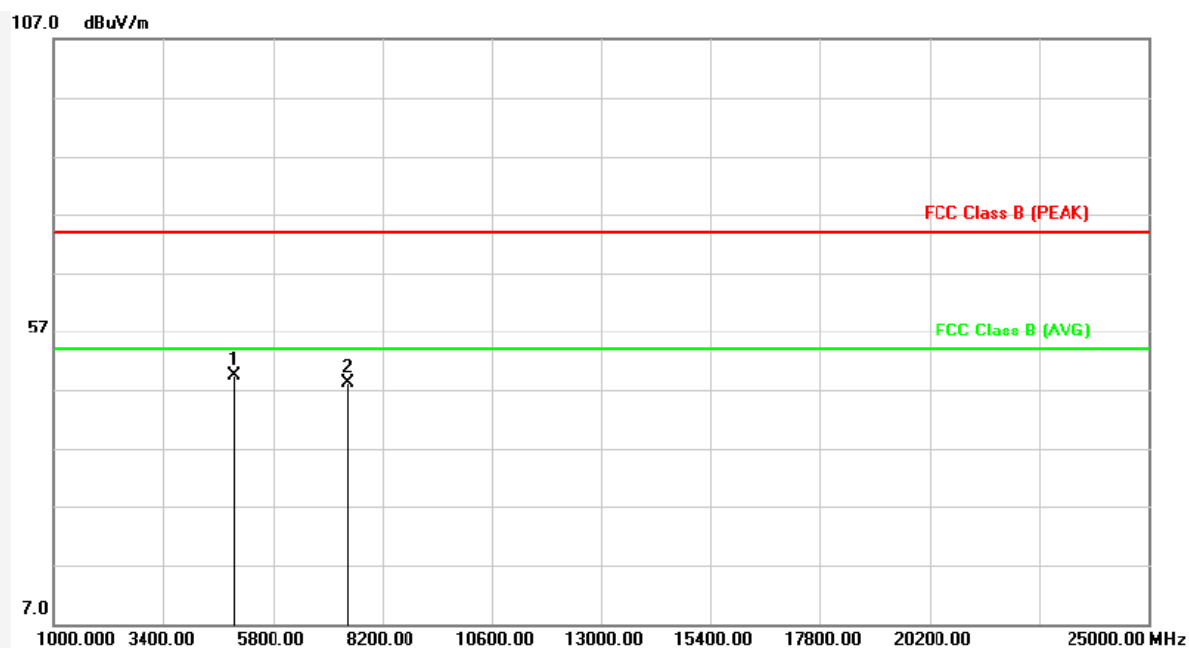

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.09	49.30	74.00	-24.70	peak	100	0	P
2	7432.000	-11.38	59.49	48.11	74.00	-25.89	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	:	From System	Pol/Phase	:	HORIZONTAL
Test Mode	:	Transmit	Temperature	:	22 °C
Modulation Type	:	8DPSK (3 Mbps), CH39	Humidity	:	54 %
Test Date	:	Dec. 09, 2014	Atmospheric Pressure	:	1013 hPa

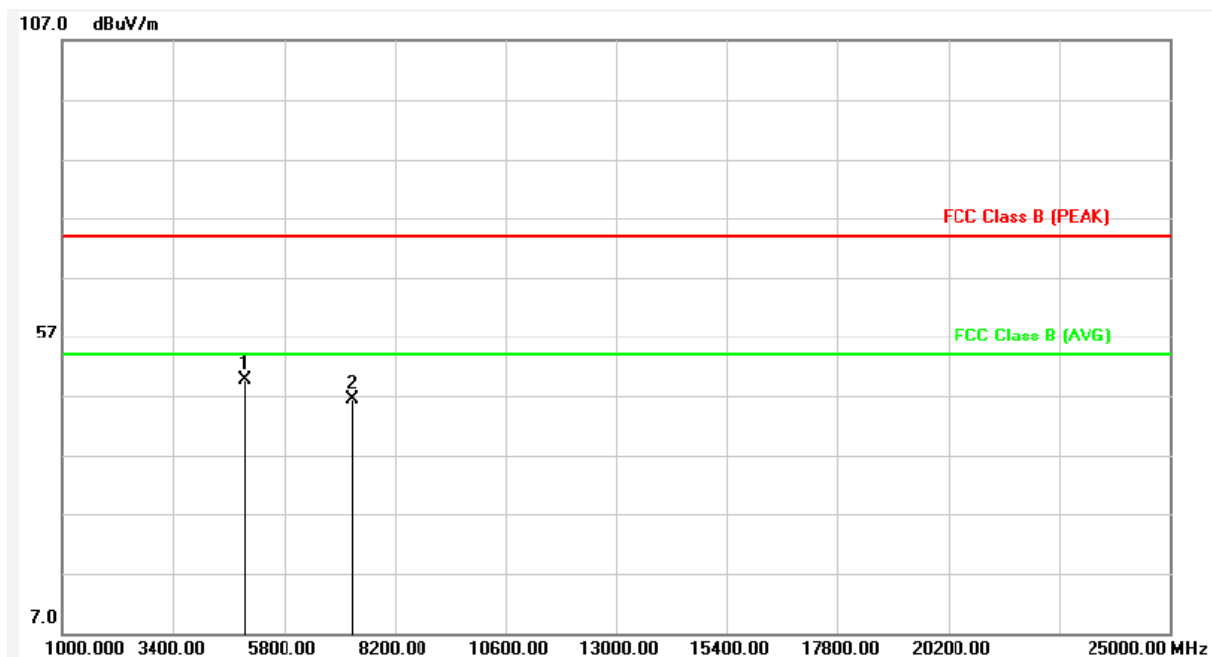

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.30	49.51	74.00	-24.49	peak	100	0	P
2	7288.000	-12.26	58.58	46.32	74.00	-27.68	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: 8DPSK (3 Mbps), CH78	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

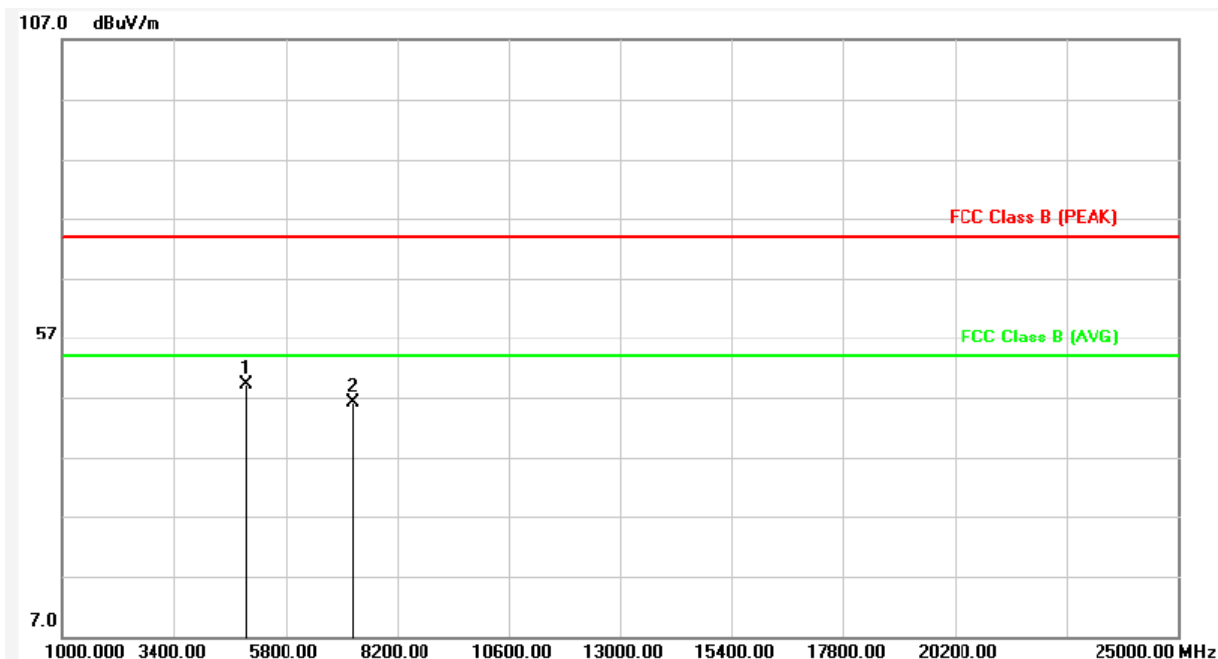

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.00	49.21	74.00	-24.79	peak	100	0	P
2	7240.000	-12.57	58.73	46.16	74.00	-27.84	peak	100	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 22 °C
Modulation Type	: 8DPSK (3 Mbps), CH78	Humidity	: 54 %
Test Date	: Dec. 09, 2014	Atmospheric Pressure	: 1013 hPa

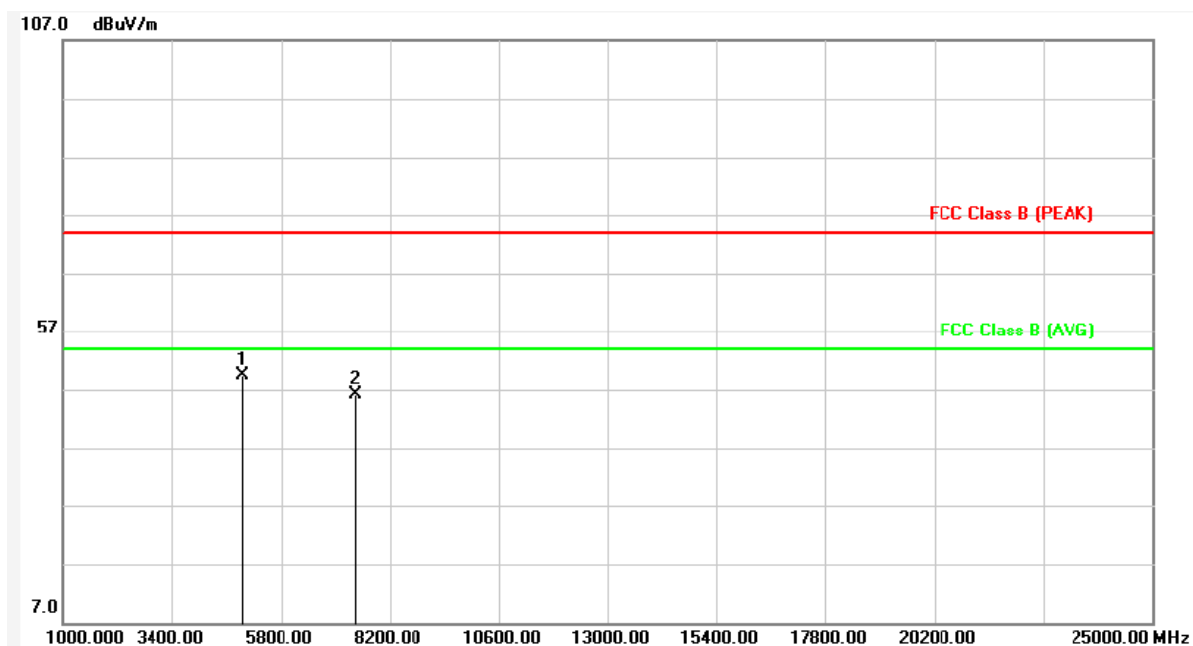

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4960.000	-17.79	67.11	49.32	74.00	-24.68	peak	100	0	P
2	7432.000	-11.38	57.45	46.07	74.00	-27.93	peak	100	0	P

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor




5.8 Test Photographs (30MHz ~ 1GHz)

Front View

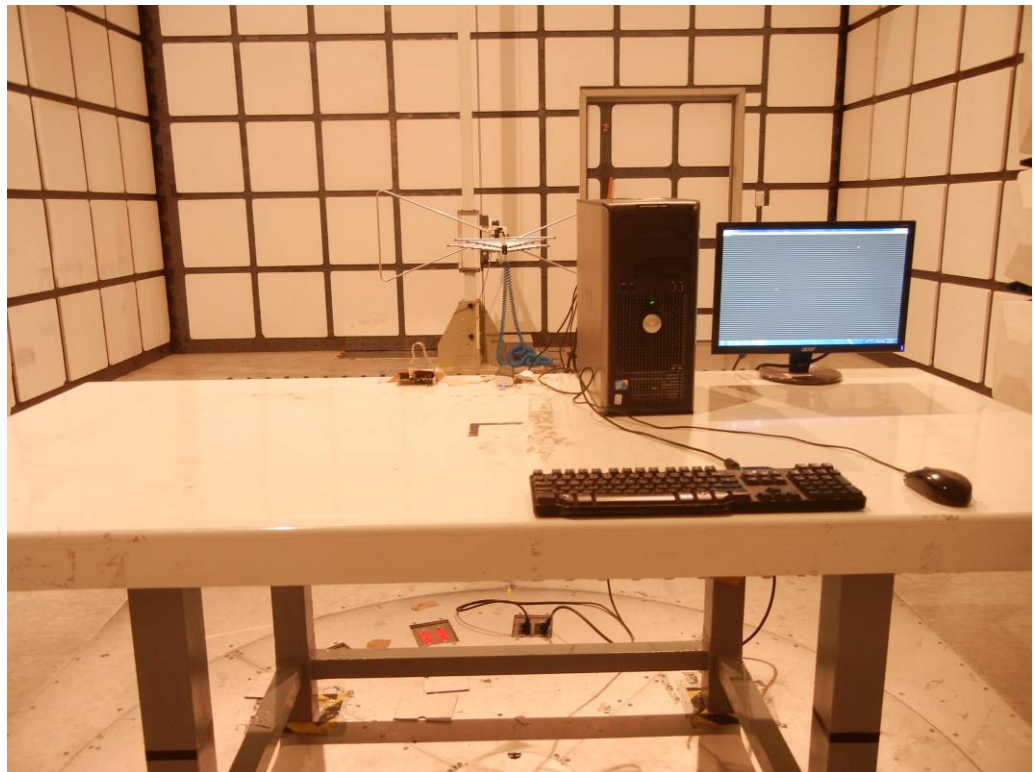


Rear View

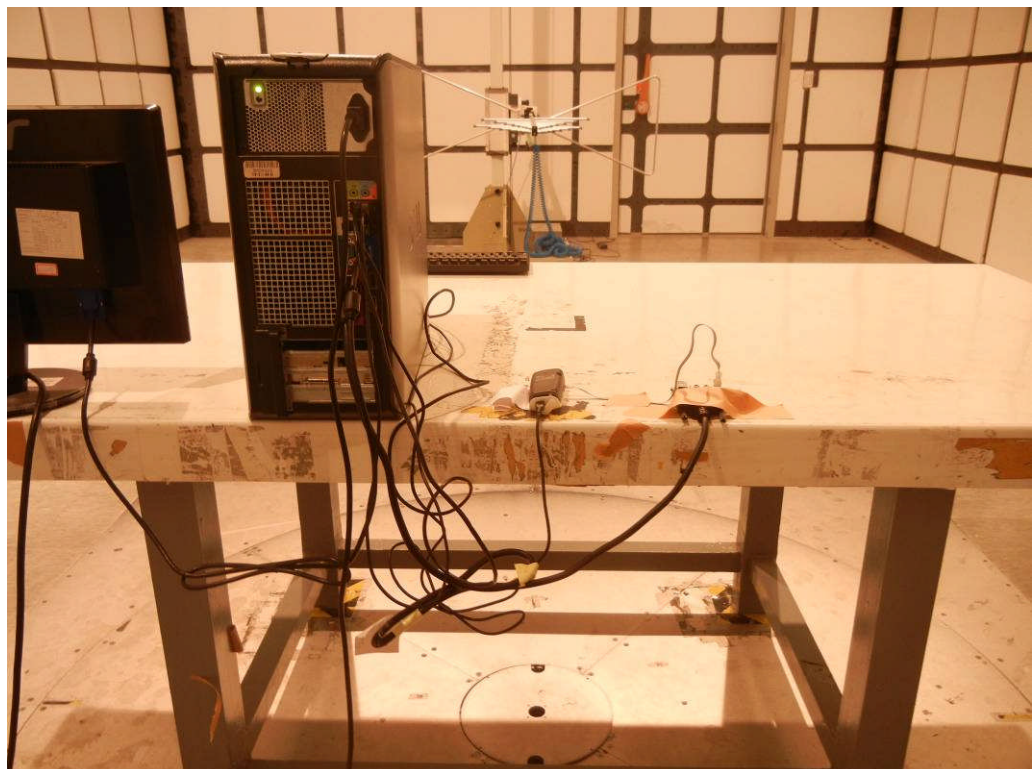




5.9 Test Photographs (1GHz ~ 25GHz)

Front View

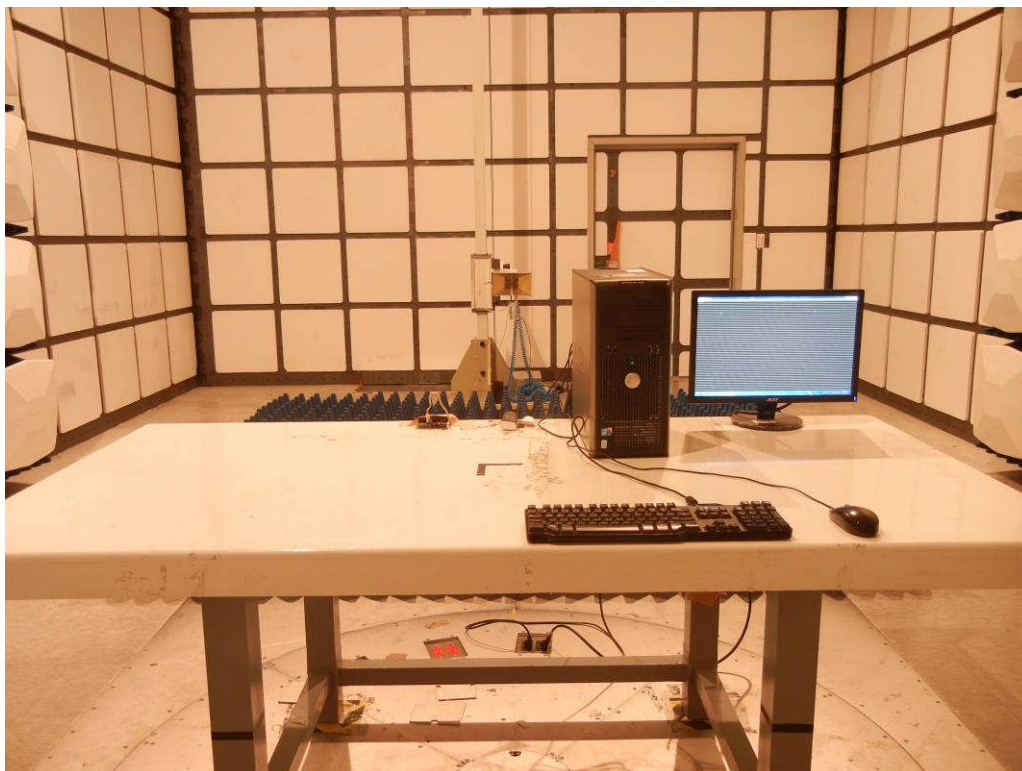

Rear View

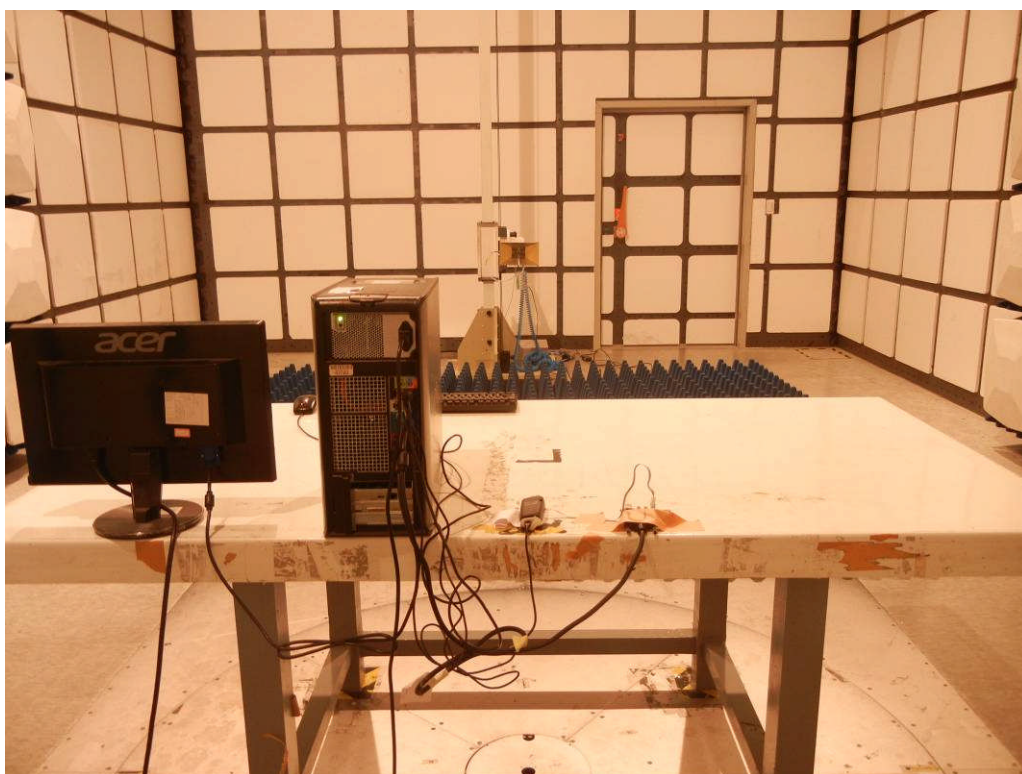



6. 20dB Bandwidth Measurement Data


6.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

6.3 Test Setup Layout



6.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26



6.5 Test Result and Data

Test Date: Dec. 10, 2014

Temperature: 22 °C


Atmospheric pressure: 1017 hPa

Humidity: 52 %


Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (KHz)	2/3 20dB Bandwidth (KHz)
GFSK (1Mbps)	00	2402	804	536.0
	39	2441	796	530.6
	78	2480	812	541.3
$\pi/4$ -DQPSK (2 Mbps)	00	2402	1284	856.0
	39	2441	1276	850.6
	78	2480	1348	898.6
8DPSK (3Mbps)	00	2402	1312	874.6
	39	2441	1308	872.0
	78	2480	1316	877.3



Modulation Standard: GFSK (1Mbps)
Channel: 00

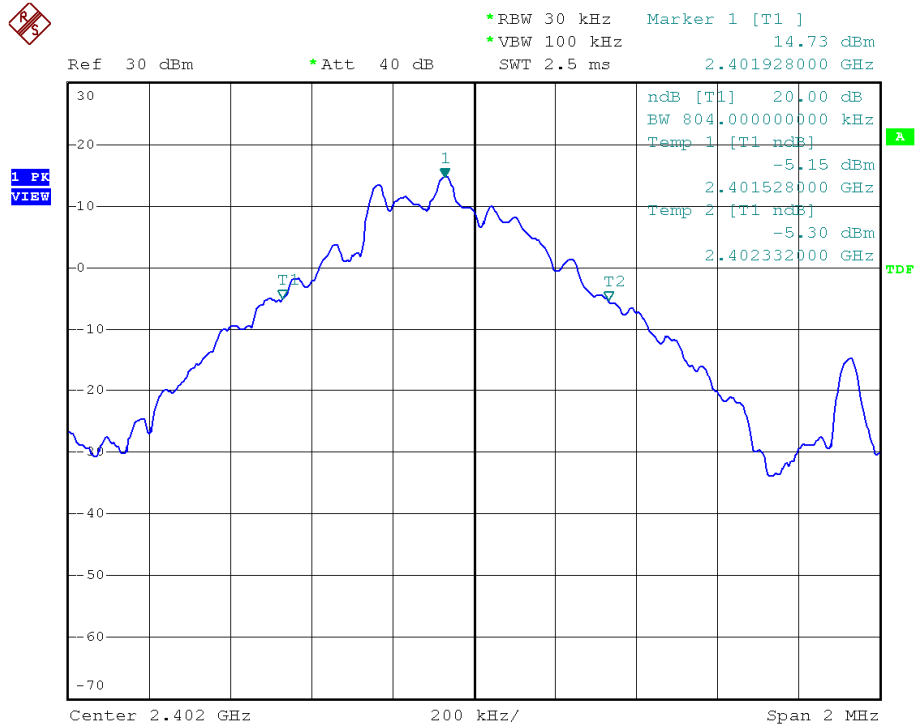


Modulation Standard: GFSK (1Mbps)
Channel: 39

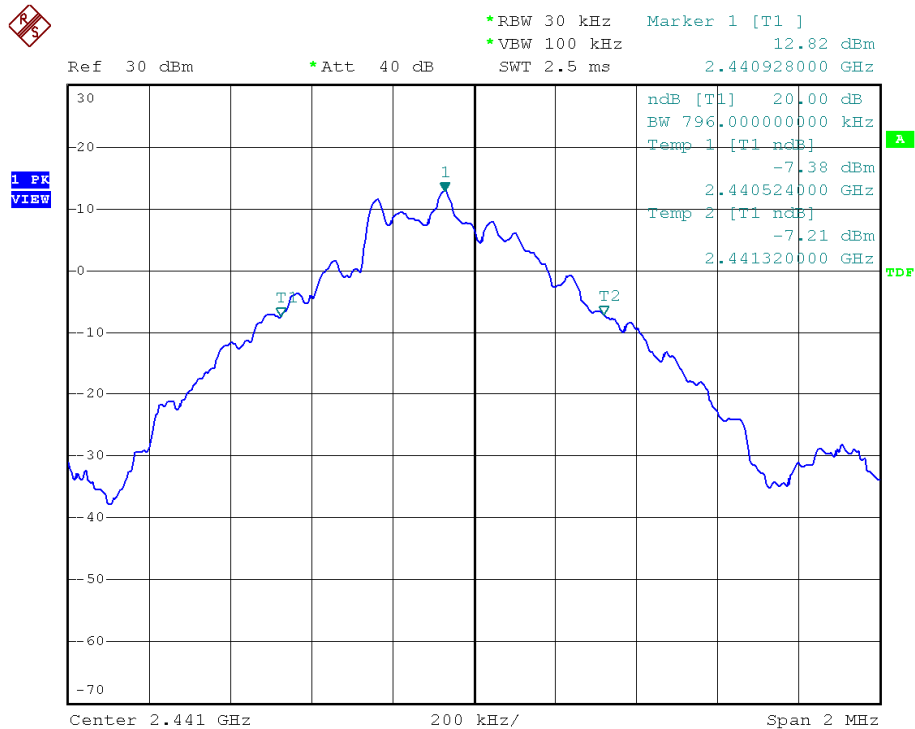




Modulation Standard: GFSK (1Mbps)
Channel: 78

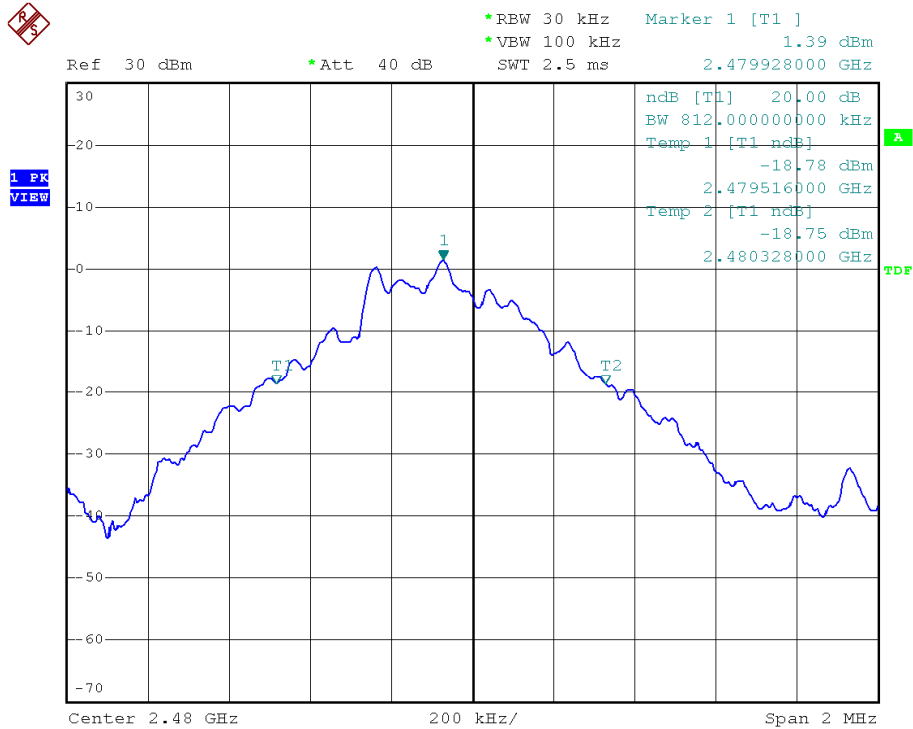


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

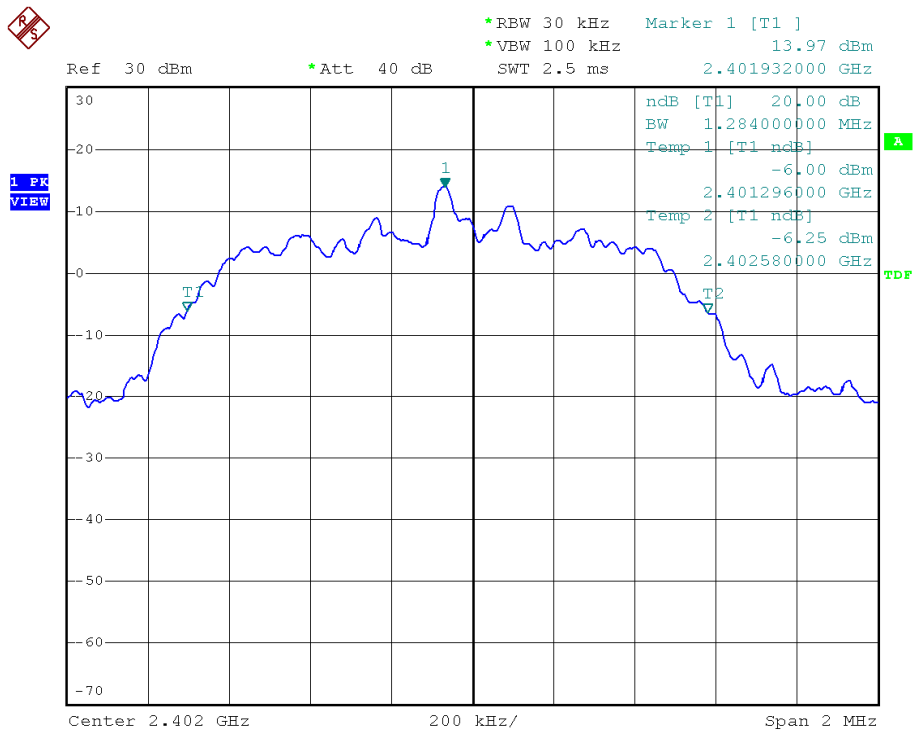




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

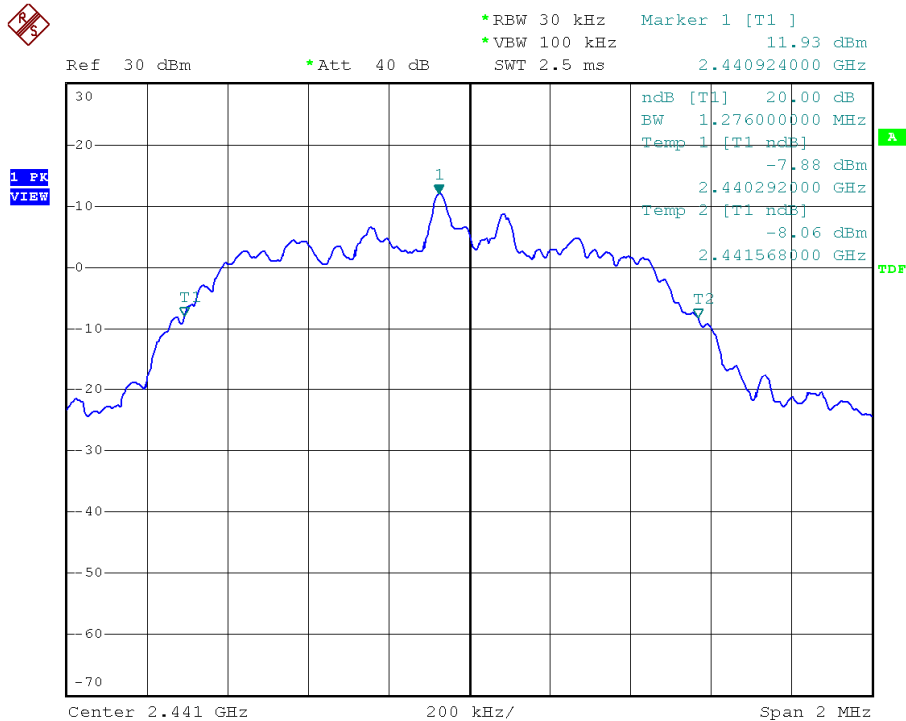


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

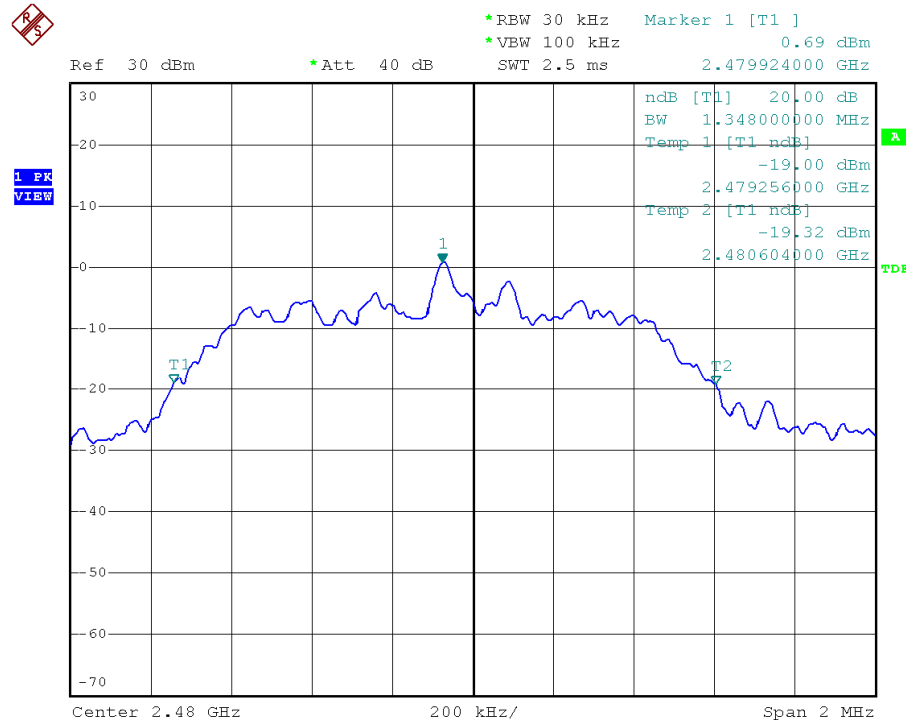




Modulation Standard: 8DPSK (3Mbps)

Channel: 00

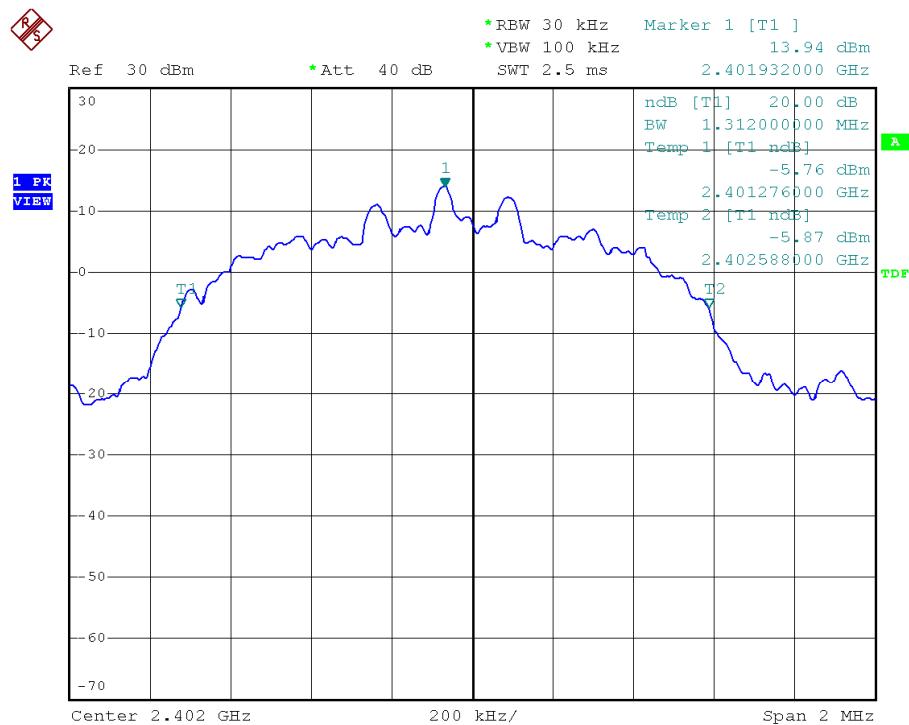


Modulation Standard: 8DPSK (3Mbps)

Channel: 39

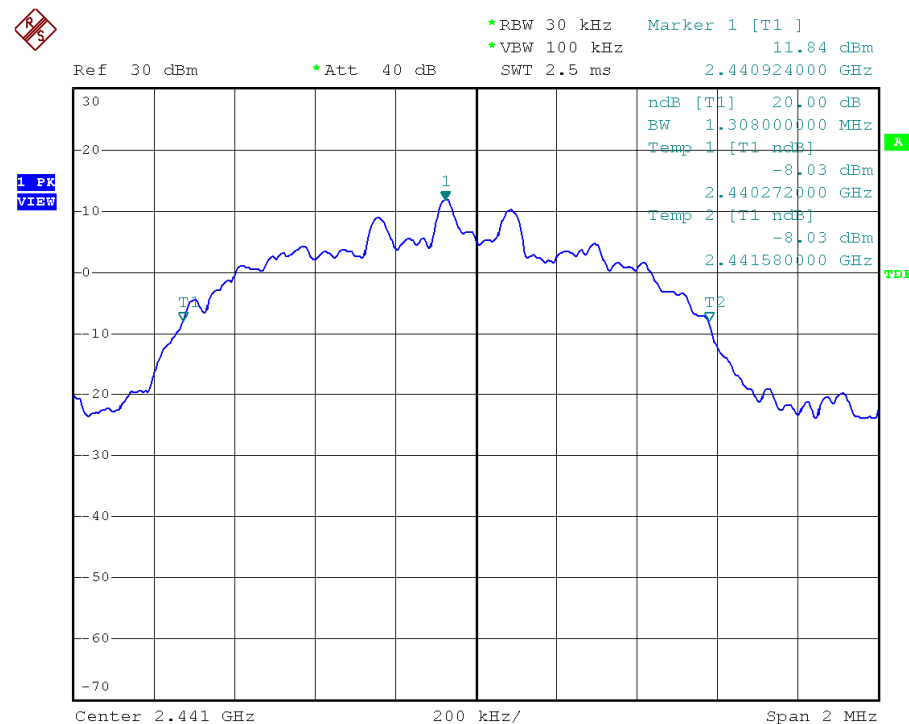



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

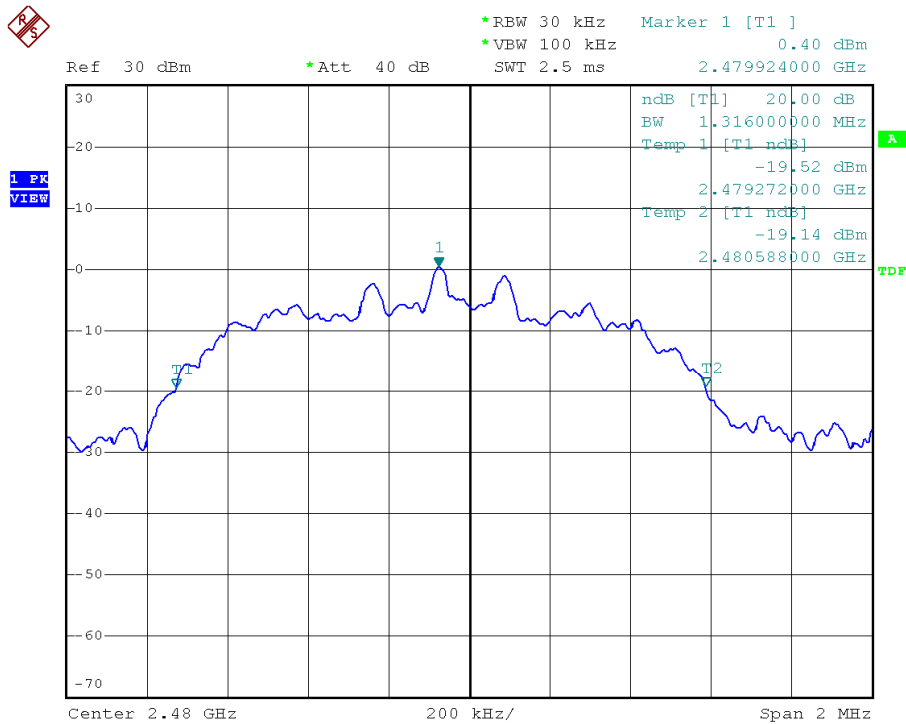



7. Frequencies Separation


7.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

7.3 Test Setup Layout



7.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26



7.5 Test Result and Data

Test Date: Dec. 10, 2014

Temperature: 22 °C


Atmospheric pressure: 1017 hPa

Humidity: 52 %


Modulation Type	Channel	Frequency (MHz)	Frequency Separation (MHz)
GFSK (1Mbps)	00	2402	1.000
	39	2441	1.000
	78	2480	1.000
$\pi/4$ -DQPSK (2 Mbps)	00	2402	1.000
	39	2441	1.000
	78	2480	1.000
8DPSK (3Mbps)	00	2402	1.000
	39	2441	1.000
	78	2480	1.000



Modulation Standard: GFSK (1Mbps)
Channel: 00

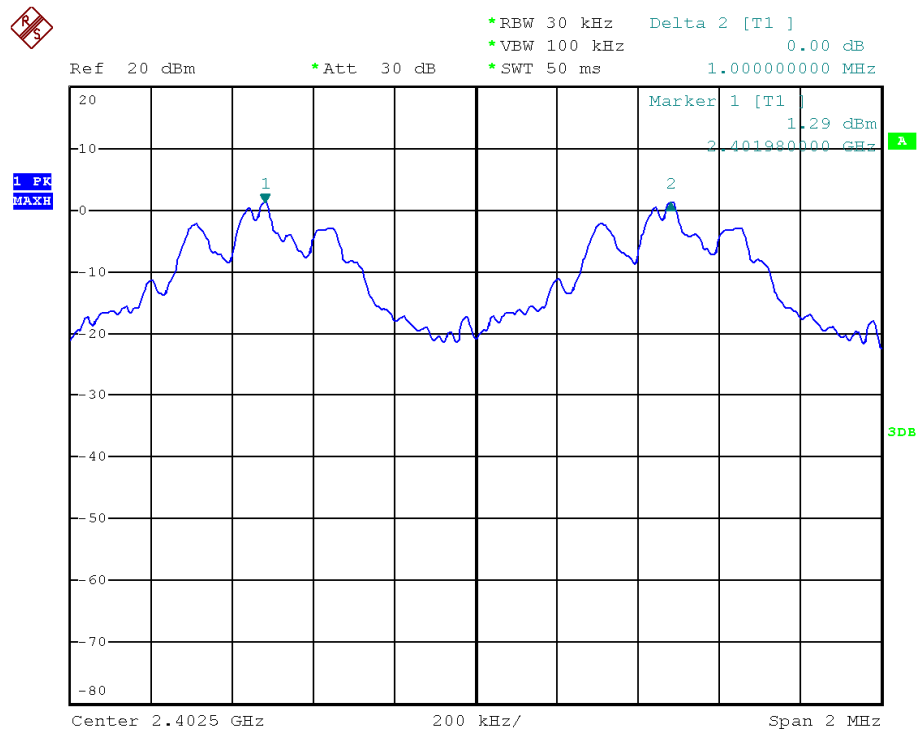


Modulation Standard: GFSK (1Mbps)
Channel: 39

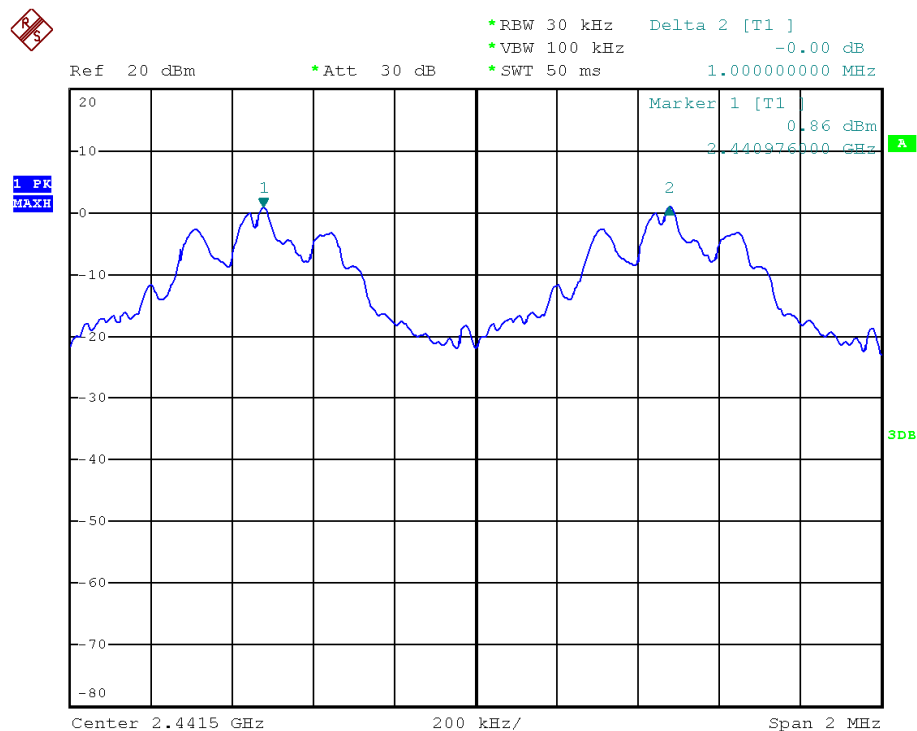




Modulation Standard: GFSK (1Mbps)
Channel: 78

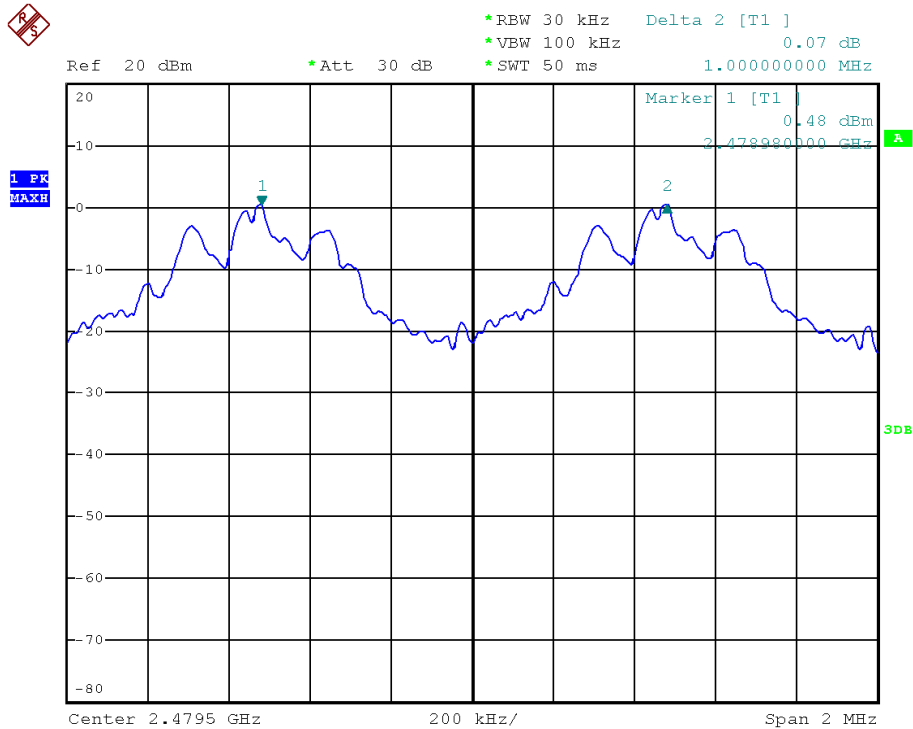


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

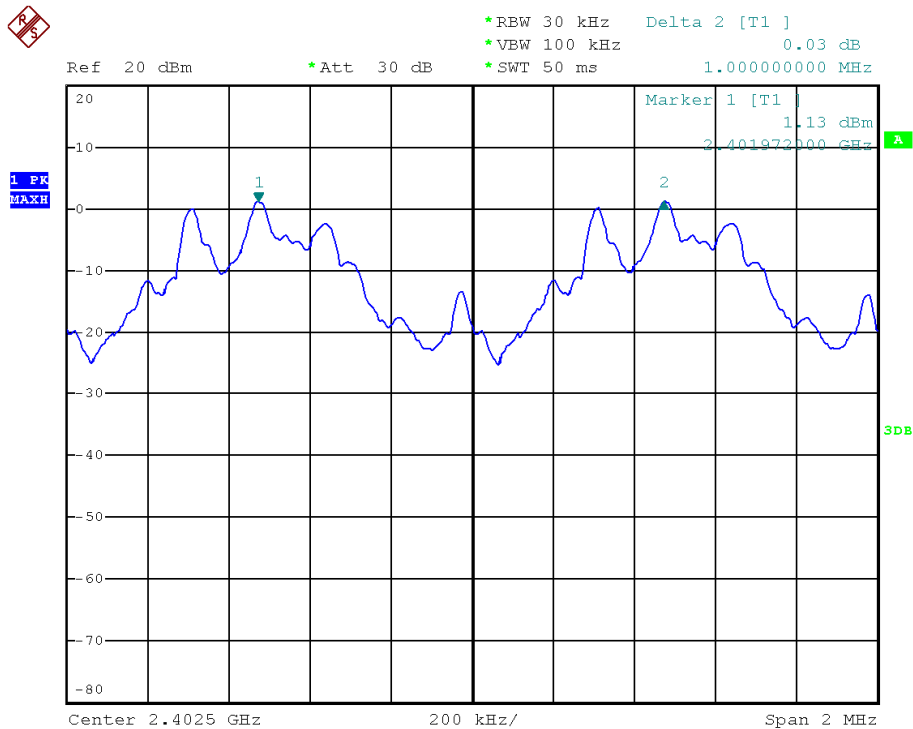




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

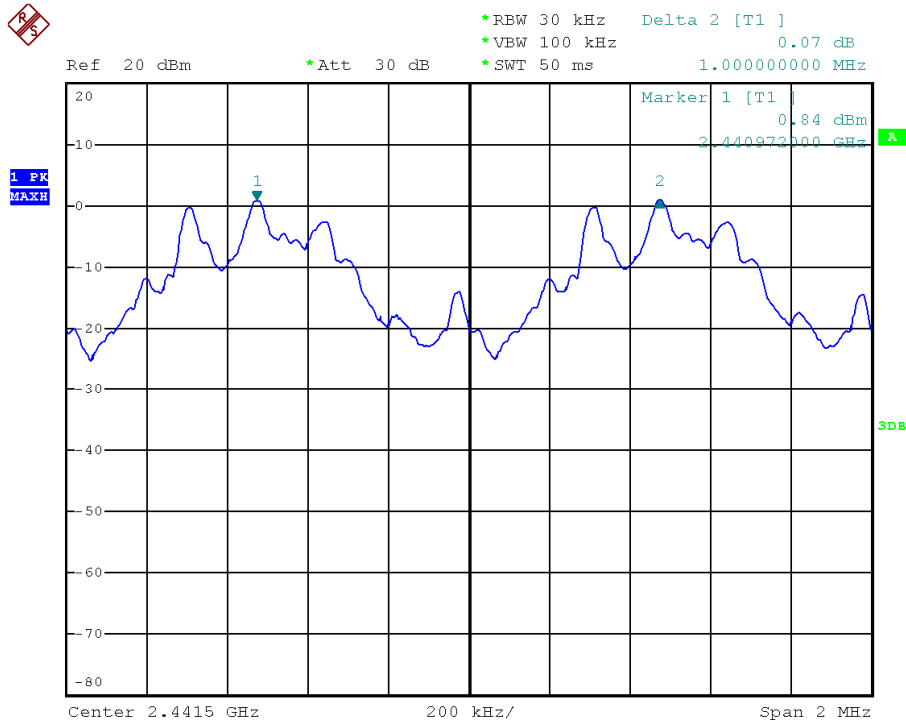


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

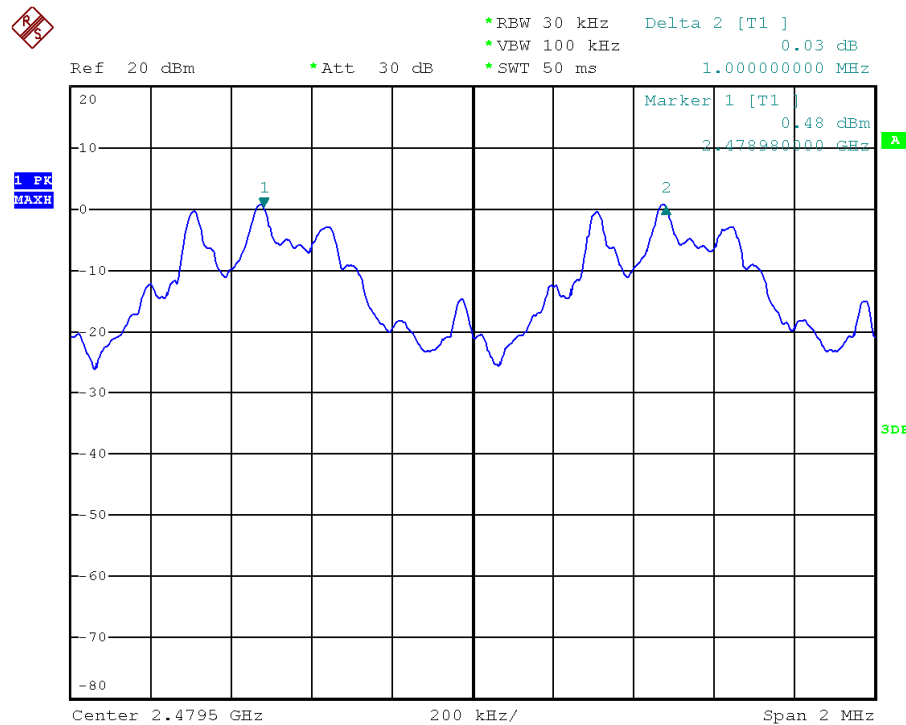




Modulation Standard: 8DPSK (3Mbps)

Channel: 00

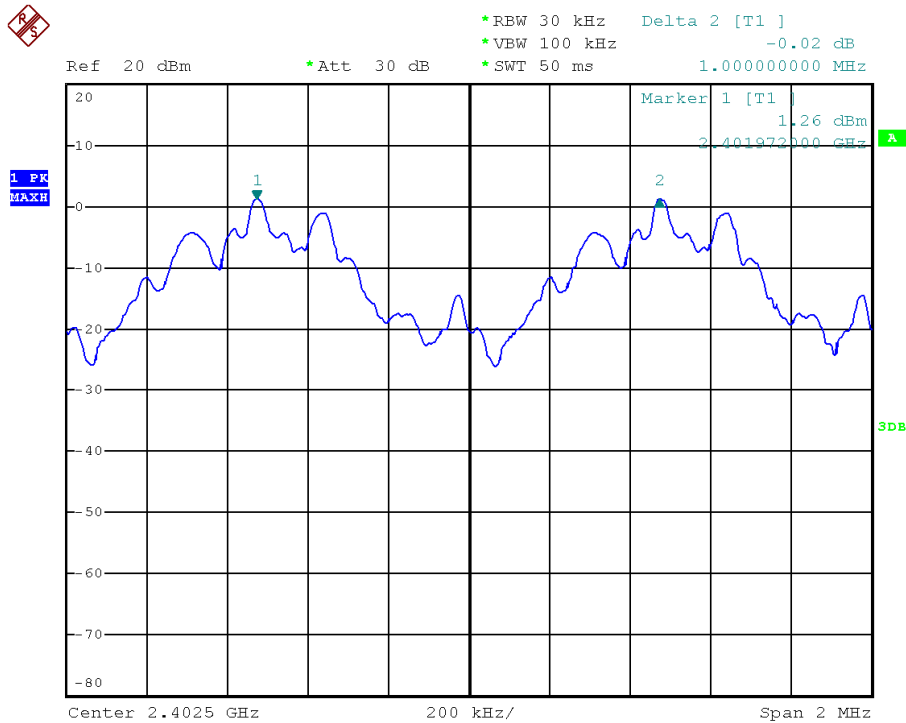


Modulation Standard: 8DPSK (3Mbps)

Channel: 39

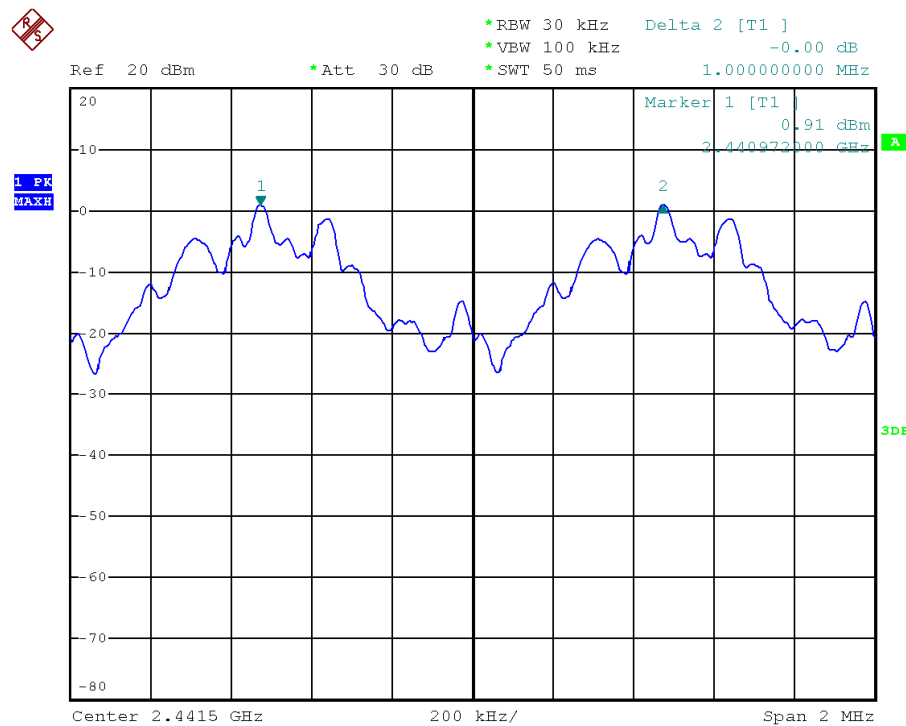



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

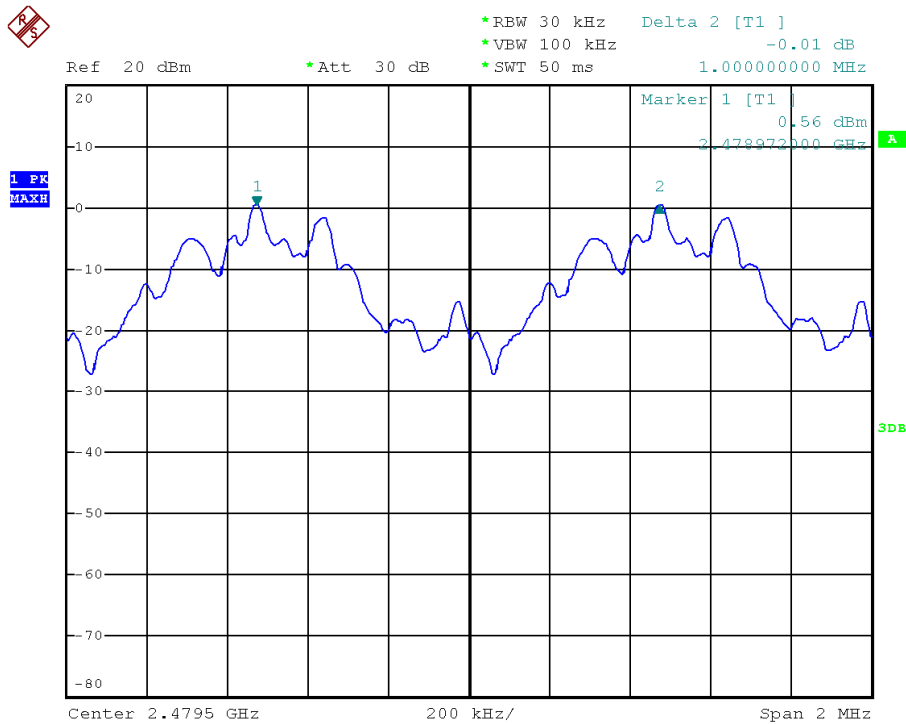



8. Dwell Time on each channel


8.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

8.3 Test Setup Layout



8.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26



8.5 Test Result and Data

Test Date: Dec. 10, 2014

Temperature: 22 °C

Atmospheric pressure: 1017 hPa

Humidity: 52 %

Modulation Type	Channel	Frequency (MHz)	Dwell Time (ms)
GFSK DH1	00	2402	90.748
	39	2441	90.748
	78	2480	90.748
GFSK DH3	00	2402	265.60
	39	2441	265.60
	78	2480	265.60
GFSK DH5	00	2402	310.40
	39	2441	310.40
	78	2480	310.40
$\pi/4$ -DQPSK 2DH5	00	2402	309.33
	39	2441	311.46
	78	2480	310.40
8DPSK 3DH5	00	2402	310.40
	39	2441	311.46
	78	2480	311.46


Test period: 0.4(second/ channel) x 79 channel=31.6 second

Example:


CH0, DH1 mode= $0.386 \text{ (ms)} \times (1600/2)/79 \times 31.6 = 123.52 \text{ (ms)}$ CH0, DH3 mode = $1.658 \text{ (ms)} \times (1600/4)/79 \times 31.6 = 265.34 \text{ (ms)}$ CH0, DH5 mode = $2.918 \text{ (ms)} \times (1600/6)/79 \times 31.6 = 311.24 \text{ (ms)}$



Modulation Standard: GFSK (1Mbps)
Channel: 00, Rate: DH1

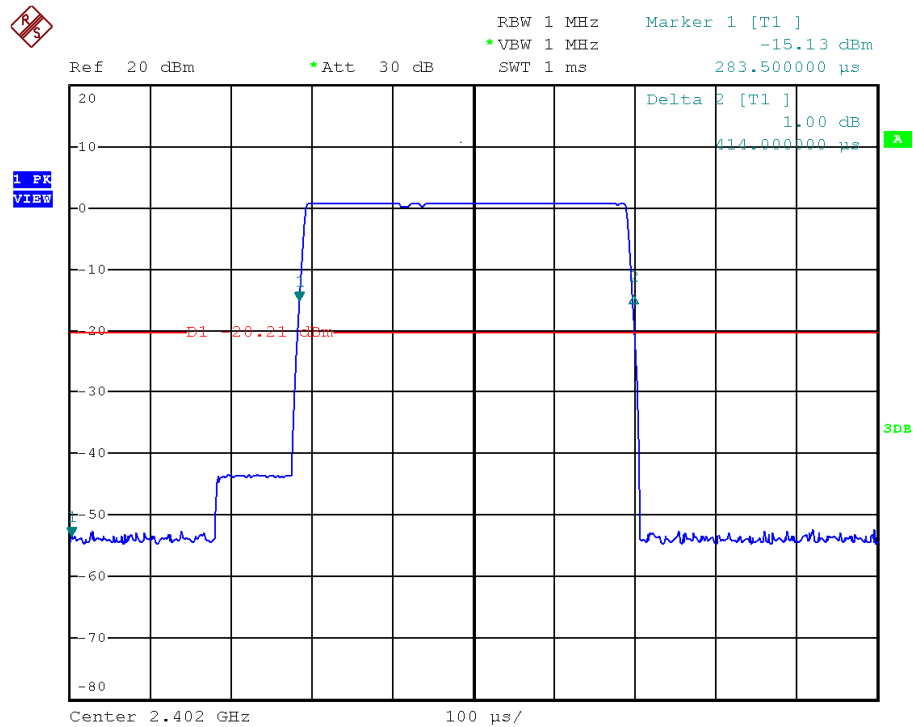


Modulation Standard: GFSK (1Mbps)
Channel: 00, Rate: DH3

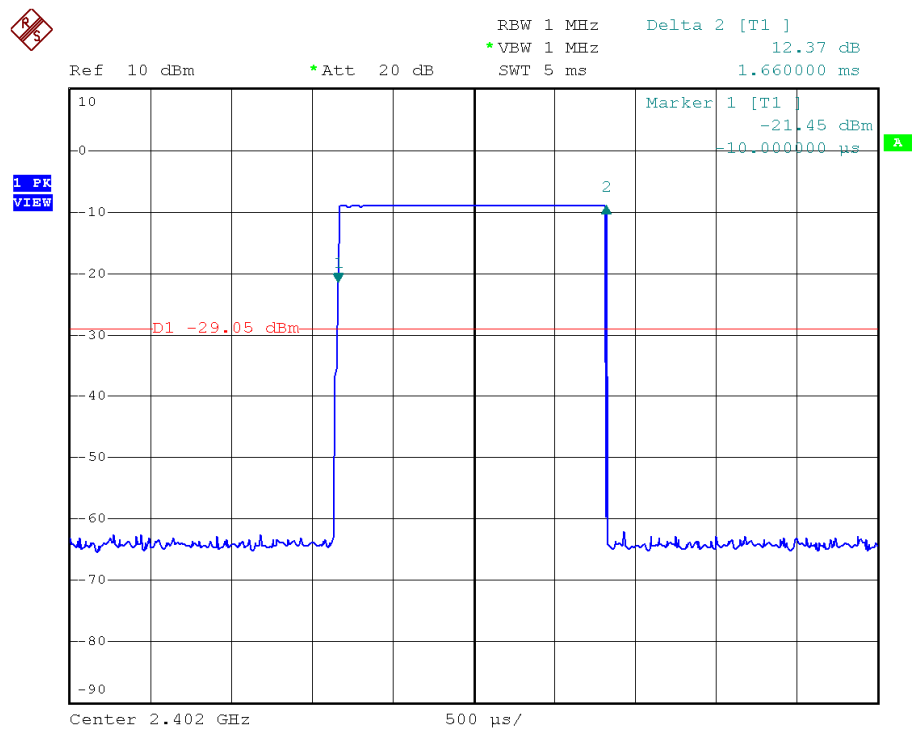




Modulation Standard: GFSK (1Mbps)
Channel: 00, Rate: DH5

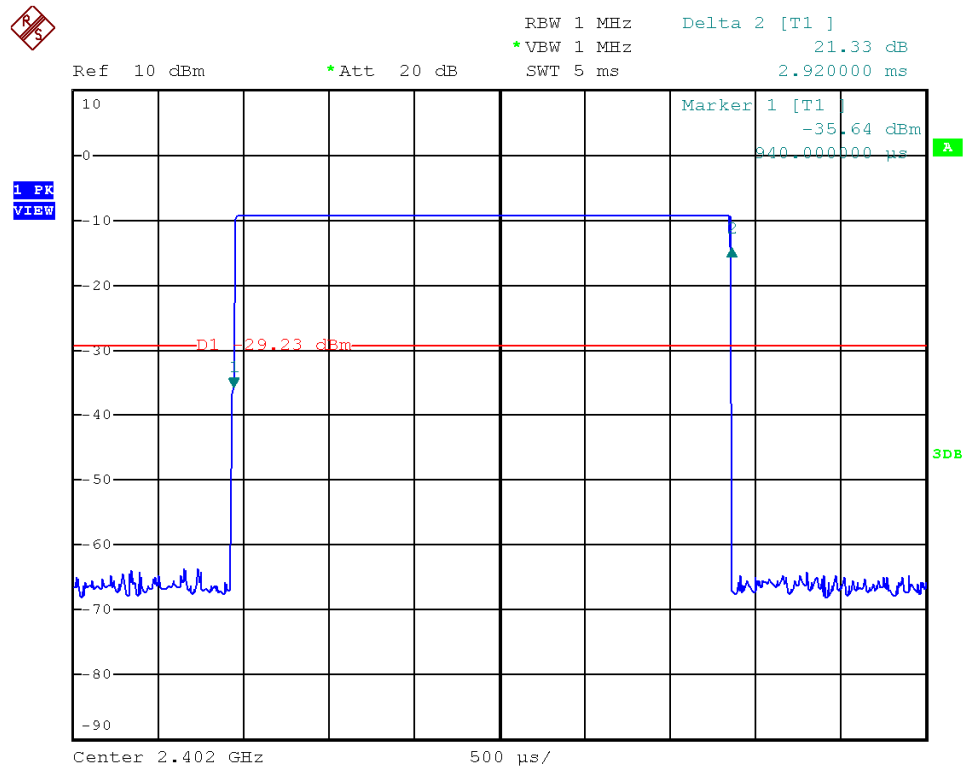


Modulation Standard: GFSK (1Mbps)
Channel: 39, Rate: DH1

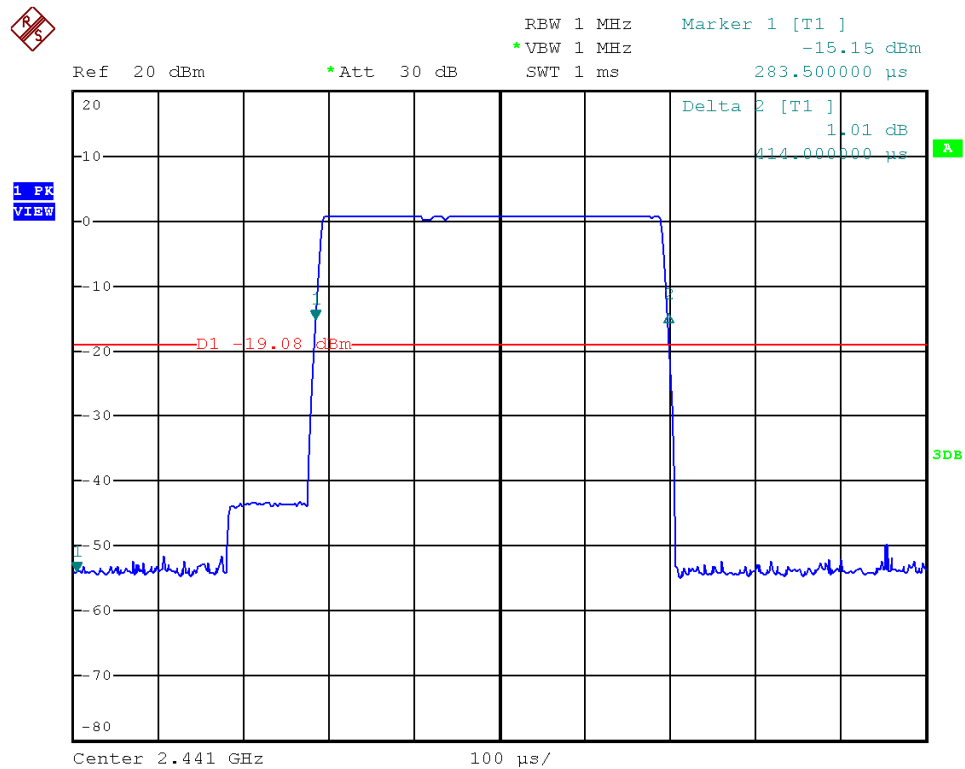




Modulation Standard: GFSK (1Mbps)
Channel: 39, Rate: DH3

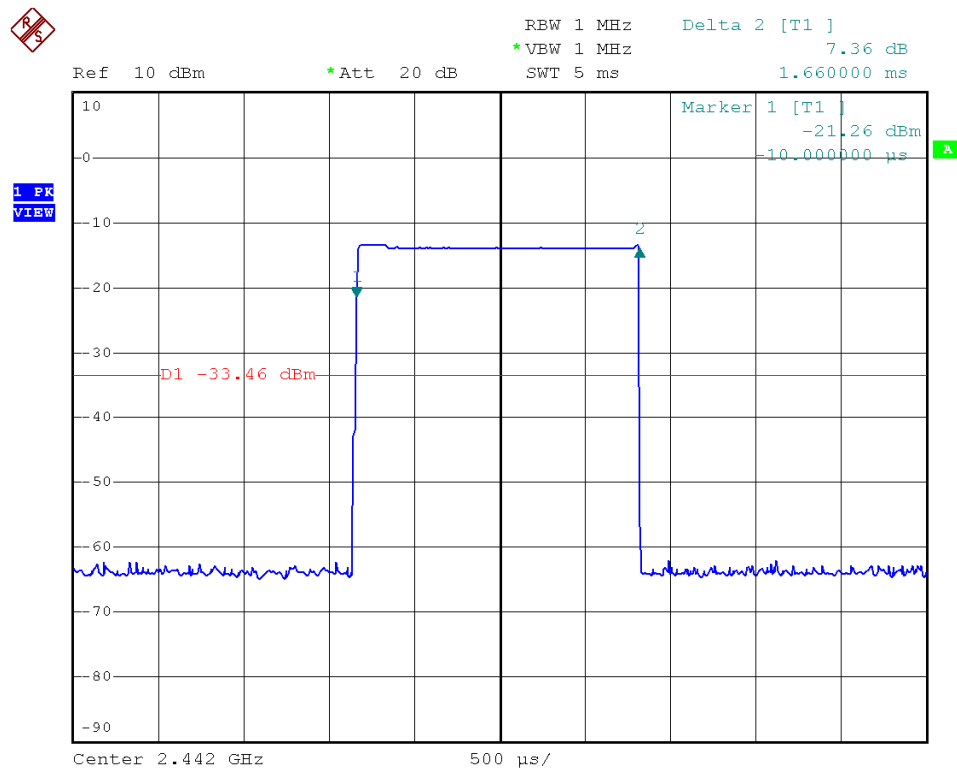


Modulation Standard: GFSK (1Mbps)
Channel: 39, Rate: DH5

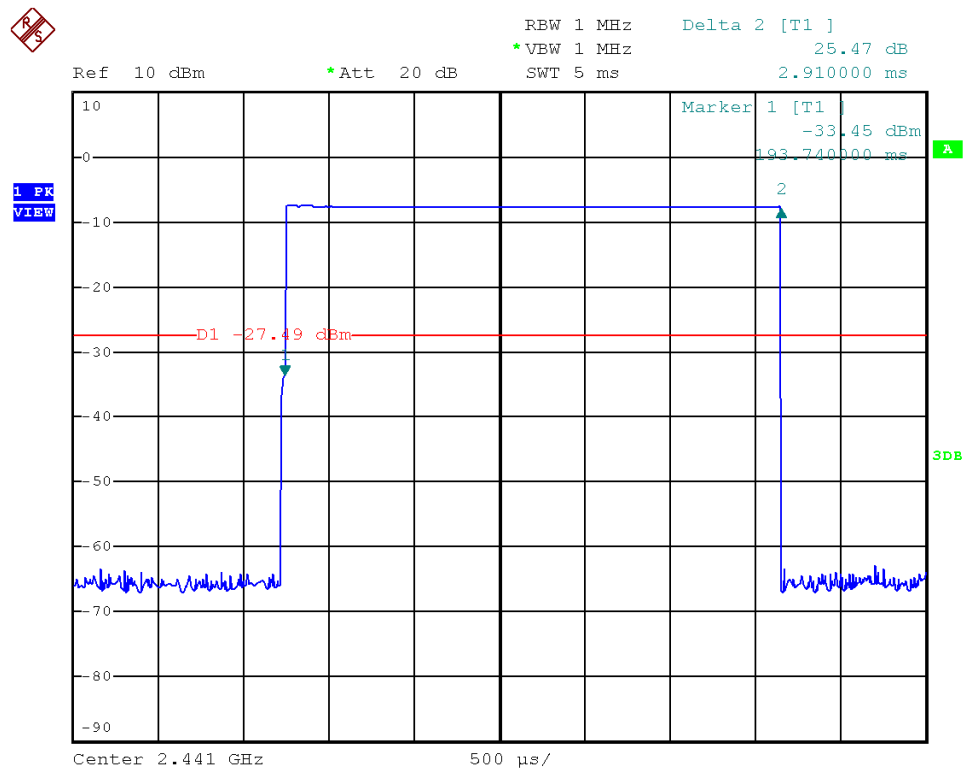




Modulation Standard: GFSK (1Mbps)
Channel: 78, Rate: DH1

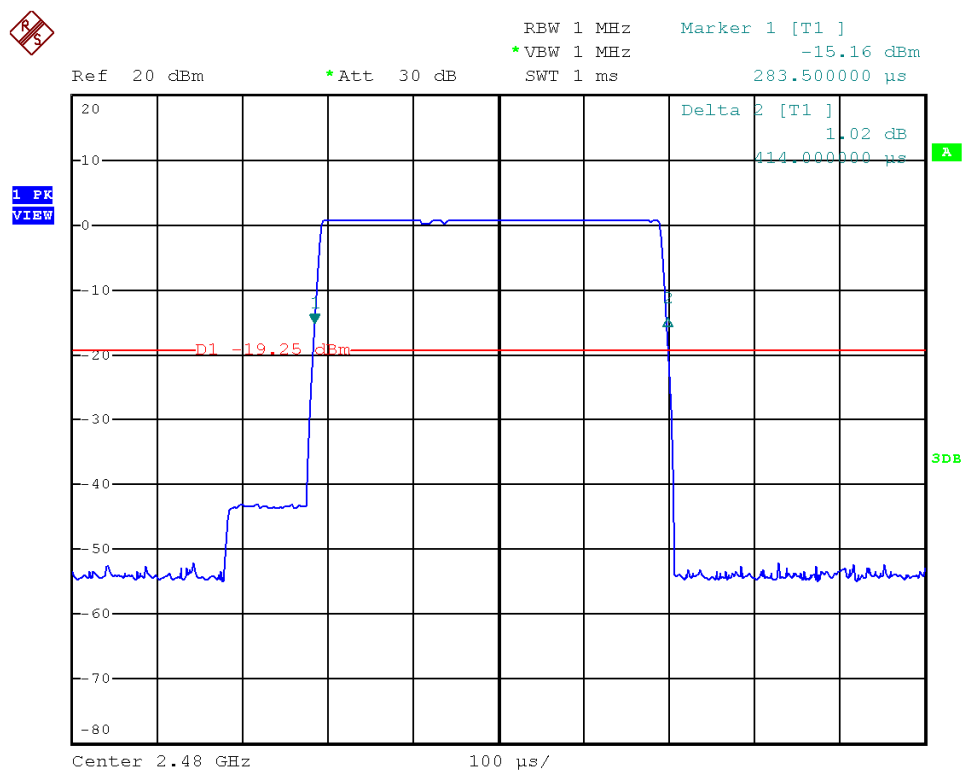


Modulation Standard: GFSK (1Mbps)
Channel: 78, Rate: DH3

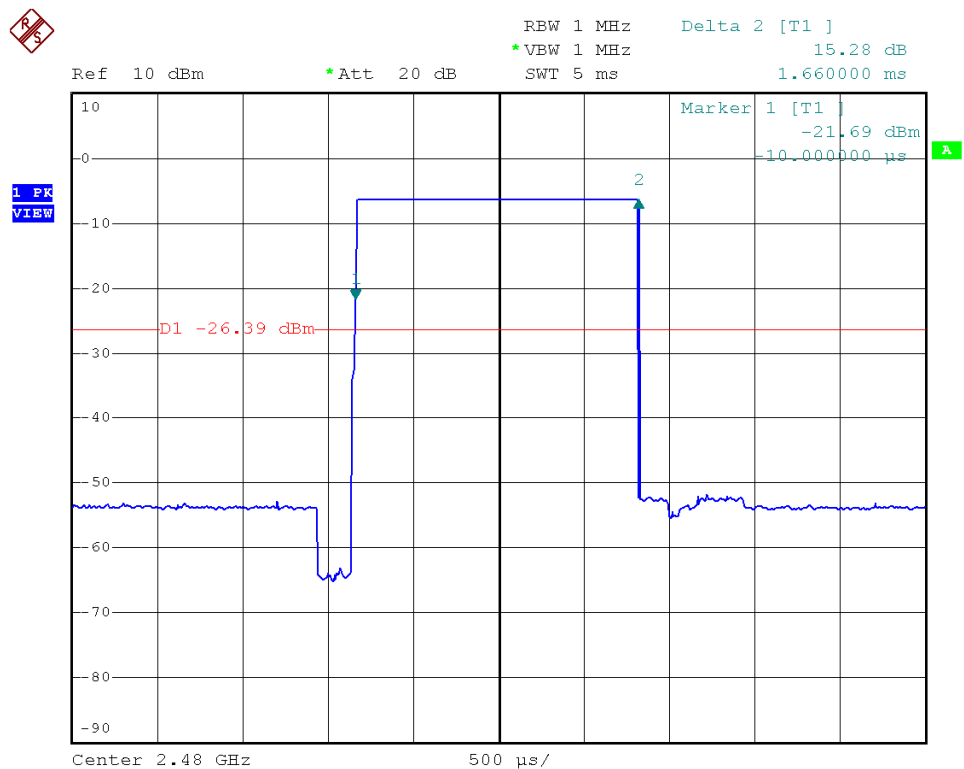




Modulation Standard: GFSK (1Mbps)
Channel: 78, Rate: DH5

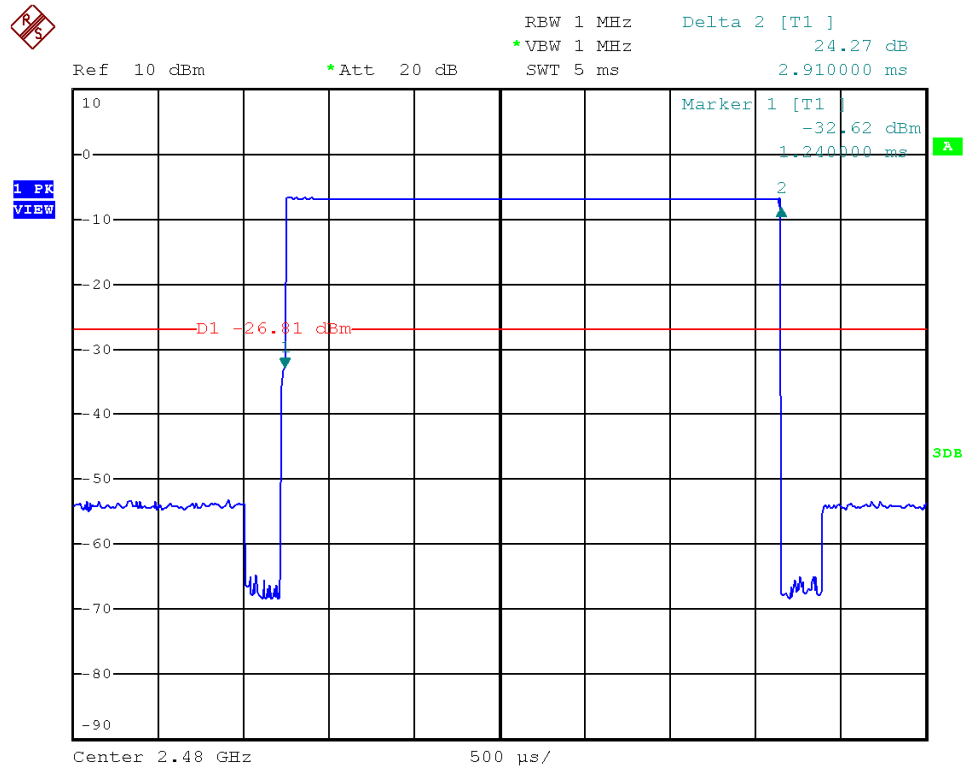


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00, Rate: 2DH5

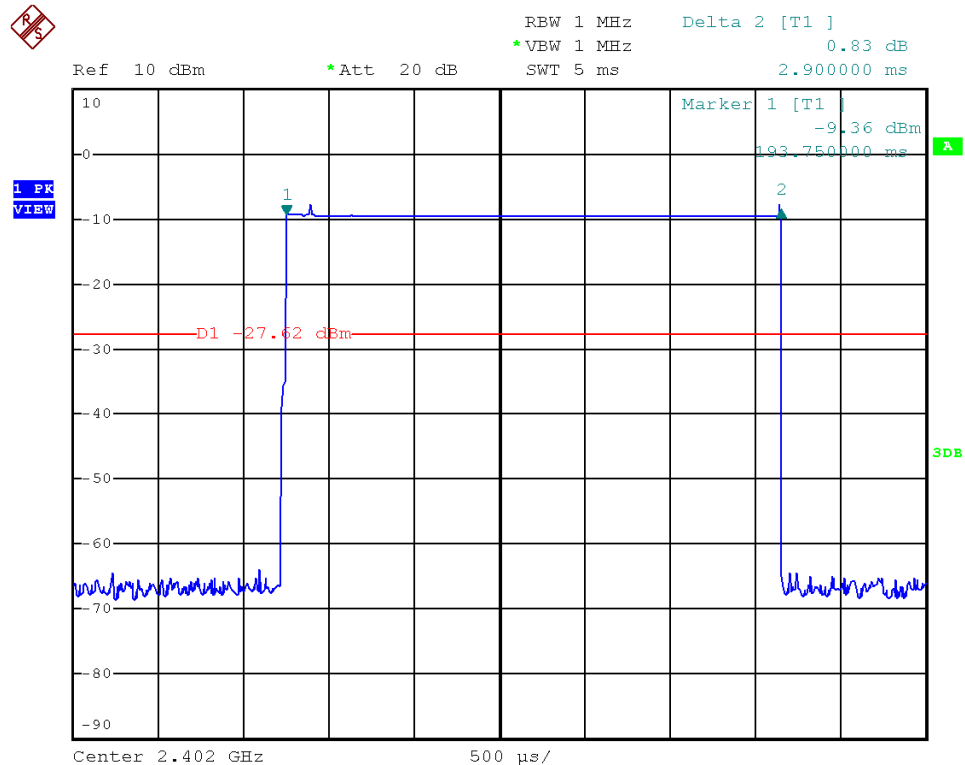




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39, Rate: 2DH5

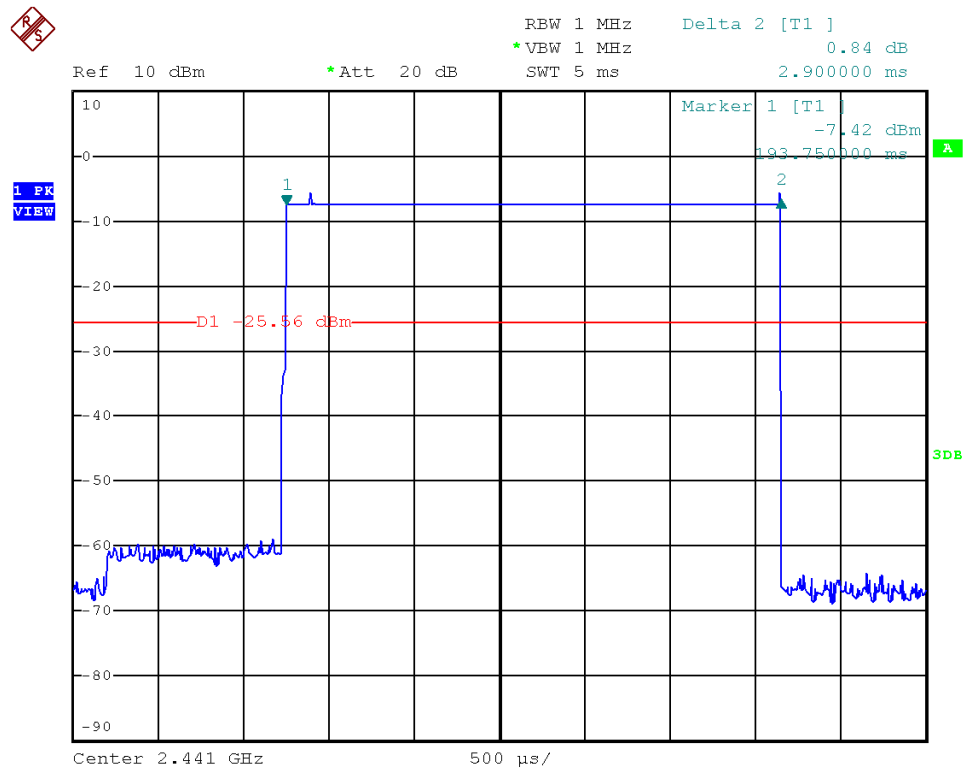


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78, Rate: 2DH5

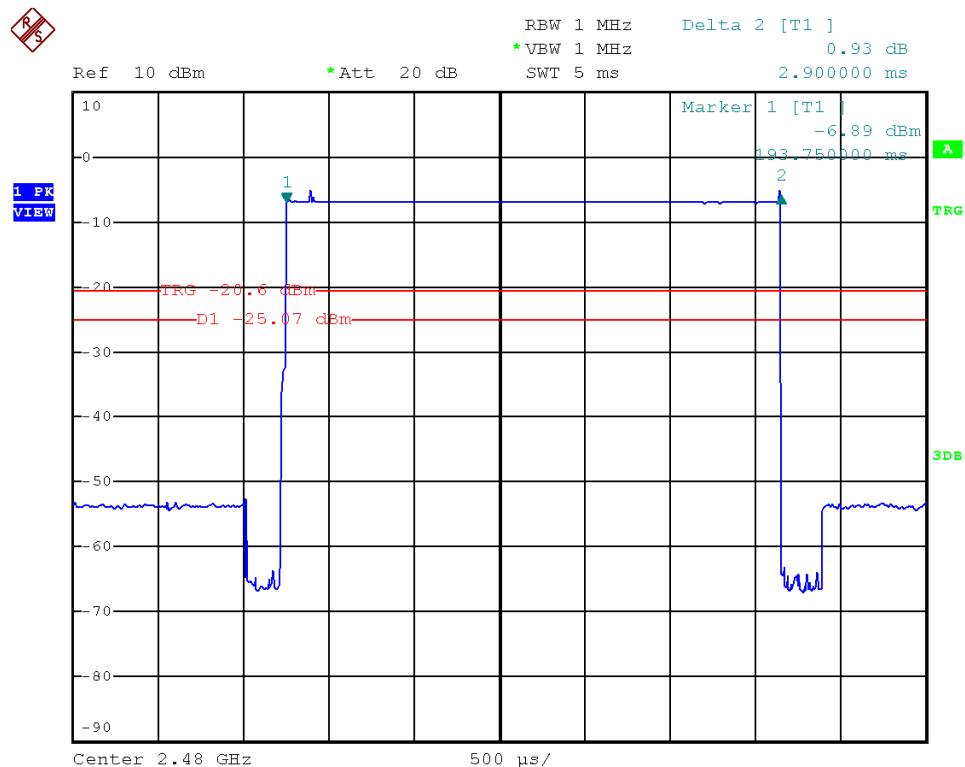




Modulation Standard: 8DPSK (3Mbps)
Channel: 00, Rate: 3DH5

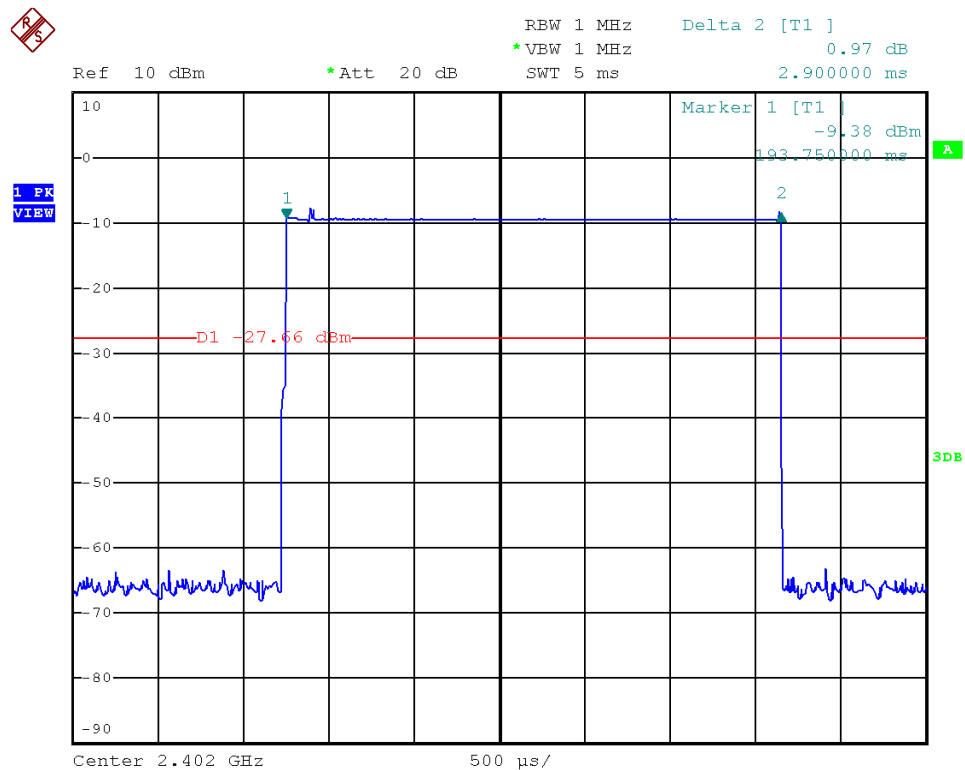


Modulation Standard: 8DPSK (3Mbps)
Channel: 39, Rate: 3DH5

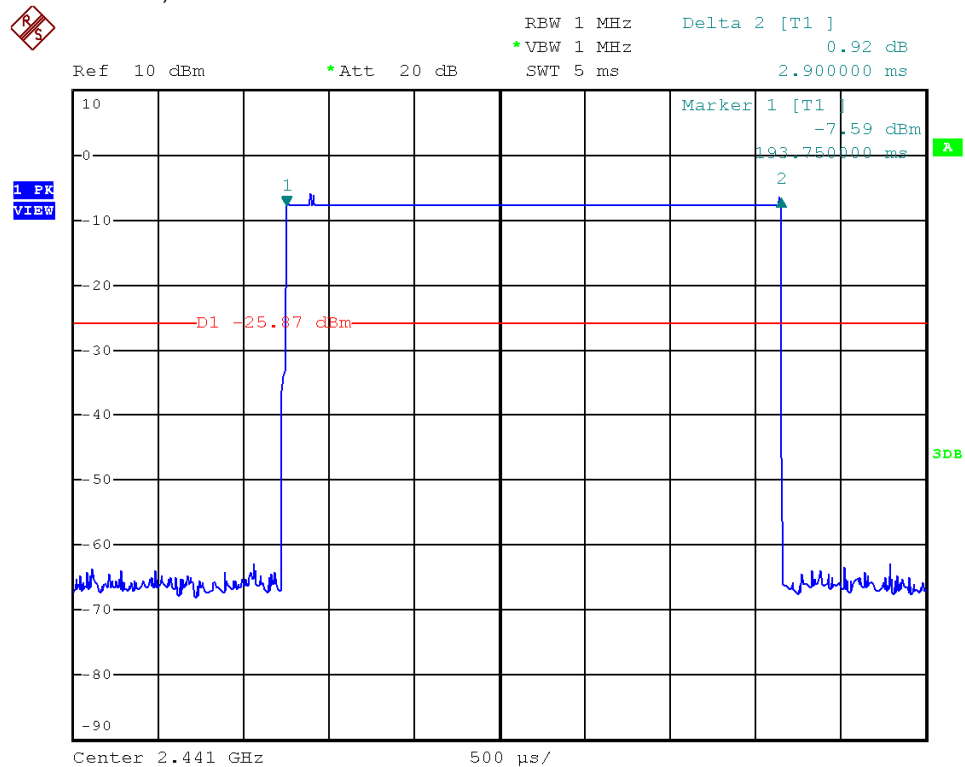



Modulation Standard: 8DPSK (3Mbps)
Channel: 78, Rate: 3DH5

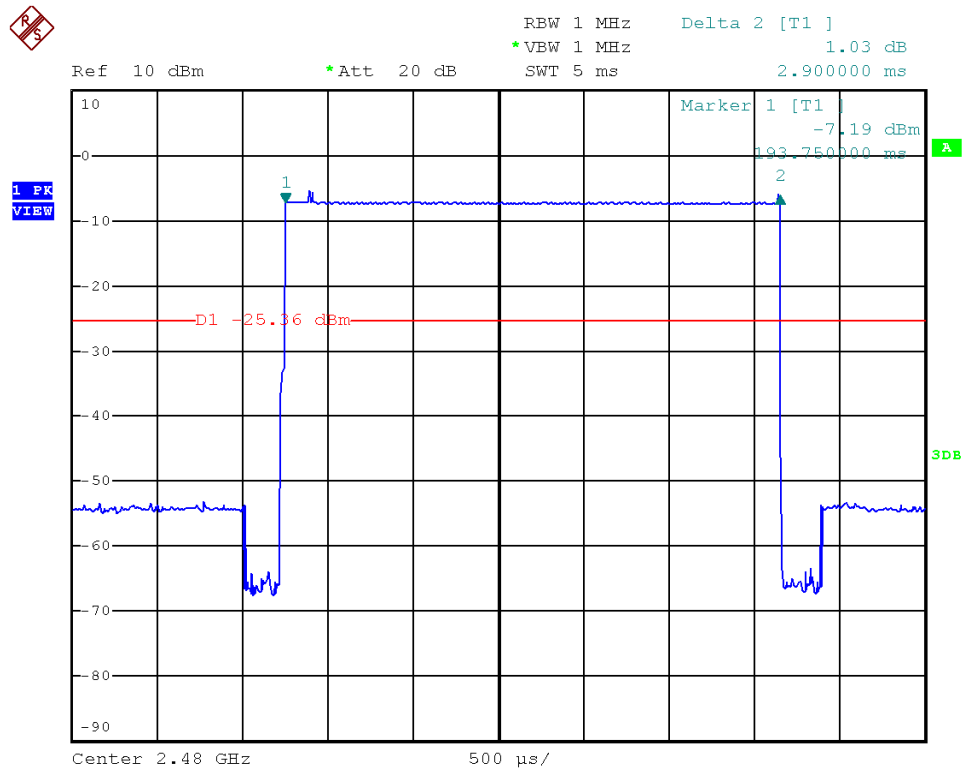



9. Number of Hopping Channels


9.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

9.3 Test Setup Layout



9.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26

9.5 Test Result and Data

Test Date: Dec. 10, 2014

Temperature: 22 °C


Atmospheric pressure: 1017 hPa

Humidity: 52 %


Modulation Type	Hopping Channels
GFSK (1Mbps)	79
$\pi/4$ -DQPSK (2Mbps)	79
8DPSK (3Mbps)	79



Modulation Standard: GFSK (1Mbps)

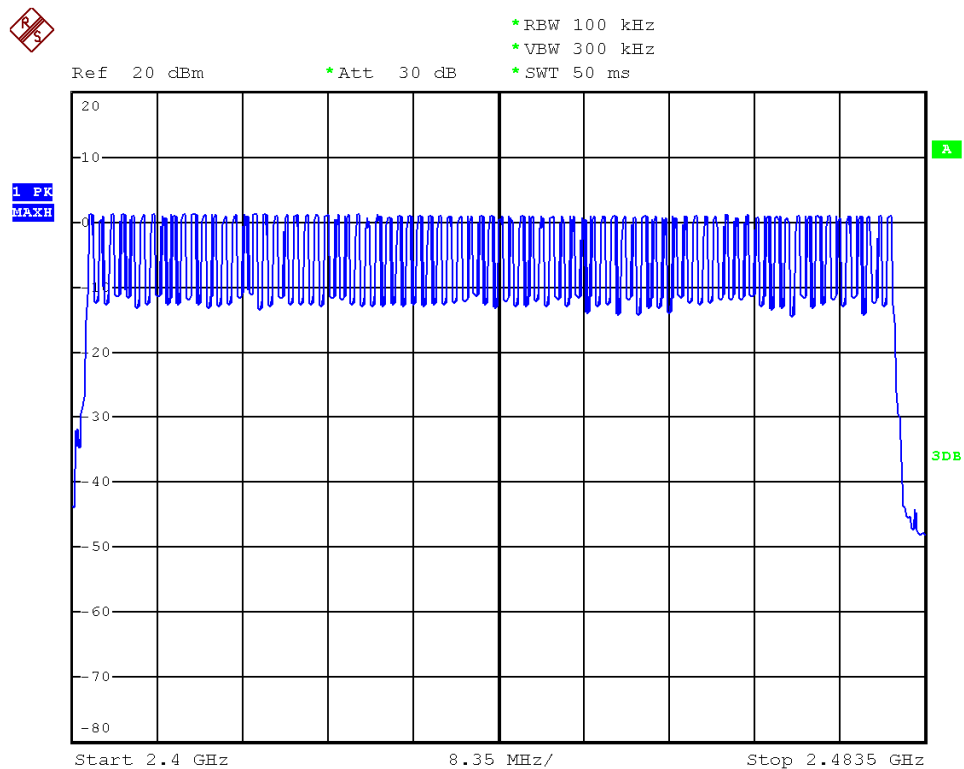


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

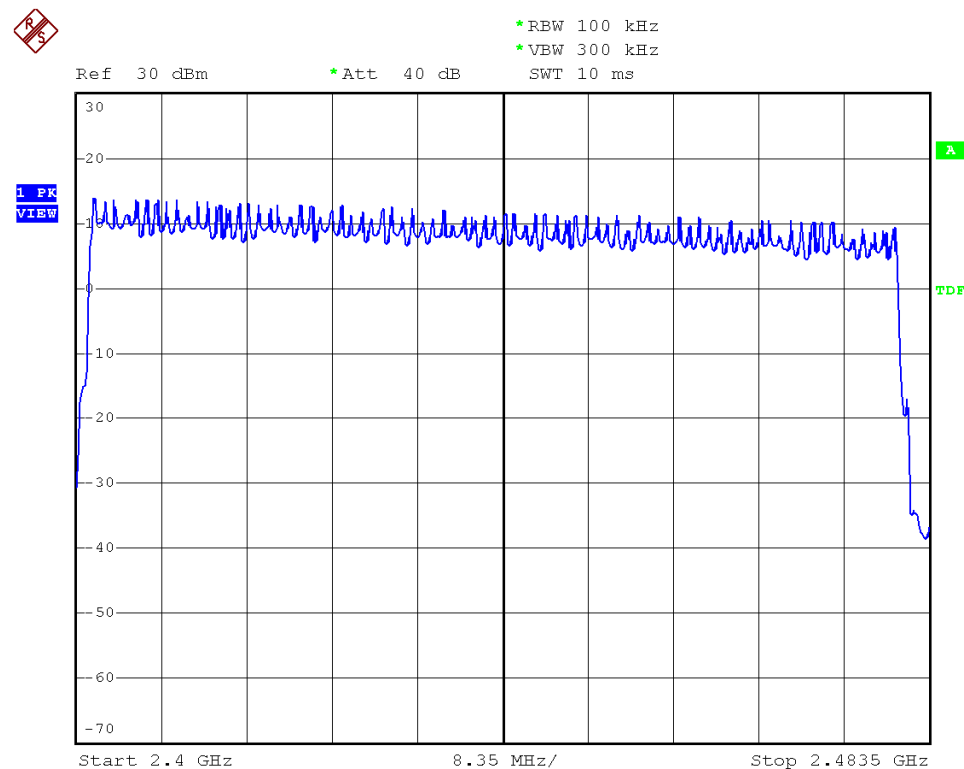



Modulation Standard: 8DPSK (3Mbps)

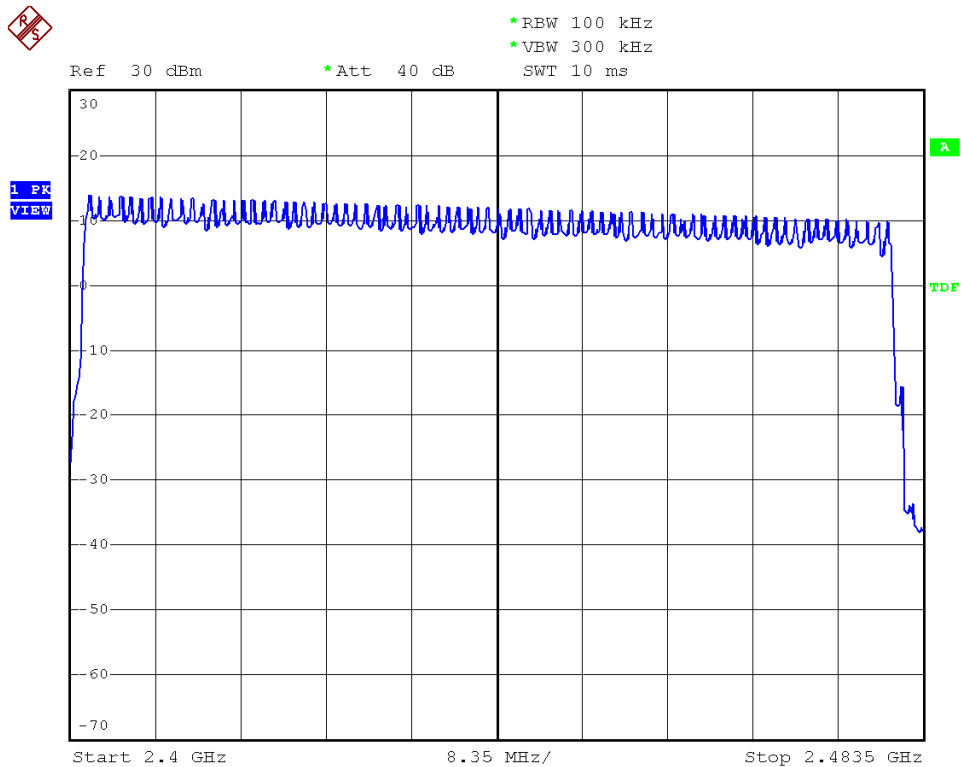



10. Maximum Peak Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26

**10.5 Test Result and Data**

Test Date: Dec. 10, 2014

Temperature: 22 °C


Atmospheric pressure: 1017 hPa

Humidity: 52 %


Modulation Type	Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
GFSK (1Mbps)	00	2402	0.2	1.047129
	39	2441	0.64	1.158777
	78	2480	0.76	1.191242
$\pi/4$ -DQPSK (2Mbps)	00	2402	0.22	1.051962
	39	2441	0.2	1.047129
	78	2480	0.08	1.018591
8DPSK (3Mbps)	00	2402	0.3	1.071519
	39	2441	0.22	1.051962
	78	2480	0.24	1.056818



Modulation Standard: GFSK (1Mbps)
Channel: 00

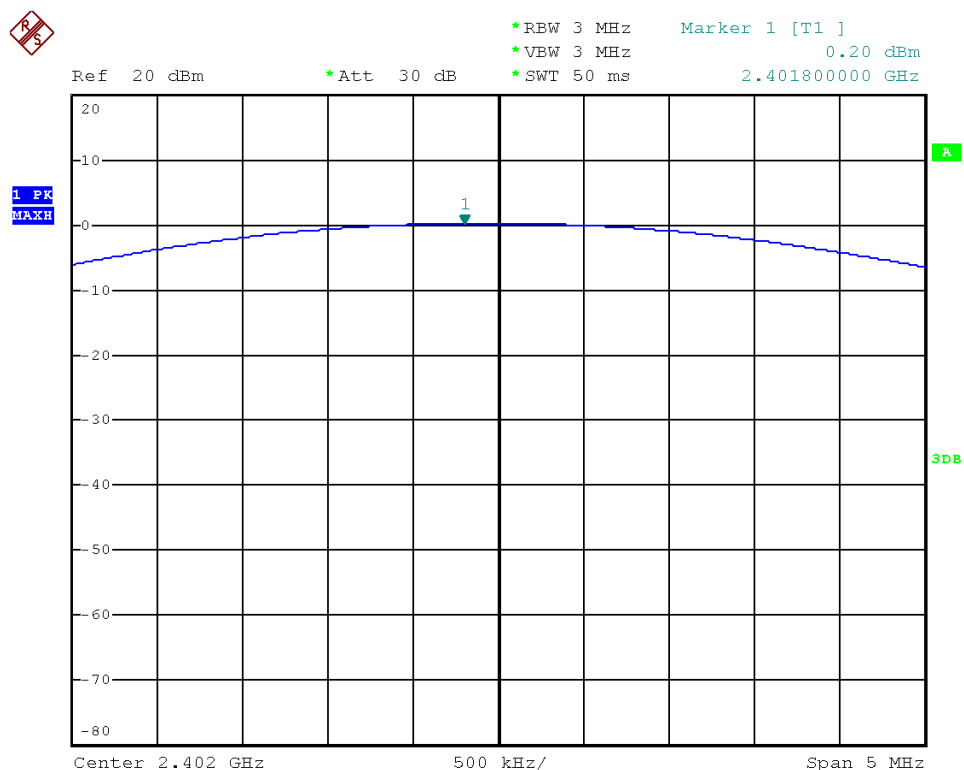


Modulation Standard: GFSK (1Mbps)
Channel: 39

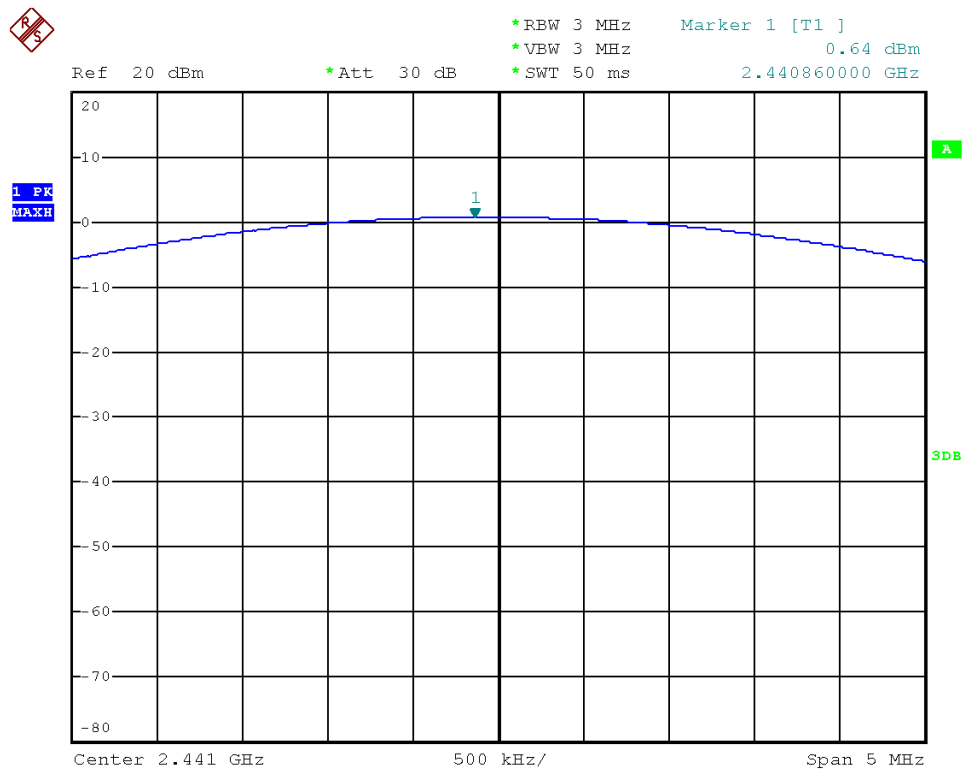




Modulation Standard: GFSK (1Mbps)
Channel: 78

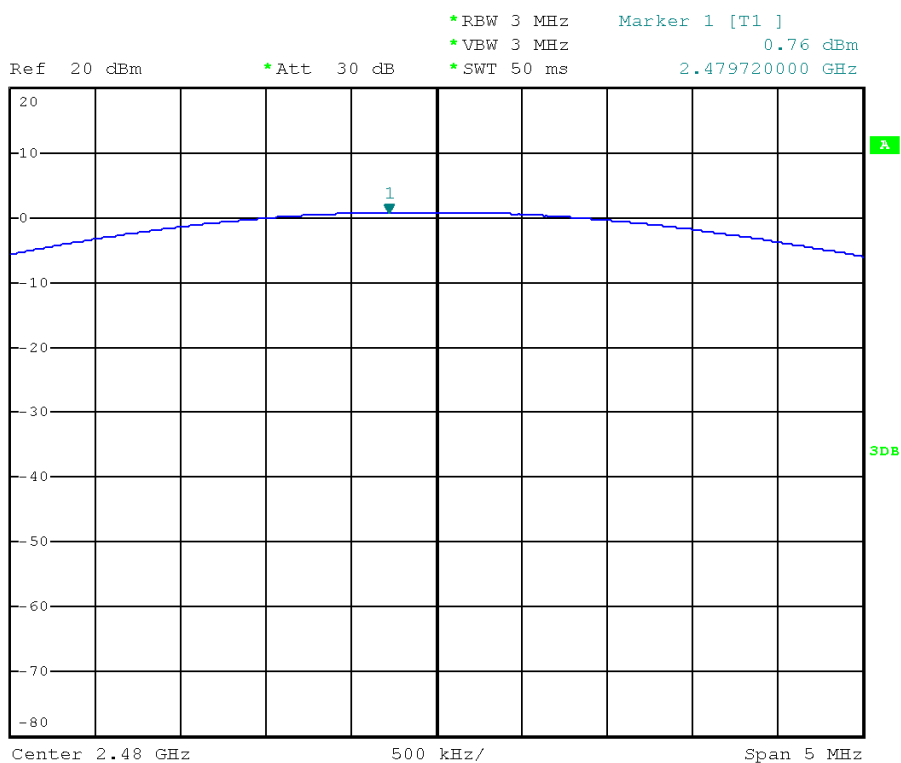


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

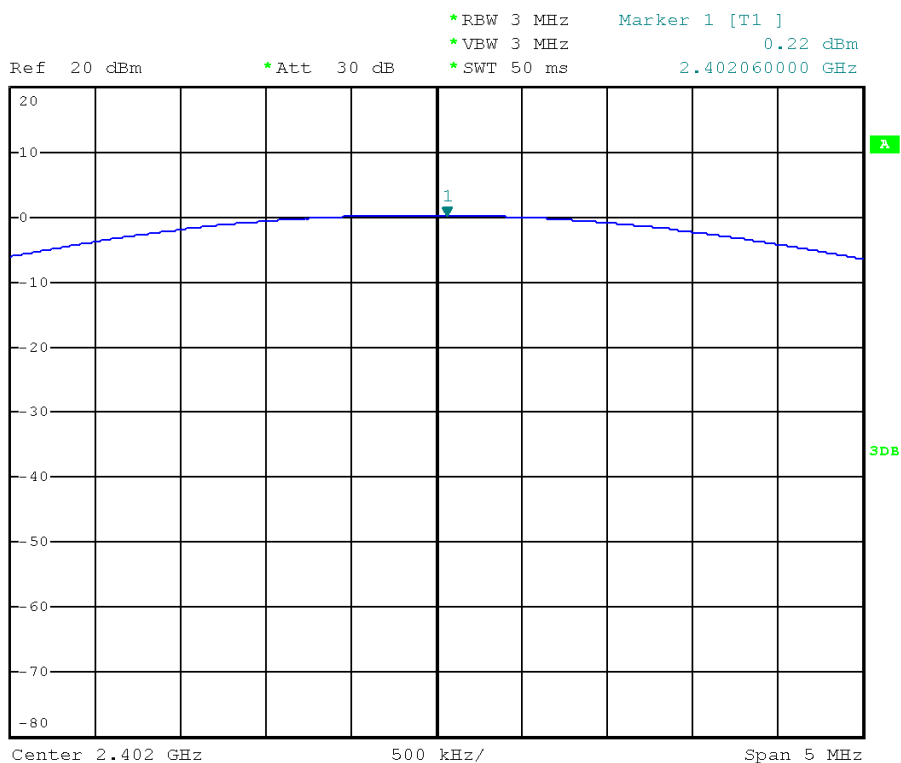




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

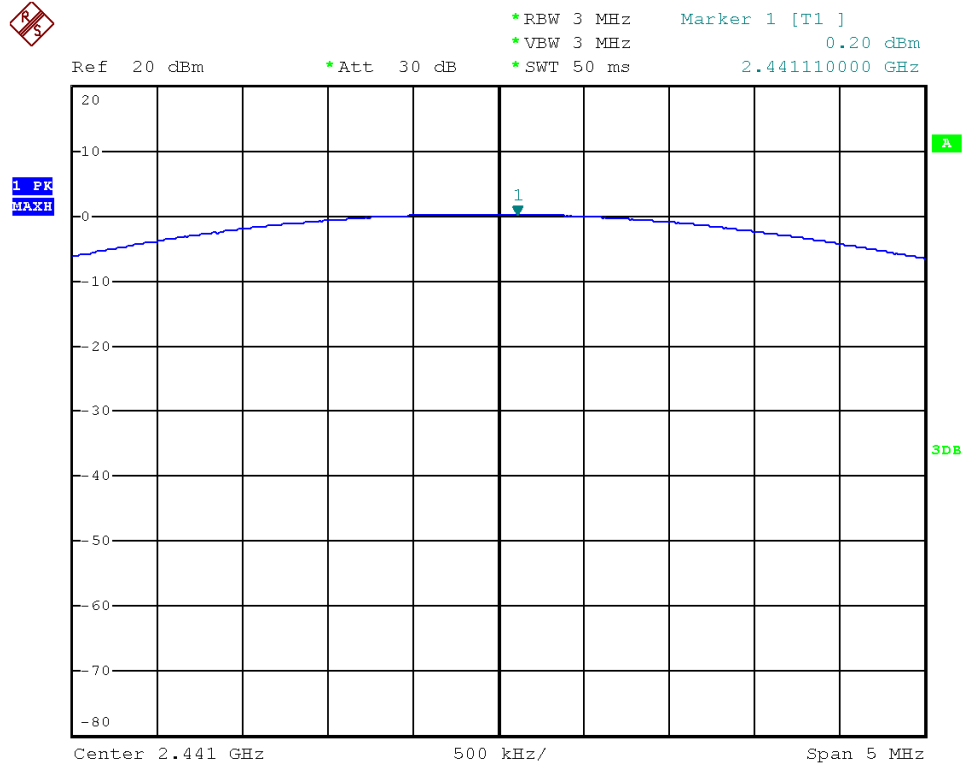


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

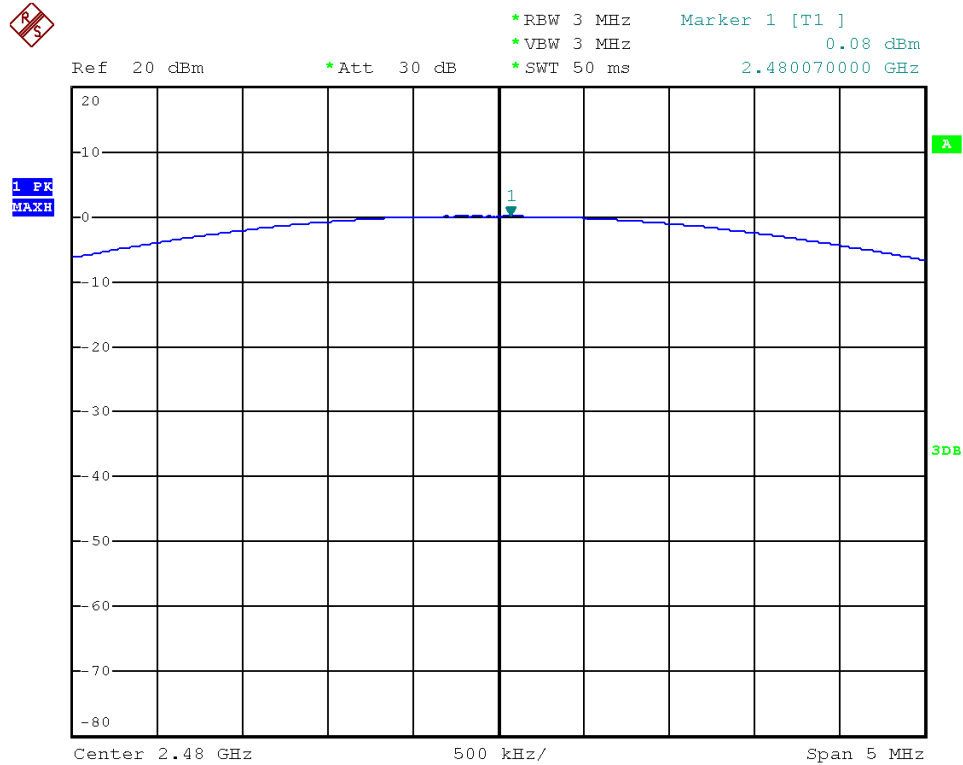




Modulation Standard: 8DPSK (3Mbps)

Channel: 00

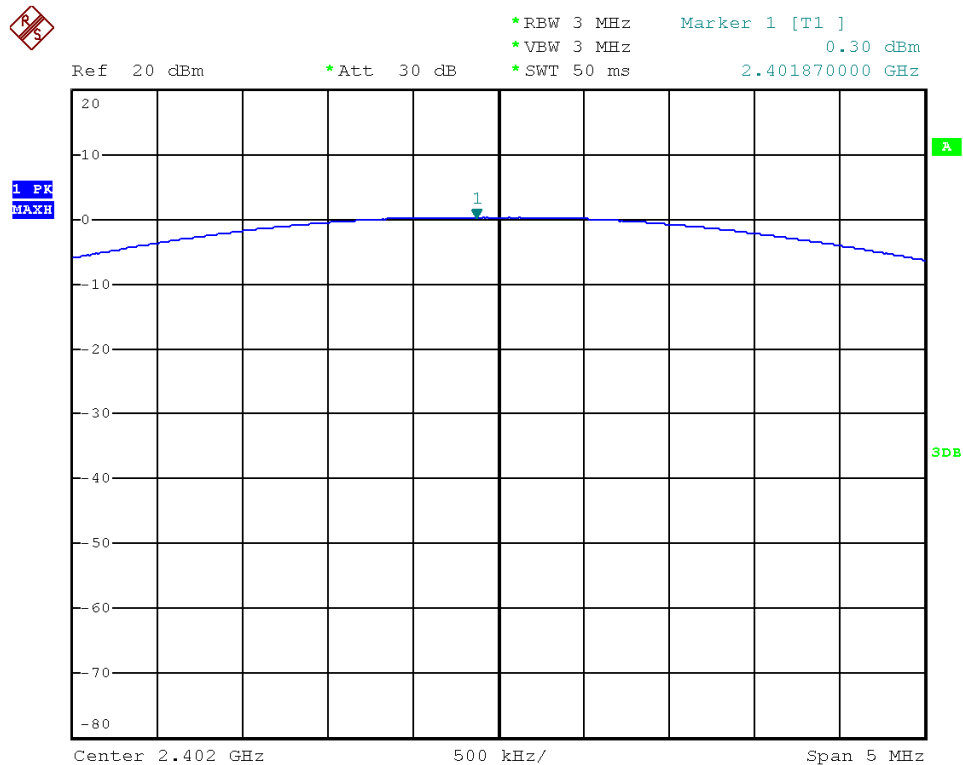


Modulation Standard: 8DPSK (3Mbps)

Channel: 39

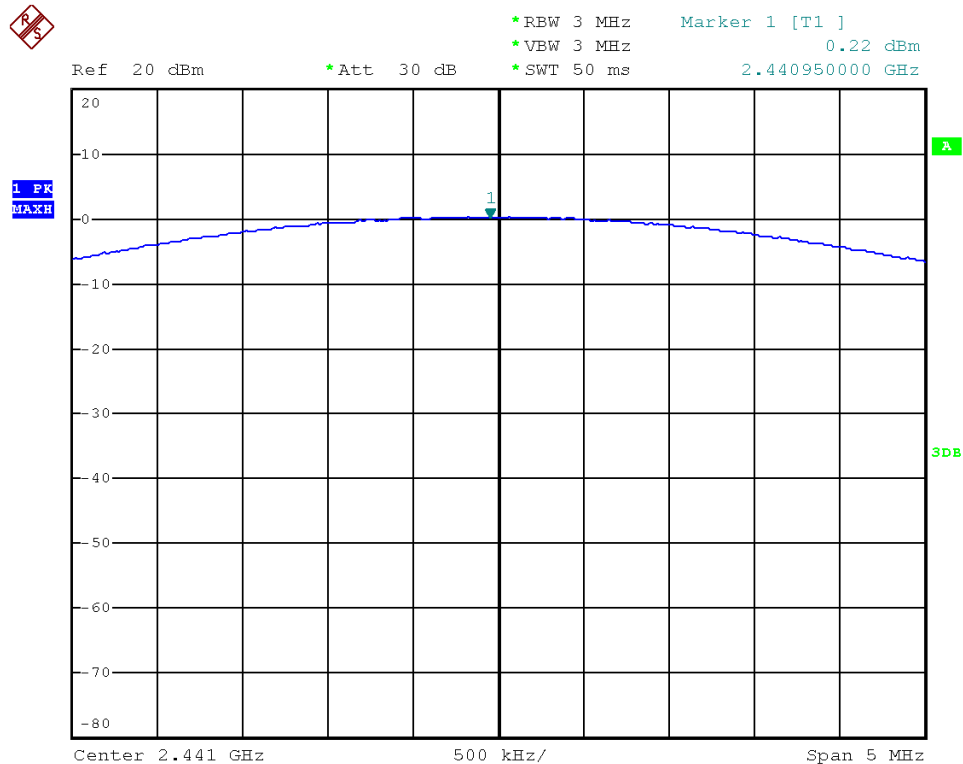



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

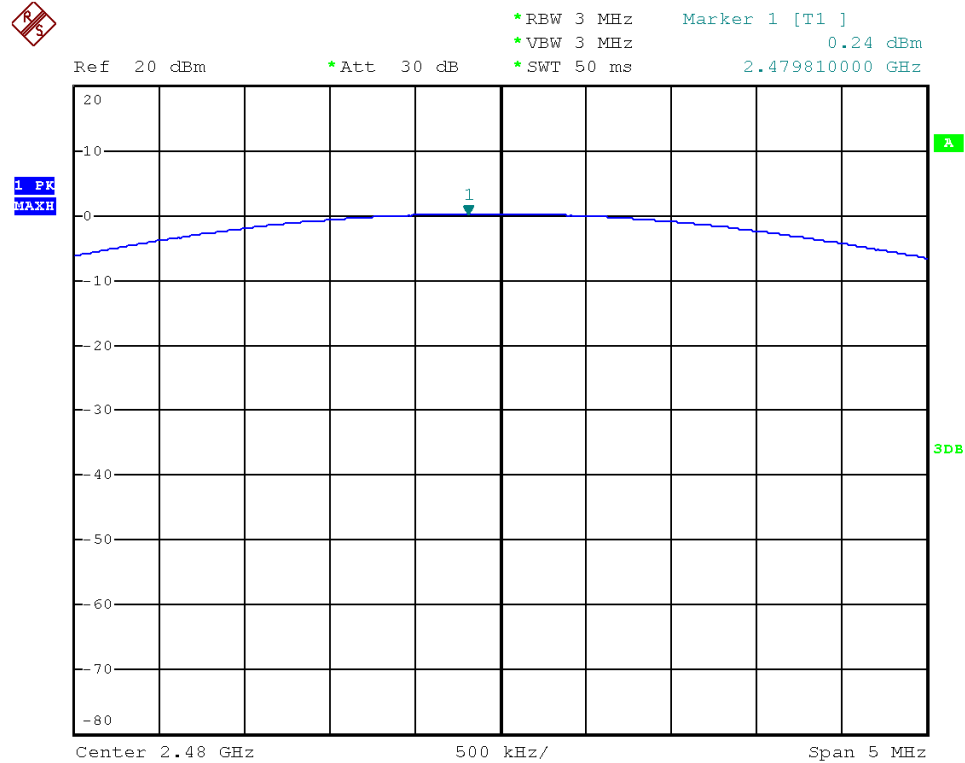



11. Band Edges Measurement


11.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

11.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

11.3 Test Setup Layout



11.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26

11.5 Test Result and Data

Test Date: Dec. 10, 2014

Temperature: 22 °C



Atmospheric pressure: 1017 hPa

Humidity: 52 %

Modulation Type	Channel	Frequency	Max. Value in frequency(MHz)	Max. Value (dBm)
GFSK (1Mbps)	00	2402	222550.0	-43.59
	78	2480	143800.0	-43.76
$\pi/4$ -DQPSK (2Mbps)	00	2402	223000.0	-43.57
	78	2480	244600.0	-43.36
8DPSK (3Mbps)	00	2402	215800.0	-43.97
	78	2480	137500.0	-45.57





Modulation Standard: GFSK (1Mbps)
Channel: 00

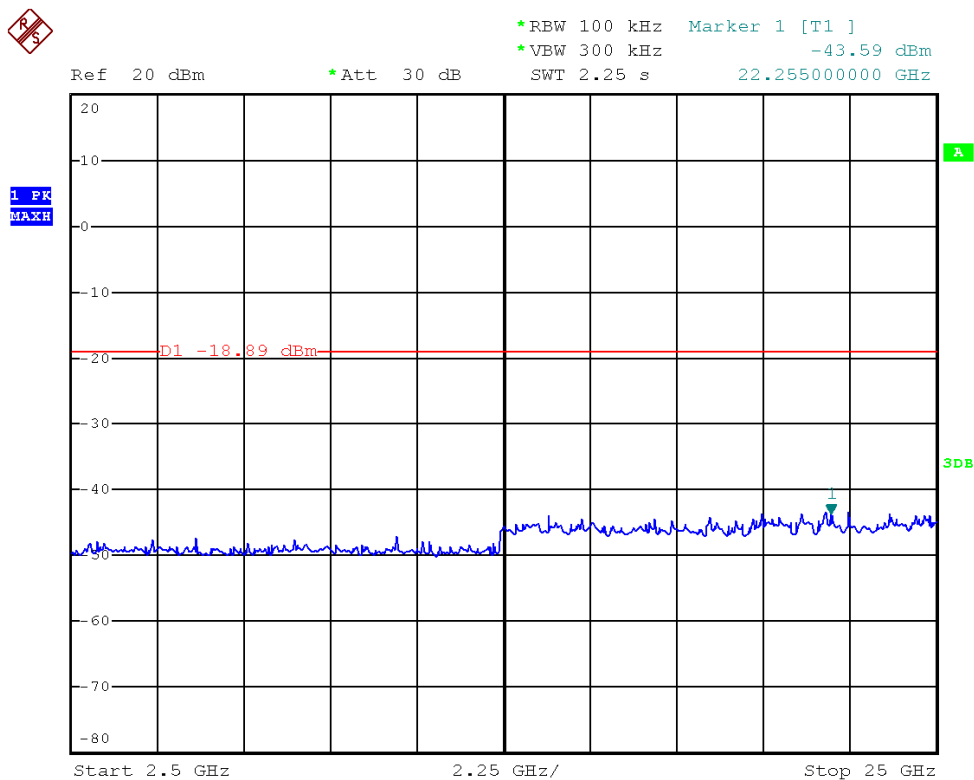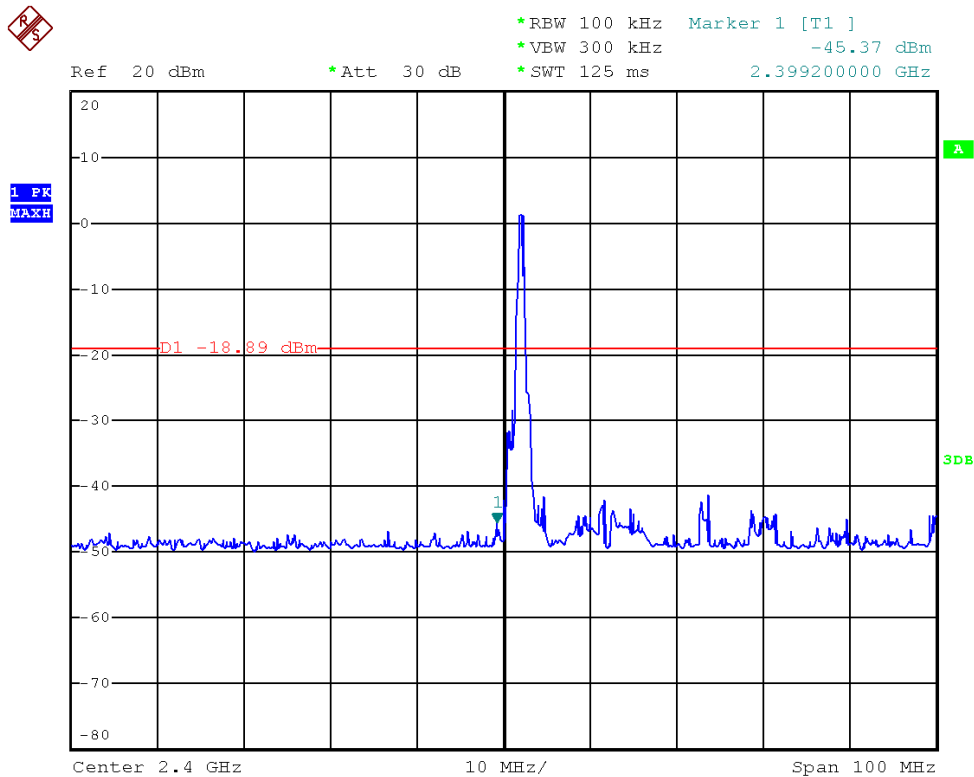





Modulation Standard: GFSK (1Mbps)

Channel: 78

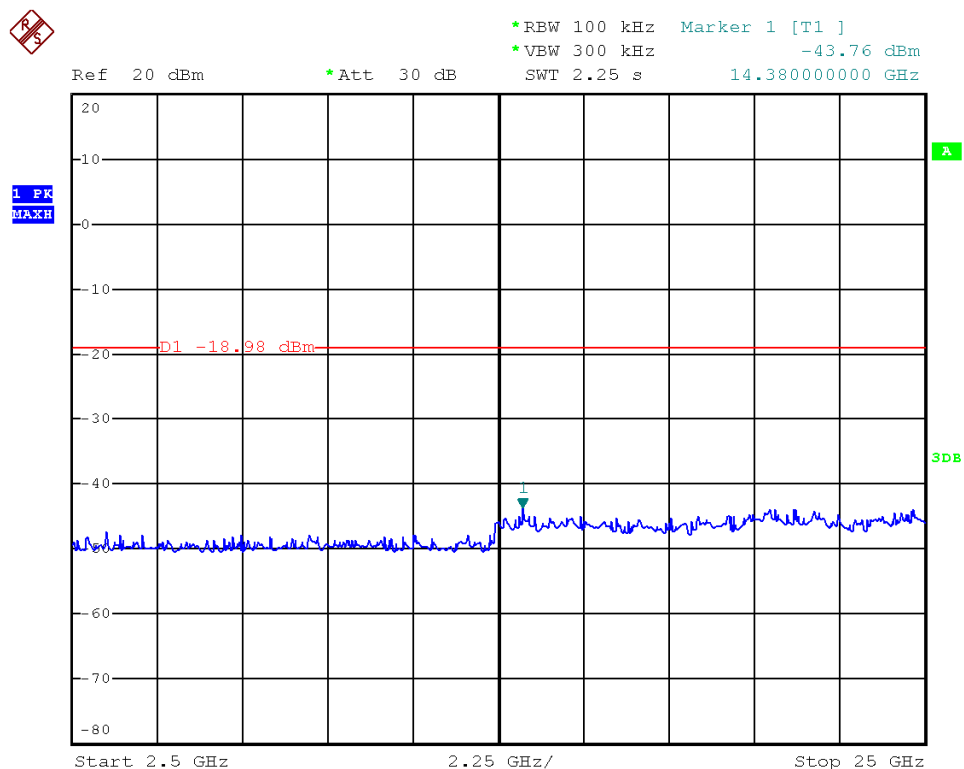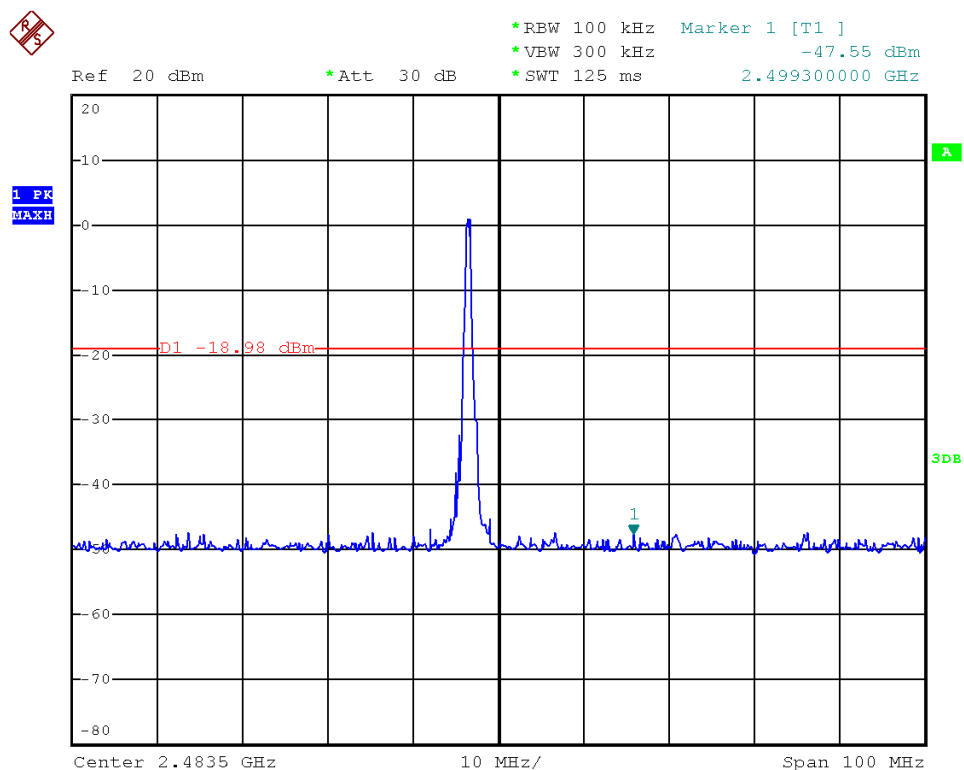





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

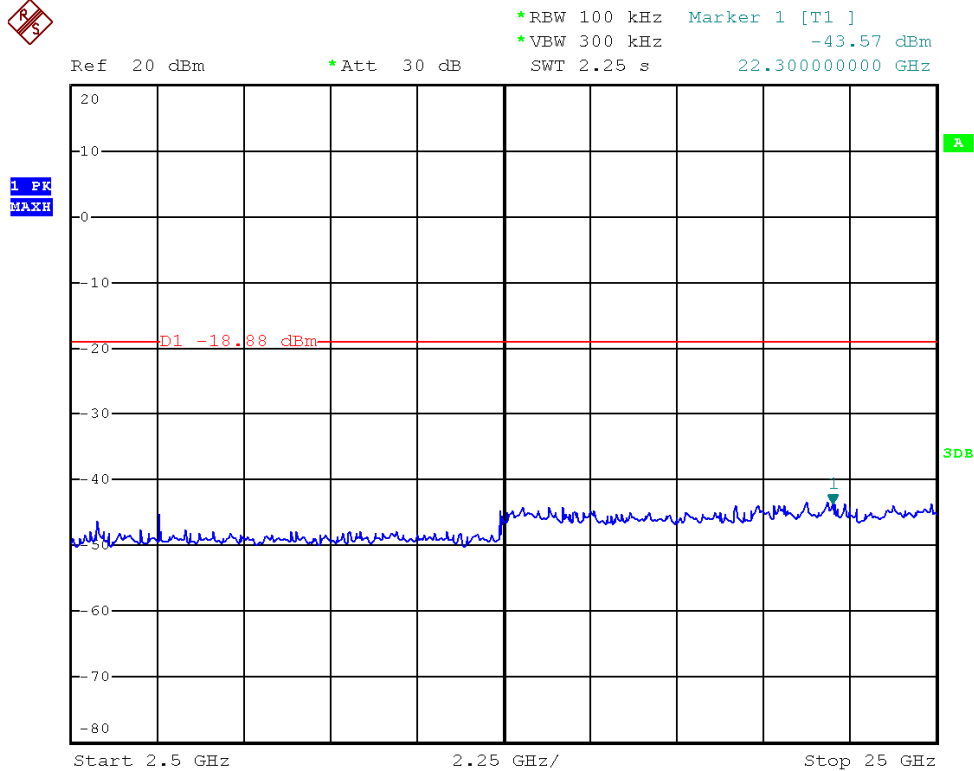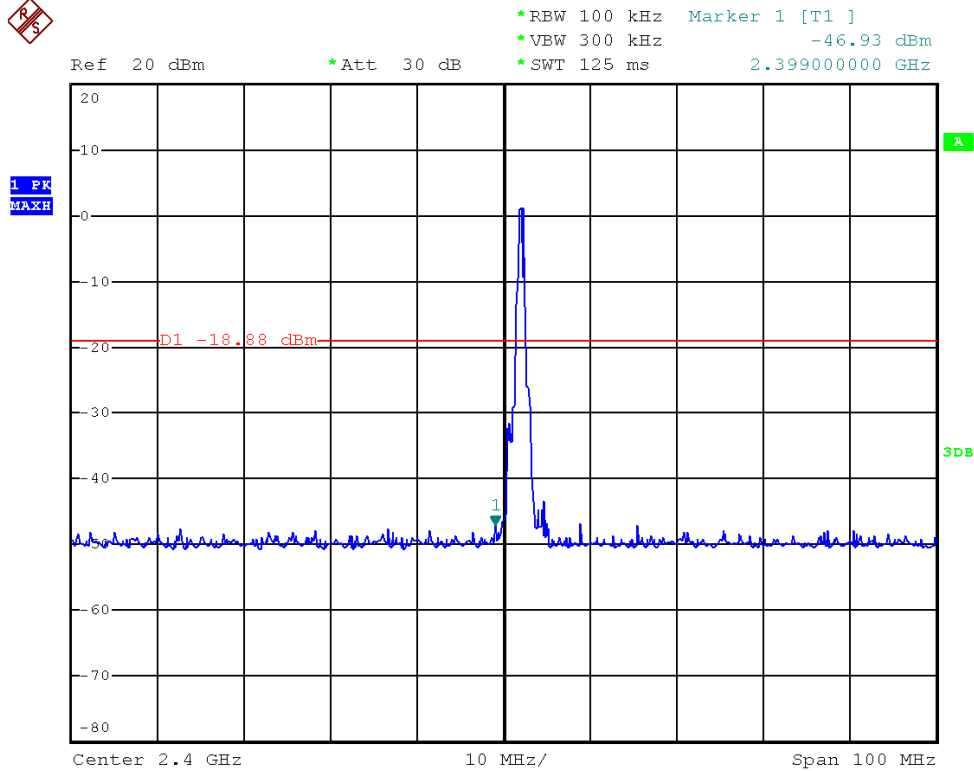



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Channel: 78

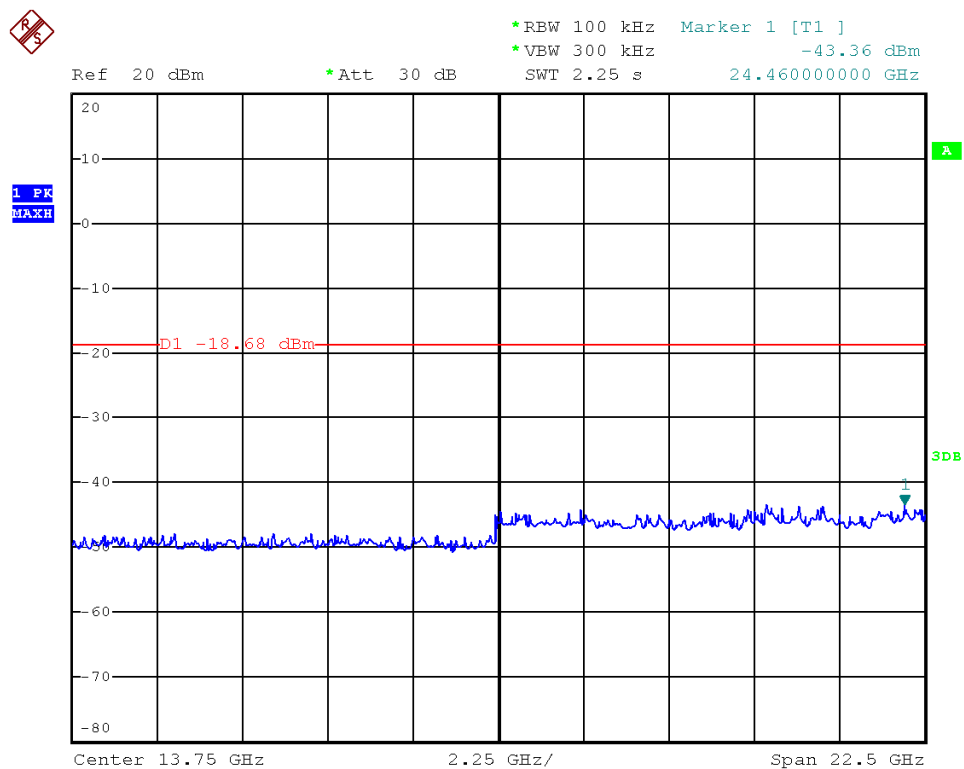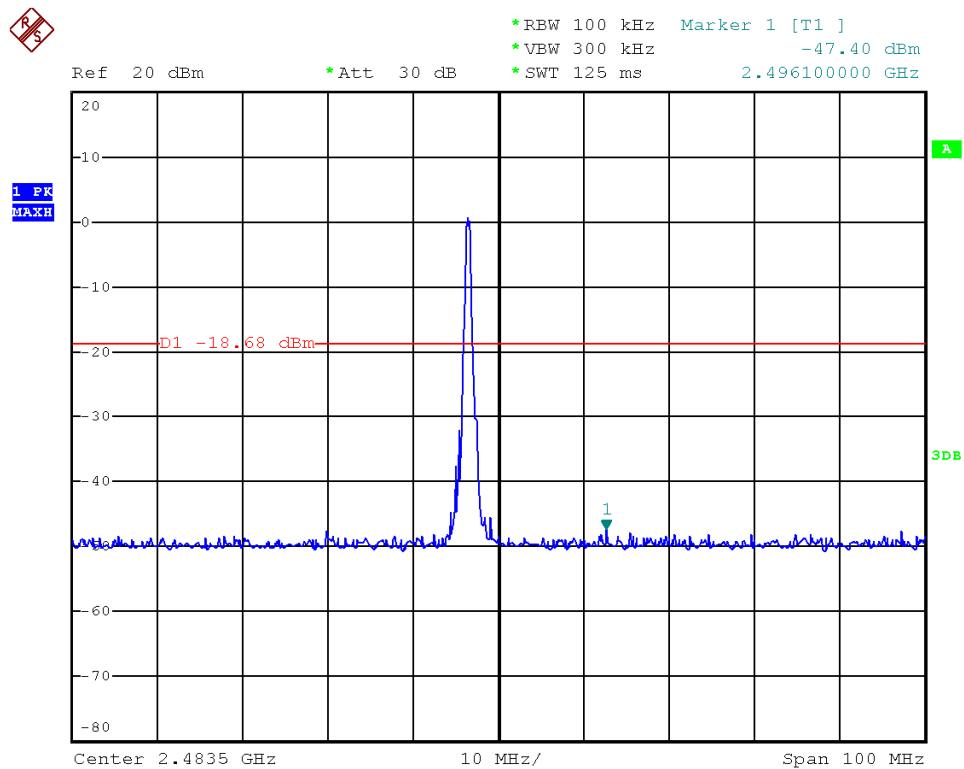





Modulation Standard: 8DPSK (3Mbps)
Channel: 00

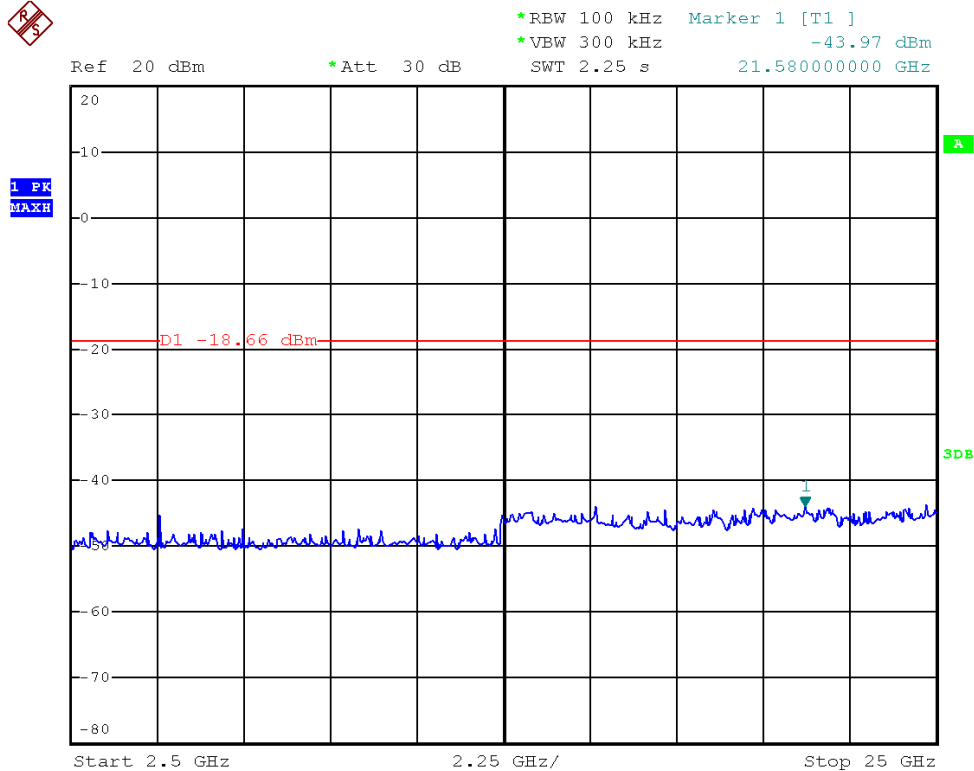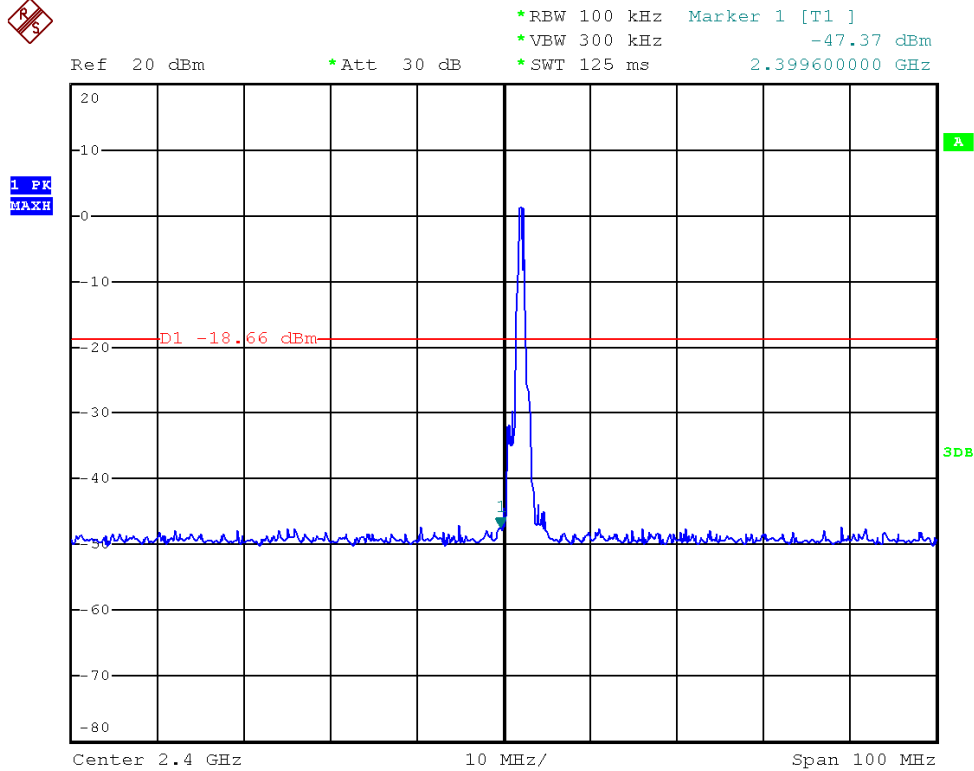



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

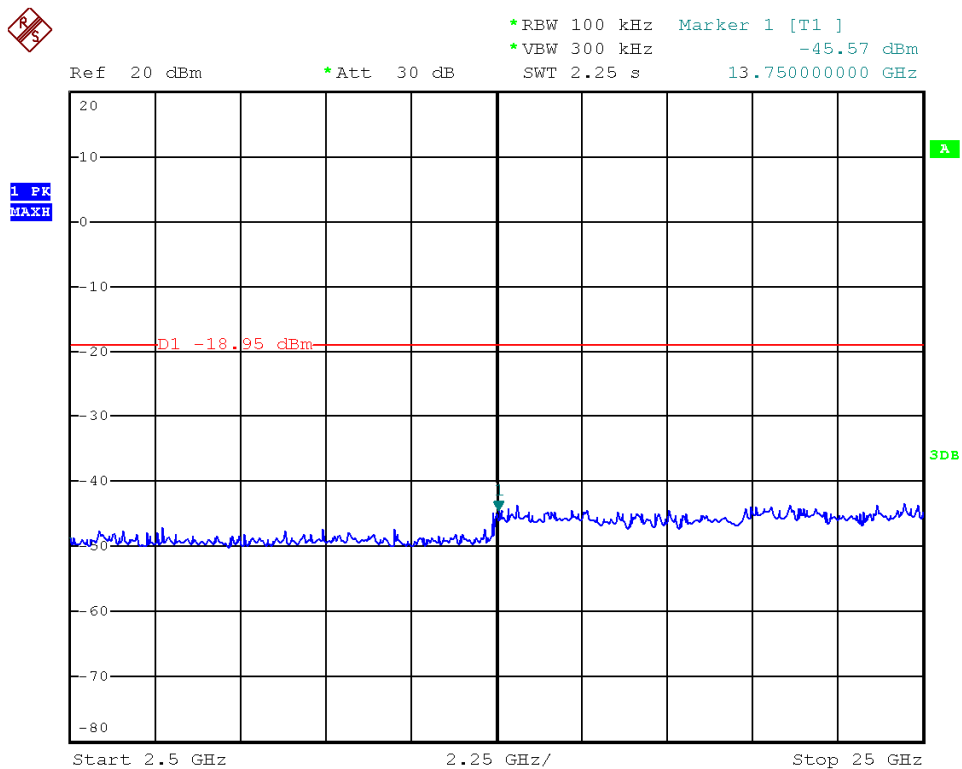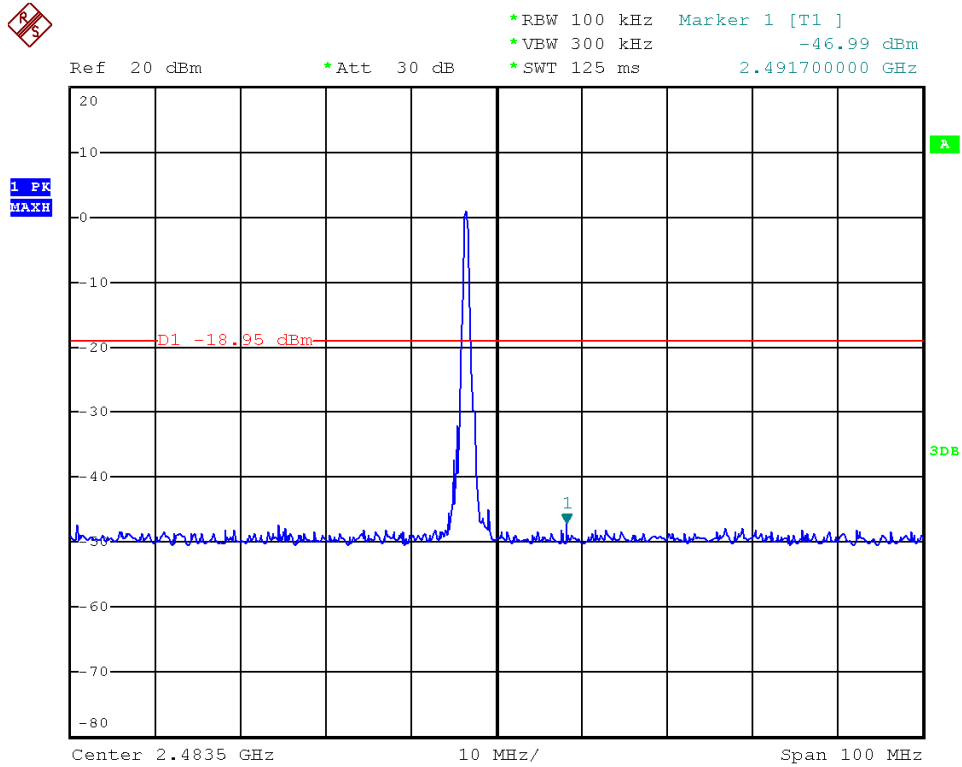

**11.6 Restrict band emission Measurement Data**

Test Date: Dec. 10, 2014

Temperature: 22 °C

Atmospheric pressure: 1017 hPa

Humidity: 52 %

Modulation Standard: GFSK (1Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2372.775	V	63.36	-12.81	50.55	Peak	74	54	-23.45	0	100
---	V	---	---	---	Ave	74	54	---	---	---
2326.740	H	63.63	-13.05	50.58	Peak	74	54	-23.42	0	100
---	H	---	---	---	Ave	74	54	---	---	---
Channel 78						Fundamental Frequency: 2480 MHz				
2487.631	V	63.47	-12.23	51.24	Peak	74	54	-22.76	0	100
---	V	---	---	---	Ave	74	54	---	---	---
2490.151	H	63.23	-2.21	51.02	Peak	74	54	-22.98	0	100
---	H	---	---	---	Ave	74	54	---	---	---

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2333.901	V	64.17	-13.01	51.16	Peak	74	54	-22.84	0	100
---	V	---	---	---	Ave	74	54	---	---	---
2367.102	H	63.76	-12.84	50.92	Peak	74	54	-23.08	0	100
---	H	---	---	---	Ave	74	54	---	---	---
Channel 78						Fundamental Frequency: 2480 MHz				
2487.715	V	65.18	-12.23	52.95	Peak	74	54	-21.05	0	100
---	V	---	---	---	Ave	74	54	---	---	---
2491.201	H	63.12	-12.21	50.91	Peak	74	54	-23.09	0	100
---	H	---	---	---	Ave	74	54	---	---	---



Modulation Standard: 8DPSK (3Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2320.974	V	63.55	-13.07	50.48	Peak	74	54	-23.52	0	100
---	V	---	---	---	Ave	74	54	---	---	---
2376.495	H	63.25	-12.8	50.45	Peak	74	54	-23.55	0	100
---	H	---	---	---	Ave	74	54	---	---	---
Channel 78						Fundamental Frequency: 2480 MHz				
2488.051	V	63.50	-12.23	51.27	Peak	74	54	-22.73	0	100
---	V	---	---	---	Ave	74	54	---	---	---
2496.619	H	62.76	-12.18	50.58	Peak	74	54	-23.42	0	100
---	H	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.