




Data#: 23 File#: D:\認證五部環隆\411614\備份.EMI

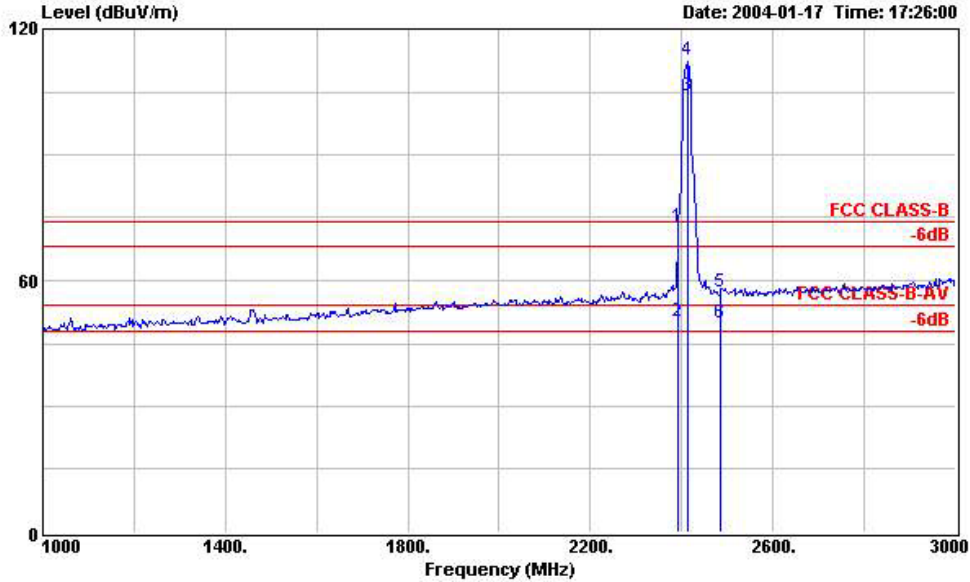


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11b Ch01 2412MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	
											dB
1 !	2390.000	72.72	-1.28	74.00	73.79	28.20	6.97	36.24	Peak	---	---
2 !	2390.000	50.35	-3.65	54.00	51.42	28.20	6.97	36.24	Average	---	---
3 X	2414.000	103.88	49.88	54.00	104.86	28.25	7.00	36.23	Average	112	295
4 X	2414.000	112.67	38.67	74.00	113.65	28.25	7.00	36.23	Peak	---	---
5	2483.500	57.28	-16.72	74.00	57.95	28.39	7.16	36.22	Peak	---	---
6 !	2483.500	49.81	-4.19	54.00	50.48	28.39	7.16	36.22	Average	---	---



Data#: 19 File#: D:\認證五部環隆\411614\備份.EMI

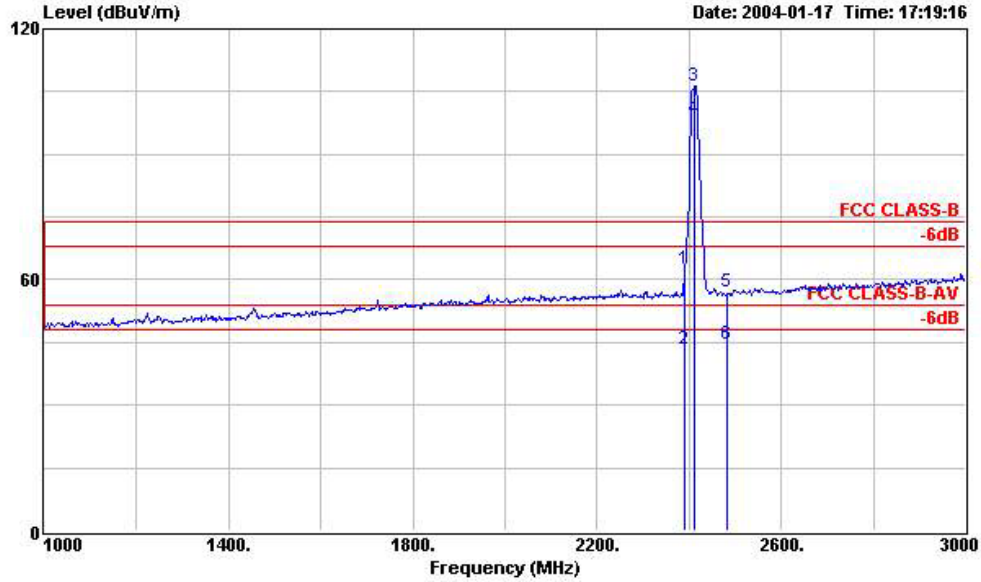


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11b Ch01 2412MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	
											MHz
1	2390.000	62.36	-11.64	74.00	63.43	28.20	6.97	36.24	Peak	---	---
2	2390.000	43.25	-10.75	54.00	44.32	28.20	6.97	36.24	Average	---	---
3 X	2412.000	106.50	32.50	74.00	107.49	28.24	7.00	36.23	Peak	112	295
4 X	2412.000	98.54	44.54	54.00	99.53	28.24	7.00	36.23	Average	112	295
5	2483.500	56.93	-17.07	74.00	57.60	28.39	7.16	36.22	Peak	---	---
6	2483.500	44.45	-9.55	54.00	45.12	28.39	7.16	36.22	Average	---	---



Data#: 35 File#: D:\認證五部\環隆\411614\備份.EMI

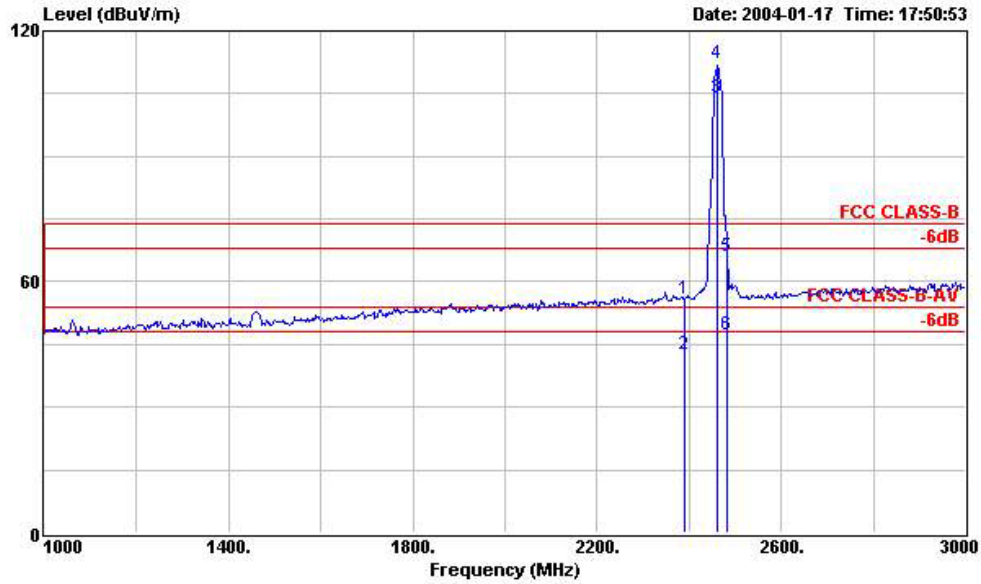


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11b Ch11 2462MHz

Freq	Level	Over Limit	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table	
											dB
1	2390.000	56.02	-17.98	74.00	57.09	28.20	6.97	36.24	Peak	---	---
2	2390.000	42.61	-11.39	54.00	43.68	28.20	6.97	36.24	Average	---	---
3 X	2462.000	103.78	49.78	54.00	104.59	28.35	7.06	36.22	Average	112	257
4 X	2462.000	112.37	38.37	74.00	113.18	28.35	7.06	36.22	Peak	---	---
5	2483.500	66.19	-7.81	74.00	66.86	28.39	7.16	36.22	Peak	---	---
6	2483.500	47.12	-6.88	54.00	47.79	28.39	7.16	36.22	Average	---	---



Data#: 39 File#: D:\認證五部\環隆\411614\備份.EMI

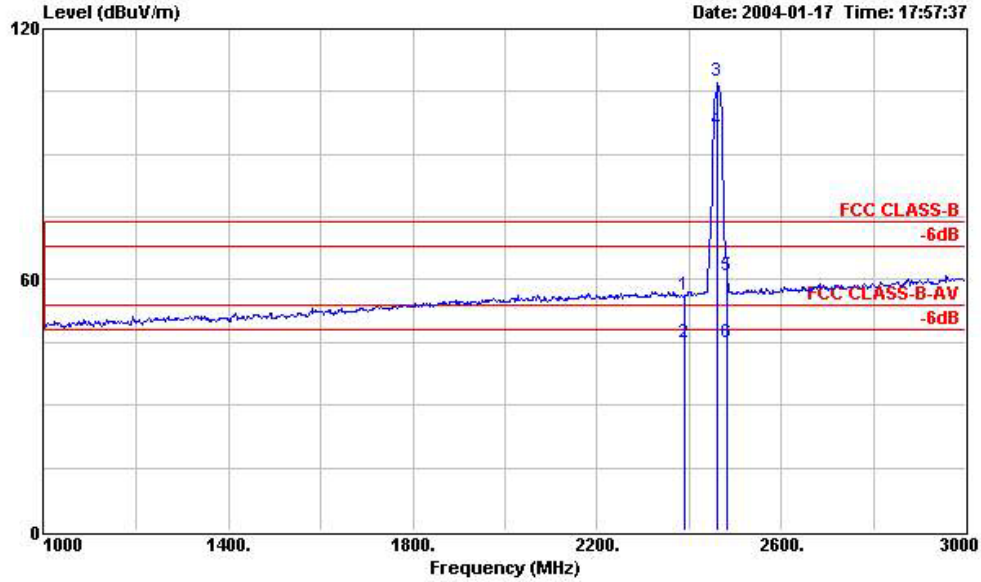


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11b Ch11 2462MHz

Peak	Freq	Level	Over Limit	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	56.38	-17.62	74.00	57.45	28.20	6.97	36.24	Peak	---	---
2	2390.000	44.87	-9.13	54.00	45.94	28.20	6.97	36.24	Average	---	---
3 X	2462.000	107.38	33.38	74.00	108.19	28.35	7.06	36.22	Peak	---	---
4 X	2462.000	95.68	41.68	54.00	96.49	28.35	7.06	36.22	Average	112	232
5	2483.500	61.01	-12.99	74.00	61.68	28.39	7.16	36.22	Peak	---	---
6	2483.500	44.92	-9.08	54.00	45.59	28.39	7.16	36.22	Average	---	---



Data#: 93 File#: D:\認證五部環隆\411614\備份.EMI

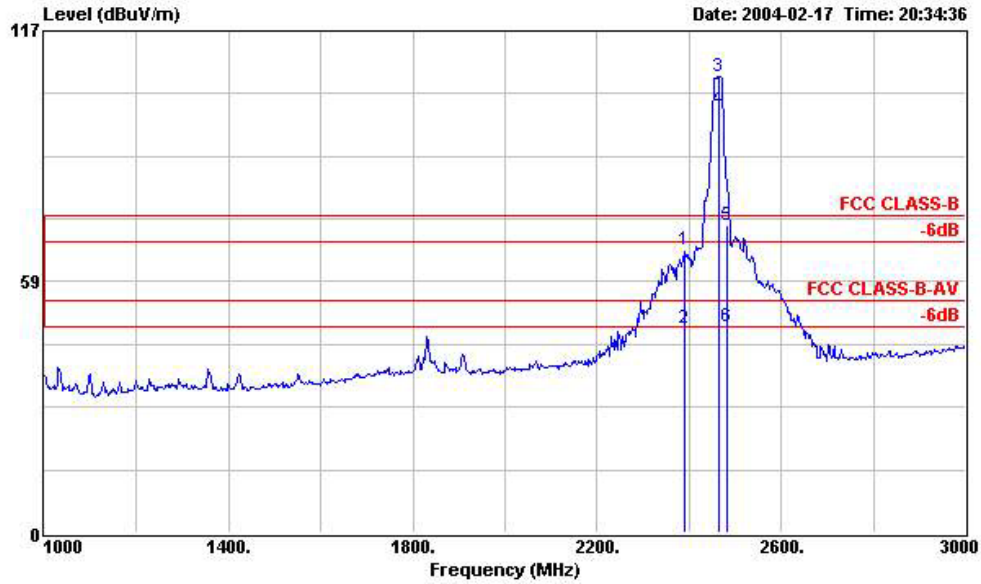


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11g TX Ch11 2462MHz

Freq	Level	Over Limit	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg	
1	2390.000	66.02	-7.98	74.00	71.99	28.20	6.97	41.14	Peak	---	---
2	2390.000	47.65	-6.35	54.00	53.62	28.20	6.97	41.14	Average	---	---
3 X	2464.720	106.38	32.38	74.00	112.16	28.35	7.06	41.19	Peak	100	321
4 X	2464.720	98.85	44.85	54.00	104.63	28.35	7.06	41.19	Average	100	321
5 !	2483.500	71.64	-2.36	74.00	77.29	28.39	7.16	41.20	Peak	100	321
6	2483.500	47.84	-6.16	54.00	53.49	28.39	7.16	41.20	Average	100	321



Data#: 94 File#: D:\認證五部環隆\411614\備份.EMI

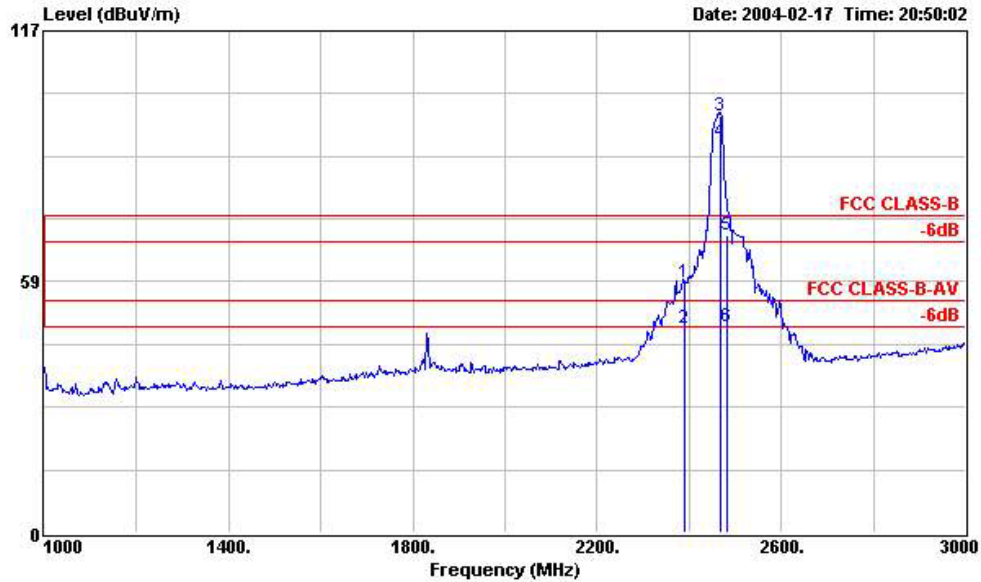


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11g TX Ch11 2462MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	
											dB
1	2390.000	58.13	-15.87	74.00	64.10	28.20	6.97	41.14	Peak	---	---
2	2390.000	47.45	-6.55	54.00	53.42	28.20	6.97	41.14	Average	---	---
3 X	2466.670	97.34	23.34	74.00	103.12	28.35	7.06	41.19	Peak	---	---
4 X	2466.670	91.26	37.26	54.00	97.04	28.35	7.06	41.19	Average	---	---
5 !	2483.500	69.38	-4.62	74.00	75.03	28.39	7.16	41.20	Peak	---	---
6 !	2483.500	48.09	-5.91	54.00	53.74	28.39	7.16	41.20	Average	---	---



Data#: 96 File#: D:\認證五部環隆\411614\備份.EMI

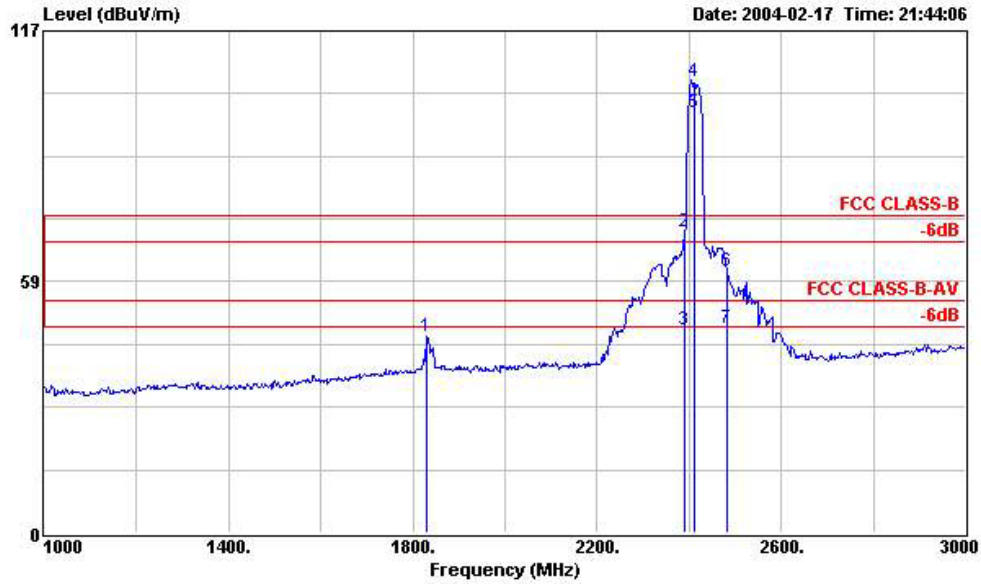


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11g TX Ch01 2412MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1830.000	45.70	-28.30	74.00	53.62	26.72	6.17	40.81	Peak	---
2	2390.000	70.04	-3.96	74.00	76.01	28.20	6.97	41.14	Peak	---
3	2390.000	47.07	-6.93	54.00	53.04	28.20	6.97	41.14	Average	---
4	2412.000	105.10	31.10	74.00	111.01	28.24	7.00	41.15	Peak	---
5	2412.000	97.85	43.85	54.00	103.76	28.24	7.00	41.15	Average	---
6	2483.500	60.84	-13.16	74.00	66.49	28.39	7.16	41.20	Peak	---
7	2483.500	47.72	-6.28	54.00	53.37	28.39	7.16	41.20	Average	---



Data#: 95 File#: D:\認證五部環隆\411614\備份.EMI

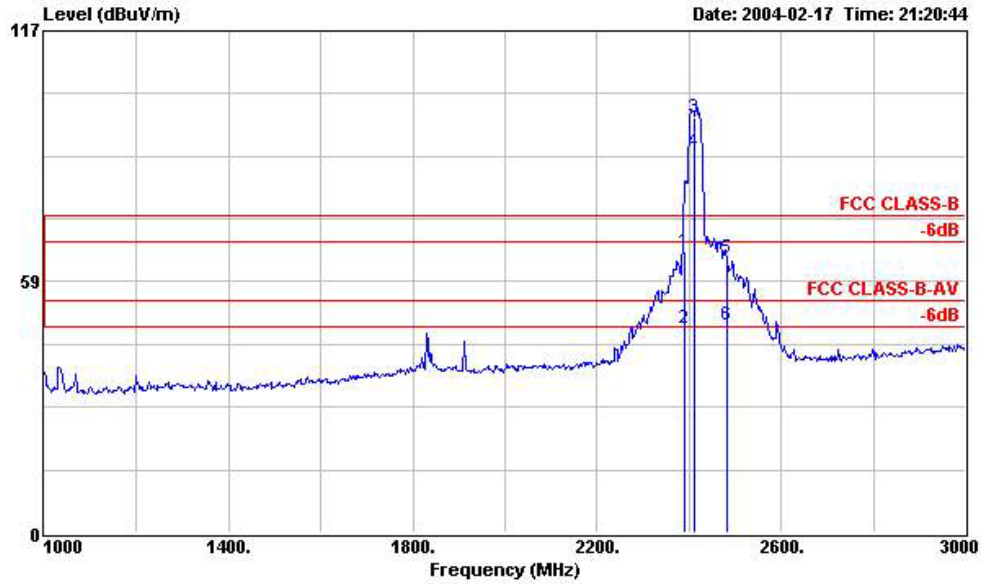

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT : TeamPed7500w
 Power : 110 V /60Hz
 Memo : FHT68XXXX/MiniPCI 11g TX Ch01 2412MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	
											dB
1	2390.000	65.60	-8.40	74.00	71.57	28.20	6.97	41.14	Peak	---	---
2	2390.000	47.48	-6.52	54.00	53.45	28.20	6.97	41.14	Average	---	---
3	X 2412.000	96.80	22.80	74.00	102.71	28.24	7.00	41.15	Peak	---	---
4	X 2412.000	88.73	34.73	54.00	94.64	28.24	7.00	41.15	Average	---	---
5	2483.500	63.93	-10.07	74.00	69.58	28.39	7.16	41.20	Peak	---	---
6	! 2483.500	48.47	-5.53	54.00	54.12	28.39	7.16	41.20	Average	---	---