

Test of SpectraLink 802X Wireless Telephone

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: TUVR89-A2 Rev C



TEST REPORT

FROM



Test of SpectraLink 802X Wireless Telephone

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: TUVR89-A2 Rev C

Note: this report only contains data with regard to the 5,150 to 5,350 MHz, and 5,470 to 5,725 MHz operational modes of the SpectraLink 802X Wireless Telephone. 2.4 and 5.8 GHz test data are reported in MiCOM Labs test report TUVR89-A1

This report supersedes TUVR89-A2 Rev B

Manufacturer: SpectraLink Corporation
5755 Central Avenue
Boulder, Colorado 80301, USA

Product Function: 802.11a/b/g Wireless Telephone

Copy No: pdf **Issue Date:** 3rd Nov. '06

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 3 of 107

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF CONTENTS

ACCREDITATION & LISTINGS.....	6
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
3.2. Scope of Test Program.....	13
3.3. Equipment Model(s) and Serial Number(s)	14
3.4. Antenna Details	14
3.5. Cabling and I/O Ports	14
3.6. Test Configurations.....	15
3.7. Equipment Modifications.....	16
3.8. Deviations from the Test Standard	16
3.9. Subcontracted Testing or Third Party Data	16
4. TEST SUMMARY	17
5. TEST RESULTS.....	19
5.1. Device Characteristics	19
5.1.1. 26 dB and 99 % Bandwidth	19
5.1.2. Transmit Output Power.....	25
5.1.3. Peak Power Spectral Density	28
5.1.4. Peak Excursion Ratio	36
5.1.5. Frequency Stability.....	44
5.1.6. Maximum Permissible Exposure	45
5.1.7. Conducted Spurious Emissions.....	46
5.1.8. Radiated Emissions.....	63
5.1.9. AC Wireline Conducted Emissions (150 kHz – 30 MHz).....	84
5.2. Dynamic Frequency Selection (DFS)	88
5.3. Equipment Model(s) and Serial Number(s)	89
5.3.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring	90
5.3.2. DFS Response requirement values.....	90
5.3.3. RADAR TEST WAVEFORMS	91
5.3.4. Frequency Hopping Radar Test Waveform	94
5.3.5. UNII Detection Bandwidth:	94
5.3.6. Non-Occupancy Period	94
5.3.7. Channel Availability Check Time	94
5.3.8. Channel Move Time FCC.....	95
6. PHOTOGRAPHS.....	101
6.1. Radiated Emissions (30 MHz-1 GHz).....	101
6.2. Spurious Emissions >1 GHz.....	102
6.3. Conducted Emissions (150 kHz - 30 MHz).....	103
6.4. General Measurement Test Set-Up.....	104

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 5 of 107

6.5. Dynamic Frequency Selection Test Set-Up	105
7. TEST EQUIPMENT DETAILS.....	106


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 6 of 107

ACCREDITATION & LISTINGS

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>

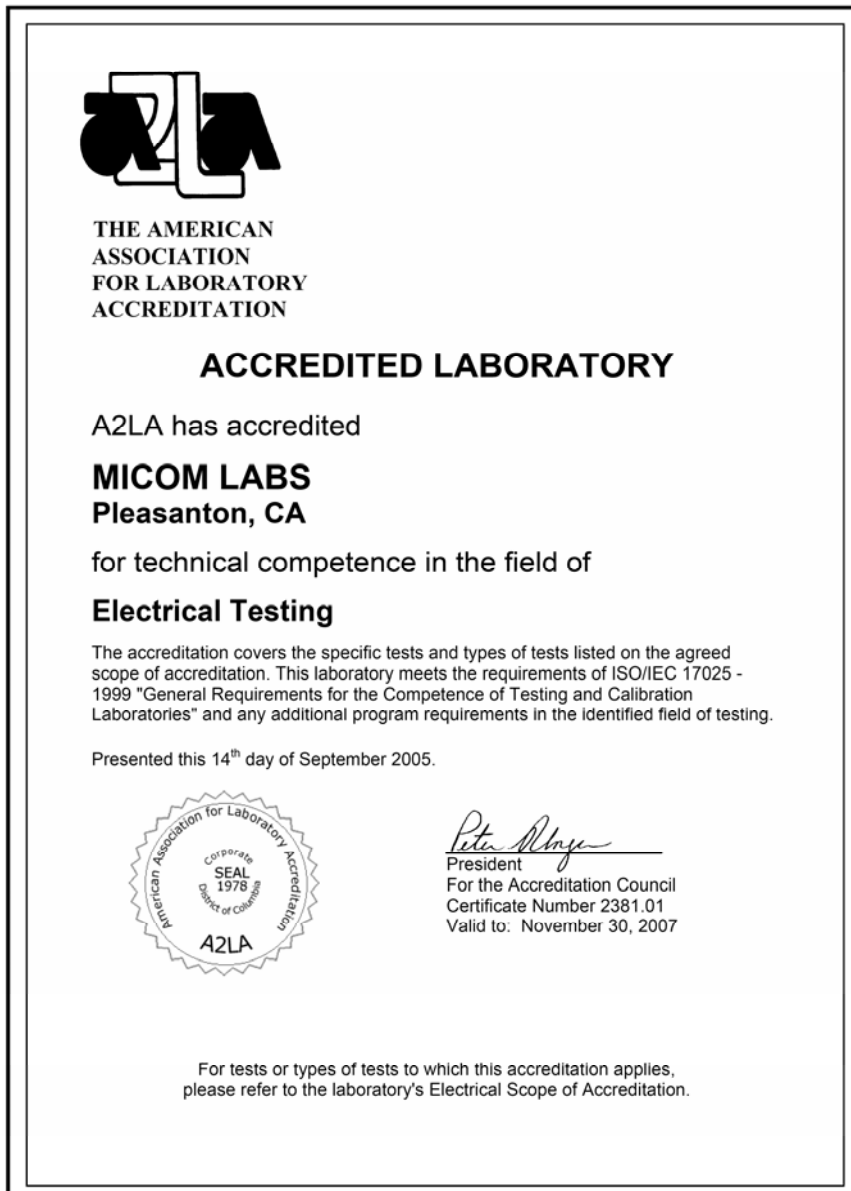

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 7 of 107

LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America

Federal Communications Commission (FCC) Listing #: 102167

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 8 of 107

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	8 th June 2006	Initial Release Rev A
Rev B	6 th Sept. 2006	Section 3.6 Test Configurations, included duty cycle correction factor
Rev C	3 rd Nov. 2006	i. Results for frequency range 5,470 – 5,725 MHz added ii. Results for Dynamic Frequency Selection (DFS) added iii. Update Test Report with new Client Product number 802X

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 9 of 107

1. TEST RESULT CERTIFICATE

Manufacturer:	SpectraLink Corporation 5755 Central Avenue Boulder, Colorado 80301, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	802.11a/b/g Wireless Phone	Telephone:	+1 925 462 0304
Model:	802X	Fax:	+1 925 462 0306
S/N:	660324742 & 660324730		
Test Date(s):	8th April to 12th October '06	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



CERTIFICATE #2381.01



 Graeme Grieve
 Quality Manager MiCOM Labs,



 Gordon Hurst
 President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	Feb 2006	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	Industry Canada RSS-210	Issue 6 Sept. 2005	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(iv)	Industry Canada RSS-Gen	Issue 1 Sept. 2005	General Requirements and Information for the Certification of Radiocommunication Equipment
(v)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vi)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(viii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(ix)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(x)	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xi)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 11 of 107

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 12 of 107

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the SpectraLink 802X Wireless Telephone in the frequency ranges 5150 to 5350 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	As Manufacturer
Manufacturer:	SpectraLink Corporation 5755 Central Avenue Boulder, Colorado 80301, USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	TUVR89-A2 Rev C
Date EUT received:	7 TH April 2006
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	8 th April to 23 rd May DFS testing 12 th October '06
No of Units Tested:	2
Type of Equipment:	802.11a/b/g Wireless Telephone
Manufacturers Trade Name:	NetLink Wireless Telephone
Model:	802X
Location for use:	Indoor
Declared Frequency Range(s):	5,150 – 5,350 MHz
Type of Modulation:	Per 802.11a – OFDM
Declared Nominal Output Power:	802.11a: +20dBm
EUT Modes of Operation:	802.11a/b/g
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	3.7 Vdc, current (depending on mode) 200mA Avg/ 800 mA peak
Operating Temperature Range:	Declared range -10 to +50°C
ITU Emission Designator:	802.11a – 17M8W7D
Microprocessor(s) Model:	TI TMS320VC5507
Clock/Oscillator(s):	32.768 KHz, 40 MHz, 48 MHz
Frequency Stability:	±20 ppm max
Equipment Dimensions:	137mm x 52mm x 22mm
Weight:	With Ultra battery 0.3 lbs (137 grams)
Primary function of equipment:	Wireless Telephone Handset

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

The scope of the test program was to test the SpectraLink 802X wireless telephone handset in the frequency ranges 5150 - 5350 MHz and 5470 – 5725 MHz for compliance against FCC 47 CFR Part 15.407, Industry Canada RSS-210 specifications, and the Dynamic Frequency Selection (DFS) requirements of the FCC specification.

The SpectraLink Phone 802X wireless telephone employs OFDM modulation.

SpectraLink Corporation 802X Wireless Telephone Handset



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Photos of the headsets that were tested in combination with the 802X phone.

PTH200 Headset



H251/N Headset



3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless phone	SpectraLink	802X	660324742 & 660324730
EUT	Phone stand and single battery charger	SpectraLink	PCS1850	None
EUT	Phone stand and dual battery charger	SpectraLink	PCD1850	None
EUT	Headset	Plantronics	PTH200	None
EUT	Headset	Plantronics	H251/N	None

3.4. Antenna Details

1. 0 dBi integral antenna

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 2.4mm socket for headset or earpiece.



3.6. Test Configurations

Matrix of test configurations

Operational Mode (802.11)	Frequencies (MHz)	Maximum Data Rates (MBit/s)	Data Rate(s) Selected for Test Purposes (Mbit/s)	
			Conducted	Radiated
a	5,180	54	12 ¹	12 ¹
	5,260			
	5,320			
a	5,500	54	12 ¹	12 ¹
	5,600			
	5,700			

¹ – Except for DFS these data rates were used to test and exercise the EUT at all times

Matrix of Equipment test configurations

Telephone Model #	Headsets		Desktop Phone stand & Battery Charger	
	PTH200	H251/N	Single	Dual
802X	√	√	√	√

Worst case plots are provided for each test parameter within this report. Plots not included are held on file by the test laboratory and available upon request with client permission.

System Duty Cycle

The phones were delivered with a fixed duty cycle. Any emissions (harmonic or otherwise) related to the duty cycle were offset by a correction factor $20 \cdot \log(\text{duty cycle})$. Maximum duty cycle for each operational mode is as follows;

802.11a

Duty Cycle 2.8%, Correction Factor = -31.06



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 16 of 107

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. None

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

Radiated emissions are tested below and verified above 1 GHz at TUV Rheinland of North America's 10m chamber located at the following address;-

2305 Mission College Blvd.
Santa Clara
California 95054
USA

TUV Rheinland of North America IC Registration Number: IC 4453-1

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(a) A9.2(2) 4.4	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	5.1.1
15.407(a) A9.2(2) 4.6	Transmit Output Power	Power Measurement	Conducted	Complies	5.1.2
15.407(a) A9.2(2)	Peak Power Spectral Density	PPSD	Conducted	Complies	5.1.3
15.407(a)(6)	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	5.1.4
15.407(g) 15.31 2.1 4.5	Frequency Stability	Limits: contained within band of operation at all times.	Manufacturer declaration	Complies	5.1.5
15.407(f) 5.5	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	SAR testing performed	Complies	5.1.6
15.407(b)(2) 2.2 2.6 A9.3(2) 4.7	Conducted Spurious Emissions	Spurious emissions above 1GHz (1-40GHz) including band edge	Conducted	Complies	5.1.7

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7	Radiated Emissions		Radiated		5.1.8
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.8.1
	Radiated Band Edge	Band edge results		Complies	5.1.8.2
RSS-GEN 6	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.8.3
15.407(b)(6) 15.205(a) 15.209(a) 2.2	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	5.1.8.4
15.407(b)(6) 15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.9
15.407(h)	DFS Testing	Dynamic Frequency Selection (DFS)	Conducted	Complies	5.2

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics


5.1.1. 26 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)
Industry Canada RSS-Gen 4.4

Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyser connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The spectrum analyzer utilized the 6 dB resolution bandwidth filter for all measurements.

Test Measurement Set up

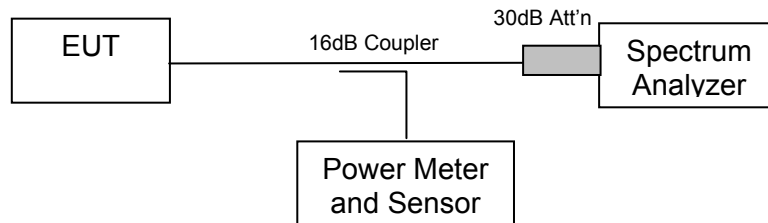

Measurement set up for 6 dB and 99 % bandwidth test

EUT parameters.

Data Rate(s): 802.11a 12 MBit/s,

Power Level: Maximum

Duty Cycle: 100%



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 20 of 107


Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

Ambient conditions.



Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)	26 dB and 99 % BW Plots
5,180	23.7275	17.0741	01
5,260	28.6973	17.4749	02
5,320	31.4228	17.7956	03

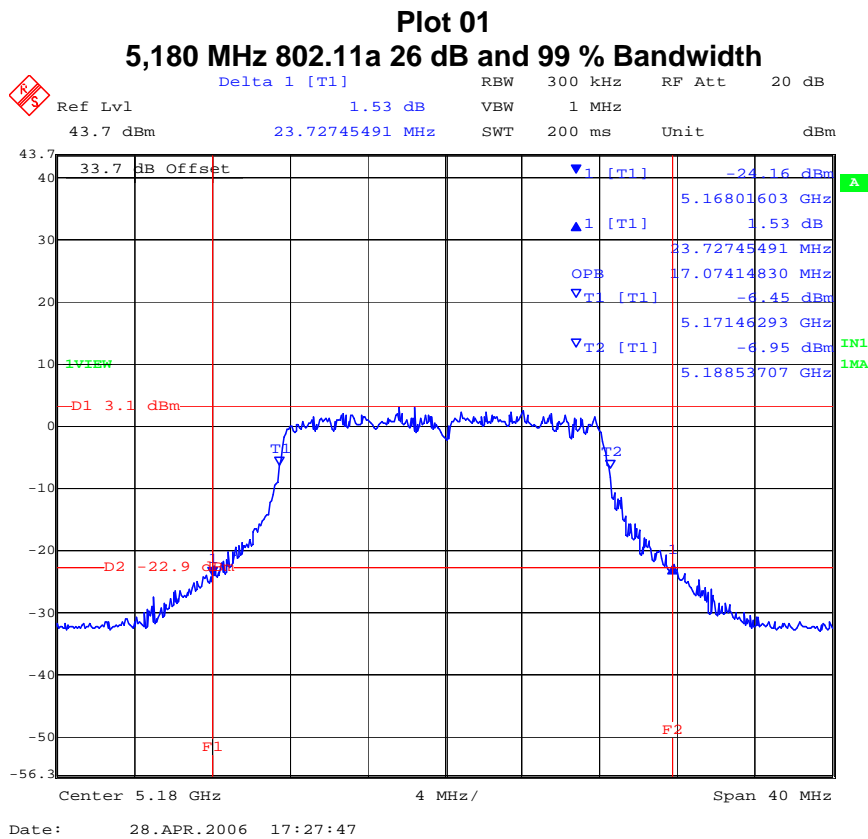

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

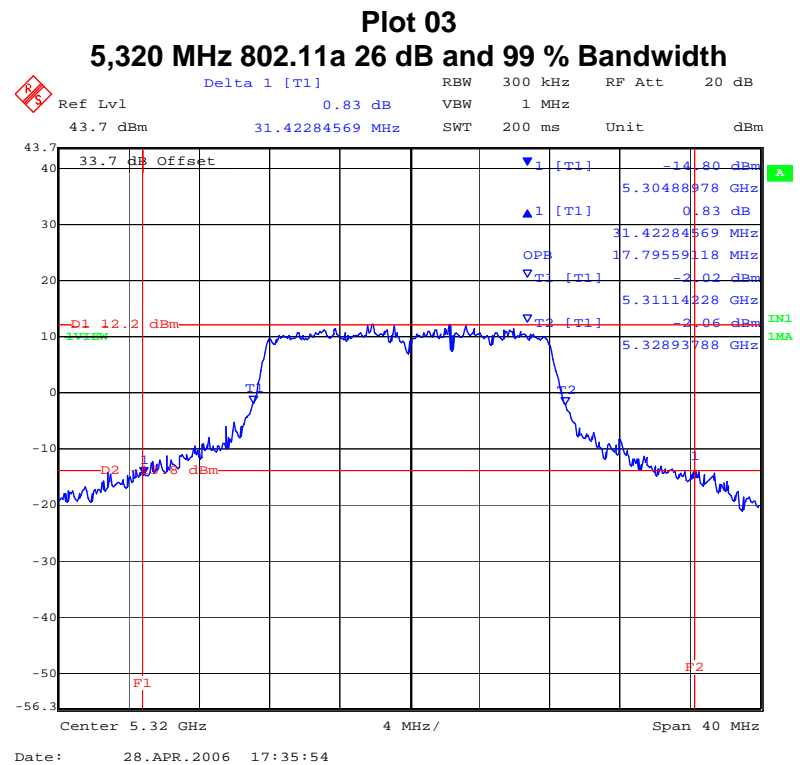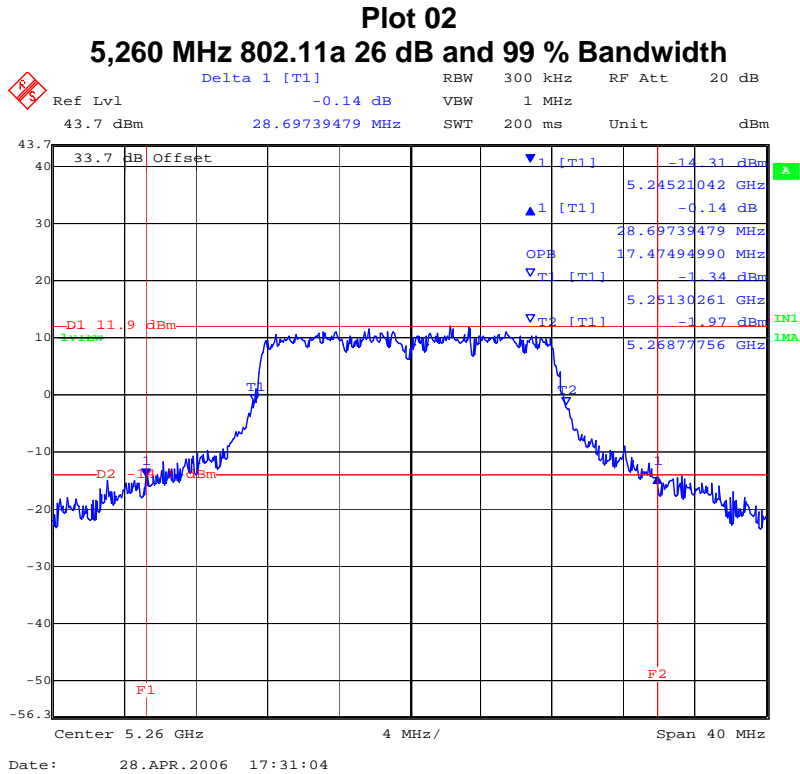


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)	26 dB and 99 % BW Plots
5,500	23.0862	16.8337	05
5,600	24.0481	16.7535	05
5,700	23.6473	16.6733	06

Plot 04
5,500 MHz 802.11a 26 dB and 99 % Bandwidth

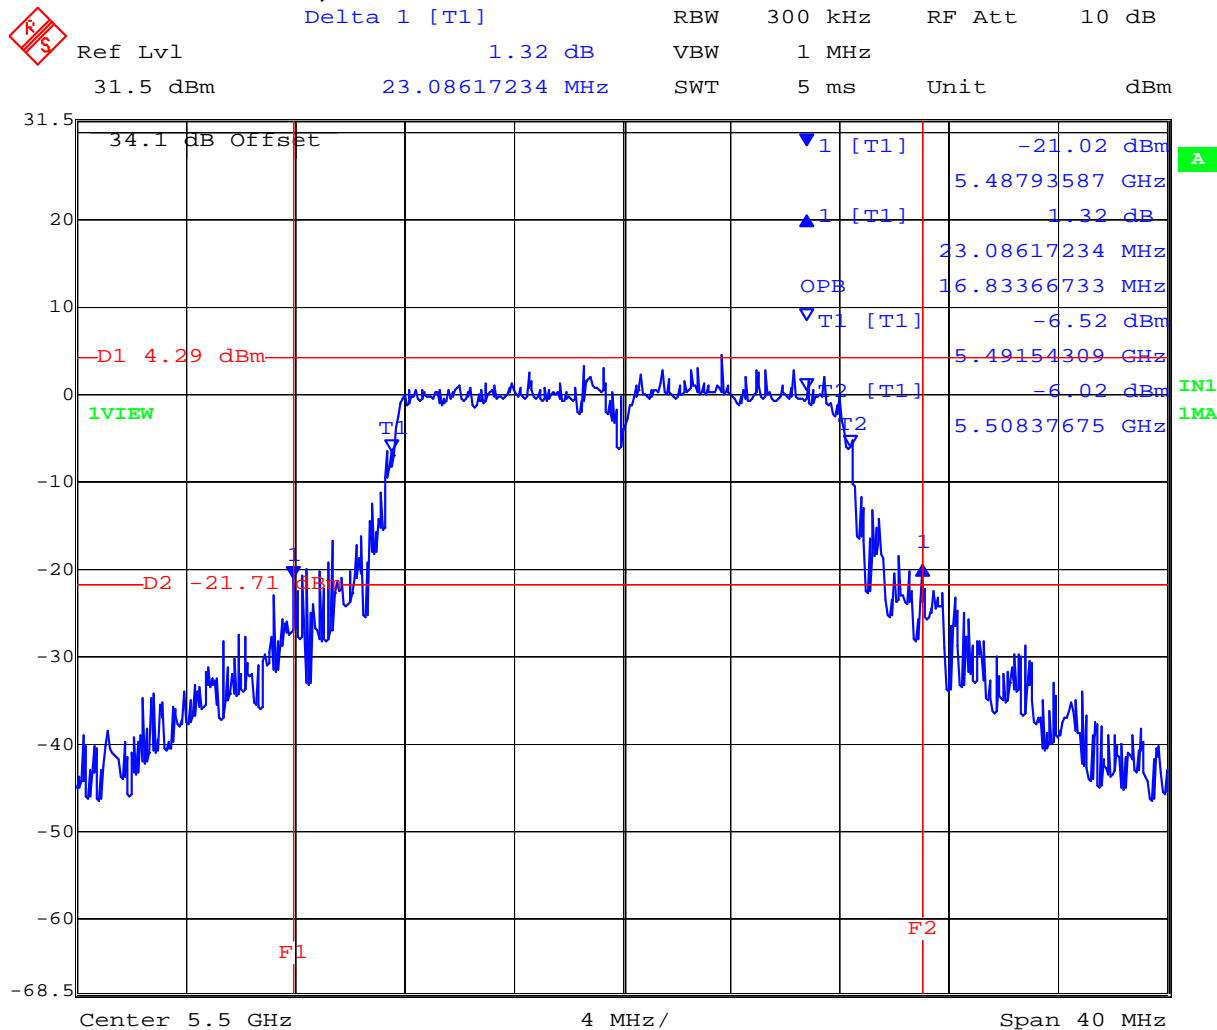


Date: 26.MAY.2006 16:38:28


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 05
5,600 MHz 802.11a 26 dB and 99 % Bandwidth

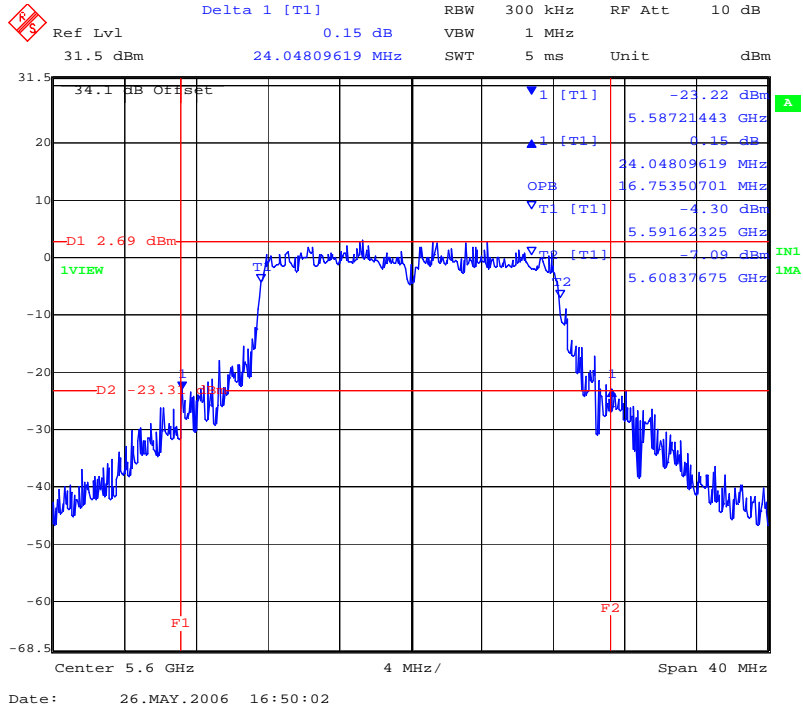

Plot 06
5,700 MHz 802.11a 26 dB and 99 % Bandwidth

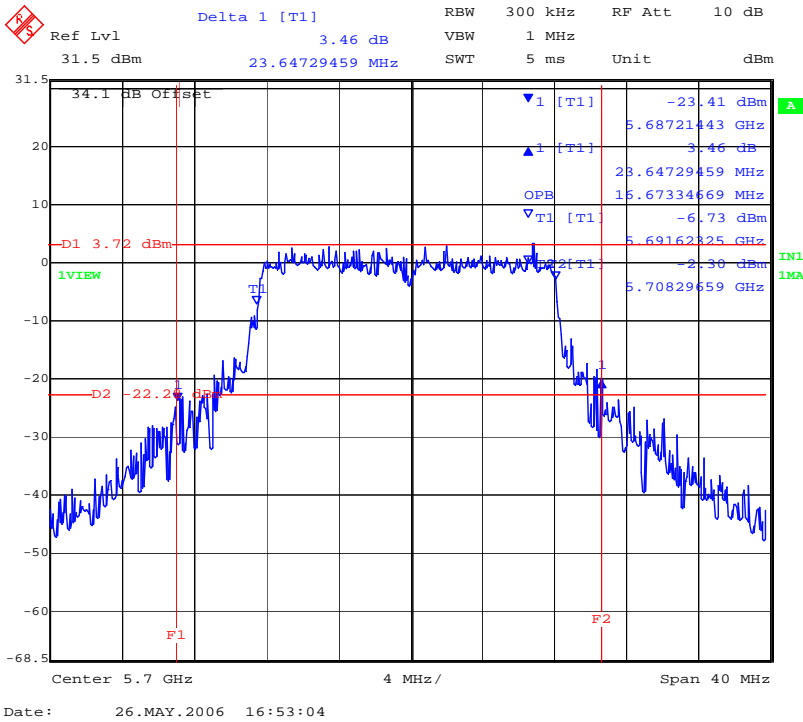

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117


5.1.2. Transmit Output Power

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 §9.9(2)
Industry Canada RSS-Gen 4.6

Test Procedure

The transmitter terminal of EUT was connected to the input of the average power meter and the spectrum analyzer. Method #2 as outlined in the FCC's Public Notice (DA 02-2138, August 30, 2002) was used to make all measurements. The results reported include all offsets due to attenuators, cable losses etc.

Test Measurement Set up

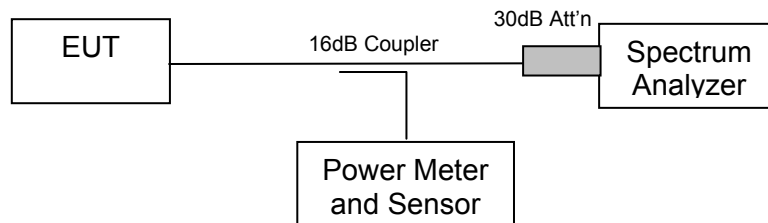

Measurement set up for Transmitter Output Power

Maximum Transmit Power

Limit 5150 – 5250: Lesser of 50 mW (+17dBm) or $4 + 10 \text{ Log (B)}$ dBm

Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	$4 + 10 \text{ Log (B)}$	Limit (dBm)
5150 – 5250	23.7275	+17.75 dBm	+17

Limit 5250 – 5350: Lesser of 250 mW (+24dBm) or $11 + 10 \text{ Log (B)}$ dBm

Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	$11 + 10 \text{ Log (B)}$	Limit (dBm)
5250 - 5350	31.4228	+25.97 dBm	+24

Limit 5470 – 5725: Lesser of 1 W (+30dBm) or $17 + 10 \text{ Log (B)}$ dBm

Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	$17 + 10 \text{ Log (B)}$	Limit (dBm)
5470 - 5725	24.0481	+30.81 dBm	+30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Data Rate(s): 802.11a 12 MBit/s,

Power Level: Maximum

Duty Cycle: 100%

TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,180	+9.75
5,260	+13.46
5,320	+13.36

TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,500	+13.35
5,600	+13.25
5,700	+13.15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or 10 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log₁₀ B, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)


Test Procedure

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (x) in Section 2.1 'References and Measurement Uncertainty');

“Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands.”

was used to determine the peak power spectral density of the emission. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

Test Measurement Set up

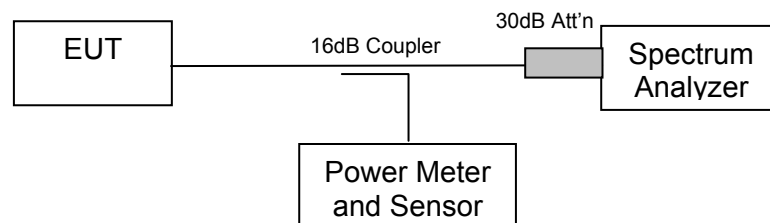

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Data Rate(s): 802.11a 12 MBit/s,

Power Level: Maximum

Duty Cycle: 100%




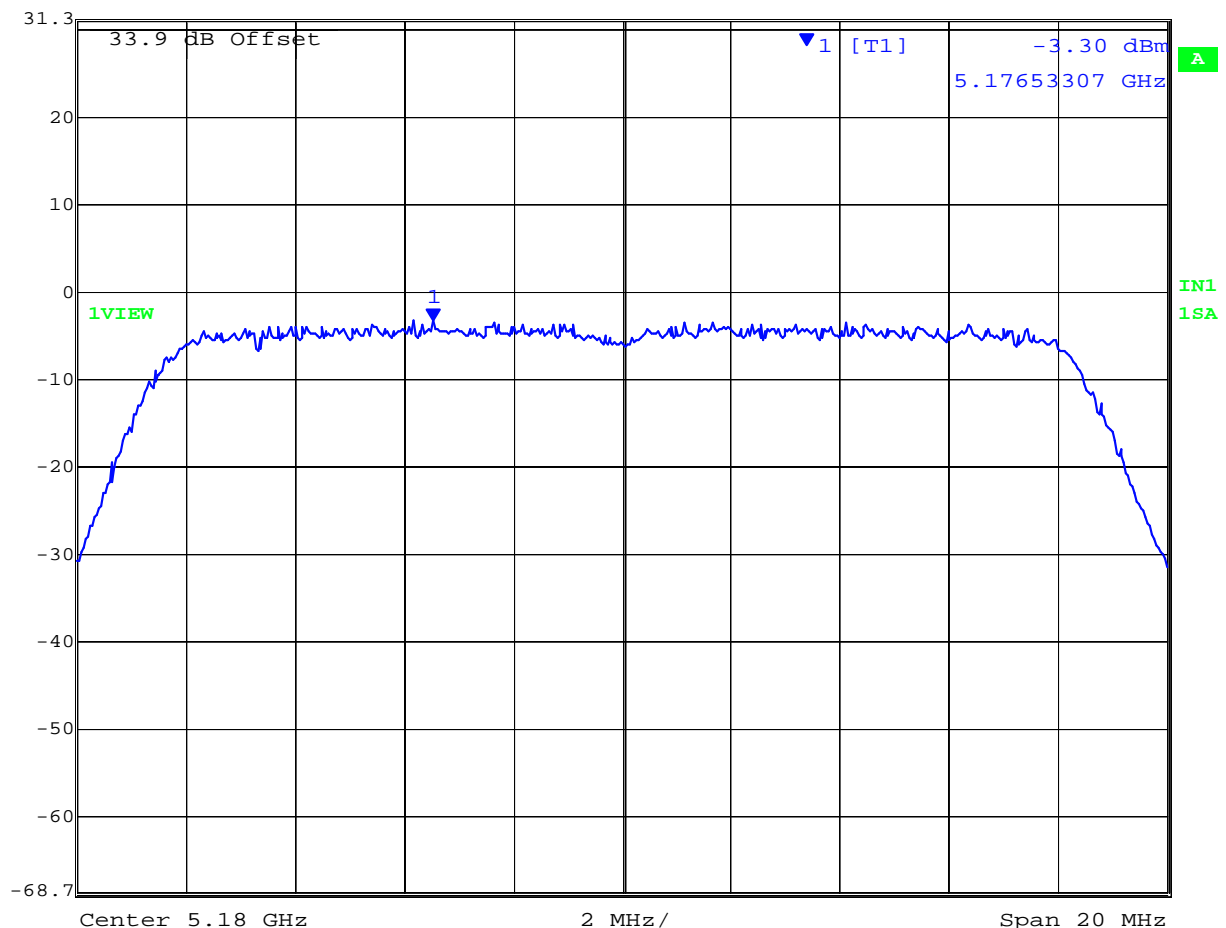
TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Plot #
5,180	5176.53307	-3.30	07
5,260	5258.65731	+0.72	08
5,320	5316.01202	+0.50	09

Plot 07

5,180 MHz 802.11a Peak Power Spectral Density


 Marker 1 [T1] RBW 1 MHz RF Att 10 dB
 Ref Lvl -3.30 dBm VBW 1 MHz
 31.3 dBm 5.17653307 GHz SWT 5 ms Unit dBm



Date: 26.MAY.2006 15:31:47


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 08
5,260 MHz 802.11a Peak Power Spectral Density



Ref Lvl 31.3 dBm
Marker 1 [T1] 0.72 dBm
5.25865731 GHz
RBW 1 MHz
RF Att 10 dB
VBW 1 MHz
SWT 5 ms
Unit dBm

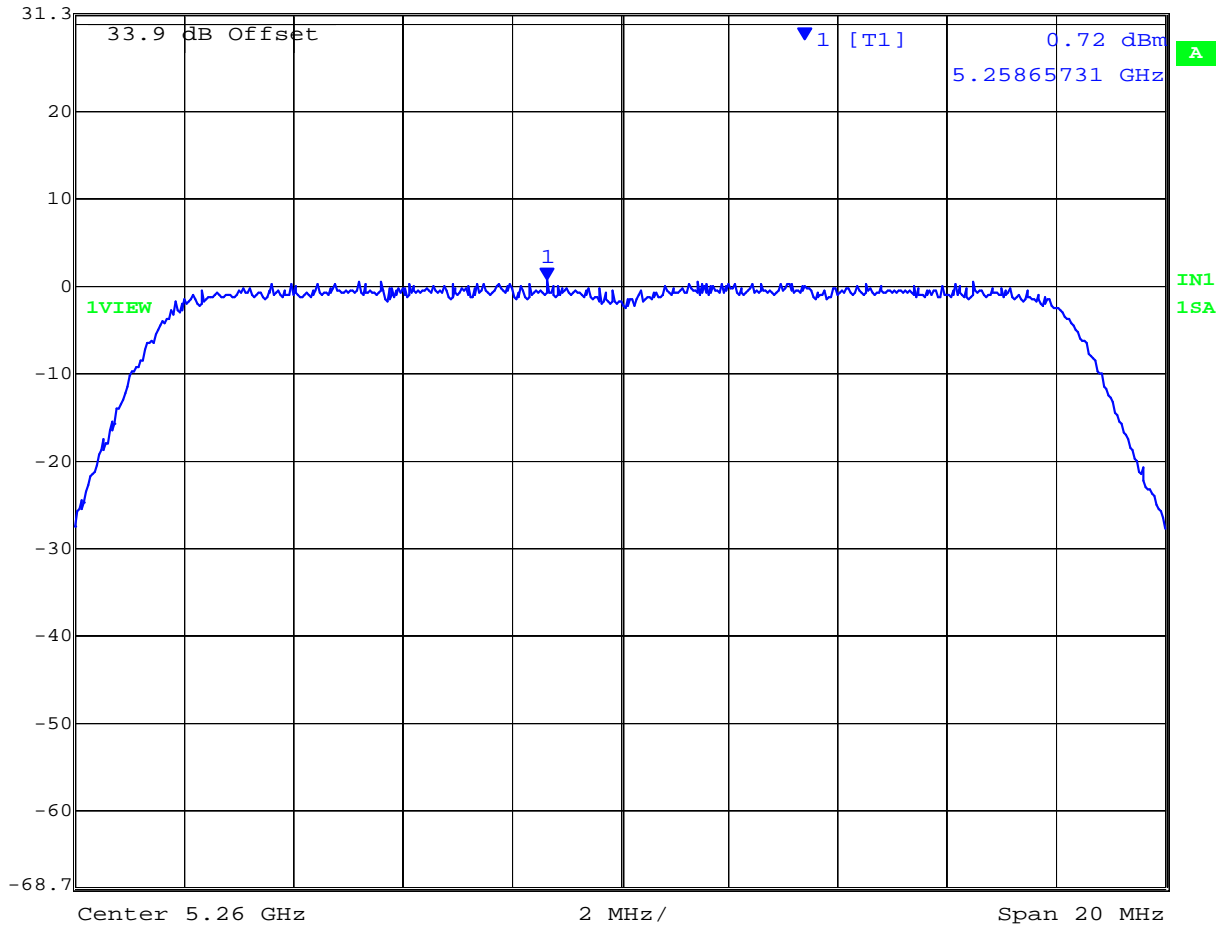


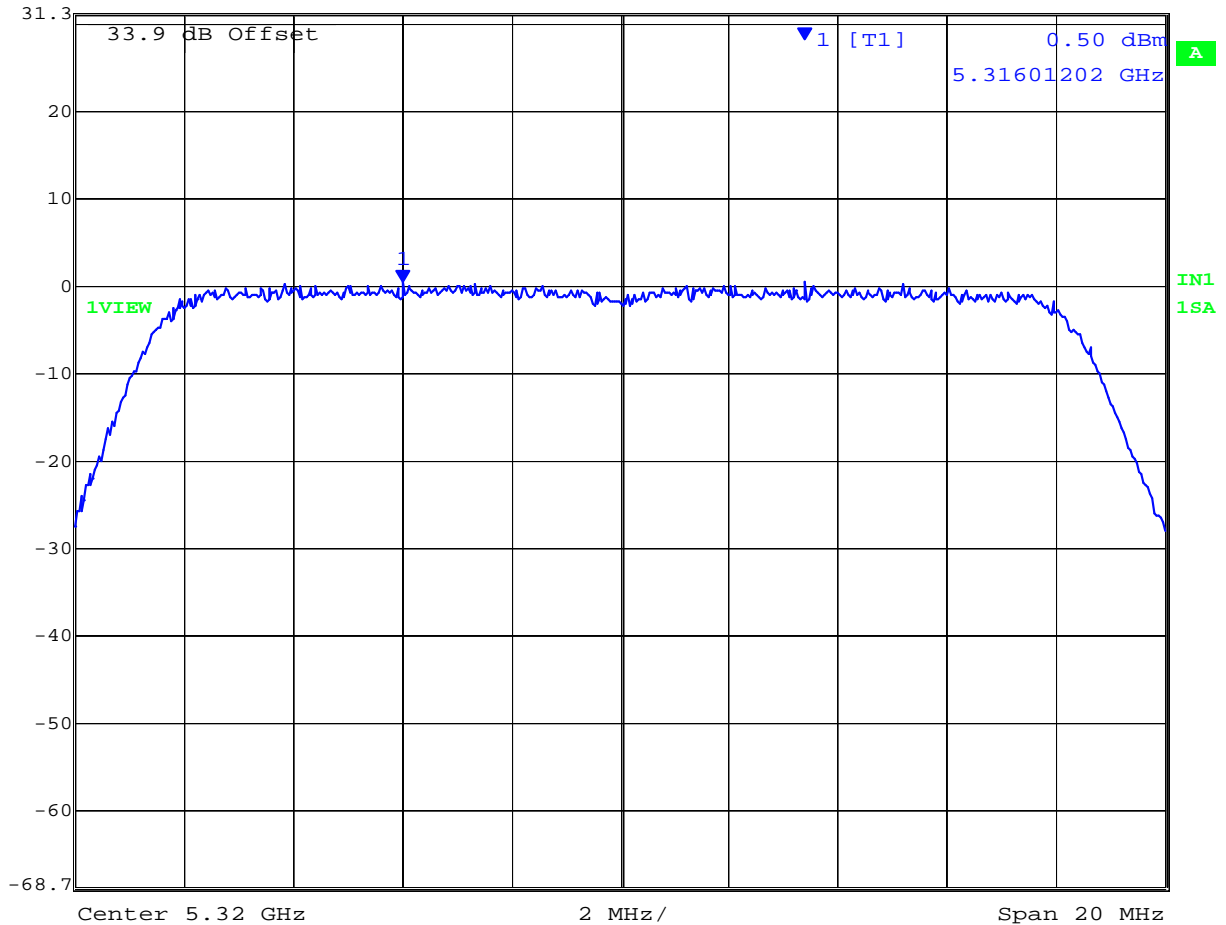
Date: 26.MAY.2006 15:31:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 09
5,320 MHz 802.11a Peak Power Spectral Density

 Ref Lvl 31.3 dBm
Marker 1 [T1] 0.50 dBm
RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 5 ms Unit dBm



Date: 26.MAY.2006 15:30:03


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Plot #
5,500	5503.50701	+0.26	10
5,600	5598.97796	+0.78	11
5,700	5703.06613	+1.06	12

Plot 10
5,500 MHz 802.11a Peak Power Spectral Density

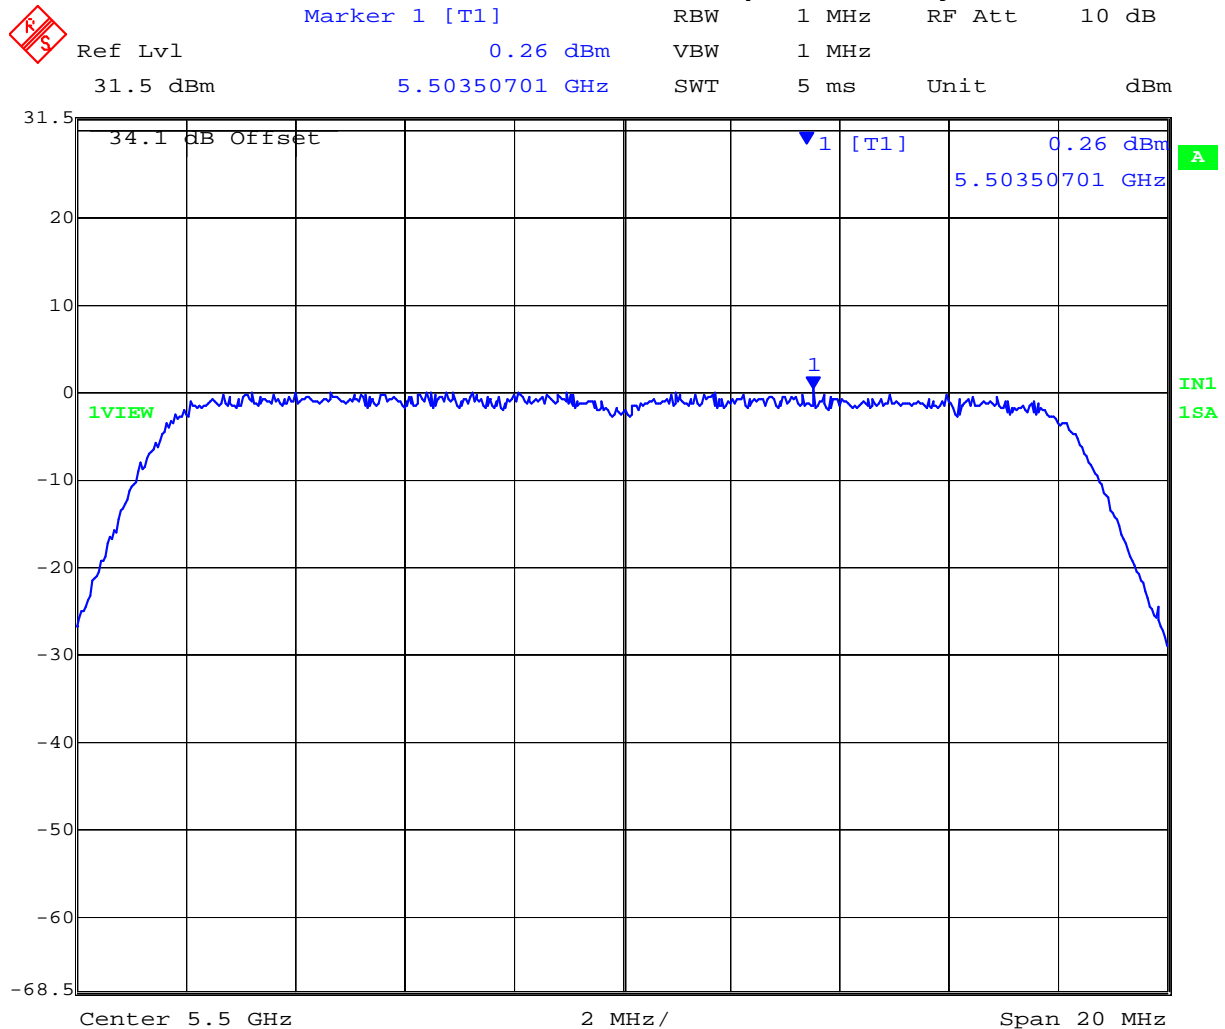

Date: 26.MAY.2006 15:32:45


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 11
5,600 MHz 802.11a Peak Power Spectral Density



Ref Lvl 31.5 dBm
Marker 1 [T1] 0.78 dBm
5.59897796 GHz
RBW 1 MHz
RF Att 10 dB
VBW 1 MHz
SWT 5 ms
Unit dBm

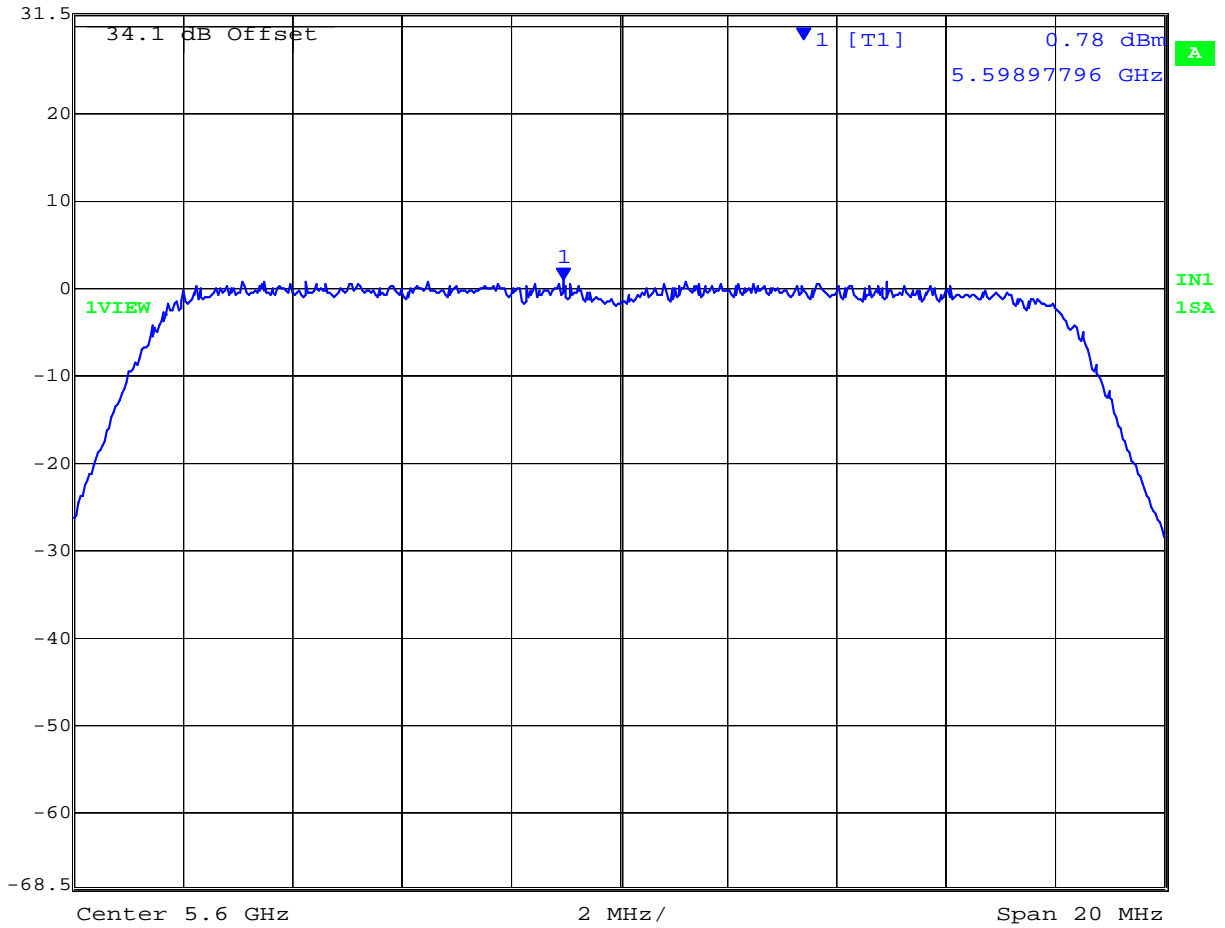


Date: 26.MAY.2006 15:33:30


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 34 of 107

Plot 12
5,700 MHz 802.11a Peak Power Spectral Density

 Ref Lvl 31.5 dBm
Marker 1 [T1] 1.06 dBm
5.70306613 GHz
RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 5 ms Unit dBm

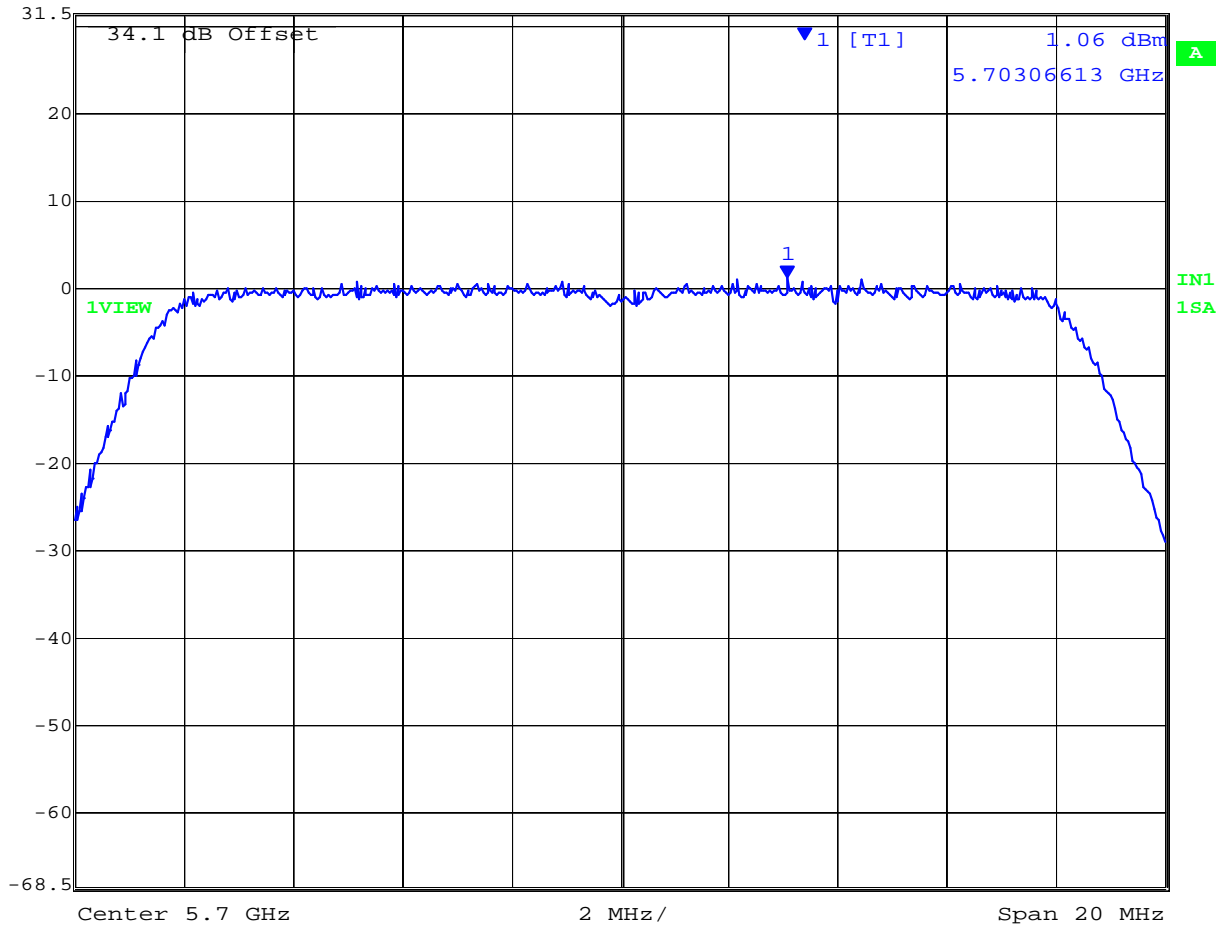

Date: 26.MAY.2006 15:34:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

§ A9.2(1) The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

§ A9.2(2) The power spectral density shall not exceed +11 dBm in any 1 MHz band

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.4. Peak Excursion Ratio

FCC, Part 15 Subpart C §15.407(a)(6)

Test Procedure

This is an antenna conducted measurement using a spectrum analyzer. Method 1 in Normative Reference (x) Section 2.1 was implemented to determine module Peak Excursion Ratio. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

Test Measurement Set up

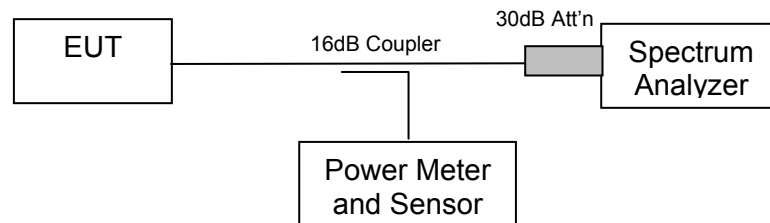

Measurement set up for Peak Excursion Ratio

Measurement Results for Peak Excursion Ratio

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

EUT parameters.

Data Rate(s): 802.11a 12 MBit/s,

Power Level: Maximum

Duty Cycle: 100%

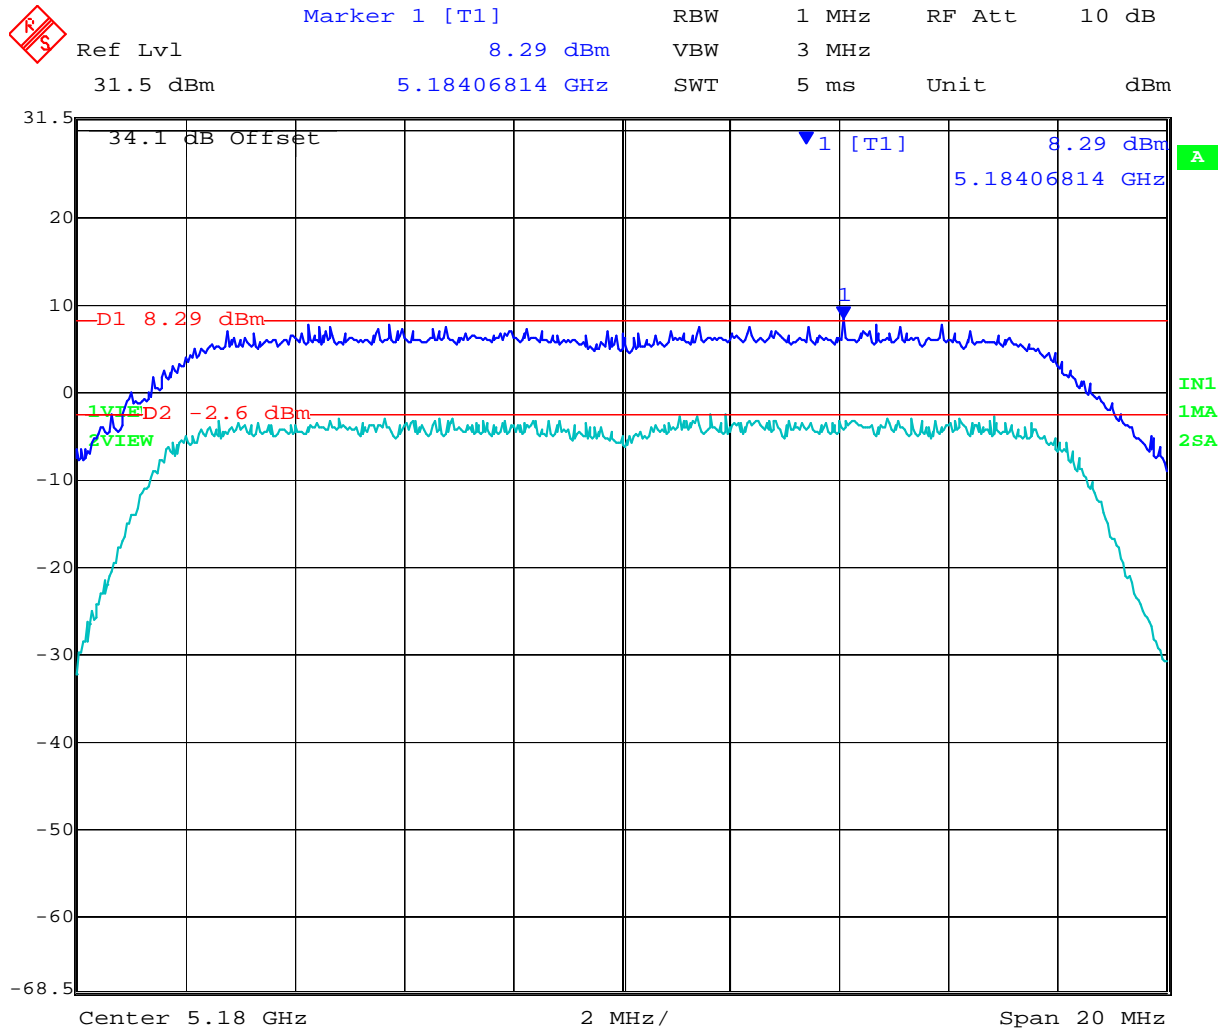


TABLE OF RESULTS – 802.11a

Centre Frequency (MHz)	Peak Excursion Ratio (dB)	Plot #
5,180	10.89	13
5,260	11.83	14
5,320	10.68	15

Plot 13

5,180 MHz 802.11a - Peak Excursion Ratio




Date: 26.MAY.2006 16:33:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 14

5,260 MHz 802.11a - Peak Excursion Ratio

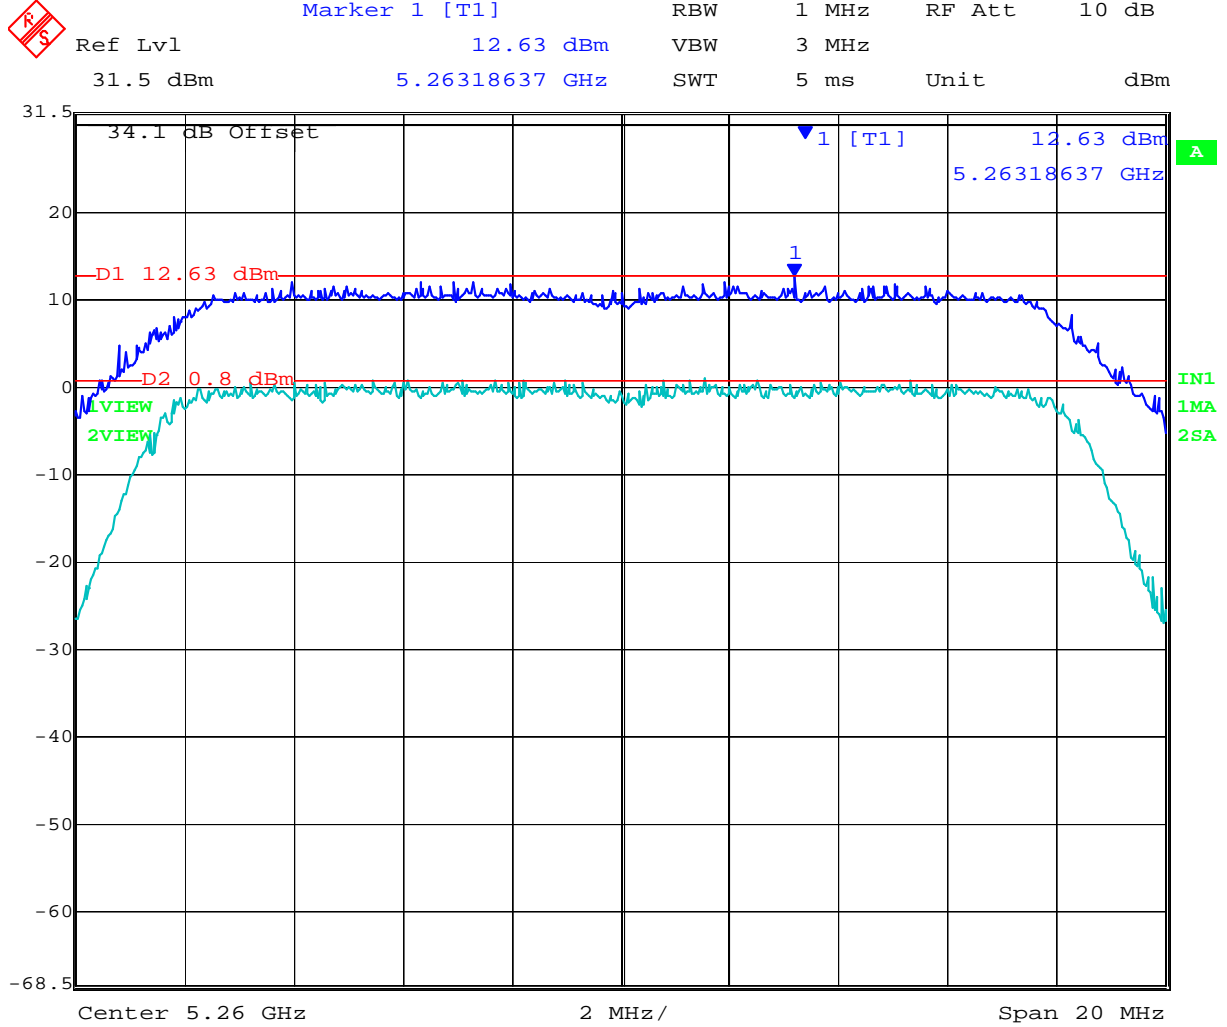


Date: 26.MAY.2006 16:32:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 15

5,320 MHz 802.11a - Peak Excursion Ratio

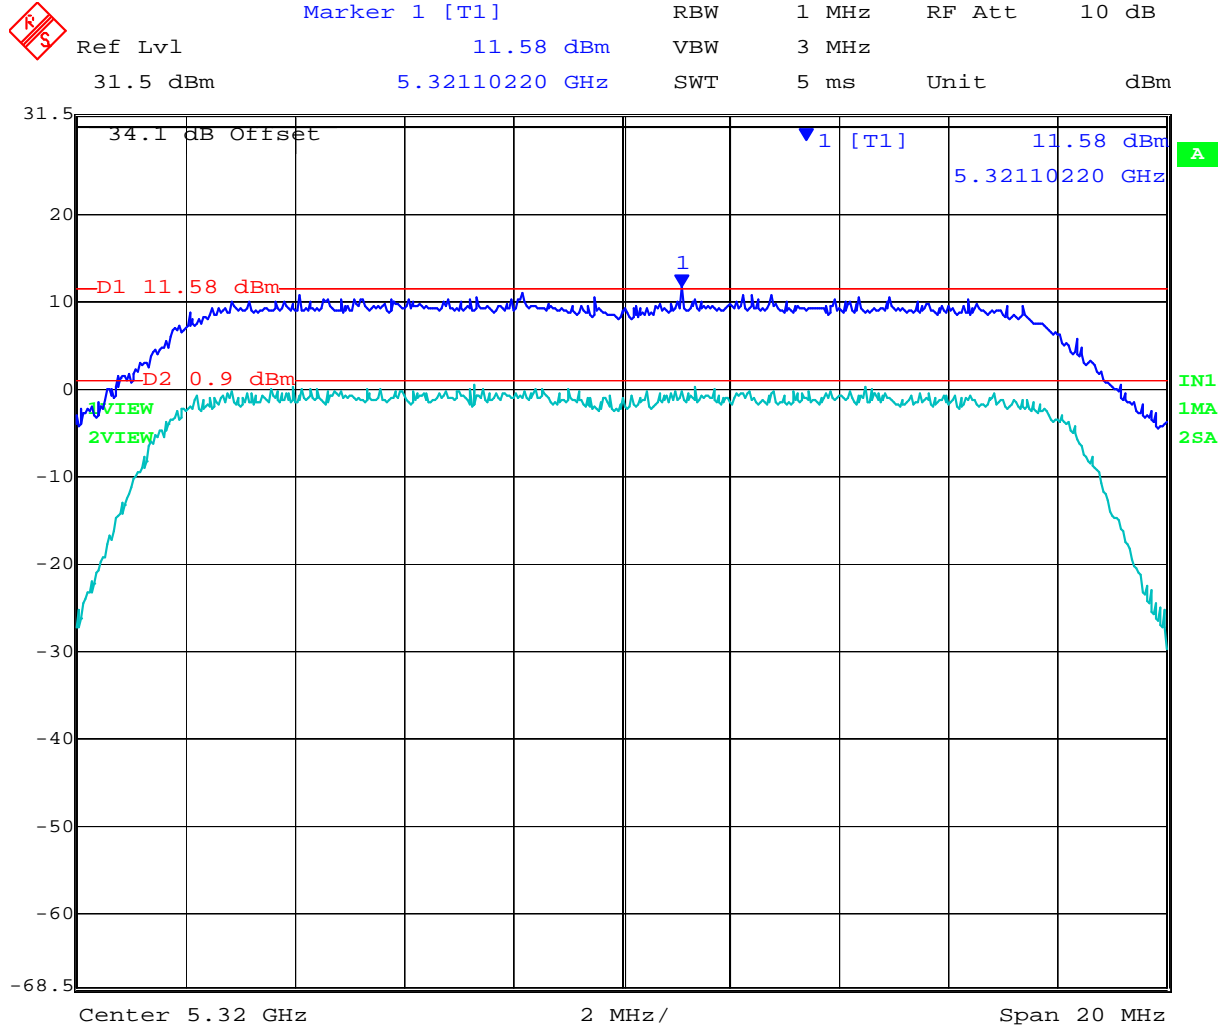

Date: 26.MAY.2006 16:30:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

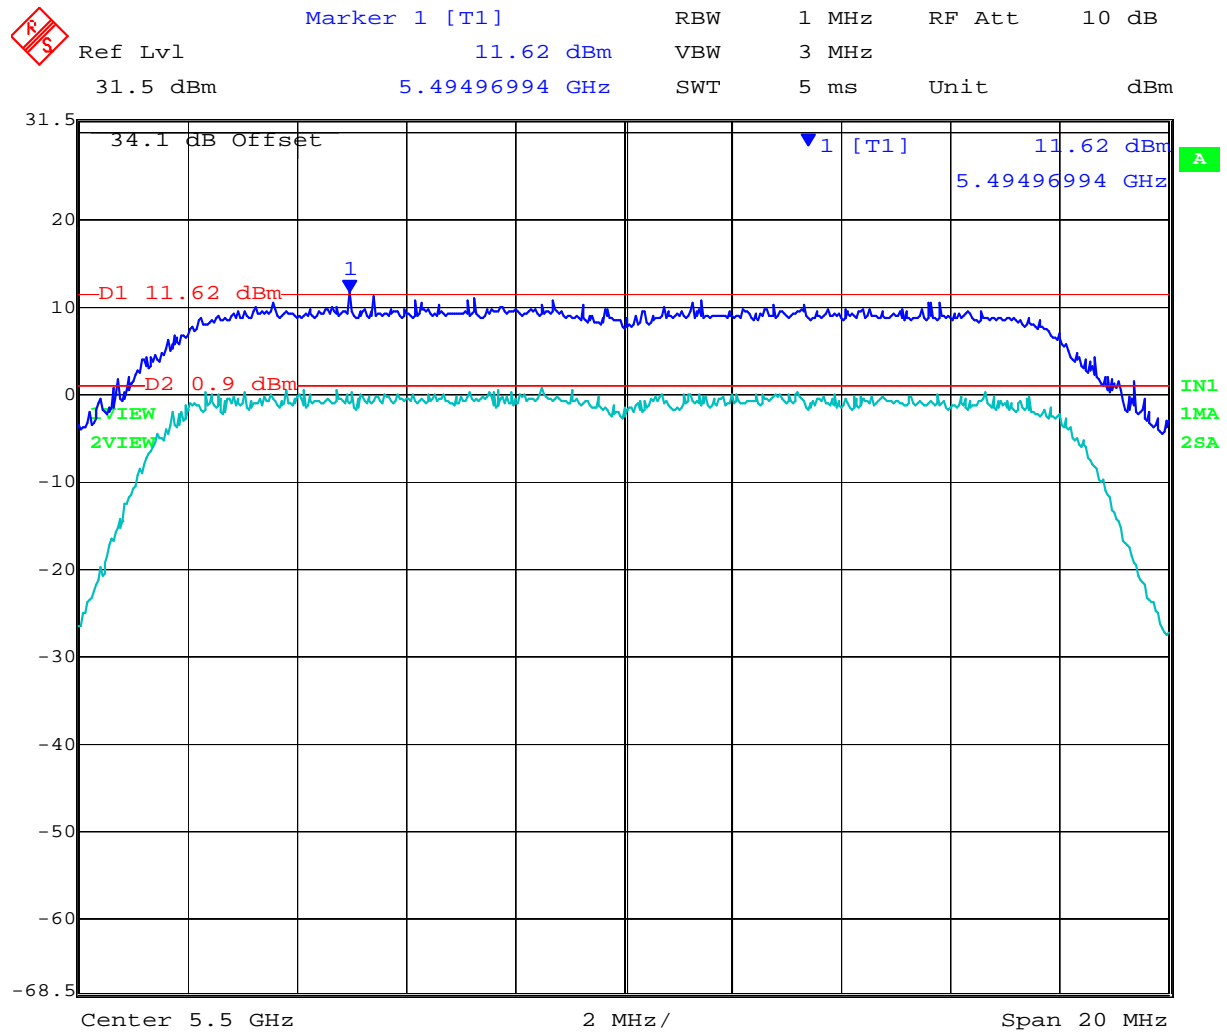


TABLE OF RESULTS – 802.11a

Centre Frequency (MHz)	Peak Excursion Ratio (dB)	Plot #
5,500	10.72	16
5,600	9.00	17
5,700	10.55	18

Plot 16

5,500 MHz 802.11a - Peak Excursion Ratio




Date: 26.MAY.2006 16:27:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 17

5,600 MHz 802.11a - Peak Excursion Ratio

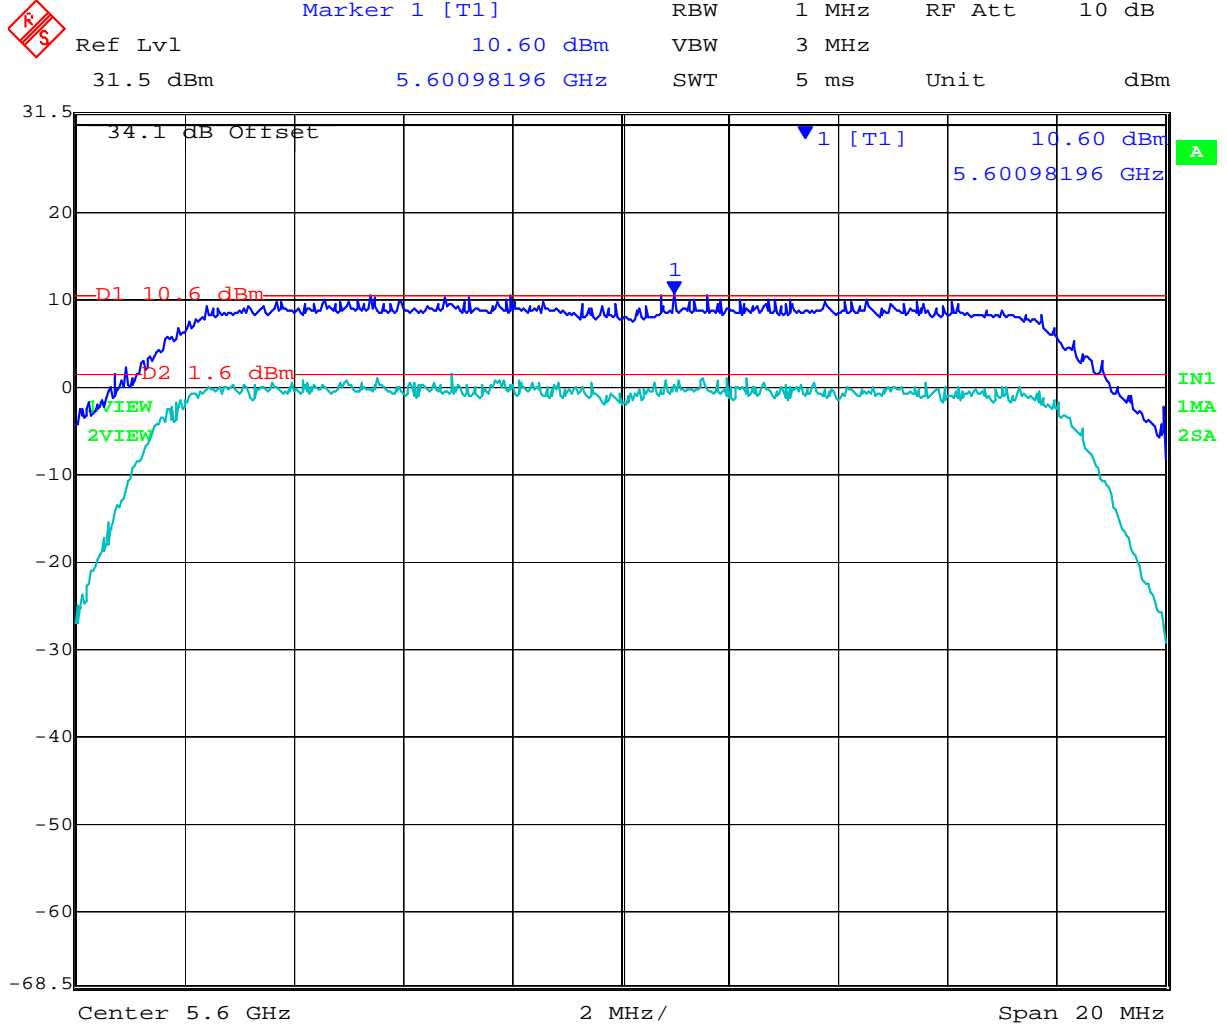


Date: 26.MAY.2006 16:25:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 18

5,700 MHz 802.11a - Peak Excursion Ratio

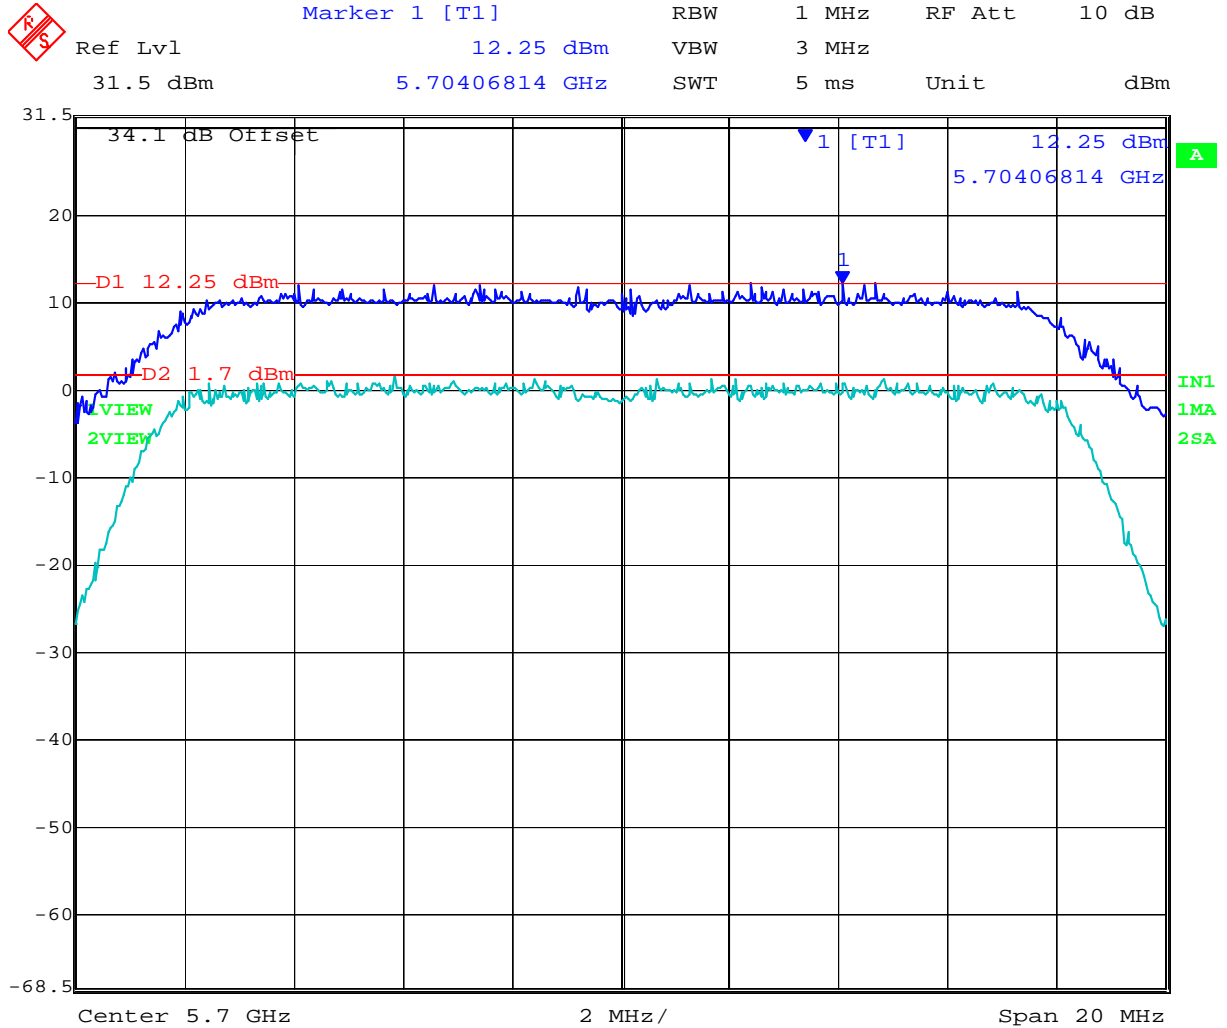

Date: 26.MAY.2006 16:23:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 43 of 107

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	$\pm 2.81\text{dB}$
-------------------------	---------------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 44 of 107

5.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 45 of 107

5.1.6. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.407(f)
Industry Canada RSS-Gen §5.5

A Specific Absorption Rate (SAR) test report is available for this 802.11a telephone device.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. Conducted Spurious Emissions


FCC, Part 15 Subpart C §15.407(b)(2)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Conducted emissions were measured at a EIRP limit of -27 dBm/MHz with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

Note: The data in this section along with the data in sections 5.1.8.1 (Transmitter Radiated Spurious emissions) and section 5.1.8.2 (Radiated Band Edge - Restricted Bands) identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit for out of band emissions.

Test Measurement Set up



Band-edge measurement test configuration

Measurement Results of Conducted Spurious Emissions

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Data Rate(s): 802.11a 12 MBit/s,

Power Level: Maximum




Conducted Band-Edge Results

TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	Band edge Frequency (MHz)	Limit (dBm/MHz)	Amplitude @ Band edge (dBm/MHz)	Plot #	Margin (dB)
5,180	5,150	-27.00	-37.00	19	-10.00
5,320	5,350	-27.00	-30.00	20	-3.00


Plot 19
Conducted Spurious Emissions at the 5,150 MHz Band Edge

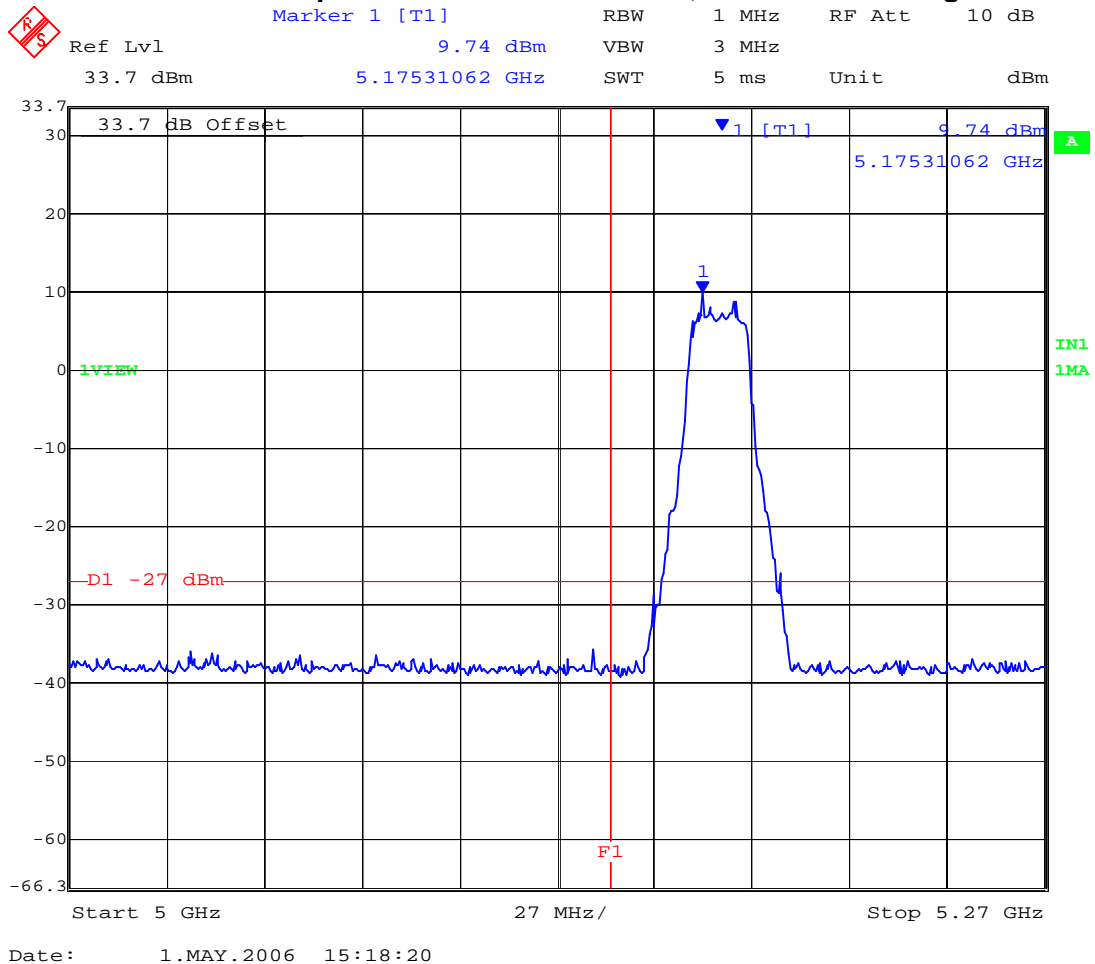

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 20
Conducted Spurious Emissions at the 5,350 MHz Band Edge

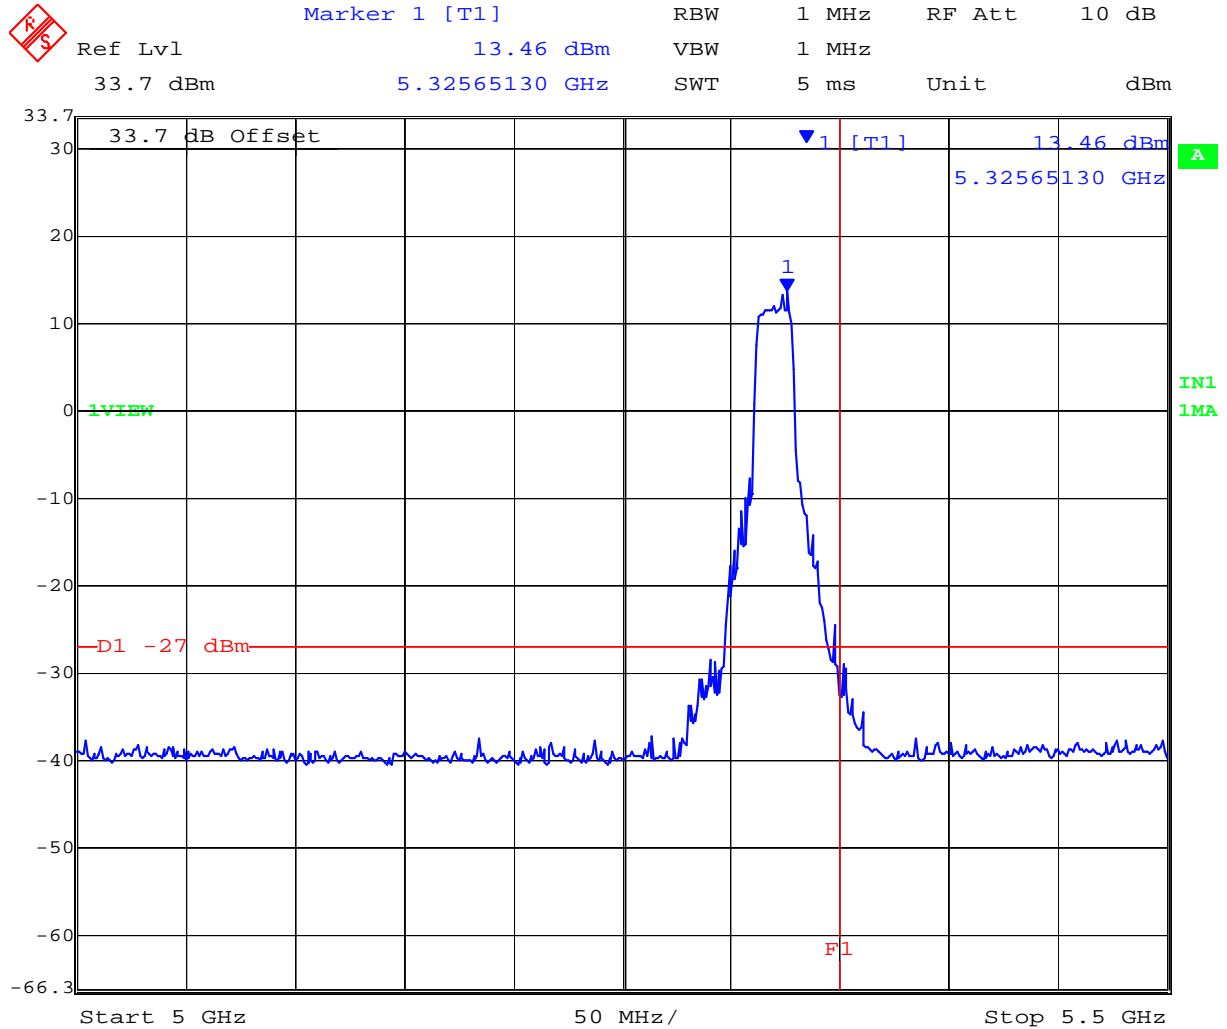

Date: 1.MAY.2006 15:27:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

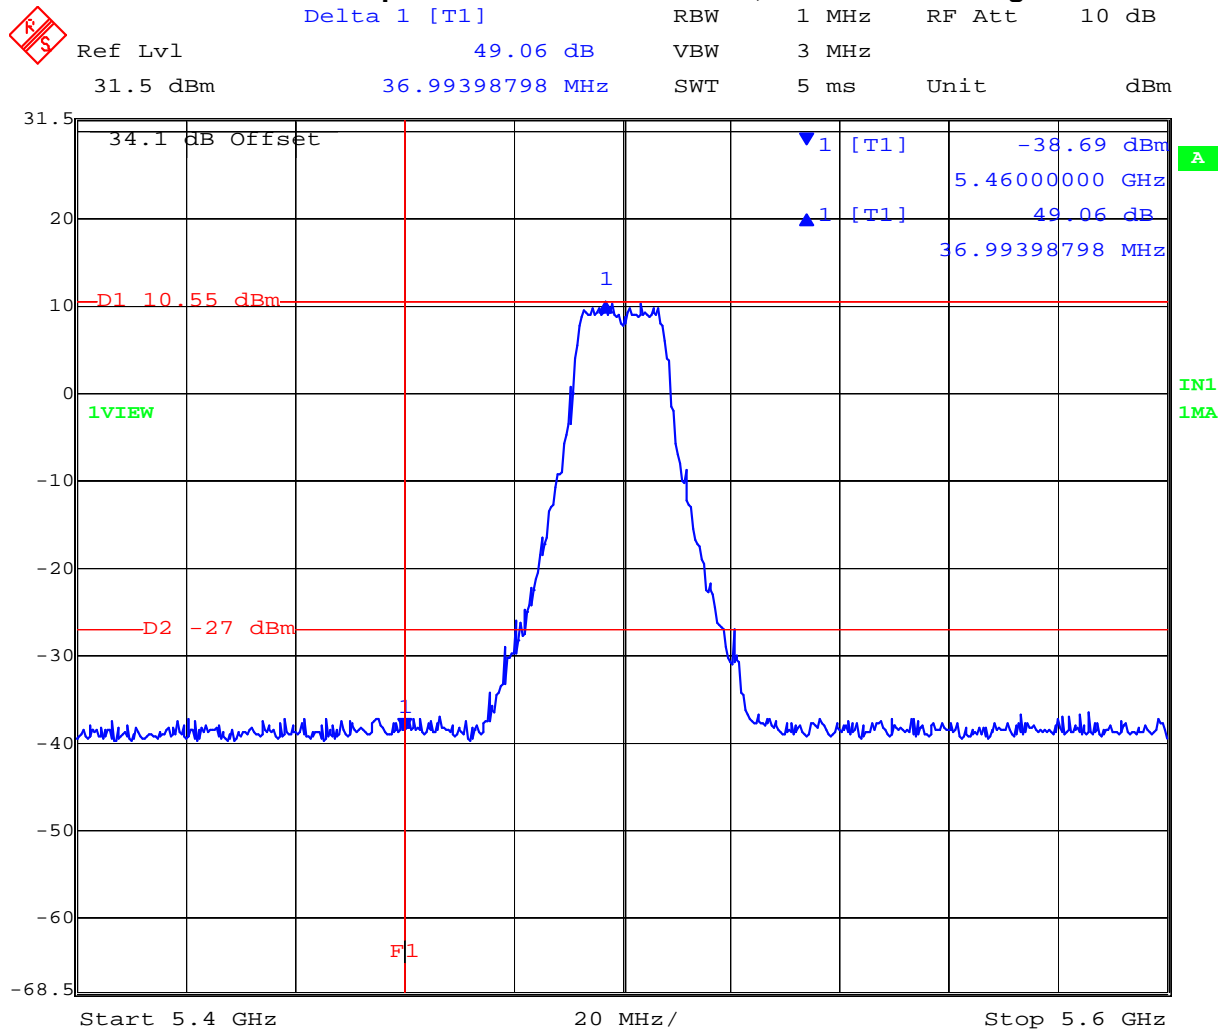


TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	Band edge Frequency (MHz)	Limit (dBm/MHz)	Amplitude @ Band edge (dBm/MHz)	Plot #	Margin (dB)
5,500	5,460	-27.00	-38.69	21	-11.69

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

Plot 21
Conducted Spurious Emissions at the 5,460 MHz Band Edge



Date: 26.MAY.2006 17:01:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Spurious Emissions (1-40 GHz)

Conducted spurious emissions (1-40 GHz) are provided indicated by the following matrix. Measurements were performed with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limit @ -27 dBm are drawn on each plot.

TABLE OF RESULTS – 802.11a

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm/MHz)	Limit (dBm/MHz)	Plot #	Margin (dB)
5,180	30	1,000	-45.47	-27.00	22	-18.47
5,180	1,000	7,000	-29.08	-27.00	23	-2.08
5,180	7,000	40,000	-42.80	-27.00	24	-15.80

Plot 22 802.11a
5,180 MHz Conducted Spurious Emissions 30 MHz to 1,000 MHz

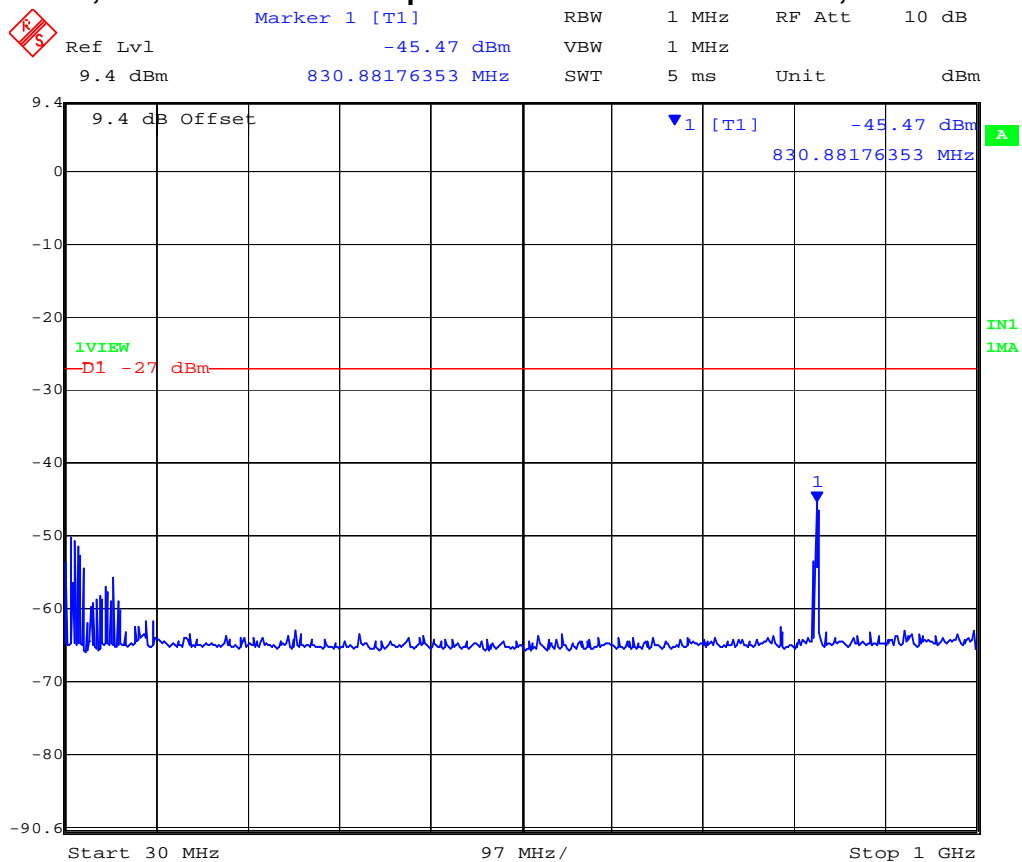


Date: 1.MAY.2006 19:10:44


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 23 802.11a
5,180 MHz Conducted Spurious Emissions 1,000 MHz to 7,000 MHz

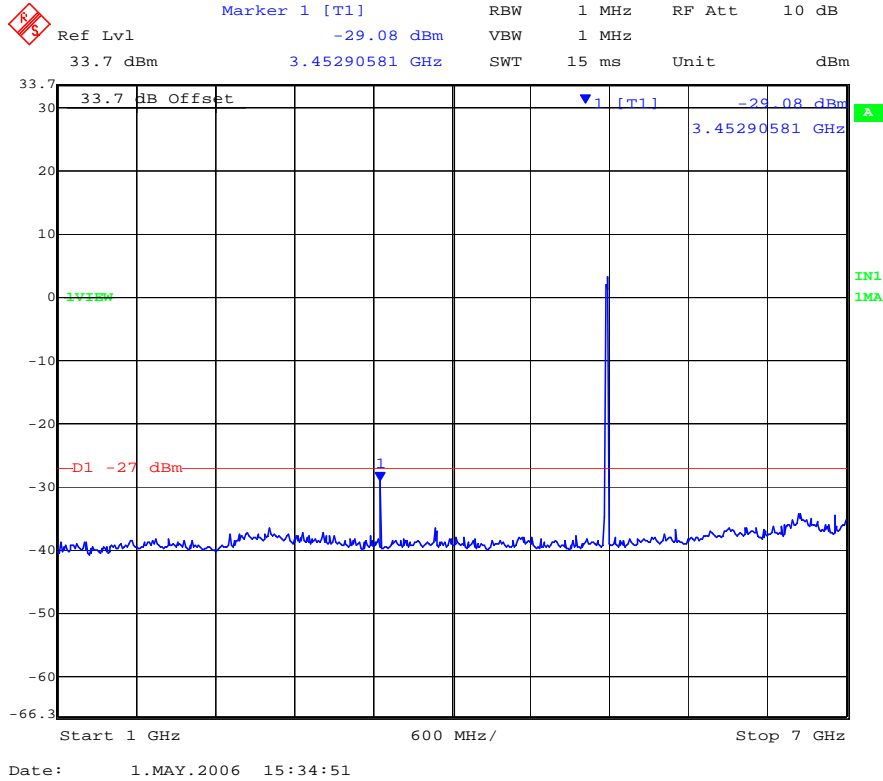

Plot 24 802.11a
5,180 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

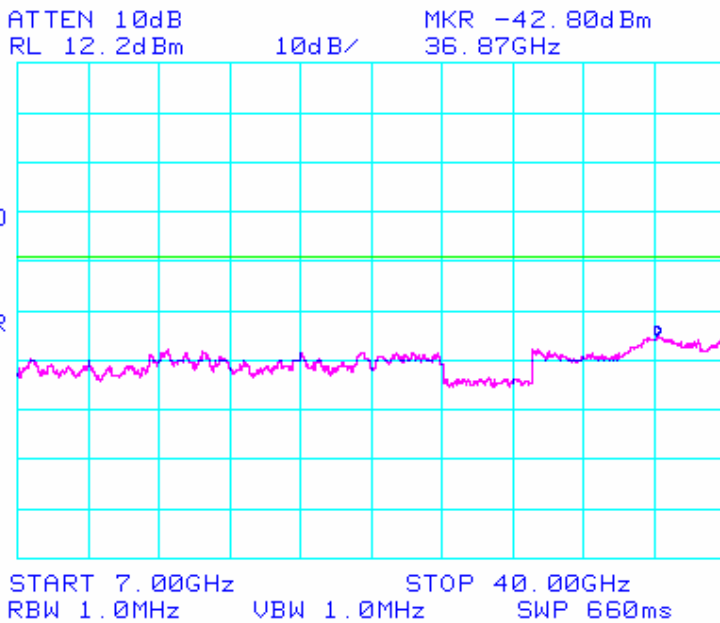


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm/MHz)	Limit (dBm/MHz)	Plot #	Margin (dB)
5,260	30	1,000	-49.14	-27.00	25	-22.14
5,260	1,000	7,000	-28.05	-27.00	26	-1.05
5,260	7,000	40,000	-40.13	-27.00	27	-13.13

Plot 25 802.11a
5,260 MHz Conducted Spurious Emissions 30 MHz to 1,000 MHz

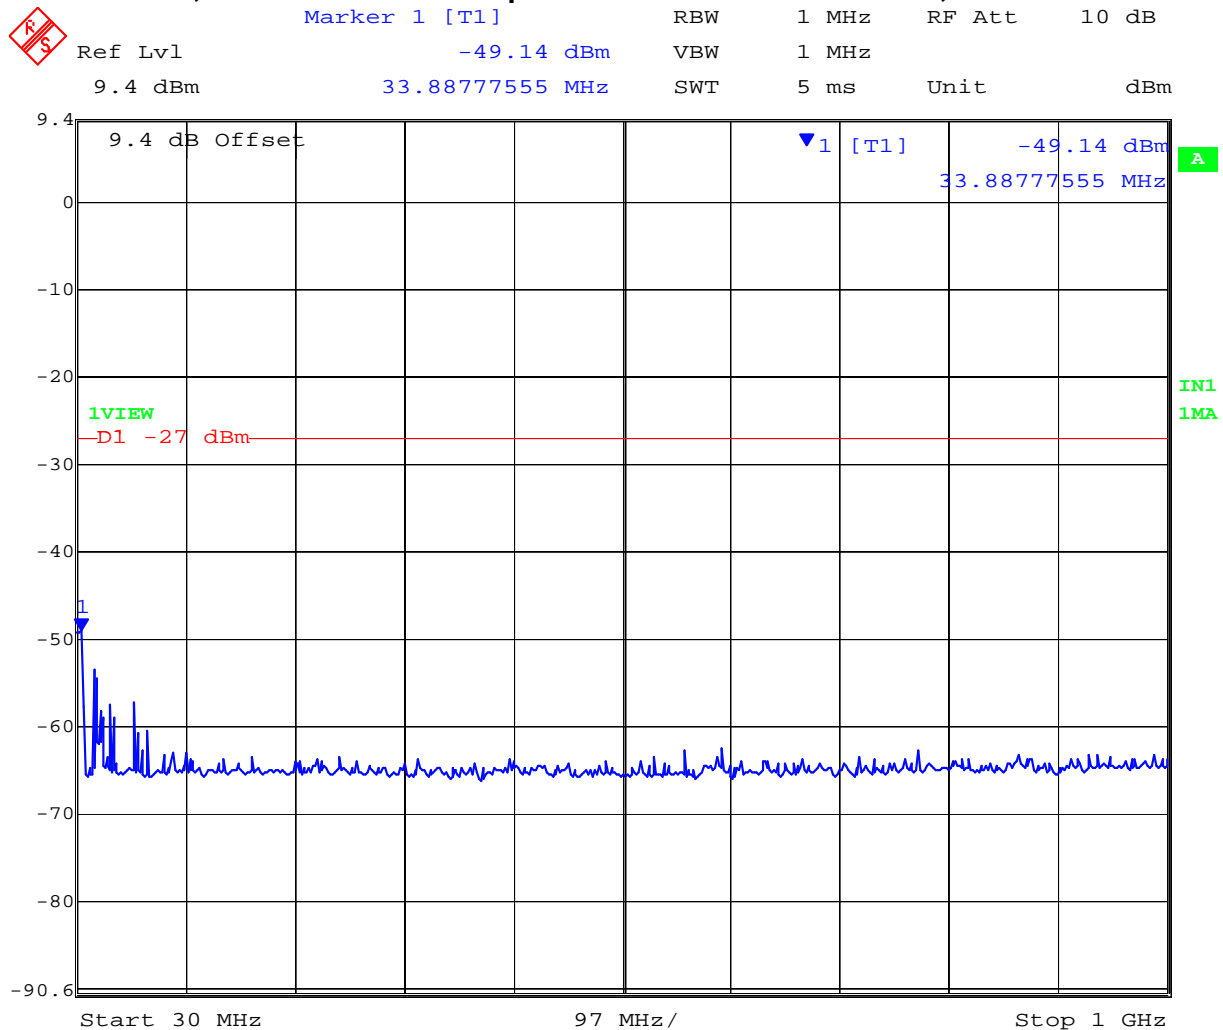


Date: 1.MAY.2006 19:15:51


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 26 802.11a
5,260 MHz Conducted Spurious Emissions 1,000 MHz to 7,000 MHz

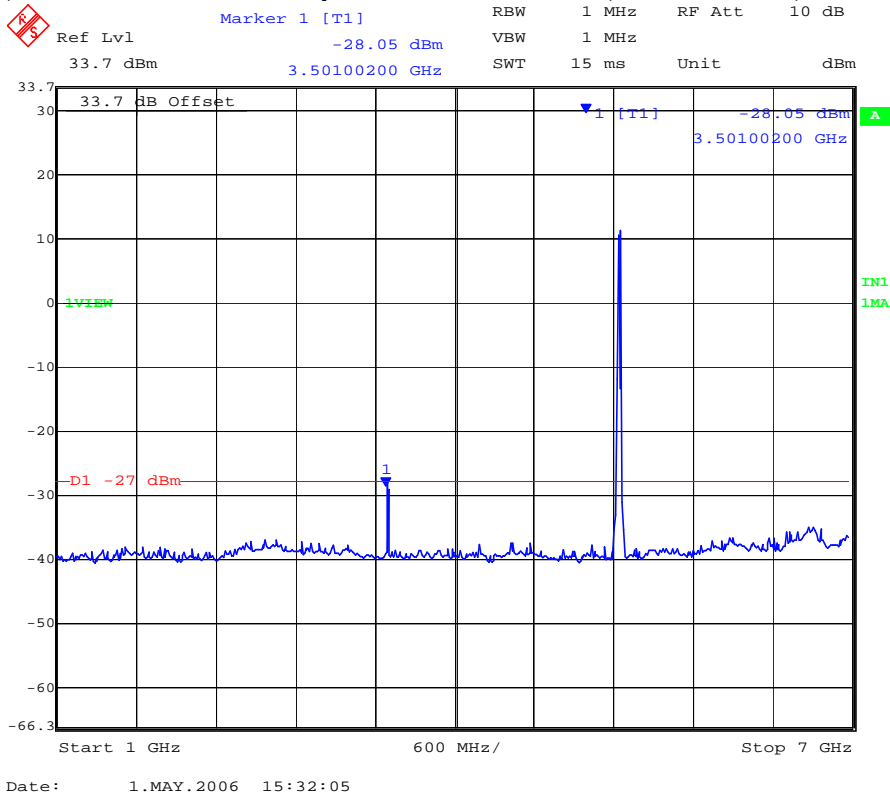

Plot 27 802.11a
5,260 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

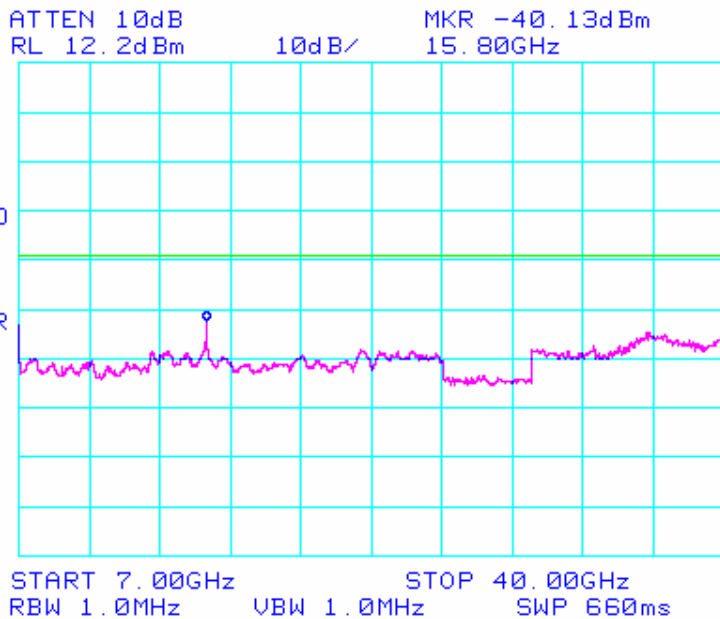


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm/MHz)	Limit (dBm/MHz)	Plot #	Margin (dB)
5,320	30	1,000	-49.39	-27.00	28	-22.39
5,320	1,000	7,000	-27.14	-27.00	29	-0.14
5,320	7,000	40,000	-35.80	-27.00	30	-8.80

Plot 28 802.11a
5,320 MHz Conducted Spurious Emissions 30 MHz to 1,000 MHz

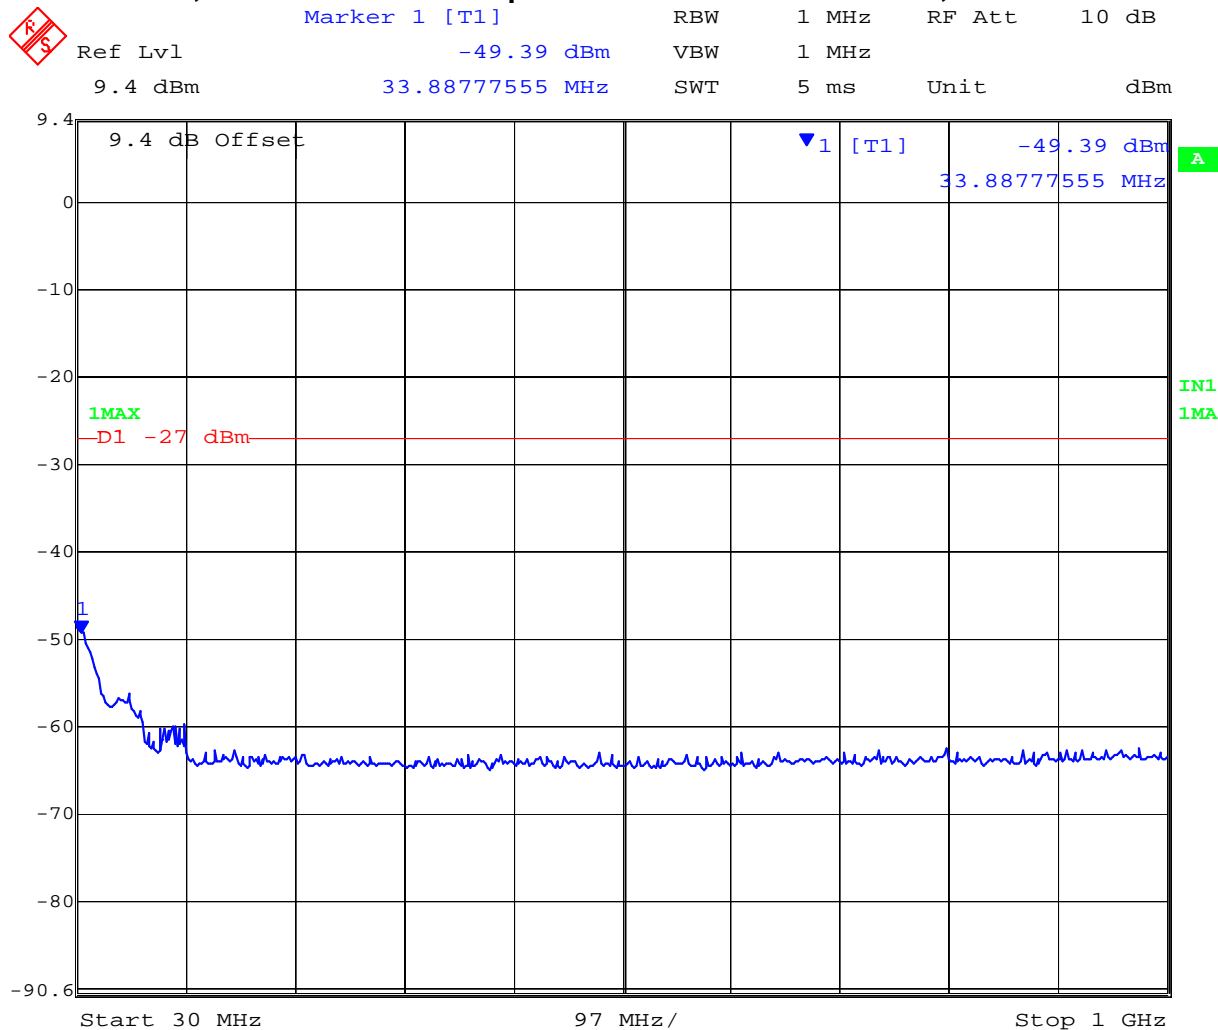


Date: 1.MAY.2006 19:24:45


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 29 802.11a
5,320 MHz Conducted Spurious Emissions 1,000 MHz to 7,000 MHz

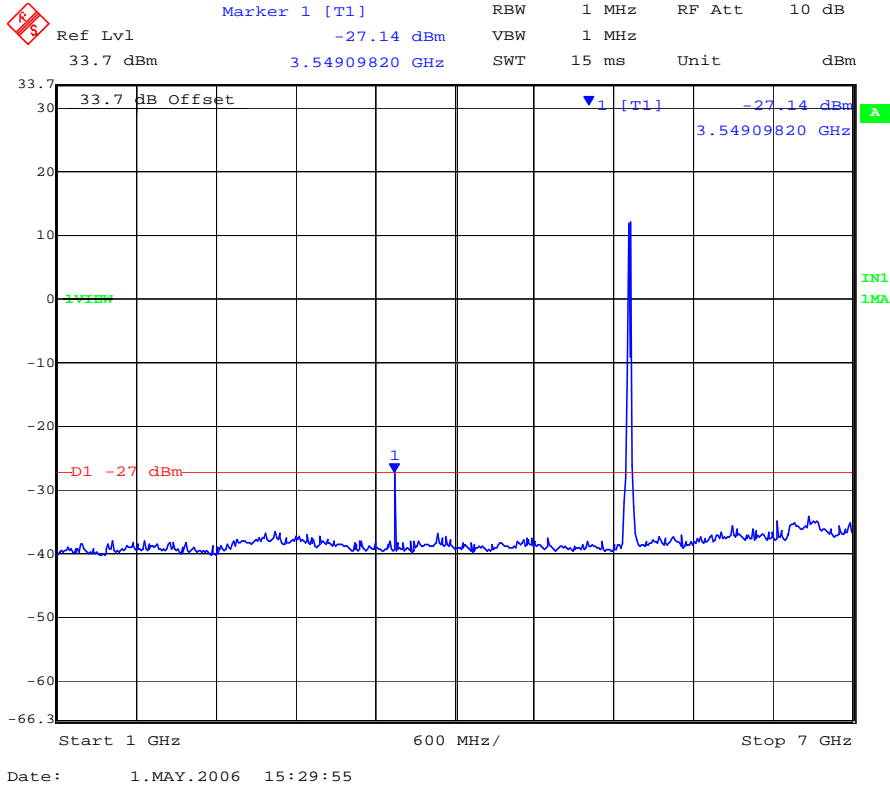

Plot 30 802.11a
5,320 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

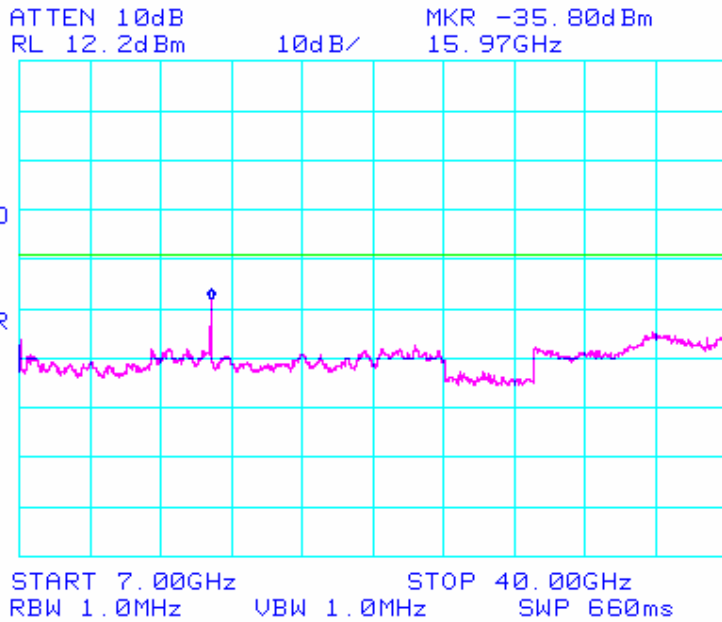


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm/MHz)	Limit (dBm/MHz)	Plot #	Margin (dB)
5,500	30	1,000	-44.59	-27.00	31	-17.59
5,500	1,000	7,000	-32.97	-27.00	32	-5.97
5,500	7,000	40,000	-40.83	-27.00	33	-13.83

Plot 31 802.11a
5,500 MHz Conducted Spurious Emissions 30 MHz to 1,000 MHz

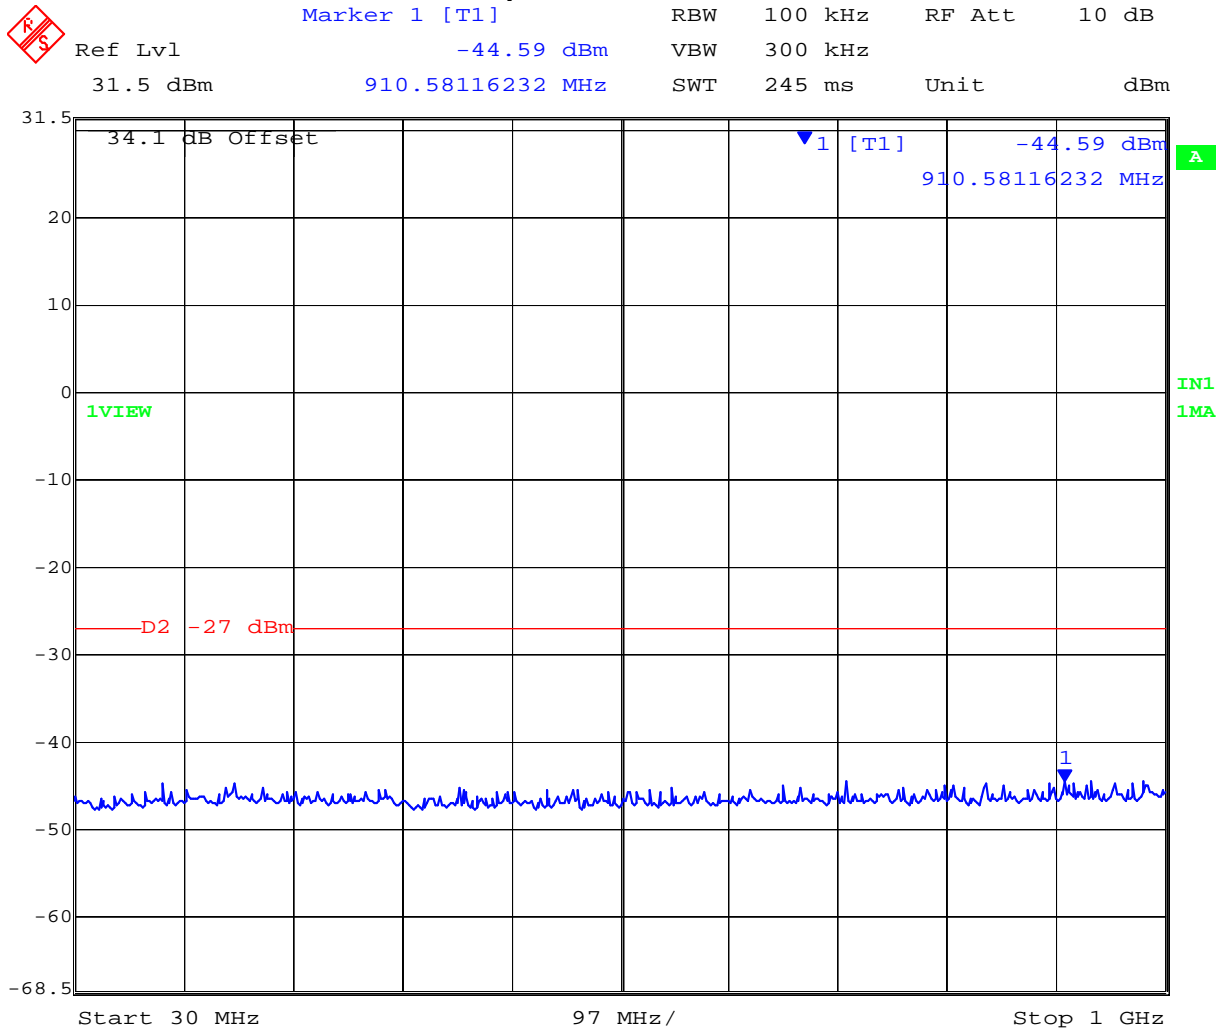


Date: 26.MAY.2006 17:07:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Plot 32 802.11a
5,500 MHz Conducted Spurious Emissions 1,000 MHz to 7,000 MHz

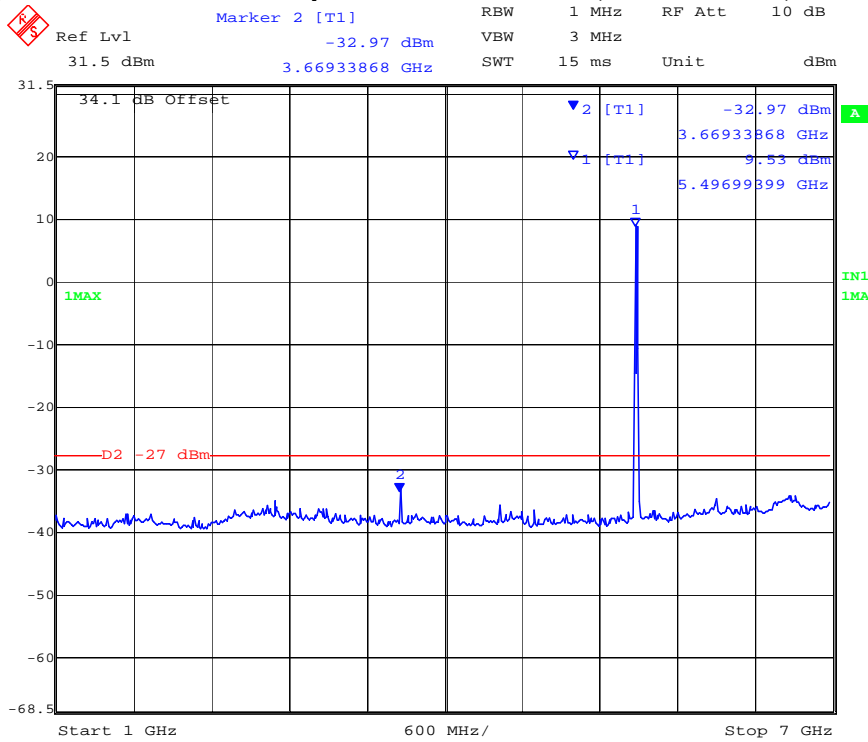

Date: 26.MAY.2006 17:02:56

Plot 33 802.11a
5,500 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

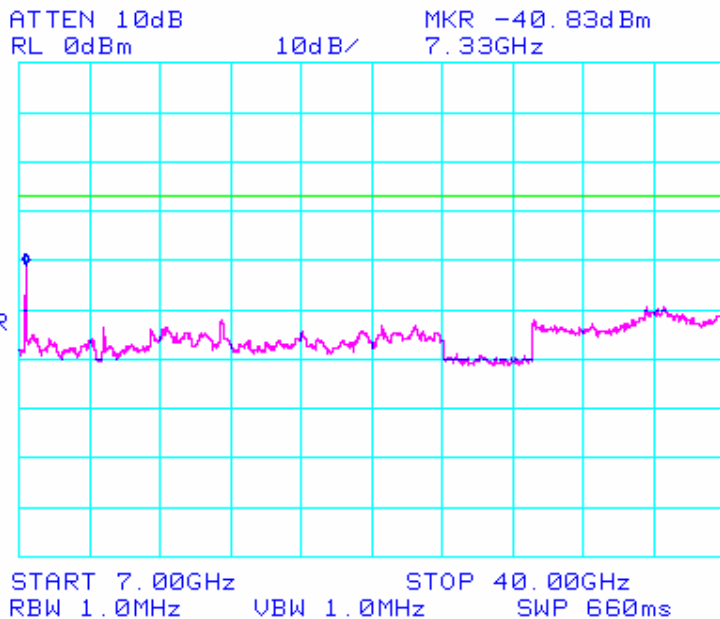


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm/MHz)	Limit (dBm/MHz)	Plot #	Margin (dB)
5,600	30	1,000	-44.59	-27.00	34	-17.59
5,600	1,000	7,000	-33.91	-27.00	35	-6.91
5,600	7,000	40,000	-49.00	-27.00	36	-22.00

Plot 34 802.11a
5,600 MHz Conducted Spurious Emissions 30 MHz to 1,000 MHz

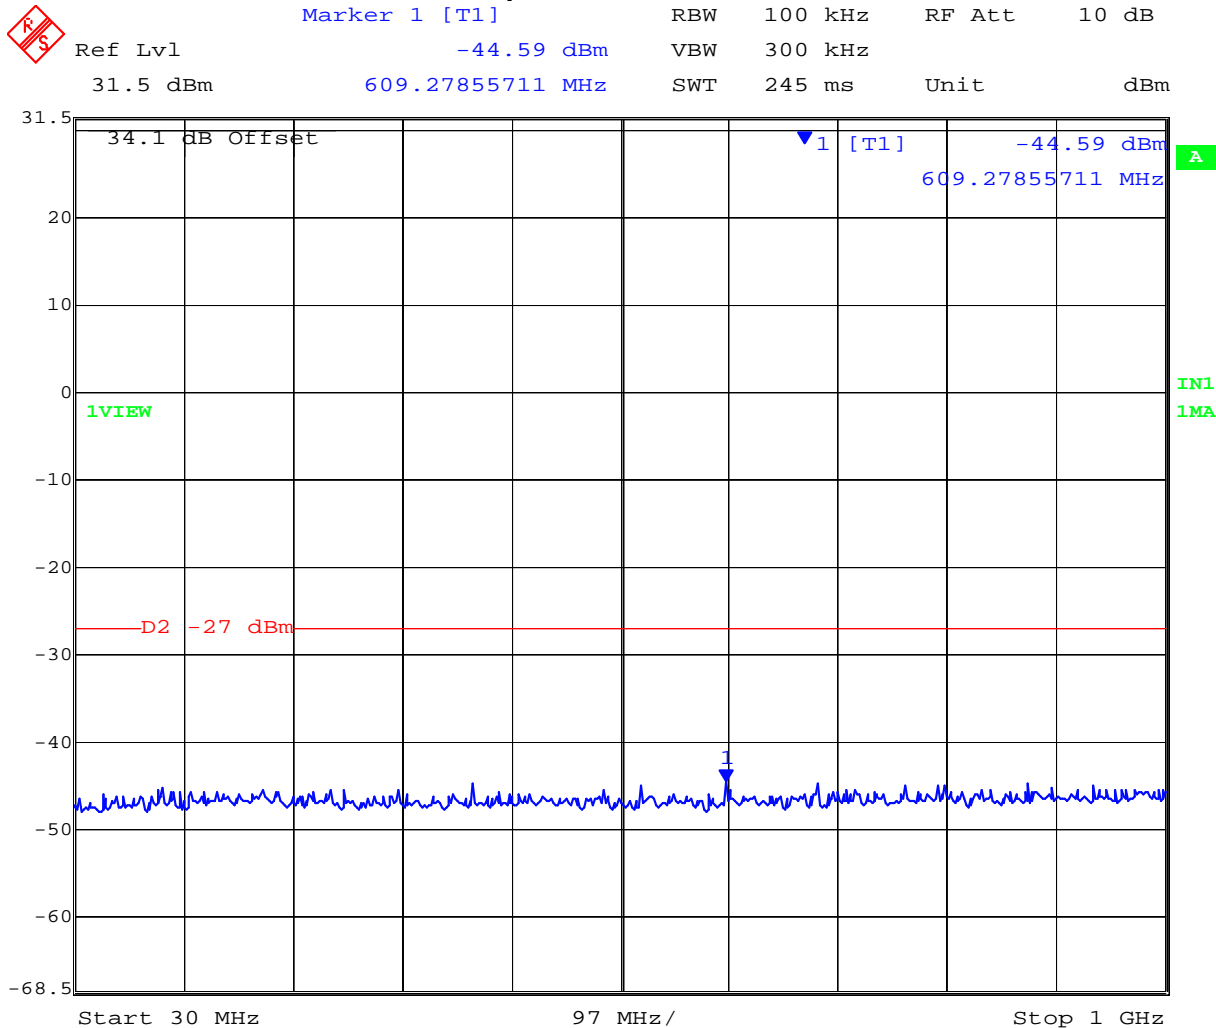


Date: 26.MAY.2006 17:09:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Plot 35 802.11a
5,600 MHz Conducted Spurious Emissions 1,000 MHz to 7,000 MHz

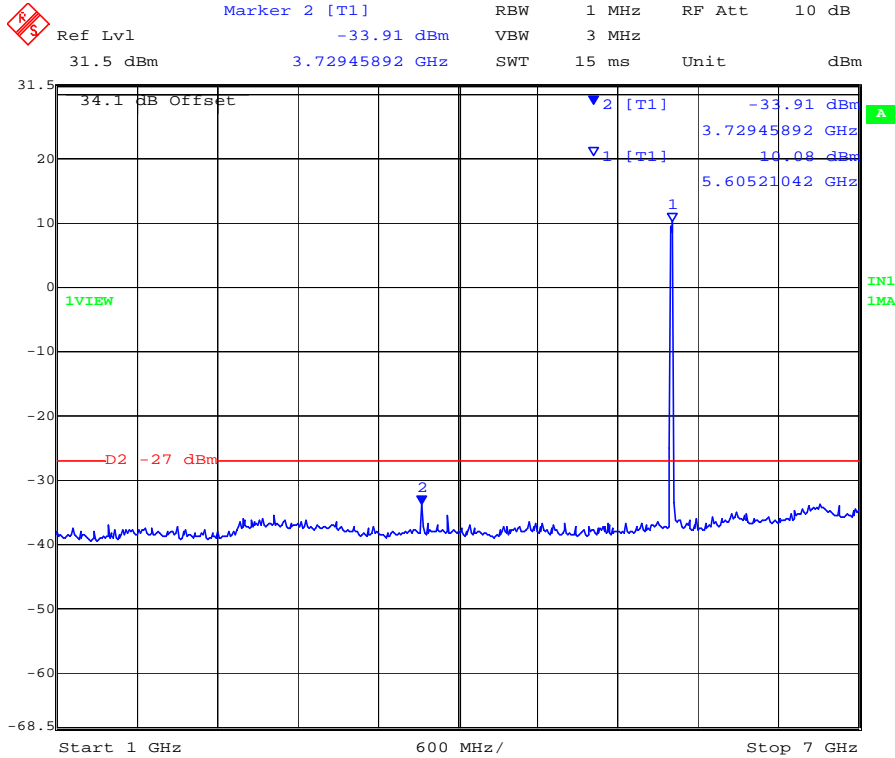

Date: 26.MAY.2006 17:04:15

Plot 36 802.11a
5,600 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

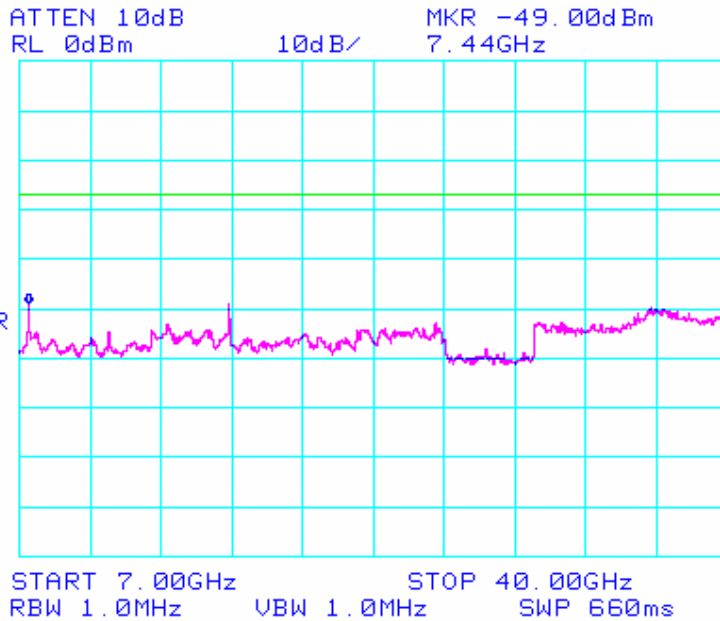


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm/MHz)	Limit (dBm/MHz)	Plot #	Margin (dB)
5,700	30	1,000	-44.18	-27.00	37	-17.18
5,700	1,000	7,000	-33.57	-27.00	38	-6.57
5,700	7,000	40,000	-49.67	-27.00	39	-22.67

Plot 37 802.11a
5,700 MHz Conducted Spurious Emissions 30 MHz to 1,000 MHz

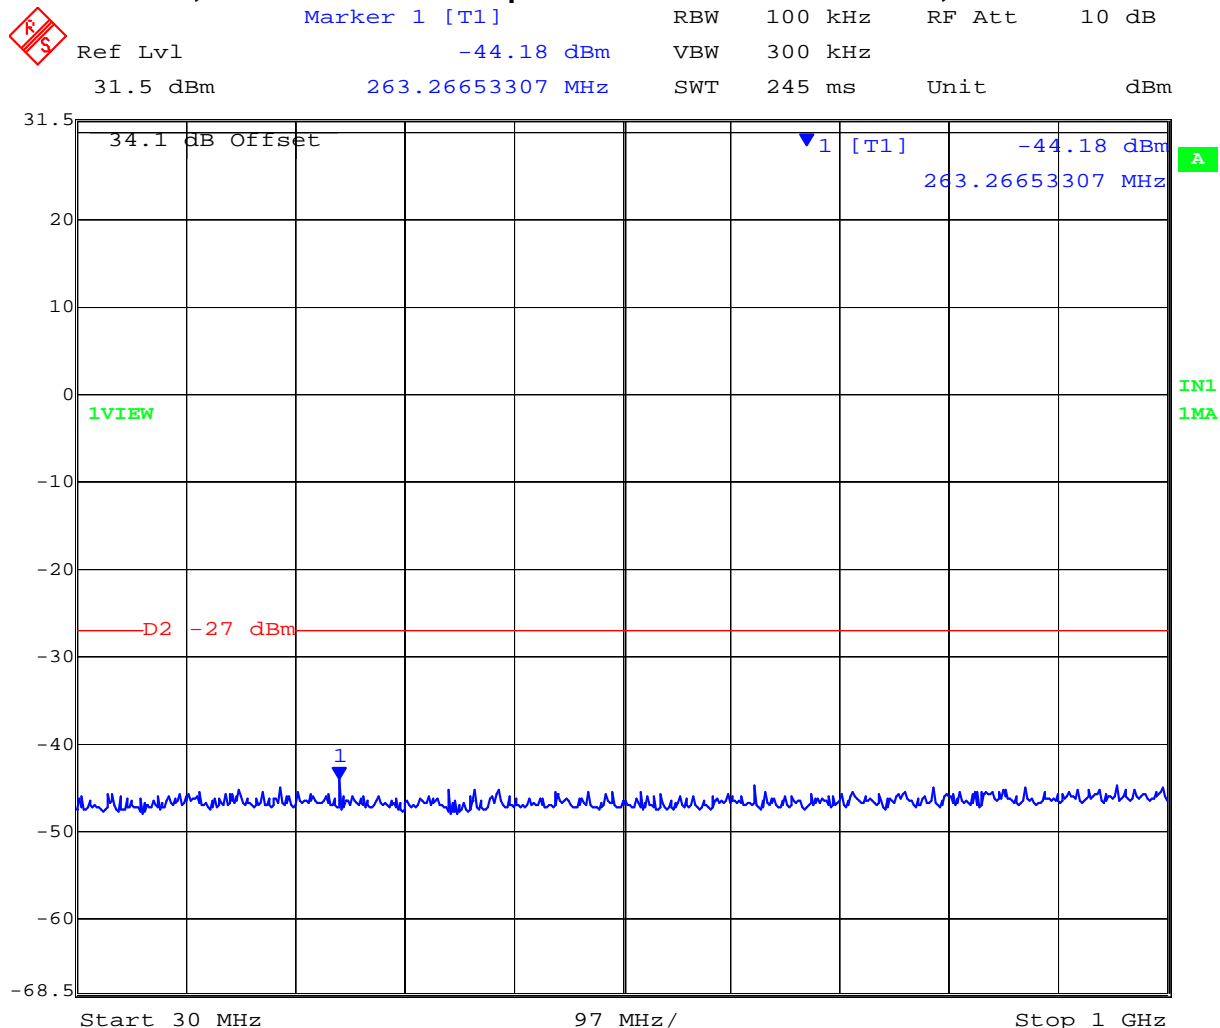


Date: 26.MAY.2006 17:09:58


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 38 802.11a
5,700 MHz Conducted Spurious Emissions 1,000 MHz to 7,000 MHz

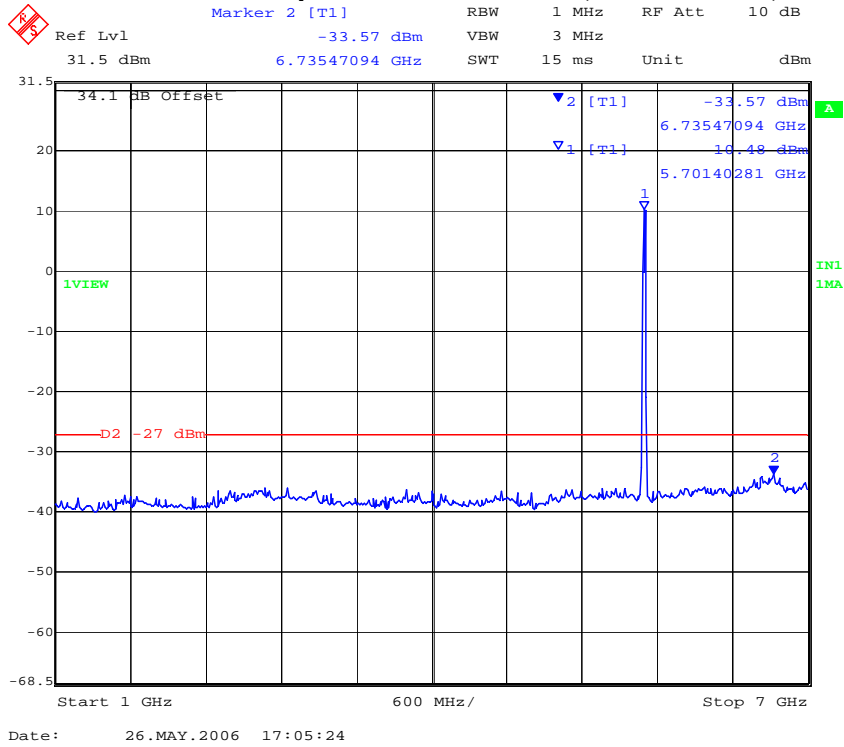

Plot 39 802.11a
5,700 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

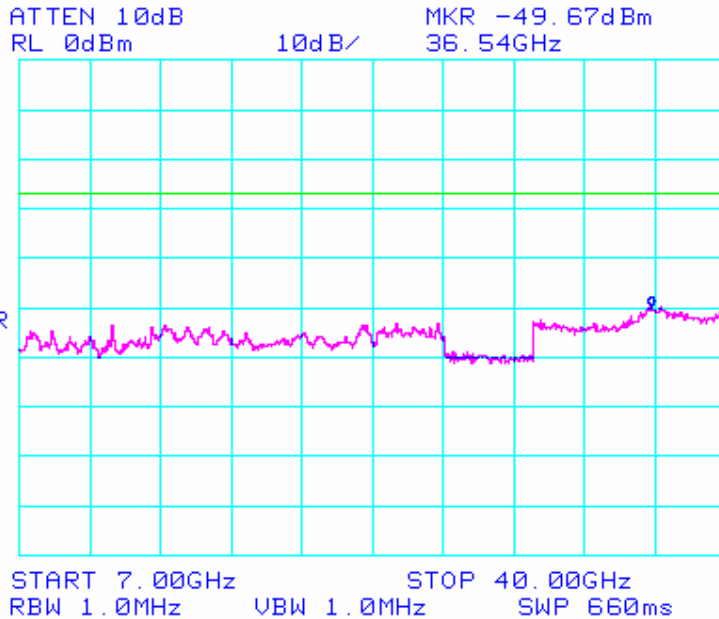

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p.

Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of -27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.8. Radiated Emissions

5.1.8.1. Transmitter Radiated Spurious Emissions (above 1 GHz)


FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

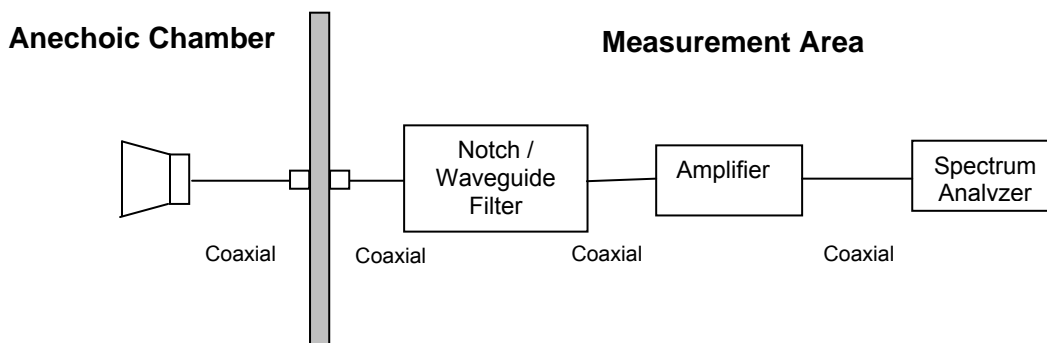

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength;

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m, where P is the EIRP in Watts}$$

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dB}\mu\text{V/m}$$

Note: The data in this Section along with the data in sections 5.1.7 (Conducted Spurious Emissions) and Section 5.1.8.2 (Radiated Band Edge - Restricted Bands) identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit for out of band emissions.

Maximum Emissions

It was found that the phone lying flat on the polystyrene table was the worst case orientation for radiated emissions.



Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar
 Duty cycle correction factor (20* Log (x) where x = duty cycle has been included in column
 'Correction Factor' for Average Field Strength measurements


TABLE OF RESULTS – 802.11a 5,180 MHz Radiated Emissions above 1 GHz

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Peak Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
					74	

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
					54	

No emissions observed within 6 dB of the limit

**Plot 40
Radiated Emissions for 5,180 MHz**

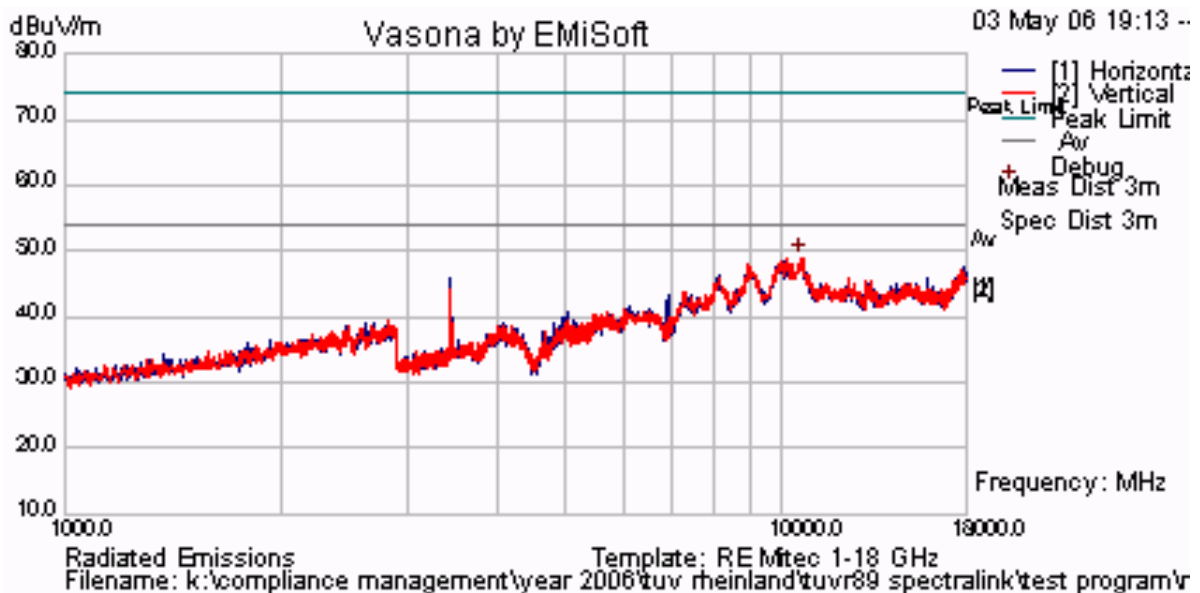

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

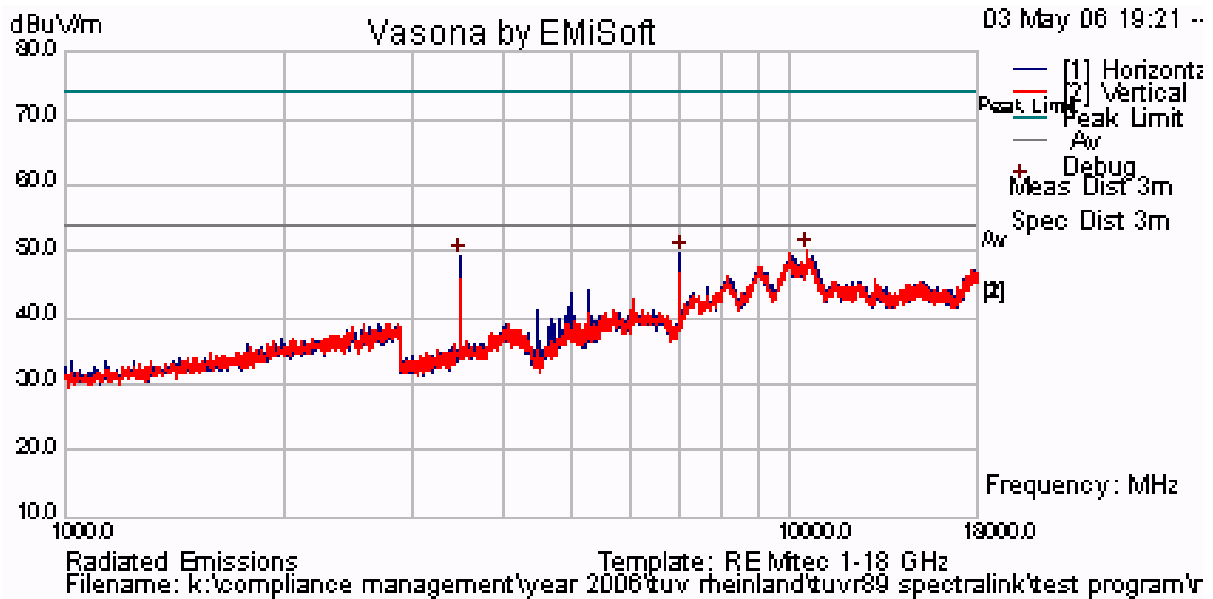


TABLE OF RESULTS – 802.11a 5,260 MHz Radiated Emissions above 1 GHz

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Average Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
3509.667	H	57.00	-7.82	49.18	54	-4.82
7026.667	H	49.17	+0.52	49.69	54	-4.31
10526.670	V	40.67	+9.33	50.00	54	-4.00

As no peak emission were greater that the Average Limit (54 dB μ V/m) peak emissions are reported in the above matrix

**Plot 41
Radiated Emissions for 5,260 MHz**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

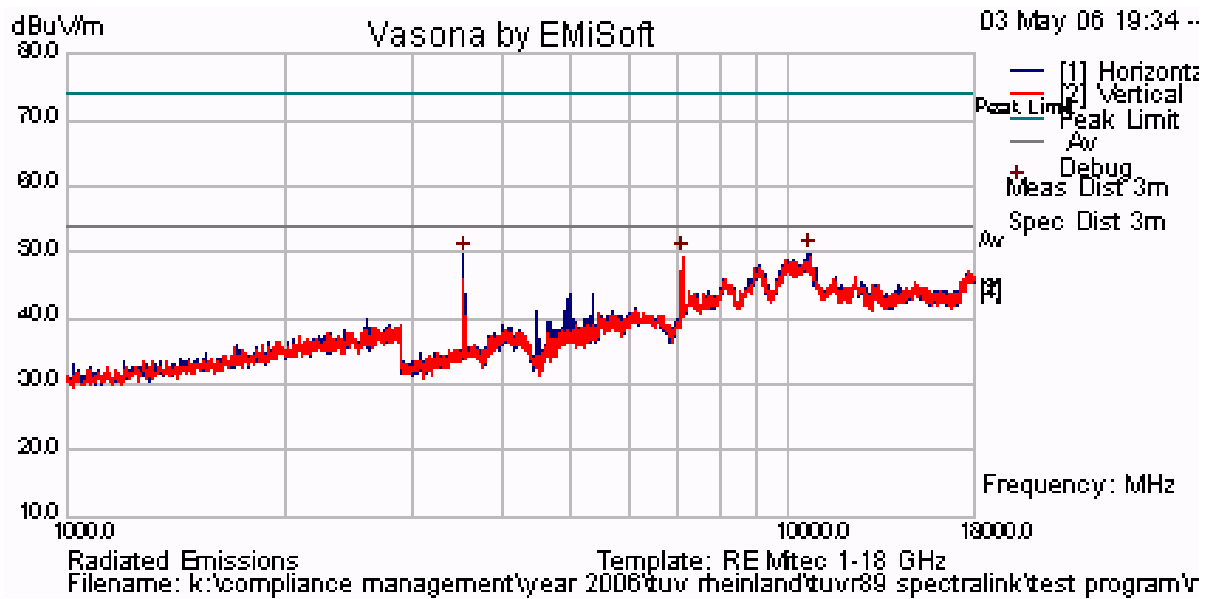


TABLE OF RESULTS – 802.11a 5,320 MHz Radiated Emissions above 1 GHz

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
3551.000	H	57.17	-7.61	49.56	54	-4.44
7108.333	V	48.50	+0.96	49.46	54	-4.54
10666.670	H	41.00	+8.90	49.90	54	-4.10

As no peak emission were greater that the Average Limit (54 dB μ V/m) peak emissions are reported in the above matrix

Plot 42
Radiated Emissions for 5,320 MHz



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

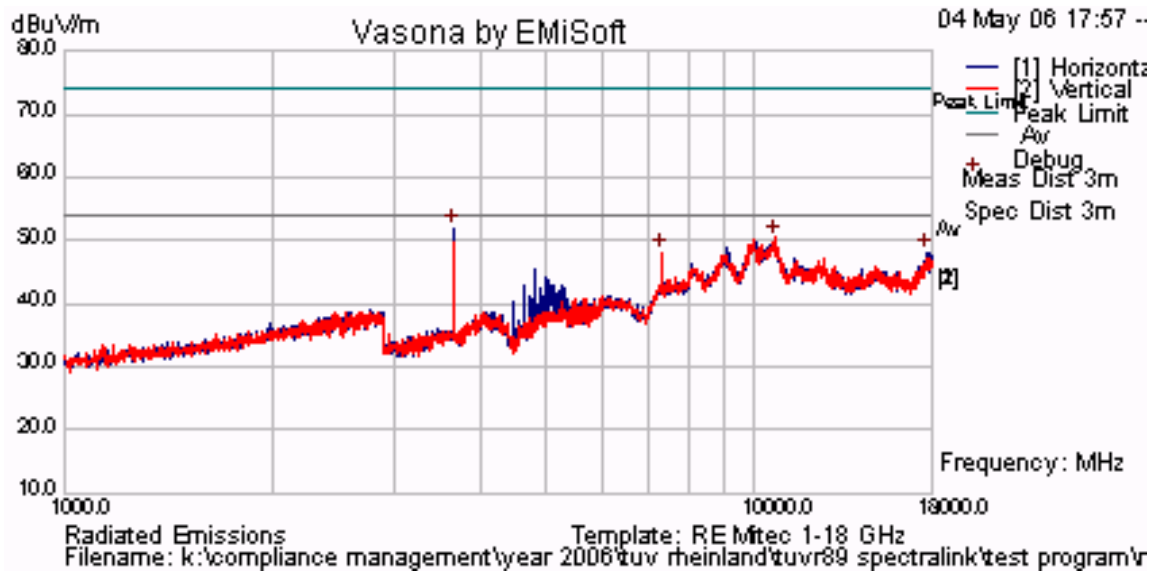


TABLE OF RESULTS – 802.11a 5,500 MHz Radiated Emissions above 1 GHz

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
3669.833	H	59.17	-7.20	51.97	54	-2.03
7341.667	V	46.34	+1.72	48.06	54	-5.94
10666.67	V	41.67	+9.00	50.57	54	-3.43
17741.67	H	36.00	+12.19	48.19	54	-5.81

As no peak emission were greater that the Average Limit (54 dB μ V/m) peak emissions are reported in the above matrix

**Plot 43
Radiated Emissions for 5,500 MHz**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

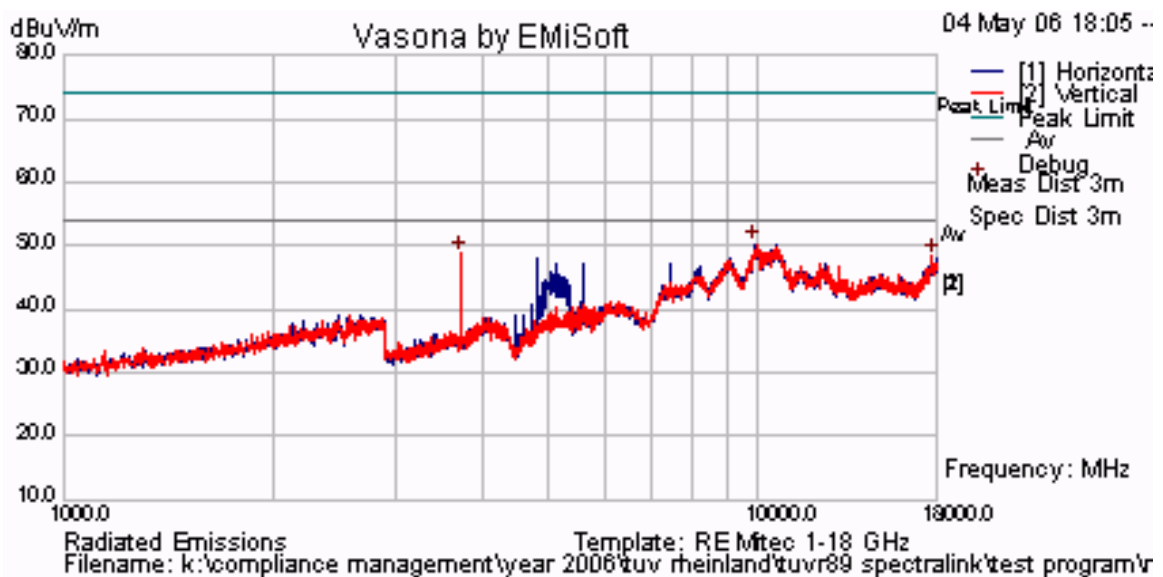


TABLE OF RESULTS – 802.11a 5,600 MHz Radiated Emissions above 1 GHz

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
3737.000	V	55.67	-6.97	48.70	54	-5.30
9873.333	H	40.00	+10.20	50.20	54	-3.80
17775.000	V	36.00	+12.32	48.32	54	-5.68

As no peak emission were greater that the Average Limit (54 dB μ V/m) peak emissions are reported in the above matrix

**Plot 44
Radiated Emissions for 5,600 MHz**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

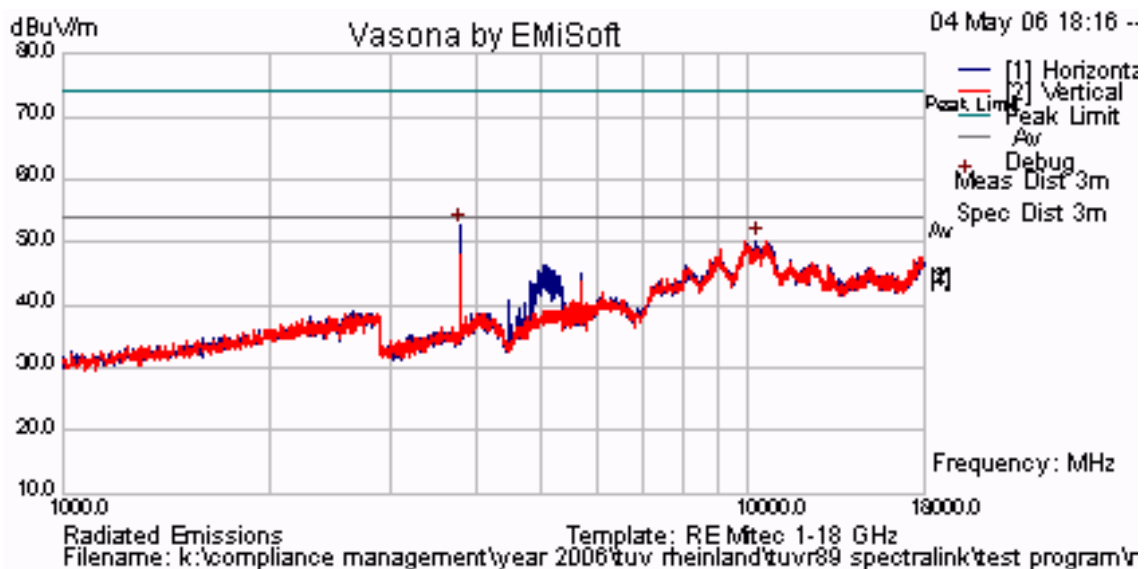


TABLE OF RESULTS – 802.11a 5,700 MHz Radiated Emissions above 1 GHz

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
3804.167	H	59.34	-6.77	52.57	54	-1.43
10270.000	H	40.17	+10.09	50.26	54	-3.74

As no peak emission were greater that the Average Limit (54 dB μ V/m) peak emissions are reported in the above matrix

**Plot 45
Radiated Emissions for 5,700 MHz**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




5.1.8.2. Radiated Band-Edge – Restricted Bands

Lower sub-band 5,150 MHz to 5,350 MHz

TABLE OF RESULTS - 802.11a

Tx Freq. (MHz)	Restricted Band Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Plot #
5,180 _{PEAK}	5,150	42.03	74.00	-31.97	46
5,180 _{Ave}	5,150	37.78	54.00	-16.22	46

**Plot 46 802.11a – 5,180 MHz
Lower Band Edge Peak Emission = 100.34 dBuV/m**

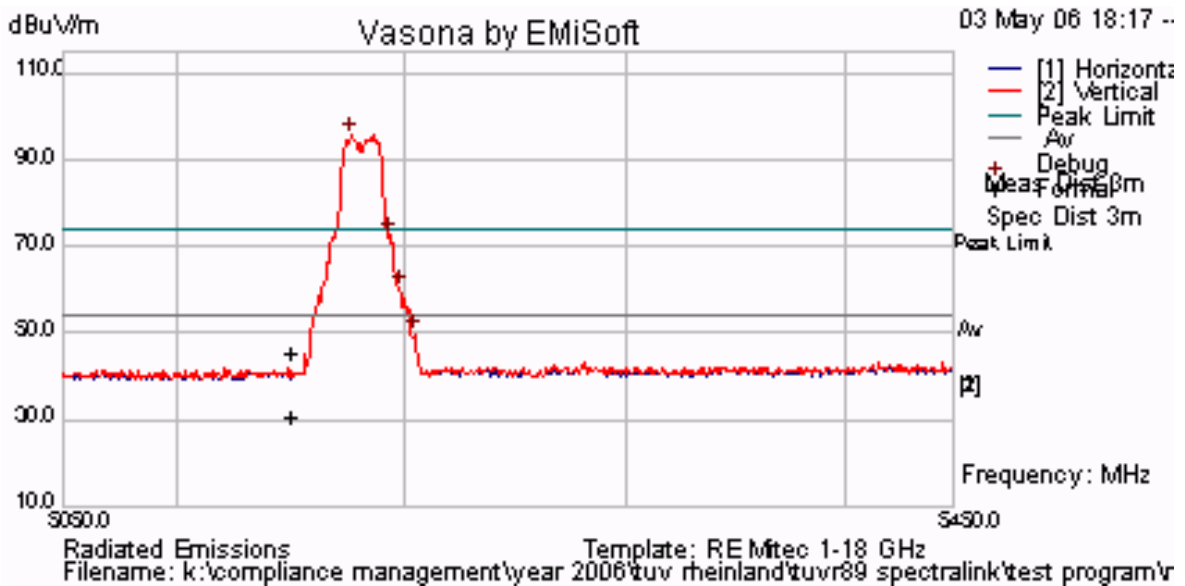


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS - 802.11a

Tx Freq. (MHz)	Restricted Band Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Plot #
5,320 _{PEAK}	5,350	48.05	74.00	-25.95	47
5,320 _{AVE}	5,350	39.43	54.00	-14.57	47

Plot 47 802.11a – 5,320 MHz
Upper Band Edge Peak Emission = 102.50 dBuV/m

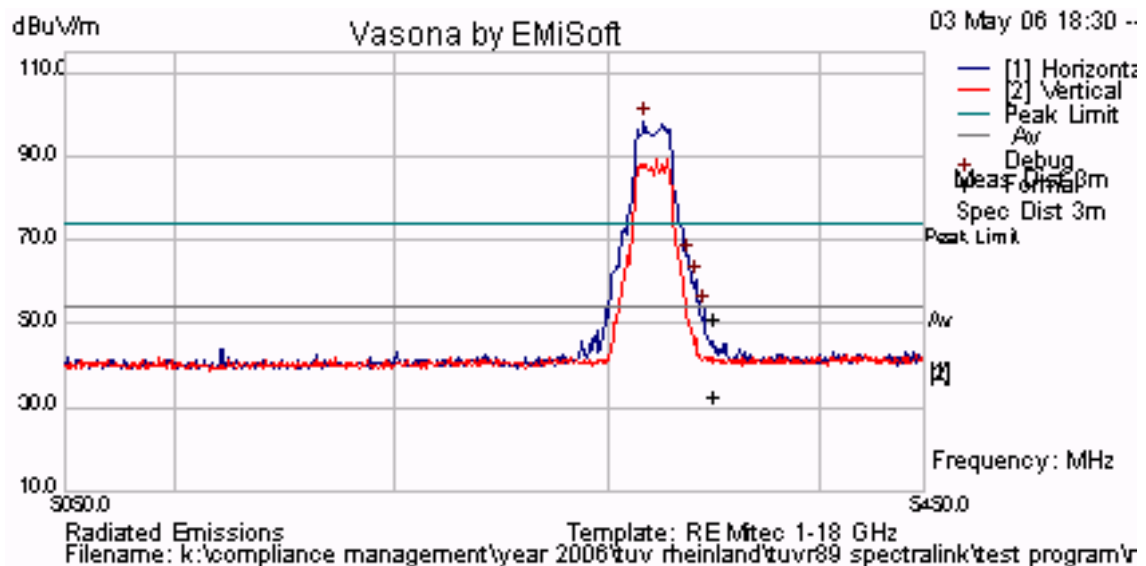

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Lower sub-band 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11a

Tx Freq. (MHz)	Restricted Band Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Plot #
5,500 _{PEAK}	5,460	44.54	74.00	-29.46	48
5,500 _{Ave}	5,460	39.26	54.00	-14.74	48

Plot 48 802.11a – 5,500 MHz
Lower Band Edge Peak Emission = 101.83 dBμV/m

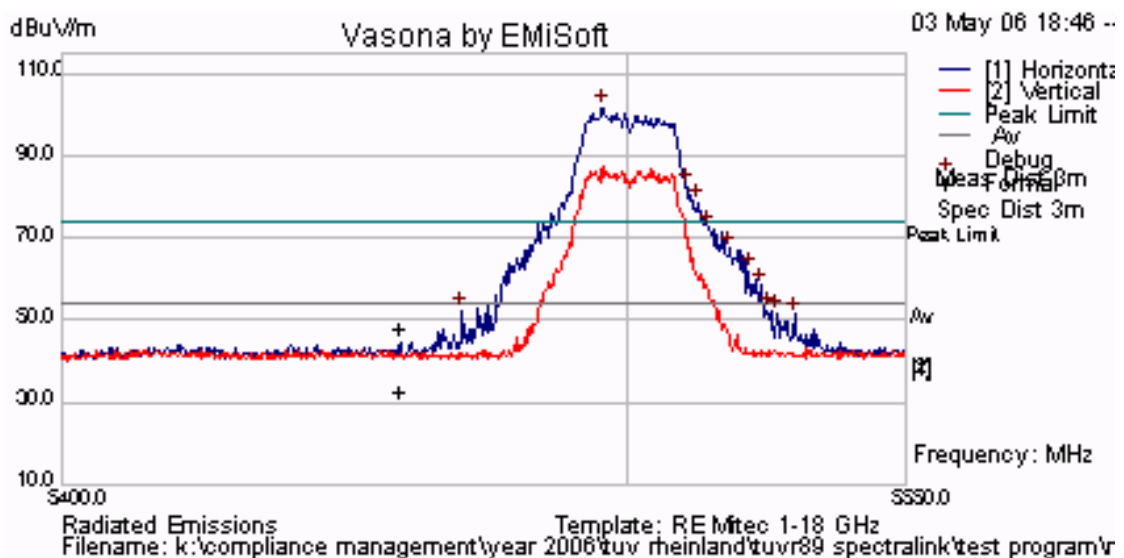

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

5.1.8.3. Receiver Spurious Emissions above 1 GHz


Industry Canada RSS-Gen §4.8, §6

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

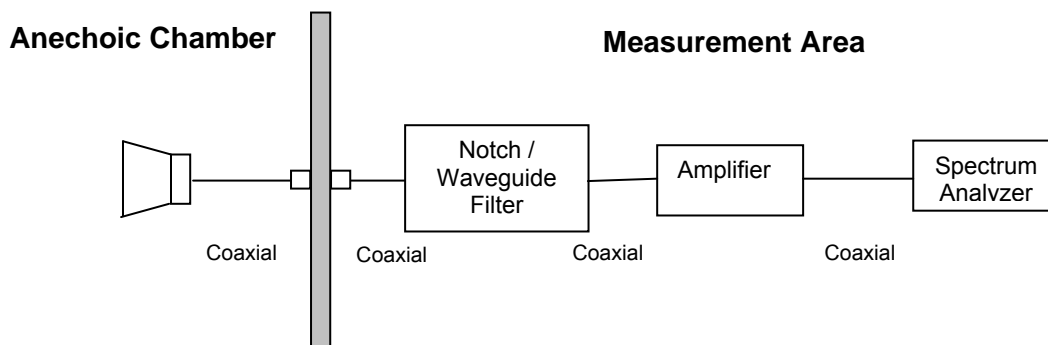

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 75 of 107

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Receiver Radiated Spurious Emissions above 1 GHz

Test Setup - 802.11a
Channel 5,260 MHz

TABLE OF RESULTS –802.11a

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
10001.67	V	39.17	11.03	50.2	54	-3.8

Plot 49
Radiated Emissions

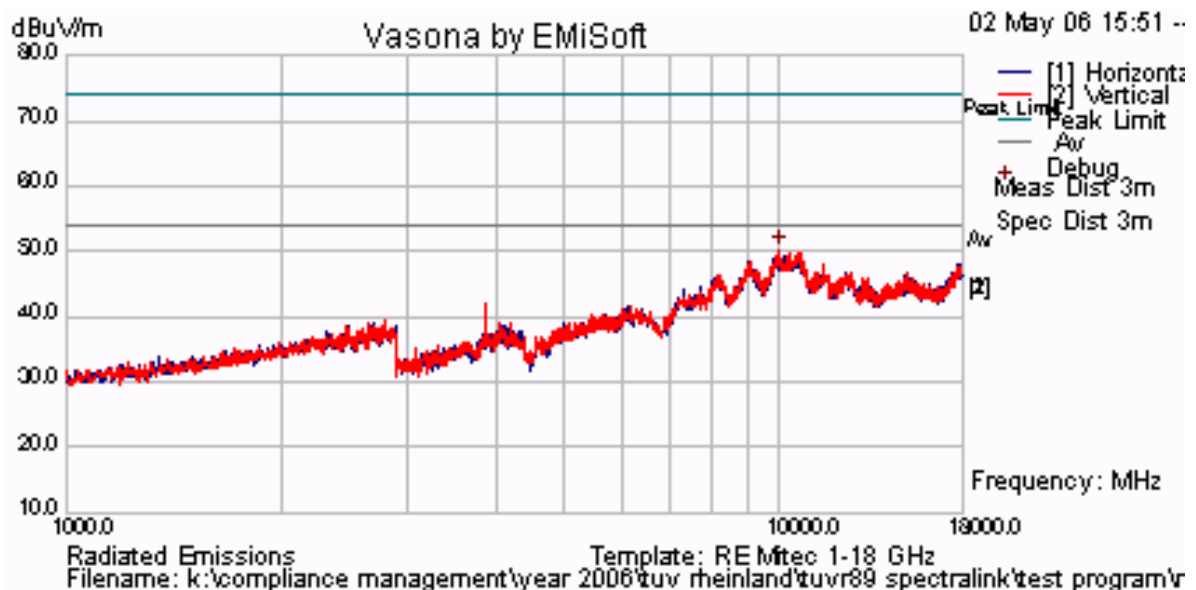

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Receiver Radiated Spurious Emissions above 1 GHz

Test Setup - 802.11a
Channel 5,600 MHz

TABLE OF RESULTS –802.11a

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
10608.33	V	39.84		48.92	54	-5.08

**Plot 50
Radiated Emissions**

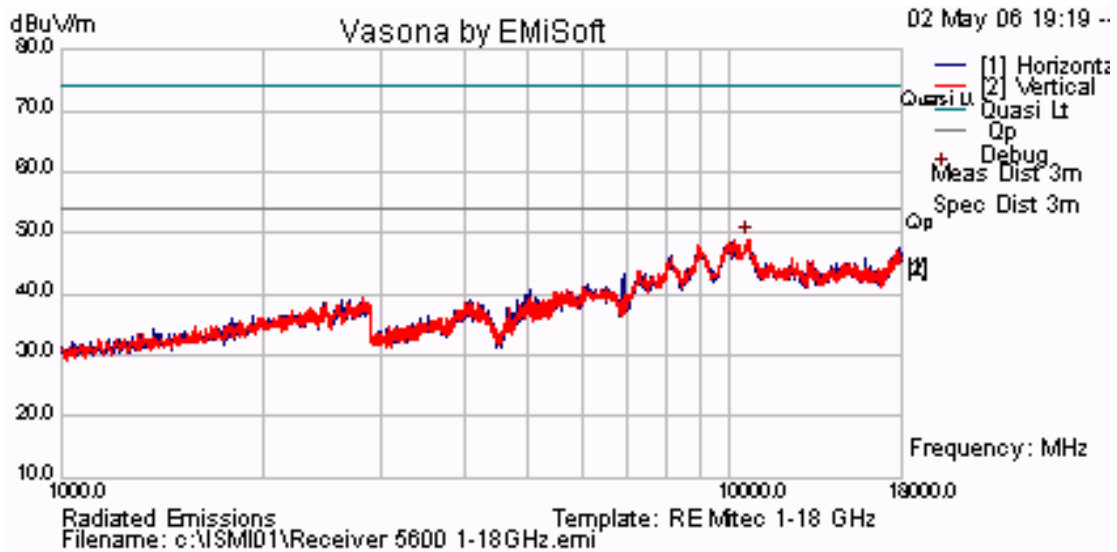

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

Frequency (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 79 of 107

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.8.4. Radiated Spurious Emissions (30M-1 GHz)

FCC, Part 15 Subpart C §15.407(b)(6); §15.205(a); §15.209(a)
Industry Canada RSS-210 §2.2

Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 10-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

Test Measurement Set up

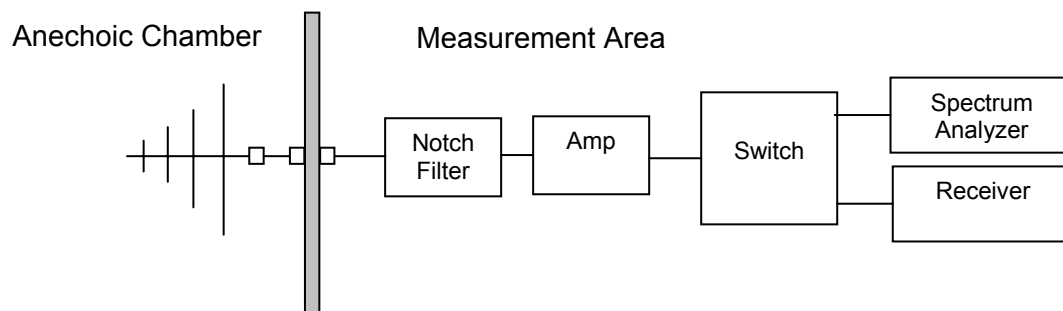

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 81 of 107

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Data Rate(s): 802.11a 12 MBit/s,

Power Level: Maximum

Duty Cycle: 1.45%

Channel: 5180 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Product: 802X Phone with PTH200 ear piece connected in single charger
Operation mode: 5.180 GHz 12 MBit/s max power


TABLE OF RESULTS

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity

There were no emissions observed within 6 dB of the limit.

Plot 51
Radiated Spurious Emissions 30 MHz to 1 GHz

4/12/2006 13:43:56

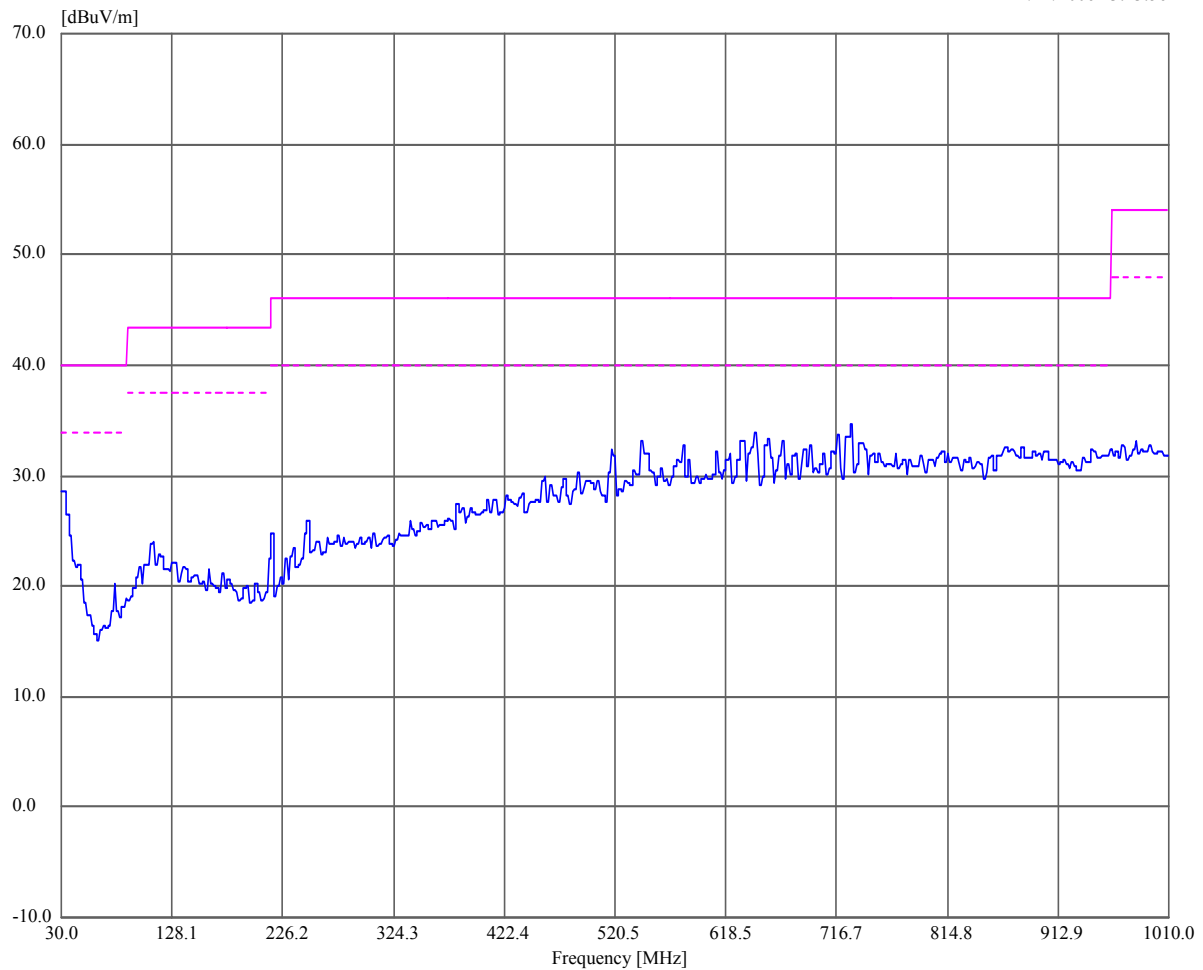

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

§15.407(b)(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §2.2 refers to Section 2.7 Table 2 below;-

Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per Sanmina work instruction	8546A HP Receiver and RF Filter, HP Pre-amp, Antenna EMCO Biconilog

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.9. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.407(b)(6)/15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

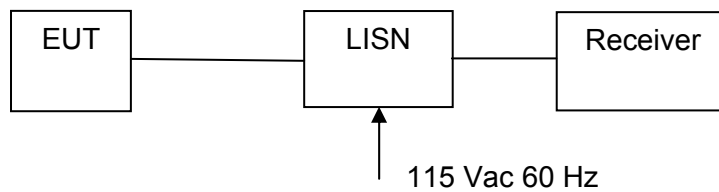

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Product: 802X Phone with PTH200 ear piece connected in single charger

Operation mode: 5.180 GHz 12 MBit/s max power


TABLE OF RESULTS – Live Line

Freq (MHz)	Peak (dBμV)	QP (dBμV)	QP Limit (dBμV)	QP Margin (dB)	Ave. (dBμV)	Ave. Limit (dBμV)	Ave. Margin (dB)
0.352462	43.24	---	58.97	---	4.91	48.97	-44.06
0.383536	43.13	---	58.23	---	4.56	48.23	-43.67
0.430096	42.99	---	57.31	---	3.87	47.31	-43.44
0.458976	42.98	---	56.77	---	3.38	46.77	-43.38
0.473915	42.71	---	56.49	---	3.84	46.49	-42.65
0.501905	42.23	---	56.00	---	3.26	46.00	-42.74

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 52
AC Wireline Conducted Emissions – LIVE LINE 150 kHz – 30 MHz)

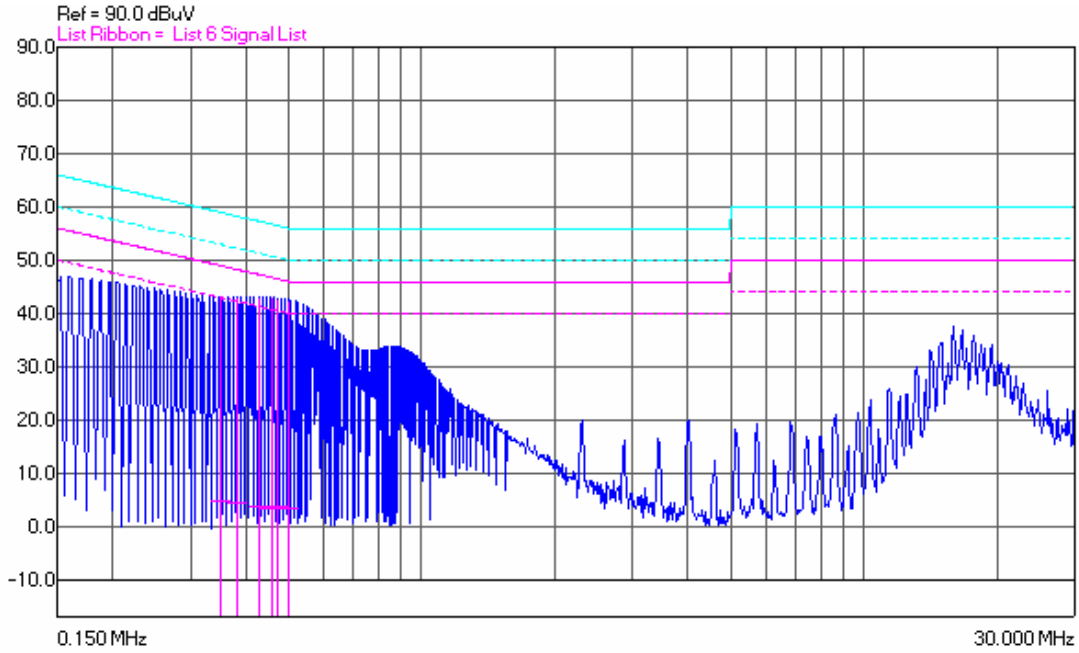


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – Neutral Line

Freq (MHz)	Peak (dBμV)	QP (dBμV)	QP Limit (dBμV)	QP Margin (dB)	Ave. (dBμV)	Ave. Limit (dBμV)	Ave. Margin (dB)
0.454642	40.84	--.--	56.85	--.--	3.83	46.85	-43.02

**Plot 53
AC Wireline Conducted Emissions – NEUTRAL LINE 150 kHz – 30 MHz)**

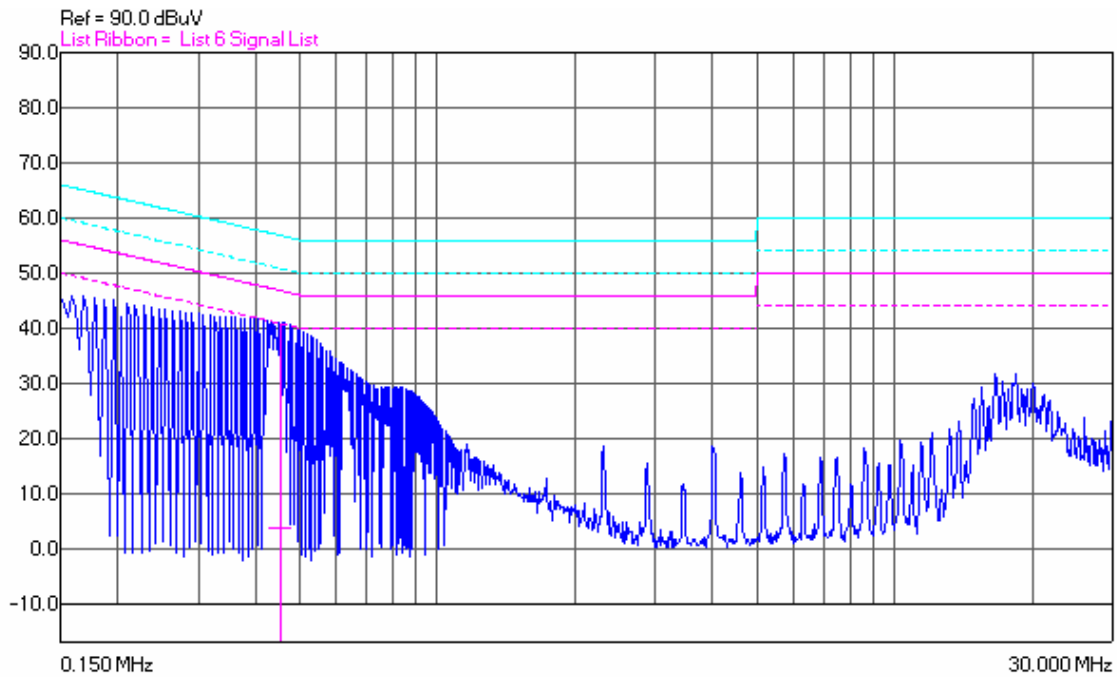

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limit

§15.407 (b)(6); Any U-NII devices using an AC power line are required to comply also with the limits set forth in Section 15.207.

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and **RSS-Gen §7.2.2** Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 88 of 107

5.2. Dynamic Frequency Selection (DFS)

Test Procedure

Channels within the 5,250-5,350MHz and 5,470-5,725 GHz bands were exercised during the test. WLAN test traffic was generated between the Cisco AP and SpectraLink 802X wireless phone handset by continuously transmitting audio data from a land line phone to the SpectraLink 802X using the test set up shown in the diagram below;-

Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Client


As this device is a client Type 1 fixed radar signature was injected into the host Cisco AP to monitor *Channel Closing Transmission Time* and *Channel Move Time*.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless phone	SpectraLink	802X	660324742 & 660324730
Support	Wireless Access Point AIRONET 802.11a/b/g	Cisco	AIR-AP1242AG-A-K9	FTX0940B04J
Support	Telephone Gateway	SpectraLink	TGA116	650302159
Support	NetLink SVP Server	SpectraLink	SVP100	660328548
Support	NetLink OAI Gateway	SpectraLink	MOG700	660328792

Test Measurement Set up for Client Device with Radar Injection at the Access Point

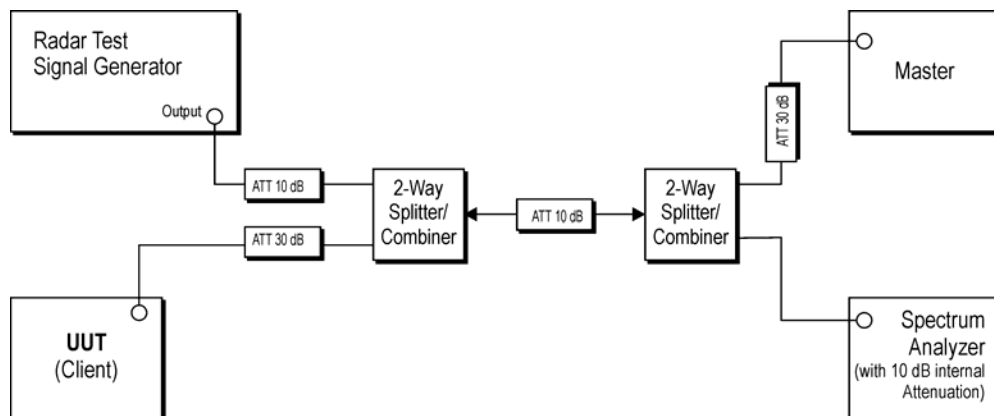

The SpectraLink 802X wireless phone does not exceed 27 dBm EIRP so no Transmit Power Control (TPC) is implemented on the product.



5.3.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna	

5.3.2. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.



5.3.3. RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 92 of 107

Each waveform is defined as follows:


- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst_Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst_Count*. Each interval is of length $(12,000,000 / \textit{Burst_Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \textit{Burst_Count}) - (\textit{Total Burst Length}) + (\textit{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical representation of the Long Pulse radar Test Waveform.

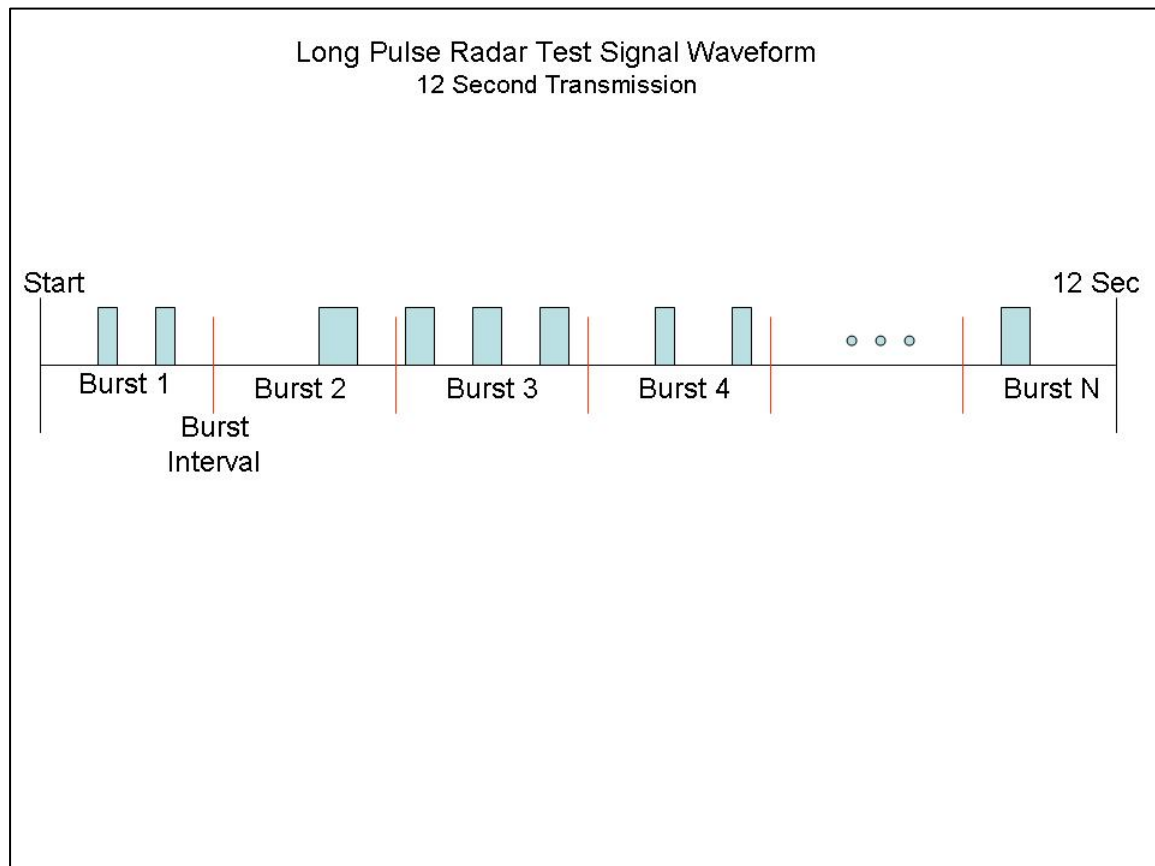



5.3.4. Frequency Hopping Radar Test Waveform

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected¹ from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

5.3.5. UNII Detection Bandwidth:

The SpectraLink 802X is a Client device. Therefore the UNII Detection Bandwidth measurement was not required.

5.3.6. Non-Occupancy Period

The SpectraLink 802X is a Client device. Therefore the Non-Occupancy Period measurement was not required.

**5.3.7. Channel Availability Check Time
FCC §15.407(h)(2)(ii)**

The SpectraLink 802X is a Client device. Therefore the Channel Availability Check Time measurement was not required.




5.3.8. Channel Move Time FCC
FCC §15.407(h)(2)(iii)

Lower Sub-Band

Channel (MHz)	Radar Signature	Channel Move Time (seconds)	Limit (seconds)
5280	Type 1	8.978	10
5500	Type 1	9.258	10

Plot 54 Channel Move Time
Ch 5280 MHz Radar Signature Type 1

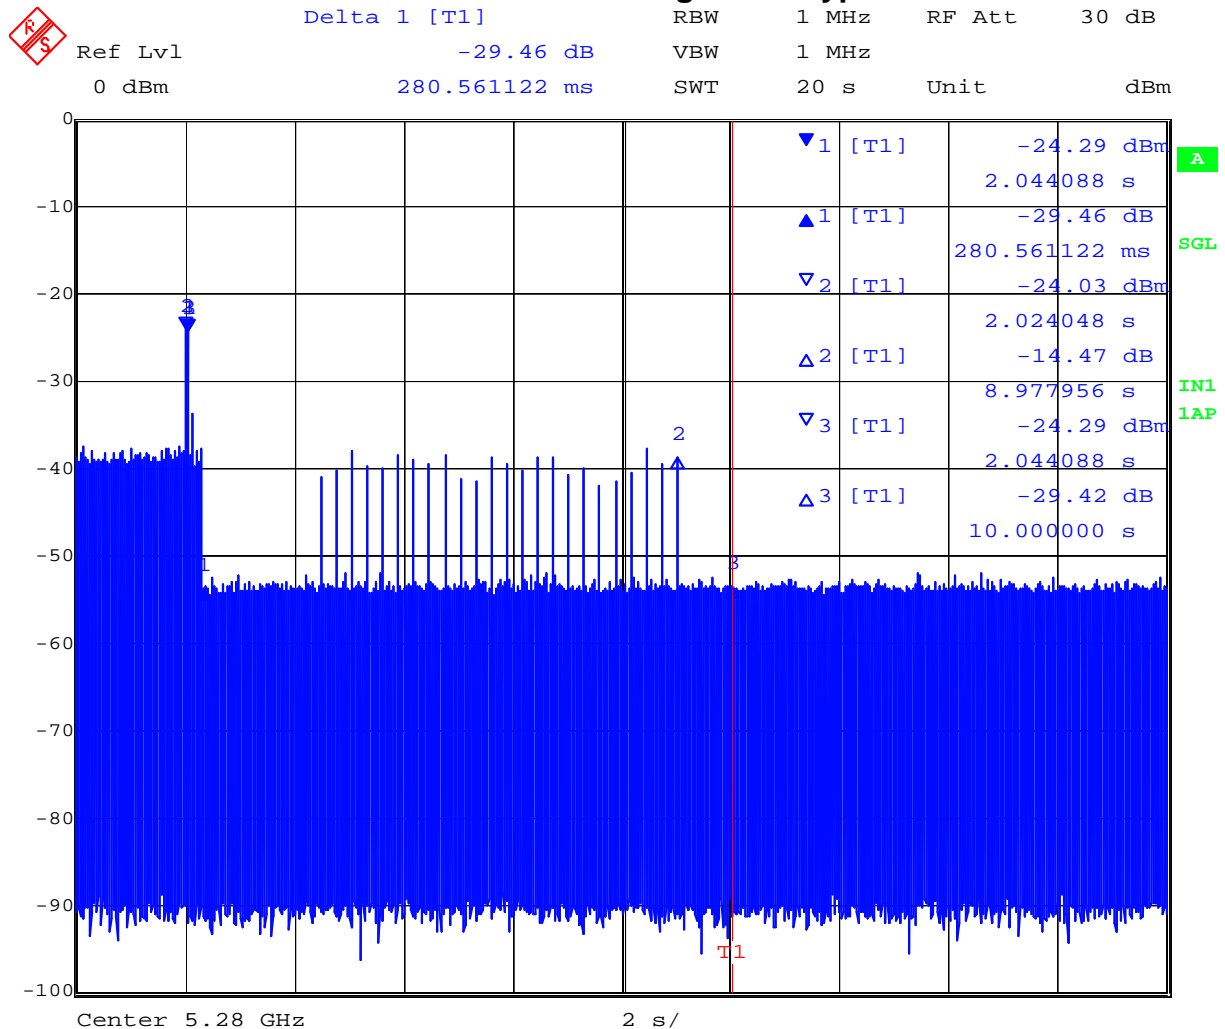

Date: 12.OCT.2006 16:12:48


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 55 Channel Move Time
Ch 5500 MHz Radar Signature Type 1



Ref Lvl 0 dBm
 Delta 1 [T1] -28.58 dB
 320.641283 ms
 RBW 1 MHz
 VBW 1 MHz
 SWT 20 s
 RF Att 30 dB
 Unit dBm

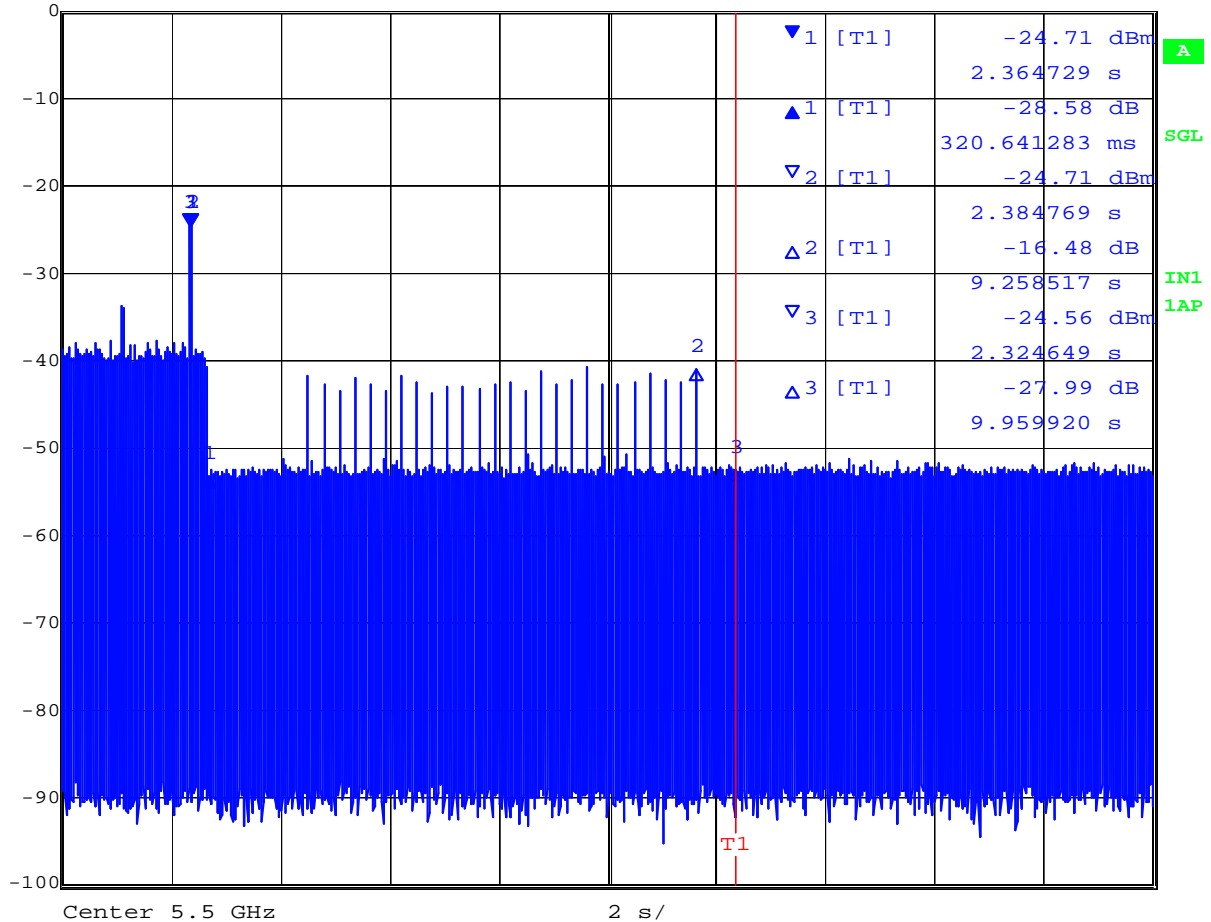

Date: 12.OCT.2006 17:04:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 97 of 107

Channel Closing Transmission Time [FCC §15.407\(h\)\(2\)\(iii\)](#)

The Channel Closing Time is 200 milliseconds plus an aggregate of 60 milliseconds over the remainder of the 10 second Channel Move Time. From the results we can see that the EUT appears to transmit beyond the initial 200 millisecond period, however the EUT is transmitting pulses of data. Each Pulse is 80.16 μ Sec duration.

The Aggregate Transmission Time = $Pw * N$

Where N = Number of Pulses Transmitted in remaining 9.8sec Channel Move Time

Pw = Pulse width

So for the Lower Sub Band 5,250 – 5,350 MHz the Channel Closing Time equals

$$80.16 \times 10^{-6} * 27 = 2.16 \text{ mSeconds.}$$

So for the Higher Sub Band 5,470 – 5,725 MHz the Channel Closing Time equals


$$80.16 \times 10^{-6} * 32 = 2.56 \text{ mSeconds.}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Channel (MHz)	Radar Signature	Channel Closing Transmission Time (mS)	Limit (mS)	Margin (mS)	Plot #
5260	Type 1	2.16	60	57.84	55
5660	Type 1	2.24	60	57.44	56

Plot 56 Channel Closing Period
Ch 5260 MHz Radar Signature Type 1

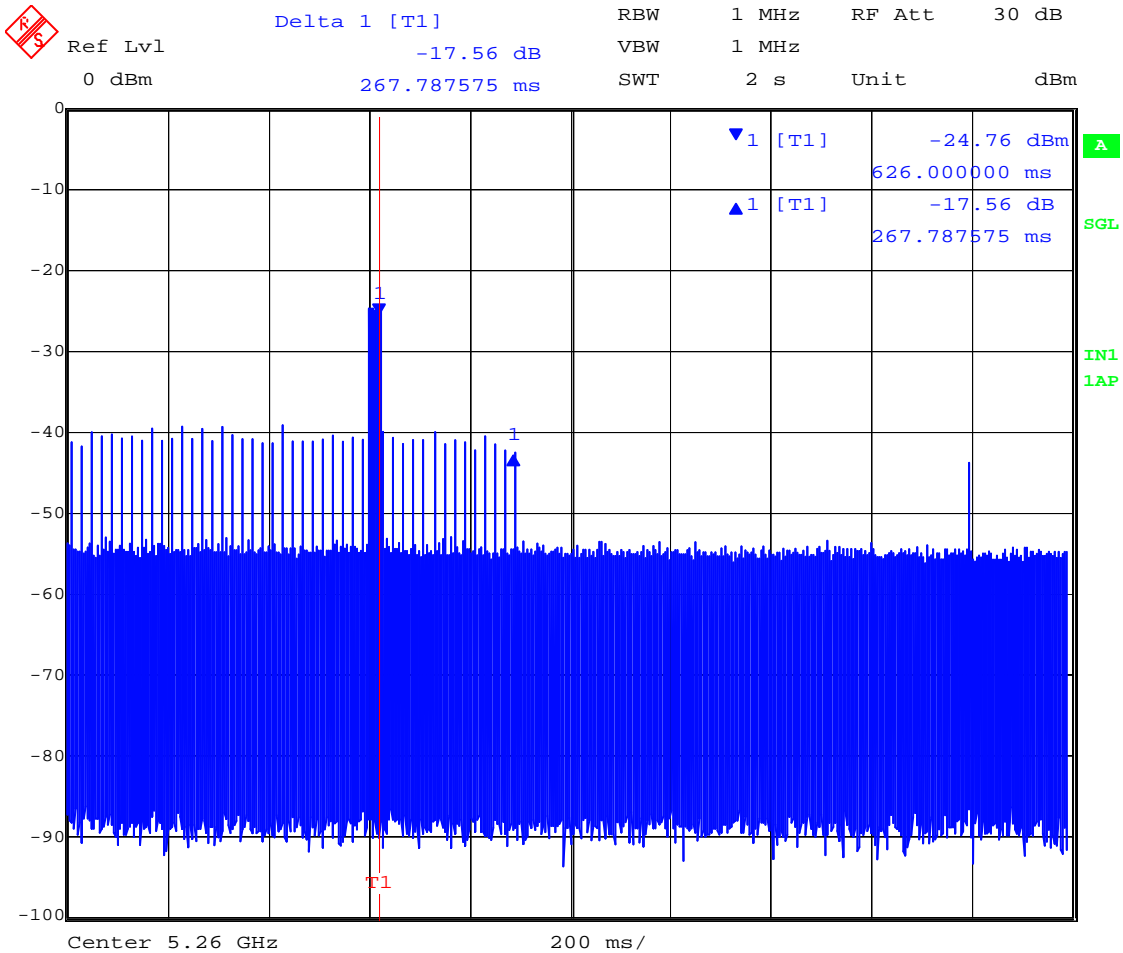


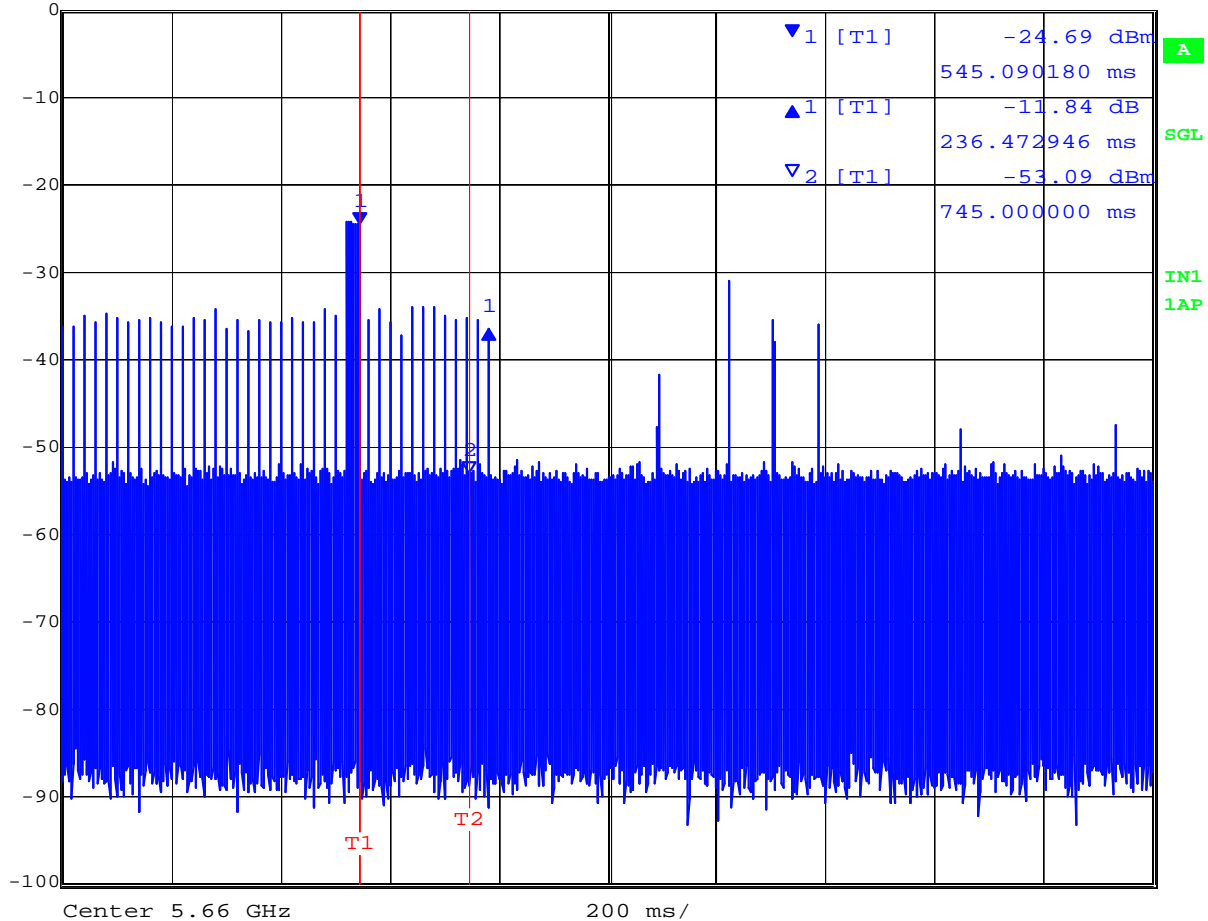
Date: 12.OCT.2006 16:21:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Plot 57 Channel Closing Period Ch 5660 MHz Radar Signature Type 1

 Ref Lvl 0 dBm
Delta 1 [T1] -11.84 dB
236.472946 ms
RBW 1 MHz
VBW 1 MHz
SWT 2 s
RF Att 30 dB
Unit dBm



Date: 12.OCT.2006 15:51:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUVR89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 100 of 107

Measurement Uncertainty Time/Power

Measurement uncertainty	
- Time	4%
- Power	1.33dB

Traceability

Test Equipment Used

0072, 0083, 0088, 0098, 0223, 0116, 0158, 0313, 0314, 0193, 0252, 0253, 0251, 0256, 0328, 0329

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6. PHOTOGRAPHS

6.1. Radiated Emissions (30 MHz-1 GHz)




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Spurious Emissions >1 GHz




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. Conducted Emissions (150 kHz - 30 MHz)

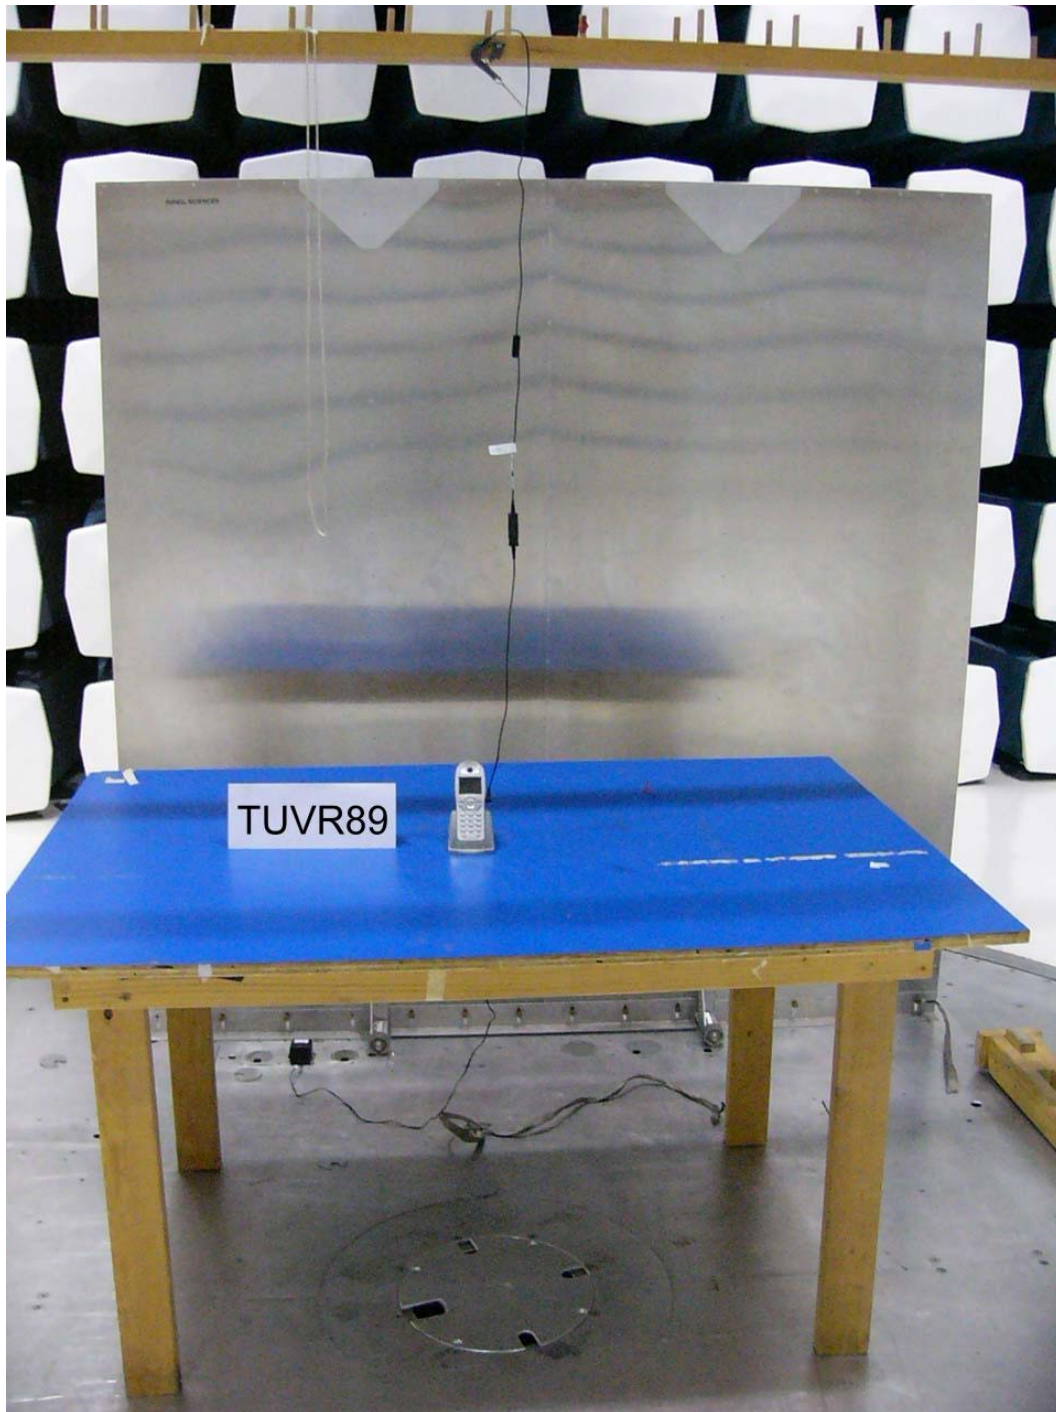

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.4. General Measurement Test Set-Up

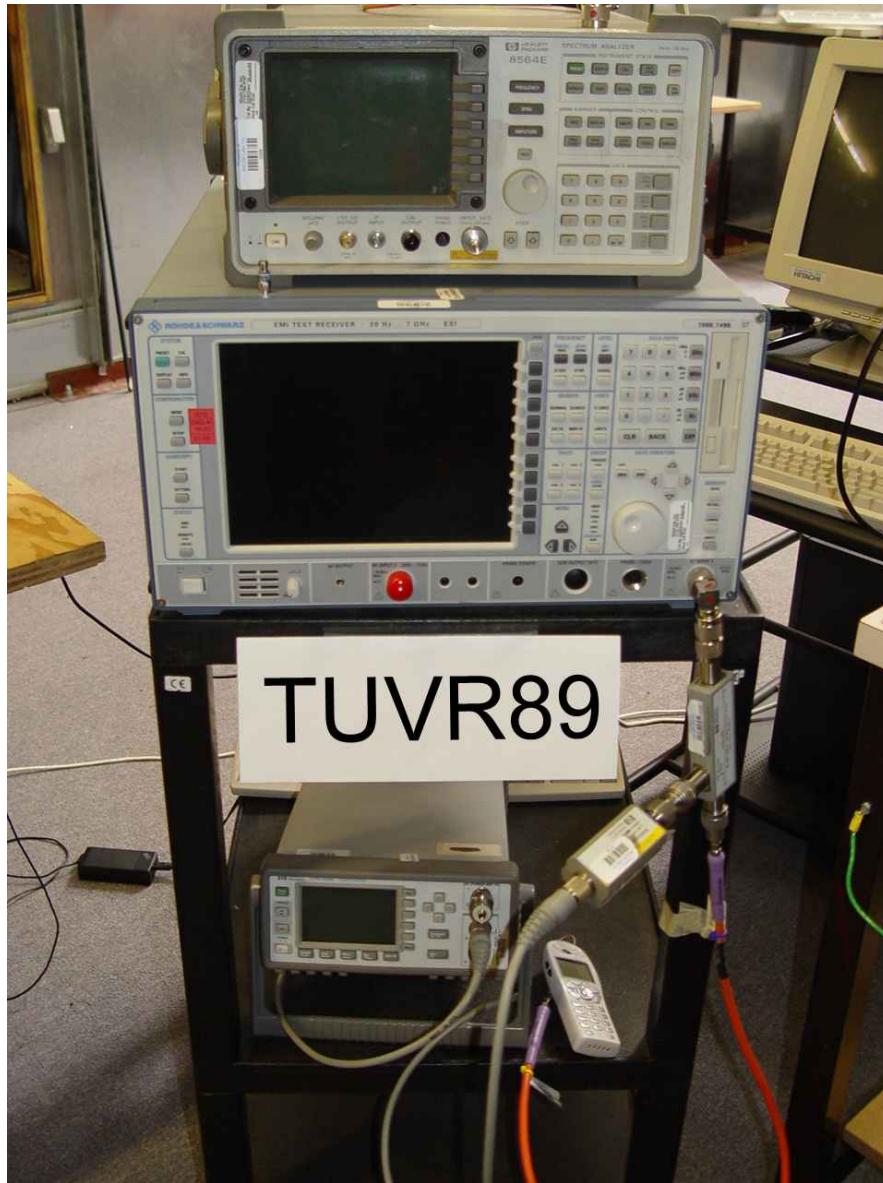

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.5. Dynamic Frequency Selection Test Set-Up



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: SpectraLink 802X Wireless Telephone
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: TUV89-A2 Rev C
Issue Date: 3rd Nov. '06
Page: 106 of 107

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0104	1-18GHz Horn Antenna	The Electro-Mechanics Company	3115	9205-3882
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com