

Test Laboratory: Compliance Certification Services
File Name: D2450V2 SN 706_12.9mW.da4

DUT: Dipole Type & Serial Number: D2450V2 SN 706

Program: System Validation - Probe: ET3DV6 SN 1577; Air temp. 24.5 deg C, liquid temp. 22.5 deg C

Communication System: CW - 2450 MHz; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Head 2450 MHz ($\sigma = 1.8768$ mho/m, $\epsilon = 39.15$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 93.4 V/m

Peak SAR = 27.4 mW/g

SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.76 mW/g

Power Drift = 0.05 dB

Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

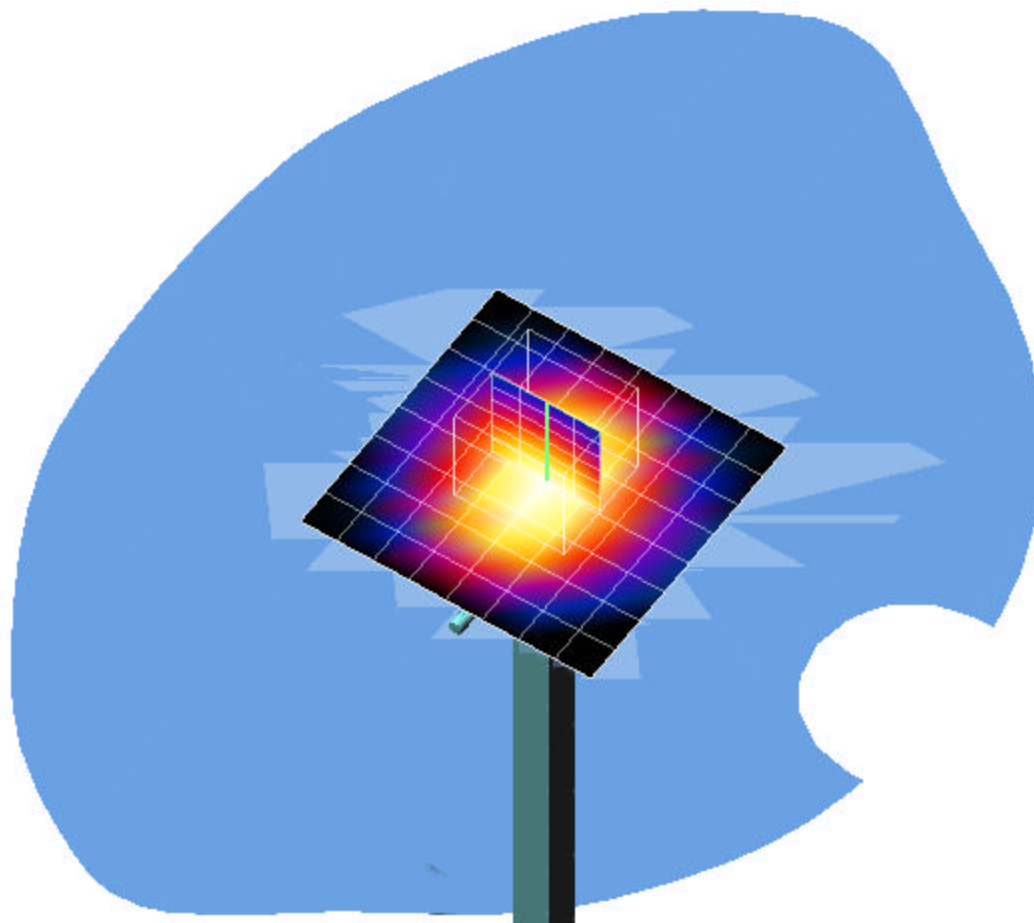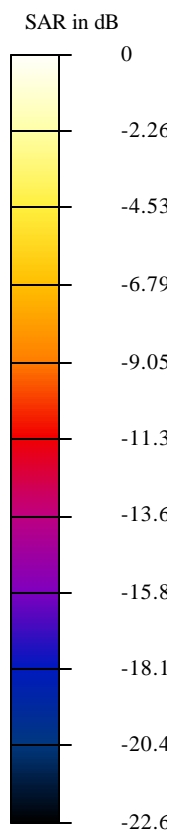

Test Laboratory: Compliance Certification Services
File Name: D2450V2 SN 706_12.7mW.da4

DUT: Dipole Type & Serial Number: D2450V2 SN 706

Program: System Validation - Probe: ET3DV6 SN 1577; Air temp. 24.5 deg C, liquid temp. 22.5 deg C

Communication System: CW - 2450 MHz; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Head 2450 MHz ($\sigma = 1.8836$ mho/m, $\epsilon = 39.1$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm

Reference Value = 91.8 V/m

Peak SAR = 27.3 mW/g

SAR(1 g) = 12.7 mW/g; SAR(10 g) = 5.62 mW/g

Power Drift = -0.006 dB

Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

