



FCC TEST REPORT

REPORT NO.: RF910913R01

MODEL NO.: 4108-W01

RECEIVED: Sept. 11, 2002

TESTED: Oct. 17 ~ Oct. 25, 2002

APPLICANT: Lexmark International, Inc.

ADDRESS: 740 West New Circle Road M/S D63A/005-01
Lexington, KY 40550, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS.....	11
4.1.7	TEST RESULTS(A)	12
4.1.8	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	25
4.2.3	TEST PROCEDURES	26
4.2.4	TEST SETUP	27
4.2.5	DEVIATION FROM TEST STANDARD	27
4.2.6	EUT OPERATING CONDITIONS.....	27
4.2.7	TEST RESULTS	28
4.2.8	TEST RESULTS	29
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP	34
4.3.6	EUT OPERATING CONDITIONS.....	34
4.3.7	TEST RESULTS	35
4.4	MAXIMUM PEAK OUTPUT POWER.....	39
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	39
4.4.2	INSTRUMENTS.....	39
4.4.3	TEST PROCEDURES	40
4.4.4	DEVIATION FROM TEST STANDARD	40
4.4.5	TEST SETUP	40
4.4.6	EUT OPERATING CONDITIONS.....	40
4.4.7	TEST RESULTS	41
4.5	POWER SPECTRAL DENSITY MEASUREMENT	42



4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	42
4.5.2	TEST INSTRUMENTS	42
4.5.3	TEST PROCEDURE	43
4.5.4	DEVIATION FROM TEST STANDARD	43
4.5.5	TEST SETUP	43
4.5.6	EUT OPERATING CONDITION	43
4.5.7	TEST RESULTS	44
4.6	BAND EDGES MEASUREMENT	48
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	48
4.6.2	TEST INSTRUMENTS	48
4.6.3	TEST PROCEDURE	48
4.6.4	DEVIATION FROM TEST STANDARD	48
4.6.5	EUT OPERATING CONDITION	49
4.6.6	TEST RESULTS	49
4.7	ANTENNA REQUIREMENT	52
4.7.1	STANDARD APPLICABLE	52
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	52
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	53
6	INFORMATION ON THE TESTING LABORATORIES.....	55



1 CERTIFICATION

PRODUCT : Lexmark N5 Wireless Adapter
BRAND NAME : Lexmark
MODEL NO. : 4108-W01
APPLICANT : Lexmark International, Inc.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 17 ~ Oct. 25, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Emily Lu, **DATE:** October 29, 2002
Emily Lu

APPROVED BY: Alan Lane **DATE:** October 29, 2002
Dr. Alan Lane
Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.35dBuV at 0.181MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.60dBuV at 748.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Lexmark N5 Wireless Adapter
MODEL NO.	4108-W01
POWER SUPPLY	5.0VDC from Power Adapter
MODULATION TYPE	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	12.80dBm
ANTENNA TYPE	Dipole Antenna
DATA CABLE	1.8m (Shielded)
I/O PORTS	USB port
ASSOCIATED DEVICES	NA

NOTE:

1. The following adapters are provided to this EUT:

Brand :	Delta
Model No.:	ADP-5VB C
Input power :	100-240V ~ 1A 50/60Hz
Output power :	5V 1A

Brand :	Delta
Model No.:	ADP-5VB
Input power :	100-125vac 0.2A 50/60Hz
Output power :	5V 1A

2. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

- NOTE:**
1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
 2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
 3. There are two adapters provided in this EUT. Test Result A (Section 4.1.7 and 4.2.7) is for model: ADP-5VB C, and test result B (Section 4.1.8 and 4.2.8) is for model: ADP-5VB.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Lexmark N5 Wireless Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
2	Wireless LAN Card	SMC	SMC0632W	NA	NA
3	Printer	Lexmark	Z45	00120198792	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	834115/016	Mar. 3, 2003
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ESH3-Z5	847265/023	Jan. 10, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 10, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Dec. 10, 2002
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	July 10, 2003
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C03.01	July 11, 2003
Terminator (For EMCO LISN)	NA	E1-01-300	Feb. 20, 2003
Terminator (For EMCO LISN)	NA	E1-01-301	Feb. 20, 2003
Shielded Room	Site 3	ADT-C03	NA
VCCI Site Registration No.	Site 3	C-274	NA
VCCI Site Registration No.	Site 5	C-1093	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. “*”: These equipment are used for conducted telecom port test only (if tested).
 4. The test was performed in ADT Open Site No. 5.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

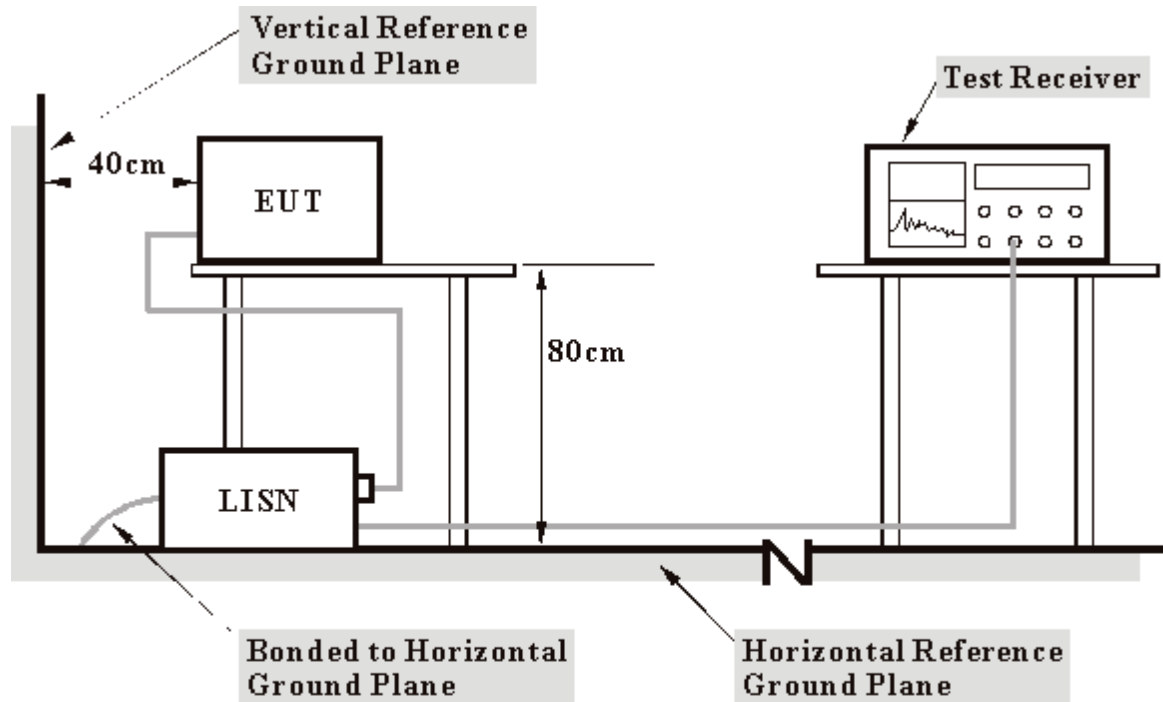

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer and the printer prints them on paper.




4.1.7 TEST RESULTS(A)

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	50.98	-	51.08	-	64.43	54.43	-13.35	-
2	0.244	0.10	42.22	-	42.32	-	61.97	51.97	-19.65	-
3	0.306	0.10	34.39	-	34.49	-	60.07	50.07	-25.58	-
4	0.361	0.10	34.75	-	34.85	-	58.71	48.71	-23.86	-
5	0.900	0.18	28.22	-	28.40	-	56.00	46.00	-27.60	-
6	3.688	0.47	28.84	-	29.31	-	56.00	46.00	-26.69	-

- REMARKS :
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

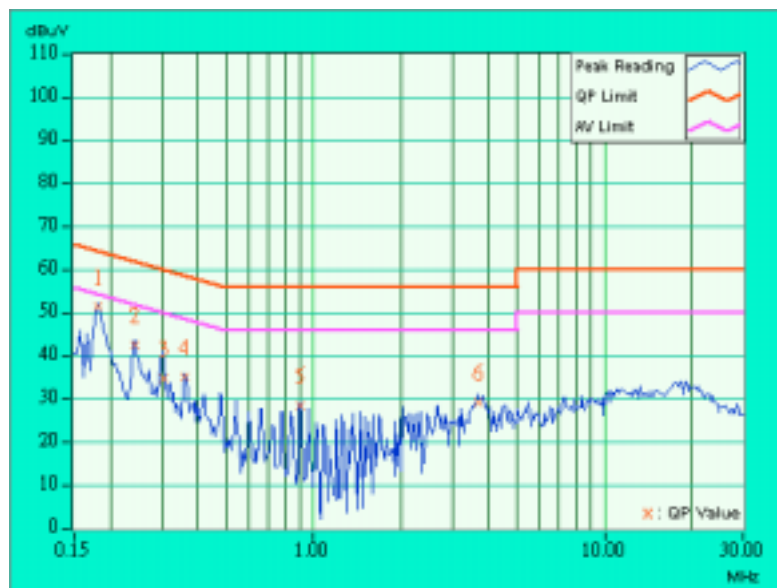




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	49.59	-	49.69	-	64.43	54.43	-14.74	-
2	0.240	0.10	40.33	-	40.43	-	62.10	52.10	-21.67	-
3	0.302	0.10	37.25	-	37.35	-	60.18	50.18	-22.83	-
4	0.900	0.18	26.47	-	26.65	-	56.00	46.00	-29.35	-
5	2.418	0.32	24.20	-	24.52	-	56.00	46.00	-31.48	-
6	17.289	0.55	29.88	-	30.43	-	60.00	50.00	-29.57	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

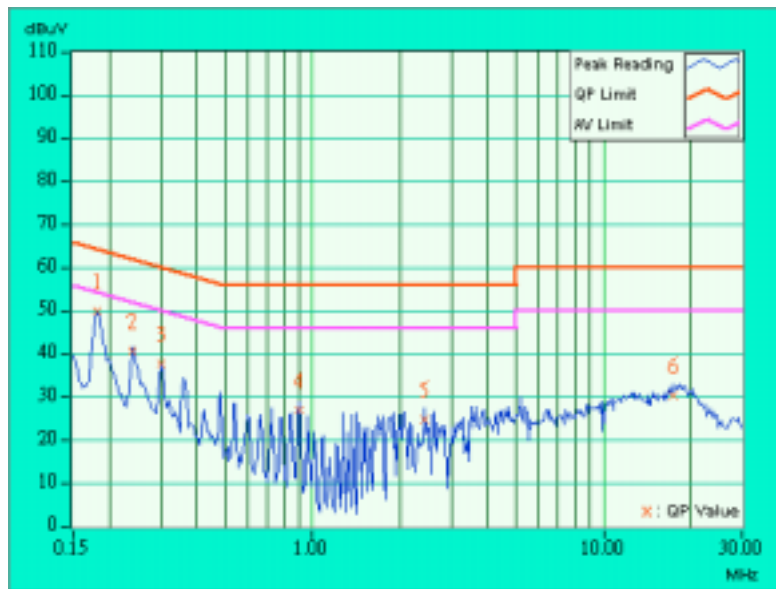




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 62%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	49.99	-	50.09	-	64.43	54.43	-14.34	-
2	0.240	0.10	40.99	-	41.09	-	62.10	52.10	-21.01	-
3	0.302	0.10	37.39	-	37.49	-	60.18	50.18	-22.69	-
4	0.361	0.10	34.23	-	34.33	-	58.71	48.71	-24.38	-
5	0.482	0.11	29.49	-	29.60	-	56.30	46.30	-26.70	-
6	3.891	0.49	28.34	-	28.83	-	56.00	46.00	-27.17	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

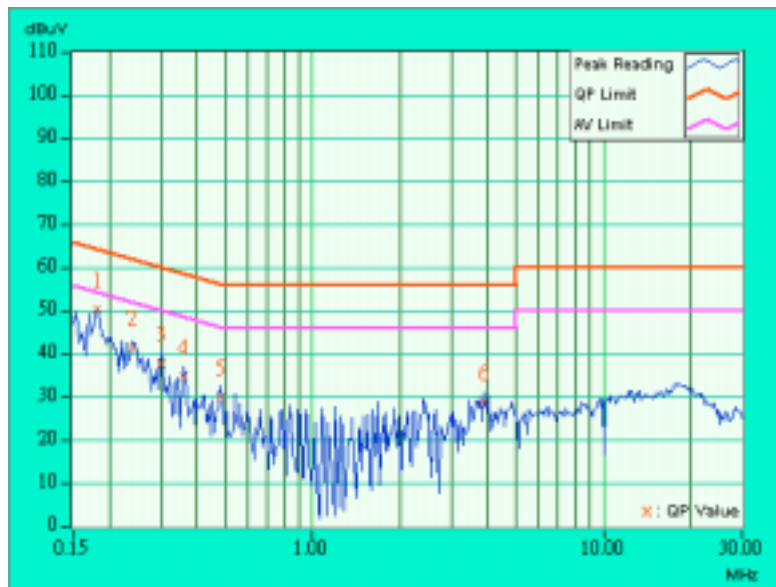




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 62%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	49.87	-	49.97	-	64.43	54.43	-14.46	-
2	0.242	0.10	41.34	-	41.44	-	62.01	52.01	-20.57	-
3	0.304	0.10	37.67	-	37.77	-	60.14	50.14	-22.37	-
4	0.361	0.10	34.11	-	34.21	-	58.71	48.71	-24.50	-
5	0.955	0.19	26.07	-	26.26	-	56.00	46.00	-29.74	-
6	17.543	0.55	30.55	-	31.10	-	60.00	50.00	-28.90	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

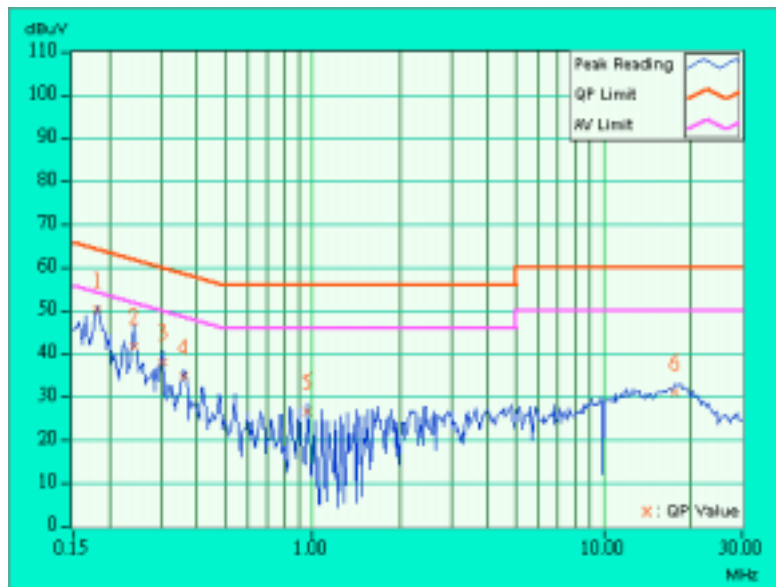




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	49.65	-	49.75	-	64.43	54.43	-14.68	-
2	0.244	0.10	40.89	-	40.99	-	61.97	51.97	-20.98	-
3	0.302	0.10	36.93	-	37.03	-	60.18	50.18	-23.15	-
4	0.361	0.10	34.09	-	34.19	-	58.71	48.71	-24.52	-
5	0.539	0.12	27.12	-	27.24	-	56.00	46.00	-28.76	-
6	3.648	0.46	28.32	-	28.78	-	56.00	46.00	-27.22	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

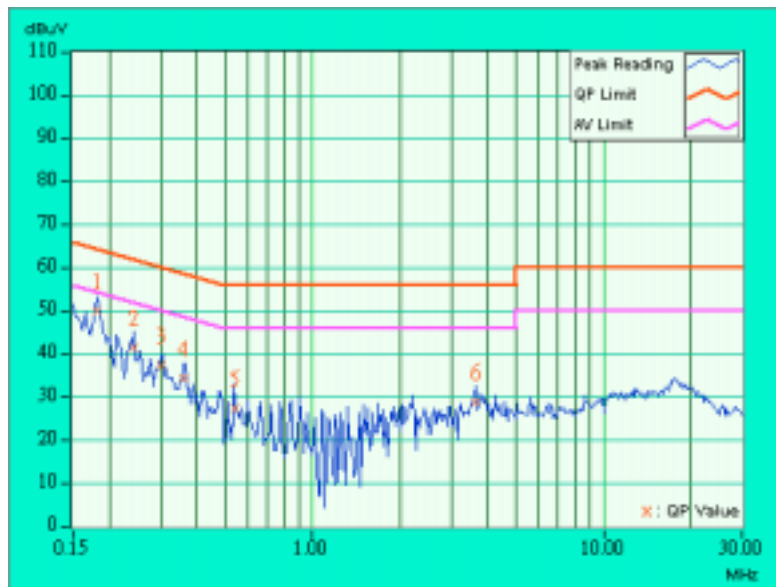




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	46.40	-	46.50	-	64.25	54.25	-17.75	-
2	0.244	0.10	40.91	-	41.01	-	61.97	51.97	-20.96	-
3	0.302	0.10	37.32	-	37.42	-	60.19	50.19	-22.77	-
4	0.357	0.10	30.48	-	30.58	-	58.80	48.80	-28.22	-
5	1.614	0.26	26.38	-	26.64	-	56.00	46.00	-29.36	-
6	3.566	0.38	25.34	-	25.72	-	56.00	46.00	-30.28	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

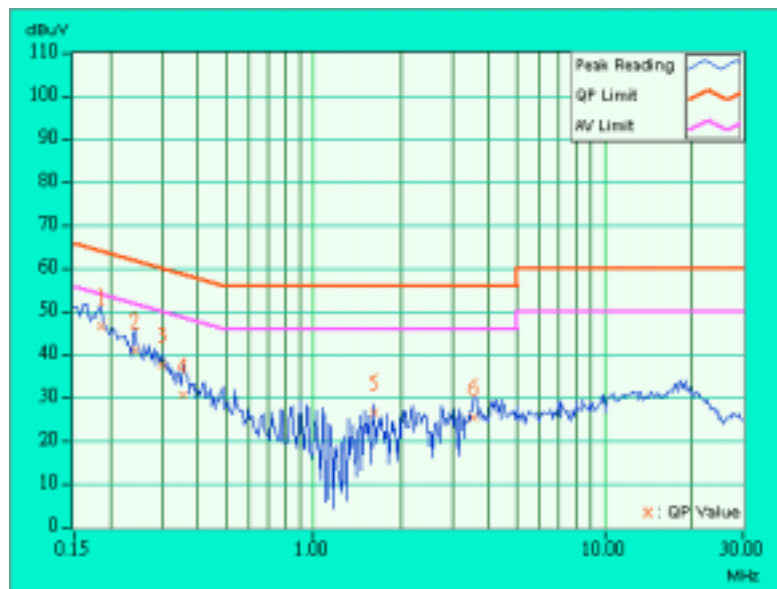




4.1.8 TEST RESULTS(B)

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	41.68	-	41.78	-	64.09	54.09	-22.31	-
2	0.244	0.10	32.46	-	32.56	-	61.97	51.97	-29.41	-
3	0.373	0.10	27.07	-	27.17	-	58.44	48.44	-31.27	-
4	2.383	0.34	23.92	-	24.26	-	56.00	46.00	-31.74	-
5	11.035	0.54	23.88	-	24.42	-	60.00	50.00	-35.58	-
6	18.461	0.77	27.64	-	28.41	-	60.00	50.00	-31.59	-

- REMARKS : 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
7. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 8. The emission levels of other frequencies were very low against the limit.
 9. Margin value = Emission level - Limit value
 10. Correction factor = Insertion loss + Cable loss
 11. Emission Level = Correction Factor + Reading Value.

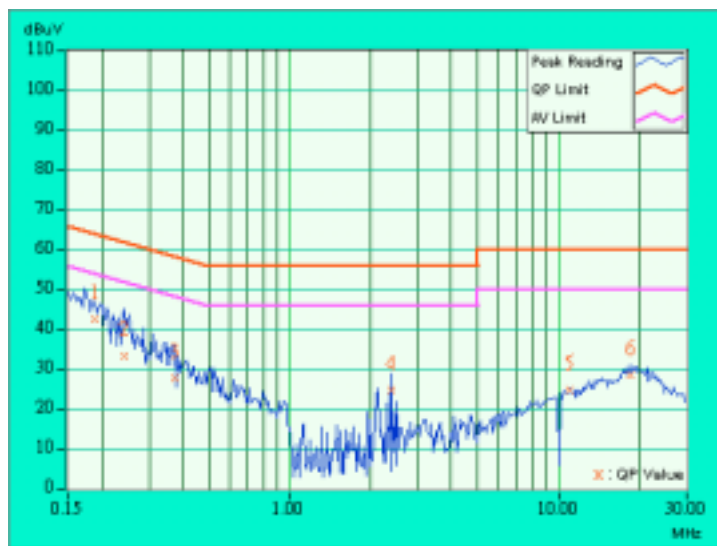




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	41.24	-	41.34	-	64.08	54.08	-22.74	-
2	0.314	0.10	30.75	-	30.85	-	59.86	49.86	-29.01	-
3	2.309	0.32	27.17	-	27.49	-	56.00	46.00	-28.51	-
4	2.551	0.33	23.89	-	24.22	-	56.00	46.00	-31.78	-
5	12.371	0.45	24.15	-	24.60	-	60.00	50.00	-35.40	-
6	19.277	0.59	27.76	-	28.35	-	60.00	50.00	-31.65	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

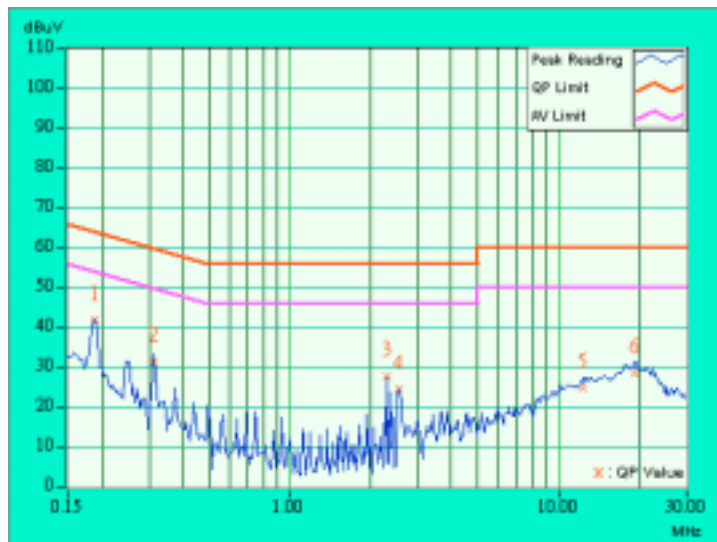




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	36.58	-	36.68	-	65.38	55.38	-28.70	-
2	0.189	0.10	40.94	-	41.04	-	64.08	54.08	-23.04	-
3	0.392	0.10	21.81	-	21.91	-	58.02	48.02	-36.11	-
4	2.363	0.34	24.36	-	24.70	-	56.00	46.00	-31.30	-
5	10.867	0.53	23.15	-	23.68	-	60.00	50.00	-36.32	-
6	17.934	0.76	27.89	-	28.65	-	60.00	50.00	-31.35	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

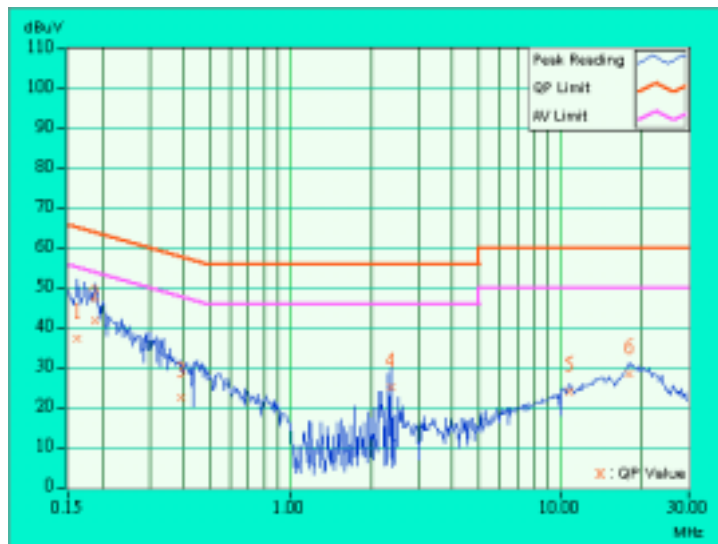




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	40.76	-	40.86	-	64.25	54.25	-23.39	-
2	0.314	0.10	30.65	-	30.75	-	59.86	49.86	-29.11	-
3	2.316	0.32	28.02	-	28.34	-	56.00	46.00	-27.66	-
4	2.551	0.33	24.41	-	24.74	-	56.00	46.00	-31.26	-
5	14.008	0.48	25.73	-	26.21	-	60.00	50.00	-33.79	-
6	18.445	0.57	28.03	-	28.60	-	60.00	50.00	-31.40	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

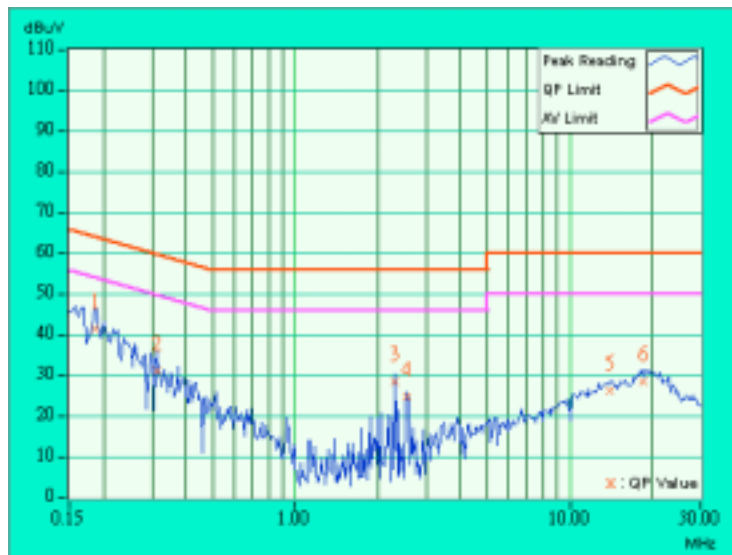




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	42.82	-	42.92	-	65.38	55.38	-22.46	-
2	0.181	0.10	40.58	-	40.68	-	64.43	54.43	-23.75	-
3	0.252	0.10	34.34	-	34.44	-	61.71	51.71	-27.27	-
4	2.309	0.33	25.40	-	25.73	-	56.00	46.00	-30.27	-
5	10.289	0.51	22.61	-	23.12	-	60.00	50.00	-36.88	-
6	18.402	0.77	27.74	-	28.51	-	60.00	50.00	-31.49	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

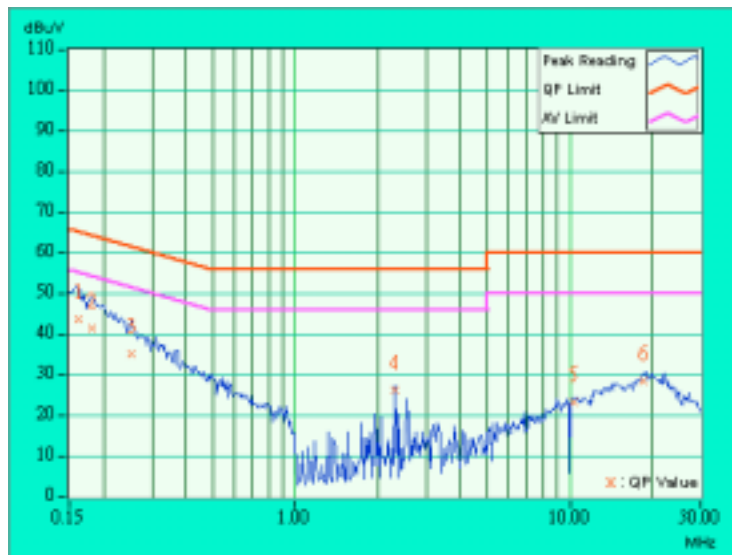




EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	41.28	-	41.38	-	64.25	54.25	-22.87	-
2	0.196	0.10	39.25	-	39.35	-	63.76	53.76	-24.41	-
3	0.298	0.10	29.76	-	29.86	-	60.29	50.29	-30.43	-
4	2.113	0.31	26.03	-	26.34	-	56.00	46.00	-29.66	-
5	2.570	0.33	21.20	-	21.53	-	56.00	46.00	-34.47	-
6	19.184	0.58	28.67	-	29.25	-	60.00	50.00	-30.75	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

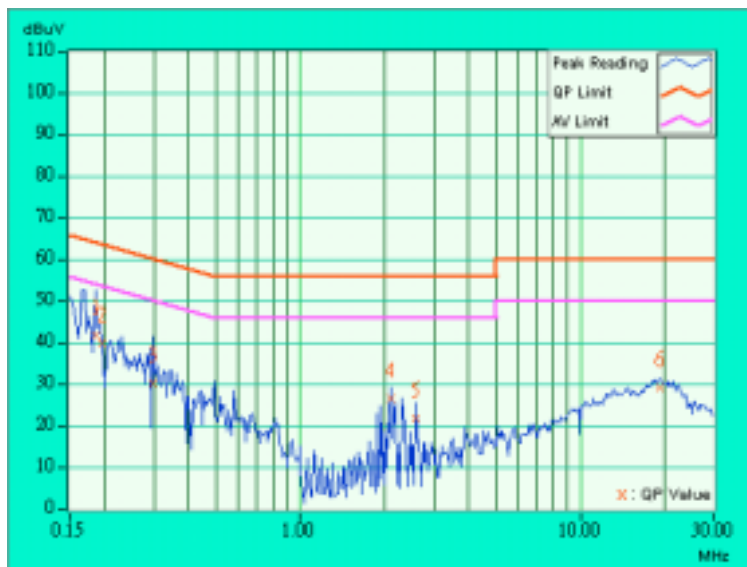



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Oct. 30, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jul. 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 25, 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 12, 2003
Open Field Test Site	Site 5	ADT-R05	Jul. 19, 2003
VCCI Site Registration No.	Site 5	R-1039	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 3. "*" = These equipment are used for the final measurement.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The test was performed in ADT Open Site No. 5.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

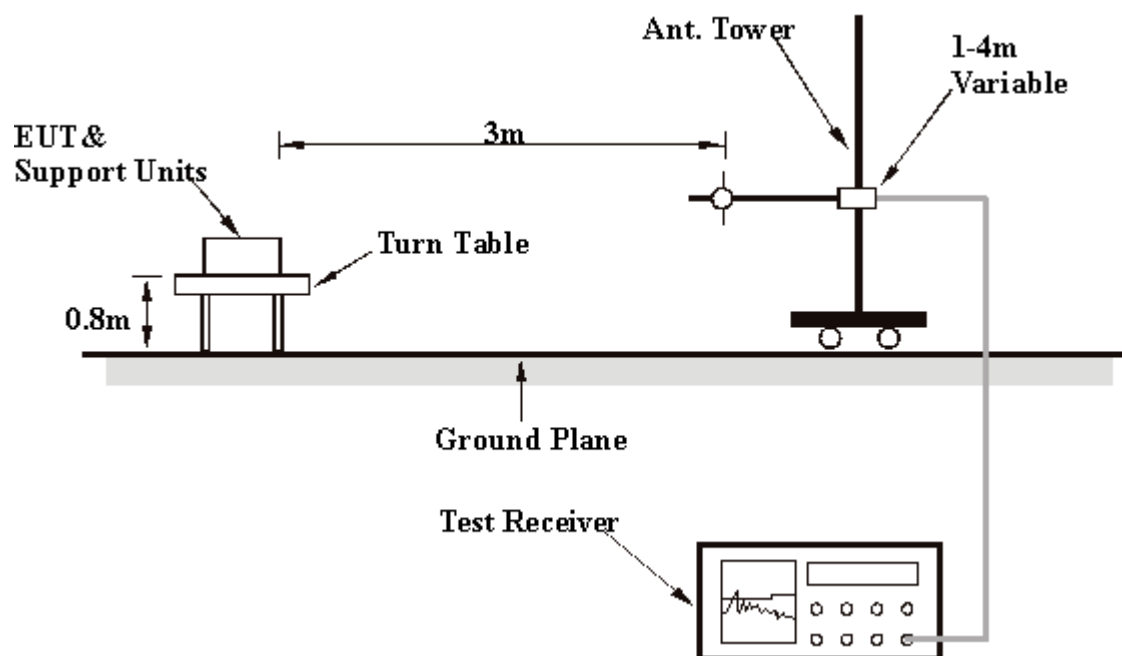

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS (A)

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	220.00	34.2 QP	46.00	-11.80	1.50H	152	19.78	10.12	4.30	0.00	-14.42
2	308.00	37.2 QP	46.00	-8.80	1.46H	194	18.63	13.38	5.19	0.00	-18.57
3	352.00	35.0 QP	46.00	-11.00	1.28H	3	14.96	14.31	5.73	0.00	-20.04
4	484.00	31.0 QP	46.00	-15.00	1.00H	7	7.53	16.96	6.51	0.00	-23.47
5	572.00	33.0 QP	46.00	-13.00	1.48H	351	7.10	18.25	7.65	0.00	-25.90
6	660.00	34.0 QP	46.00	-12.00	1.57H	124	6.56	19.25	8.19	0.00	-27.44
7	704.00	39.4 QP	46.00	-6.60	1.43H	345	11.56	19.38	8.46	0.00	-27.84
8	748.00	42.4 QP	46.00	-3.60	1.32H	299	13.51	20.14	8.75	0.00	-28.89
9	792.00	40.1 QP	46.00	-5.90	1.35H	125	10.31	20.60	9.18	0.00	-29.79
10	836.00	38.5 QP	46.00	-7.50	1.62H	292	8.53	20.54	9.43	0.00	-29.98
11	924.00	37.2 QP	46.00	-8.80	1.07H	107	6.17	21.00	10.03	0.00	-31.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	176.00	31.2 QP	43.50	-12.30	1.02V	333	18.32	9.08	3.80	0.00	-12.88
2	220.00	34.0 QP	46.00	-12.00	1.04V	183	19.58	10.12	4.30	0.00	-14.42
3	264.00	31.0 QP	46.00	-15.00	1.84V	3	13.21	12.89	4.91	0.00	-17.79
4	308.00	25.0 QP	46.00	-21.00	1.00V	27	6.43	13.38	5.19	0.00	-18.58
5	352.00	35.5 QP	46.00	-10.50	2.01V	3	15.46	14.31	5.73	0.00	-20.04
6	396.00	35.2 QP	46.00	-10.80	1.87V	10	13.11	15.96	6.13	0.00	-22.09
7	484.00	32.2 QP	46.00	-13.80	1.33V	138	8.73	16.96	6.51	0.00	-23.47
8	704.00	40.0 QP	46.00	-6.00	1.67V	279	12.16	19.38	8.46	0.00	-27.84
9	748.00	35.0 QP	46.00	-11.00	1.30V	26	6.11	20.14	8.75	0.00	-28.89
10	792.00	36.2 QP	46.00	-9.80	1.74V	293	6.41	20.60	9.18	0.00	-29.79
11	836.00	34.2 QP	46.00	-11.80	1.67V	123	4.23	20.54	9.43	0.00	-29.97

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
 3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.



4.2.8 TEST RESULTS (B)

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 85%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	220.00	30.4 QP	46.00	-15.60	1.36H	168	15.98	10.12	4.30	0.00	-14.42
2	308.00	31.0 QP	46.00	-15.00	1.71H	83	12.43	13.38	5.19	0.00	-18.57
3	396.00	25.0 QP	46.00	-21.00	1.02H	3	2.91	15.96	6.13	0.00	-22.09
4	572.00	27.5 QP	46.00	-18.50	1.49H	149	1.60	18.25	7.65	0.00	-25.90
5	748.20	34.0 QP	46.00	-12.00	1.09H	350	5.11	20.14	8.75	0.00	-28.89
6	836.00	30.5 QP	46.00	-15.50	1.72H	72	0.53	20.54	9.43	0.00	-29.98
7	880.00	30.9 QP	46.00	-15.10	1.24H	230	0.52	20.68	9.70	0.00	-30.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	132.00	31.0 QP	43.50	-12.50	1.48V	17	16.47	11.16	3.37	0.00	-14.53
2	176.00	25.0 QP	43.50	-18.50	1.14V	3	12.12	9.08	3.80	0.00	-12.88
3	220.00	28.0 QP	46.00	-18.00	1.02V	8	13.58	10.12	4.30	0.00	-14.42
4	308.00	28.0 QP	46.00	-18.00	1.07V	355	9.43	13.38	5.19	0.00	-18.57
5	440.00	25.0 QP	46.00	-21.00	1.38V	88	2.20	16.32	6.49	0.00	-22.81
6	572.00	28.0 QP	46.00	-18.00	1.36V	21	2.10	18.25	7.65	0.00	-25.91
7	748.00	30.0 QP	46.00	-16.00	1.05V	262	1.11	20.14	8.75	0.00	-28.89

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
 3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.



EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 85%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	41.5 PK	74.00	-32.50	1.37H	348	50.50	26.37	1.38	36.80	9.05
2	*2412.00	90.5 PK	-	-	1.38H	23	97.00	27.67	2.53	36.72	6.53
3	*2412.00	84.5 AV	-	-	1.38H	23	91.00	27.67	2.53	36.72	6.53
4	4076.00	43.5 PK	74.00	-30.50	1.09H	150	46.00	30.38	3.63	36.52	2.51
5	4824.00	46.0 PK	74.00	-28.00	1.33H	116	47.20	31.52	4.01	36.70	1.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	43.0 PK	74.00	-31.00	1.20V	28	52.00	26.37	1.38	36.80	9.05
2	*2412.00	97.3 AV	-	-	1.07V	349	103.80	27.67	2.53	36.72	6.53
3	*2412.00	103.3 PK	-	-	1.07V	349	109.80	27.67	2.53	36.72	6.53
4	4076.00	48.5 PK	74.00	-25.50	1.57V	350	51.00	30.38	3.63	36.52	2.51
5	4824.00	43.8 PK	74.00	-30.20	1.35V	237	45.00	31.52	4.01	36.70	1.18
6	6114.00	45.2 PK	74.00	-28.80	1.00V	6	44.20	32.98	4.78	36.74	-1.02
7	8152.00	48.6 PK	74.00	-25.40	1.12V	287	43.20	36.93	5.82	37.33	-5.42

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
 3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.
 6. “ * “ = Fundamental frequency



EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 85%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	39.2 PK	74.00	-34.80	1.21H	3	48.00	26.51	1.51	36.79	8.77
2	*2437.00	88.8 AV	-	-	1.00H	147	95.00	27.81	2.66	36.71	6.24.
3	*2437.00	94.8 PK	-	-	1.00H	147	101.00	27.81	2.66	36.71	6.25
4	4126.00	42.6 PK	74.00	-31.40	1.47H	2	45.00	30.50	3.66	36.56	2.40
5	4874.00	44.9 PK	74.00	-29.10	1.10H	38	46.00	31.59	4.03	36.70	1.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	38.2 PK	74.00	-35.80	1.22V	3	47.00	26.51	1.51	36.79	8.77
2	*2437.00	96.8 AV	-	-	1.05V	10	103.00	27.81	2.66	36.71	6.24.
3	*2437.00	102.8 PK	-	-	1.05V	10	109.00	27.81	2.66	36.71	6.24.
4	4126.00	49.6 PK	74.00	-24.40	1.12V	4	52.00	30.50	3.66	36.56	2.39.
5	4874.00	44.9 PK	74.00	-29.10	1.19V	170	46.00	31.59	4.03	36.70	1.09
6	6188.00	45.9 PK	74.00	-28.10	1.21V	315	44.70	33.30	4.67	36.77	-1.20
7	8250.00	47.5 PK	74.00	-26.50	1.31V	5	42.00	36.95	5.87	37.35	-5.47

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
 3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.
 6. “ * “ = Fundamental frequency



EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 85%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	41.5 PK	74.00	-32.50	1.01H	285	50.00	26.66	1.64	36.78	8.49
2	*2463.00	88.8 PK	-	-	1.69H	68	95.00	27.81	2.66	36.71	6.25
3	*2463.00	83.8 AV	-	-	1.69H	68	90.00	27.81	2.66	36.71	6.25
4	2485.00	42.0 PK	74.00	-32.00	1.31H	82	48.00	27.96	2.78	36.70	5.97
5	4176.00	46.7 PK	74.00	-27.30	1.63H	290	49.00	30.56	3.68	36.58	2.34
6	4924.00	43.0 PK	74.00	-31.00	1.49H	353	44.00	31.66	4.06	36.70	0.99
7	6263.00	46.4 PK	74.00	-27.60	1.11H	9	45.00	33.63	4.56	36.81	-1.39
8	8351.00	46.5 PK	74.00	-27.50	1.19H	279	41.00	36.97	5.89	37.37	-5.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	39.5 PK	74.00	-34.50	1.24V	357	48.00	26.66	1.64	36.78	8.49
2	*2463.00	97.8 AV	-	-	1.04V	356	104.00	27.81	2.66	36.71	6.24
3	*2463.00	104.4 PK	-	-	1.04V	356	110.60	27.81	2.66	36.71	6.24
4	2486.00	41.0 PK	74.00	-33.00	1.05V	16	47.00	27.96	2.78	36.70	5.97
5	4176.00	51.5 PK	74.00	-22.50	1.26V	12	53.80	30.56	3.68	36.58	2.34
6	4924.00	47.0 PK	74.00	-27.00	1.21V	97	48.00	31.66	4.06	36.70	1.00
7	6263.00	45.4 PK	74.00	-28.60	1.00V	8	44.00	33.63	4.56	36.81	-1.38
8	8351.00	47.5 PK	74.00	-26.50	1.17V	33	42.00	36.97	5.89	37.37	-5.50

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
 3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.
 6. “ * “ = Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

Notes:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	29 deg. C, 58%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	15.80	0.5	PASS
6	2437	15.80	0.5	PASS
11	2462	15.80	0.5	PASS




CH1

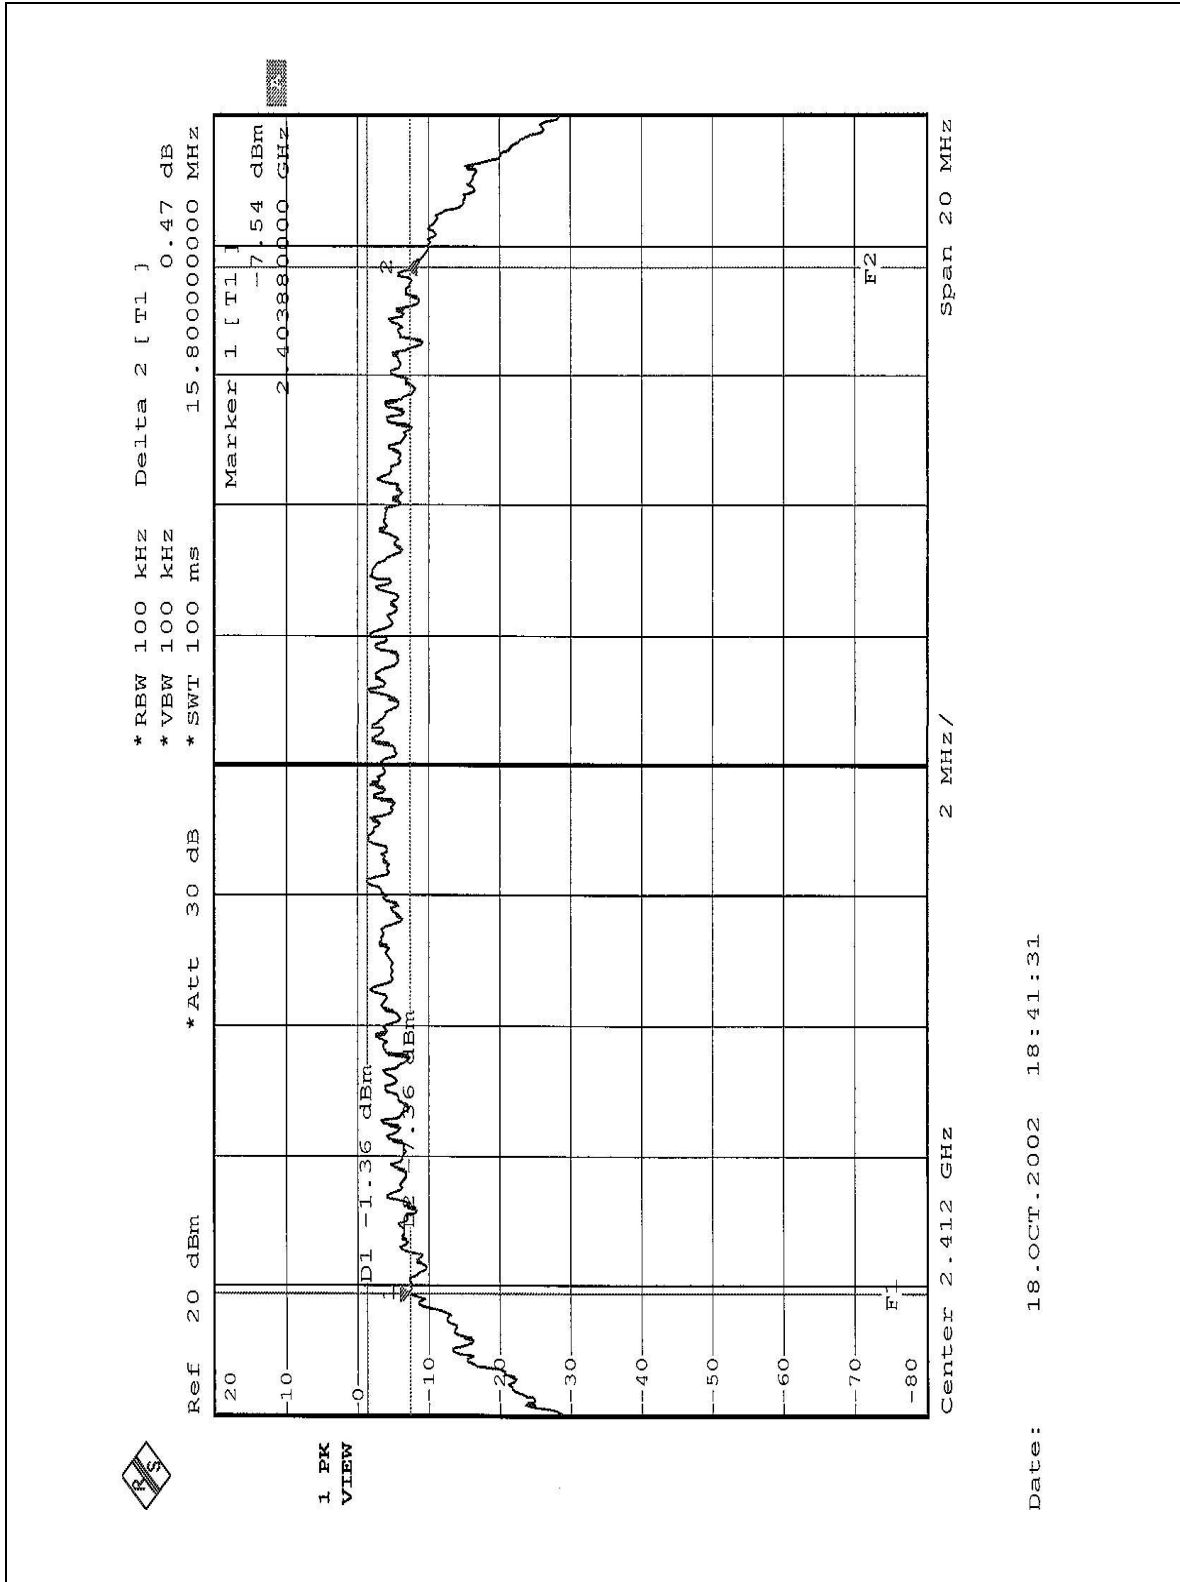

Date: 18.OCT.2002 18:41:31




CH6

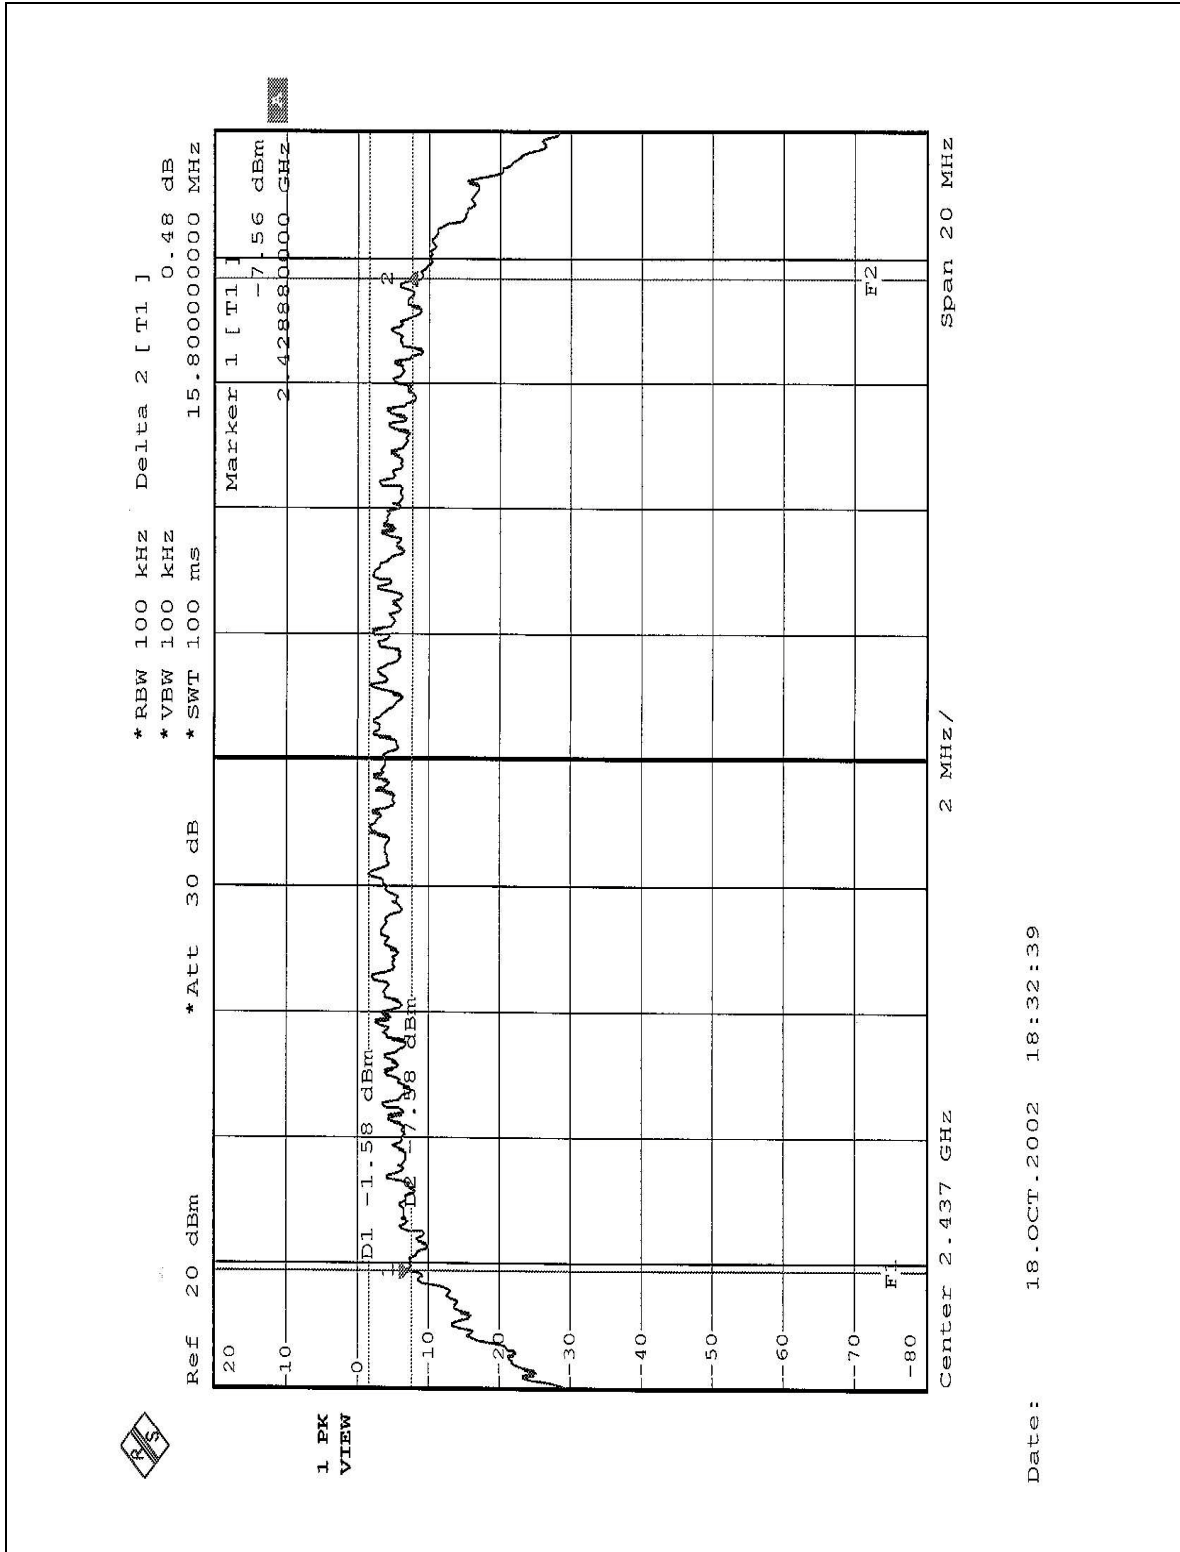

Date: 18.OCT.2002 18:32:39



CH11

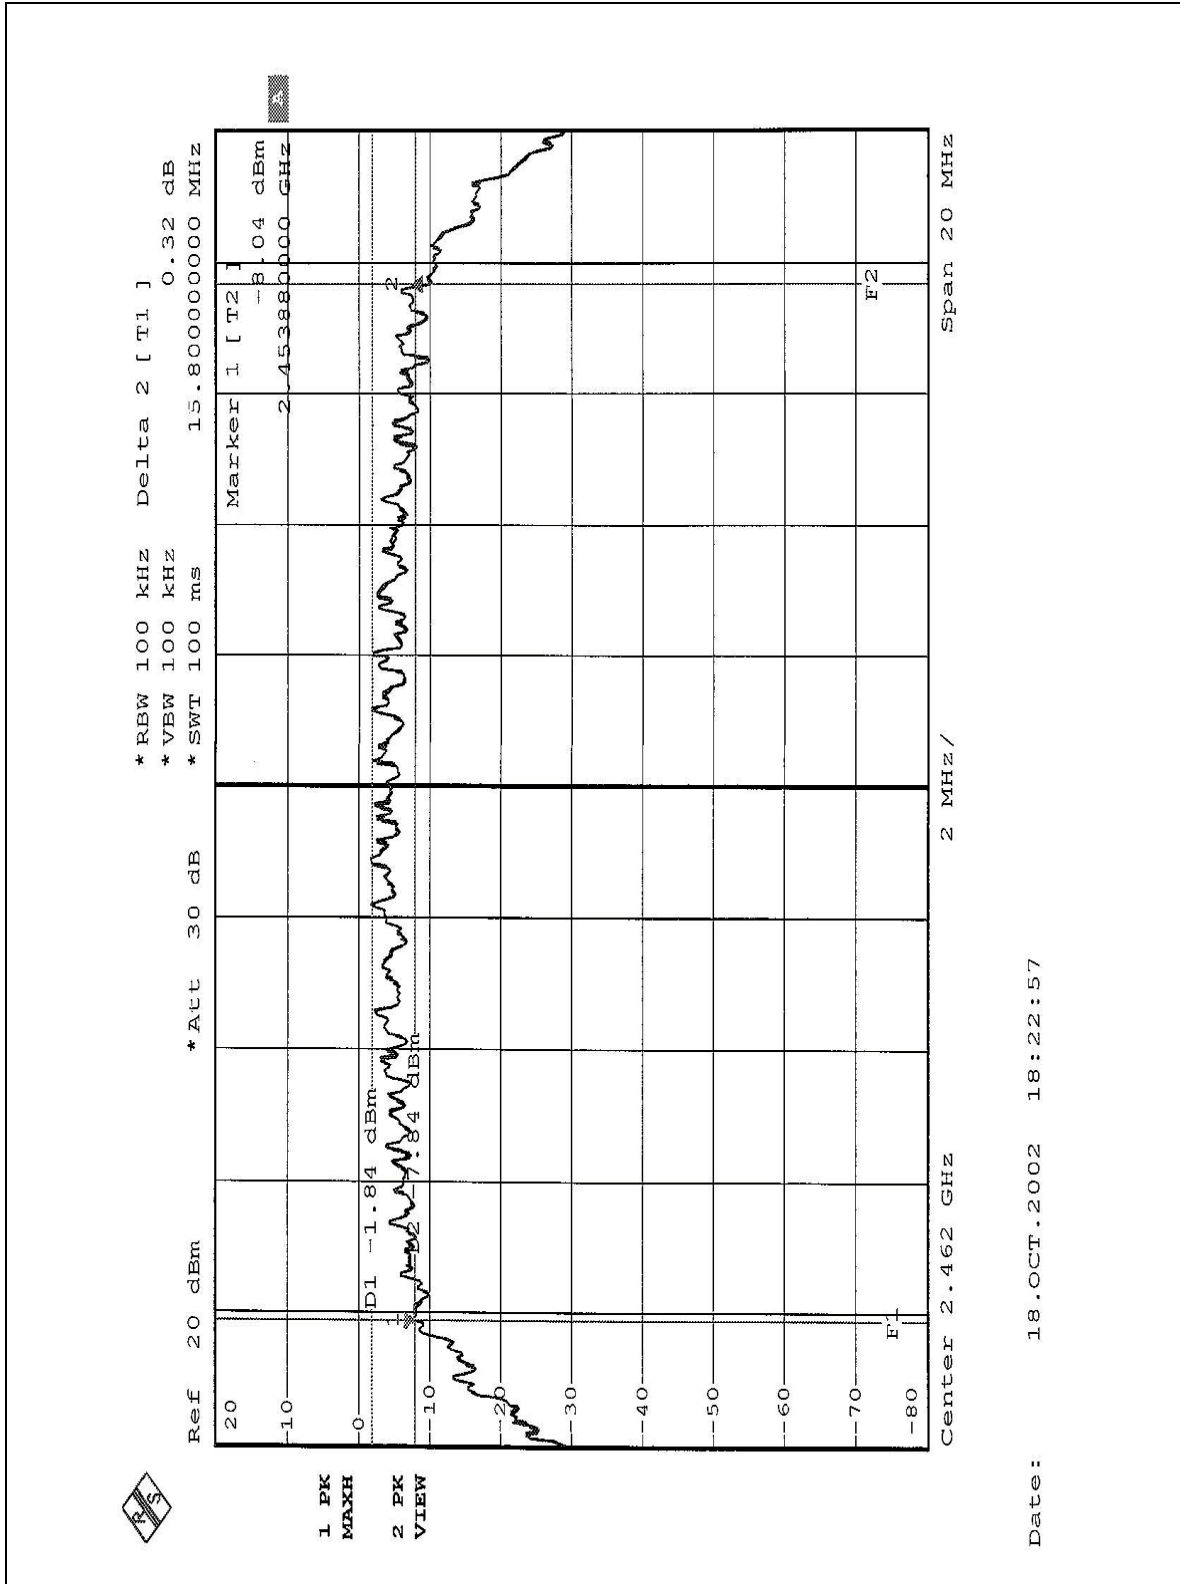

Date: 18.OCT.2002 18:22:57



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
PEAK POWER SENSOR	NRV-Z32	100013	Feb. 23, 2003
POWER METER	NRVS	100026	Feb. 23, 2003

- NOTE:** 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	29 deg. C, 58%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	12.80	30	PASS
6	2437	12.70	30	PASS
11	2462	12.40	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

- NOTE:**1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

EUT	Lexmark N5 Wireless Adapter	MODEL	4108-W01
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	29 deg. C, 58 %RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.57	8	PASS
6	2437	-12.52	8	PASS
11	2462	-12.81	8	PASS




CH1

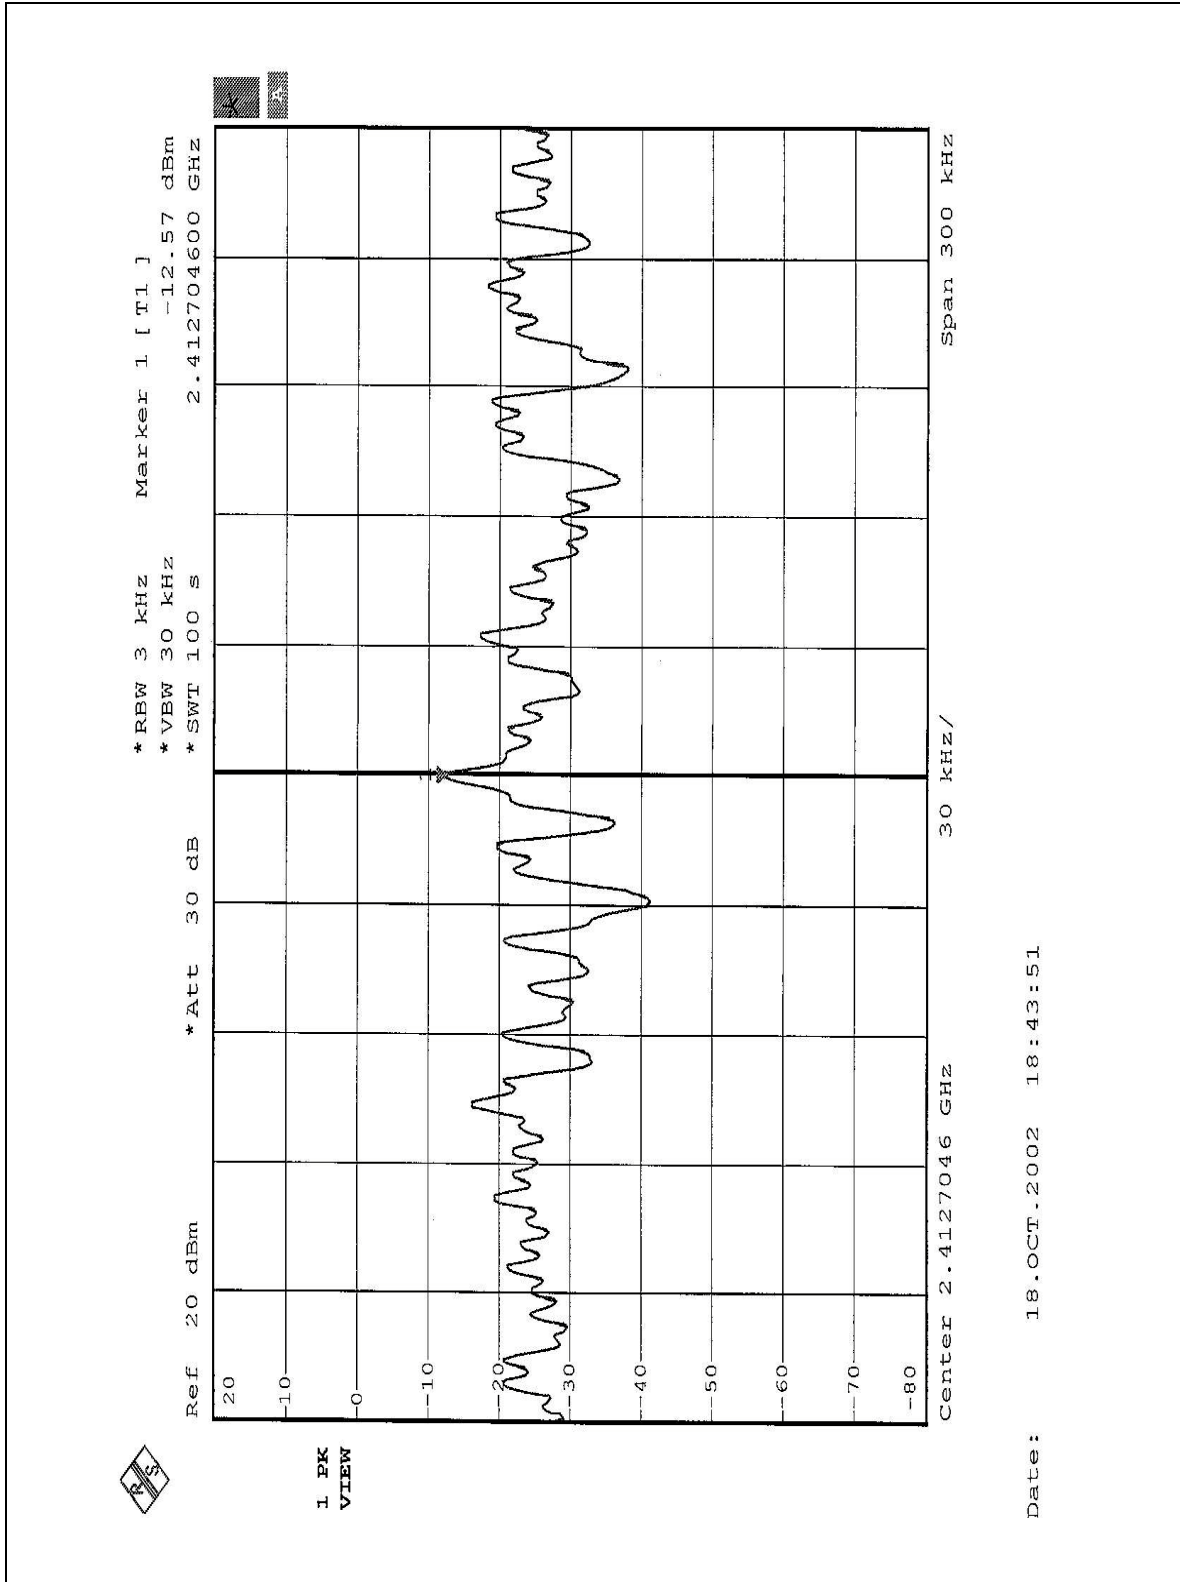




CH6

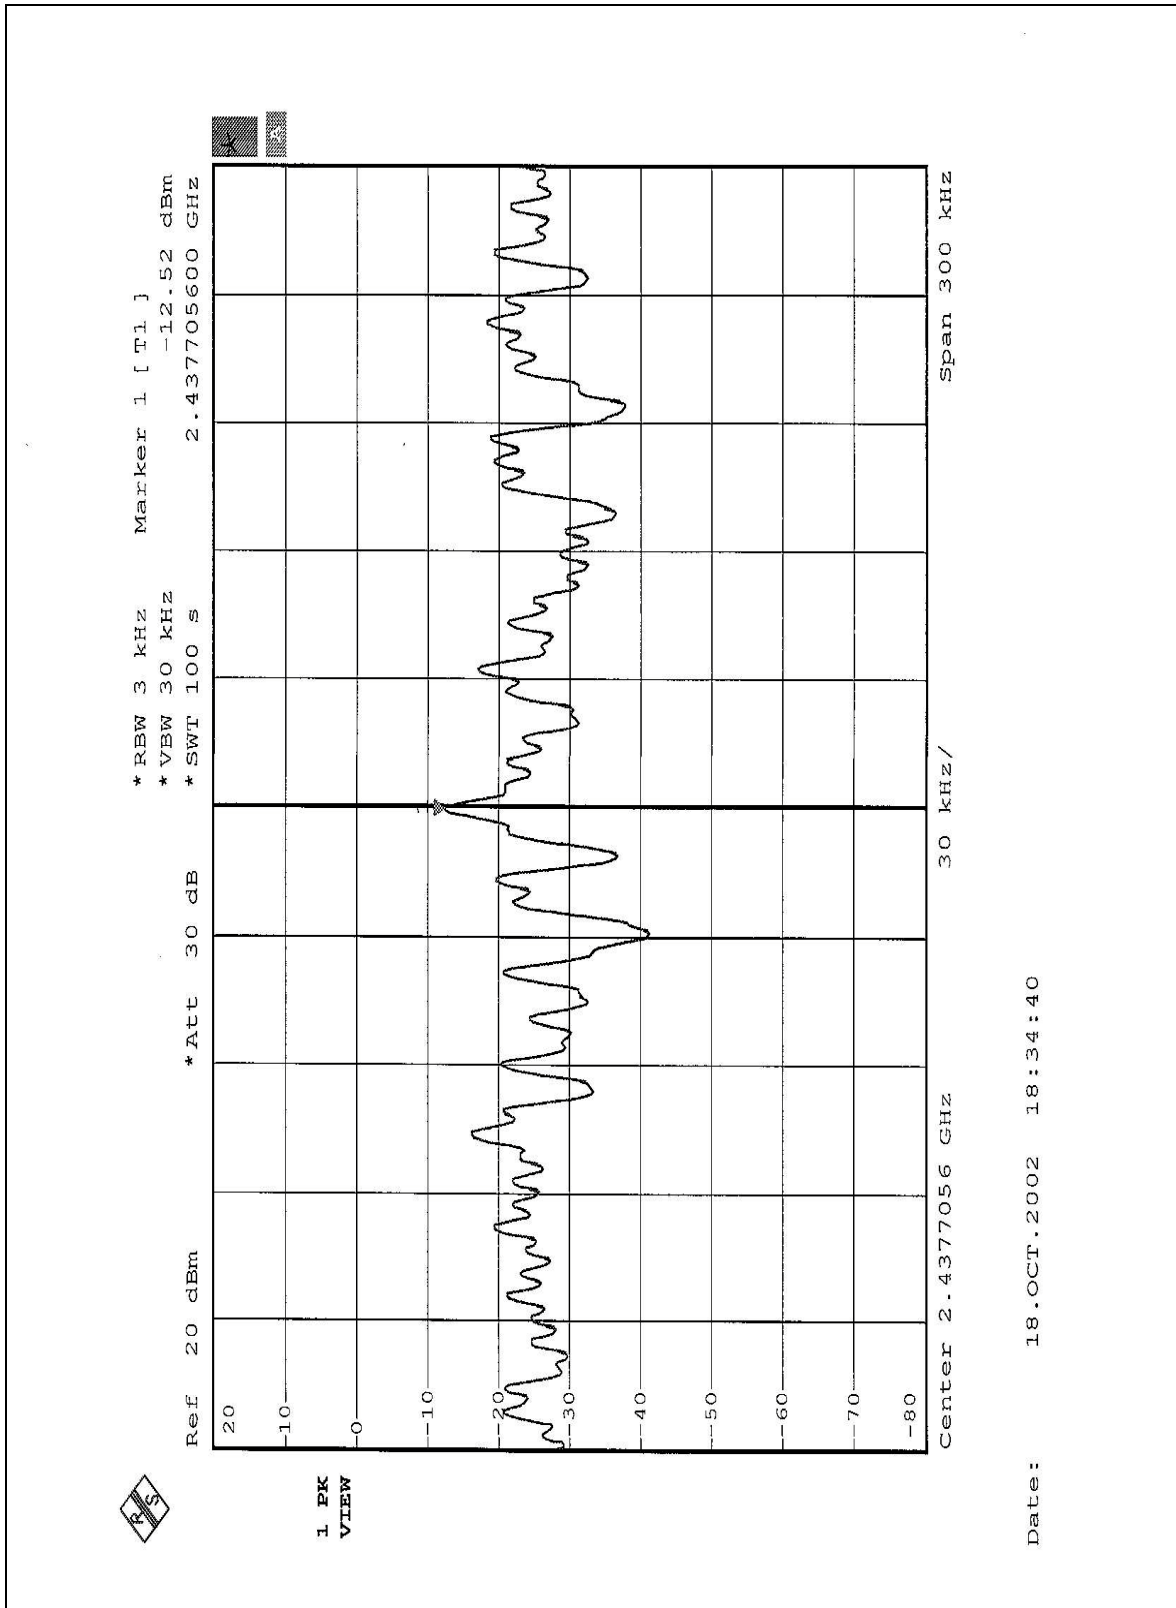



CH11

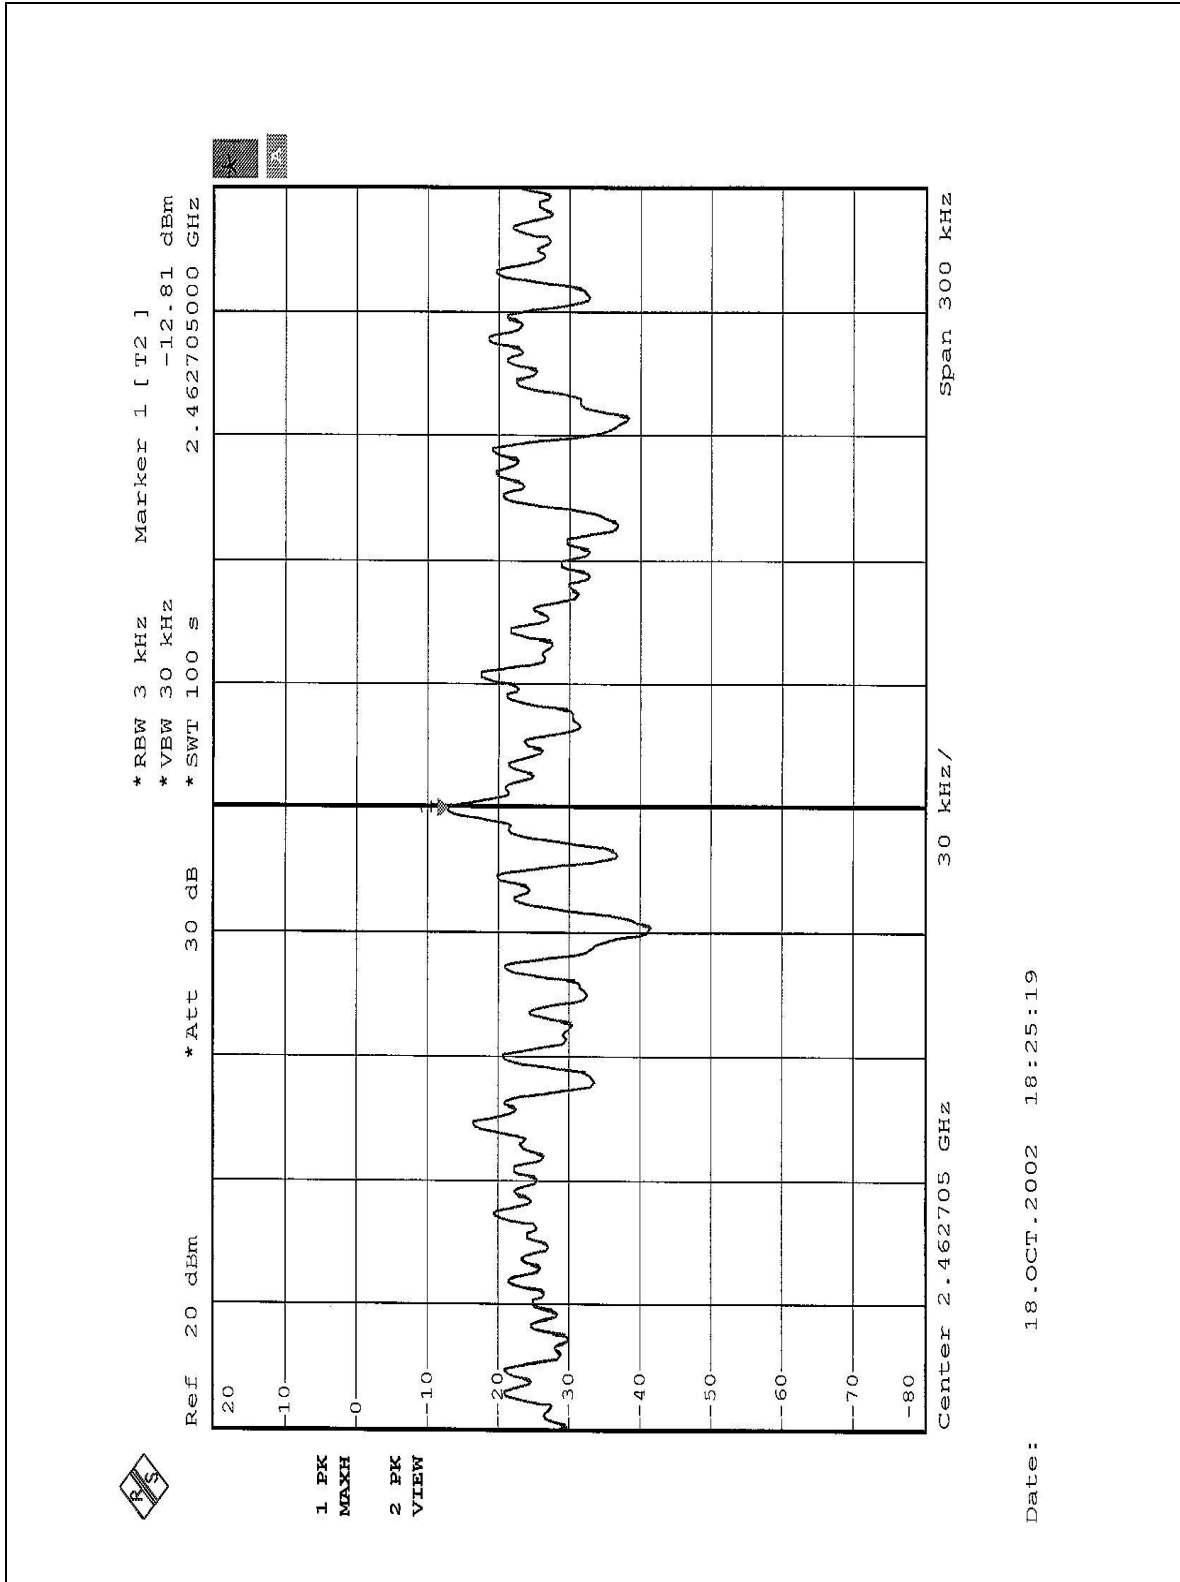



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6


4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE1: The band edge emission plot on the following first page shows 45.7dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.3dBuV/m, so the maximum field strength in restrict band is $97.3-45.7=51.6$ dBuV/m which is under 54 dBuV/m limit.

NOTE2: The band edge emission plot on the following second page shows 46.45dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 97.8dBuV/m, so the maximum field strength in restrict band is $97.8-46.1=51.7$ dBuV/m which is under 54 dBuV/m limit.

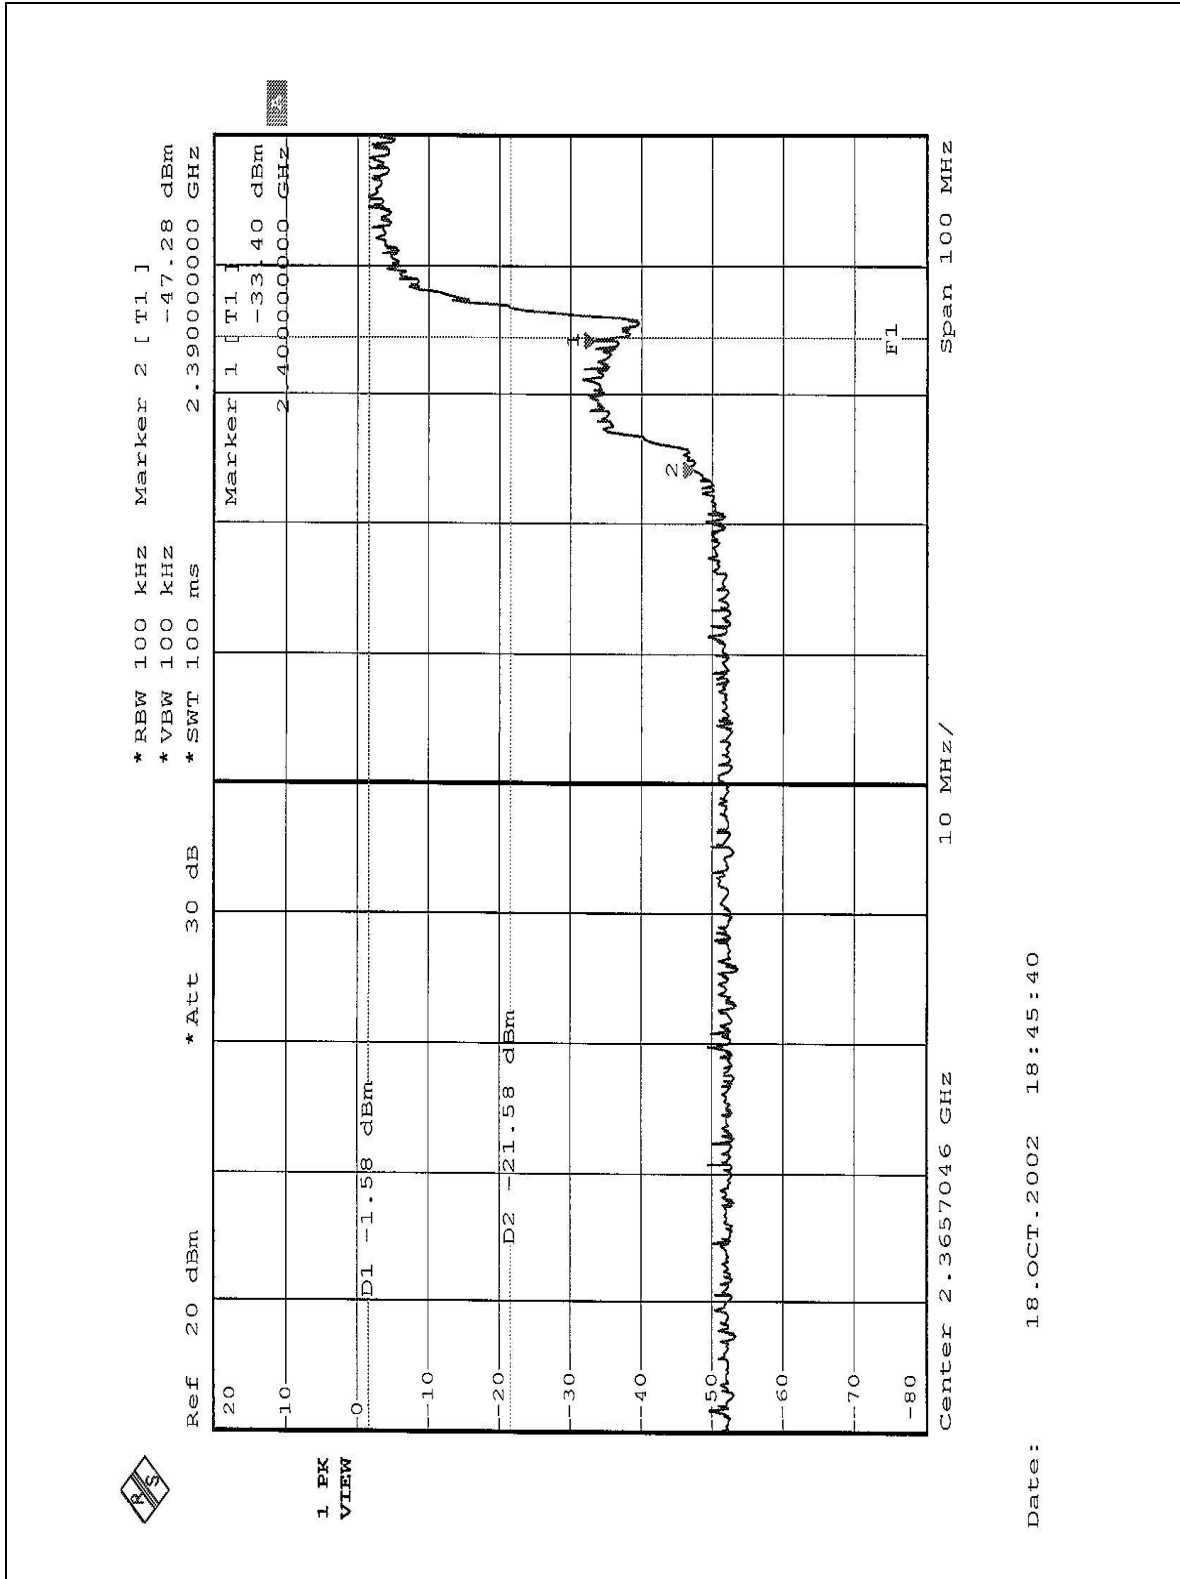

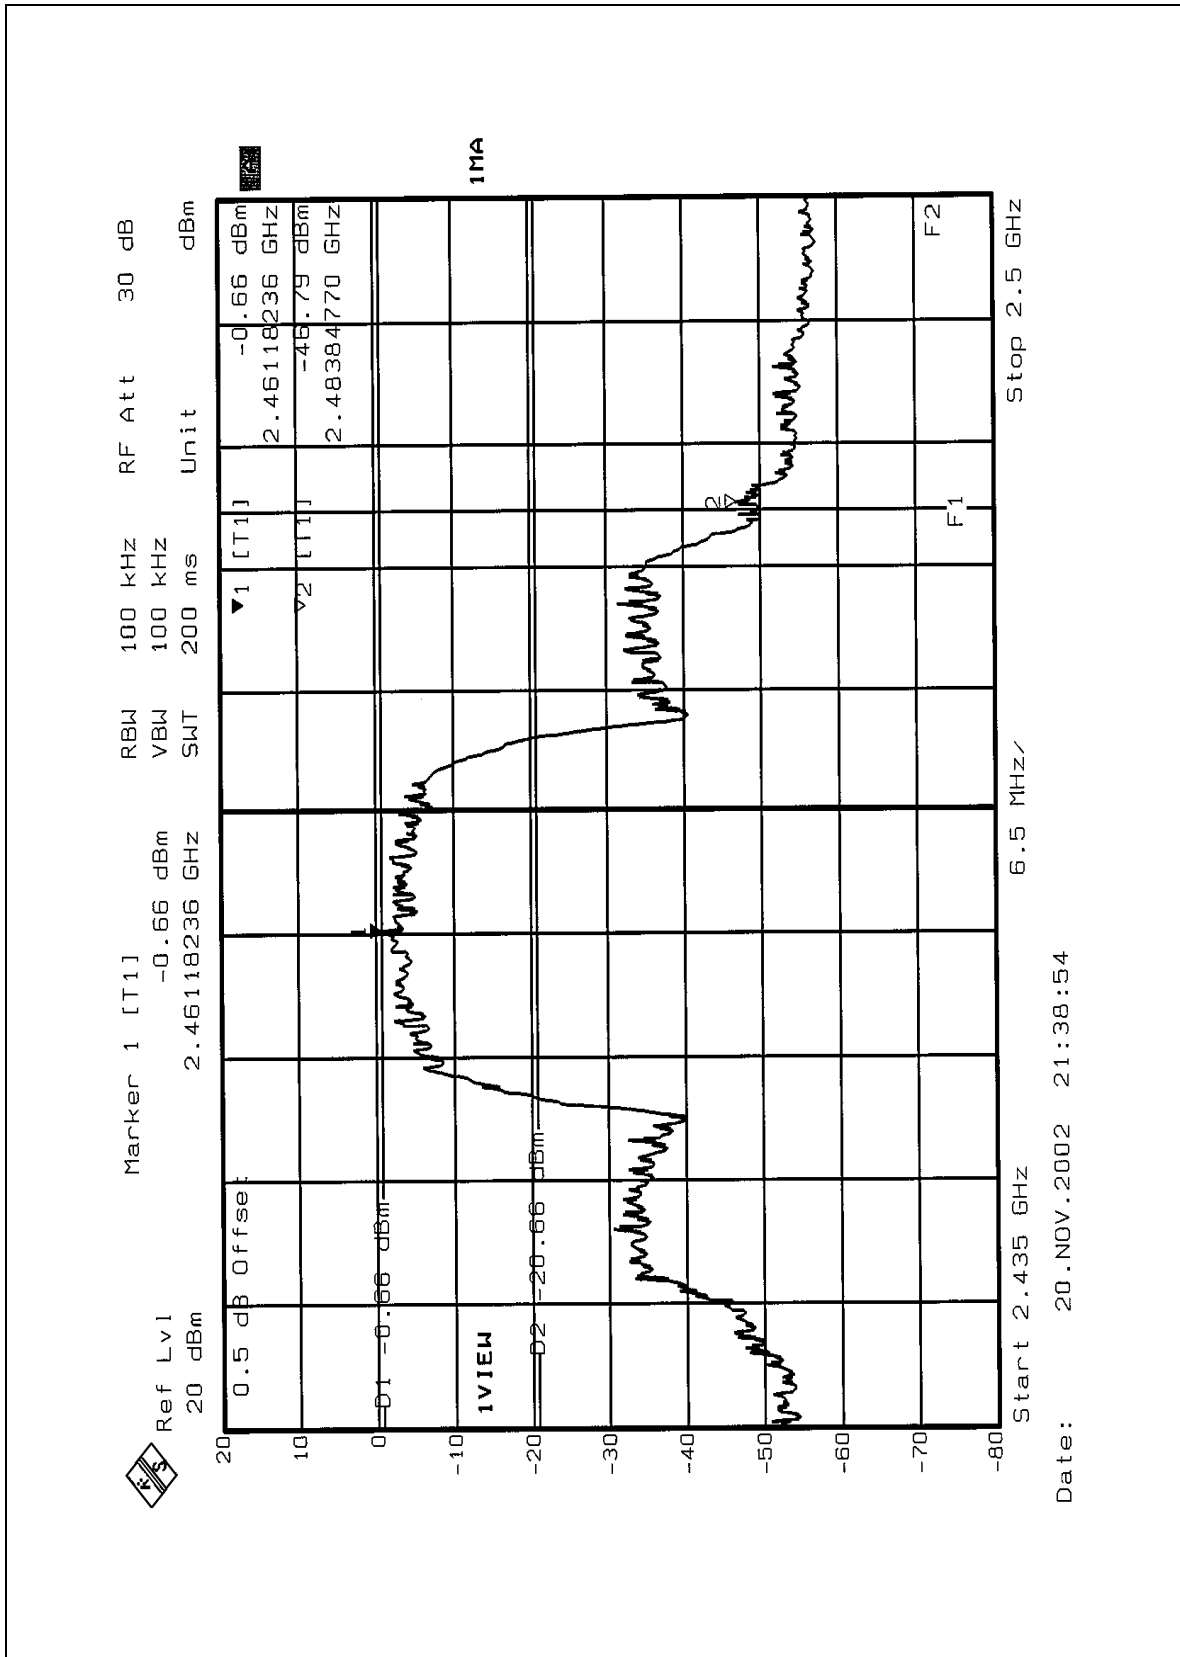



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna. There is no antenna connector. The maximum Gain of the antenna is 1dBi only.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.