



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: August 17, 2000

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Tron-Tek, Inc.
Equipment: TT-2012TS-AB
FCC ID: IZ3-TT-2012TS-AB
FCC Rules: 74F, 74.602, 74.637

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.' The signature is written in a cursive style with a horizontal line underneath the name.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Tron-Tek, Inc.

FCC ID: IZ3-TT-2012TS-AB

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
 - LABEL
 - LOCATION OF LABEL
 - COMPLIANCE STATEMENT
 - LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12)
4. DOCUMENTATION: 2.1033(c)
 - (3) USER MANUAL
 - (9) TUNE UP INFO
 - (10) SCHEMATIC DIAGRAM
 - (10) CIRCUIT DESCRIPTION
 - BLOCK DIAGRAM
 - PARTS LIST
 - ACTIVE DEVICES
5. PART 90.203(e) & (g) ATTESTATION

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Sub-part
2.1033(c):

EQUIPMENT IDENTIFICATION

FCC ID: IZ3-TT-2012TS-AB

NAMEPLATE DRAWING

ATTACHED, EXHIBIT 1.

LOCATION

AS PER LABEL DRAWING(S)

DATE OF REPORT

August 17, 2000

SUPERVISED BY:

A handwritten signature in black ink, appearing to read 'M. Flom, P. Eng.' The signature is fluid and cursive, with 'M. Flom' on the top line and 'P. Eng.' on the bottom line, both underlined.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1051	Unwanted Emissions (Transmitter Conducted)	9
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	16
2.1047(a)	Audio Low Pass Filter (Voice Input)	22
2.1047(a)	Audio Frequency Response	24
2.1055(a)(1)	Frequency Stability (Temperature Variation)	27
2.202(g)	Necessary Bandwidth and Emission Bandwidth	30

PAGE NO.

1 of 30.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85224

c) Report Number: d0080049

d) Client: Tron-Tek, Inc.
6570-B E. 51st St.
Tulsa, OK 74145

e) Identification: TT-2012TS-AB
Description: FCC ID: IZ3-TT-2012TS-AB
Broadcast Transmitter

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: August 17, 2000
EUT Received: May 26, 2000

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:


Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 30.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

74F, 74.602, 74.637

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Tron-Tek, Inc.
6570-B E. 51st St.
Tulsa, OK 74145

MANUFACTURER:

Tron-Tek, Inc.

(c)(2): FCC ID: IZ3-TT-2012TS-AB

MODEL NO: TT-2012TS-AB

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 18M0F5W, 18M0F9W

(c)(5): FREQUENCY RANGE, MHz: 1990.5 to 2110.5

(c)(6): POWER RATING, Watts: 2 to 12
____ Switchable Variable N/A

(c)(7): MAXIMUM POWER RATING, Watts: 12 (74.637)

PAGE NO.

3 of 30.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

M. FLOM ASSOCIATES, INC.

Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24th day of November, 1998.



Pete Flom
President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO [ISO/IEC GUIDE 25-1990 AND EN 45001]

M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3356 North San Marcos Place, Suite 107
Chandler, AZ 85225
Morton Flom Phone: 480 926 3100

ELECTRICAL (EMC)

Valid to: December 31, 2000

Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13439
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97

Revised 2/2/2000

Pete Flom

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8370 • Phone: 301 644 3248 • Fax: 301 662 2974



"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO. 4 of 30.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 12

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
X N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 30.

Sub-part

2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ____ 21 - Domestic Public Fixed Radio Services
- ____ 22 - Public Mobile Services
- ____ 22 Subpart H - Cellular Radiotelephone Service
- ____ 22.901(d) - Alternative technologies and auxiliary services
- ____ 23 - International Fixed Public Radiocommunication services
- ____ 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- ____ 80 - Stations in the Maritime Services
- ____ 80 Subpart E - General Technical Standards
- ____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- ____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ____ 80 Subpart X - Voluntary Radio Installations
- ____ 87 - Aviation Services
- ____ 90 - Private Land Mobile Radio Services
- ____ 94 - Private Operational-Fixed Microwave Service
- ____ 95 Subpart A - General Mobile Radio Service (GMRS)
- ____ 95 Subpart C - Radio Control (R/C) Radio Service
- ____ 95 Subpart D - Citizens Band (CB) Radio Service
- ____ 95 Subpart E - Family Radio Service
- ____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ____ 97 - Amateur Radio Service
- ____ 101 - Fixed Microwave Services

PAGE NO.

6 of 30.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 30.

NAME OF TEST: Carrier Output Power (Conducted)

SPECIFICATION: 47 CFR 2.1046(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 1990.6, 2049.6

POWER SETTING	R. F. POWER, WATTS
Low	2
High	12

SUPERVISED BY:




Morton Flom, P. Eng.

PAGE NO.

8 of 30.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

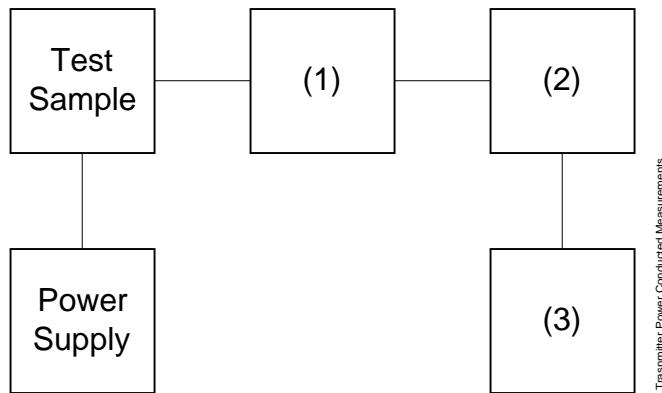

Asset Description (as applicable)	s/n
(1) COAXIAL ATTENUATOR	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(2) POWER METERS	
i00014 HP 435A	1733A05836
i00039 HP 436A	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
(3) FREQUENCY COUNTER	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 9 of 30.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 1990.6, 2049.6

SPECTRUM SEARCHED, GHz = 0 to 10 x F_c

MAXIMUM RESPONSE, Hz =

ALL OTHER EMISSIONS = \geq 20 dB BELOW LIMIT

LIMIT(S), dBc

$-(43+10x\log P) = -46$ (2 Watts)

$-(43+10x\log P) = -53.8$ (12 Watts)

SUPERVISED BY:



Morton Flom, P. Eng.

PAGE NO.

10 of 30.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

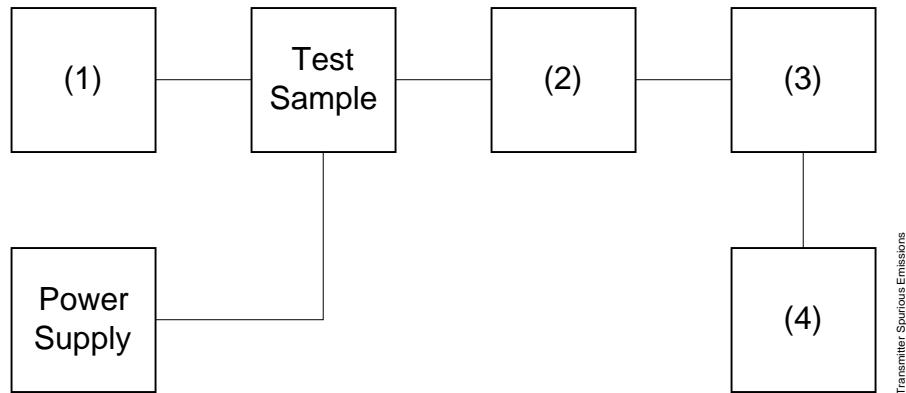

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.

11 of 30.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
g0060016: 2000-Jun-20 Tue 12:18:00
STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1990.600000	3980.879000	-50	-83	-37
2049.600000	4099.246000	-49.7	-82.7	-36.7
1990.600000	5971.523000	-44.8	-77.8	-31.8
2049.600000	6148.853000	-44.1	-77.1	-31.1
1990.600000	7962.216000	-44.7	-77.7	-31.7
2049.600000	8198.391000	-43.9	-76.9	-30.9
1990.600000	9952.699000	-44.2	-77.2	-31.2
2049.600000	10247.778000	-44.2	-77.2	-31.2
1990.600000	11944.094000	-43.1	-76.1	-30.1
2049.600000	12297.546000	-44.7	-77.7	-31.7
1990.600000	13934.617000	-39.8	-72.8	-26.8
2049.600000	14347.318000	-37.2	-70.2	-24.2
1990.600000	15924.610000	-37.7	-70.7	-24.7
2049.600000	16396.679000	-39.1	-72.1	-26.1
1990.600000	17915.317000	-37.6	-70.6	-24.6
2049.600000	18445.943000	-39	-72	-26
1990.600000	19905.623000	-32	-65	-19
2049.600000	20495.563000	-31.6	-64.6	-18.6
1990.600000	21896.265000	-31.1	-64.1	-18.1

PAGE NO.

12 of 30.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
g0060015: 2000-Jun-20 Tue 12:16:00
STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1990.600000	3981.032000	-37.6	-78.3	-24.6
2049.600000	4098.857000	-38.3	-79	-25.3
1990.600000	5971.544000	-31.9	-72.6	-18.9
2049.600000	6148.697000	-32.4	-73.1	-19.4
1990.600000	7962.252000	-31.9	-72.6	-18.9
2049.600000	8198.261000	-33	-73.7	-20
1990.600000	9953.433000	-31.6	-72.3	-18.6
2049.600000	10247.945000	-32.4	-73.1	-19.4
1990.600000	11943.781000	-31.9	-72.6	-18.9
2049.600000	12297.629000	-32.5	-73.2	-19.5
1990.600000	13934.337000	-26.5	-67.2	-13.5
2049.600000	14347.067000	-27	-67.7	-14
1990.600000	15925.133000	-25.6	-66.3	-12.6
2049.600000	16397.155000	-25.3	-66	-12.3
1990.600000	17915.498000	-25.3	-66	-12.3
2049.600000	18446.173000	-25.4	-66.1	-12.4
1990.600000	19905.715000	-19.4	-60.1	-6.4
2049.600000	20496.223000	-18.2	-58.9	-5.2
1990.600000	21896.192000	-17	-57.7	-4

PAGE NO. 13 of 30.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12


TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 2.948, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2003.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.

The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.

4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
5. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
6. The worst case for all channels is shown.
7. Measurement results: ATTACHED FOR WORST CASE

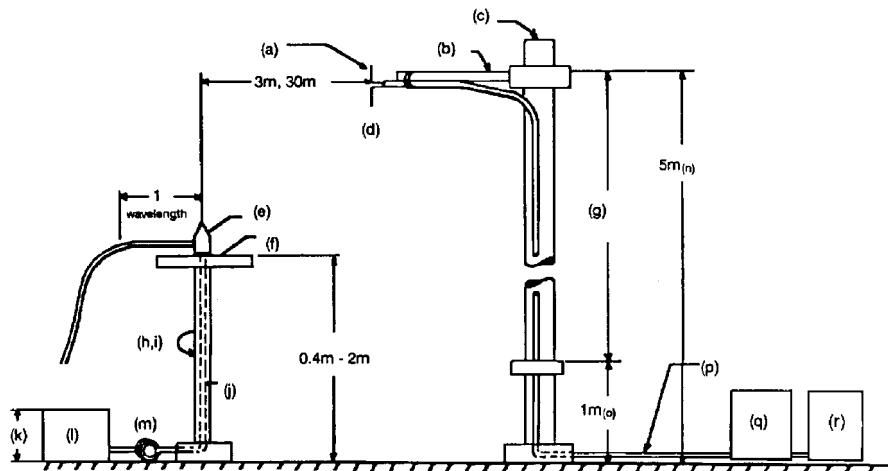RADIATED TEST SETUP

NOTES:

- (a) Search Antenna - Rotatable on boom
- (b) Non-metallic boom
- (c) Non-metallic mast
- (d) Adjustable horizontally
- (e) Equipment Under Test
- (f) Turntable
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable
- (j) Cables routed through hollow turntable center
- (k) 30 cm or less
- (l) External power source
- (m) 10 cm diameter coil of excess cable
- (n) 25 cm (V), 1 m-7 m (V, H)
- (o) 25 cm from bottom end of 'V', 1m normally
- (p) Calibrated Cable at least 10m in length
- (q) Amplifier (optional)
- (r) Spectrum Analyzer

Asset Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992, 10.1.4			
<u>TRANSDUCER</u>			
i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-99
i00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-99
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-99
i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-99
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-00
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Aug-99
i00033 HP 85462A	3625A00357	12 mo.	May-00
i00048 HP 8566B	2511AD1467	6 mo.	May-00

PAGE NO. 15 of 30.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS = \geq 20 dB BELOW LIMIT

EMISSION, MHz/HARMONIC	SPURIOUS LEVEL, dBc	
	Low	High
2nd to 10th	<-60	<-55

SUPERVISED BY:



Morton Flom, P. Eng.

PAGE NO. 16 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

17 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0060154: 2000-Jun-19 Mon 14:41:00
 STATE: 1:Low Power

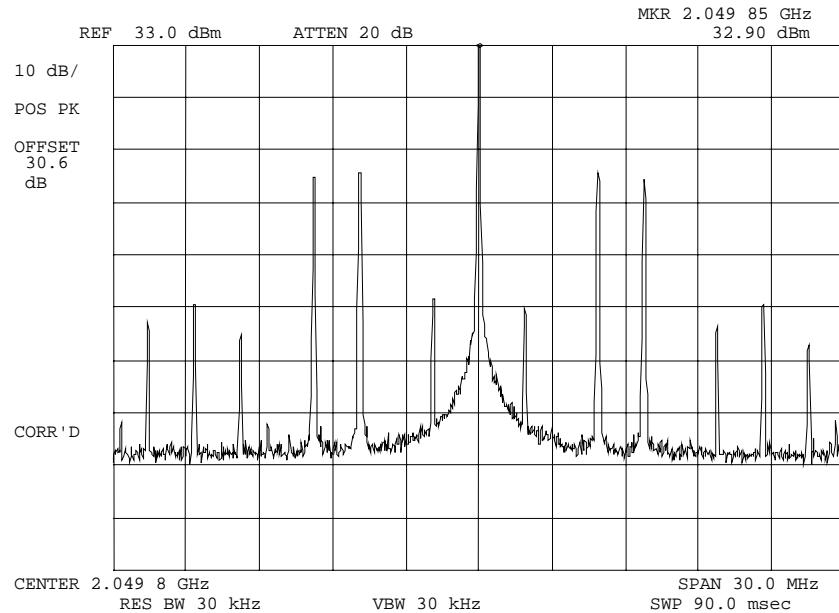

POWER: LOW
 MODULATION: NONE


SUPERVISED BY:


 Morton Flom, P. Eng.

PAGE NO.

18 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0060155: 2000-Jun-19 Mon 14:42:00
 STATE: 1:Low Power

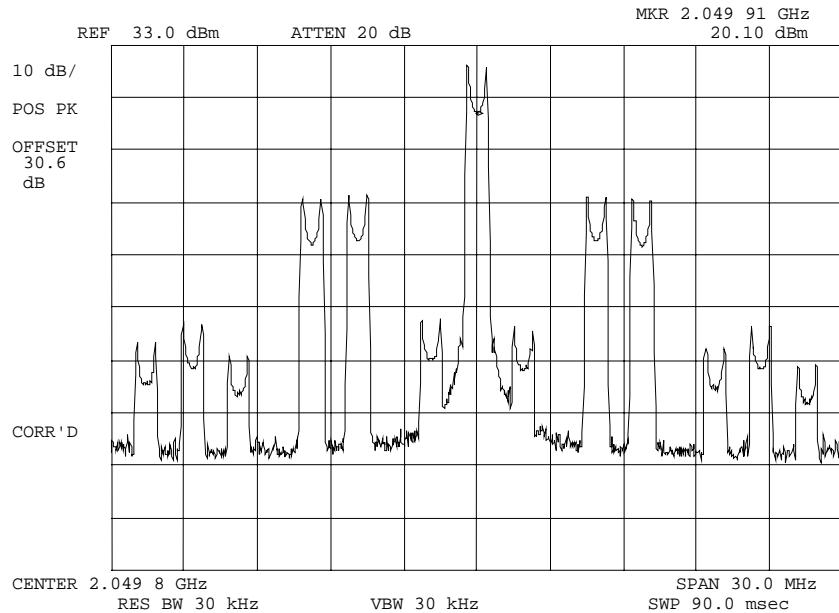

POWER: LOW
 MODULATION: 10 KHZ @ 1 VOLT

SUPERVISED BY:




Morton Flom, P. Eng.

PAGE NO.

19 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0060156: 2000-Jun-19 Mon 14:43:00
 STATE: 1:Low Power

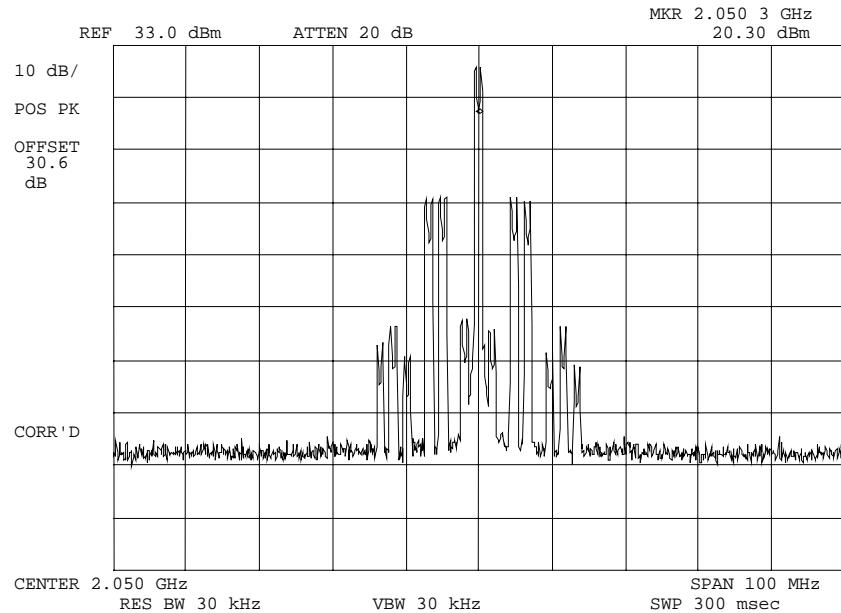

POWER: LOW
 MODULATION: 10 KHZ @ 1 VOLT

SUPERVISED BY:




Morton Flom, P. Eng.

PAGE NO.

20 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0060152: 2000-Jun-19 Mon 14:33:00
 STATE: 2:High Power

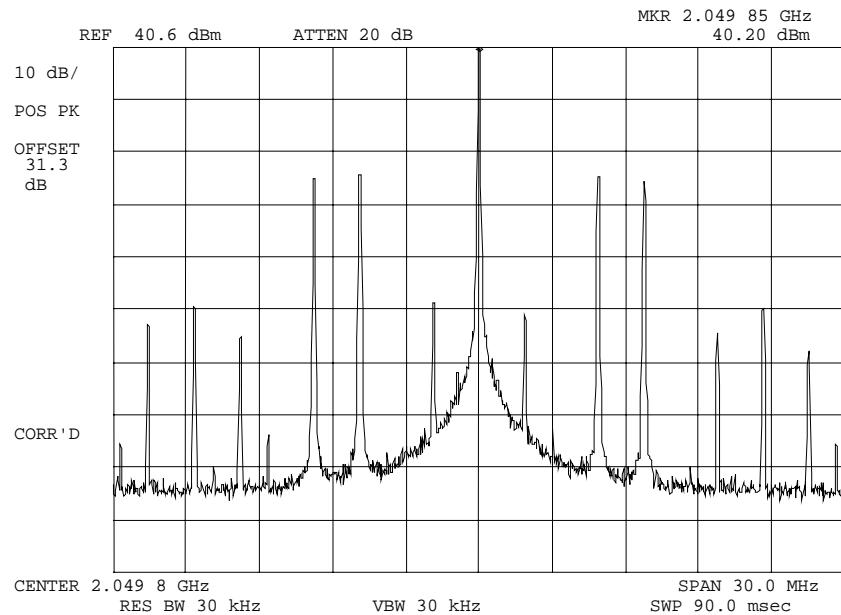

POWER: HIGH
 MODULATION: NONE

SUPERVISED BY:




Morton Flom, P. Eng.

PAGE NO.

21 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0060153: 2000-Jun-19 Mon 14:38:00
 STATE: 2:High Power

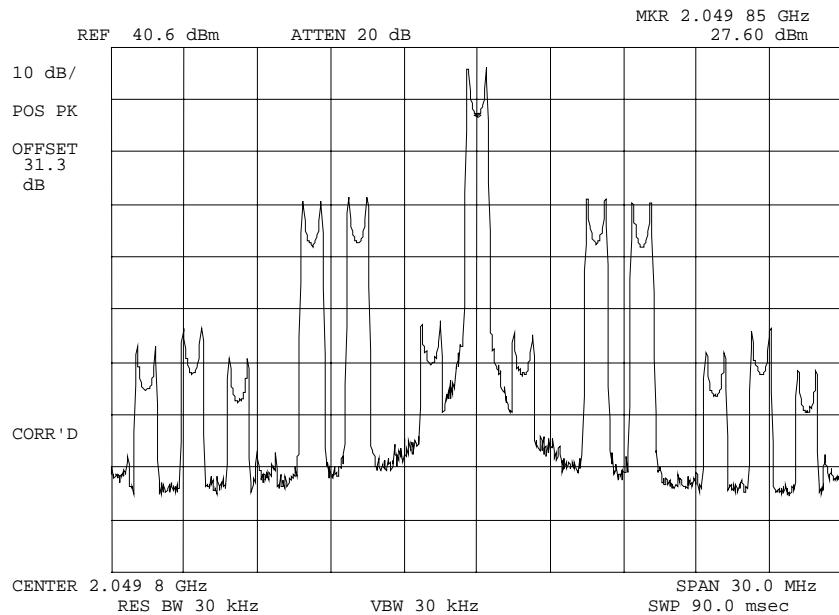

POWER: HIGH
 MODULATION: 10 KHZ @ 1 VOLT

SUPERVISED BY:




Morton Flom, P. Eng.

PAGE NO.

22 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0060151: 2000-Jun-19 Mon 14:32:00
STATE: 2:High Power

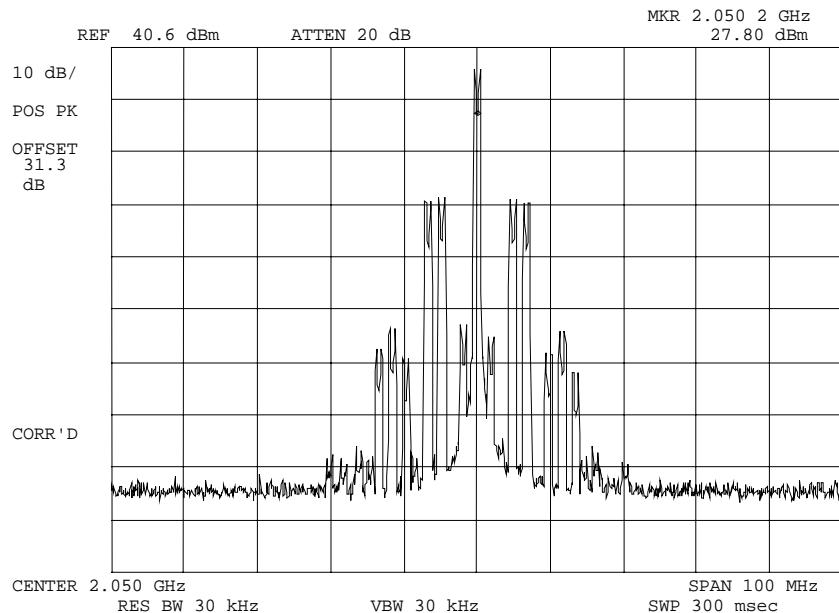

POWER:

HIGH

MODULATION:

10 KHZ @ 1 VOLT
74.602SUPERVISED BY:
Morton Flom, P. Eng.PAGE NO.

22 of 30.

NAME OF TEST:

Audio Low Pass Filter (Voice Input)

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 24 of 30.

NAME OF TEST: Audio Frequency Response

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

25 of 30.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
 TEST B. AUDIO FREQUENCY RESPONSE
 TEST C. HUM AND NOISE LEVEL
 TEST D. RESPONSE OF LOW PASS FILTER
 TEST E. MODULATION LIMITING

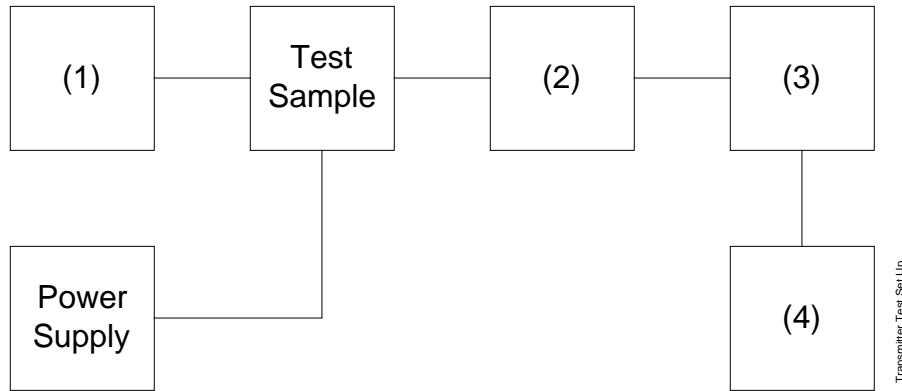


Asset (as applicable)	Description	s/n
(1) <u>Audio Oscillator</u>		
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00118	HP 33120A	US36002064
(2) <u>COAXIAL ATTENUATOR</u>		
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3) <u>MODULATION ANALYZER</u>		
i00020	HP 8901A	2105A01087
(4) <u>AUDIO ANALYZER</u>		
i00017	HP 8903A	2216A01753

PAGE NO.

26 of 30.

Low Pass Filter Frequency Response

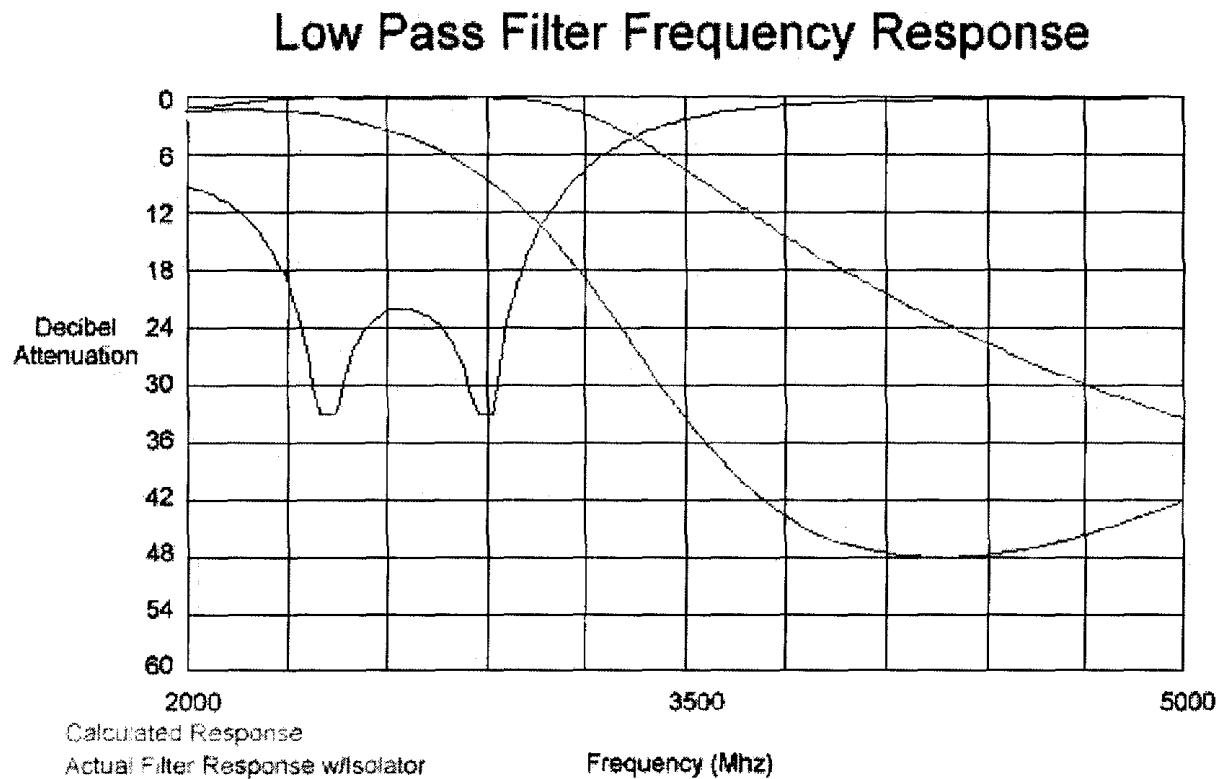

PAGE NO. 27 of 30.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

28 of 30.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

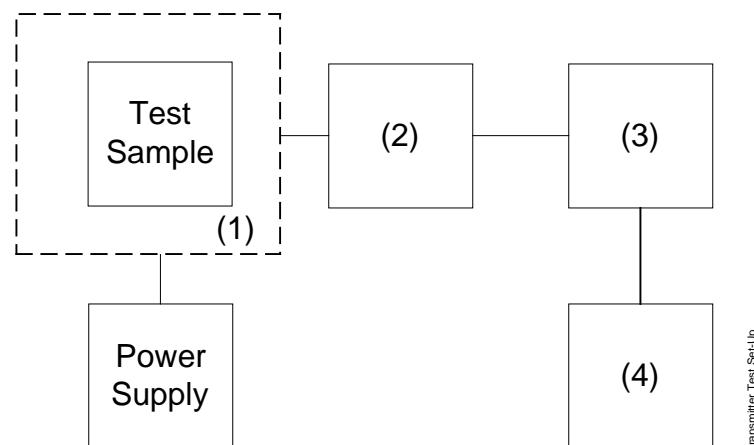

Transmitter Test Set Up

Asset Description (as applicable)		s/n
(1) TEMPERATURE, HUMIDITY, VIBRATION		
i00027 Tenny Temp. Chamber		9083-765-234
i00 Weber Humidity Chamber		
i00 L.A.B. RVH 18-100		
(2) COAXIAL ATTENUATOR		
i00122 NARDA 766-10		7802
i00123 NARDA 766-10		7802A
i00113 SIERRA 661A-3D		1059
i00069 BIRD 8329 (30 dB)		10066
(3) R.F. POWER		
i00014 HP 435A POWER METER		1733A05839
i00039 HP 436A POWER METER		2709A26776
i00020 HP 8901A POWER MODE		2105A01087
(4) FREQUENCY COUNTER		
i00042 HP 5383A		1628A00959
i00019 HP 5334B		2704A00347
i00020 HP 8901A		2105A01087

PAGE NO.

29 of 30.

Operating Temperature Specifications

The Transmitter was tested on Channel 4 2050.5 Mhz

Temperature – Degrees Celcius	Measured Frequency
0	2050.505
10	2050.504
20	2050.504
30	2050.504
40	2050.503
50	2050.509

The unit has a drift of 5 kHz over temperature, which lies well within the .002 ppm or 41 kHz drift.

PAGE NO. 30 of 30.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 18M0F5W

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= N/A
MAXIMUM DEVIATION (D), kHz	= N/A
CONSTANT FACTOR (K)	= N/A
NECESSARY BANDWIDTH (B _N), kHz	= N/A
	= 18 MHz

MODULATION = 18M0F9W

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= N/A
MAXIMUM DEVIATION (D), kHz	= N/A
CONSTANT FACTOR (K)	= N/A
NECESSARY BANDWIDTH (B _N), kHz	= N/A
	= 18 MHz

SUPERVISED BY:



Morton Flom, P. Eng.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.