

***Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart E (UNII Devices) and
Industry Canada RSS 210 Issue 4 (LELEAN Devices)
on the Intel Corporation
Model: WSAP5000***

FCC ID: J3OWSAP5000

GRANTEE: Intel Corporation
2300 Corporate Center Drive
Thousand Oaks, CA 91320

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: November 14, 2001

FINAL TEST DATE: November 8, 2001



AUTHORIZED SIGNATORY: _____

Mark Briggs
Director of Engineering

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

DECLARATIONS OF COMPLIANCE

Equipment Name and Model:
WSAP5000

Manufacturer:
Intel Corporation
2300 Corporate Center Drive
Thousand Oaks, CA 91320

Tested to applicable standards:
RSS-210, Issue 4, December 2000 (Low Power License-Exempt Radiocommunication
Devices)
FCC Part 15 Subpart E (UNII Devices)

Measurement Facility Description Filed With Department of Industry:

Departmental Acknowledgement Number: IC2845 **SV1** Dated August 7, 2001
Departmental Acknowledgement Number: IC2845 **SV3** Dated August 7, 2001
Departmental Acknowledgement Number: IC2845 **SV4** Dated July 20, 2001

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above mentioned departmental standards (through the use of ANSI C63.4 as detailed in section 5.3 of RSS-210, Issue 4); and that the equipment performed in accordance with the data submitted in this report.



Signature	_____
Name	Mark Briggs
Title	Director of Engineering
Company	Elliott Laboratories Inc.
Address	684 W. Maude Ave Sunnyvale, CA 94086 USA

Date: November 14, 2001

Maintenance of compliance with the above standards is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

TABLE OF CONTENTS

COVER PAGE.....	1
DECLARATIONS OF COMPLIANCE.....	2
TABLE OF CONTENTS.....	3
SCOPE.....	5
OBJECTIVE.....	5
SUMMARY OF RESULTS	6
MEASUREMENT UNCERTAINTIES.....	8
EQUIPMENT UNDER TEST (EUT) DETAILS	9
GENERAL.....	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS.....	10
EUT OPERATION DURING UNINTENTIONAL TESTING.....	10
EUT OPERATION DURING RADIO TESTING.....	10
ANTENNA REQUIREMENTS	11
TEST SITE.....	12
GENERAL INFORMATION.....	12
CONDUCTED EMISSIONS CONSIDERATIONS.....	12
RADIATED EMISSIONS CONSIDERATIONS.....	12
MEASUREMENT INSTRUMENTATION.....	13
RECEIVER SYSTEM.....	13
INSTRUMENT CONTROL COMPUTER	13
LINE IMPEDANCE STABILIZATION NETWORK (LISN)	13
POWER METER.....	14
FILTERS/ATTENUATORS	14
ANTENNAS	14
ANTENNA MAST AND EQUIPMENT TURNTABLE	14
INSTRUMENT CALIBRATION	14
TEST PROCEDURES	15
EUT AND CABLE PLACEMENT.....	15
CONDUCTED EMISSIONS	15
RADIATED EMISSIONS.....	15
CONDUCTED EMISSIONS FROM ANTENNA PORT	16

TABLE OF CONTENTS (Continued)

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	17
FCC 15.407 (A) OUTPUT POWER LIMITS.....	18
RS-210 6.2.2(Q1) OUTPUT POWER LIMITS	18
SPURIOUS RADIATED EMISSIONS LIMITS.....	19
AC POWER PORT CONDUCTED EMISSIONS LIMITS.....	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	20
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	21
APPENDIX 1: Test Equipment Calibration Data.....	1
APPENDIX 2: Test Data Log Sheets.....	2

SCOPE

An electromagnetic emissions test has been performed on the Intel Corporation, model WSAP5000 pursuant to Subpart E of Part 15 of FCC Rules for Unlicensed National Information Infrastructure (UNII) devices and RSS-210 Issue 4 for licence-exempt local area network (LELAN) devices. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Intel Corporation model WSAP5000 and therefore apply only to the tested sample. The sample was selected and prepared by Jim Baer of Intel Corporation

OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart E of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units which are subsequently manufactured.

SUMMARY OF RESULTS

The test data below represents the highest recorded measurements with respect to the FCC Part 15 Subpart E and RSS 210 limits. Unless stated otherwise, the complete data can be found in the Tests Data Sheets (Exhibit 2) submitted with this report.

FCC Part 15 Section	RSS 210 Section	Description	Comments	Result
Operation in the 5.15 – 5.25 GHz Band (Normal Mode)				
15.407 (d)		As the device operates in the 5.15 – 5.25 GHz band the antenna must be integral to the device.	Antenna Gain = 2 dBi (OMNI) Antenna Gain = 5.6 dBi (Half-Round Front) The antenna is integral.	COMPLIES
15.407(e)		Indoor operation only	Refer to user's manual in Exhibit 6	COMPLIES
15.407(a) (1)	6.2.2 q1 (i)	Bandwidth	26dB (28.75 MHz) , 20dB (17.42 MHz)	N/A
15.407(a) (1)	6.2.2 q1 (i)	Output Power	13.5 dBm @ 5180 MHz	COMPLIES
15.407(a) (1))	6.2.2 q1 (i)	Power Spectral Density	-1.17 dBm/MHz @ 5180 MHz	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4.4dB @ 832MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-2.6dB @ 15540 MHz	COMPLIES
Operation in the 5.25 – 5.35 GHz Band (Normal Mode) Note: The device is restricted to indoor use only, therefore the spectral density of spurious emissions in the 5.15 – 5.25 GHz band were limited to the power spectral limits for intentional signals detailed in FCC 15.407(a)(1) and RSS 210 6.2.2 q1 (i)				
15.407 (d)		Maximum Antenna Gain /Integral Antenna	Antenna Gain = 2 dBi (OMNI) Antenna Gain = 5.6 dBi (Half-Round Front) The antenna is integral.	COMPLIES
15.407(a) (2)	6.2.2 q1 (ii)	Bandwidth	26dB (30.67 MHz) , 20dB (17.6 MHz)	N/A
15.407(a) (2)	6.2.2 q1 (ii)	Output Power	13.7 dBm @ 5320 MHz	COMPLIES
15.407(a) (2))	6.2.2 q1 (ii)	Power Spectral Density	-1.0 dBm/MHz @ 5260 MHz	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4.4dB @ 832MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-1.4dB @ 10640 MHz	COMPLIES
Operation in the 5.15 – 5.25 GHz Band (Turbo Mode)				
15.407 (d)		As the device operates in the 5.15 – 5.25 GHz band the antenna must be integral to the device.	Antenna Gain = 2 dBi (OMNI) Antenna Gain = 5.6 dBi (Half-Round Front) The antenna is integral.	COMPLIES
15.407(e)		Indoor operation only	Refer to user's manual in Exhibit 6	COMPLIES
15.407(a) (1)	6.2.2 q1 (i)	Bandwidth	26dB (59.7 MHz) , 20dB (42.5 MHz)	N/A
15.407(a) (1)	6.2.2 q1 (i)	Output Power	15.7 dBm @ 5210 MHz	COMPLIES
15.407(a) (1))	6.2.2 q1 (i)	Power Spectral Density	-1.97 dBm/MHz @ 5210 MHz	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4.4dB @ 832MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-1dB @ 15750 MHz	COMPLIES

Operation in the 5.25 – 5.35 GHz Band (Turbo Mode) Note: The device is not restricted to indoor use only, therefore the spectral density of spurious emissions in the 5.15 – 5.25 GHz band were limited to the power spectral limit of – 27dBm/MHz as detailed in FCC 15.407(b)(2) and RSS 210 6.2.2 q1 (ii)				
15.407 (d)		Maximum Antenna Gain	Antenna Gain = 2 dBi (OMNI) Antenna Gain = 5.6 dBi (Half-Round Front) The antenna is integral.	COMPLIES
15.407(a) (2)	6.2.2 q1 (ii)	Bandwidth	26dB (60.2 MHz) , 20dB (39.0 MHz)	N/A
15.407(a) (2)	6.2.2 q1 (ii)	Output Power	15.3 dBm @ 5290 MHz	COMPLIES
15.407(a) (2))	6.2.2 q1 (ii)	Power Spectral Density	-3.13 dBm/MHz @ 5290 MHz	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4.4dB @ 832MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-3.9dB @ 10580 MHz	COMPLIES
General requirements for all bands				
	6.2.2 q(iv)(a)	Digital Modulation	Digital Modulation is used, refer to the “Theory of Operations” (Exhibit 9) for a detailed explanation.	COMPLIES
	6.2.2 q(iv)(b)	Peak Spectral Density	8 dBm (Normal Mode)	COMPLIES
15.407(a)(6)		Peak Excursion Ratio	7.5dB (Normal Mode)	COMPLIES
	6.2.2 q(iv)(c)	Channel Selection	The device was tested on the following channels in normal mode: 6, 14, and 20. The device was tested on the following channels in Turbo mode: 9, 13, and 17. These channels represent the highest, lowest and center channels available.	N/A
15.407 (c)	6.2.2 q(iv)(d)	Automatic Discontinuation of Operation in the absence of information to transmit	Operation is discontinued in the absence of information to transmit, refer to the “Theory of Operations” in Exhibit 9 for a detailed explanation.	COMPLIES
15.407 (g)	6.2.2 q(iv)(e)	Frequency Stability	Frequency stability is +/- 20 ppm, refer to the “Theory of Operations” in Exhibit 9 for a detailed analysis.	COMPLIES
	6.2.2 q(iv)(g)	User Manual information	All relevant statements have been included in the user’s manuals. Refer to Exhibit 6 for details	COMPLIES
15.407 (f)	6.2.2 q(iv)(g)	RF Exposure Requirements	Refer to MPE Data in Exhibit 11	COMPLIES
15.407(b) / 15.207	6.6	AC Conducted Emissions	-3dB @ 2.487MHz	COMPLIES

MEASUREMENT UNCERTAINTIES

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel Corporation model WSAP5000 is a UNII radio, which is designed to be used for indoor LAN networks.

The EUT was treated as tabletop equipment during testing to simulate the end user environment. The electrical rating of the EUT is 120 V, 60 Hz, 2.5 Amps.

The sample was received on November 7, 2001 and tested on November 8, 2001. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number	Proposed FCC ID #
Intel/WSAP5000/UNII Access Point	N/A	J3OWSAP5000
YHi/YC-1018-S05-U/Power Supply	00176890	N/A

ENCLOSURE

The EUT is primarily constructed of sheet metal shield that covers the main motherboard and MINI PCI card. The sheet metal shield is then covered by a plastic enclosure. It measures approximately 25cm wide by 4 cm deep by 15 cm high.

MODIFICATIONS

The EUT did not require modifications during testing in order to comply with the emission specifications.

SUPPORT EQUIPMENT

The following equipment was used as remote support equipment for emissions testing:

Manufacturer/Model/Description	Serial Number	FCC ID Number
IBM/ThinkPad 390/Laptop	Surfer Jen	DoC
3com/3C16750B/Hub	0100/7P1F036035	DoC

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length (m)
RJ45	Laptop (Hub*)	CAT 5	Unshielded	1(10*)
DC Power	AC outlet	Power Supply	Unshielded	1.8

* The hub was used between the EUT and the laptop for radiated and conducted emissions tests below 1GHz.

EUT OPERATION DURING UNINTENTIONAL TESTING

The radio was transmitting at full power on the specified channels (center channel for radiated emissions measurements below 1GHz). The channels were selected since they are at the top, center and bottom of the allocated bands. The rf data rate was 6Mb/s in normal mode and 12Mb/s in turbo mode. A data link was established between the remote PC and the EUT via the hub at 100Mb/s.

The ethernet data rate of 100Mb/s was selected over 10Mb/s as preliminary testing identified this as being the worst case ethernet data rate. Preliminary testing also showed that an rf data rate of 6Mb/s produced the highest power spectral density in normal mode and 12Mb/s produced the highest output power spectral density in turbo mode.

EUT OPERATION DURING RADIO TESTING

The radio was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30 MHz) and turbo mode (channel bandwidth of approximately 60 MHz).

"Normal Mode" allows data rates of up to 54 Mb/s. The device was, therefore, tested in normal mode at the data rate that produced the highest output power for normal mode (6 Mb/s).

"Turbo Mode" allows data rates of up to 72Mb/s. At data rates higher than 12Mb/s the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power in that mode (12Mb/s).

For Intentional Radiated Emission the EUT was test in to separate modes. The EUT has the ability to change the pattern of the antenna per software means. One of the modes was the OMNI pattern, tested for both Normal and Turbo mode. The Second mode was the Half-Round Front pattern, tested for both Normla and Turbo mode. The same antenna can be program to radiated on either patterns.

ANTENNA REQUIREMENTS

As the device is intended to operate in the 5.15 – 5.25 GHz band an integral antenna as detailed in 15.407 (d) and RSS-210 6.2.2(q1) (i) is required. The antenna for the device is an integral antenna. Intel specifically manufactures the antenna. The antenna has a communication port, which connects to the AP motherboard. The device will not function if the original, integral antenna is removed.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken on November 8, 2001 at the Elliott Laboratories Open Area Test Site #1 & 4 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Federal Communications Commission. In accordance with Industry Canada rules detailed in RSS 210 Issue 4 and RSS-212, construction, calibration, and equipment data for the test sites have been filed with the Federal Communications Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions' testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

POWER METER

Either a spectrum analyzer or a power meter and thermister mount are used for all direct output power measurements from transmitters.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions, which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements are performed with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

Measurement bandwidths (video and resolution) are set in accordance with FCC procedures for the type of radio being tested.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions from the AC power port are given in units of microvolts, the limits for radiated electric field emissions are given in units of microvolts per meter at a specified test distance and the output power limits are given in terms of Watts, milliwatts or dBm. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp) the following formula is used to determine the field strength limit in terms of microvolts per meter at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For reference, converting the voltage and electric field strength specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. Conversion of power specification limits from linear units (in milliwatts) to decibel form (in dBm) is accomplished by taking the base ten logarithm, then multiplying by 10.

FCC 15.407 (a) OUTPUT POWER LIMITS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	50mW (17 dBm)	4 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

RS-210 6.2.2(q1) OUTPUT POWER LIMITS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	200mW (23 dBm)	10 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

SPURIOUS RADIATED EMISSIONS LIMITS

The table below shows the limits for unwanted (spurious) emissions falling in the restricted bands detailed in Part 15.205 and Industry Canada RSS-210 Table 2.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

The table below shows the limits for unwanted (spurious) emissions outside of the restricted bands above 1GHz.

Operating Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength At 3m (dBuV/m)
5150 - 5250	-27 dBm	68.3 dBuV/m
5250 - 5350	-27 dBm (note 1)	68.3 dBuV/m
5725 - 5825	-27 dBm (note 2)	68.3 dBuV/m
	-17 dBm (note 3)	78.3 dBuV/m

Note 1: If operation is restricted to indoor use only then emissions in the band 5.15 – 5.25 GHz must meet the power spectral density limits for the intentional signals detailed in RSS 210 and FCC Subpart E for devices operating in the 5.15 – 5.25 GHz band.

Note 2: Applies to spurious signals separated by more than 10 MHz from the allocated band.

Note 3: Applies to spurious signals within 10 MHz of the allocated band.

AC POWER PORT CONDUCTED EMISSIONS LIMITS

The table below shows the limits for emissions on the AC power line as detailed in FCC Part 15.205 and Industry Canada RSS-210 section 6.6.

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_T - B = C$$

and

$$C - S = M$$

where:

R_T = Receiver Reading in dBuV

B = Broadband Correction Factor*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

* Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

APPENDIX 1: Test Equipment Calibration Data

Radiated Emissions, 30 - 1000 MHz, 6-Nov-01 04:47 PM**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	Biconical Antenna, 30-300 MHz	DM-105-T1	382	12	8/22/2001	8/22/2003
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1321	12	4/10/2001	4/10/2002
Rohde & Schwarz	Test Receiver, 0.009-2000 MHz	ESN	1332(775)	12	10/12/2001	10/12/2002

Radiated Emissions, 1 - 40 GHz, 8-Nov-01 04:50 PM**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	786	12	2/7/2001	2/7/2002
Hewlett Packard	High Pass filter, 8.2GHz	P/N 84300-80039	1156	12	3/27/2001	3/27/2002
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	12	1/25/2001	1/25/2002
Hewlett Packard	Spectrum Analyzer 9KHz - 26GHz	8563E	284	12	2/22/2001	2/22/2002

Antenna Conducted Emissions, 9-Nov-01 04:51 PM**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002
Rohde & Schwarz	Power Meter	NRVS	1290	12	3/22/2001	3/22/2002
Rohde & Schwarz	Power Sensor, 1uW-100mW, DC-18 GHz, 50ohm	NRV-Z51	1069	12	8/2/2001	8/2/2002

Antenna Conducted Emissions, 12-Nov-01 02:46 PM**Engineer: mfaustino**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002
Rohde & Schwarz	Power Meter	NRVS	1290	12	3/22/2001	3/22/2002
Rohde & Schwarz	Power Sensor, 1uW-100mW, DC-18 GHz, 50ohm	NRV-Z51	1069	12	8/2/2001	8/2/2002

APPENDIX 2: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T45318 69 Pages



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Emissions Spec:	FCC Part 15 B and E, RSS-210	Class:	B
Immunity Spec:	N/A	Environment:	-

EMC Test Data

For The

Intel

Model

WSAP5000



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Emissions Spec:	FCC Part 15 B and E, RSS-210	Class:	B
Immunity Spec:	N/A	Environment:	-

EUT INFORMATION

General Description

The EUT is a 5.15 - 5.35 GHz UNII Access Point Radio which is designed for indoor use. The radio can support data rates of up to 54Mb/s using a nominal 26dB signal bandwidth of 35 MHz.

Normally, the EUT would be table-top during operation. The EUT was treated as table-top equipment during testing to simulate the end user environment.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Intel	WSAP5000	UNII Access Point Radio	prototype	-
Yhi	YC-1018-S05-U	Power Supply	176890	N/A

Antenna

The EUT uses a combination of four integral antennas to provide different directionality. The maximum gain of the combination is approximately 1.8 dBi for OMNI pattern and 5.6 for the Half-Round Front Pattern.

EUT Enclosure

The EUT enclosure is primarily constructed of plastic. It measures approximately 25cm wide by 4 cm deep by 15 cm high.

Modification History

Mod. #	Test	Date	Modification
1			



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Emissions Spec:	FCC Part 15 B and E, RSS-210	Class:	B
Immunity Spec:	N/A	Environment:	-

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
3-Com	3C16750B	10/100Base-T hub	0100/7P1F036035	DoC
IBM	ThinkPad 390	Laptop	("Surfer Jen")	DoC

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
DC power input	transformer	2-wire	Unshielded	1.8
RJ 45	Hub	CAT 5	Unshielded	10

EUT Operation During Emissions Testing

The radio was transmitting at full power on the specified channels (center channel for radiated emissions measurements below 1GHz). The channels were selected since they are at the top, center and bottom of the allocated bands. The rf data rate was 6Mb/s in normal mode and 12Mb/s in turbo mode. A data link was established between the remote PC and the EUT via the hub at 100Mb/s.

The ethernet data rate of 100Mb/s was selected over 10Mb/s as preliminary testing identified this as being the worst case ethernet data rate. Preliminary testing also showed that an rf data rate of 6Mb/s produced the highest power spectral density in normal mode and 12Mb/s produced the highest output power spectral density in turbo mode.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Emissions Spec:	FCC Part 15 B and E, RSS-210	Class:	B
Immunity Spec:	N/A	Environment:	-

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
IBM	ThinkPad 390	Laptop	("Surfer Jen")	DoC

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
DC power input	transformer	2-wire	Unshielded	1.8
RJ 45	Hub	CAT 5	Unshielded	10

EUT Operation During Emissions Testing

The radio was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30 MHz) and turbo mode (channel bandwidth of approximately 60 MHz).

"Normal Mode" allows data rates of up to 54 Mb/s. The device was, therefore, tested in normal mode at the data rate that produced the highest output power for normal mode (6 Mb/s).

"Turbo Mode" allows data rates of up to 72Mb/s. At data rates higher than 12Mb/s the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power in that mode (12Mb/s).

For the Intentional Radiated Emission the EUT was test in to separate modes. The EUT has the ability to change the pattern of the antenna per software means. One of the modes was the OMNI pattern, tested for both Normal and Turbo mode. The Second mode was the Half-Round Front pattern, tested for both Normla and Turbo mode. The same antenna can be program to radiated on either patterns.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

FCC Part 15 Subpart E Tests: Normal Mode

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test:	11/7/2001 & 11/9/2001
Test Engineer:	Vishal / Jmartinez
Test Location:	SVOATS #4 & # 3

Config. Used: 2
Config Change: None
Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT was located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT unless stated otherwise.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions: Temperature: 24°C
Rel. Humidity: 80%

Summary of Results: Normal Mode

Run #	Test Performed	Limit	Result	Comments
1	Output Power	15.407(a) (1), (2)	Pass	13.5dBm @ 5.18GHz 13.7dBm @ 5.32 GHz
2	Power Spectral Density (PSD)	15.407(a) (1), (2)	Pass	-1.17 dBm@ 5180 MHz, -1.0 dBm @ 5260 MHz
3	26dB Bandwidth	15.407	Pass	> 20 MHz
3	20 dB Bandwidth	RSS 210	Pass	> 20 MHz
4	Peak Excursion Envelope	15.407(a) (6)	Pass	Peak to average excursion < 13dB
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	All emissions below the - 27dBm/MHz limit
6	RE, 1000 - 40000 MHz - Spurious Emissions	15.407(b)(6)	Pass	Refer to individual Run



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Output Power

OMNI Antenna Gain: 1.8 dBi
Half-Round Front Gain: 5.6 dBi



Channel	Frequency (MHz)		Output Power (dBm)	FCC Limit (dBm) (note 3)	Comments
Low	5180		13.2	17.0	Note 2
	5180		13.5	17.0	Note 1 / T45318/601
Midd	5260		13.6	24.0	Note 2
	5260		13.7	24.0	Note 1 / T45318/602
High	5320		12.0	24.0	Note 2
	5320		12.8	24.0	Note 1 / T45318/603

Note 1:	Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 30kHz)
Note 2:	Measured using a Boonton Power Meter with a peak power sensor in average mode
Note 3:	RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.
Note 4:	RSS 210 limit is 24dBm in the 5.25 to 5.35 GHz band, same as the FCC limit. This limit is based on the emission bandwidth and operating frequency.



EMC Test Data


Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

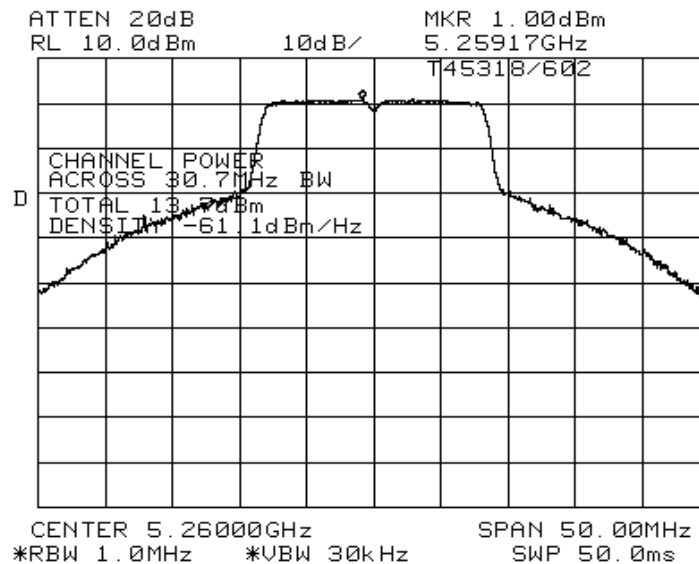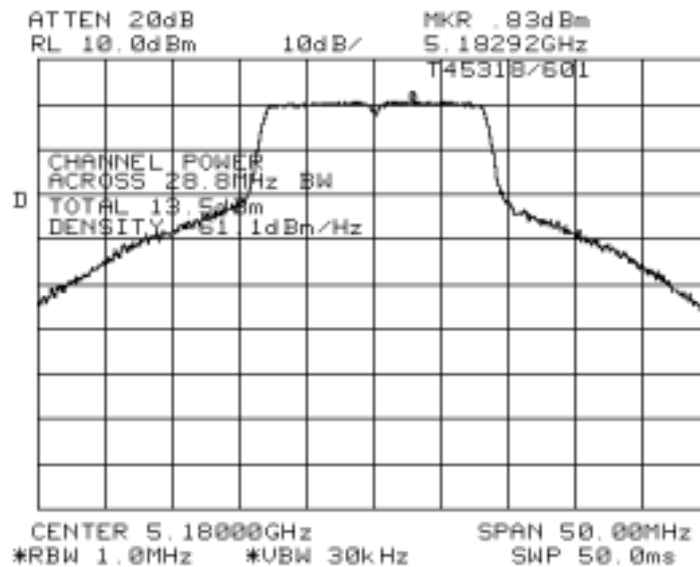



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

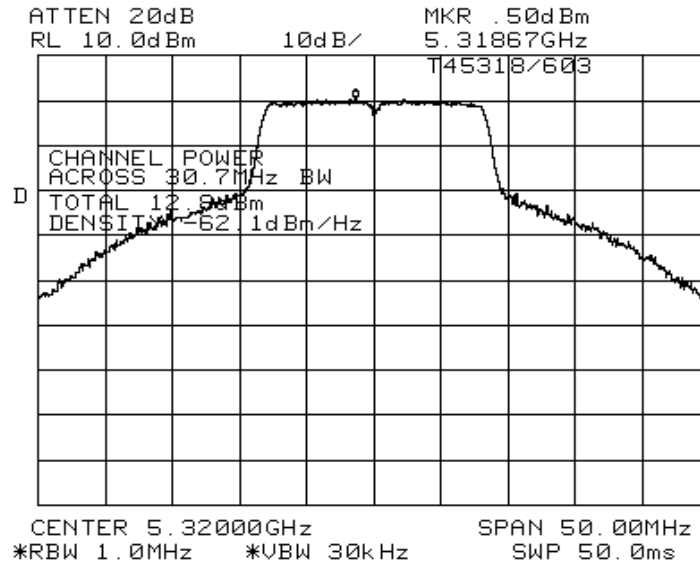



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #2: Power Spectral Density

OMNI Antenna Gain: 1.8 dBi
Half-Round Front Gain: 5.6 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	FCC Limit (dBm) note 2	Graph Reference	
Low	5180	-1.17	4.0	T45318/201	Note 1
Mid	5260	-1.00	11.0	T45318/202	Note 1
High	5320	-1.67	11.0	T45318/203	Note 1


Note 1:

The above measurements were made using RBW = 1MHz, VBW = 1MHz, video averaging on. To demonstrate compliance with RSS 210, the peak PSD was also measured using RBW= VBW=1MHz, video averaging off during the peak excursion measurements (run #4). As per RSS 210 requirements, the peak PSD of **7.5 dBm** in the 5.15 to 5.25 GHz band did not exceed the maximum permitted average PSD of 10dBm by more than 6dB. Similarly, in the 5.25-5.35GHz band, the peak power spectral density of **8 dBm** did not exceed the maximum permitted average PSD of 11dBm by more than 6dB. No restriction is placed on the output power or average PSD with respect to RSS 210.

Note 2:

RSS 210 limit is 10dBm/MHz in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit.



Plots Showing Power Spectral Density (RBW = 1MHz, VBW = 3 MHz, video averaging ON)

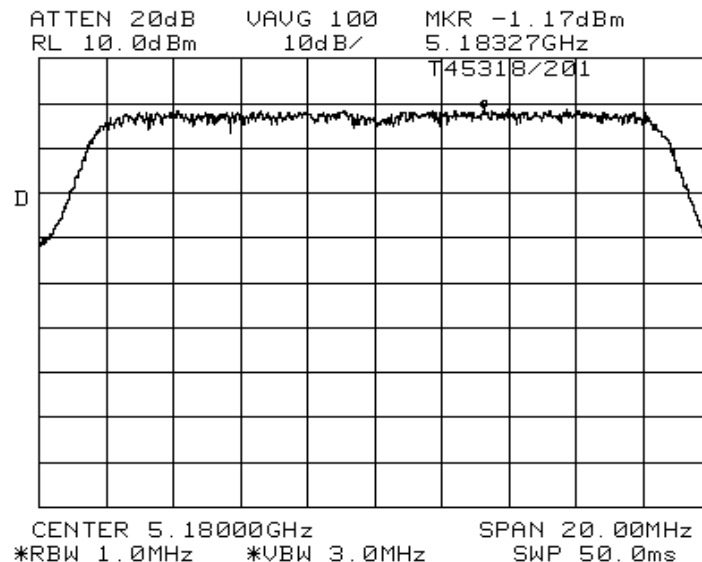



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

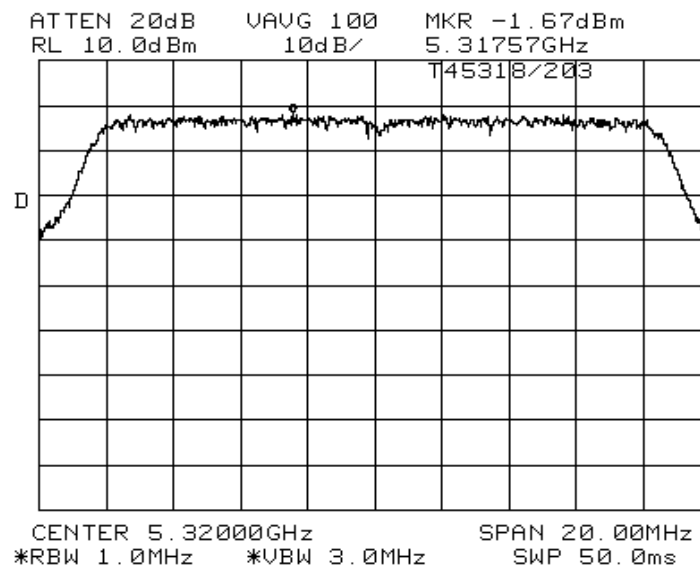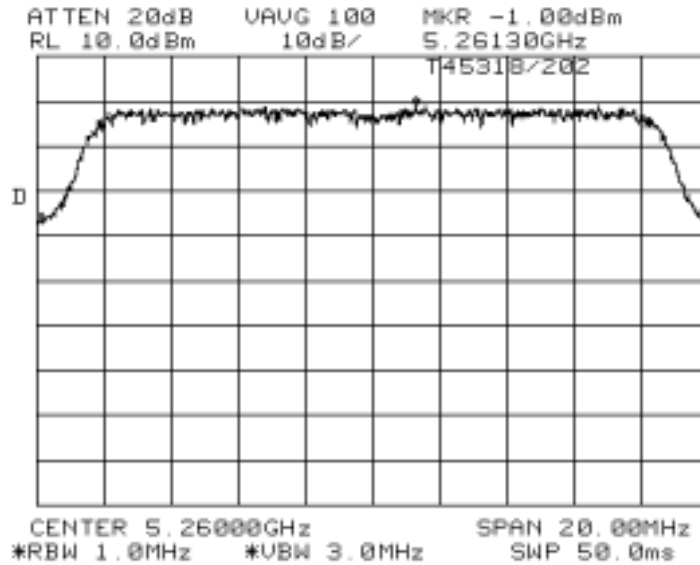




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #3: Signal Bandwidth

Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
Low	5180	300 kHz	28.75	17.42	T45318/301
Mid	5260	300 kHz	30.67	17.5	T45318/302
High	5320	300 kHz	30.67	17.6	T45318/303



Plots Showing Signal Bandwidth

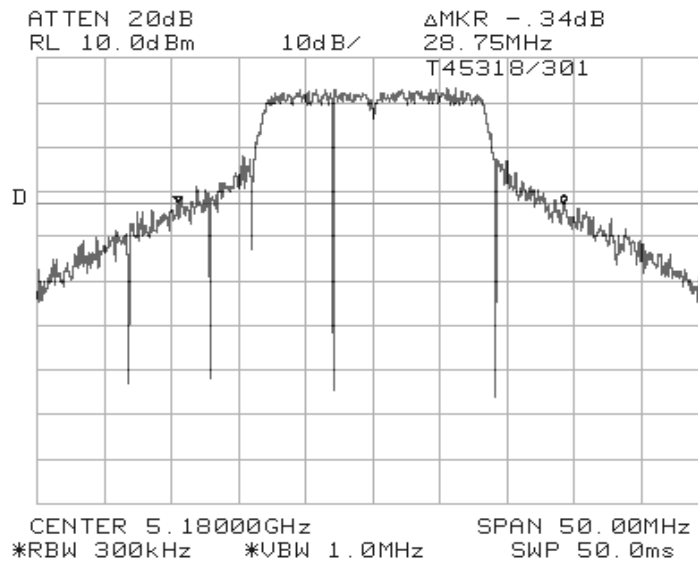



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

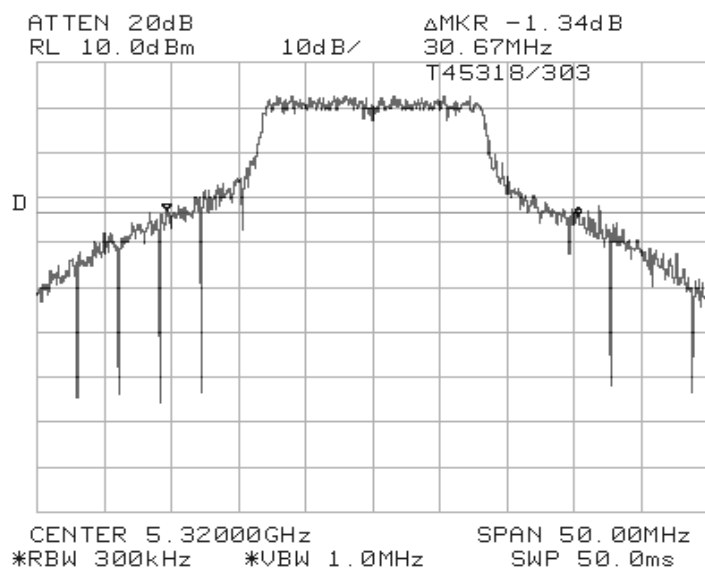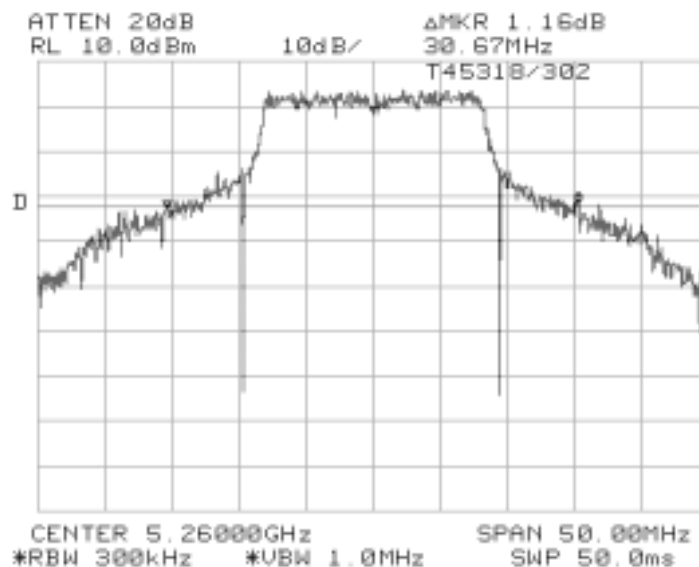



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B


Run #4: Peak Excursion Measurement

Plots Showing Peak Excursion

Trace A: RBW = VBW = 1MHz
Trace B: RBW = 1 MHz, VBW = 30kHz

Low Channel Peak Excursion = 7.33 dB. Peak power spectral density (RSS210 only) = 7.5 dBm.

FCC Peak Excursion

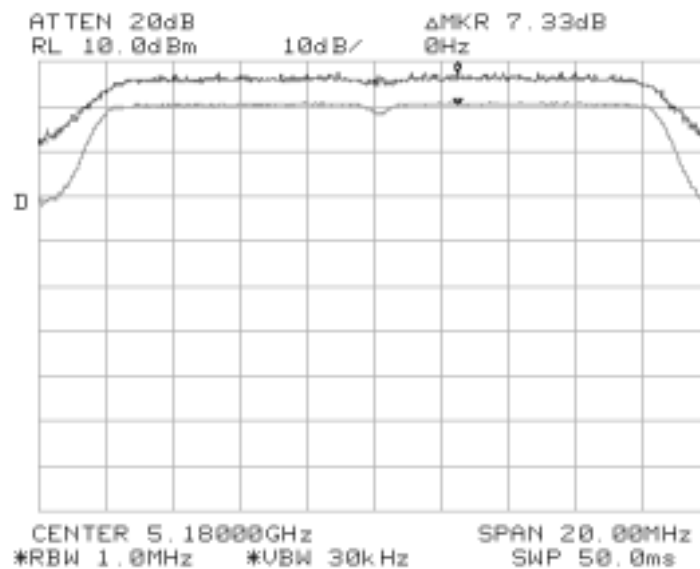




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Canada Power Spectral Density

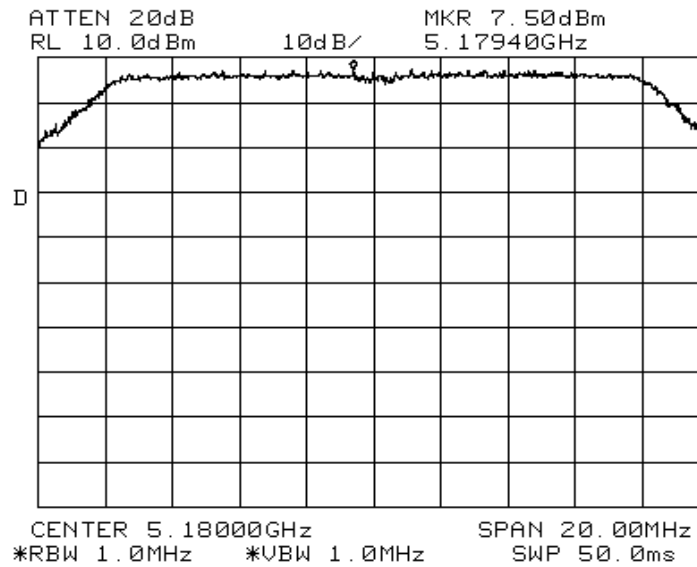




EMC Test Data


Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Middle Channel Peak Excursion = 7.5 dB. Peak power spectral density (RSS210 only) = 8.0 dBm.

FCC Peak Excursion

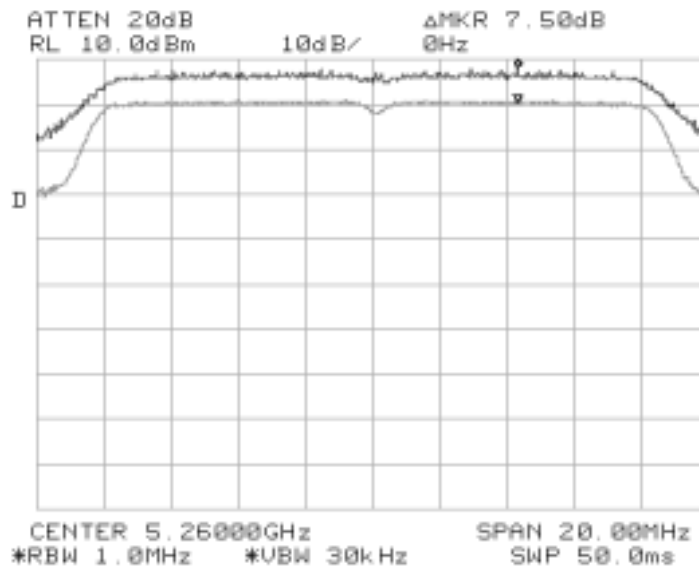

Canada Power Spectral Density

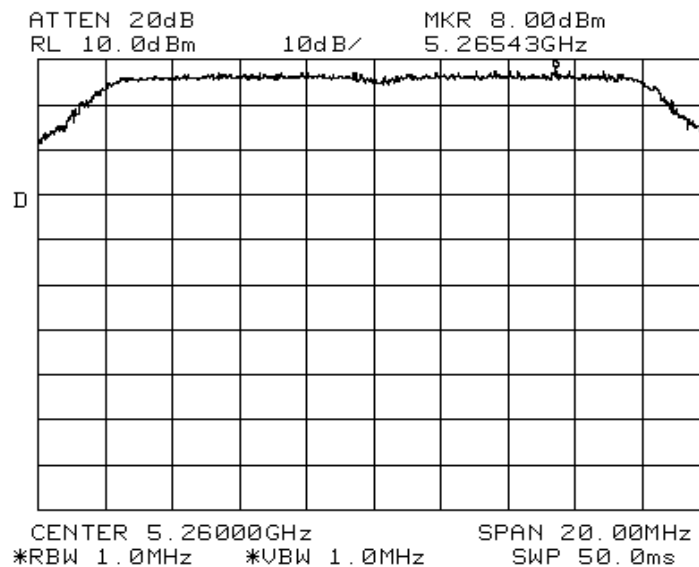




EMC Test Data


Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

High Channel Peak Excursion = 7.33 dB. Peak power spectral density (RSS210 only) = 7 dBm.

FCC Peak Excursion

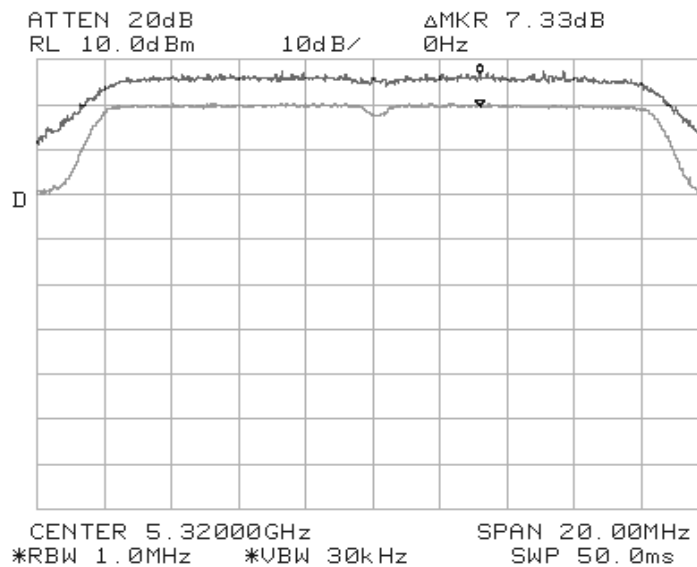

Canada Power Spectral Density

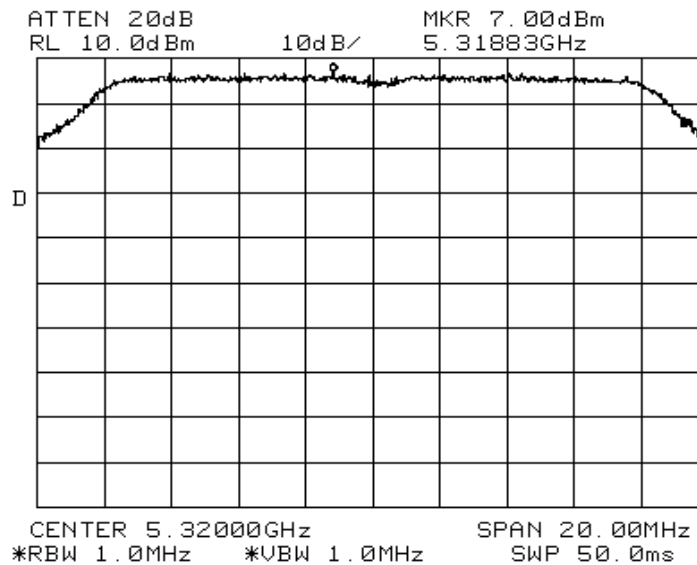



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #5: Out Of Band Spurious Emissions - Antenna Conducted

The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -27 dBm was, therefore, used for signals not in restricted bands and close to the intentional band within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
Low	5180	30 - 1000 MHz	Note 4	T45318/501
		1 to 5.15 GHz	2805 (Note 1), 4140 (Note 1)	T45318/502
		5.25 to 10 GHz	5622 (2&5), 6224 & 8813 (Note 2)	T45318/503
		10 GHz to 20 GHz	10350 (Note 3), 17100 (Note 2&5)	T45318/504
		20 GHz to 40 GHz	None	T45318/505
Midd	5260	30 - 1000 MHz	Note 4	T45318/506
		1 to 5.25 GHz	2805 (Note 1), 4209 (Note 1)	T45318/507
		5.35 to 10 GHz	5722 (2&5), 6311 (Note 2)	T45318/508
		10 GHz to 20 GHz	10500 (Note 3), 17100 (Note 2&5)	T45318/509
		20 GHz to 40 GHz	None	T45318/510
High	5320	30 - 1000 MHz	Note 4	T45318/511
		1 to 5.30 GHz	2813 (Note 1), 4254 (Note 1)	T45318/512
		5.34 to 10 GHz	5728 (2&5), 8431 (Note 1)	T45318/513
		10 GHz to 20 GHz	10630 (Note 1), 17100 (Note 3&5)	T45318/514
		20 GHz to 40 GHz	None	T45318/515



Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)
Note 4:	All spurious signals in this frequency band measured during digital device radiated emissions test.
Note 5:	Spurious emission values when measured with a RBW=1MHz, VBW=3MHz, video averaging ON was < -55dBm.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B



Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz)

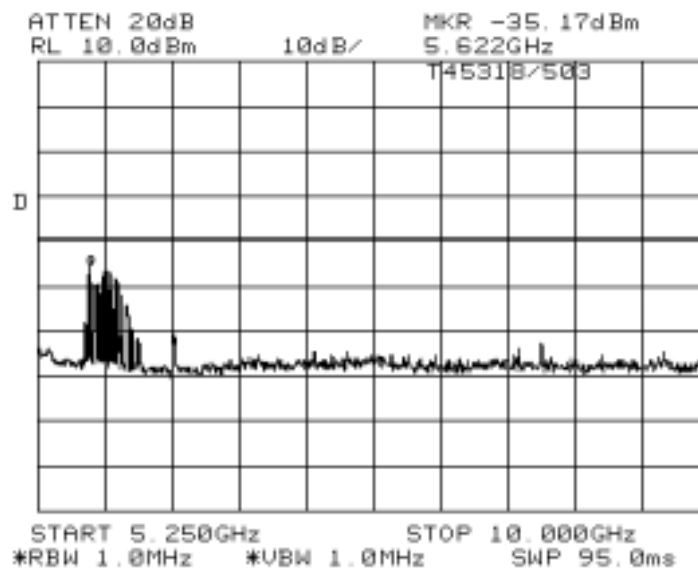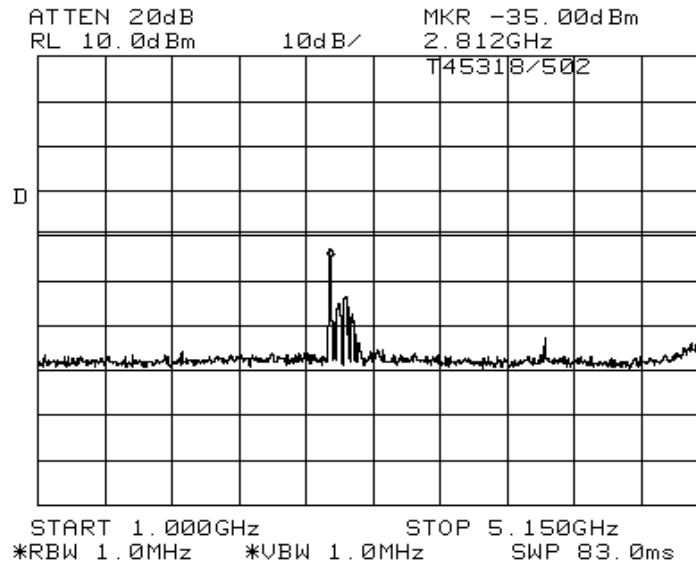



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

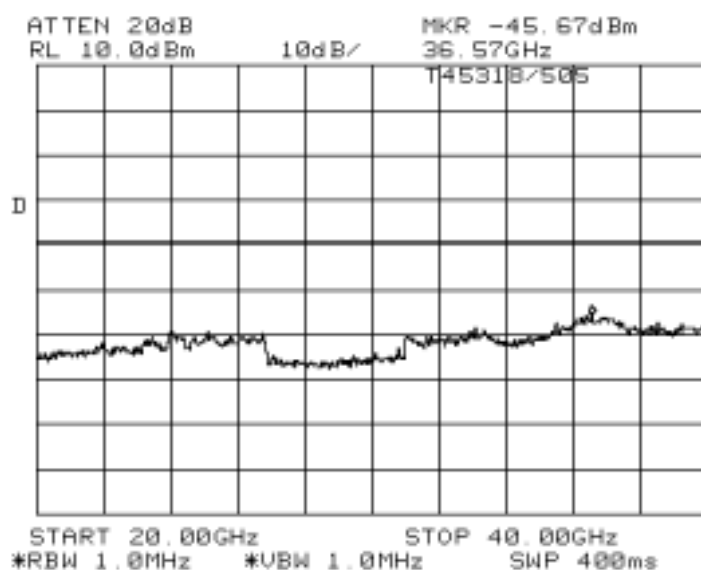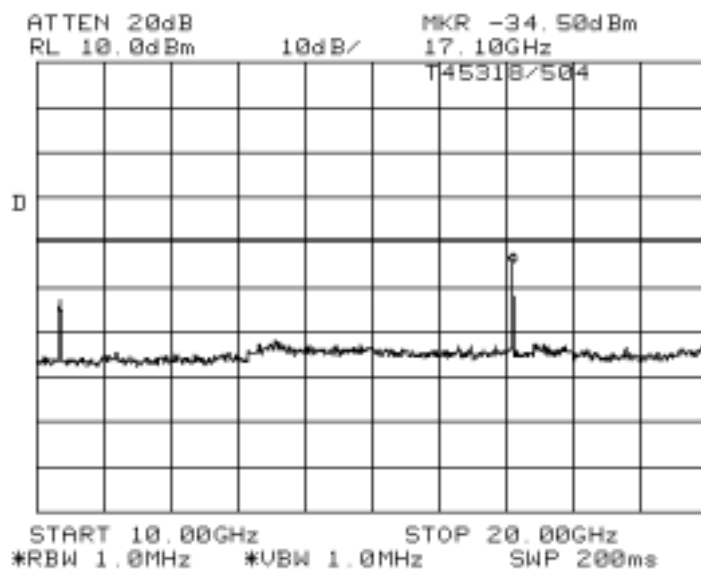



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

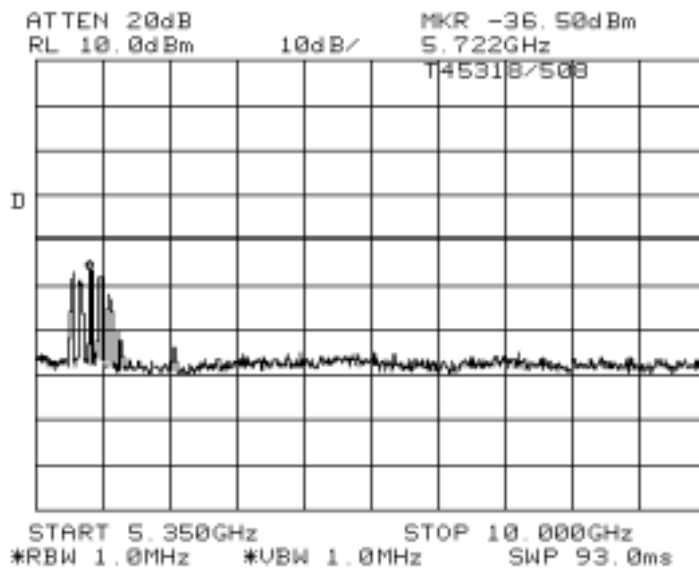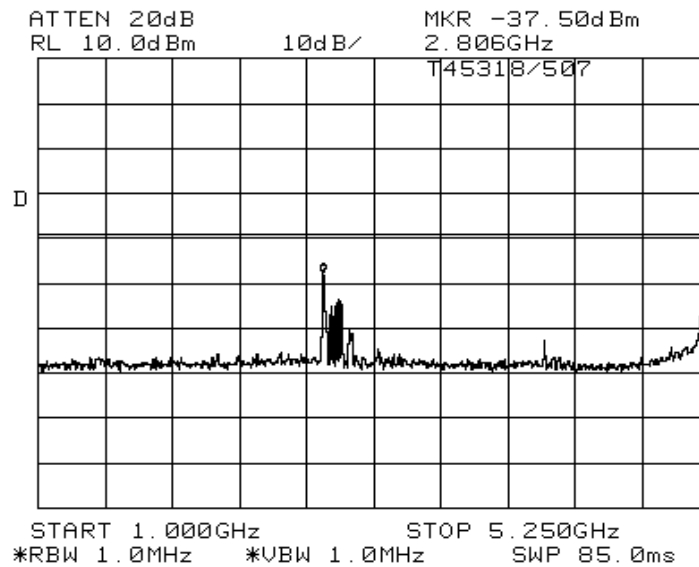



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

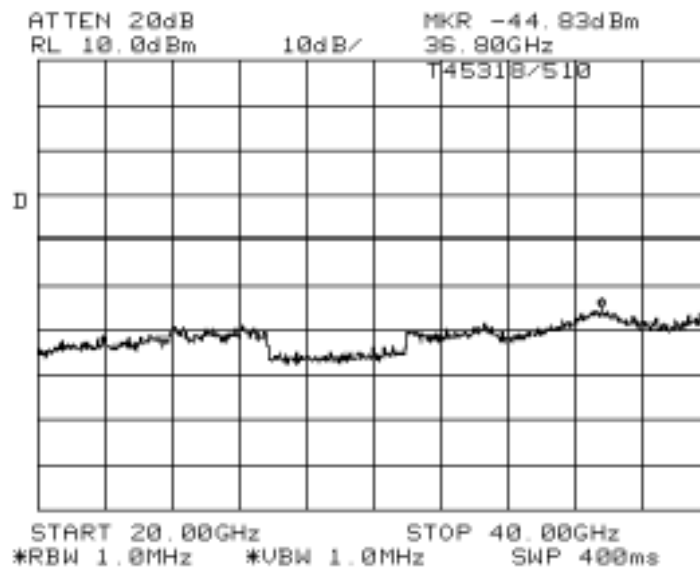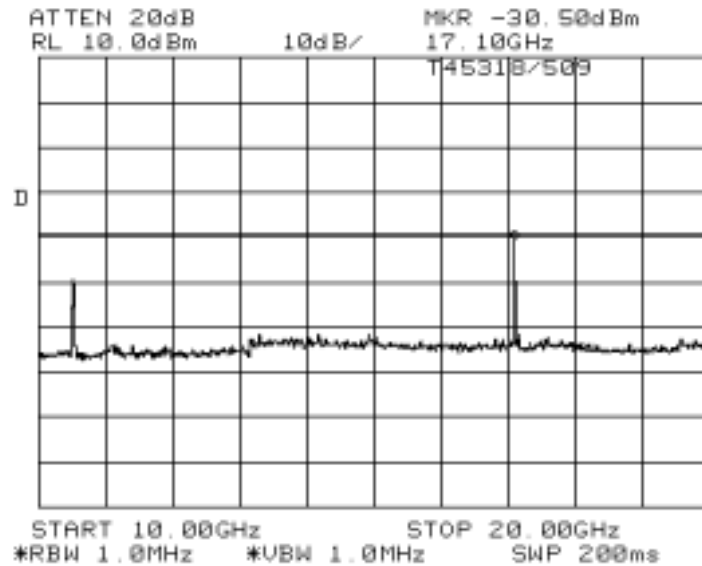



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

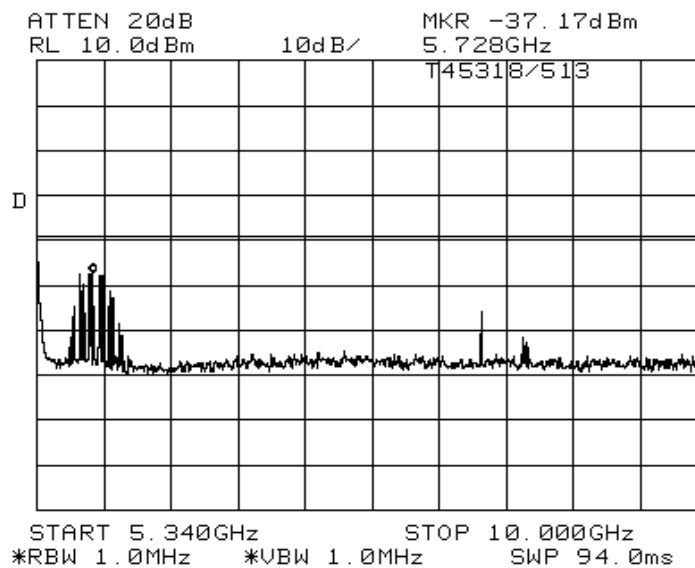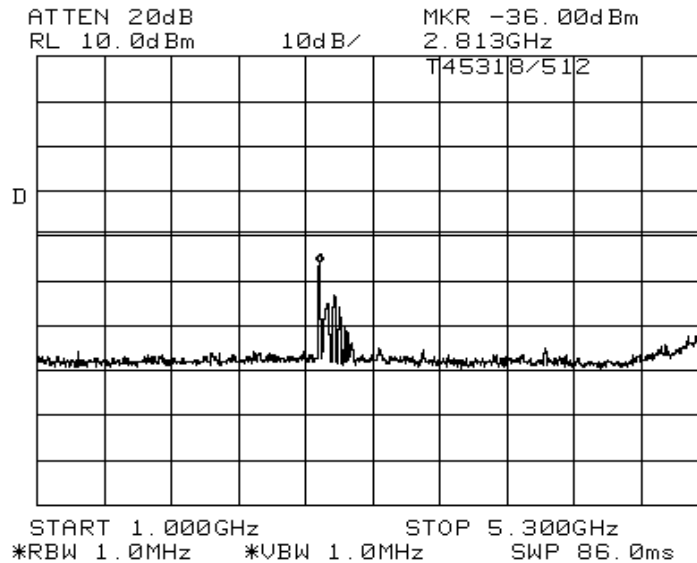



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

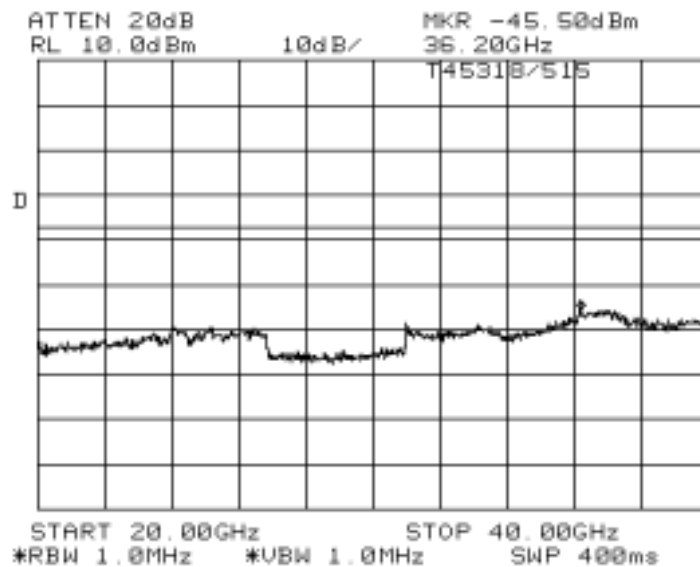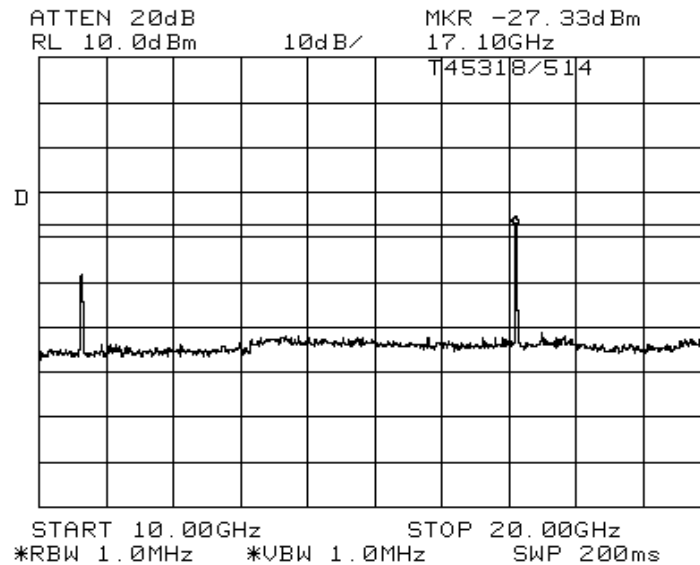



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Band Edge Measurements:


For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

5.15 GHz band edge, EUT operating on the lowest channel

The highest signal within 50 MHz of the 5.15 GHz band was -43.17 dBc (Peak) / -51.5 dBc (Average)

Peak Bandedge

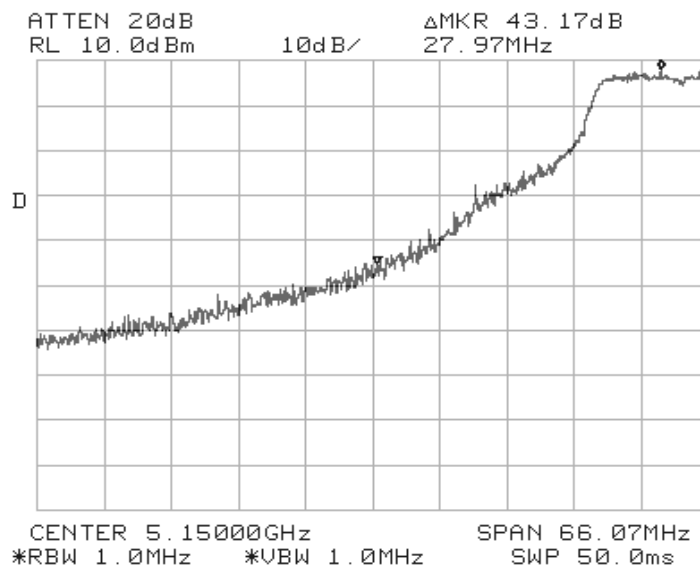




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Average Bandedge

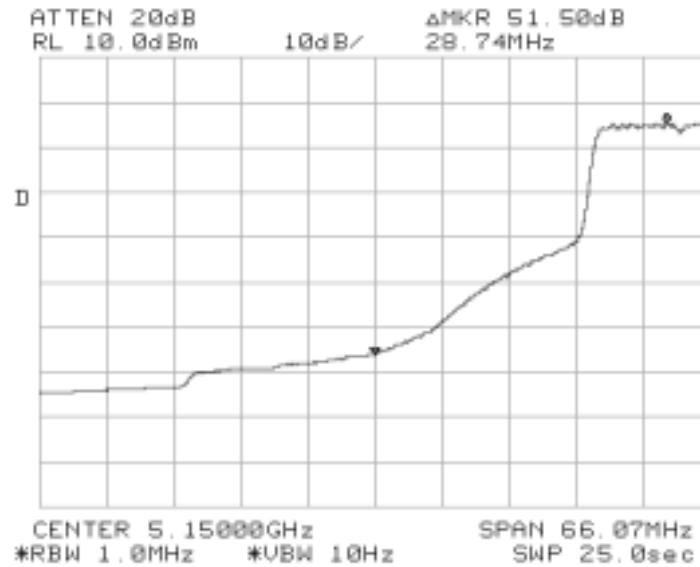




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B


5.35 GHz band edge EUT operating on the highest channel:

The highest signal in the 5.35 to 5.46 GHz band was -40.5 dBc (Peak) / -48.84 dBc (Average)

Peak Bandedge

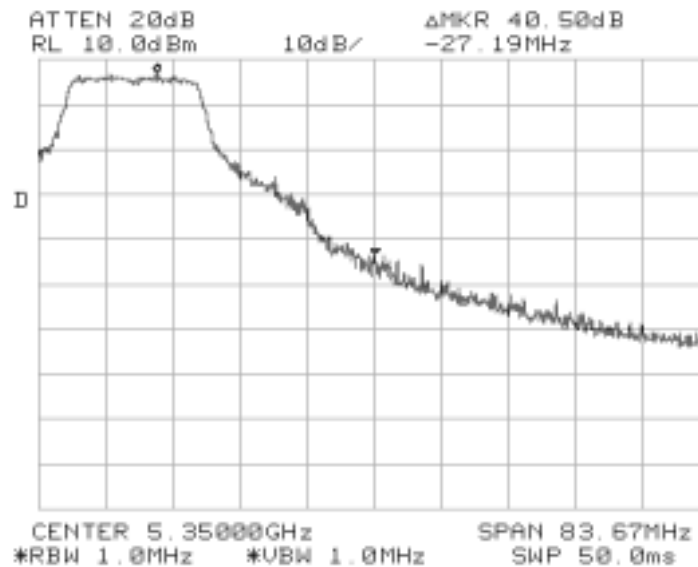

Average Bandedge

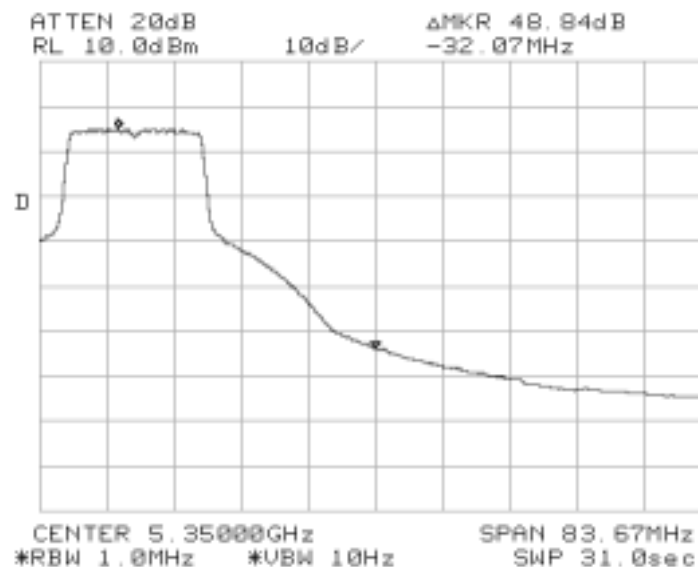



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6a: Radiated Spurious Emissions, 1000 - 40000 MHz (Half-Round antenna Pattern)

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dBuV/m)

Fundamental signal measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
PC-NOM: 9							
5180.0	104.2	v	-	-	Pk	253	1.0 RBW = VBW = 1 MHz
5180.0	93.0	v	-	-	Avg	253	1.0 RBW = 1MHz, VBW = 10Hz
5180.0	106.0	h	-	-	Pk	310	2.2 RBW = VBW = 1 MHz
5180.0	95.0	h	-	-	Avg	310	2.2 RBW = 1MHz, VBW = 10Hz
PC-NOM: 13							
5320.0	101.5	v	-	-	Pk	276	2.4 RBW = VBW = 1 MHz
5320.0	90.4	v	-	-	Avg	276	2.4 RBW = 1MHz, VBW = 10Hz
5320.0	102.7	h	-	-	Pk	290	1.2 RBW = VBW = 1 MHz
5320.0	91.2	h	-	-	Avg	290	1.2 RBW = 1MHz, VBW = 10Hz

Band Edge Field Strength Calculations

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5150.0	61.0	v	74.0	-13.0	Pk	-	- Note 1
5150.0	41.5	v	54.0	-12.5	Avg	-	- Note 1
5150.0	62.8	h	74.0	-11.2	Pk	-	- Note 1
5150.0	43.5	h	54.0	-10.5	Avg	-	- Note 1
5350.0	61.0	v	74.0	-13.0	Pk	-	- Note 2
5350.0	41.6	v	54.0	-12.4	Avg	-	- Note 2
5350.0	62.2	h	74.0	-11.8	Pk	-	- Note 2
5350.0	42.4	h	54.0	-11.6	Avg	-	- Note 2

Note 1:	EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-43.17 dBc for peak and -51.5 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-40.5 dBc for peak and -48.8 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6b: Radiated Spurious Emissions, 1000 - 40000 MHz

EUT On Lowest Channel Available (Channel low, 5.18 GHz); PC_NOM 9

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
15540.0	49.8	h	54.0	-4.3	Avg	230	1.4	Note 2&3
15540.0	69.3	h	74.0	-4.8	Pk	230	1.4	Note 2&3
15540.0	48.7	v	54.0	-5.3	Avg	200	1.3	Note 2&3
20720.0	46.3	v	54.0	-7.7	Avg	270	1.2	Note 2&3
20720.0	46.2	h	54.0	-7.8	Avg	0	1.3	Note 2&3
15540.0	66.1	v	74.0	-7.9	Pk	200	1.3	Note 2&3
20720.0	61.2	h	74.0	-12.8	Pk	0	1.3	Note 2&3
20720.0	60.8	v	74.0	-13.2	Pk	270	1.2	Note 2&3
4144.0	40.3	v	54.0	-13.7	Avg	265	1.3	Note 2&6
4144.0	39.0	h	54.0	-15.0	Avg	112	1.3	Note 2&6
10360.0	49.2	h	68.3	-19.1	Note 5	160	1.7	Note 4
10360.0	49.0	v	68.3	-19.3	Note 5	240	1.3	Note 4
25900.0	44.0	h	68.3	-24.3	Note 5	240	1.3	Note 4
4144.0	49.3	v	74.0	-24.7	Pk	265	1.3	Note 2&6
4144.0	48.8	h	74.0	-25.2	Pk	112	1.3	Note 2&6
25900.0	42.0	v	68.3	-26.3	Note 5	35	1.2	Note 4

Note 1: Checked 2805 MHz, but no emission detected.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

EUT On Center Channel (Channel mid, 5.26 GHz); PC_NOM 13

15780.0	47.5	h	54.0	-6.6	Avg	200	1.3	Note 2&3
15780.0	67.2	h	74.0	-6.8	Pk	200	1.3	Note 2&3
21040.0	46.4	h	54.0	-7.6	Avg	280	1.3	Note 2&3
15780.0	45.8	v	54.0	-8.2	Avg	10	1.2	Note 2&3
26300.0	45.7	h	54.0	-8.3	Avg	260	1.3	Note 4
21040.0	65.5	h	74.0	-8.5	Pk	280	1.3	Note 2&3
26300.0	43.4	v	54.0	-10.6	Avg	120	1.3	Note 4
15780.0	63.3	v	74.0	-10.7	Pk	10	1.2	Note 2&3
21040.0	41.4	v	54.0	-12.6	Avg	160	1.4	Note 2&3
4208.0	40.4	v	54.0	-13.6	Pk	0	1.0	Note 2&6
4208.0	40.4	h	54.0	-13.6	Pk	0	1.0	Note 2&6
26300.0	60.0	h	74.0	-14.0	Pk	260	1.3	Note 4
26300.0	56.9	v	74.0	-17.1	Pk	120	1.3	Note 4
21040.0	55.1	v	74.0	-18.9	Pk	160	1.4	Note 2&3
10520.0	46.9	v	68.3	-21.4	Note 5	70	1.4	Note 4
10520.0	46.3	h	68.3	-22.0	Note 5	260	1.5	Note 4
4208.0	30.2	h	54.0	-23.8	Avg	0	1.0	Note 2&6
4208.0	30.1	v	54.0	-23.9	Avg	0	1.0	Note 2&6



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

EUT On Highest Channel Available (Channel high, 5.32 GHz); PC_NOM 13

10640.0	48.3	v	54.0	-5.7	Avg	71	1.0	Note 2&3
10640.0	47.9	h	54.0	-6.1	Avg	93	1.0	Note 2&3
21280.0	47.8	h	54.0	-6.2	Avg	260	1.3	Note 2&3
15960.0	47.8	h	54.0	-6.2	Avg	150	1.3	Note 2&3
21280.0	67.5	h	74.0	-6.5	Pk	260	1.3	Note 2&3
15960.0	45.5	v	54.0	-8.5	Avg	90	1.3	Note 2&3
21280.0	45.3	v	54.0	-8.7	Avg	280	1.3	Note 2&3
26600.0	44.9	h	54.0	-9.1	Avg	35	1.4	Note 4
26600.0	44.7	v	54.0	-9.3	Avg	260	1.2	Note 4
4256.0	44.3	v	54.0	-9.7	Pk	165	1.0	Note 2&6
15960.0	64.1	h	74.0	-9.9	Pk	150	1.3	Note 2&3
4256.0	44.0	h	54.0	-10.0	Pk	257	1.4	Note 2&6
10640.0	63.7	h	74.0	-10.3	Pk	93	1.0	Note 2&3
10640.0	63.7	v	74.0	-10.3	Pk	71	1.0	Note 2&3
15960.0	62.1	v	74.0	-11.9	Pk	90	1.3	Note 2&3
21280.0	59.9	v	74.0	-14.1	Pk	280	1.3	Note 2&3
26600.0	58.8	h	74.0	-15.2	Pk	35	1.4	Note 4
26600.0	58.3	v	74.0	-15.7	Pk	260	1.2	Note 4
4256.0	36.6	h	54.0	-17.4	Avg	257	1.4	Note 2&6
4256.0	33.4	v	54.0	-20.6	Avg	165	1.0	Note 2&6

Note 1: Checked 2813 and 8431 MHz, but no emission detected.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6c: Radiated Spurious Emissions, 1000 - 40000 MHz (OMNI antenna pattern)

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dBuV/m)

Fundamental signal measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
PC-NOM: 9							
5180.0	102.0	v	-	-	Pk	20	1.3 RBW = VBW = 1 MHz
5180.0	91.0	v	-	-	Avg	20	1.3 RBW = 1MHz, VBW = 10Hz
5180.0	103.3	h	-	-	Pk	296	1.9 RBW = VBW = 1 MHz
5180.0	92.3	h	-	-	Avg	296	1.9 RBW = 1MHz, VBW = 10Hz
PC-NOM: 13							
5320.0	101.4	v	-	-	Pk	360	1.0 RBW = VBW = 1 MHz
5320.0	91.3	v	-	-	Avg	360	1.0 RBW = 1MHz, VBW = 10Hz
5320.0	102.6	h	-	-	Pk	312	1.1 RBW = VBW = 1 MHz
5320.0	91.7	h	-	-	Avg	312	1.1 RBW = 1MHz, VBW = 10Hz

Band Edge Field Strength Calculations

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5150.0	58.8	v	74.0	-15.2	Pk	-	- Note 1
5150.0	39.5	v	54.0	-14.5	Avg	-	- Note 1
5150.0	60.2	h	74.0	-13.9	Pk	-	- Note 1
5150.0	40.8	h	54.0	-13.2	Avg	-	- Note 1
5350.0	60.9	v	74.0	-13.1	Pk	-	- Note 2
5350.0	42.5	v	54.0	-11.5	Avg	-	- Note 2
5350.0	62.1	h	74.0	-11.9	Pk	-	- Note 2
5350.0	42.9	h	54.0	-11.1	Avg	-	- Note 2

Note 1:	EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-43.17 dBc for peak and -51.5 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-40.5 dBc for peak and -48.8 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6d: Radiated Spurious Emissions, 1000 - 40000 MHz

EUT On Lowest Channel Available (Channel low, 5.18 GHz); PC_NOM 9

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
15540.0	51.4	h	54.0	-2.6	Avg	250	1.4	Note 2&3
15540.0	71.1	h	74.0	-2.9	Pk	250	1.4	Note 2&3
20720.0	46.9	v	54.0	-7.1	Avg	270	1.2	Note 2&3
15540.0	45.0	v	54.0	-9.1	Avg	110	1.0	Note 2&3
20720.0	44.5	h	54.0	-9.5	Avg	210	1.5	Note 2&3
25900.0	42.6	h	54.0	-11.4	Avg	300	1.5	Note 4
15540.0	62.2	v	74.0	-11.8	Pk	110	1.0	Note 2&3
20720.0	62.2	v	74.0	-11.8	Pk	270	1.2	Note 2&3
25900.0	41.4	v	54.0	-12.6	Avg	110	1.2	Note 4
20720.0	59.2	h	74.0	-14.8	Pk	210	1.5	Note 2&3
4144.0	39.1	h	54.0	-14.9	Avg	360	1.4	Note 2&6
4144.0	37.7	v	54.0	-16.3	Avg	0	1.1	Note 2&6
10360.0	51.2	v	68.3	-17.1	Note 5	320	1.4	Note 4
10360.0	49.3	h	68.3	-19.0	Note 5	210	1.5	Note 4
25900.0	54.5	h	74.0	-19.5	Pk	300	1.5	Note 4
25900.0	54.3	v	74.0	-19.7	Pk	110	1.2	Note 4
4144.0	47.9	h	74.0	-26.1	Pk	360	1.4	Note 2&6
4144.0	45.4	v	74.0	-28.6	Pk	0	1.1	Note 2&6

Note 1: Checked 2805 MHz, but no emission detected.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

EUT On Center Channel (Channel mid, 5.26 GHz); PC_NOM 13

15780.0	70.8	h	74.0	-3.2	Pk	290	1.0	Note 2&3
15780.0	50.1	h	54.0	-3.9	Avg	290	1.0	Note 2&3
26300.0	49.2	h	54.0	-4.8	Avg	245	1.3	Note 4
21040.0	46.5	h	54.0	-7.5	Avg	330	1.4	Note 2&3
15780.0	46.0	v	54.0	-8.0	Avg	30	1.1	Note 2&3
15780.0	64.2	v	74.0	-9.8	Pk	30	1.1	Note 2&3
26300.0	43.2	v	54.0	-10.8	Avg	125	1.3	Note 4
10520.0	56.0	v	68.3	-12.3	Note 5	230	1.1	Note 4
21040.0	41.6	v	54.0	-12.4	Avg	280	1.4	Note 2&3
21040.0	61.4	h	74.0	-12.6	Pk	330	1.4	Note 2&3
26300.0	60.7	h	74.0	-13.3	Pk	245	1.3	Note 4
4208.0	39.9	h	54.0	-14.1	Avg	130	1.2	Note 2&6
10520.0	53.3	h	68.3	-15.0	Note 5	160	1.0	Note 4
4208.0	38.1	v	54.0	-15.9	Avg	0	1.2	Note 2&6
26300.0	56.9	v	74.0	-17.1	Pk	125	1.3	Note 4
21040.0	55.7	v	74.0	-18.3	Pk	280	1.4	Note 2&3
4208.0	48.4	h	74.0	-25.6	Pk	130	1.2	Note 2&6
4208.0	48.2	v	74.0	-25.8	Pk	0	1.2	Note 2&6



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

EUT On Highest Channel Available (Channel high, 5.32 GHz); PC_NOM 13

10640.0	52.6	v	54.0	-1.4	Avg	310	1.4	Note 2&3
10640.0	52.0	h	54.0	-2.0	Avg	170	1.2	Note 2&3
15960.0	49.3	h	54.0	-4.7	Avg	260	1.1	Note 2&3
15960.0	48.7	v	54.0	-5.3	Avg	250	1.0	Note 2&3
10640.0	68.1	v	74.0	-5.9	Pk	310	1.4	Note 2&3
15960.0	67.7	h	74.0	-6.3	Pk	260	1.1	Note 2&3
10640.0	67.3	h	74.0	-6.7	Pk	170	1.2	Note 2&3
4256.0	46.4	v	54.0	-7.6	Pk	320	1.0	Note 2&6
4256.0	45.8	h	54.0	-8.2	Pk	360	1.2	Note 2&6
21280.0	45.0	h	54.0	-9.0	Avg	0	1.3	Note 2&3
26600.0	43.7	v	54.0	-10.3	Avg	360	1.5	Note 4
26600.0	43.7	h	54.0	-10.3	Avg	10	1.0	Note 4
15960.0	62.3	v	74.0	-11.7	Pk	250	1.0	Note 2&3
21280.0	61.8	h	74.0	-12.2	Pk	0	1.3	Note 2&3
21280.0	41.7	v	54.0	-12.3	Avg	270	2.7	Note 2&3
21280.0	56.8	v	74.0	-17.2	Pk	270	2.7	Note 2&3
26600.0	56.2	v	74.0	-17.8	Pk	360	1.5	Note 4
26600.0	56.1	h	74.0	-17.9	Pk	10	1.0	Note 4
4256.0	35.7	h	54.0	-18.3	Avg	360	1.2	Note 2&6
4256.0	35.5	v	54.0	-18.5	Avg	320	1.0	Note 2&6

Note 1: Checked 2813 and 8431 MHz, but no emission detected.

See following page for test notes...




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

...test notes for run 6b

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dBuV/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution BW: 1MHz and Video BW: 10 Hz.
Note 4:	Signal does not fall in a restricted band.
Note 5:	Signals not falling in restricted band, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).
Note 6:	This measurement was made using a resolution bandwidth of 3 kHz The instrumentation noise floor was too high to allow measurements with RBW = 1MHz because a preamplifier could not be used (with the EUT operating the intentional signal would overload the amplifier and there is no low pass filter with sufficient shape factor to reject the intentionally transmitted signal but pass the spurious signal). The signal was a narrowband signal (as verified during the conducted antenna measurements) and so the amplitude (peak/average) in a 3kHz bandwidth would be the same as that in a 1MHz bandwidth (please refer to the plot below). The peak reading has been compared with the average limit.

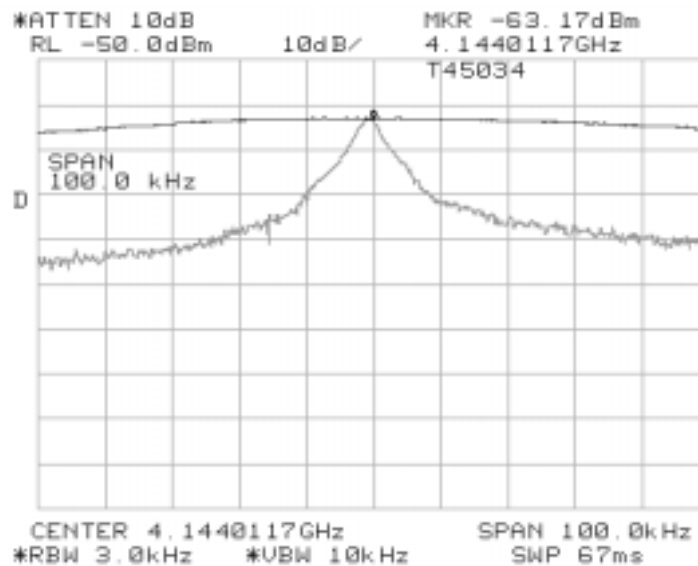

Plot showing LO signal at 4GHz measured using RBW = 1MHz and RBW = 3kHz. Amplitude of the signal does not change with resolution bandwidth.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

FCC Part 15 Subpart E Tests: Turbo Mode

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test:	11/8/2001&11/12/01
Test Engineer:	Jmartinez/M. Faustino
Test Location:	SVOATS #1

Config. Used: 2
Config Change: None
Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT was located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT unless stated otherwise.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions: Temperature: 21°C
Rel. Humidity: 63%

Summary of Results: Turbo Mode

Run #	Test Performed	Limit	Result	Comments
1	Output Power	15.407(a) (1), (2)	Pass	15.7 dBm @ 5.21GHz 15.3 dBm @ 5.29 GHz
2	Power Spectral Density (PSD)	15.407(a) (1), (2)	Pass	-1.97 dBm/MHz @ 5210MHz, -3.13 dBm/MHz @ 5290MHz
3	26dB Bandwidth	15.407	Pass	> 20 MHz
3	20 dB Bandwidth	RSS 210	Pass	> 20 MHz
4	Peak Excursion Envelope	15.407(a) (6)	Pass	Peak to average excursion < 13dB
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	All emissions below the 27dBm/MHz limit
6	RE, 1000 - 40000 MHz - Spurious Emissions	15.407(b)(6)	Pass	Refer to individual Run



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Output Power

OMNI Antenna Gain: 1.8 dBi
Half-Round Front Gain: 5.6 dBi



Channel	Frequency (MHz)		Output Power (dBm)	FCC Limit (dBm) (note 3)	Comments
Low	5210		15.3	17.0	Note 2
	5210		15.7	17.0	Note 1 / T45318/601
Midd	5250		14.9	17.0	Note 2
	5250		15.3	17.0	Note 1 / T45318/602
High	5290		14.2	24.0	Note 2
	5290		14.5	24.0	Note 1 / T45318/603

Note 1:	Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 30kHz)
Note 2:	Measured using a Boonton Power Meter with a peak power sensor in average mode
Note 3:	RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.
Note 4:	RSS 210 limit is 24dBm in the 5.25 to 5.35 GHz band, same as the FCC limit. This limit is based on the emission bandwidth and operating frequency.



EMC Test Data


Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

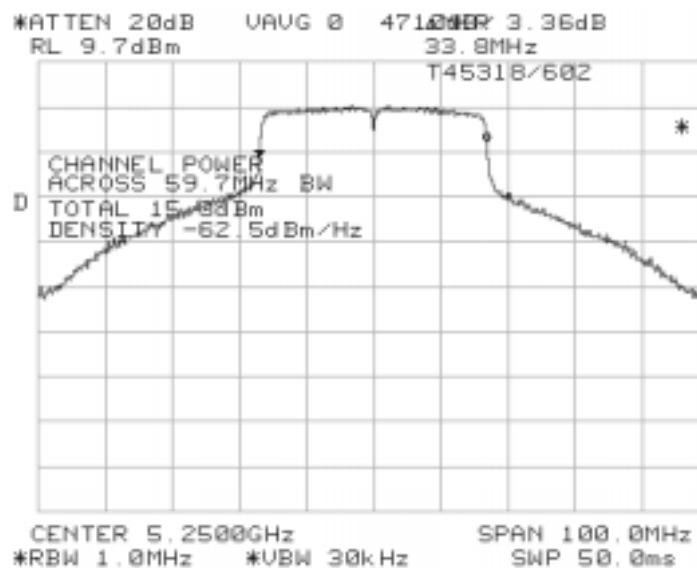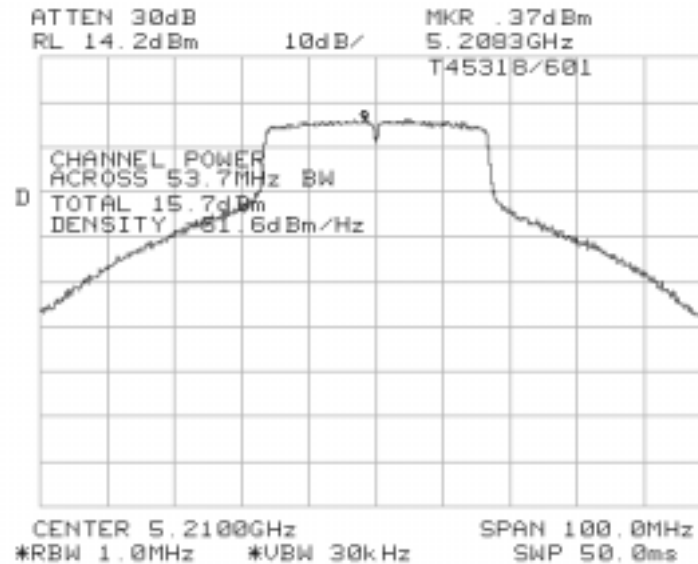



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

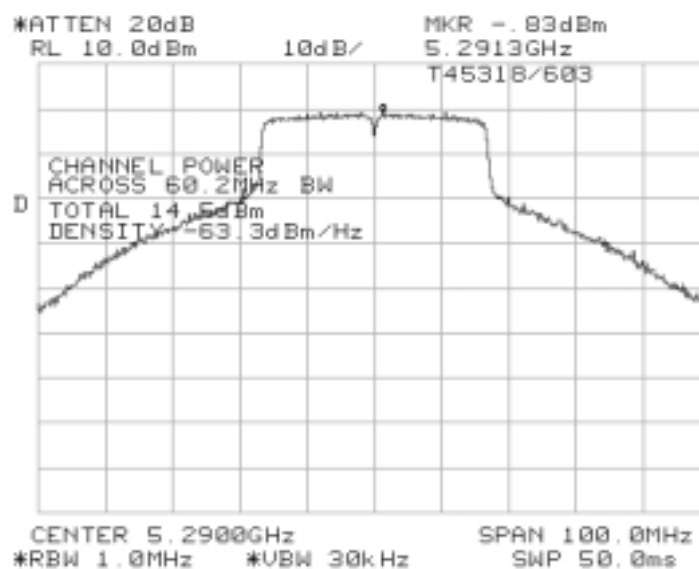



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #2: Power Spectral Density


OMNI Antenna Gain: 1.8 dBi
Half-Round Front Gain: 5.6 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	FCC Limit (dBm) note 2	Graph Reference	
Low	5210	-1.97	4.0	T45318/201	Note 1
Mid	5250	-2.50	4.0	T45318/202	Note 1
High	5290	-3.13	11.0	T45318/203	Note 1

Note 1: The above measurements were made using RBW = 1MHz, VBW = 1MHz, video averaging on. To demonstrate compliance with RSS 210, the peak PSD was also measured using RBW= VBW=1MHz, video averaging off during the peak excursion measurements (run #4). As per RSS 210 requirements, the peak PSD of **7.2 dBm** in the 5.15 to 5.25 GHz band did not exceed the maximum permitted average PSD of 10dBm by more than 6dB. Similarly, in the 5.25-5.35GHz band, the peak power spectral density of **5.67 dBm** did not exceed the maximum permitted average PSD of 11dBm by more than 6dB. No restriction is placed on the output power or average PSD with respect to RSS 210.

Note 2: RSS 210 limit is 10dBm/MHz in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit.

Plots Showing Power Spectral Density (RBW = 1MHz, VBW = 3 MHz, video averaging ON)


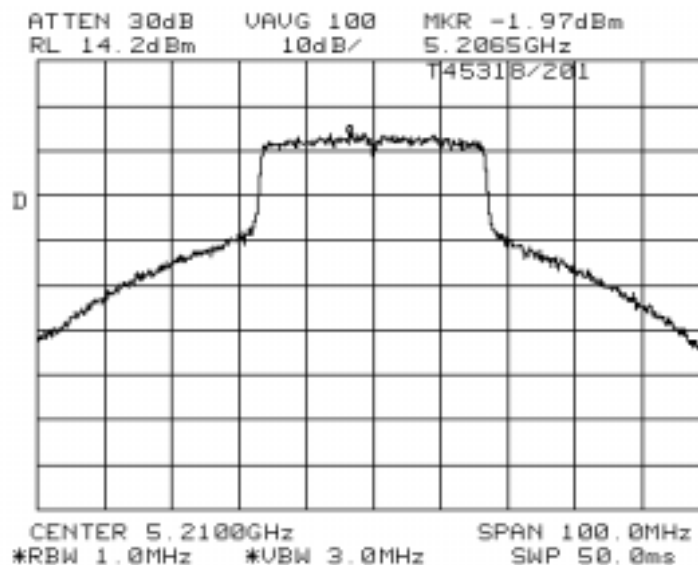




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

T45318/202

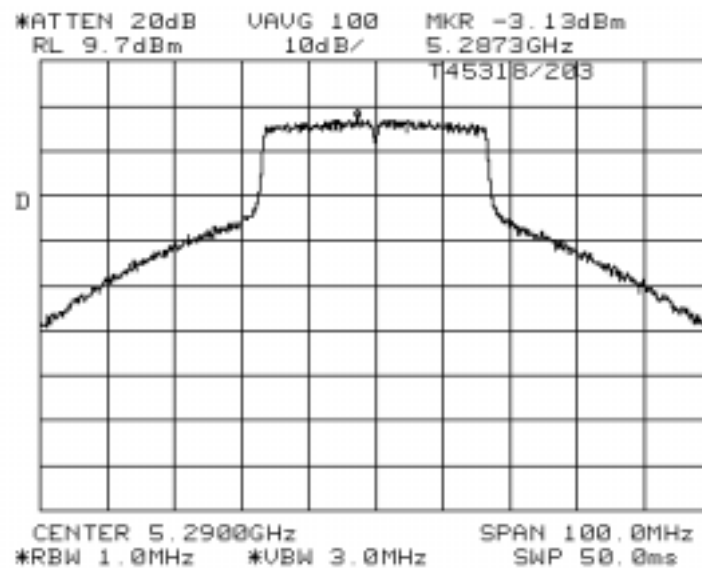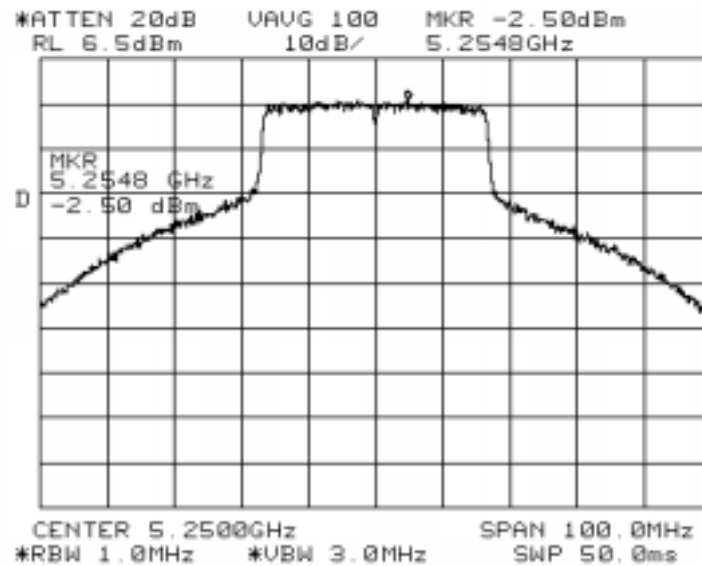




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #3: Signal Bandwidth

Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
Low	5210	300 kHz	53.7	34.3	T45318/301
Mid	5250	300 kHz	59.7	42.5	T45318/302
High	5290	300 kHz	60.2	39.0	T45318/303

Plots Showing Signal Bandwidth


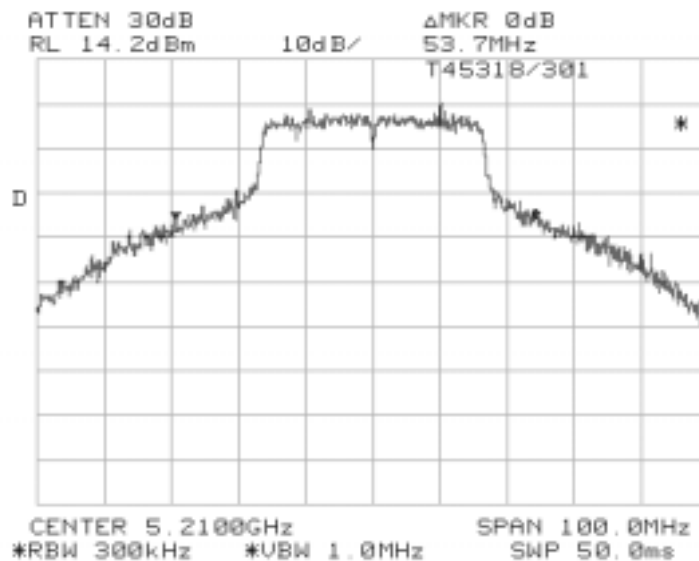




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

T45318/302

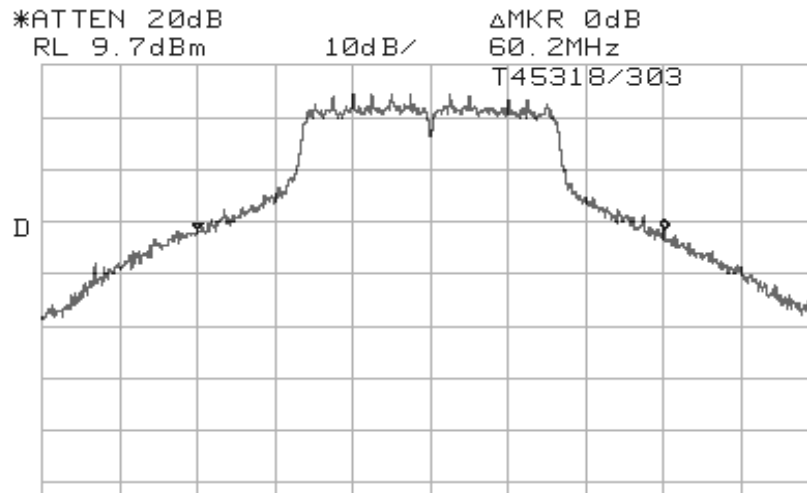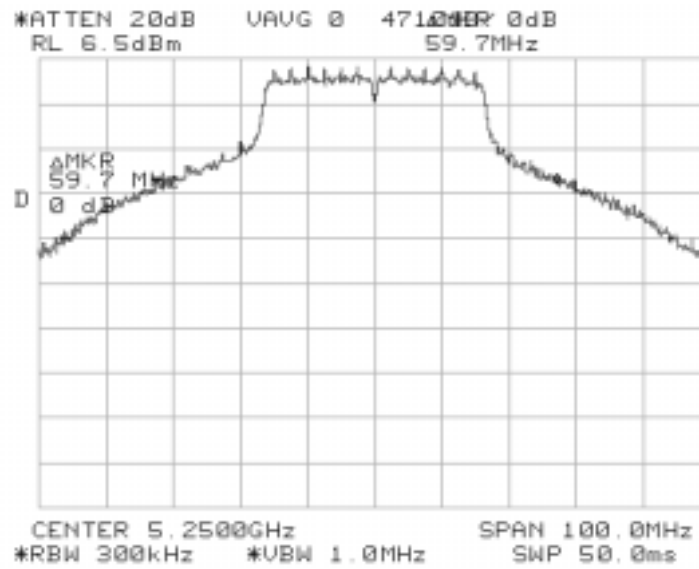



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #4: Peak Excursion Measurement


Plots Showing Peak Excursion

Trace A: RBW = VBW = 1MHz

Trace B: RBW = 1 MHz, VBW = 30kHz

Low Channel Peak Excursion = 6.83 dB. Peak power spectral density (RSS210 only) = 7.2 dBm.

FCC Peak Excursion

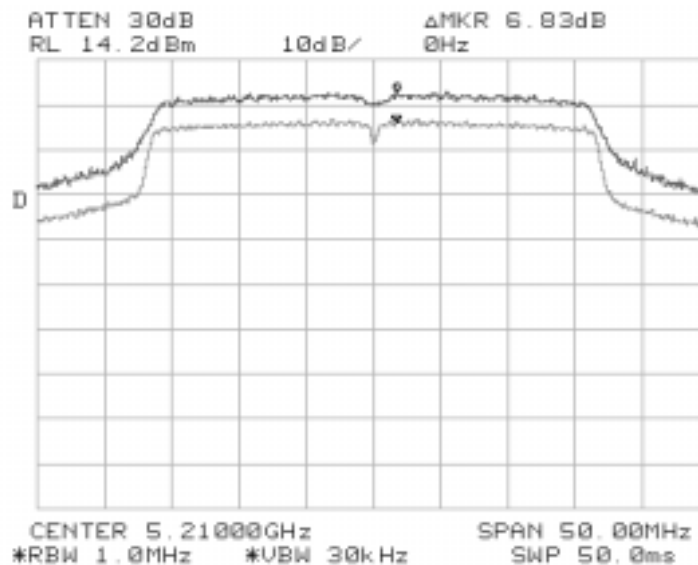




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Canada Power Spectral Density

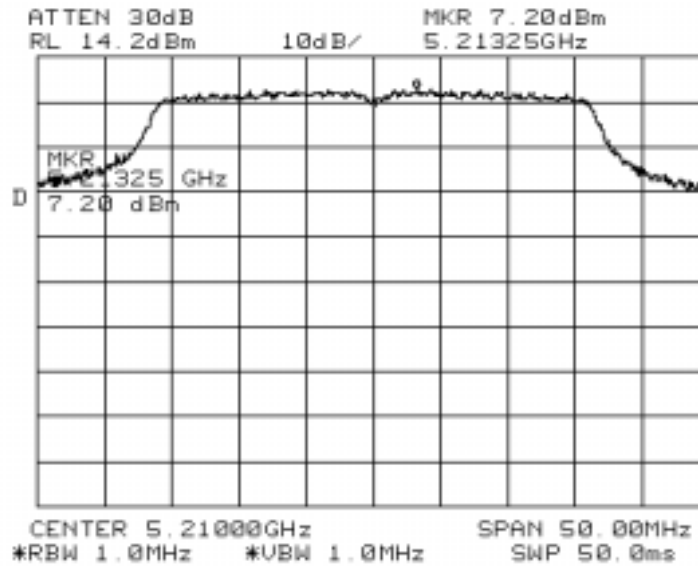




EMC Test Data


Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Middle Channel Peak Excursion = 5.5 dB. Peak power spectral density (RSS210 only) = 6.53 dBm.

FCC Peak Excursion

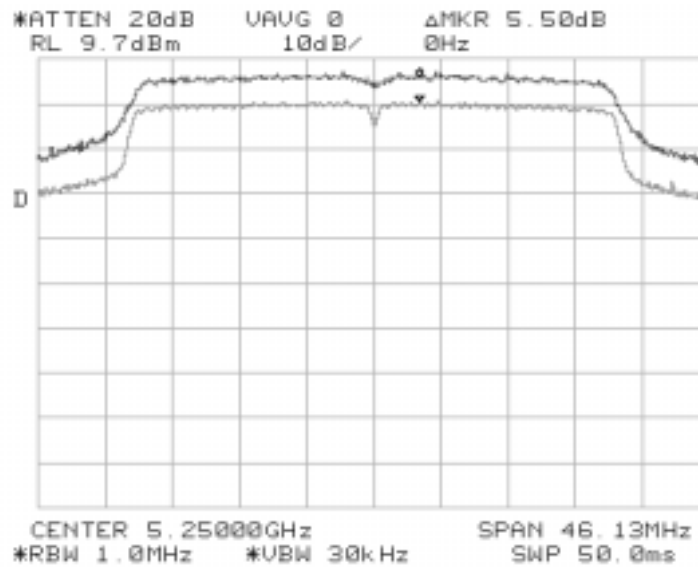

Canada Power Spectral Density

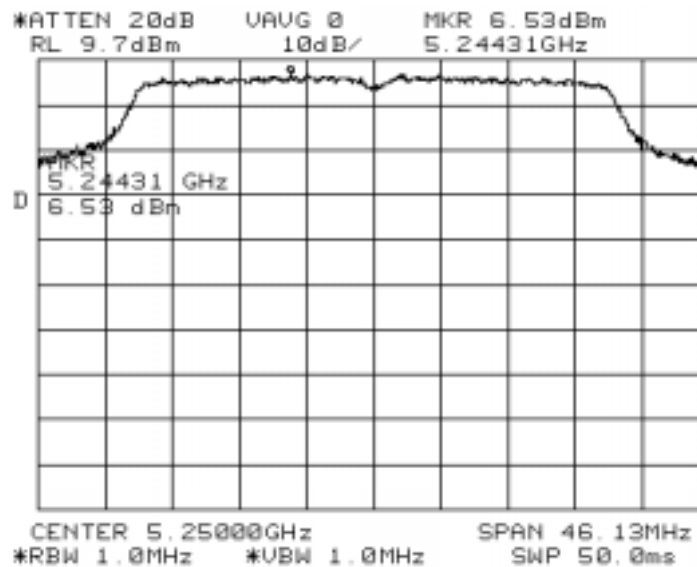




EMC Test Data


Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

High Channel Peak Excursion = 7.17 dB. Peak power spectral density (RSS210 only) = 5.67 dBm.

FCC Peak Excursion

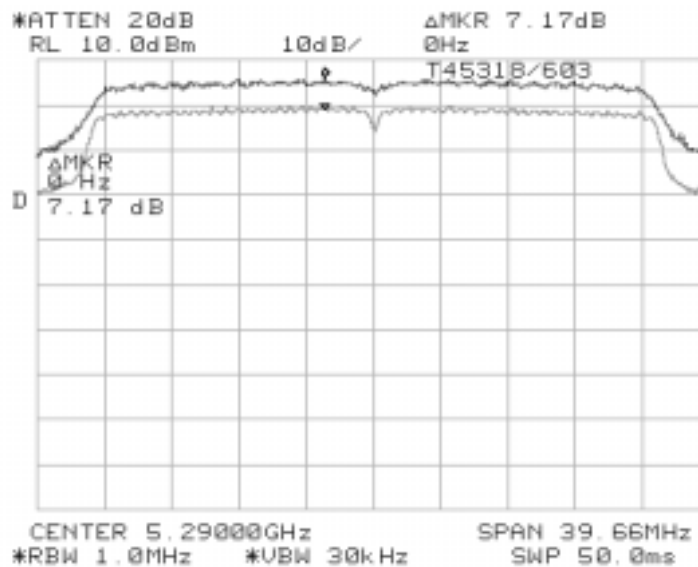

Canada Power Spectral Density

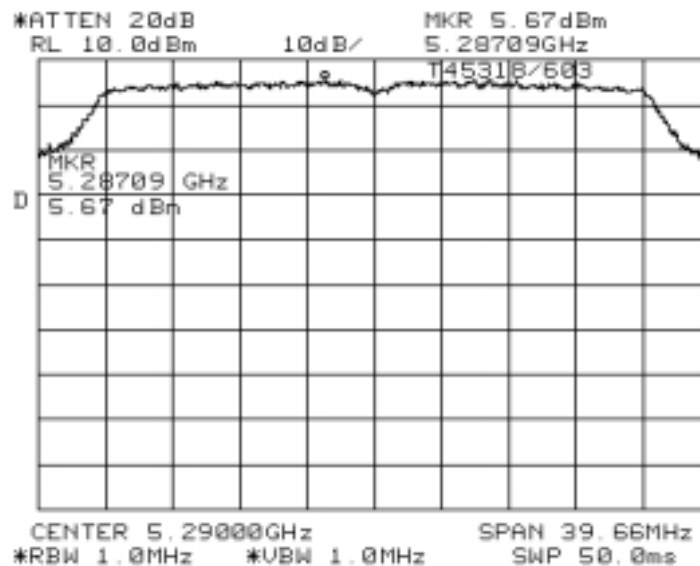



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #5: Out Of Band Spurious Emissions - Antenna Conducted

The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -27 dBm was, therefore, used for signals not in restricted bands and close to the intentional band within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
Low	5210	30 - 1000 MHz	Note 4	T45318/501
		1 to 5.15 GHz	2.805, 2.902, 4.168	T45318/502
		5.25 to 10 GHz	5.621(Note 5 -67.5 dBm), 6.248, 8.433, 8.694	T45318/503
		10 GHz to 20 GHz	10.42, 17.078(Note 5 -64.13 dBm)	T45318/504
		20 GHz to 40 GHz	None	T45318/505
Midd	5250	30 - 1000 MHz	Note 4	T45318/506
		1 to 5.25 GHz	2.815, 2.914	T45318/507
		5.35 to 10 GHz	6.291, 8.419, 8.751, 5.602 (Note 5 -65.3dBm)	T45318/508
		10 GHz to 20 GHz	10.48, 17.097(Note 5 -63.97 dBm)	T45318/509
		20 GHz to 40 GHz	None	T45318/510
High	5290	30 - 1000 MHz	Note 4	T45318/511
		1 to 5.30 GHz	2.813, 2.921	T45318/512
		5.34 to 10 GHz	8.711, 5.621(Note 5 -65.33 dBm)	T45318/513
		10 GHz to 20 GHz	10.57, 17.103(Note 5 -64.0 dBm)	T45318/514
		20 GHz to 40 GHz	None	T45318/515



Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)
Note 4:	All spurious signals in this frequency band measured during digital device radiated emissions test.
Note 5:	Spurious emission values when measured with a RBW=1MHz, VBW=3MHz, video averaging ON was < -55dBm.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B



Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz)

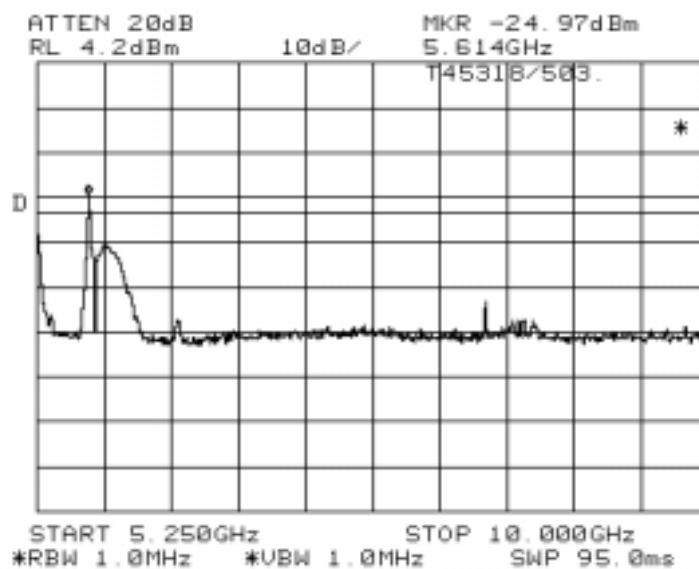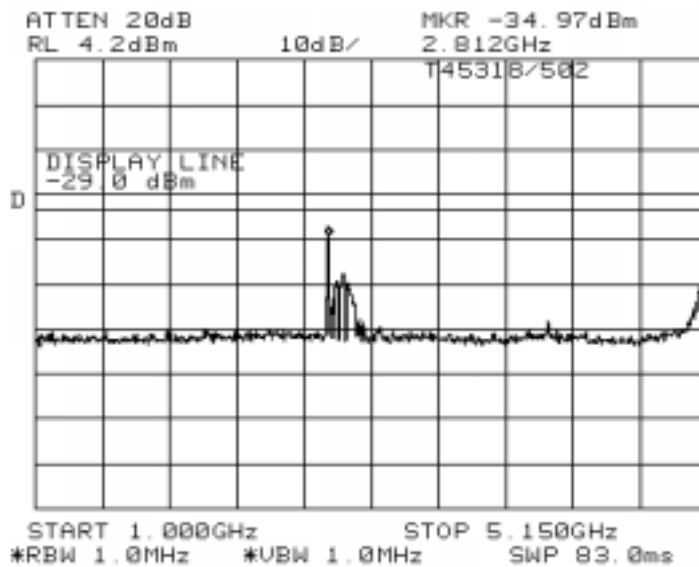



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

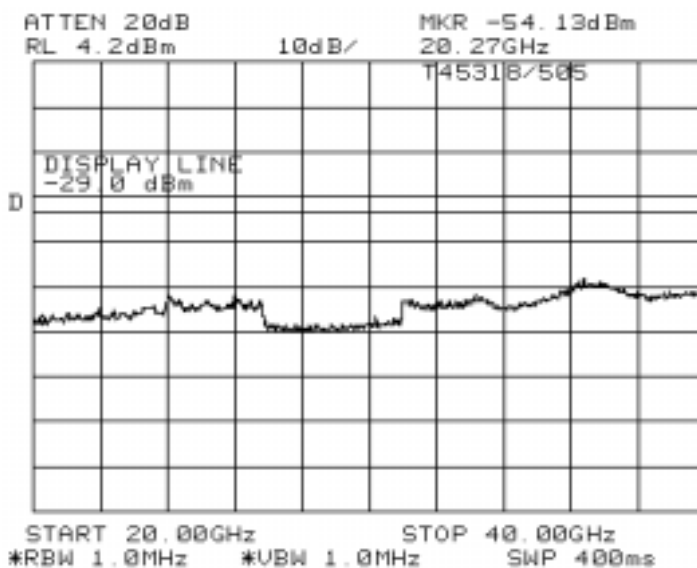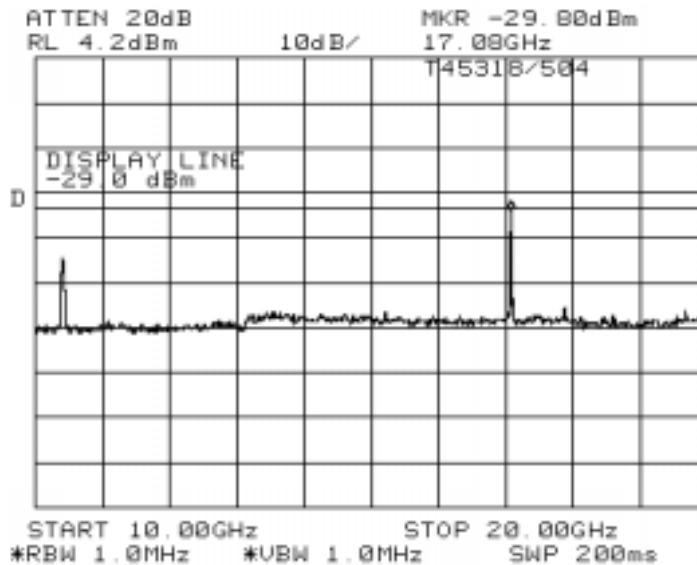



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

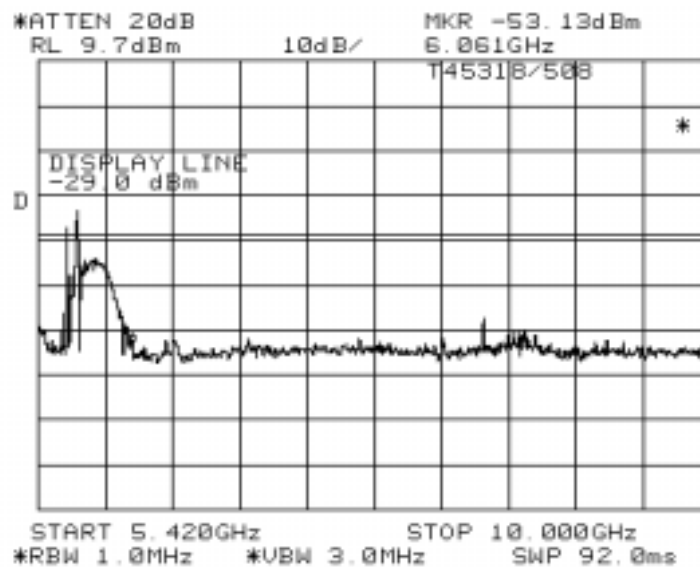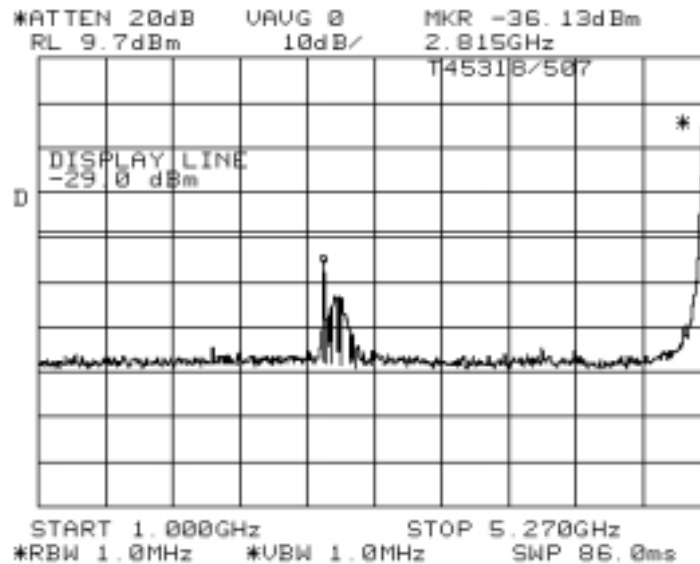



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

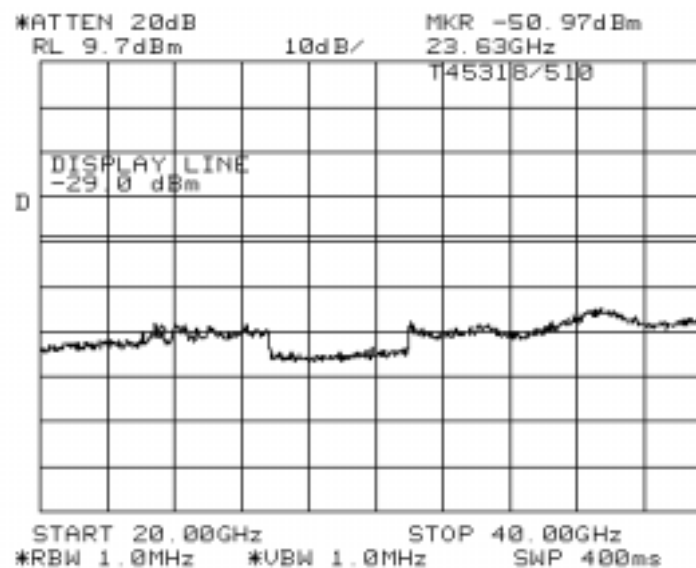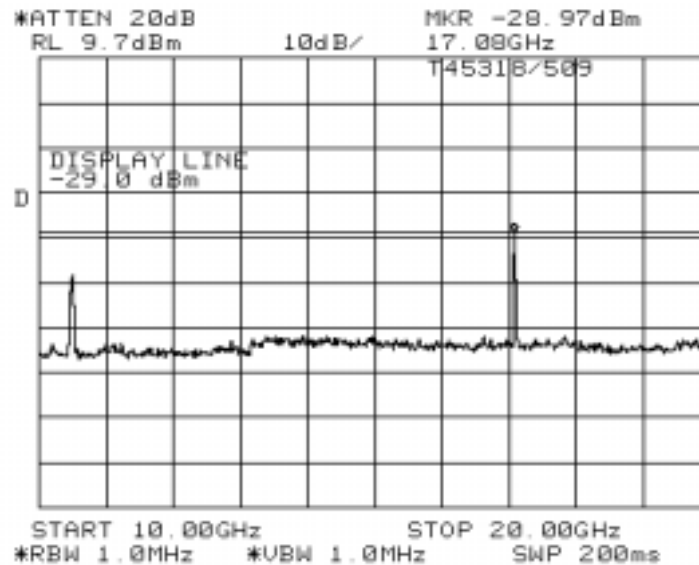



EMC Test Data



Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

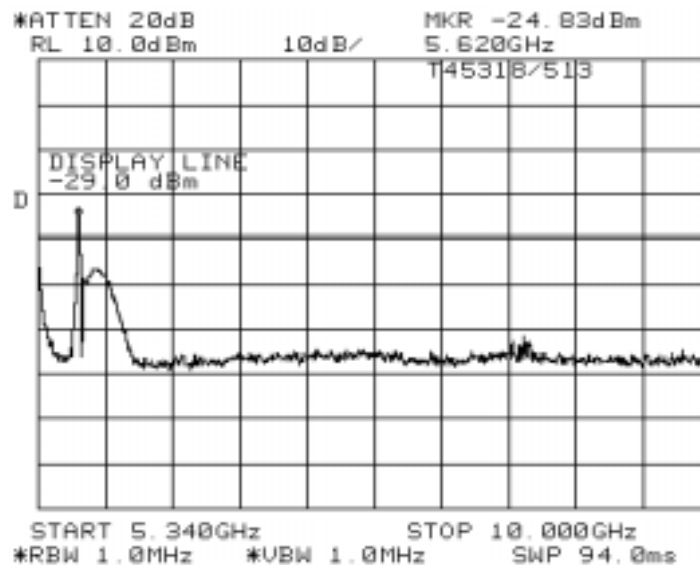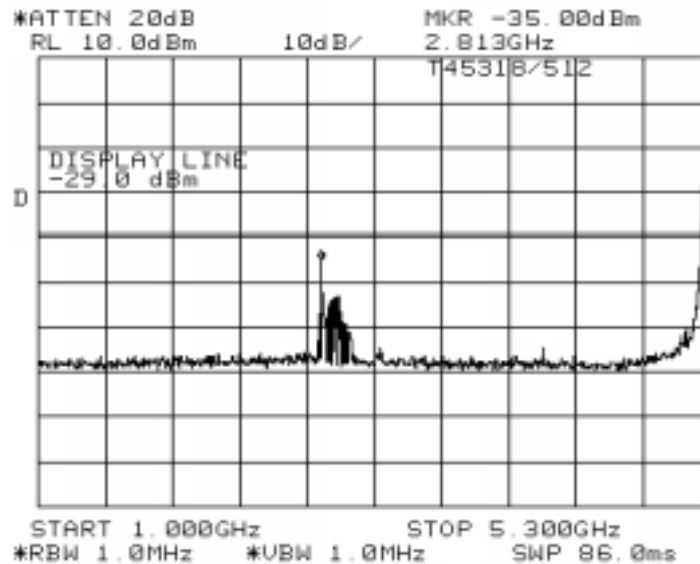



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

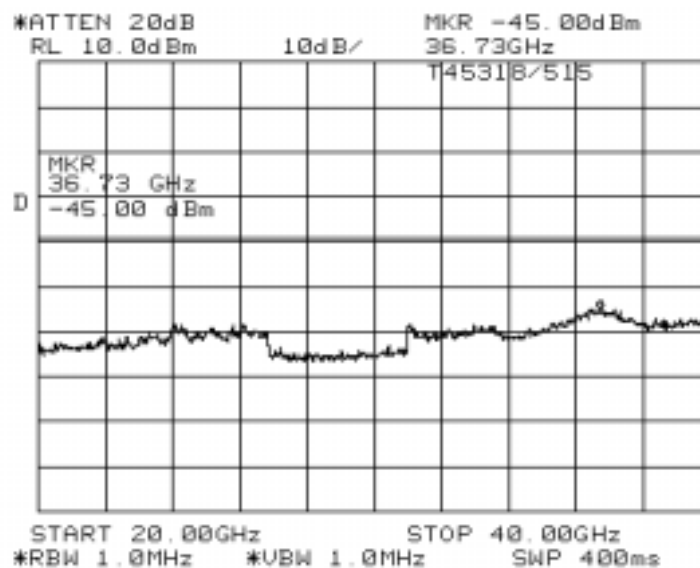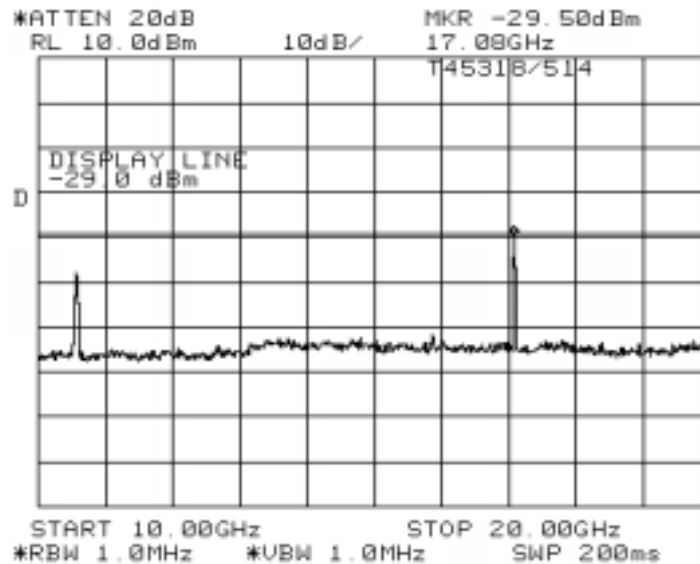



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Band Edge Measurements:


For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

5.15 GHz band edge, EUT operating on the lowest channel

The highest signal within 50 MHz of the 5.15 GHz band was -42.0dBc (Peak) / -46.5 dBc (Average)

Peak Bandedge

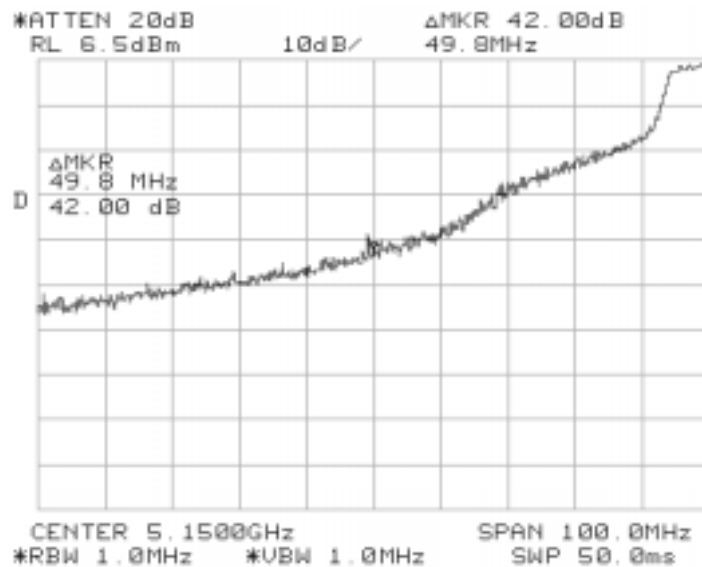




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Average Bandedge

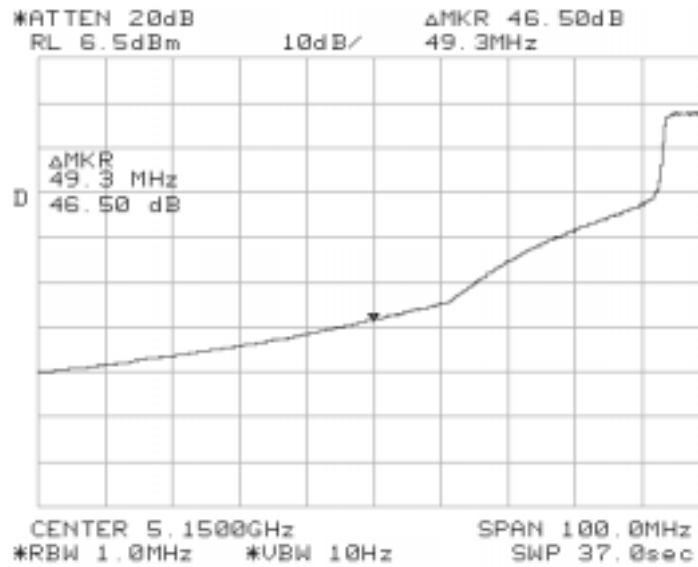




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B


5.35 GHz band edge EUT operating on the highest channel:

The highest signal in the 5.35 to 5.46 GHz band was -44.5 dBc (Peak) / -47.84 dBc (Average)

Peak Bandedge

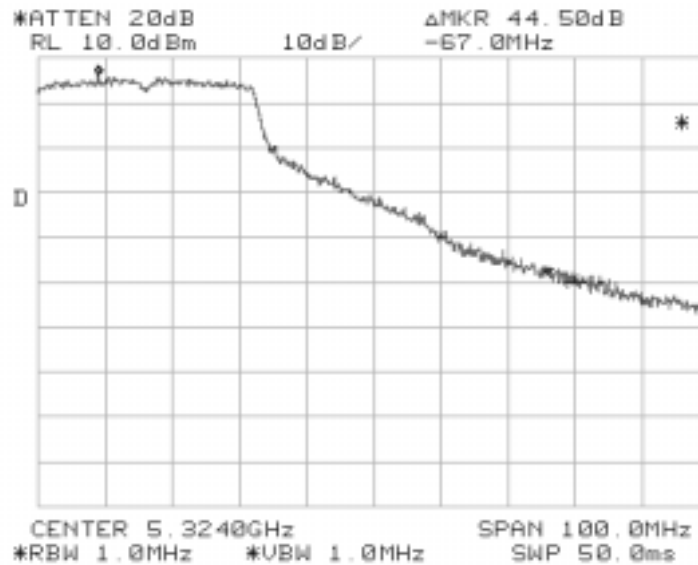

Average Bandedge

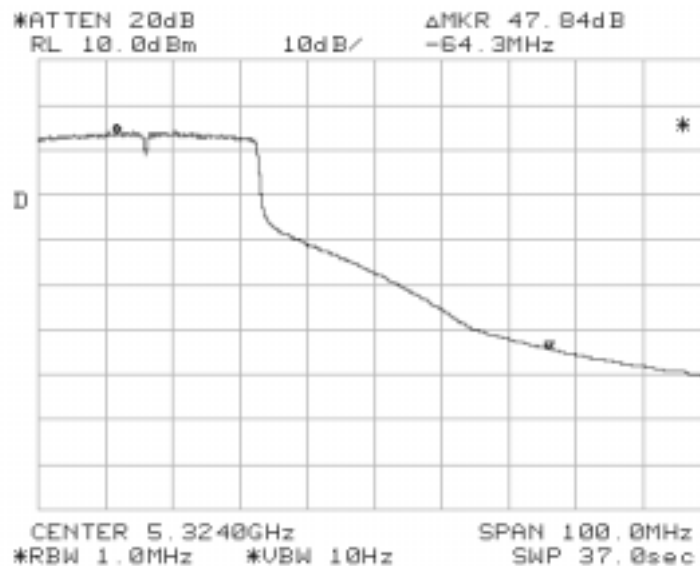



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6a: Radiated Spurious Emissions, 1000 - 40000 MHz (Half-Round Antenna)

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dBuV/m)

Fundamental signal measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
PC_Nom: 16							
5210.0	104.1	v	-	-	Pk	262	2.0 RBW = VBW = 1 MHz
5210.0	90.3	v	-	-	Avg	262	2.0 RBW = 1MHz, VBW = 10Hz
5210.0	103.0	h	-	-	Pk	287	1.1 RBW = VBW = 1 MHz
5210.0	90.8	h	-	-	Avg	287	1.1 RBW = 1MHz, VBW = 10Hz
PC_Nom: 17							
5290.0	103.0	v	-	-	Pk	260	1.9 RBW = VBW = 1 MHz
5290.0	88.3	v	-	-	Avg	260	1.9 RBW = 1MHz, VBW = 10Hz
5290.0	102.0	h	-	-	Pk	279	2.0 RBW = VBW = 1 MHz
5290.0	88.3	h	-	-	Avg	279	2.0 RBW = 1MHz, VBW = 10Hz

Band Edge Field Strength Calculations

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5150.0	62.1	v	74.0	-11.9	Pk		Note 1
5150.0	43.8	v	54.0	-10.2	Avg		Note 1
5150.0	61.0	h	74.0	-13.0	Pk		Note 1
5150.0	44.3	h	54.0	-9.7	Avg		Note 1
5290.0	58.5	v	74.0	-15.5	Pk		Note 2
5290.0	40.4	v	54.0	-13.6	Avg		Note 2
5290.0	57.5	h	74.0	-16.5	Pk		Note 2
5290.0	40.5	h	54.0	-13.5	Avg		Note 2

Note 1:	EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-42 dBc for peak and -46.5 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-44.5 dBc for peak and -47.84 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6b: Radiated Spurious Emissions, 1000 - 40000 MHz

EUT On Lowest Channel Available (Channel low, 5.21 GHz); PC_Nom: 16

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
15630.0	51.4	h	54.0	-2.6	Avg	216	1.0	
20840.0	49.2	h	54.0	-4.8	Avg	245	1.3	
15630.0	47.8	v	54.0	-6.2	Avg	72	2.0	
15630.0	66.2	h	74.0	-7.8	Pk	216	1.0	
20840.0	42.4	v	54.0	-11.6	Avg	320	1.0	
15630.0	61.3	v	74.0	-12.7	Pk	72	2.0	
20840.0	60.7	h	74.0	-13.3	Pk	245	1.3	
4168.0	38.1	v	54.0	-15.9	Avg	283	1.9	Note 2
4168.0	36.8	h	54.0	-17.2	Avg	100	1.1	Note 2
20840.0	55.6	v	74.0	-18.4	Pk	320	1.0	
10420.0	47.0	h	68.3	-21.3	Avg	236	1.4	
10420.0	46.6	v	68.3	-21.7	Pk	202	1.9	
4168.0	46.3	v	74.0	-27.7	Pk	283	1.9	Note 2
4168.0	45.7	h	74.0	-28.3	Pk	100	1.1	Note 2

Note 1: Checked 2805, 2902, and 8433 MHz, but no emission detected.

EUT On Center Channel (Channel mid, 5.25 GHz); PC_Nom: 17

15750.0	53.0	h	54.0	-1.0	Avg	206	1.0	
15750.0	48.9	v	54.0	-5.1	Avg	214	1.4	
15750.0	68.2	h	74.0	-5.8	Pk	206	1.0	
21000.0	44.5	h	54.0	-9.5	Avg	210	1.5	
21000.0	43.7	v	54.0	-10.3	Avg	280	1.0	
15750.0	62.2	v	74.0	-11.8	Pk	214	1.4	
21000.0	59.2	h	74.0	-14.8	Pk	210	1.5	
4200.0	37.7	v	54.0	-16.3	Avg	105	1.0	Note 2
21000.0	55.7	v	74.0	-18.3	Pk	280	1.0	
10500.0	49.7	v	68.3	-18.6	Note 3	191	1.3	Note 4
4200.0	35.1	h	54.0	-18.9	Avg	270	1.3	Note 2
10500.0	46.8	h	68.3	-21.5	Note 3	156	1.0	Note 4
4200.0	45.4	v	74.0	-28.6	Pk	105	1.0	Note 2
4200.0	43.1	h	74.0	-30.9	Pk	270	1.3	Note 2

Note 1: Checked 2813 and 8419 MHz, but no emission detected.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

EUT On Highest Channel Available (Channel high, 5.29 GHz): PC_Nom: 17

10580.0	50.1	v	54.0	-3.9	Avg	187	1.0	
15870.0	49.7	h	54.0	-4.3	Avg	215	1.1	
15870.0	49.5	v	54.0	-4.5	Avg	183	1.1	
10580.0	47.7	h	54.0	-6.3	Avg	143	1.4	
10580.0	65.7	v	74.0	-8.3	Pk	187	1.0	
21160.0	45.2	v	54.0	-8.8	Avg	210	1.0	
21160.0	45.0	h	54.0	-9.0	Avg	0	1.3	
15870.0	63.2	h	74.0	-10.8	Pk	215	1.1	
10580.0	62.8	h	74.0	-11.2	Pk	143	1.4	
15870.0	62.6	v	74.0	-11.4	Pk	183	1.1	
21160.0	61.8	h	74.0	-12.2	Pk	0	1.3	
4232.0	39.8	v	54.0	-14.2	Avg	364	1.0	Note 2
4232.0	39.2	h	54.0	-14.8	Avg	0	1.0	Note 2
21160.0	58.0	v	74.0	-16.0	Pk	210	1.0	
4232.0	51.0	v	74.0	-23.0	Pk	364	1.0	Note 2
4232.0	51.0	h	74.0	-23.0	Pk	0	1.0	Note 2

Note 1: Checked 2813 MHz, but no emission detected.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6c: Radiated Spurious Emissions, 1000 - 40000 MHz (OMNI antenna pattern)

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dBuV/m)

Fundamental signal measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
PC_Nom: 16							
5210.0	103.8	v	-	-	Pk	0	1.0 RBW = VBW = 1 MHz
5210.0	90.6	v	-	-	Avg	0	1.0 RBW = 1MHz, VBW = 10Hz
5210.0	103.3	h	-	-	Pk	310	1.1 RBW = VBW = 1 MHz
5210.0	90.5	h	-	-	Avg	310	1.1 RBW = 1MHz, VBW = 10Hz
PC_Nom: 17							
5290.0	102.0	v	-	-	Pk	283	2.0 RBW = VBW = 1 MHz
5290.0	89.2	v	-	-	Avg	283	2.0 RBW = 1MHz, VBW = 10Hz
5290.0	102.4	h	-	-	Pk	306	1.1 RBW = VBW = 1 MHz
5290.0	89.4	h	-	-	Avg	306	1.1 RBW = 1MHz, VBW = 10Hz

Band Edge Field Strength Calculations

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5150.0	61.8	v	74.0	-12.2	Pk		Note 1
5150.0	44.1	v	54.0	-9.9	Avg		Note 1
5150.0	61.3	h	74.0	-12.7	Pk		Note 1
5150.0	44.0	h	54.0	-10.0	Avg		Note 1
5350.0	57.5	v	74.0	-16.6	Pk		Note 2
5350.0	41.4	v	54.0	-12.6	Avg		Note 2
5350.0	57.9	h	74.0	-16.1	Pk		Note 2
5350.0	41.6	h	54.0	-12.4	Avg		Note 2

Note 1:	EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-42 dBc for peak and -46.5 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-44.5 dBc for peak and -47.84 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #6d: Radiated Spurious Emissions, 1000 - 40000 MHz

EUT On Lowest Channel Available (Channel low, 5.21 GHz); PC_Nom: 16

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
15630.0	50.3	v	54.0	-3.7	Avg	201	1.5	
15630.0	66.6	v	74.0	-7.4	Pk	201	1.5	
20840.0	46.4	h	54.0	-7.6	Avg	280	1.3	
20840.0	65.5	h	74.0	-8.5	Pk	280	1.3	
15630.0	44.0	h	54.0	-10.0	Avg	360	1.1	
20840.0	41.4	v	54.0	-12.6	Avg	160	1.4	
4168.0	39.1	h	54.0	-14.9	Avg	360	1.4	Note 2
15630.0	58.4	h	74.0	-15.6	Pk	360	1.1	
20840.0	55.1	v	74.0	-18.9	Pk	160	1.4	
10420.0	45.0	h	68.3	-23.3	Note 3	173	1.0	Note 4
4168.0	30.6	v	54.0	-23.4	Avg	151	1.0	Note 2
10420.0	42.6	v	68.3	-25.7	Note 3	260	1.7	Note 4
4168.0	47.9	h	74.0	-26.1	Pk	360	1.4	Note 2
4168.0	41.1	v	74.0	-32.9	Pk	151	1.0	Note 2

Note 1: Checked 2805, 2902, and 8433 MHz, but no emission detected.

EUT On Center Channel (Channel mid, 5.25 GHz); PC_Nom: 17

15750.0	48.2	h	54.0	-5.8	Avg	222	1.5	
21000.0	46.5	h	54.0	-7.5	Avg	330	1.4	
15750.0	44.3	v	54.0	-9.7	Avg	360	1.3	
15750.0	63.2	h	74.0	-10.8	Pk	222	1.5	
21000.0	41.6	v	54.0	-12.4	Avg	280	1.4	
21000.0	61.4	h	74.0	-12.6	Pk	330	1.4	
4200.0	39.9	h	54.0	-14.1	Avg	130	1.2	Note 2
15750.0	58.3	v	74.0	-15.7	Pk	360	1.3	
21000.0	55.7	v	74.0	-18.3	Pk	280	1.4	
10500.0	45.6	v	68.3	-22.7	Note 3	120	1.0	Note 4
4200.0	30.4	v	54.0	-23.6	Avg	277	1.0	Note 2
10500.0	43.5	h	68.3	-24.8	Note 3	168	1.4	Note 4
4200.0	48.4	h	74.0	-25.6	Pk	130	1.2	Note 2
4200.0	40.6	v	74.0	-33.4	Pk	277	1.0	Note 2

Note 1: Checked 2813 and 8419 MHz, but no emission detected.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

EUT On Highest Channel Available (Channel high, 5.29 GHz): PC_Nom: 17

21160.0	47.8	h	54.0	-6.2	Avg	260	1.3	
21160.0	67.5	h	74.0	-6.5	Pk	260	1.3	
10580.0	47.4	v	54.0	-6.6	Avg	230	1.1	
10580.0	46.8	h	54.0	-7.2	Avg	165	1.1	
21160.0	45.3	v	54.0	-8.7	Avg	280	1.3	
15870.0	45.2	h	54.0	-8.9	Avg	225	1.2	
4232.0	43.6	v	54.0	-10.4	Pk	270	1.2	Note 2
15870.0	42.3	v	54.0	-11.7	Avg	212	1.1	
10580.0	61.5	h	74.0	-12.5	Pk	165	1.1	
10580.0	61.5	v	74.0	-12.5	Pk	230	1.1	
15870.0	60.5	h	74.0	-13.6	Pk	225	1.2	
21160.0	59.9	v	74.0	-14.1	Pk	280	1.3	
4232.0	39.1	h	54.0	-14.9	Pk	302	1.1	Note 2
15870.0	57.0	v	74.0	-17.0	Pk	212	1.1	
4232.0	36.6	v	54.0	-17.4	Avg	270	1.2	Note 2
4232.0	30.6	h	54.0	-23.4	Avg	302	1.1	Note 2

Note 1: Checked 2813 MHz, but no emission detected.

See following page for test notes...




EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

...test notes for run 6b

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dBuV/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution Bw: 1MHz and Video Bw: 10 Hz. All other measurements, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).
Note 4:	Signal does not fall in a restricted band.
Note 5:	This measurement was made using a resolution bandwidth of 3 kHz. The instrumentation noise floor was too high to allow measurements with RBW = 1MHz because a preamplifier could not be used (with the EUT operating the intentional signal would overload the amplifier and there is no low pass filter with sufficient shape factor to reject the intentionally transmitted signal but pass the spurious signal). The signal was a narrowband signal (as verified during the conducted antenna measurements) and so the amplitude (peak/average) in a 3kHz bandwidth would be the same as that in a 1MHz bandwidth (please refer to the plot below). The peak reading has been compared with the average limit.

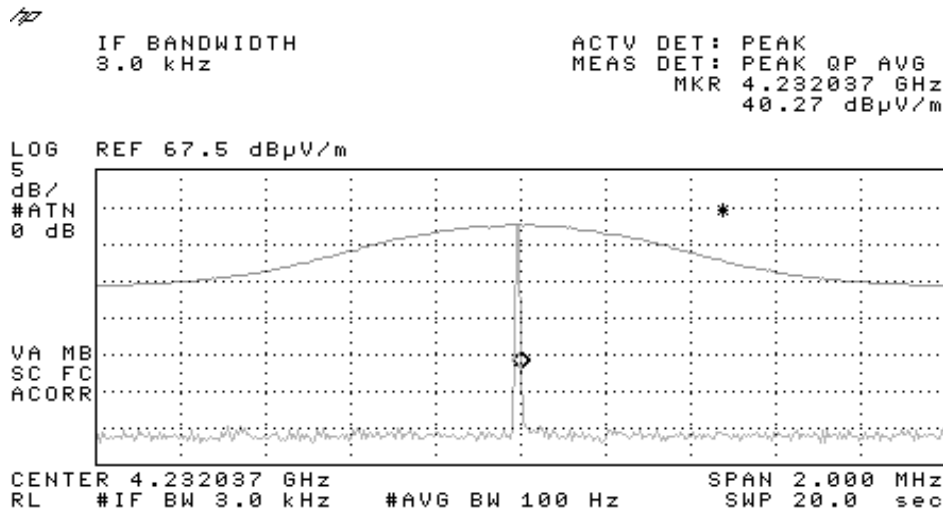

Plot showing LO signal at 4GHz measured using RBW = 1MHz and RBW = 3kHz. Amplitude of the signal does not change with resolution bandwidth.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Radiated Emissions

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/6/2001

Test Engineer: jmartinez/Rafael

Test Location: SVOATS #3

Config. Used: 1

Config Change: None

EUT Voltage: 120V/60Hz

General Test Configuration

The EUT was located on the turntable for radiated emissions testing. Remote support equipment was located approximately 4 meters from the test area with all I/O connections routed overhead.

On the OATS, the measurement antenna was located 3 meters from the EUT for the measurement range 30 - 1000 MHz.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:

Temperature: 11°C

Rel. Humidity: 67%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	RE, 30 - 1000MHz - Maximized Emissions	FCC B	Pass	-4.4dB @ 832MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #1: Pre-liminary Radiated Emissions, 30-1000 MHz

New motherboard with grounded Mini PCI board

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
832.000	41.6	v	46.0	-4.4	QP	116	1.1	
86.500	35.3	h	40.0	-4.7	QP	130	1.0	Broadband
49.000	34.9	h	40.0	-5.1	QP	185	1.0	Broadband
37.500	34.5	h	40.0	-5.5	QP	230	1.0	Broadband
231.000	39.4	h	46.0	-6.6	QP	158	1.4	33 MHz
69.900	33.1	h	40.0	-6.9	QP	145	1.0	Broadband
832.000	38.6	h	46.0	-7.4	QP	150	1.0	
231.000	37.4	v	46.0	-8.6	QP	278	1.0	
495.000	37.1	v	46.0	-8.9	QP	160	1.0	
198.000	34.0	h	43.5	-9.5	QP	140	1.5	33 MHz
264.000	35.5	h	46.0	-10.5	QP	177	1.3	33 MHz
495.000	35.5	h	46.0	-10.5	QP	270	1.3	
960.000	35.2	v	46.0	-10.8	QP	10	1.3	Signal Sub.
960.000	32.6	h	46.0	-13.4	QP	11	1.0	Signal Sub.
198.000	29.1	v	43.5	-14.4	QP	223	1.0	33 MHz
117.100	28.5	h	43.5	-15.0	QP	260	1.0	Broadband
896.000	30.6	v	46.0	-15.4	QP	290	1.0	
264.000	30.0	v	46.0	-16.0	QP	189	1.0	
800.000	30.0	v	46.0	-16.0	QP	135	1.1	
396.000	29.1	h	46.0	-16.9	QP	185	1.0	
297.000	29.0	h	46.0	-17.0	QP	86	1.2	
896.000	28.7	h	46.0	-17.3	QP	345	1.0	
800.000	28.7	h	46.0	-17.3	QP	195	1.0	
396.000	28.5	v	46.0	-17.5	QP	150	1.2	
594.000	27.5	h	46.0	-18.5	QP	40	1.5	
143.300	24.7	h	43.5	-18.8	QP	260	1.0	Broadband
594.000	26.7	v	46.0	-19.3	QP	330	1.0	
320.000	26.0	h	46.0	-20.0	QP	151	1.0	
170.100	20.1	h	43.5	-23.4	QP	260	1.0	Broadband



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #2: Maximized Emission from Run# 1

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
832.000	41.6	v	46.0	-4.4	QP	116	1.1	
86.500	35.3	h	40.0	-4.7	QP	130	1.0	Broadband
49.000	34.9	h	40.0	-5.1	QP	185	1.0	Broadband
37.500	34.5	h	40.0	-5.5	QP	230	1.0	Broadband
231.000	39.4	h	46.0	-6.6	QP	158	1.4	33 MHz
69.900	33.1	h	40.0	-6.9	QP	145	1.0	Broadband



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Conducted Emissions - Power Ports

Test Specifics

Objective: The objective of this test session is to perform engineering evaluation testing of the EUT with respect to the specification listed above.

Date of Test: 11/7/2001

Config. Used: 1

Test Engineer: mfaustino

Config Change: None

Test Location: SVOATS #3

EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located approximately 30 meters away from the test area, with all I/O connections routed overhead.

Ambient Conditions:

Temperature: 11°C

Rel. Humidity: 67%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 120V/60Hz	FCC class B	Pass	-3dB @ 2.487MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	Intel	Job Number:	J45026
Model:	WSAP5000	T-Log Number:	T45318
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 B and E, RSS-210	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.45 - 30MHz, 120V/600Hz

Frequency	Level	AC	FCC B		Detector	Comments
MHz	dBμV	Line	Limit	Margin	QP/Ave	
2.4870	45.0	Neutal	48.0	-3.0	QP	
2.4870	44.9	Line	48.0	-3.1	QP	
1.0450	44.9	Line	48.0	-3.1	QP	
2.7340	44.1	Neutal	48.0	-3.9	QP	
3.7310	43.6	Line	48.0	-4.4	QP	
3.6780	43.6	Neutal	48.0	-4.4	QP	