

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Bluetooth USB printer adapter

Model No. : GN-BTP01

FCC ID. : JCK-GN-BTP01

Filing Type : Certification

Applicant : **GIGA-BYTE TECHNOLOGY CO., LTD.**
No. 6, Bau Chiang Road, Hsin-Tien, Taipei Hsien,
Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	5
3. Test Software	6
4. General Information of Test.....	7
4.1. Test Voltage	7
4.2. Standard for Methods of Measurement.....	7
4.3. Test in Compliance with	7
4.4. Frequency Range Investigated	7
4.5. Test Distance	7
5. Report of Measurements and Examinations	8
5.1. List of Measurements and Examinations	8
5.2. Hopping Channel Separation	9
5.3. Number of Hopping Frequency	10
5.4. Hopping Channel Bandwidth.....	11
5.5. Dwell Time of Each Frequency within a 30 Seconds Period.....	12
5.6. Output Power	13
5.7. 100KHz Bandwidth of Frequency Band Edges	14
5.8. Test of Conducted Emission	15
5.9. Test of Radiated Emission	19
5.10. Antenna Requirements	30
5.11. RF Exposure	31
6. EMI Suppression Component List.....	33
7. Antenna Factor & Cable Loss	34
8. List of Measuring Equipments Used	35
9. Uncertainty of Test Site	36

History of this test report

Original Report Issue Date: Oct. 06, 2003

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Bluetooth USB printer adapter

Model No. : GN-BTP01

FCC ID. : JCK-GN-BTP01

Filing Type : Certification

Applicant : **GIGA-BYTE TECHNOLOGY CO., LTD.**

No. 6, Bau Chiang Road, Hsin-Tien, Taipei Hsien,
Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Sep. 24, 2003 at **SPORTON International Inc.** LAB.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

GIGA-BYTE TECHNOLOGY CO., LTD.
 No. 6, Bau Chiang Road, Hsin-Tien, Taipei Hsien,
 Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment : Bluetooth USB printer adapter
 Model No. : GN-BTP01
 FCC ID : JCK-GN-BTP01
 Trade Name : GIGABYTE
 Power Supply Type : Switching
 AC Power Input : Wall-Mount, 2pin
 DC Power Cable : Shielded, 1.8m, 2pin

1.4. Feature of Equipment under Test

Product Feature & Specification	
1. Host/Radio Interface	FHSS
2. Type of Modulation	GFSK
3. Number of Channels	79
4. Frequency Band	2402~2840
5. Bandwidth of each channel	1MHz
6. Maximum Output Power to Antenna	6.17dBm
7. IF & L.O. Frequency	32MHz
8. Type of Antenna Connector (Ex: SMA, TNC, MCX, MMCX, UFC.....etc)	UFC
9. Antenna Type / Class and Gain	2 dBi
10. Function Type	Transceiver
11. Power Rating (DC/AC, Voltage)	FAIRWAY / WN10A-050 Input: 100~240V, 50-60Hz, 1.0A Output: +5.0V, 2.0A
12. Basic function of product	BT communication

Channel	Frequency	Channel	Frequency
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2. Test Configuration of Equipment under Test

2.1. Test Manner


- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included EPSON Printer and EUT for EMI test.
- c. This device is an integration of an SIG qualified BlueTooth module. The used codes for modulating IF carrier is of course pseudo-random. The hopping sequence is determined by the address of the piconet master. Here is the hopping sequence indicated by channel number:
 02, 17, 68, 55, 4, 77, 56, 27, 70, 80, 22, 33, 57, 34, 29, 79, 44, 50, 3, 71, 66, 36, 78, 20, 67, 30, 24, 11, 37, 69, 23, 7, 41 38, 63, 14, 31, 59, 40, 13, 6, 25, 65, 15, 61, 73, 58, 47, 19, 28, 54, 76, 74, 48, 52, 75, 5, 42, 64, 72, 62, 51, 60, 18, 45, 53, 16, 39, 46, 32, 49, 43, 8, 21, 9, 12, 10, 26, 35
- d. For 15.247(g), during data transmission, the carrier frequency is repeatedly switched on 79 hopping frequencies, any 2 hopping frequencies will not be available on the spectrum simultaneously. So, this device can be taken as true frequency hopping device.
- e. For 15.247(h), the hopping sequence is determined by the address of piconet master. Each piconet master will have its unique address at any moment, so re-use of the hopping sequence is completely not possible. Within the piconet, one master can be communicated with many slaves via the same hopping sequency, but at any moment only one (master or slave) can be "talk". It is determined by the master that who should be "listen" or "talk". Any slave who want to "talk" has to sent "inquiry" to master first. So, 2 slaves (or one slave one master) is not possible to be on "talk" mode simultaneously.
- f. The following test modes were pretested:
 Mode 1: CH00 (2402MHz)
 Mode 2: CH39 (2441MHz)
 Mode 3: CH78 (2480MHz)
- g. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Description of Test System

Support Unit 1. -- Printer (EPSON)

FCC ID	: N/A
Model No.	: EPSON SYLUS PHOTO 830U
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Shielded, 1.35m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System



3. Test Software

During testing, "HCI-Terminal" was executed to keep transmitting signals at fixed frequency and printing data

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001

4.3. Test in Compliance with

ANSI C63.4-2001 for conducted power line test and radiated emission test
DA 00-705 for test of hopping channel separation
DA 00-705 for test of number of hopping frequency used
DA 00-705 for test of hopping channel bandwidth
DA 00-705 for test of dwell time of each frequency within a 30 second period
DA 00-705 for test of output power
DA 00-705 for test of 100khz bandwidth of frequency band edges

4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.247(a)(1)(ii)	Hopping Channel Bandwidth	Pass
<u>15.247(a)(1)</u>	Hopping Channel Separation	Pass
<u>15.247(a)(1)(ii)</u>	Number of Hopping Frequency Used	Pass
<u>15.247(a)(1)(ii)</u>	Dwell Time of Each Frequency within a 30 Second Period	Pass
<u>15.247(b)</u>	Output Power	Pass
15.247(c)	100KHz Bandwidth of Frequency Band Edges	Pass
<u>15.107/15.207</u>	Conducted Emission	Pass
15.209	Radiated Emission	Pass
<u>15.203</u>	Antenna Requirement	Pass

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.2.3. Test Setup Layout :



5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 26°C
- Relative Humidity: 63 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Hopping Channel Separation (KHz)	Limits (KHz)	Plot Ref. No.
00	2402	1000.0000	25	1
39	2441	1000.0000	25	2
78	2480	1000.0000	25	3

5.2.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition.
The EUT have its hopping function enabled.

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 63 %
- Duty cycle of the equipment during the test X = 100%

Number of Hopping Frequency (Channel)	Limits (Channel)	Plot Ref. No.
79	75	1

5.3.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition.
The EUT have its hopping function enabled.

5.4. Hopping Channel Bandwidth


5.4.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4.3. Test Setup Layout :



5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 63 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.2710	1.0	1
39	2441	0.2700	1.0	2
78	2480	0.2770	1.0	3

5.4.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies respectively.

5.5. Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.5.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. The calculate = $30 \cdot (1600/79) \cdot t$ (ie: t = the time duration of one single pulse)

5.5.3. Test Setup Layout :



5.5.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 63 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Dwell Time (s)	Limits (s)	Plot Ref. No.
00	2402	0.09600000	0.4	1
39	2441	0.09478481	0.4	2
78	2480	0.09721519	0.4	3

5.5.5. Test Configuration (EUT Operating Condition) :

Same as Section 5.2.5.

5.6. Output Power


5.6.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.6.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 1MHz and VBW to 1MHz.

5.6.3. Test Setup Layout :



5.6.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 63 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mWatt)	Limits (Watt/dBm)
00	2402	6.17	4.139996748	1W/30 dBm
39	2441	6.08	4.055085354	1W/30 dBm
78	2480	4.86	3.061963434	1W/30 dBm

5.6.5. Test Configuration (EUT Operating Condition) :

Same as Section 5.4.5.

5.7. 100KHz Bandwidth of Frequency Band Edges

5.7.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

Test Result in lower band (Channel 00) : PASS
 Test Result in higher band(Channel 78) : PASS

5.7.4. Note on Band edge Emission

The band edge emission plot on appendix B page B15. shows 58.96dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Polarity	The emission of	The maximum	Limit	Margin	Detector	Result
	carrier power strength	field strength in restrict band				
	(dB μ V/m)	(dB μ V/m)	(dB μ V/m)	(dB)		
H	94.82	35.86	74.00	-38.14	Peak	Pass
H	94.32	35.36	54.00	-18.64	Average	Pass
V	103.23	44.27	74.00	-29.73	Peak	Pass
V	99.83	40.87	54.00	-13.13	Average	Pass

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

5.7.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, and highest channel frequencies respectively.

5.8. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.8.1. Major Measuring Instruments :

• Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.8.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.8.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 26°C
- Relative Humidity: 51 %
- Test Date: Sep. 24, 2003

The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Bluetooth USB printer adapter
 Power : 110V 60Hz
 Model : GN-BTP01
 Memo : TX CH00 2402MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.184	35.74	-20.56	64.30	35.59	0.10	0.05	QP
2	0.184	36.25	-18.05	54.30	36.10	0.10	0.05	Average
3	0.369	37.77	-20.75	58.52	37.53	0.10	0.14	QP
4	0.369	35.99	-12.53	48.52	35.75	0.10	0.14	Average
5	0.739	30.83	-15.17	46.00	30.60	0.10	0.13	Average
6	0.739	36.62	-19.38	56.00	36.39	0.10	0.13	QP
7	1.110	33.15	-22.85	56.00	32.95	0.10	0.10	QP
8	1.110	24.12	-21.88	46.00	23.92	0.10	0.10	Average
9	1.465	31.30	-24.70	56.00	31.14	0.10	0.06	QP
10	1.465	20.30	-25.70	46.00	20.14	0.10	0.06	Average
11	2.189	26.97	-29.03	56.00	26.84	0.10	0.03	QP
12	2.189	14.07	-31.93	46.00	13.94	0.10	0.03	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Bluetooth USB printer adapter
 Power : 110V 60Hz
 Model : GN-BTP01
 Memo : TX CH00 2402MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.186	42.07	-22.14	64.21	41.92	0.10	0.05	QP
2	0.186	42.28	-11.93	54.21	42.13	0.10	0.05	Average
3	0.369	37.63	-20.89	58.52	37.39	0.10	0.14	QP
4	0.369	35.07	-13.45	48.52	34.83	0.10	0.14	Average
5	0.736	36.44	-19.56	56.00	36.21	0.10	0.13	QP
6	0.736	28.94	-17.06	46.00	28.71	0.10	0.13	Average
7	1.097	34.04	-21.96	56.00	33.83	0.10	0.11	QP
8	1.097	23.69	-22.31	46.00	23.48	0.10	0.11	Average
9	1.680	31.90	-24.10	56.00	31.76	0.10	0.04	QP
10	1.680	16.60	-29.40	46.00	16.46	0.10	0.04	Average
11	2.030	29.51	-26.49	56.00	29.39	0.10	0.02	QP
12	2.030	18.12	-27.88	46.00	18.00	0.10	0.02	Average

Test Engineer: Steve Chen
 Steve Chen

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 26°C
- Relative Humidity: 51 %
- Test Date: Sep. 24, 2003

The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Bluetooth USB printer adapter
 Power : 110V 60Hz
 Model : GN-BTP01
 Memo : TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.184	35.76	-28.53	64.29	35.61	0.10	0.05	QP
2	0.184	36.46	-17.83	54.29	36.31	0.10	0.05	Average
3	0.367	37.24	-21.34	58.58	37.00	0.10	0.14	QP
4	0.367	35.47	-13.11	48.58	35.23	0.10	0.14	Average
5	0.736	36.34	-19.66	56.00	36.11	0.10	0.13	QP
6	0.736	31.83	-14.17	46.00	31.60	0.10	0.13	Average
7	1.105	32.98	-23.02	56.00	32.77	0.10	0.11	QP
8	1.105	23.69	-22.31	46.00	23.48	0.10	0.11	Average
9	1.669	30.97	-25.03	56.00	30.82	0.10	0.05	QP
10	1.669	15.15	-30.85	46.00	15.00	0.10	0.05	Average
11	2.034	28.28	-27.72	56.00	28.16	0.10	0.02	QP
12	2.034	14.28	-31.72	46.00	14.16	0.10	0.02	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Bluetooth USB printer adapter
 Power : 110V 60Hz
 Model : GN-BTP01
 Memo : TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.184	42.17	-22.13	64.30	42.02	0.10	0.05	QP
2	0.184	42.28	-12.02	54.30	42.13	0.10	0.05	Average
3	0.369	35.84	-12.69	48.53	35.60	0.10	0.14	Average
4	0.369	37.71	-20.82	58.53	37.47	0.10	0.14	QP
5	0.743	37.34	-18.66	56.00	37.11	0.10	0.13	QP
6	0.743	24.66	-21.34	46.00	24.43	0.10	0.13	Average
7	1.095	33.96	-22.04	56.00	33.75	0.10	0.11	QP
8	1.095	23.83	-22.17	46.00	23.62	0.10	0.11	Average
9	1.290	21.63	-24.37	46.00	21.45	0.10	0.08	Average
10	1.290	31.04	-24.96	56.00	30.86	0.10	0.08	QP
11	1.660	25.33	-20.67	46.00	25.18	0.10	0.05	Average
12	1.660	32.82	-23.18	56.00	32.67	0.10	0.05	QP

Test Engineer: Steve
 Steve Chen

- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 26°C
- Relative Humidity: 51 %
- Test Date: Sep. 24, 2003

The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Bluetooth USB printer adapter
 Power : 110V 60Hz
 Model : GN-BTP01
 Memo : TX CH78 2480

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.187	34.90	-29.27	64.17	34.75	0.10	0.05	QP
2	0.187	35.05	-19.12	54.17	34.90	0.10	0.05	Average
3	0.369	36.42	-12.10	48.52	36.18	0.10	0.14	Average
4	0.369	37.89	-20.63	58.52	37.65	0.10	0.14	QP
5	0.741	36.98	-19.02	56.00	36.75	0.10	0.13	QP
6	0.741	29.02	-16.98	46.00	28.79	0.10	0.13	Average
7	1.109	32.70	-23.30	56.00	32.50	0.10	0.10	QP
8	1.109	28.88	-17.12	46.00	28.68	0.10	0.10	Average
9	1.460	24.12	-31.88	56.00	23.95	0.10	0.07	QP
10	1.460	4.89	-41.11	46.00	4.72	0.10	0.07	Average
11	1.850	30.59	-25.41	56.00	30.46	0.10	0.03	QP
12	1.850	18.28	-27.72	46.00	18.15	0.10	0.03	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Bluetooth USB printer adapter
 Power : 110V 60Hz
 Model : GN-BTP01
 Memo : TX CH78 2480

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.185	42.11	-22.13	64.24	41.96	0.10	0.05	QP
2	0.185	42.42	-11.82	54.24	42.27	0.10	0.05	Average
3	0.371	33.81	-14.67	48.48	33.57	0.10	0.14	Average
4	0.371	37.95	-20.53	58.48	37.71	0.10	0.14	QP
5	0.739	37.46	-18.54	56.00	37.23	0.10	0.13	QP
6	0.739	30.47	-15.53	46.00	30.24	0.10	0.13	Average
7	1.104	33.62	-22.38	56.00	33.41	0.10	0.11	QP
8	1.104	24.95	-21.05	46.00	24.74	0.10	0.11	Average
9	1.480	30.42	-25.58	56.00	30.26	0.10	0.06	QP
10	1.480	18.60	-27.40	46.00	18.44	0.10	0.06	Average
11	1.670	33.00	-23.00	56.00	32.85	0.10	0.05	QP
12	1.670	19.64	-26.36	46.00	19.49	0.10	0.05	Average

Test Engineer: Steve
 Steve Chen

5.9. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.9.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.9.1. Major Measuring Instruments

- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz

- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz


- Spectrum analyzer (R&S FSP40)
 - Attenuation 10 dB
 - Start Frequency 1 GHz
 - Stop Frequency 25 GHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 40 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.9.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.9.3. Typical Test Setup Layout of Radiated Emission

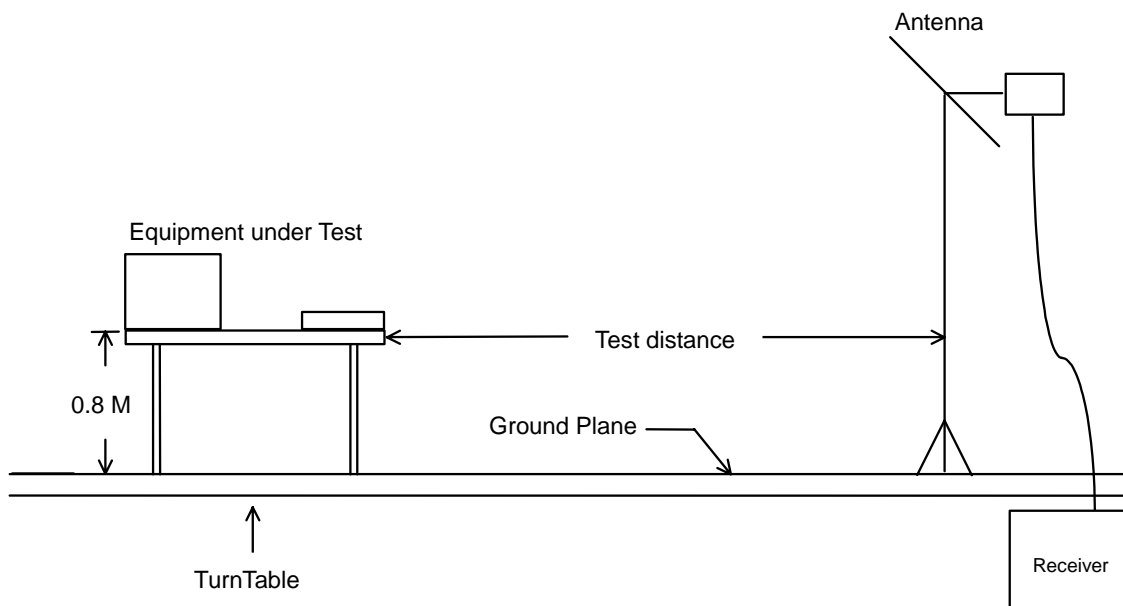

5.9.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 63 %
- Test Date: Sep. 18, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH00 2402MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	32.970	22.74	-17.26	40.00	35.01	13.80	1.03	27.10	Peak	---	---
2	179.850	28.55	-14.95	43.50	45.92	7.59	1.72	26.60	Peak	---	---
3	216.300	28.27	-17.73	46.00	44.18	8.80	1.89	26.60	Peak	---	---
1	310.500	31.68	-14.32	46.00	44.31	11.71	2.33	26.67	Peak	---	---
2	640.200	31.81	-14.19	46.00	38.35	17.57	3.89	28.00	Peak	---	---
3	766.900	32.15	-13.85	46.00	37.14	18.53	4.48	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH00 2402MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	34.860	33.77	-6.23	40.00	46.81	13.02	1.04	27.10	Peak	100	105
2	43.770	32.48	-7.52	40.00	49.36	9.14	1.08	27.10	Peak	---	---
3	143.940	26.07	-17.43	43.50	41.41	9.93	1.55	26.02	Peak	---	---
1	478.500	33.27	-12.73	46.00	42.00	15.74	3.12	27.59	Peak	---	---
2	640.200	33.89	-12.11	46.00	40.43	17.57	3.89	28.00	Peak	---	---
3	704.600	32.55	-13.45	46.00	38.32	18.04	4.19	28.00	Peak	---	---
1	2302.000	49.51	-24.49	74.00	42.56	28.02	6.08	27.15	Peak	---	---
2	2302.000	43.47	-10.53	54.00	36.52	28.02	6.08	27.15	Average	---	---

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2404.000	H	28.23	6.21	61.15	-	-	95.59	60186.63		Peak
2404.000	H	28.23	6.21	59.06	-	-	93.50	47315.13		A.V.
2404.000	V	28.23	6.21	68.61	-	-	103.05	142069.22		Peak
2404.000	V	28.23	6.21	64.41	-	-	98.85	87599.17		A.V.
4804.000	H	33.03	9.05	15.48	74.00	5011.87	57.56	755.09	-16.44	Peak
4804.000	H	33.03	9.05	10.09	54.00	501.19	52.17	405.98	-1.83	A.V.
4804.000	V	33.03	9.05	14.12	74.00	5011.87	56.20	645.65	-17.80	Peak
4804.000	V	33.03	9.05	8.13	54.00	501.19	50.21	323.97	-3.79	A.V.
7206.000	V/H						-			Peak, A.V.
9608.000	V/H						-			Peak, A.V.
12010.000	V/H						-			Peak, A.V.
14412.000	V/H						-			Peak, A.V.
16814.000	V/H						-			Peak, A.V.
19216.000	V/H						-			Peak, A.V.
21618.000	V/H						-			Peak, A.V.
24020.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Steve Chen
Steve Chen

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 63 %
- Test Date: Sep. 18, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH39 2441MHz
 : F391202

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	179.850	29.37	-14.13	43.50	46.74	7.59	1.72	26.68	Peak	---	---
2	191.730	29.41	-14.09	43.50	46.88	7.39	1.77	26.63	Peak	---	---
3	221.970	30.07	-15.93	46.00	45.42	9.33	1.92	26.60	Peak	---	---
1	318.200	31.90	-14.10	46.00	44.26	11.98	2.37	26.71	Peak	---	---
2	640.200	30.55	-15.45	46.00	37.09	17.57	3.89	28.00	Peak	---	---
3	766.900	32.23	-13.77	46.00	37.22	18.53	4.48	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH39 2441MHz
 : F391202

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	37.020	33.98	-6.02	40.00	47.97	12.06	1.05	27.10	Peak	---	---
2	43.500	32.56	-7.44	40.00	49.30	9.28	1.08	27.10	Peak	---	---
3	62.940	29.45	-10.55	40.00	50.41	4.94	1.17	27.07	Peak	---	---
1	478.500	34.49	-11.51	46.00	43.22	15.74	3.12	27.59	Peak	---	---
2	640.200	34.37	-11.63	46.00	40.91	17.57	3.89	28.00	Peak	---	---
3	704.600	33.59	-12.41	46.00	39.36	18.04	4.19	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH39 2441MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2286.000	50.60	-23.40	74.00	43.69	27.99	6.06	27.14	Peak	---	---
2	2286.000	41.72	-12.28	54.00	34.01	27.99	6.06	27.14	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH39 2441MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2286.000	54.06	-19.94	74.00	47.15	27.99	6.06	27.14	Peak	---	---
2	2286.000	51.72	-2.28	54.00	44.81	27.99	6.06	27.14	Average	100	102

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits (dBuV)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode		
2444.000	H	28.31	6.27	59.26	-	-	93.84	49203.95	A.V.	
2444.000	H	28.31	6.27	57.62	-	-	92.20	40738.03	Peak	
2438.000	V	28.30	6.26	69.74	-	-	104.30	164058.98	Peak	
2438.000	V	28.30	6.26	66.38	-	-	100.94	111429.45	A.V.	
4884.000	H	33.19	9.10	14.29	74.00	5011.87	56.58	674.53	-17.42	Peak
4884.000	H	33.19	9.10	8.02	54.00	501.19	50.31	327.72	-3.69	A.V.
4884.000	V	33.19	9.10	15.61	74.00	5011.87	57.90	785.24	-16.10	Peak
4884.000	V	33.19	9.10	3.97	54.00	501.19	46.26	205.59	-7.74	A.V.
7323.000	V/H						-			Peak, A.V.
9764.000	V/H						-			Peak, A.V.
12205.000	V/H						-			Peak, A.V.
14646.000	V/H						-			Peak, A.V.
17087.000	V/H						-			Peak, A.V.
19528.000	V/H						-			Peak, A.V.
21969.000	V/H						-			Peak, A.V.
24410.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Steve Chen
Steve Chen

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 63 %
- Test Date: Sep. 18, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GM-BTP01
 MEMO : TX CH78 2480MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	30.000	36.16	-3.84	40.00	46.90	15.35	1.01	27.10	Peak	---	---
2	191.730	30.46	-13.04	43.50	47.93	7.39	1.77	26.63	Peak	---	---
3	197.940	30.39	-13.11	43.50	47.91	7.29	1.80	26.61	Peak	---	---
1	575.800	31.54	-14.46	46.00	38.91	16.98	3.58	27.93	Peak	---	---
2	640.200	31.05	-14.95	46.00	37.59	17.57	3.89	28.00	Peak	---	---
3	766.900	32.13	-13.87	46.00	37.12	18.53	4.48	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GM-BTP01
 MEMO : TX CH78 2480MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	34.050	30.03	-9.97	40.00	42.76	13.34	1.03	27.10	Peak	---	---
2	179.850	27.30	-16.20	43.50	44.67	7.59	1.72	26.68	Peak	---	---
3	186.060	27.07	-16.43	43.50	44.48	7.49	1.75	26.65	Peak	---	---
1	478.500	33.88	-12.12	46.00	42.61	15.74	3.12	27.59	Peak	---	---
2	575.800	33.10	-12.90	46.00	40.47	16.98	3.58	27.93	Peak	---	---
3	640.200	35.63	-10.37	46.00	42.17	17.57	3.89	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH78 2480MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3966.000	57.11	-16.89	74.00	42.68	32.55	9.28	27.40	Peak	---	---
2	3966.000	50.49	-3.51	54.00	36.06	32.55	9.28	27.40	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Bluetooth USB printer adapter
 Power : 110V/60Hz
 MODEL : GN-BTP01
 MEMO : TX CH78 2480MHz
 : F391202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2302.000	50.10	-23.90	74.00	43.15	28.02	6.08	27.15	Peak	---	---
2	2302.000	47.07	-6.93	54.00	40.12	28.02	6.08	27.15	Average	---	---
3	2324.000	51.57	-22.43	74.00	44.54	28.07	6.11	27.15	Peak	---	---
4	2324.000	45.77	-8.23	54.00	38.74	28.07	6.11	27.15	Average	---	---
1	3798.000	56.85	-17.15	74.00	43.29	32.07	8.86	27.37	Peak	---	---
2	3798.000	50.74	-3.26	54.00	37.18	32.07	8.86	27.37	Average	100	100

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits (dBuV)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode	
2478.000	H	28.38	6.31	60.13	-	-	94.82	55080.77	Peak
2478.000	H	28.38	6.31	59.63	-	-	94.32	51999.60	A.V.
2478.000	V	28.38	6.31	68.54	-	-	103.23	145044.08	Peak
2478.000	V	28.38	6.31	65.14	-	-	99.83	98061.83	A.V.
4960.000	V/H						-		Peak, A.V.
7440.000	V/H						-		Peak, A.V.
9920.000	V/H						-		Peak, A.V.
12400.000	V/H						-		Peak, A.V.
14880.000	V/H						-		Peak, A.V.
17360.000	V/H						-		Peak, A.V.
19840.000	V/H						-		Peak, A.V.
22320.000	V/H						-		Peak, A.V.
24800.000	V/H						-		Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Steve Chen
Steve Chen

5.10. Antenna Requirements

The EUT use a detachable antenna via UFC external connector. It is considered meet antenna requirement of FCC.

5.10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.10.2. Antenna Connected Construction

The maximum Gain antenna used in this product is dipole antenna. The antenna connector type is UFC
The coaxial cable of the antenna is fixed to the antenna.

5.11. RF Exposure

FCC Rules and Regulations Part 1.1307,1.1310,2.1091,2.1093:

RF Exposure Compliance

5.11.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

*Plane-wave equivalent power density

5.11.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

- E = Electric field (V/m)
- P = Peak output power (mW)
- G = Antenna numeric gain (numeric)
- d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 10 W/m². We can change the formula to:

$$d = \sqrt{\frac{30 \times P \times G}{3770}}$$

Channel NO.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated RF Exposure Separation Distance (cm)	Minimum RF Exposure Separation Distance (cm)
Channel 1	2.00	1.58	6.17	4.14	0.23	20
Channel 6	2.00	1.58	6.08	4.06	0.23	20
Channel 11	2.00	1.58	4.86	3.06	0.20	20

5.11.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

6. EMI Suppression Component List

No EMI suppression components.

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.30	3.89
35	13.63	1.03	2000	31.10	5.41
40	11.11	1.06	3000	29.60	6.92
45	10.59	1.08	4000	30.80	8.24
50	6.47	1.11	5000	34.20	9.22
55	5.83	1.13	6000	33.30	10.25
60	5.18	1.15	7000	37.80	11.61
65	4.81	1.18	8000	39.40	11.78
70	4.43	1.20	9000	38.40	12.59
75	5.10	1.22	10000	38.90	13.84
80	5.91	1.24	11000	41.10	14.64
85	7.33	1.27	12000	42.70	14.12
90	8.74	1.29	13000	43.90	16.01
95	9.05	1.32	14000	43.70	13.76
100	9.36	1.34	15000	43.40	14.30
110	9.65	1.39	16000	40.90	15.16
120	9.97	1.43	17000	44.40	15.88
130	10.51	1.48	18000	47.10	16.09
140	10.32	1.53	19000	37.60	16.98
150	9.42	1.57	20000	37.30	16.21
160	8.09	1.62	21000	37.00	20.13
170	7.43	1.67	22000	38.00	19.24
180	7.60	1.72	23000	38.70	19.64
190	7.43	1.76	24000	38.60	20.54
200	7.26	1.81	25000	38.90	20.14
220	9.11	1.91	14000	43.70	13.76
240	10.88	2.00	15000	43.40	14.30
260	11.75	2.09	16000	40.90	15.16
280	11.55	2.19	17000	44.40	15.88
300	11.36	2.28	18000	47.10	16.09
320	12.03	2.38	19000	37.60	16.98
340	12.69	2.47	20000	37.30	16.21
360	13.33	2.57	21000	37.00	20.13
380	14.00	2.66	22000	38.00	19.24
400	14.63	2.76	23000	38.70	19.64
450	15.33	2.99	24000	38.60	20.54
500	16.03	3.22	25000	38.90	20.14
550	16.65	3.46			
600	17.29	3.70			
650	17.64	3.93			
700	18.00	4.17			
750	18.39	4.40			
800	18.79	4.64			
850	19.10	4.87			
900	19.42	5.11			
950	19.58	5.35			
1000	19.75	5.58			

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 07, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz –1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted

Calibration Interval of instruments listed above is one year.

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4

$U = \{((1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\}^{1/2}=2.2$ for 10m test distance

$U = \{((1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\}^{1/2}=2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$U = \{(0.3/2)^2 + (2^2+1.5^2+0.2^2)/3+(0.2)^2/2\}^{1/2}=1.66$