



FCC TEST REPORT

according to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: GIGA-BYTE TECHNOLOGY CO., LTD.
Address	: 6 BAU CHIANG RD., HSIN-TIEN, TAIPEI HSIEN 231, TAIWAN
Equipment	: Booktop
Model No.	: M1005XX,R1005XX (X=0-9,A-Z or blank)
FCC ID	: JCK-M1005
Trade Name	: GIGABYTE

Laboratory Accreditation



- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	4
1.1 List of Measurements and Examinations	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Test Mode & Test Software	8
2.3 Description of Test System	8
2.4 Connection Diagram of Test System	9
2.5 General Information of Test	10
2.6 Measurement Uncertainty	10
2.7 History of this test report	11
3. Antenna Requirements	12
3.1 Standard Applicable	12
3.2 Antenna Construction and Directional Gain	12
4. Test of Conducted Emission	13
4.1 Test Limit	13
4.2 Test Procedures	13
4.3 Typical Test Setup	14
4.4 Measurement equipment	14
4.5 Test Result and Data	15
4.6 Test Photographs	21
5. Test of Radiated Emission	22
5.1 Test Limit	22
5.2 Test Procedures	22
5.3 Typical Test Setup	23
5.4 Measurement equipment	23
5.5 Test Result and Data	24
5.6 Test Photographs	54
6. 20dB Bandwidth Measurement Data	55
6.1 Test Limit	55
6.2 Test Procedures	55
6.3 Test Setup Layout	55
6.4 Measurement equipment	55
6.5 Test Result and Data	56
7. Frequencies Separation	62
7.1 Test Limit	62
7.2 Test Procedures	62
7.3 Test Setup Layout	62
7.4 Measurement equipment	62
7.5 Test Result and Data	63
8. Dwell Time on each channel	69
8.1 Test Limit	69
8.2 Test Procedures	69
8.3 Test Setup Layout	69
8.4 Measurement equipment	69



8.5 Test Result and Data..... 70

9. Number of Hopping Channels 80

9.1 Test Limit 80

9.2 Test Procedures 80

9.3 Test Setup Layout 80

9.4 Measurement equipment 80

9.5 Test Result and Data..... 80

10. Maximum Peak Output Power 83

10.1 Test Limit 83

10.2 Test Procedures 83

10.3 Test Setup Layout 83

10.4 Measurement equipment 83

10.5 Test Result and Data..... 84

11. Band Edges Measurement 90

11.1 Test Limit 90

11.2 Test Procedure : 90

11.3 Test Setup Layout 90

11.4 List of Measuring Equipment Used..... 90

11.5 Test Result and Data..... 91

11.6 Restrict band emission Measurement Data..... 98

12. Restricted Bands of Operation 100

12.1 Labeling Requirement..... 100

Appendix A. Photographs of EUT.....A1 ~ A26



CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations Part 15 Subpart C

Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.
Address : 6 BAU CHIANG RD., HSIN-TIEN,
TAIPEI HSIEN 231, TAIWAN
Equipment : Booktop
Model No. : M1005XX,R1005XX (X=0-9,A-Z or blank)
FCC ID : JCK-M1005

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2007)**.

The test was carried out on Nov. 19, 2010 at **CerpPASS Technology Corp.**

Signature


Anson Chou
EMC/RF B.U. Vice General Manager



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth Measurement	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass
15.247(d)	. Band Edges Measurement Data	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Item	Vendor	Model	Specification
Motherboard	Gigabyte	GA-W2U805	CPU ATOM DC N550 1.5GHz IN SMD BGA559
Panel	HSD	HSD101PFW2-B	1024 x 600 Anto-Glare, 10.1" Thickness: 4.9mm(Max)
	CPT	CLAA101NB01	1024 x 600 Anti-Glare, 10.1"
THERMAL MODULE	AVC	NZ21011001	THERMAL MODULE nz21011001 AVC 115.02 x 75.22 x 9.8mm 5V 4800rpm
WIRELESS LAN CARD	AzureWave	AW-NB057H	BT-WiFi HALF MINI CARD AW AW-NB057H 802.11b/g/n+BT3.0
CAMERA MODULE	Bison	BN1KM6SV6-000	CAMERA MOUDLE BN1KM6SV6-000 BS UXGA COMS SENSOR
	YouLiSen	TS5013B1-S1-2D8	
	YouLiSen	TS5013B1-L1-2M8	
	Bison	BN1UM6YT1-000	
ADAPTER	DELTA	ADP-36 EH C	AC/DC ADAPTER 36W ADP-36EH C REV.00 C.C.:FG(12V/3A)DEL
BATTERY	SCUD	GNF-240	GNF-240 PANASONIC CELL SCUD BATTERY LI-ION 2S2P 4400mAh 4cell
	SCUD	GNF-660	BATTERY LI-ION 2S3P 7800mAh GNF-660 SANYO CELL V3.1 SCUD
HDD	WD	WD3200BEVT-22A23T0	HDD 2.5 320G WD3200BEVT-22A23T0 5400rpm SATAII 8M WD
	WD	WD2500BEVT-00A23T0	HDD 2.5 250G WD2500BEVT-00A23T0 5400rpm 27104-25008-W00S W
	TOSHIBA	MK2565GSX	HDD 2.5 250G MK2565GSX TSB 5400rpm 8M 27104-25009-T00S
	TOSHIBA	MK3265GSX	HDD 2.5 320G MK3265GSX TSB 5400rpm SATAII 8M
	HITASHI	HTS545025B9A300	HDD 2.5 250G HTS545025B9A300 5400rpm
SODIMM DDR3 2G	Transcend	JM1333KSU-2G	SODIMM 2GB DDR3-1333 CL9 TS JM1333KSU-2G(TS 128Mx8)
SODIMM DDR3 1G	Transcend	JM1333KSU-1G	SODIMM 1GB DDR3-1333 CL9 TS JM1333KSU-1G(TS 128Mx8)



RF Spec.	
Model Name	AW-NB057H
Product Description	IEEE 802.11 b/g/n Wi-Fi with Bluetooth 3.0 + HS class II Combo half mini card Module
Bluetooth Standard	IEEE 802.11b/g/n Wi-Fi compliant / Bluetooth v3.0+HS Standard
Host Interface	W-Fi : PCI-E, BT: USB
Major Chipset	Realtek RTL8188CE + CSR BC04
Dimension	26.65mm x 29.85 mm x 3.67 mm
Weight	4g
Antenna	Hirose U.FL-R SMT 1: Ant1: Wi-Fi Tx/Rx + BT 2: Ant2: Wi-Fi Tx/Rx + BT
Operating Conditions	
Voltage	3.3V+/- 5%
Temperature	TBD
Storage temperature	-40~85
Electrical Specifications	
Frequency Range	Wi-Fi: 2.4GHz ISM Bands 2.412~2.472GHz, 2.484GHz BT: 2402MHz~2483MHz
Modulation	Wi-Fi: 802.11g/n: OFDM 802.11b: CCK(11, 5.5Mbps), DQPSK(2Mbps), BPSK(1Mbps) BT: Header GFSK Payload 2M: 4-DQPSK Payload 3M: 8DPSK
Output Power	Wi-Fi 802.11b: 17dBm +/-1.5dBm(11Mbps) 802.11g: 15dBm +/-1.5dBm(54Mbps) 802.11n: 13dBm +/- 1.5dBm(HT20 MCS7) BT: -6 +4dBm(Conductive)
Receive Sensitivity	Wi-Fi 802.11b: less than -80dBm(11Mbps) 802.11g: less than -70dBm(54Mbps) 802.11n: less than -61dBm at HT40 MCS7 less than -64dBm at HT20 MCS7 BT: BER <0.1%(Anritsu 7741B Tx-70Bm)
Operating Range	Wi-Fi: Open Space: TBD/ Indoor: TBD (The transmission speed may vary according to the environment) BT: TBD



2.2 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. The complete test system included remote workstation, Monitor, Ipad, Notebook, Earphone, eSATA and EUT for EMI test. The remote workstation included Notebook.
- c. The EUT was executed to keep transmitting and receiving data via Bluetooth.
- d. The following test mode was performed for conduction and radiation test:
 - GFSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - $\pi/4$ -DQPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - 8DPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.

2.3 Description of Test System


Device	Manufacturer	Model No.	Description
Monitor	PHILIPS	202P73	Power Cable, Unshielding 1.8m Data Cable, VGA Shielding 1.35 m
Ipod*2	Apple	A1320	Data Cable, USB Shielding, 1m
Earphone	MIC	MIC-4	Data Cable, Audio Shielding 1.35m
Notebook	SONY	VPCEB25FW	Power Cable, Unshielding 1.8m
eSATA HDD	STARDOM	iTank-i302	Power Cable, Adapter Unshielding 1.8m Data Cable, eSATA Shielding 1.8m
Remote workstation			
Notebook	TOSHIBA	PSA50T-05M 00C	Power Cable, Unshielding 1.8m

Use Cable:

Cable	Quantity	Description
RJ45	1	Unshielding, 10.0m



2.4 Connection Diagram of Test System

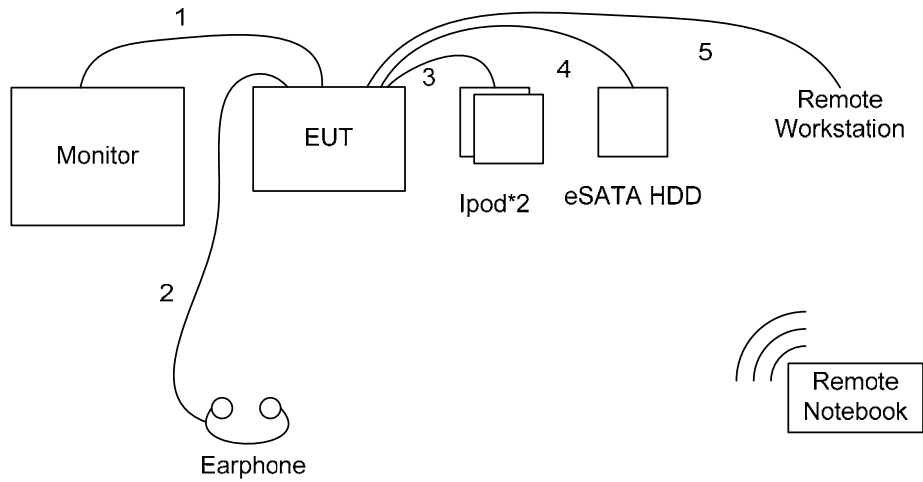

1. The VGA is connected from EUT to the Monitor.
2. The Audio cable is connected from EUT to the Earphone.
3. The USB cables (*2) are connected from EUT to the Ipod*2.
4. The eSATA cable is connected from EUT to the eSATA HDD.
5. The RJ45 cable is connected from EUT to the remote workstation.



2.5 General Information of Test

Test Site :	CerpPASS Technology Corp. 2F-11, No. 3, Yuan Qu St. (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS1-SD):	No. 68-1, Shibachong Si, Shihding Township, Taipei County, Taiwan, R.O.C.
FCC Registration Number :	TW1061, TW1056, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-543 for Telecommunication Test C-3328 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz.
Test Voltage:	AC 120V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	2.71 dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	4.11 dB
		Horizontal	4.10 dB
6 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	2.2 dB



2.7 History of this test report

ORIGINAL.

Additional attachment as following record:

Attachment No.	Issue Date	Description



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: PCB Antenna

Antenna Gain: 3.93 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

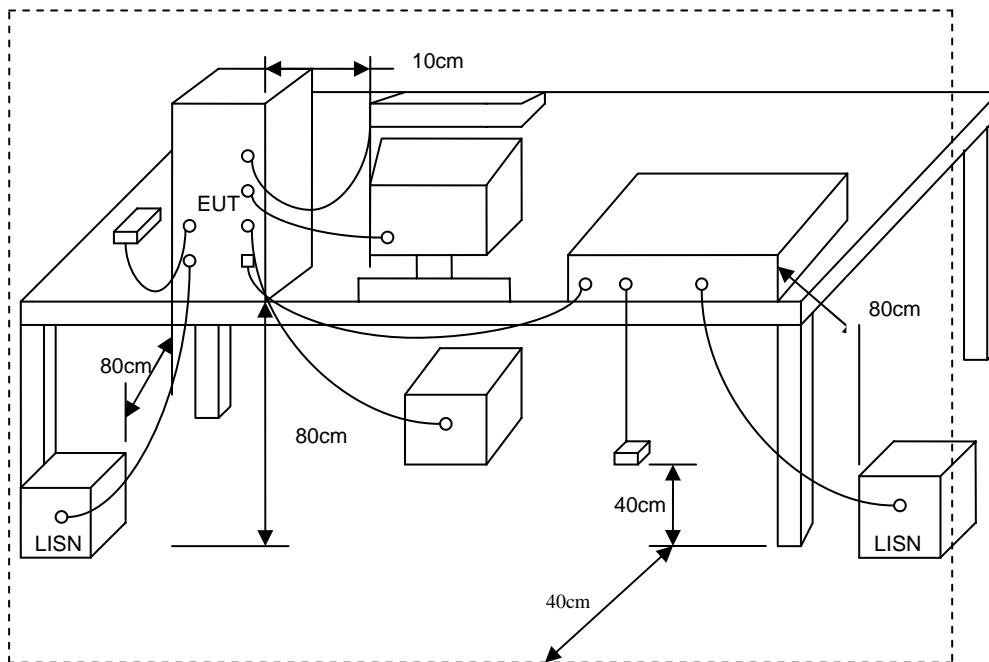


4.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Receiver	R&S	ESCI	100821	2010/01/21	2011/01/20
LISN	Schwarzbeck	NSLK 8127	8127-516	2010/05/25	2011/05/24
LISN	EMCO	3825/2	9703-2655	2010/07/19	2011/07/18



4.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: GFSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 56 %

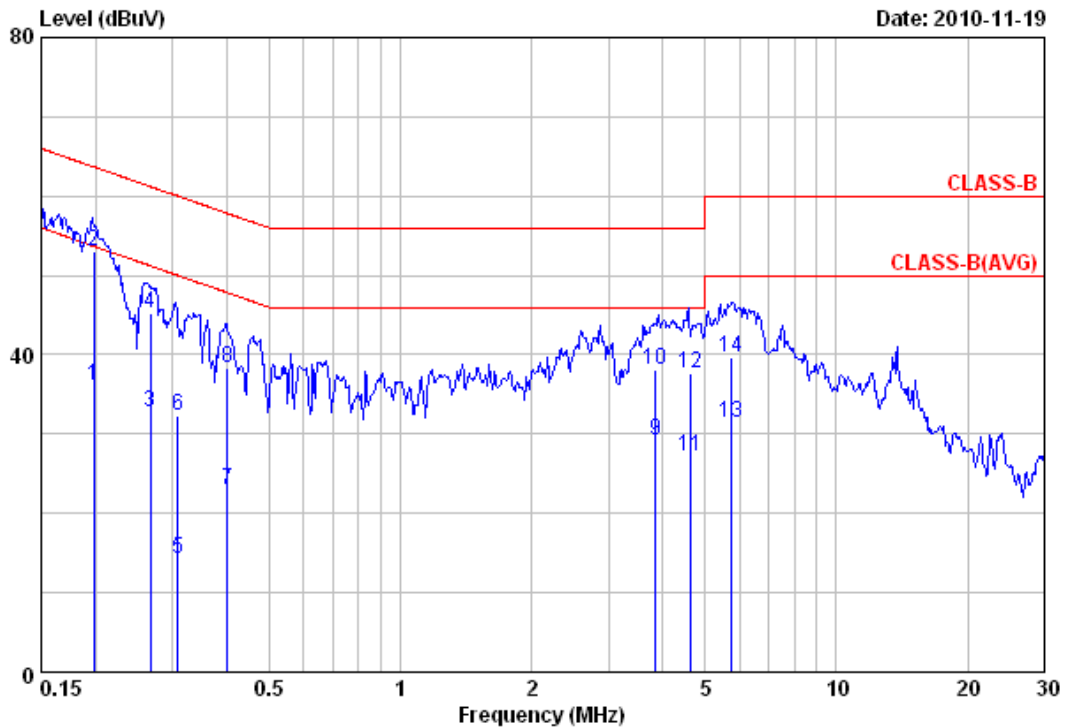


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.198	35.93	0.07	36.00	53.68	-17.68	Average
2	0.198	52.94	0.07	53.01	63.68	-10.67	QP
3	0.267	32.65	0.07	32.72	51.21	-18.49	Average
4	0.267	45.22	0.07	45.29	61.21	-15.92	QP
5	0.309	14.25	0.08	14.33	50.00	-35.67	Average
6	0.309	32.15	0.08	32.23	60.00	-27.77	QP
7	0.400	22.80	0.08	22.88	47.85	-24.97	Average
8	0.400	38.25	0.08	38.33	57.85	-19.52	QP
9	3.843	28.86	0.23	29.09	46.00	-16.91	Average
10	3.843	37.81	0.23	38.04	56.00	-17.96	QP
11	4.617	26.90	0.26	27.16	46.00	-18.84	Average
12	4.617	37.39	0.26	37.65	56.00	-18.35	QP
13	5.733	31.05	0.33	31.38	50.00	-18.62	Average
14	5.733	39.35	0.33	39.60	60.00	-20.32	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: GFSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 56 %

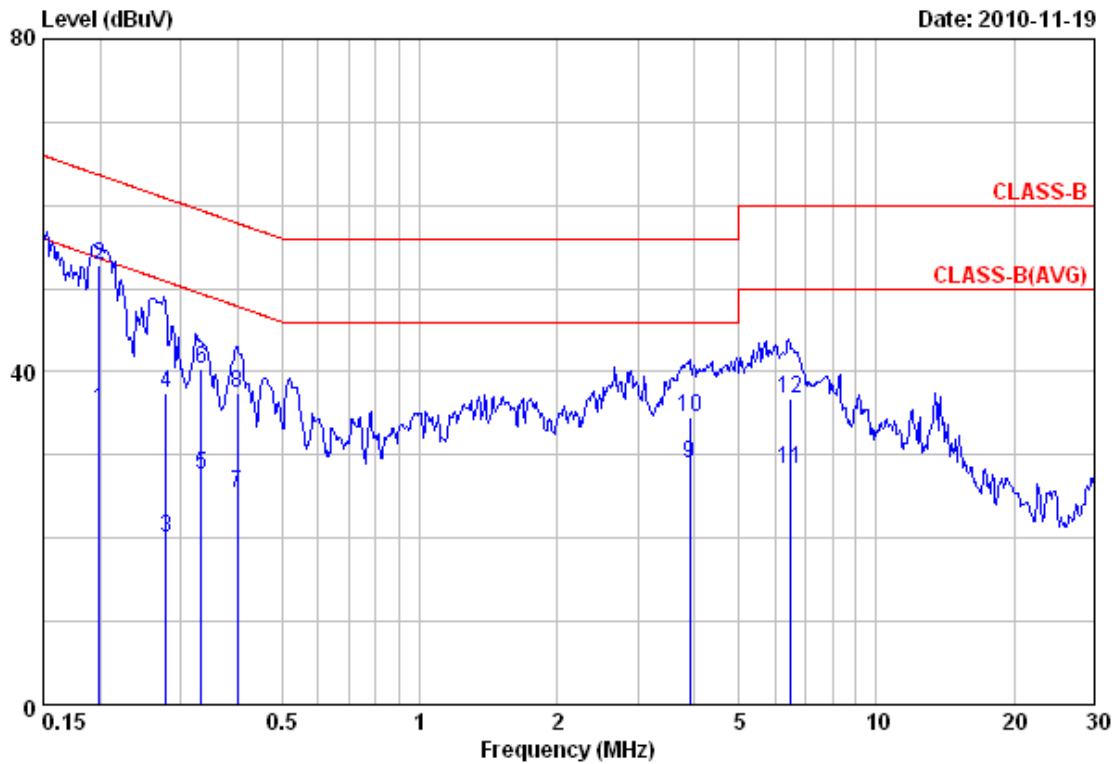


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.199	35.28	0.07	35.35	53.66	-18.31	Average
2	0.199	52.74	0.07	52.81	63.66	-10.85	QP
3	0.278	19.94	0.07	20.01	50.87	-30.86	Average
4	0.278	37.47	0.07	37.54	60.87	-23.33	QP
5	0.332	27.45	0.08	27.53	49.40	-21.87	Average
6	0.332	40.19	0.08	40.27	59.40	-19.13	QP
7	0.399	25.40	0.08	25.48	47.87	-22.39	Average
8	0.399	37.38	0.08	37.46	57.87	-20.41	QP
9	3.899	28.67	0.19	28.86	46.00	-17.14	Average
10	3.899	34.44	0.19	34.63	56.00	-21.37	QP
11	6.464	27.93	0.28	28.21	50.00	-21.79	Average
12	6.464	36.48	0.28	36.76	60.00	-23.24	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: $\pi/4$ -DQPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 56 %

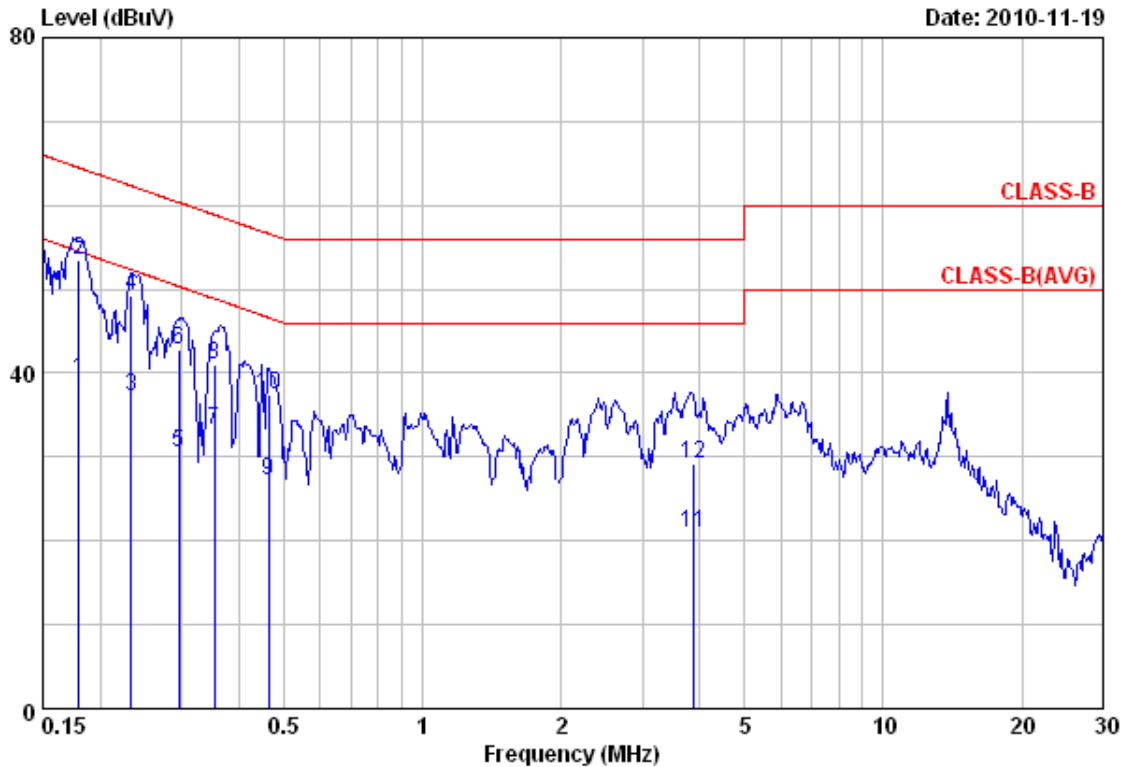


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.180	39.17	0.07	39.24	54.50	-15.26	Average
2	0.180	53.42	0.07	53.49	64.50	-11.01	QP
3	0.233	37.07	0.07	37.14	52.35	-15.21	Average
4	0.233	49.26	0.07	49.33	62.35	-13.02	QP
5	0.297	30.38	0.08	30.46	50.34	-19.88	Average
6	0.297	42.63	0.08	42.71	60.34	-17.63	QP
7	0.354	33.08	0.08	33.16	48.86	-15.70	Average
8	0.354	41.02	0.08	41.10	58.86	-17.76	QP
9	0.464	27.00	0.08	27.08	46.63	-19.55	Average
10	0.464	37.29	0.08	37.37	56.63	-19.26	QP
11	3.872	20.77	0.23	21.00	46.00	-25.00	Average
12	3.872	28.92	0.23	29.15	56.00	-26.85	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: $\pi/4$ -DQPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 56 %

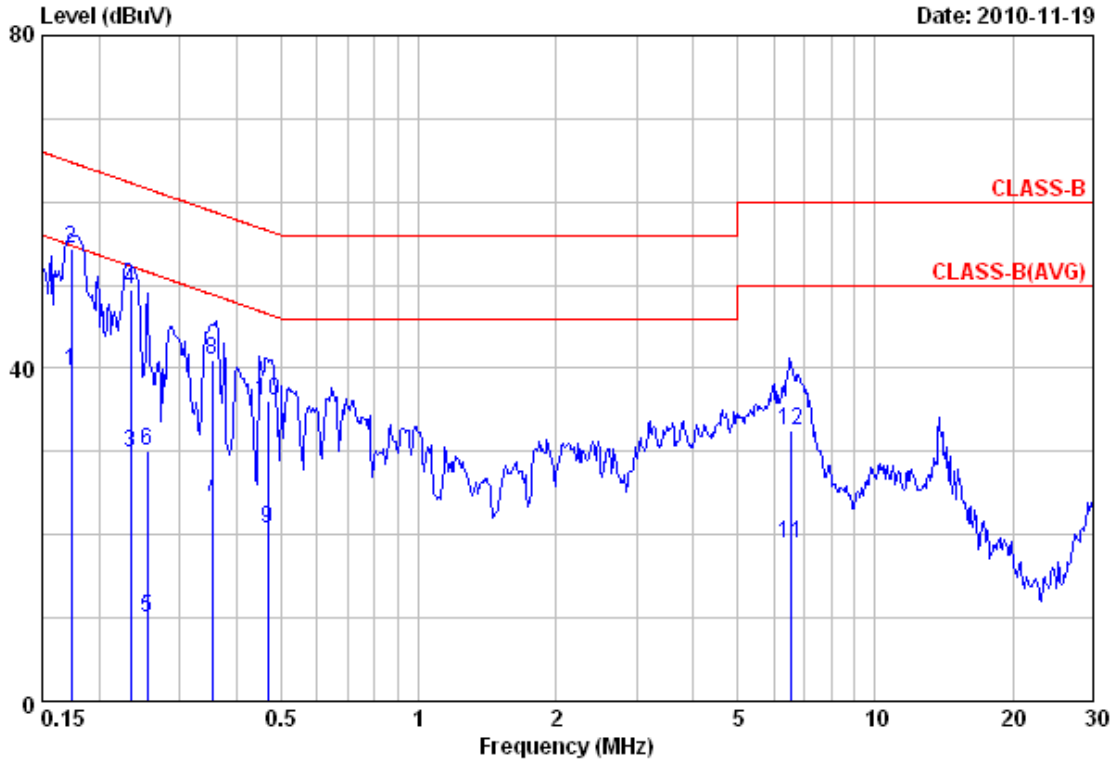


Item	Freq MHz	Read		Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
		Value dBuV						
1	0.174	39.67		0.07	39.74	54.79	-15.05	Average
2	0.174	54.25		0.07	54.32	64.79	-10.47	QP
3	0.235	29.72		0.07	29.79	52.28	-22.49	Average
4	0.235	49.44		0.07	49.51	62.28	-12.77	QP
5	0.255	9.88		0.07	9.95	51.60	-41.65	Average
6	0.255	30.07		0.07	30.14	61.60	-31.46	QP
7	0.354	24.43		0.08	24.51	48.87	-24.36	Average
8	0.354	40.90		0.08	40.98	58.87	-17.89	QP
9	0.467	20.58		0.08	20.66	46.57	-25.91	Average
10	0.467	36.10		0.08	36.18	56.57	-20.39	QP
11	6.528	18.60		0.28	18.88	50.00	-31.12	Average
12	6.528	32.21		0.28	32.49	60.00	-27.51	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: 8DPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 56 %

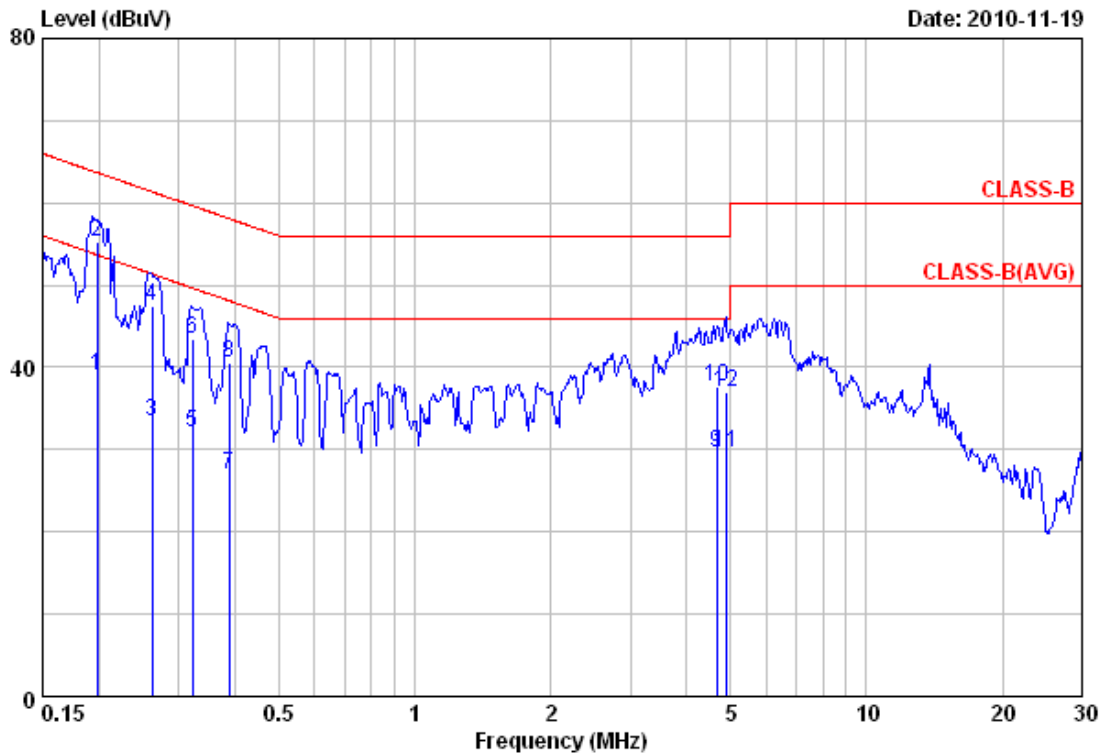


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.198	38.97	0.07	39.04	53.68	-14.64	Average
2	0.198	55.21	0.07	55.28	63.68	-8.40	QP
3	0.263	33.42	0.07	33.49	51.35	-17.86	Average
4	0.263	47.28	0.07	47.35	61.35	-14.00	QP
5	0.323	31.94	0.08	32.02	49.64	-17.62	Average
6	0.323	43.48	0.08	43.56	59.64	-16.08	QP
7	0.387	26.93	0.08	27.01	48.12	-21.11	Average
8	0.387	40.58	0.08	40.66	58.12	-17.46	QP
9	4.672	29.49	0.26	29.75	46.00	-16.25	Average
10	4.672	37.42	0.26	37.68	56.00	-18.32	QP
11	4.874	29.28	0.28	29.56	46.00	-16.44	Average
12	4.874	36.79	0.28	37.07	56.00	-18.93	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: 8DPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 56 %

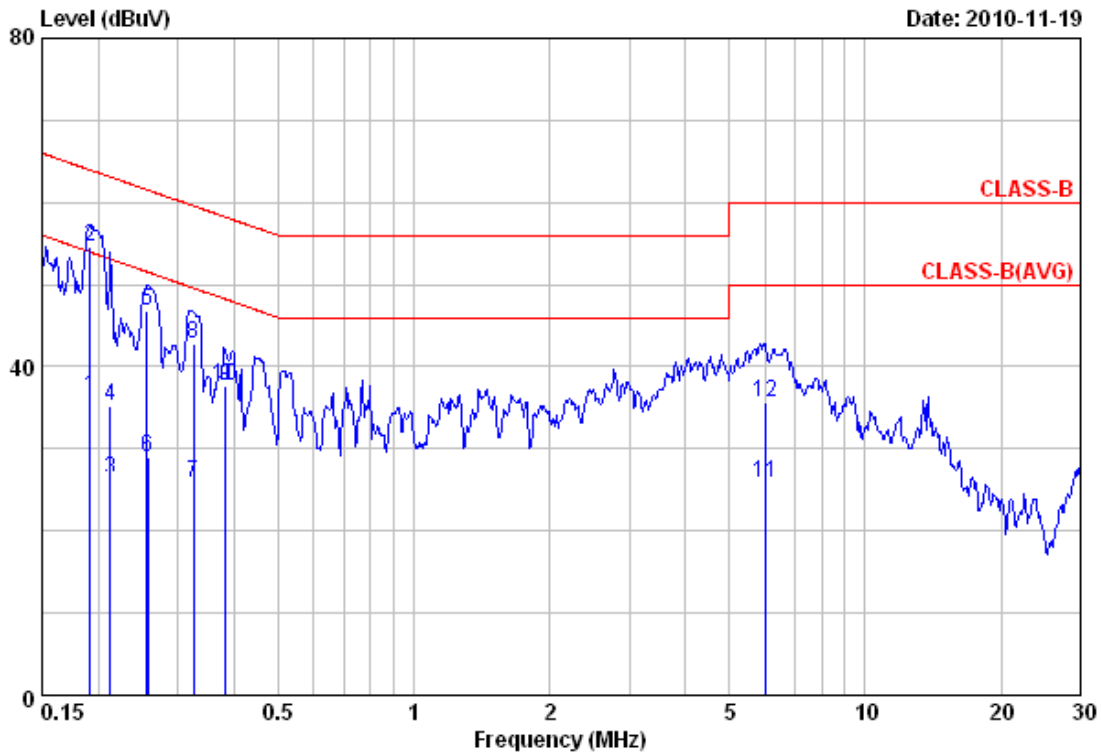

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.192	36.25	0.07	36.32	53.96	-17.64	Average
2	0.192	54.53	0.07	54.60	63.96	-9.36	QP
3	0.213	26.32	0.07	26.39	53.10	-26.71	Average
4	0.213	35.23	0.07	35.30	63.10	-27.80	QP
5	0.256	46.71	0.07	46.78	61.56	-14.78	QP
6	0.258	29.00	0.07	29.07	51.51	-22.44	Average
7	0.325	25.71	0.08	25.79	49.59	-23.80	Average
8	0.325	42.61	0.08	42.69	59.59	-16.90	QP
9	0.384	37.56	0.08	37.64	58.20	-20.56	QP
10	0.384	37.55	0.08	37.63	58.20	-20.57	QP
11	6.005	25.64	0.26	25.90	50.00	-24.10	Average
12	6.005	35.39	0.26	35.65	60.00	-24.35	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.

Test engineer: Ben



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V/ M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.


Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37

5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.



5.3 Typical Test Setup

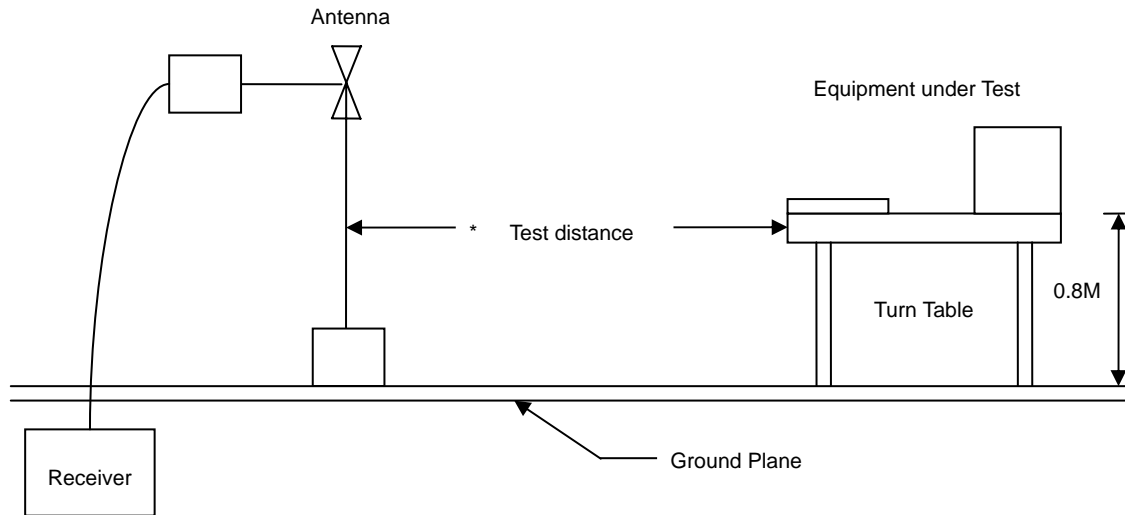


5.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	SCHAFFNER	SCR3501	437	2010/10/14	2011/10/13
Amplifier	Agilent	8447D	2944A10531	2010/02/05	2011/02/04
Bilog Antenna	Schaffner	CBL6112D	22242	2010/02/05	2011/02/04
Spectrum Analyzer	R&S	FSP 3	100800	2010/02/09	2011/02/08
SPECTRUM ANALYZER	R&S	FSP40	100219	2009/11/20	2010/11/19
HORN ANTENNA	EMCO	3115	31589	2010/05/04	2011/05/03
Preamplifier	Agilent	8449B	3008A01954	2010/02/26	2011/02/25



5.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 1 Mbps

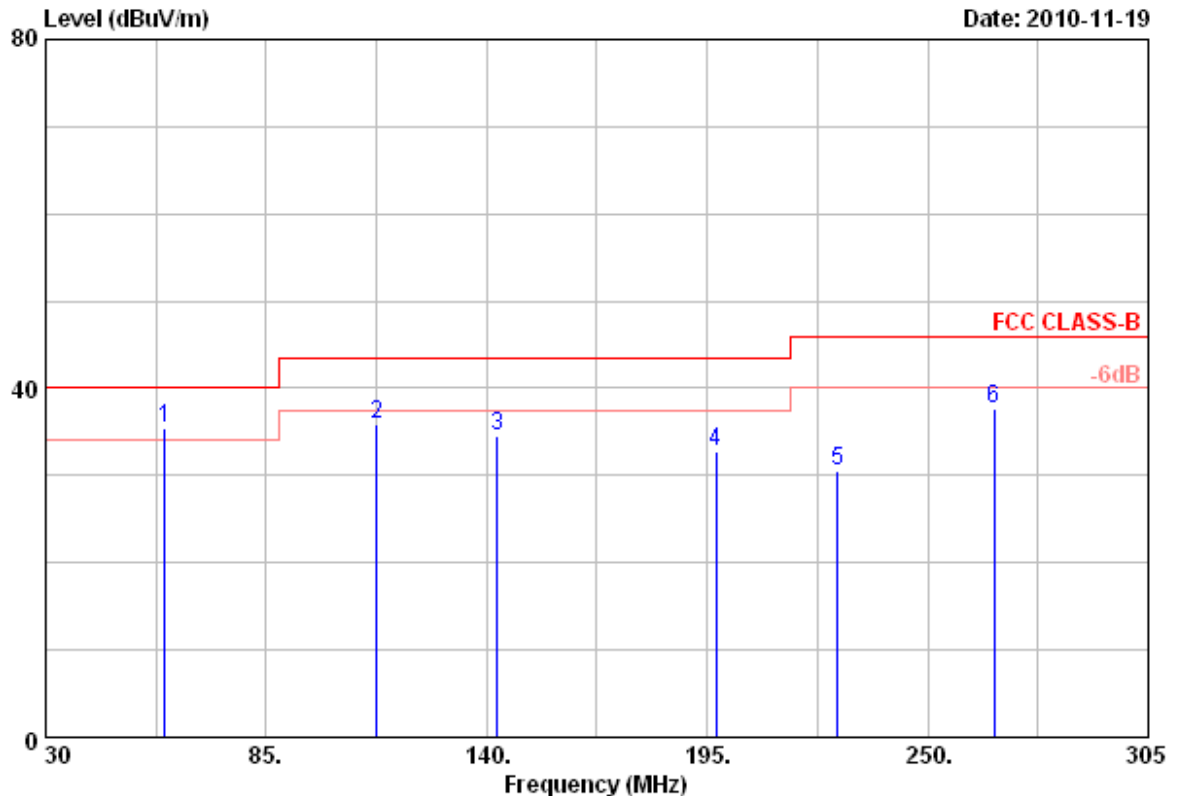


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	59.70	48.18	-12.75	35.43	40.00	-4.57	QP	105	360
2	112.50	46.52	-10.65	35.87	43.50	-7.63	Peak	105	360
3	142.75	45.81	-11.18	34.63	43.50	-8.87	Peak	105	360
4	197.20	42.70	-9.99	32.71	43.50	-10.79	Peak	105	360
5	227.45	41.38	-10.90	30.48	46.00	-15.52	Peak	105	360
6	266.50	50.26	-12.51	37.75	46.00	-8.25	Peak	105	360

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 1 Mbps

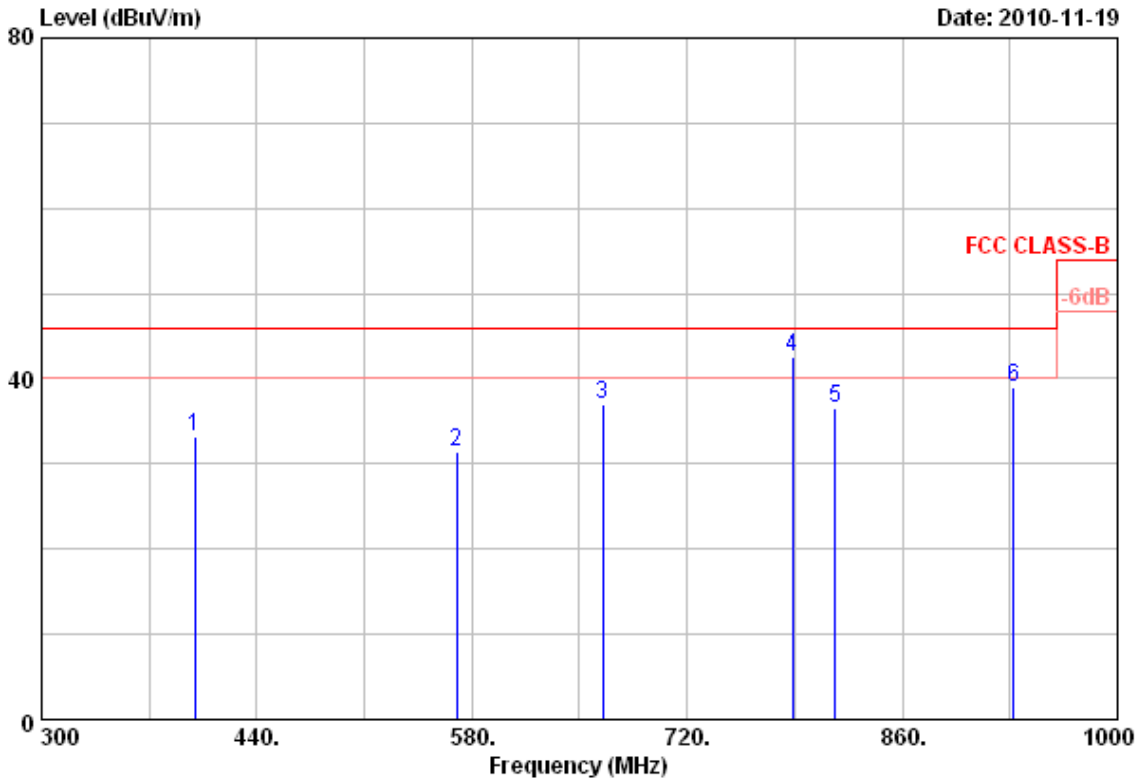


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	399.40	40.25	-6.97	33.28	46.00	-12.72	Peak	105	0
2	570.20	34.29	-2.92	31.37	46.00	-14.63	Peak	105	0
3	665.40	41.20	-4.22	36.98	46.00	-9.02	Peak	105	0
4	788.60	44.57	-1.97	42.60	46.00	-3.40	QP	105	0
5	816.60	36.94	-0.46	36.48	46.00	-9.52	Peak	105	0
6	932.10	34.38	4.62	39.00	46.00	-7.00	Peak	105	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 1 Mbps

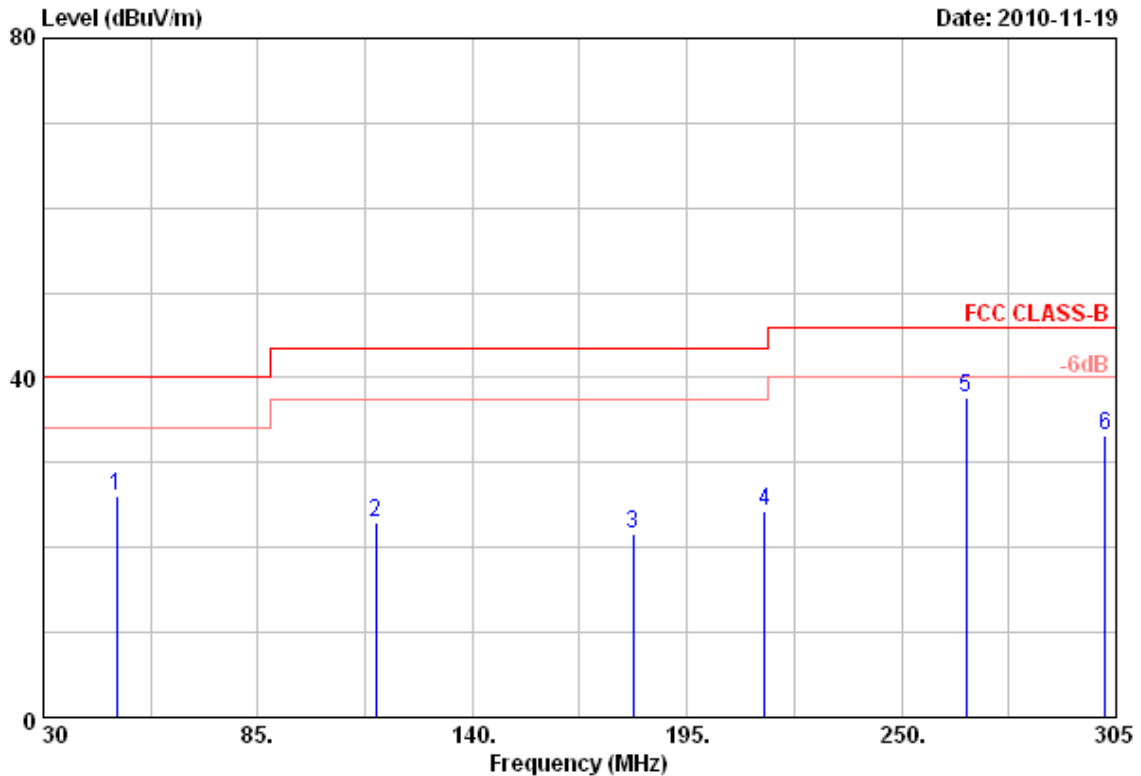


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	48.70	40.82	-14.64	26.18	40.00	-13.82	Peak	105	360
2	115.25	40.37	-17.46	22.91	43.50	-20.59	Peak	105	360
3	181.25	38.79	-17.27	21.52	43.50	-21.98	Peak	105	360
4	214.80	40.77	-16.59	24.18	43.50	-19.32	Peak	105	360
5	266.50	51.30	-13.58	37.72	46.00	-8.28	Peak	105	360
6	302.25	45.74	-12.60	33.14	46.00	-12.86	Peak	105	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 1 Mbps

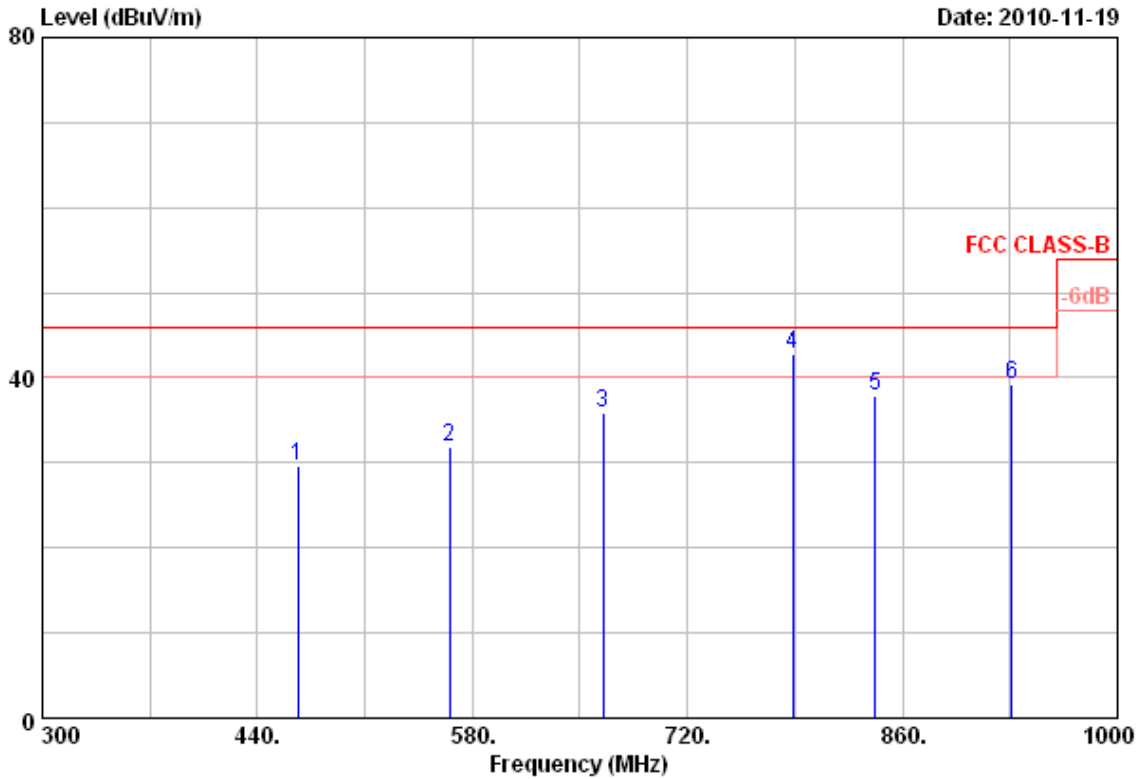


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	466.60	35.36	-5.77	29.59	46.00	-16.41	Peak	105	0
2	565.30	33.55	-1.65	31.90	46.00	-14.10	Peak	105	0
3	665.40	39.75	-3.89	35.86	46.00	-10.14	Peak	105	0
4	788.60	43.11	-0.29	42.82	46.00	-3.18	QP	105	0
5	842.50	36.69	1.24	37.93	46.00	-8.07	Peak	105	0
6	931.40	36.84	2.41	39.25	46.00	-6.75	Peak	105	0

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 1 Mbps

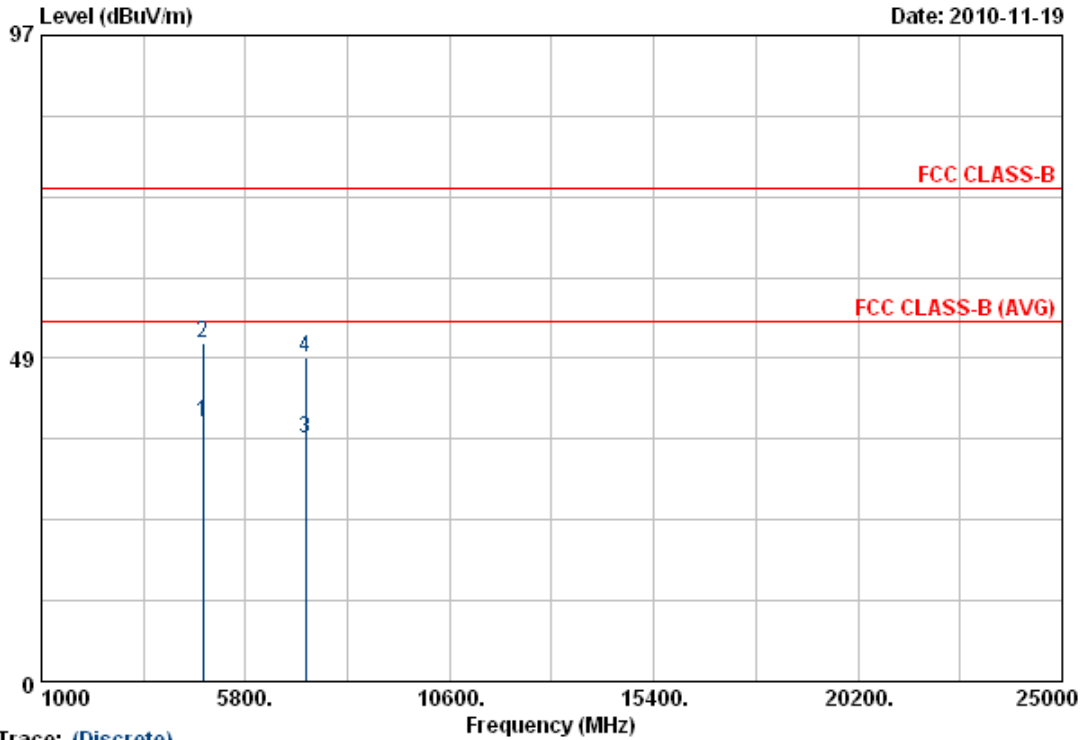

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.03	36.32	2.51	38.83	54.00	-15.17	Average	119	240
2	4804.03	48.39	2.51	50.90	74.00	-23.10	Peak	119	240
3	7205.43	29.67	6.87	36.54	54.00	-17.46	Average	119	240
4	7205.43	41.90	6.87	48.77	74.00	-25.23	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 1 Mbps

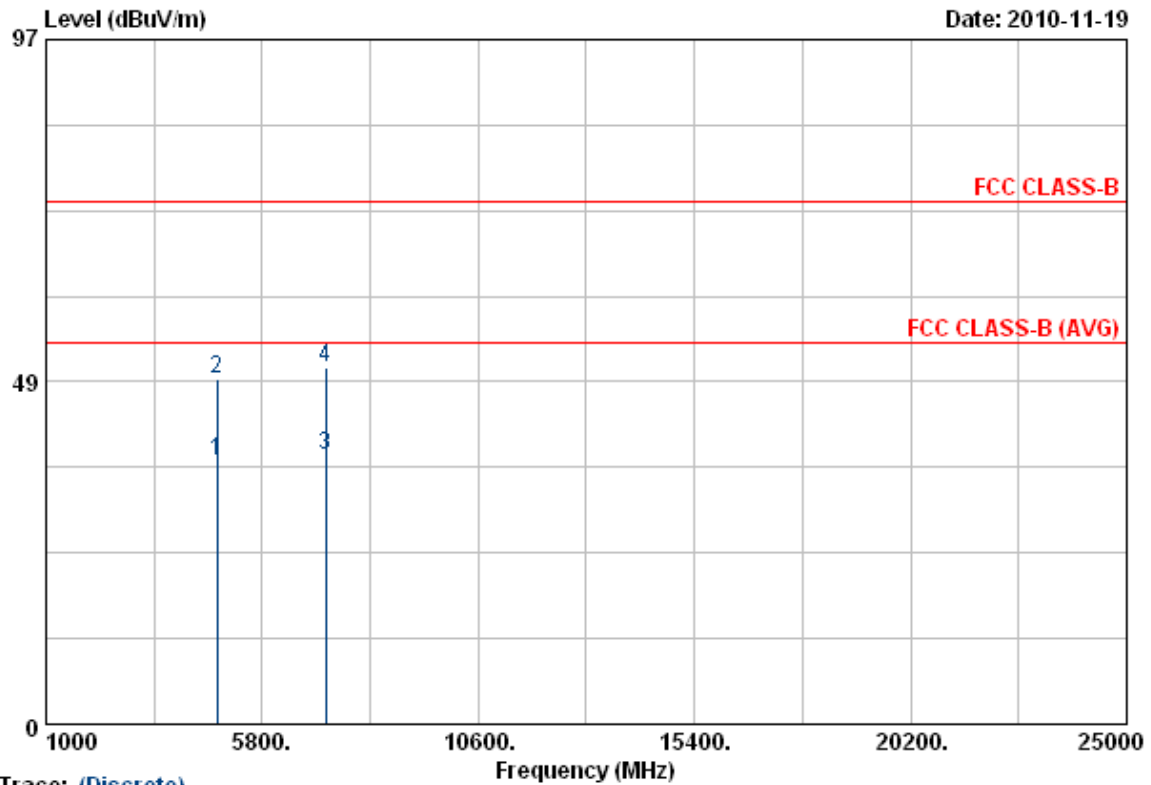

Trace: (Discrete)


Item	Read Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4803.95	34.66	2.51	37.17	54.00	-16.83	Average	150	250
2	4803.95	46.27	2.51	48.78	74.00	-25.22	Peak	150	250
3	7205.65	31.29	6.87	38.16	54.00	-15.84	Average	150	250
4	7205.65	43.72	6.87	50.59	74.00	-23.41	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 1 Mbps

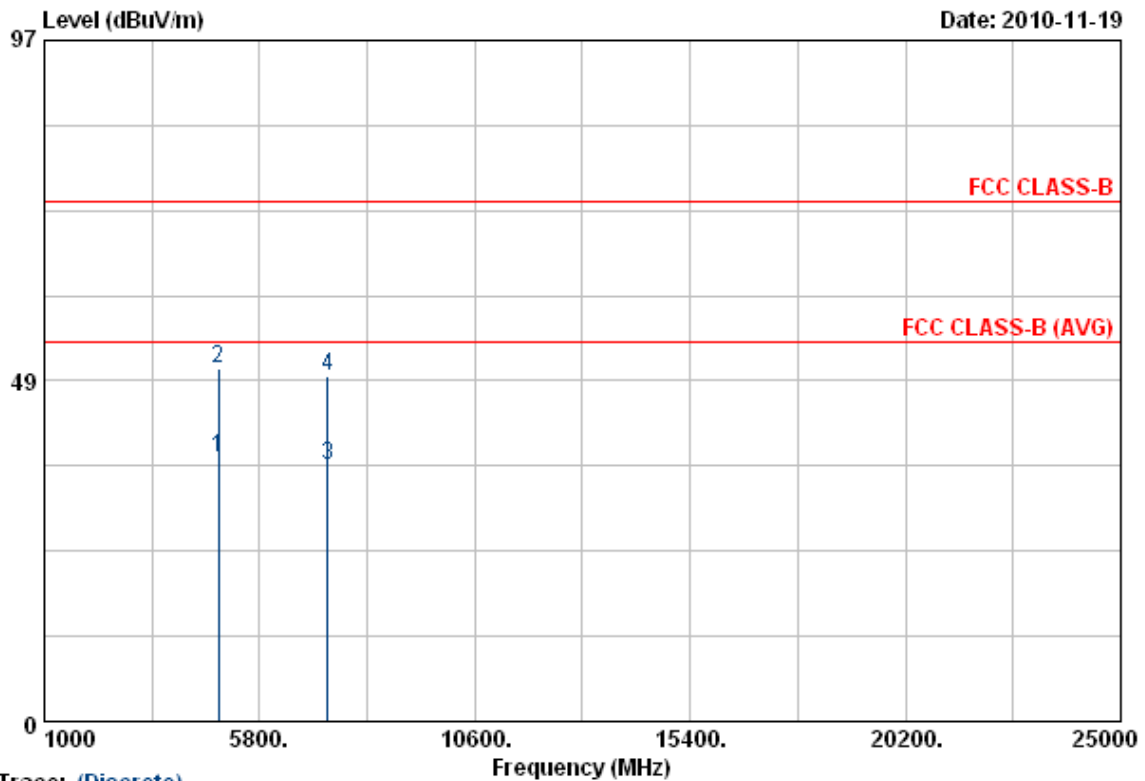


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.03	34.85	2.72	37.57	54.00	-16.43	Average	119	240
2	4882.03	47.47	2.72	50.19	74.00	-23.81	Peak	119	240
3	7322.88	29.21	7.23	36.44	54.00	-17.56	Average	119	240
4	7322.88	41.84	7.23	49.07	74.00	-24.93	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 1 Mbps

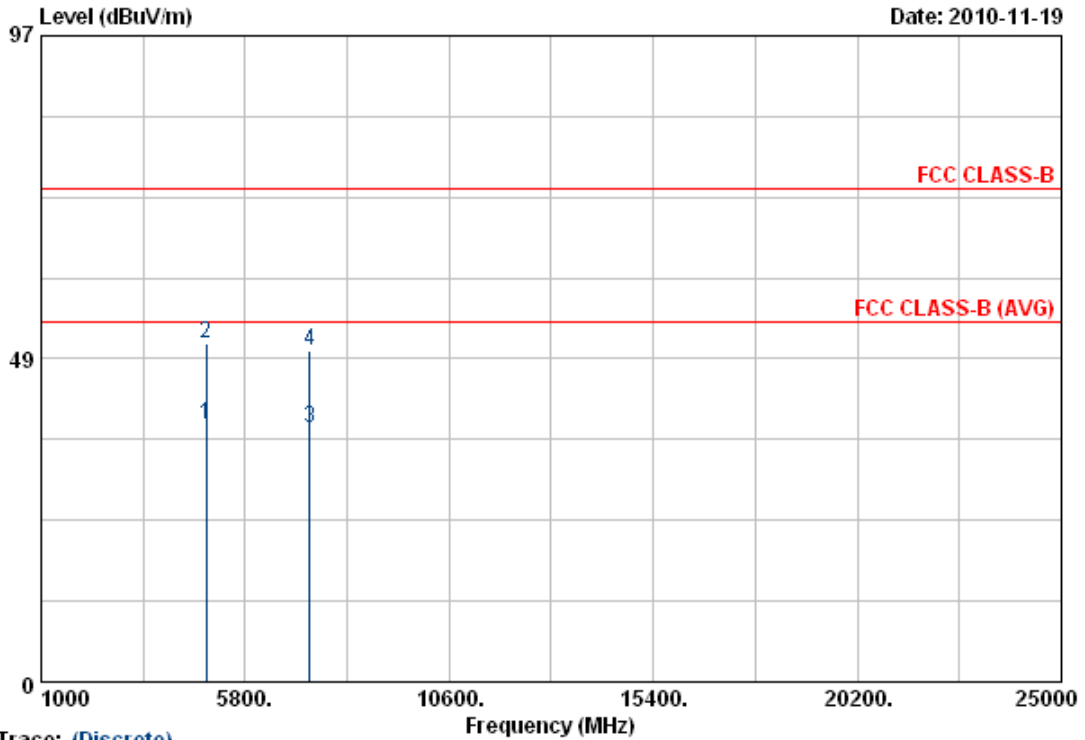

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.08	35.84	2.72	38.56	54.00	-15.44	Average	150	250
2	4882.08	48.17	2.72	50.89	74.00	-23.11	Peak	150	250
3	7322.05	30.80	7.23	38.03	54.00	-15.97	Average	150	250
4	7322.05	42.57	7.23	49.80	74.00	-24.20	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 1 Mbps

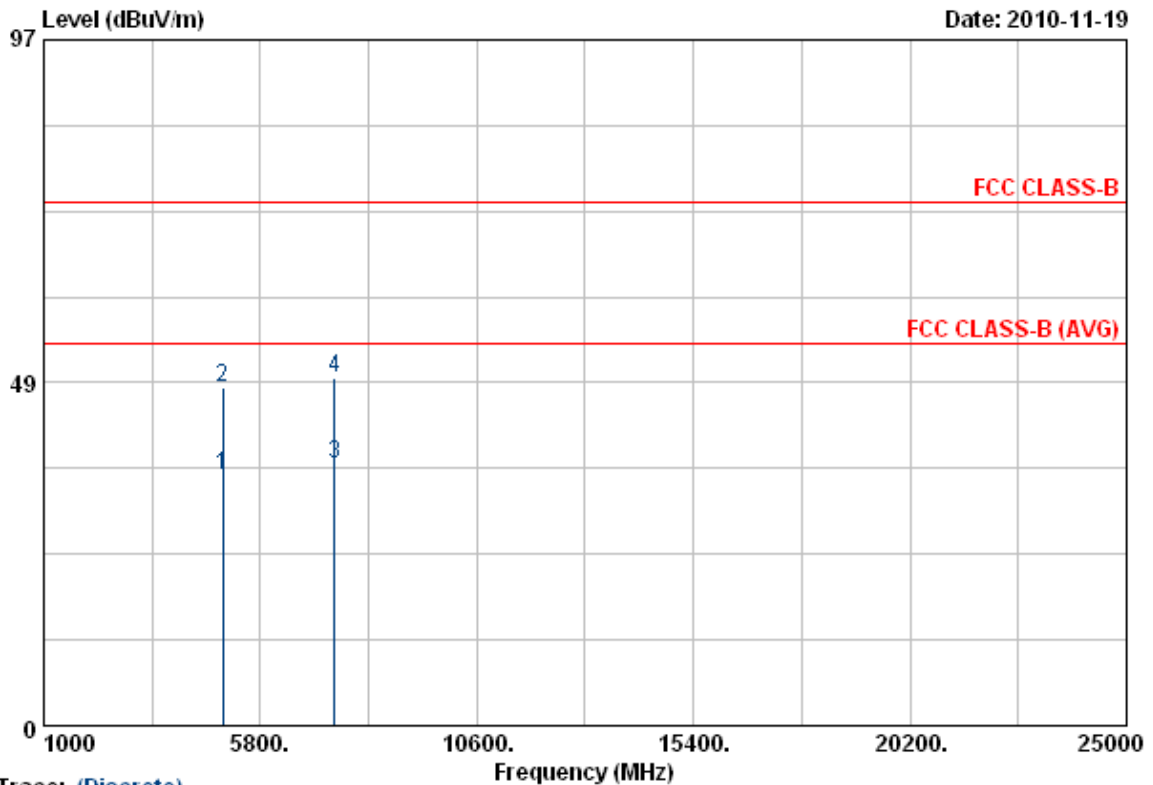

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4959.93	32.36	2.92	35.28	54.00	-18.72	Average	119	240
2	4959.93	44.93	2.92	47.85	74.00	-26.15	Peak	119	240
3	7439.93	29.40	7.59	36.99	54.00	-17.01	Average	119	240
4	7439.93	41.57	7.59	49.16	74.00	-24.84	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 1 Mbps

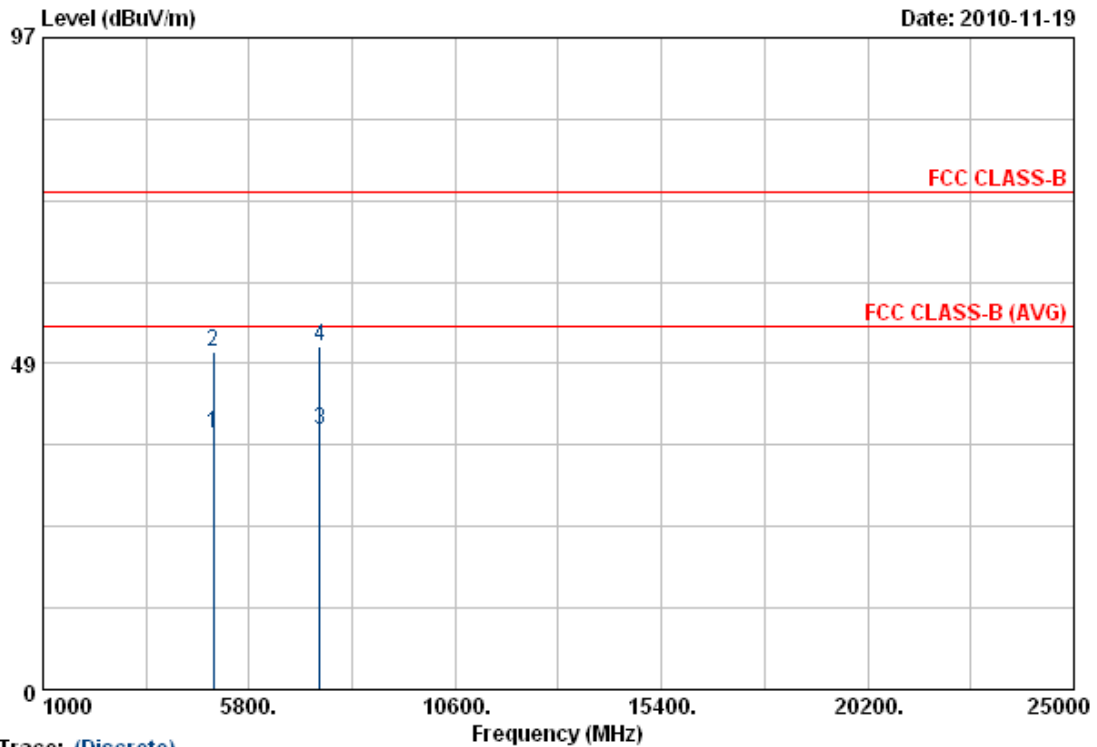

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.05	35.23	2.92	38.15	54.00	-15.85	Average	150	250
2	4960.05	47.39	2.92	50.31	74.00	-23.69	Peak	150	250
3	7444.78	31.02	7.61	38.63	54.00	-15.37	Average	150	250
4	7444.78	43.59	7.61	51.20	74.00	-22.80	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 2 Mbps

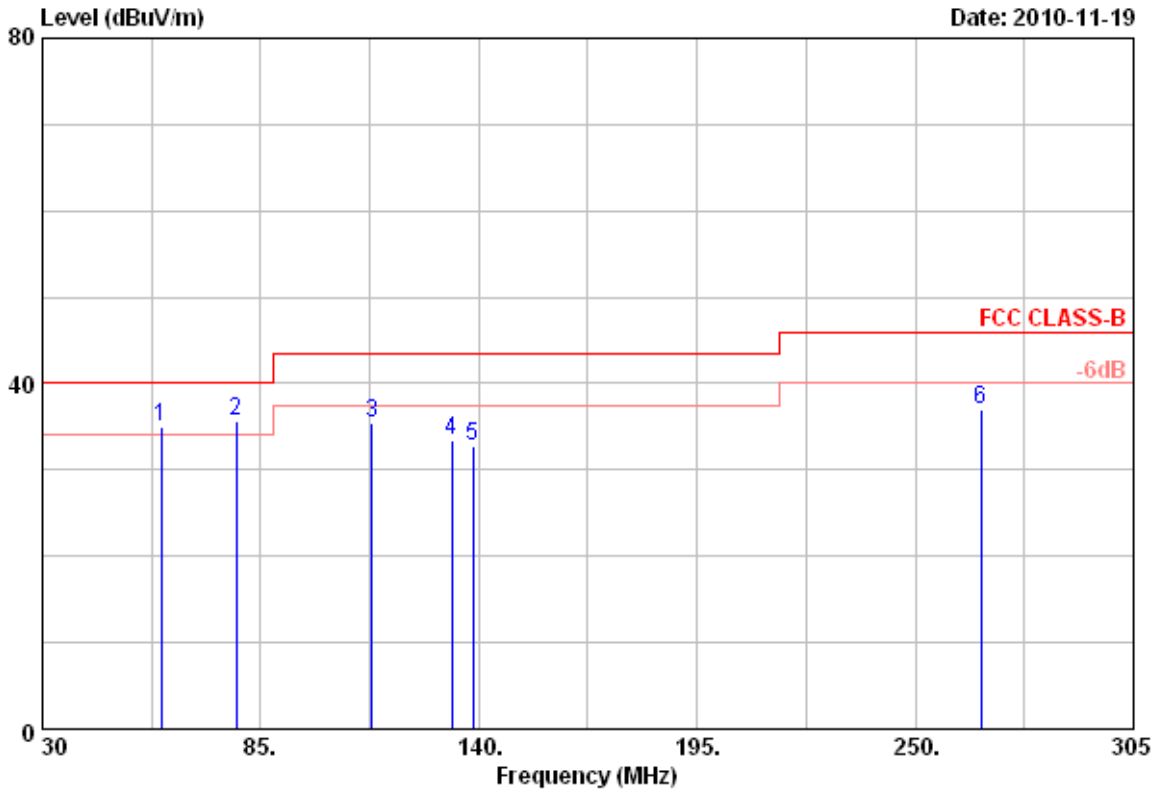


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	59.98	47.82	-12.76	35.06	40.00	-4.94	QP	**	**
2	78.95	50.20	-14.51	35.69	40.00	-4.31	QP	**	**
3	113.05	46.03	-10.61	35.42	43.50	-8.08	Peak	**	**
4	133.13	42.82	-9.47	33.35	43.50	-10.15	Peak	**	**
5	138.63	43.57	-10.82	32.75	43.50	-10.75	Peak	**	**
6	266.50	49.55	-12.51	37.04	46.00	-8.96	Peak	**	**

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 2 Mbps

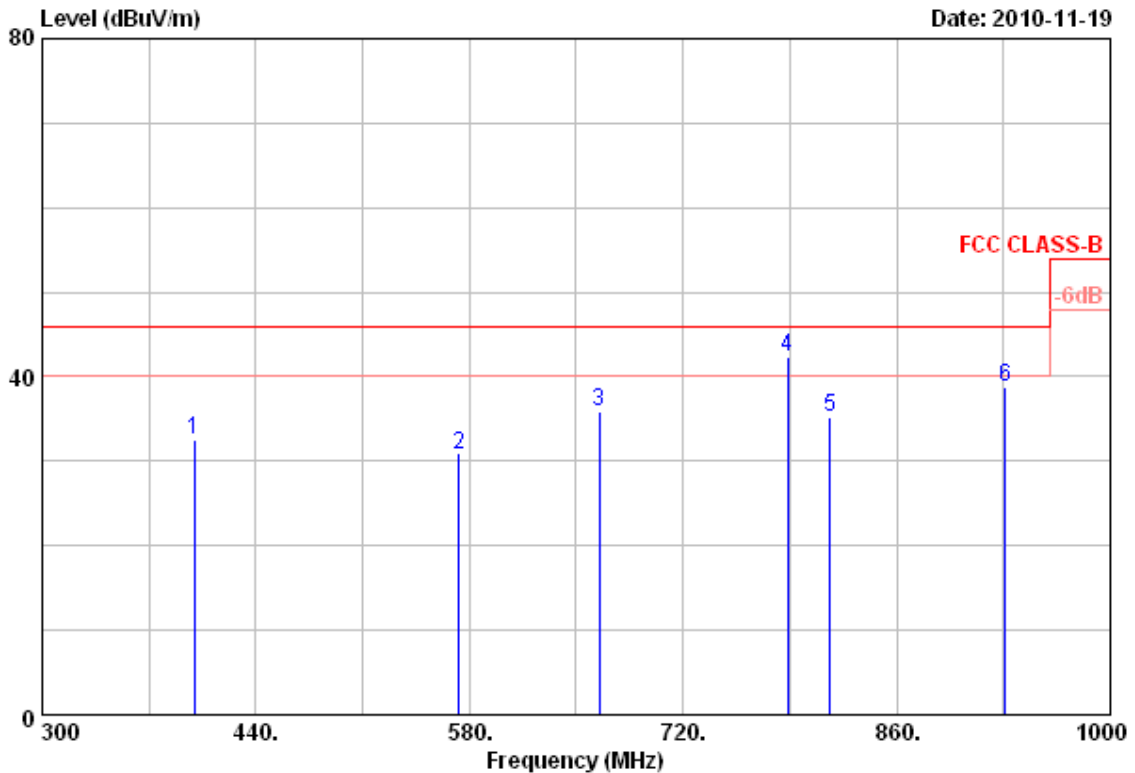


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	399.40	39.54	-6.97	32.57	46.00	-13.43	Peak	105	0
2	573.00	34.00	-3.27	30.73	46.00	-15.27	Peak	105	0
3	665.40	40.08	-4.22	35.86	46.00	-10.14	Peak	105	0
4	788.60	44.28	-1.97	42.31	46.00	-3.69	QP	105	0
5	816.60	35.59	-0.46	35.13	46.00	-10.87	Peak	105	0
6	931.40	34.05	4.75	38.80	46.00	-7.20	Peak	105	0

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 2 Mbps

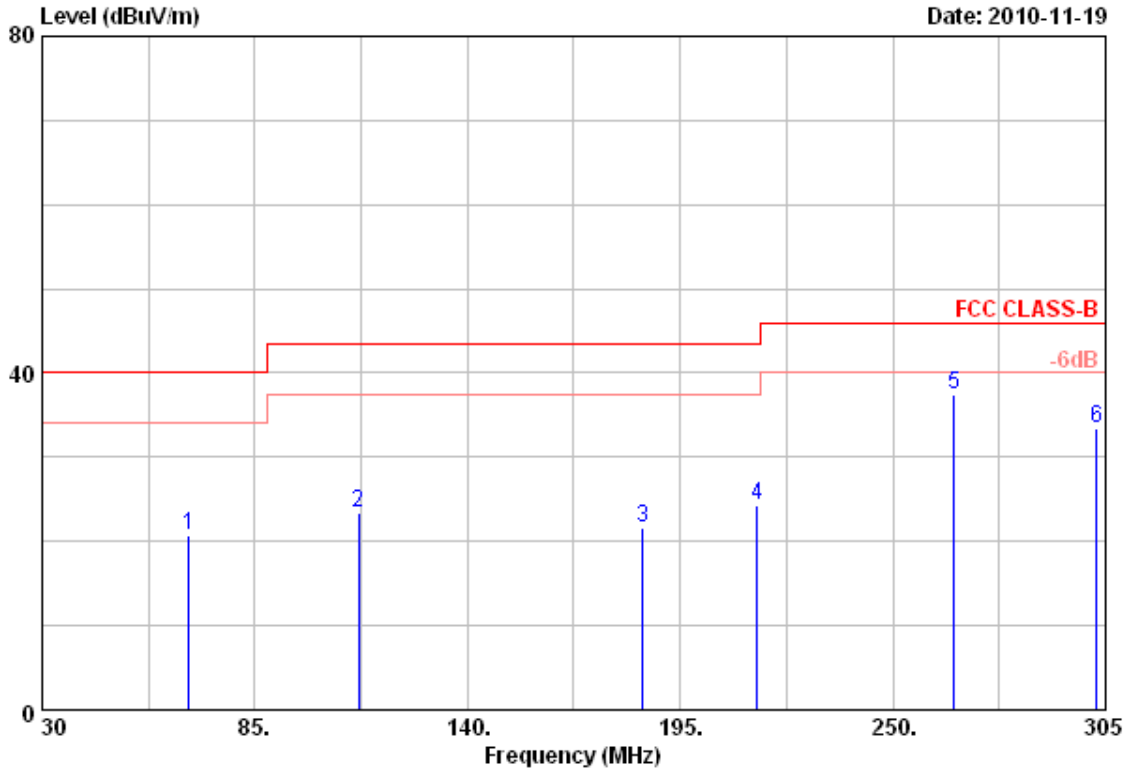


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	67.95	42.01	-21.22	20.79	40.00	-19.21	Peak	105	360
2	111.95	41.05	-17.72	23.33	43.50	-20.17	Peak	105	360
3	185.38	39.13	-17.42	21.71	43.50	-21.79	Peak	105	360
4	214.80	40.77	-16.59	24.18	43.50	-19.32	Peak	105	360
5	265.95	51.10	-13.64	37.46	46.00	-8.54	Peak	105	360
6	302.80	46.05	-12.52	33.53	46.00	-12.47	Peak	105	360

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 2 Mbps

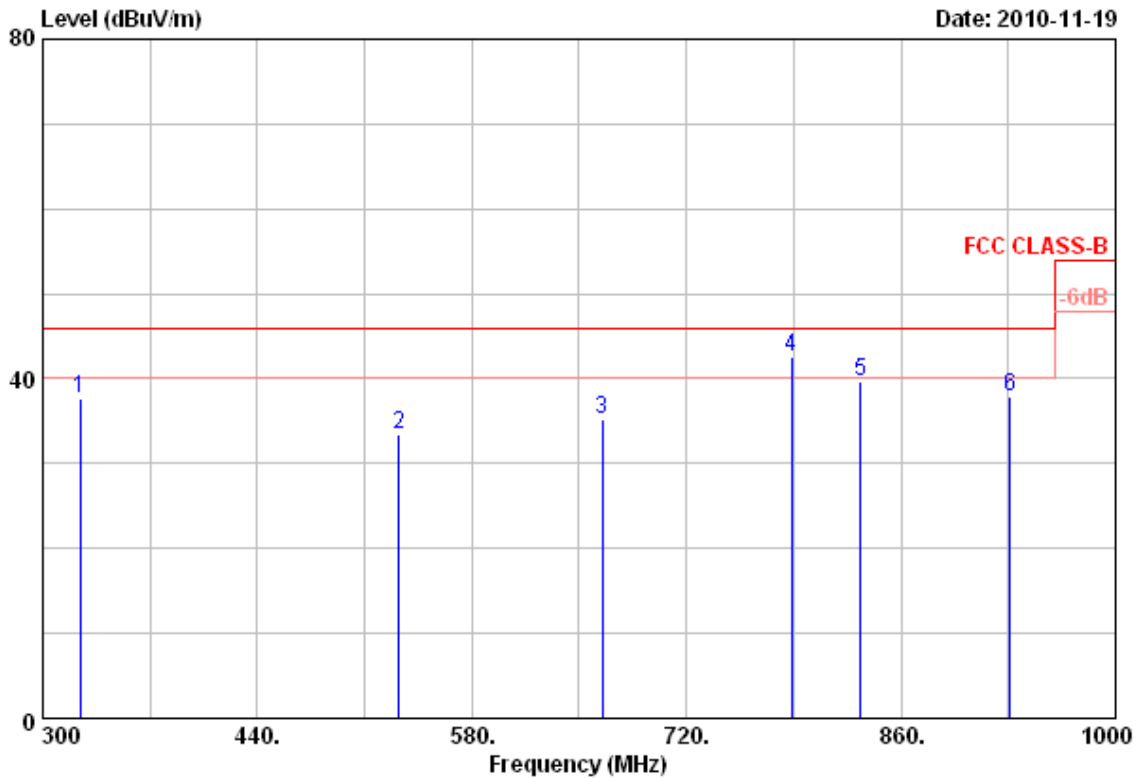


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	324.50	49.72	-11.95	37.77	46.00	-8.23	Peak	105	0
2	532.40	39.08	-5.57	33.51	46.00	-12.49	Peak	105	0
3	665.40	39.01	-3.89	35.12	46.00	-10.88	Peak	105	0
4	788.60	42.90	-0.29	42.61	46.00	-3.39	QP	105	0
5	833.40	37.95	1.78	39.73	46.00	-6.27	Peak	105	0
6	931.40	35.57	2.41	37.98	46.00	-8.02	Peak	105	0

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 2 Mbps

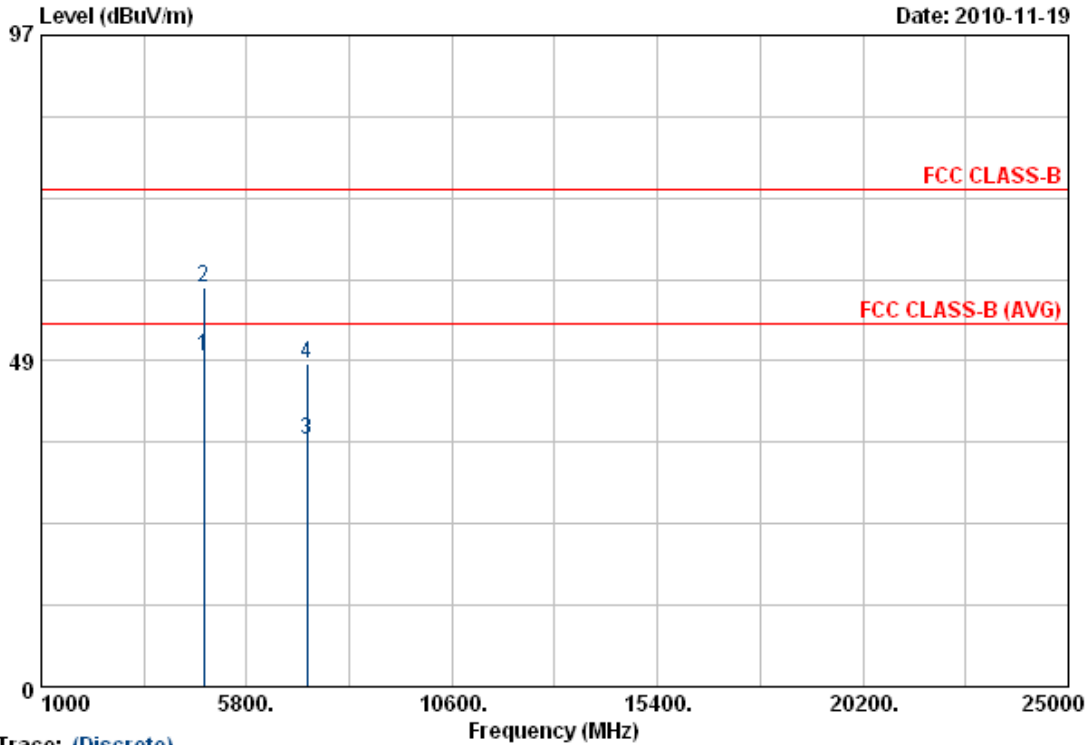

Trace: (Discrete)


Item	Freq MHz	Read		Factor	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
		Value dBuV	Factor dB/m							
1	4803.98	46.71	2.51	49.22	54.00	-4.78	Average	119	240	
2	4803.98	56.95	2.51	59.46	74.00	-14.54	Peak	119	240	
3	7205.98	29.75	6.87	36.62	54.00	-17.38	Average	119	240	
4	7205.98	41.19	6.87	48.06	74.00	-25.94	Peak	119	240	

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 2 Mbps

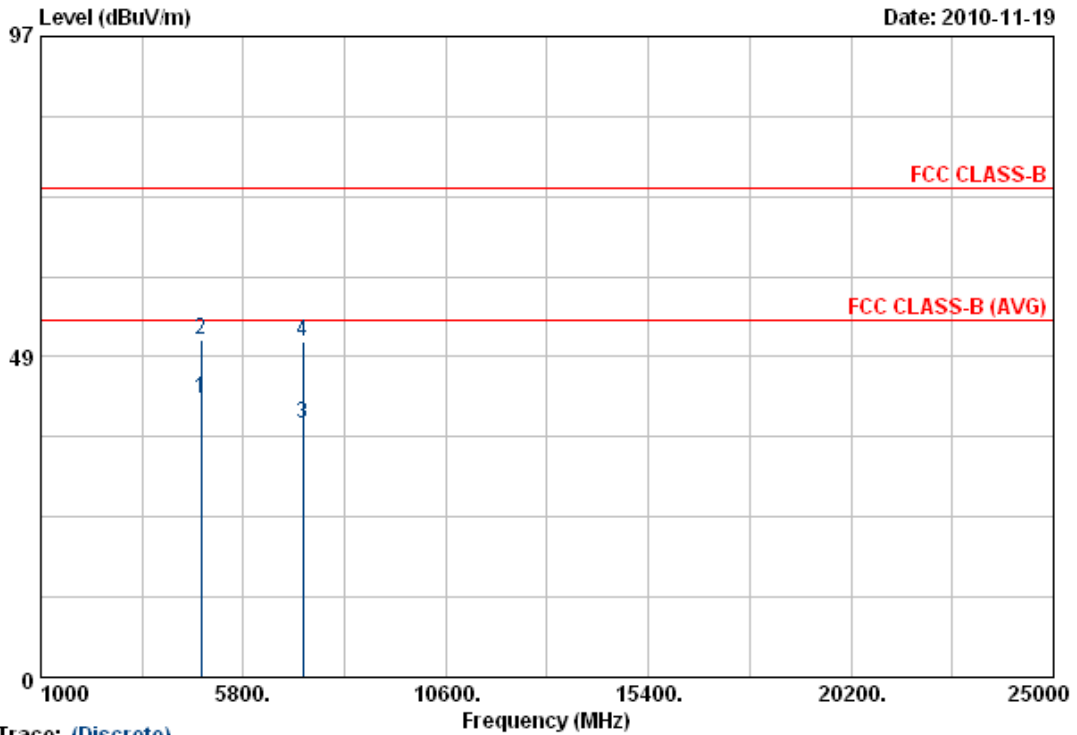

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	39.73	2.51	42.24	54.00	-11.76	Average	150	250
2	4804.00	48.60	2.51	51.11	74.00	-22.89	Peak	150	250
3	7206.03	31.48	6.87	38.35	54.00	-15.65	Average	150	250
4	7206.03	43.81	6.87	50.68	74.00	-23.32	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 2 Mbps

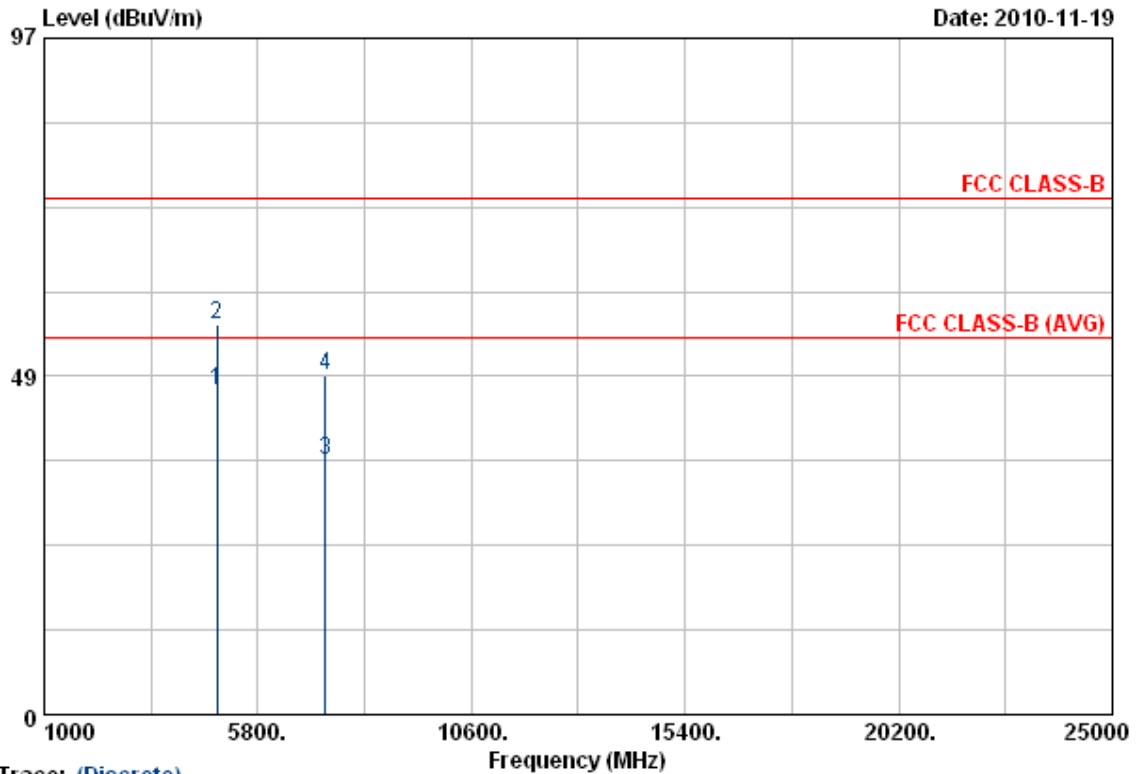

Trace: (Discrete)


Item	Read Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	43.76	2.72	46.48	54.00	-7.52	Average	119	240
2	4882.00	53.30	2.72	56.02	74.00	-17.98	Peak	119	240
3	7323.03	29.28	7.23	36.51	54.00	-17.49	Average	119	240
4	7323.03	41.43	7.23	48.66	74.00	-25.34	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 2 Mbps

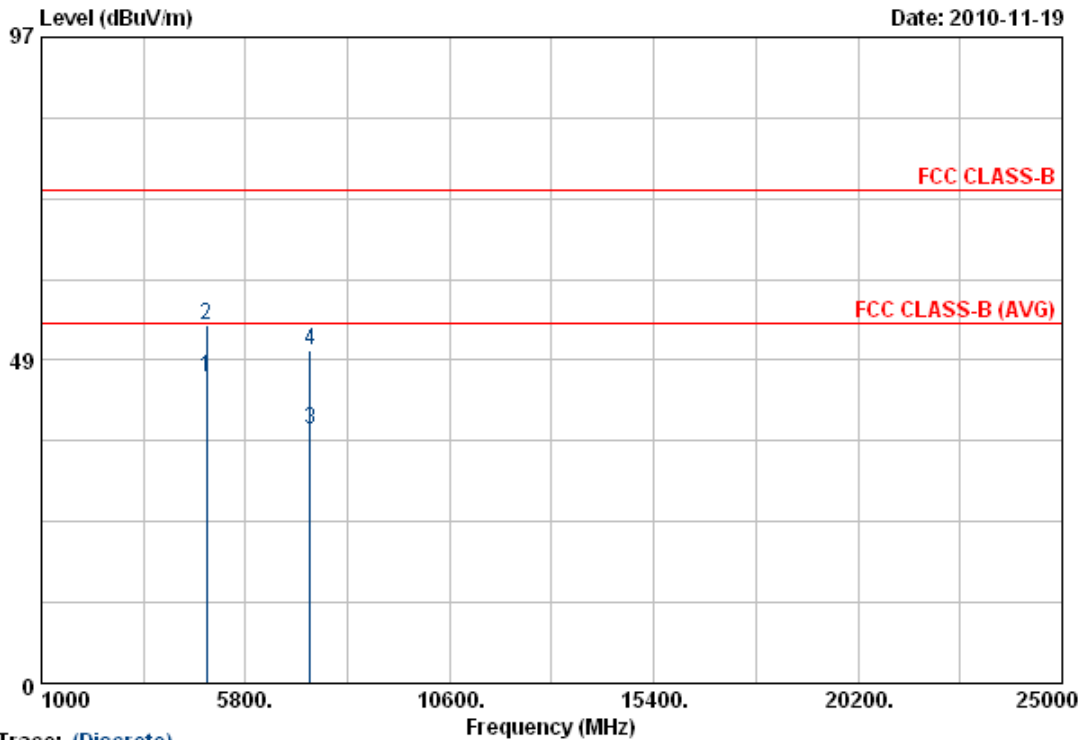

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.03	43.26	2.72	45.98	54.00	-8.02	Average	150	250
2	4882.03	51.18	2.72	53.90	74.00	-20.10	Peak	150	250
3	7323.15	30.83	7.23	38.06	54.00	-15.94	Average	150	250
4	7323.15	42.85	7.23	50.08	74.00	-23.92	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 2 Mbps

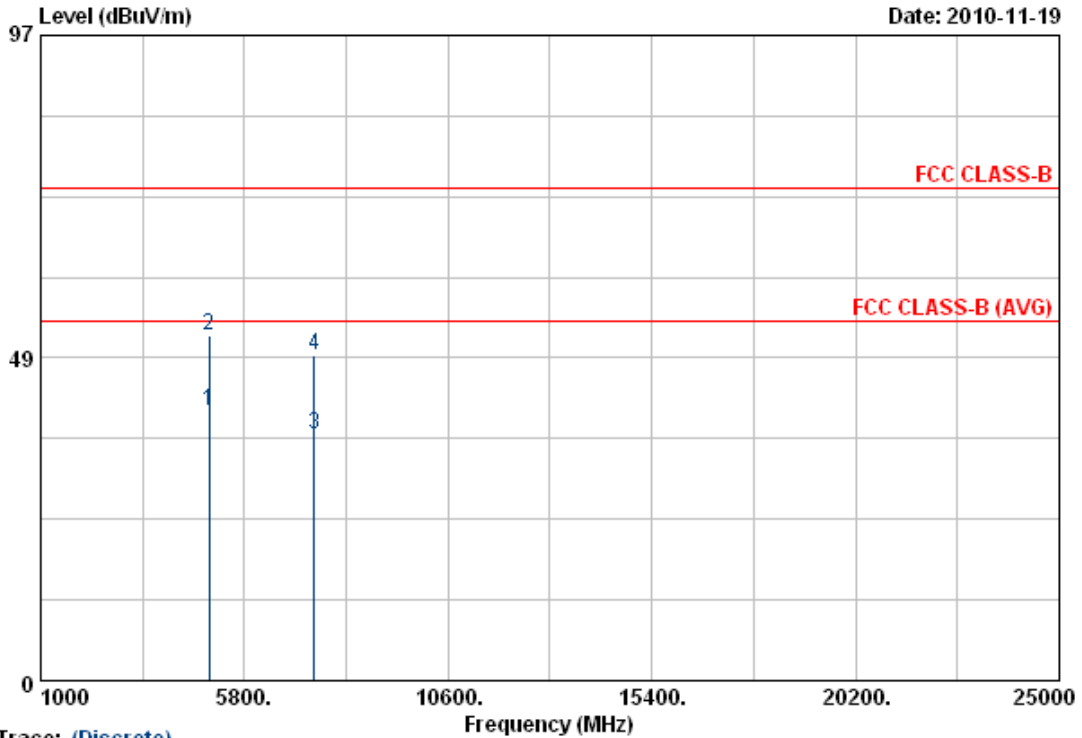

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	37.52	2.92	40.44	54.00	-13.56	Average	119	240
2	4960.00	49.07	2.92	51.99	74.00	-22.01	Peak	119	240
3	7442.50	29.45	7.60	37.05	54.00	-16.95	Average	119	240
4	7442.50	41.26	7.60	48.86	74.00	-25.14	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 2 Mbps

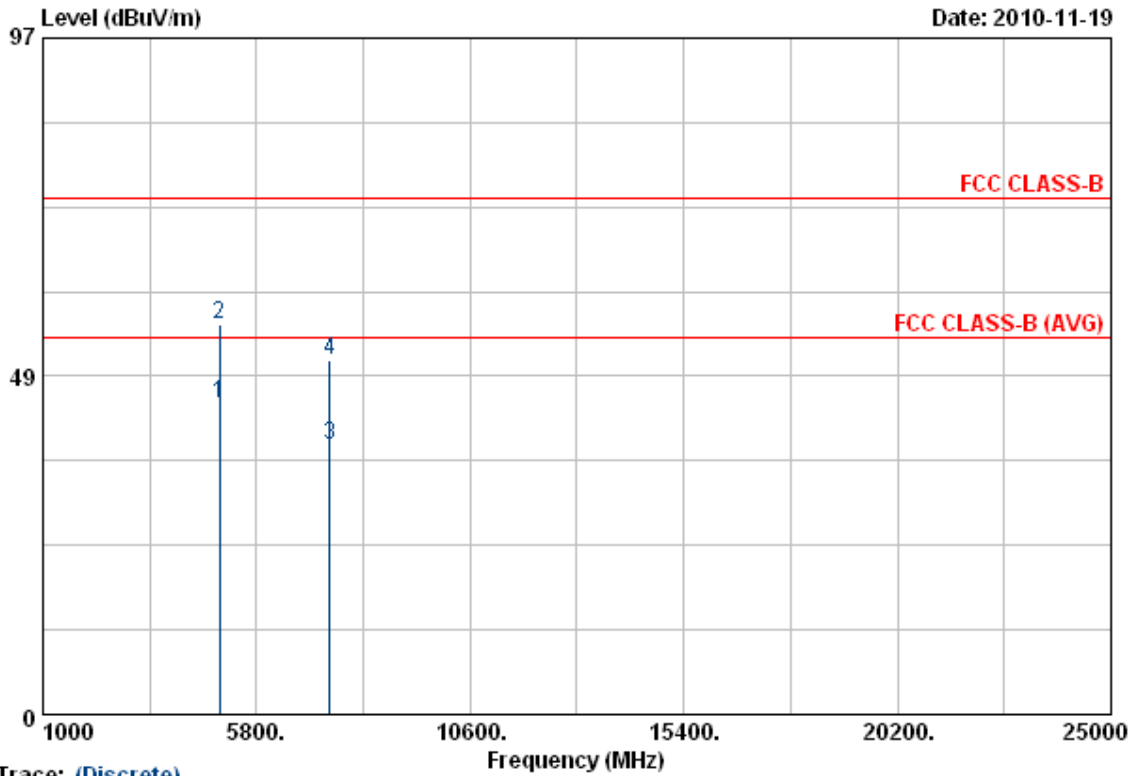

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4959.98	41.77	2.92	44.69	54.00	-9.31	Average	150	250
2	4959.98	53.05	2.92	55.97	74.00	-18.03	Peak	150	250
3	7442.50	31.03	7.60	38.63	54.00	-15.37	Average	150	250
4	7442.50	43.19	7.60	50.79	74.00	-23.21	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 3 Mbps

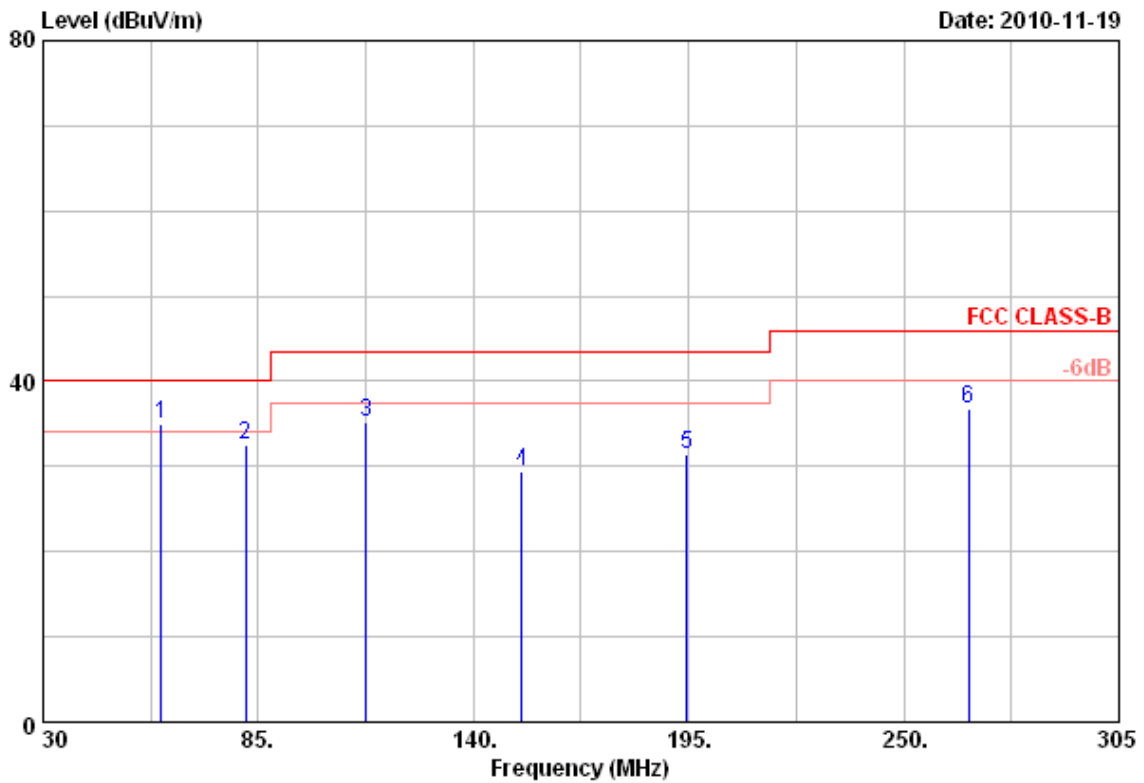


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	60.25	47.87	-12.85	35.02	40.00	-4.98	QP	105	360
2	81.70	46.61	-14.08	32.53	40.00	-7.47	Peak	105	360
3	112.50	45.80	-10.65	35.15	43.50	-8.35	Peak	105	360
4	152.38	40.90	-11.39	29.51	43.50	-13.99	Peak	105	360
5	194.45	41.82	-10.36	31.46	43.50	-12.04	Peak	105	360
6	266.50	49.39	-12.51	36.88	46.00	-9.12	Peak	105	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 3 Mbps

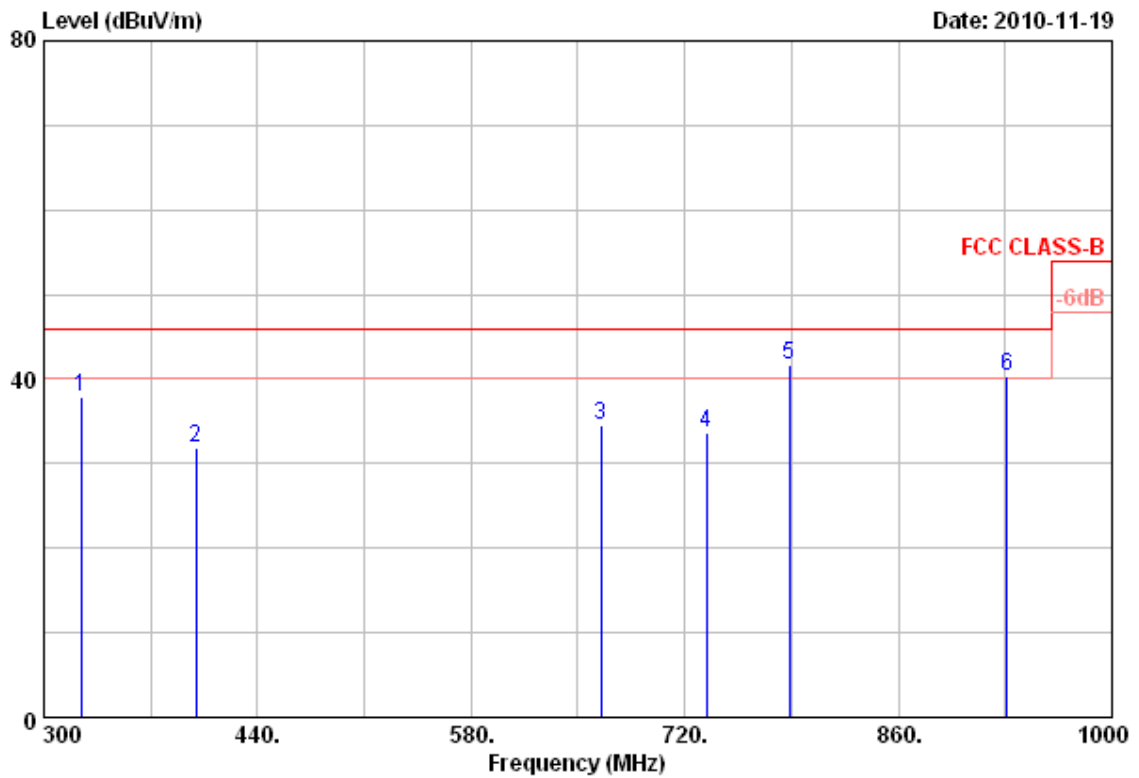


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	324.50	47.59	-9.78	37.81	46.00	-8.19	Peak	105	0
2	399.40	38.83	-6.97	31.86	46.00	-14.14	Peak	105	0
3	665.40	38.72	-4.22	34.50	46.00	-11.50	Peak	105	0
4	734.00	34.42	-0.84	33.58	46.00	-12.42	Peak	105	0
5	788.60	43.65	-1.97	41.68	46.00	-4.32	QP	105	0
6	931.40	35.57	4.75	40.32	46.00	-5.68	QP	105	0

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 3 Mbps

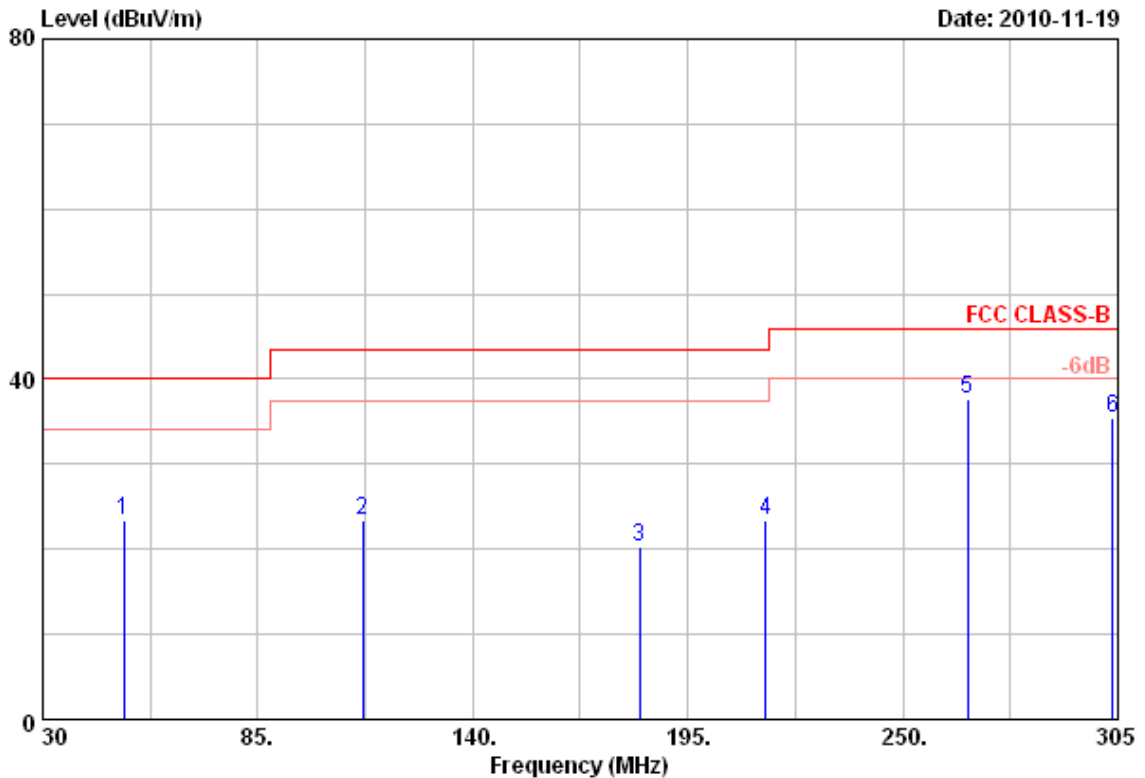


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	50.63	38.00	-14.64	23.36	40.00	-16.64	Peak	105	360
2	111.95	41.02	-17.72	23.30	43.50	-20.20	Peak	105	360
3	182.63	37.52	-17.30	20.22	43.50	-23.28	Peak	105	360
4	214.80	40.06	-16.59	23.47	43.50	-20.03	Peak	105	360
5	266.50	51.16	-13.58	37.58	46.00	-8.42	Peak	105	360
6	303.63	47.89	-12.37	35.52	46.00	-10.48	Peak	105	360

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 27 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1021 hPa
Memo	:	Rate	: 3 Mbps

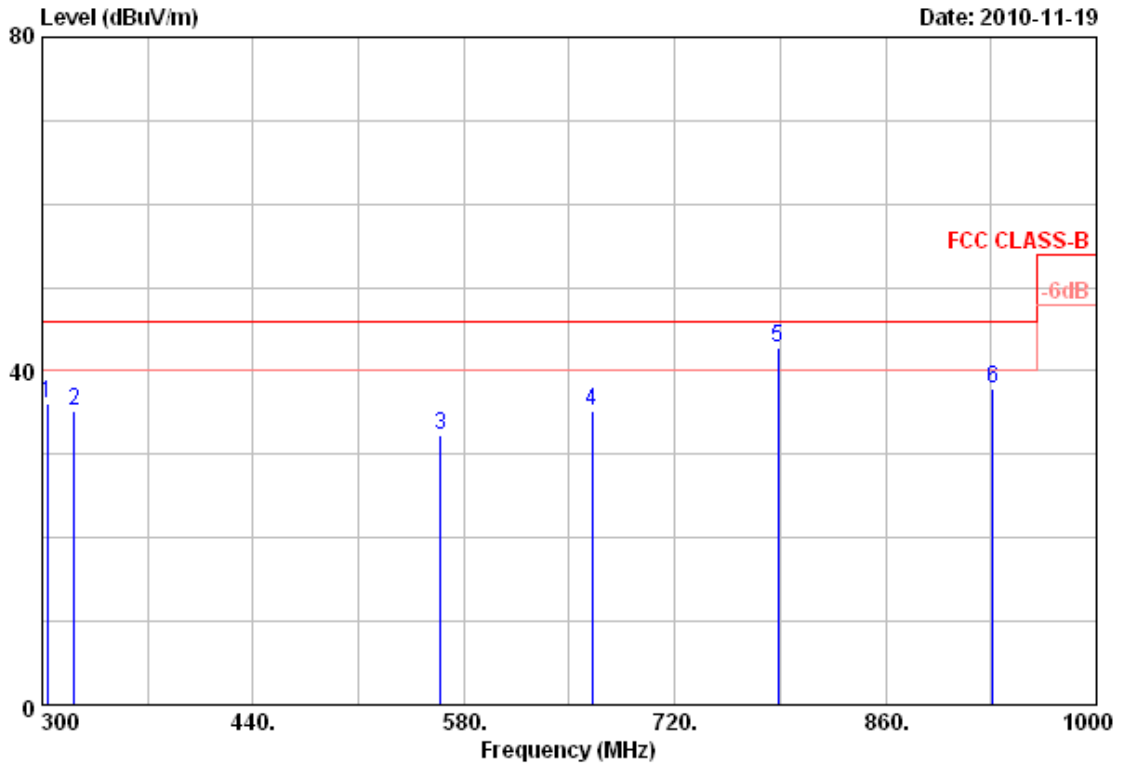


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	48.48	-12.39	36.09	46.00	-9.91	Peak	105	0
2	321.00	46.95	-11.82	35.13	46.00	-10.87	Peak	105	0
3	564.60	33.94	-1.64	32.30	46.00	-13.70	Peak	105	0
4	665.40	39.08	-3.89	35.19	46.00	-10.81	Peak	105	0
5	788.60	42.99	-0.29	42.70	46.00	-3.30	QP	105	0
6	931.40	35.58	2.41	37.99	46.00	-8.01	Peak	105	0

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 3 Mbps

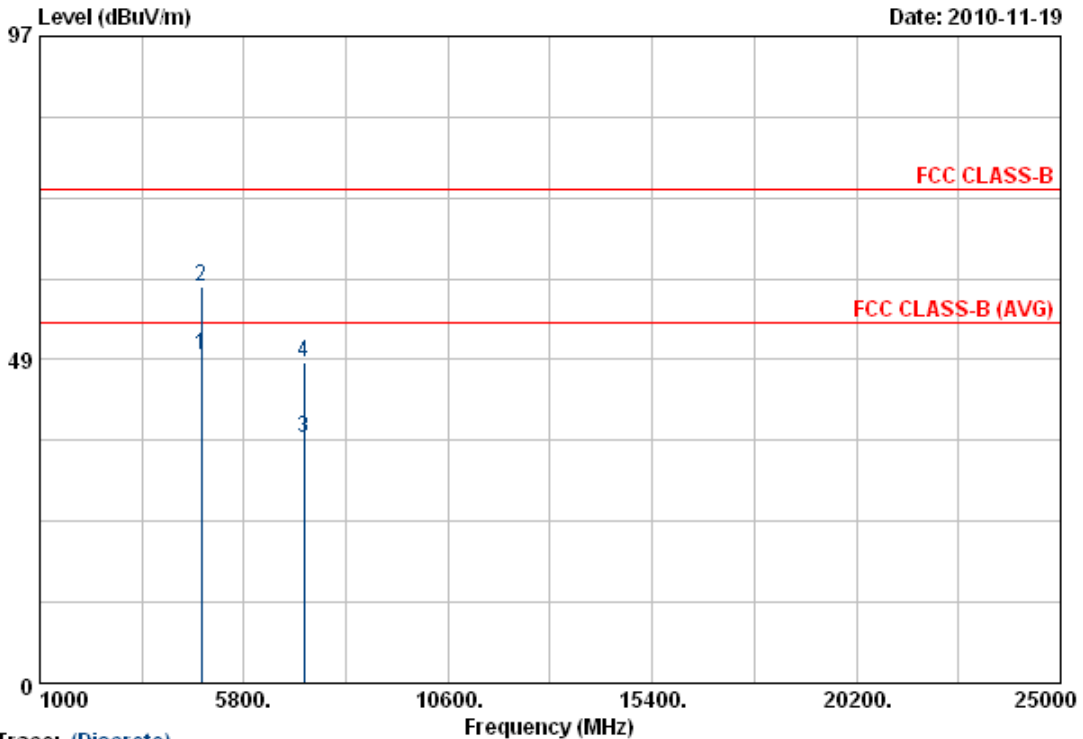

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	46.79	2.51	49.30	54.00	-4.70	Average	119	240
2	4804.00	56.86	2.51	59.37	74.00	-14.63	Peak	119	240
3	7206.15	29.76	6.87	36.63	54.00	-17.37	Average	119	240
4	7206.15	41.14	6.87	48.01	74.00	-25.99	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 3 Mbps

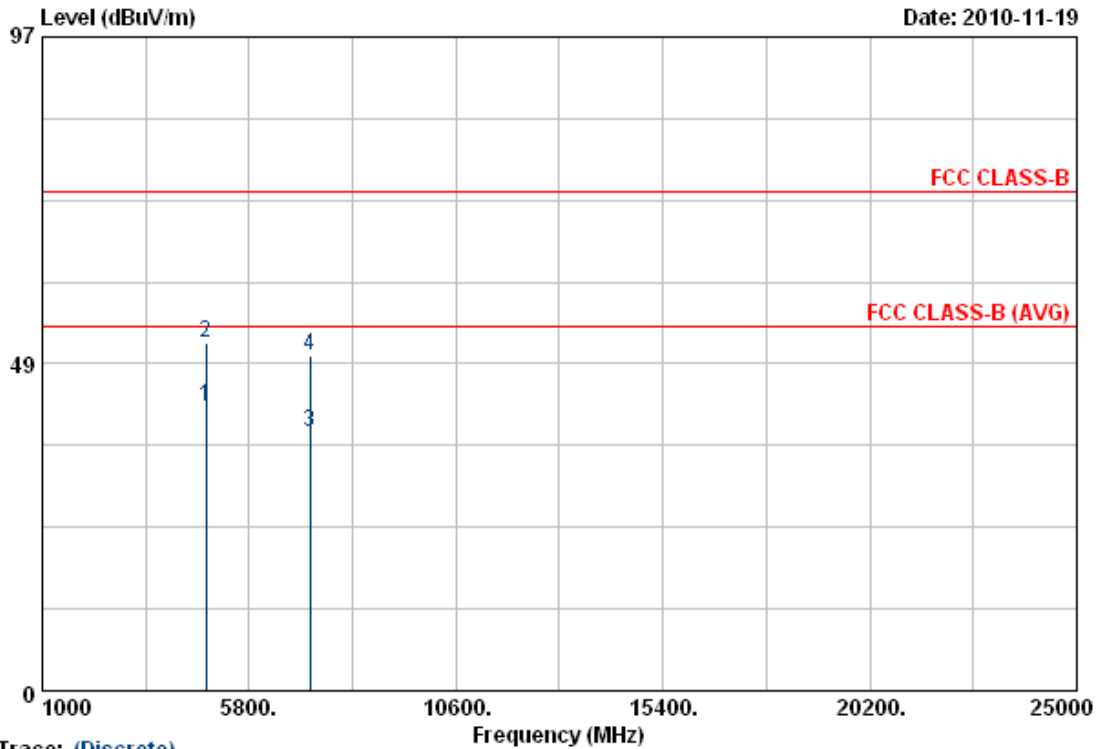

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	39.63	2.51	42.14	54.00	-11.86	Average	150	250
2	4804.00	49.04	2.51	51.55	74.00	-22.45	Peak	150	250
3	7205.83	31.43	6.87	38.30	54.00	-15.70	Average	150	250
4	7205.83	42.97	6.87	49.84	74.00	-24.16	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 3 Mbps

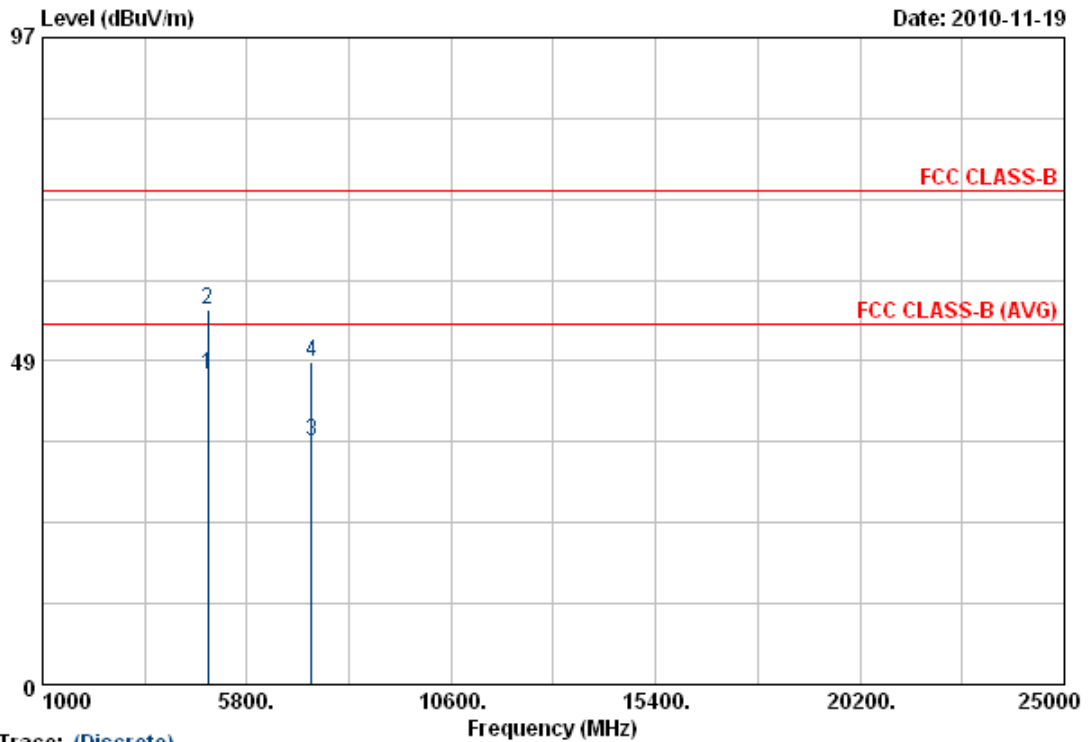

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4881.98	43.80	2.72	46.52	54.00	-7.48	Average	119	240
2	4881.98	53.60	2.72	56.32	74.00	-17.68	Peak	119	240
3	7322.98	29.23	7.23	36.46	54.00	-17.54	Average	119	240
4	7322.98	41.09	7.23	48.32	74.00	-25.68	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 3 Mbps

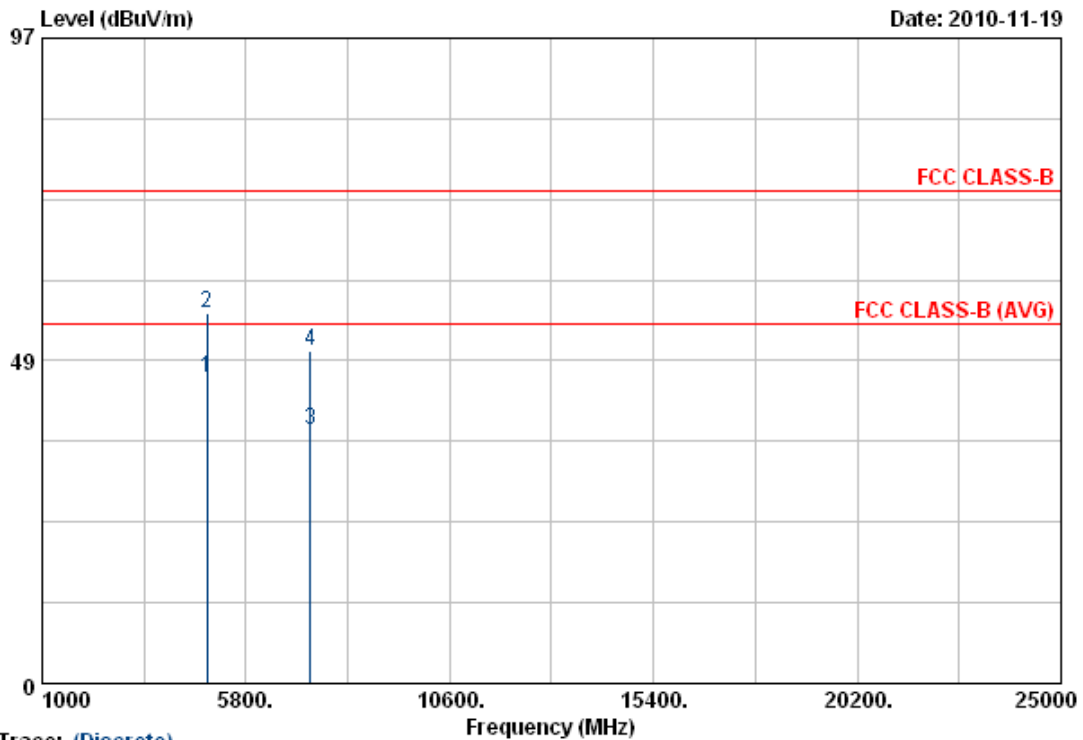

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	43.11	2.72	45.83	54.00	-8.17	Average	150	250
2	4882.00	53.07	2.72	55.79	74.00	-18.21	Peak	150	250
3	7322.95	30.84	7.23	38.07	54.00	-15.93	Average	150	250
4	7322.95	42.81	7.23	50.04	74.00	-23.96	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 3 Mbps

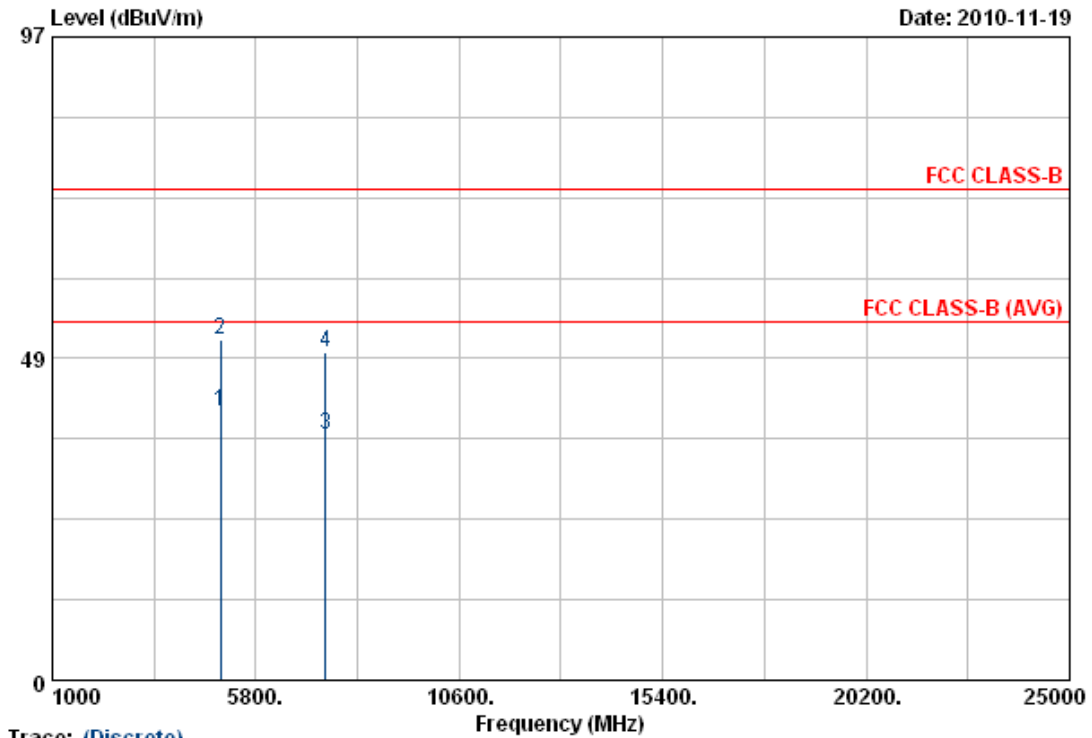

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	37.52	2.92	40.44	54.00	-13.56	Average	119	240
2	4960.00	48.55	2.92	51.47	74.00	-22.53	Peak	119	240
3	7436.40	29.44	7.57	37.01	54.00	-16.99	Average	119	240
4	7436.40	41.80	7.57	49.37	74.00	-24.63	Peak	119	240

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: 8DPSK	Atmospheric Pressure	: 1007 hPa
Memo	:	Rate	: 3 Mbps

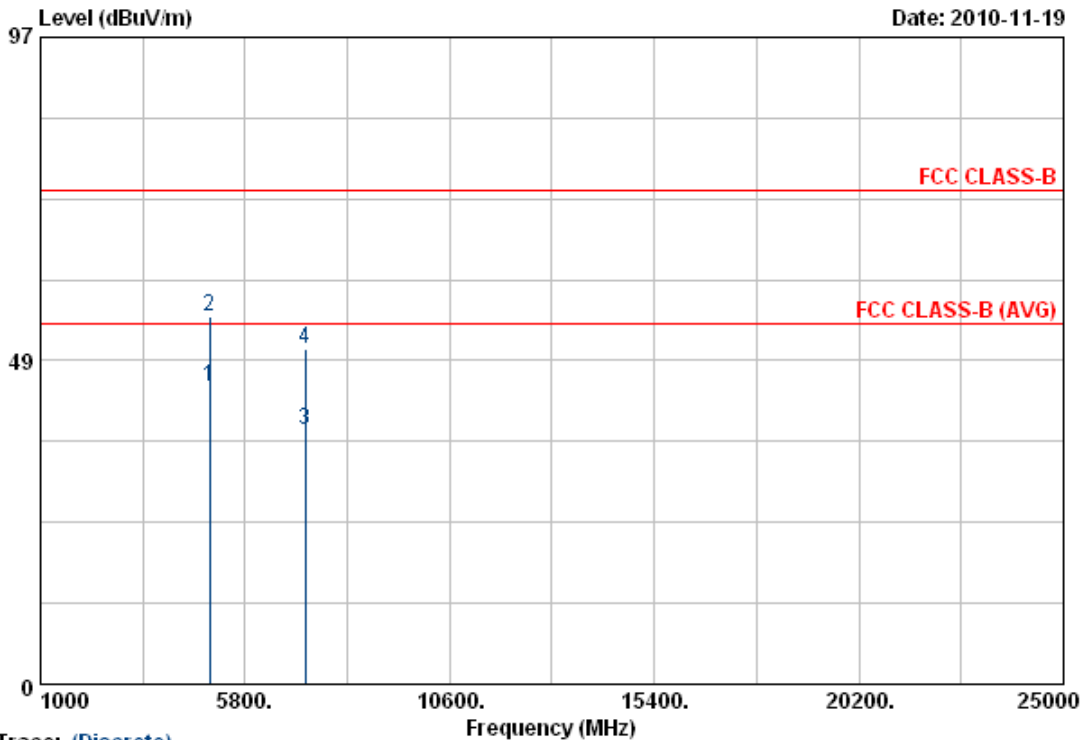

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.03	41.56	2.92	44.48	54.00	-9.52	Average	150	250
2	4960.03	52.10	2.92	55.02	74.00	-18.98	Peak	150	250
3	7201.28	31.22	6.85	38.07	54.00	-15.93	Average	150	250
4	7201.28	43.48	6.85	50.33	74.00	-23.67	Peak	150	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.

Test engineer: Ben



6. 20dB Bandwidth Measurement Data


6.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

6.3 Test Setup Layout



6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2010/05/08	2011/05/07



6.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	724.00
39	2441	732.00
78	2480	736.00

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	672.00
39	2441	672.00
78	2480	672.00

Modulation Standard: 8DPSK (3Mbps)

Test Date: Nov. 19, 2010

Temperature: 26


Atmospheric pressure: 1007 hPa

Humidity: 60%


Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	628.00
39	2441	628.00
78	2480	628.00



Modulation Standard: GFSK (1Mbps)
Channel: 00

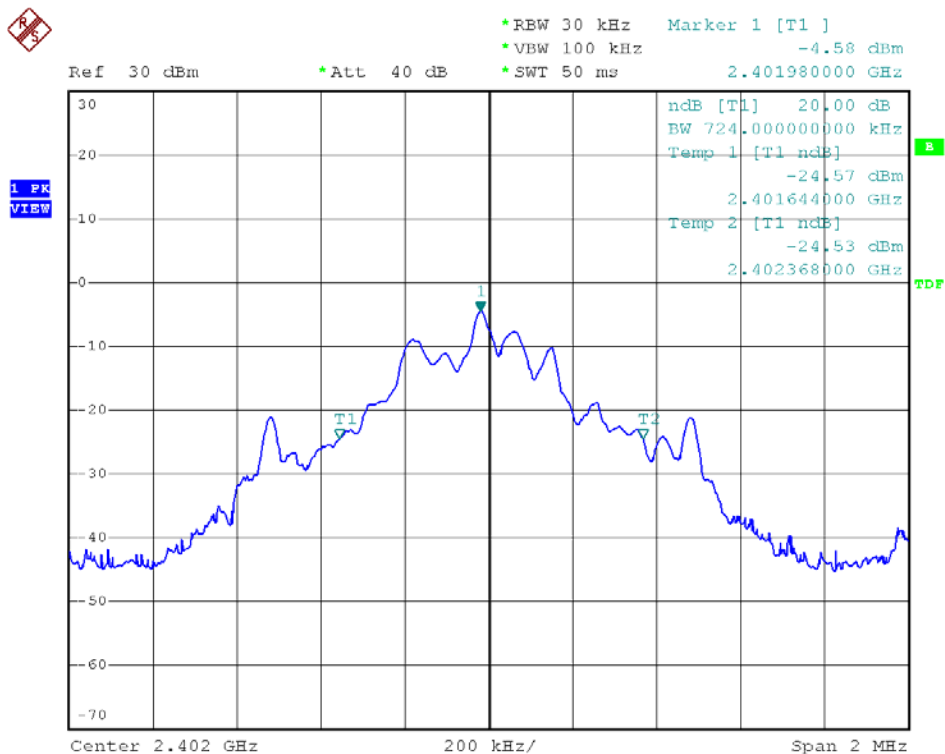


Modulation Standard: GFSK (1Mbps)
Channel: 39

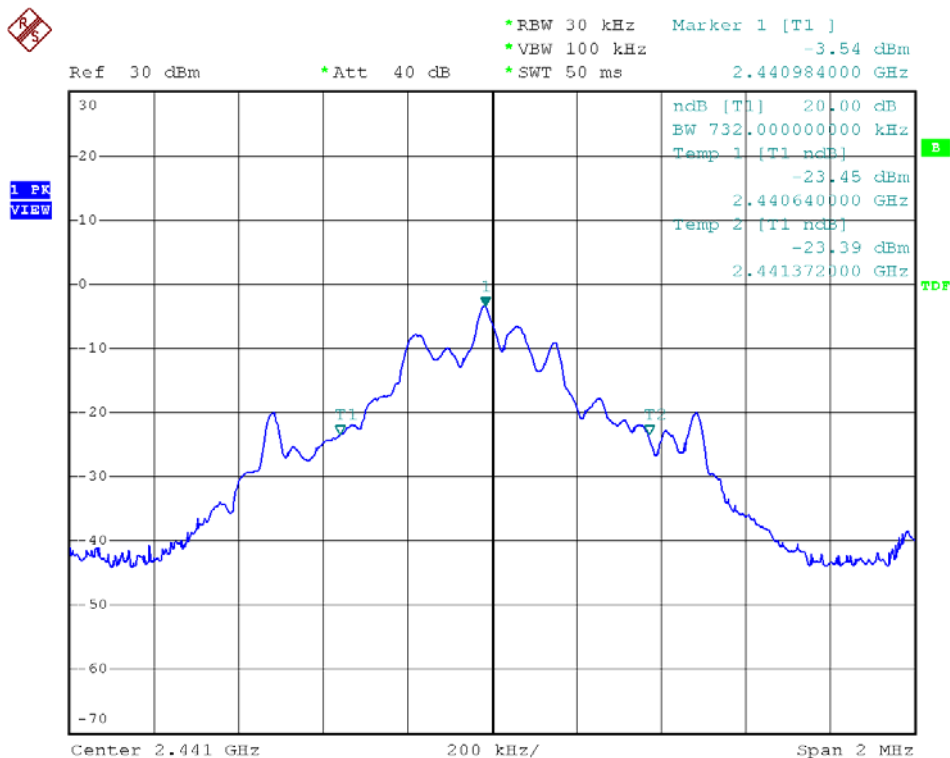




Modulation Standard: GFSK (1Mbps)
Channel: 78

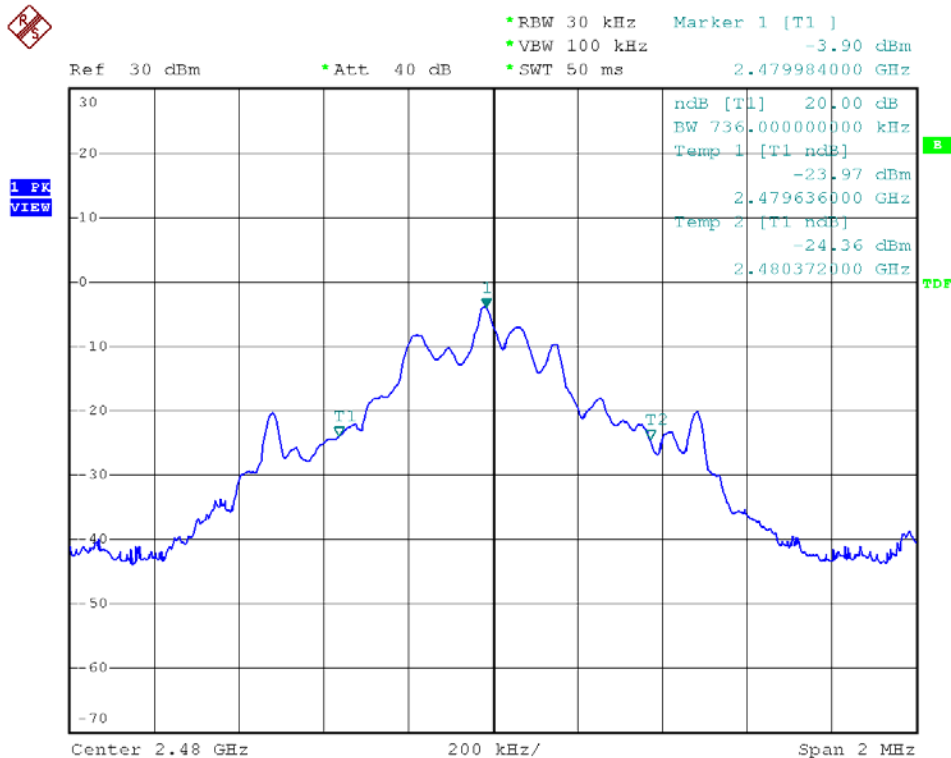


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

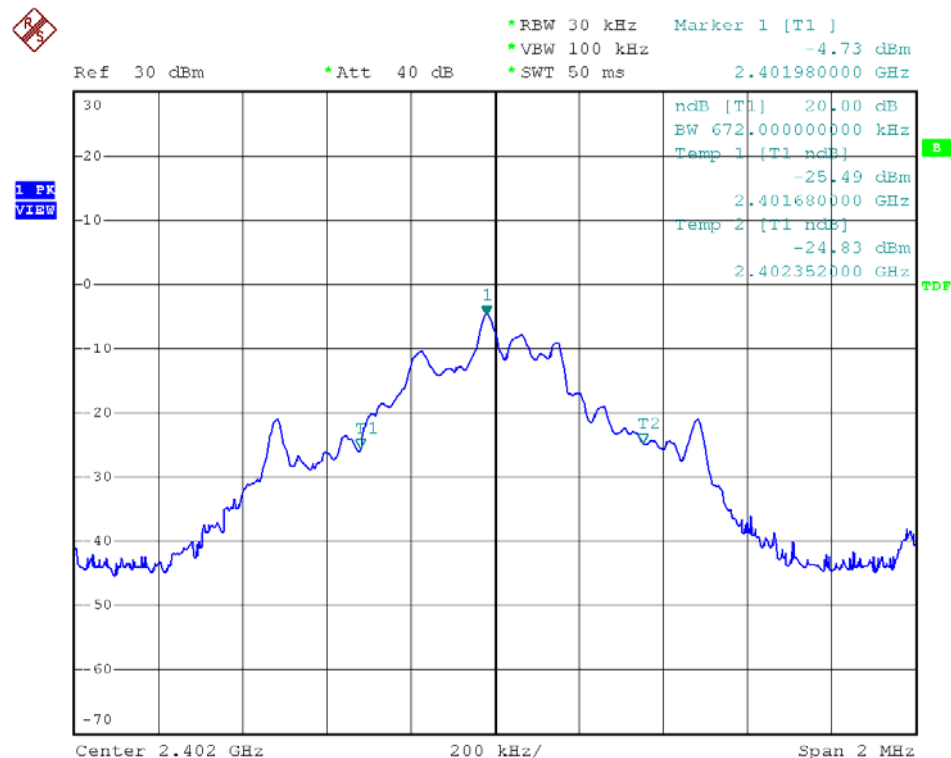




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

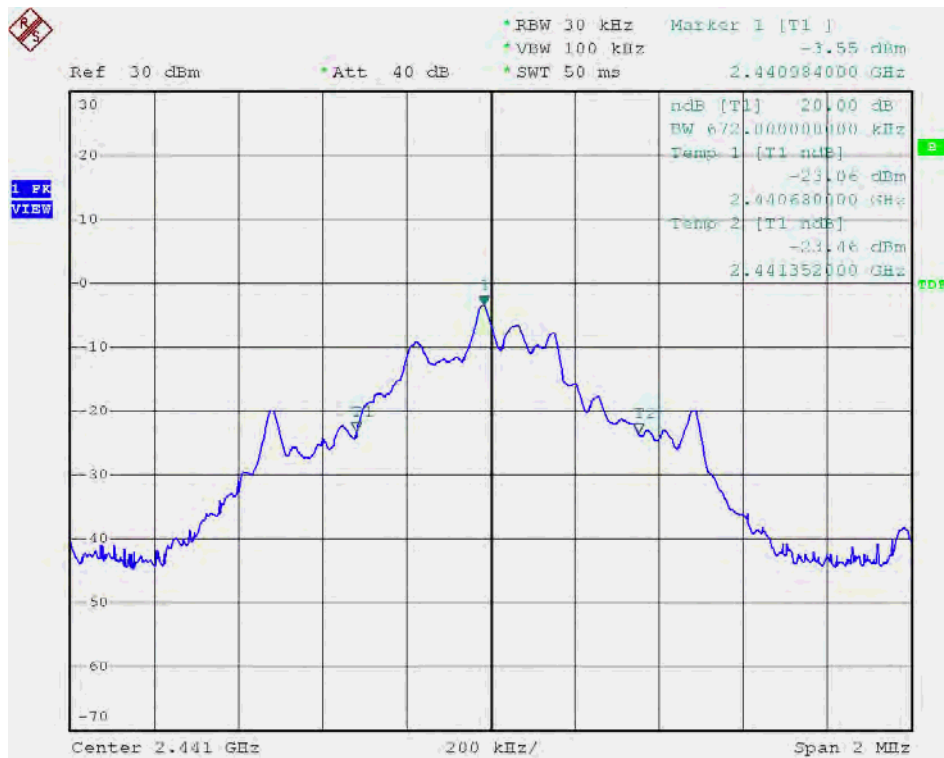


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

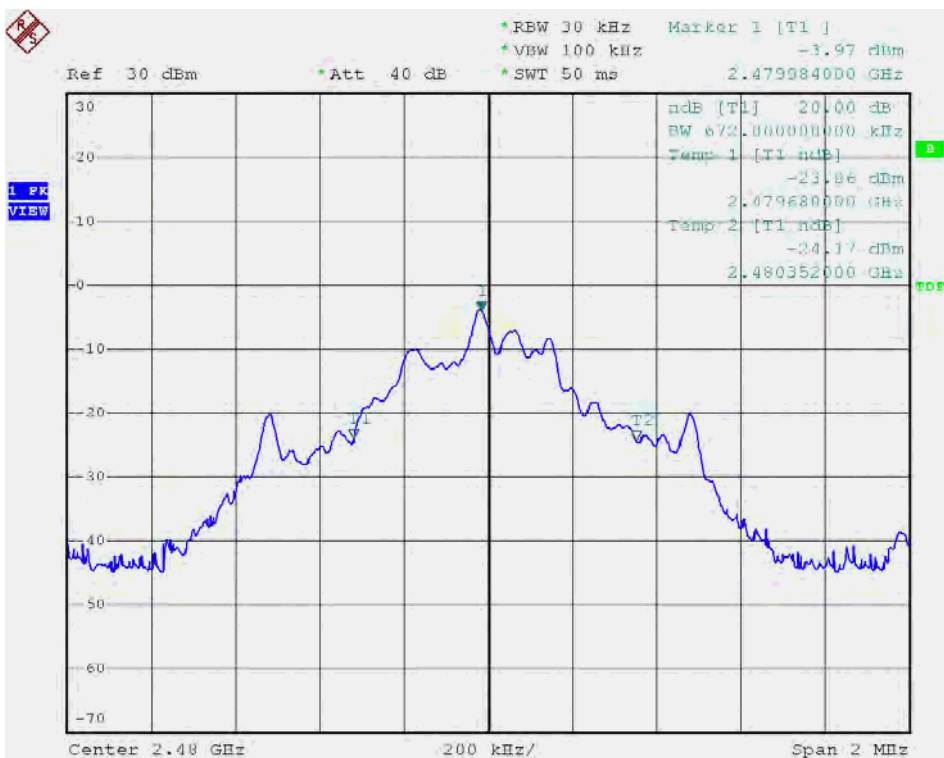




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

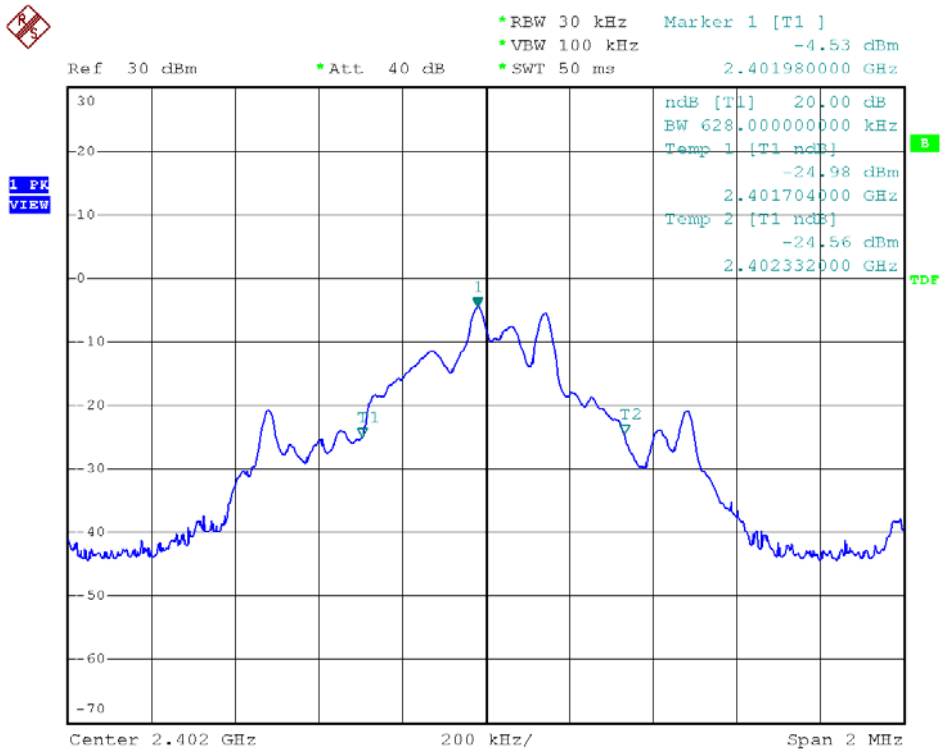


Modulation Standard: 8DPSK (3Mbps)
Channel: 39

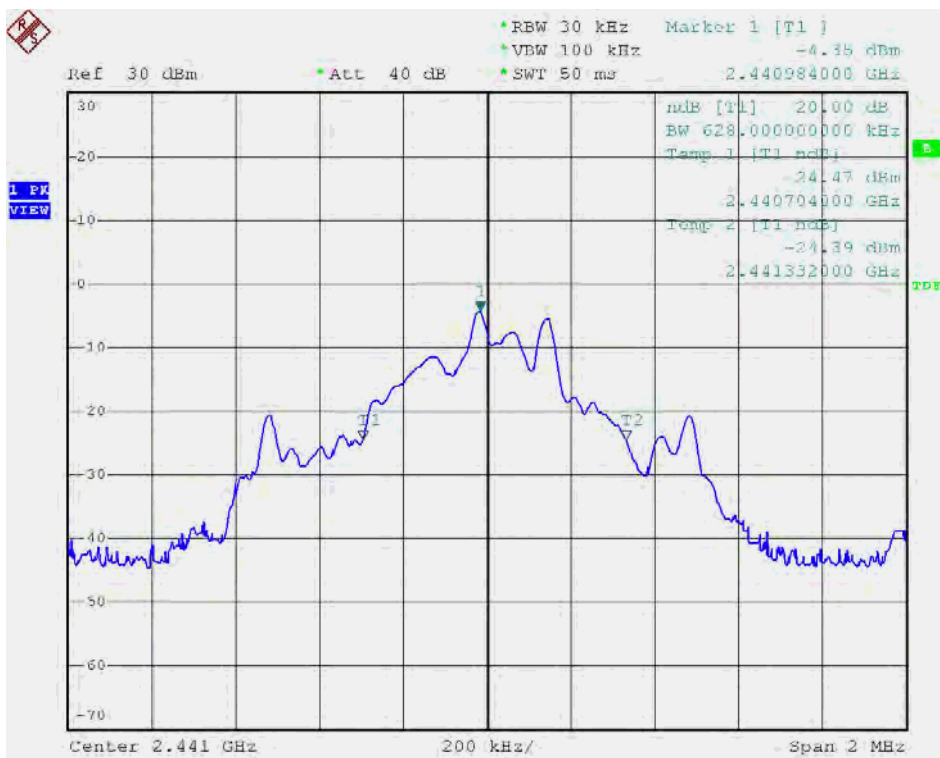



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

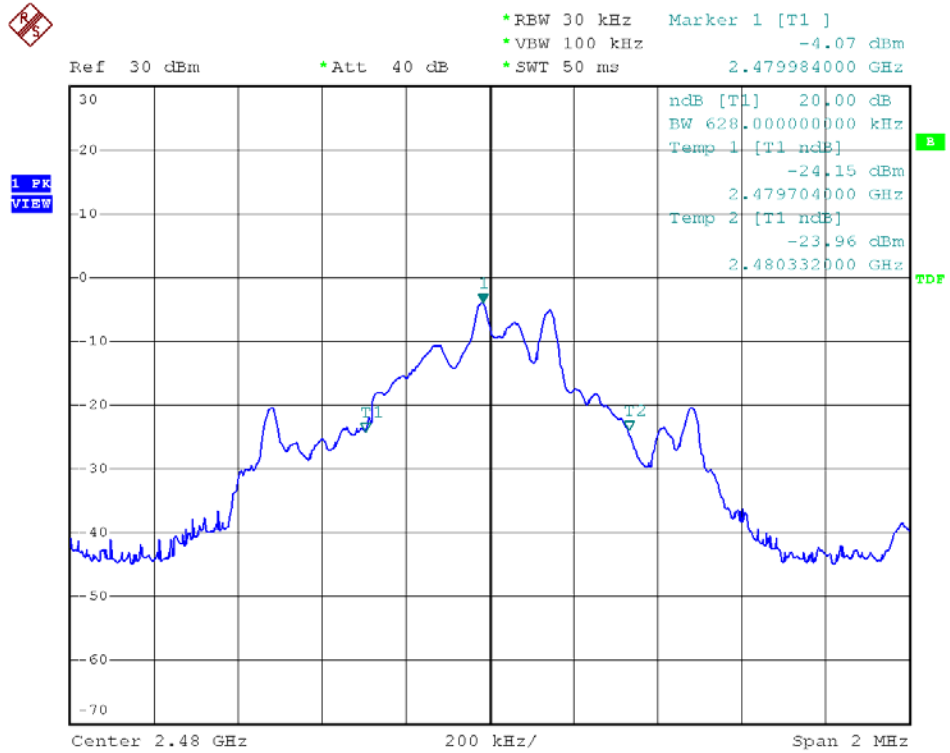



7. Frequencies Separation


7.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

7.3 Test Setup Layout



7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2010/05/08	2011/05/07



7.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.004
39	2441	1.004
78	2480	1.004

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.004
39	2441	1.000
78	2480	1.000

Modulation Standard: 8DPSK (3Mbps)

Test Date: Nov. 19, 2010

Temperature: 26


Atmospheric pressure: 1007 hPa

Humidity: 60%


Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.000
39	2441	1.004
78	2480	1.004



Modulation Standard: GFSK (1Mbps)
Channel: 00

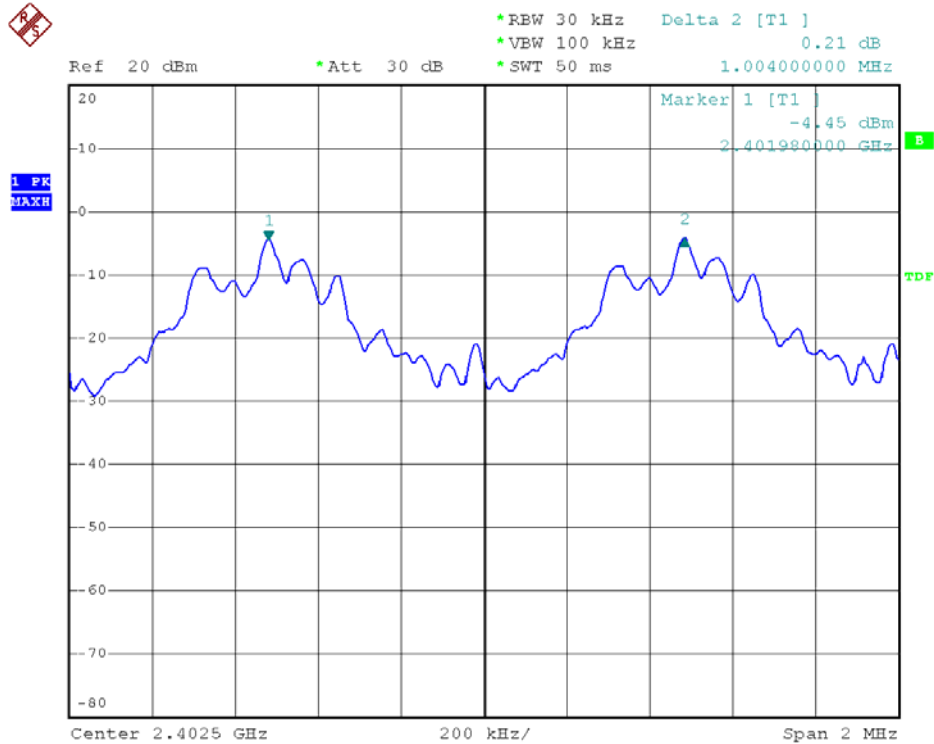


Modulation Standard: GFSK (1Mbps)
Channel: 39

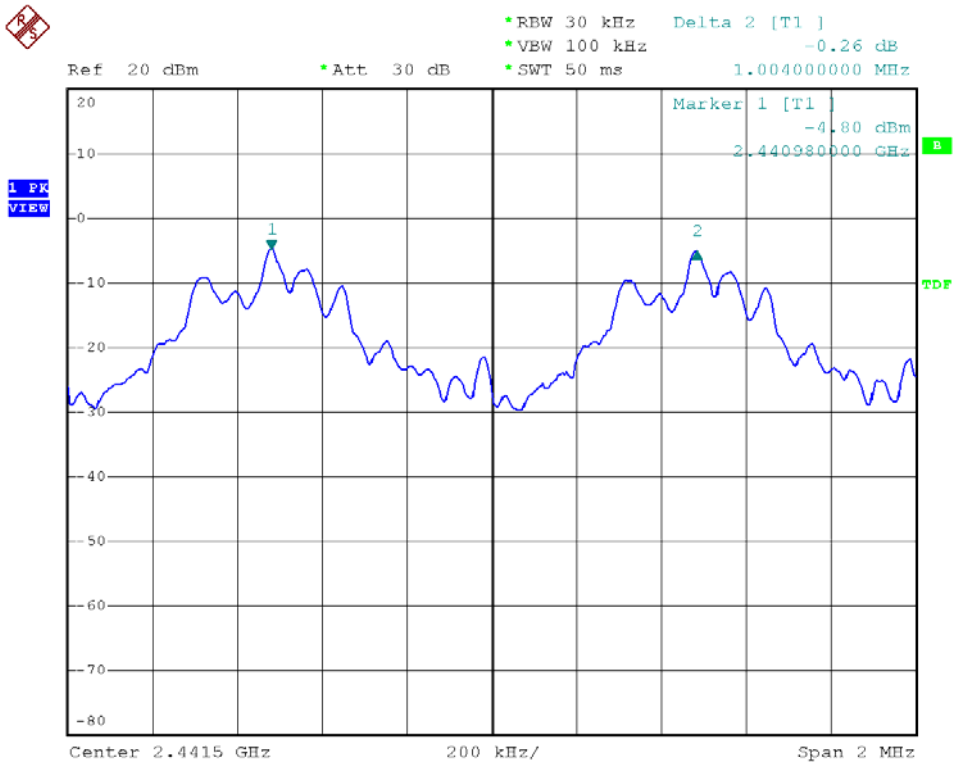



Modulation Standard: GFSK (1Mbps)
Channel: 78

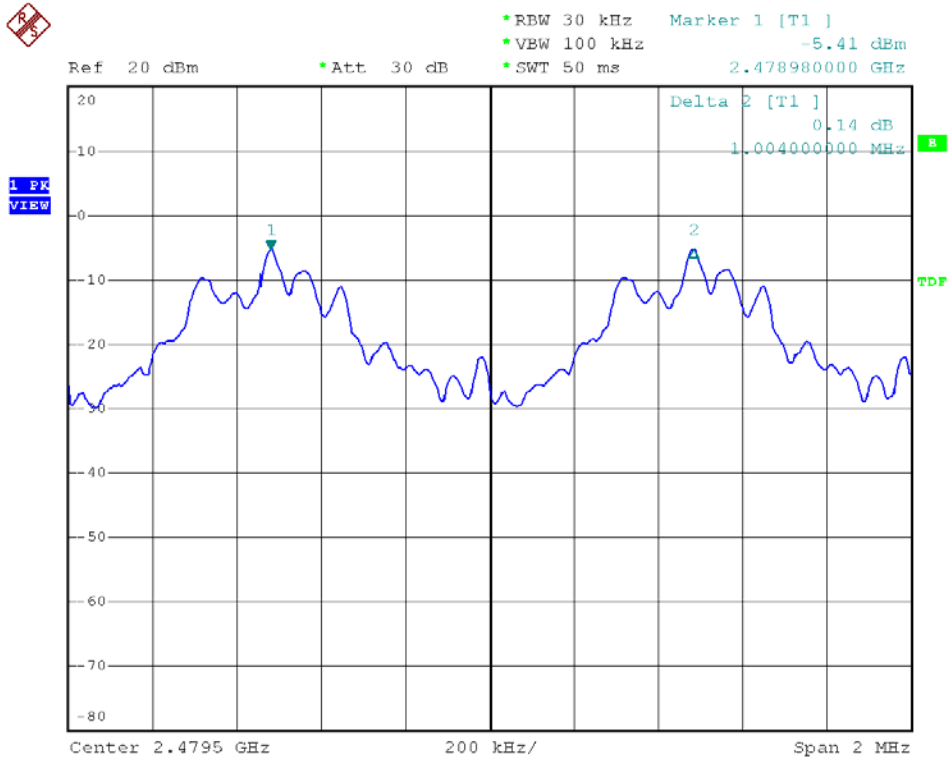


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00






Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

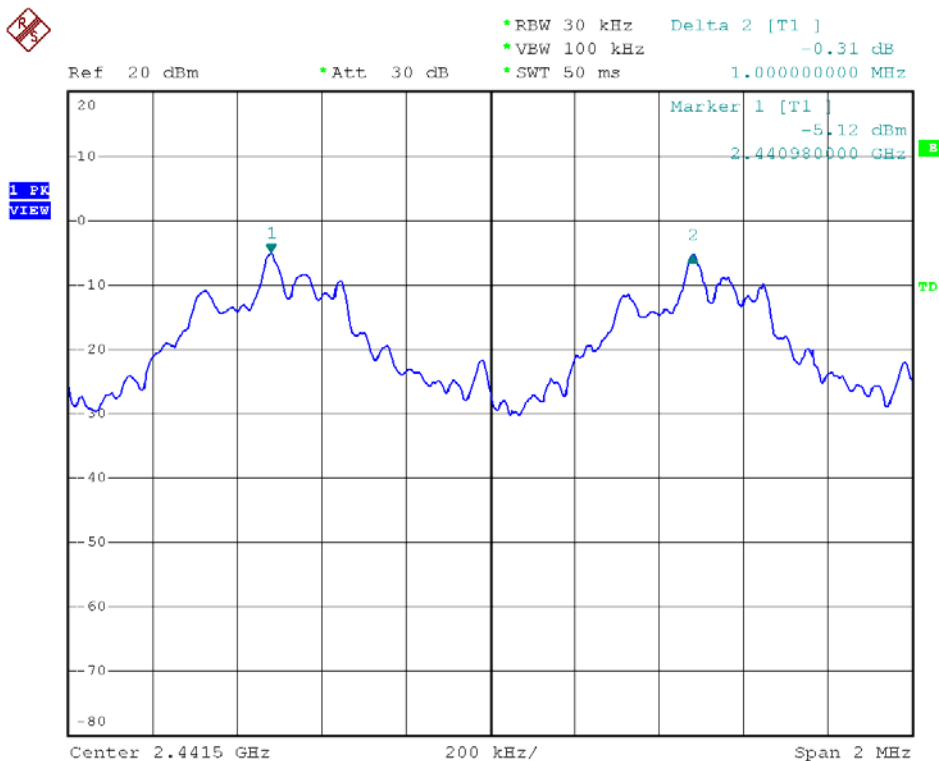


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

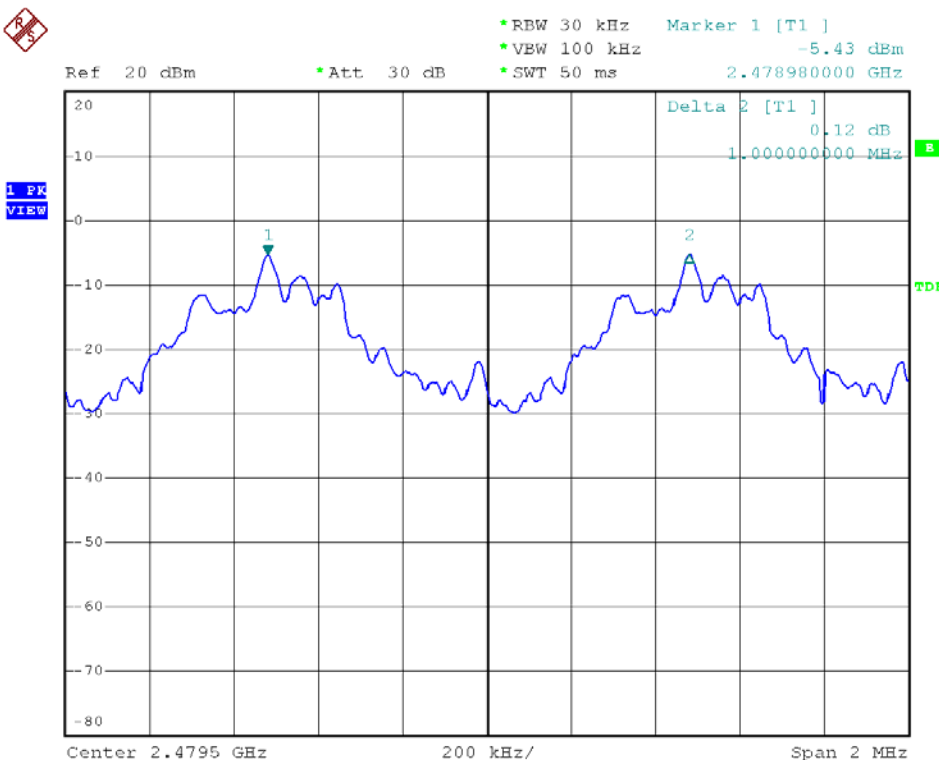




Modulation Standard: 8DQPSK (3Mbps)
Channel: 00

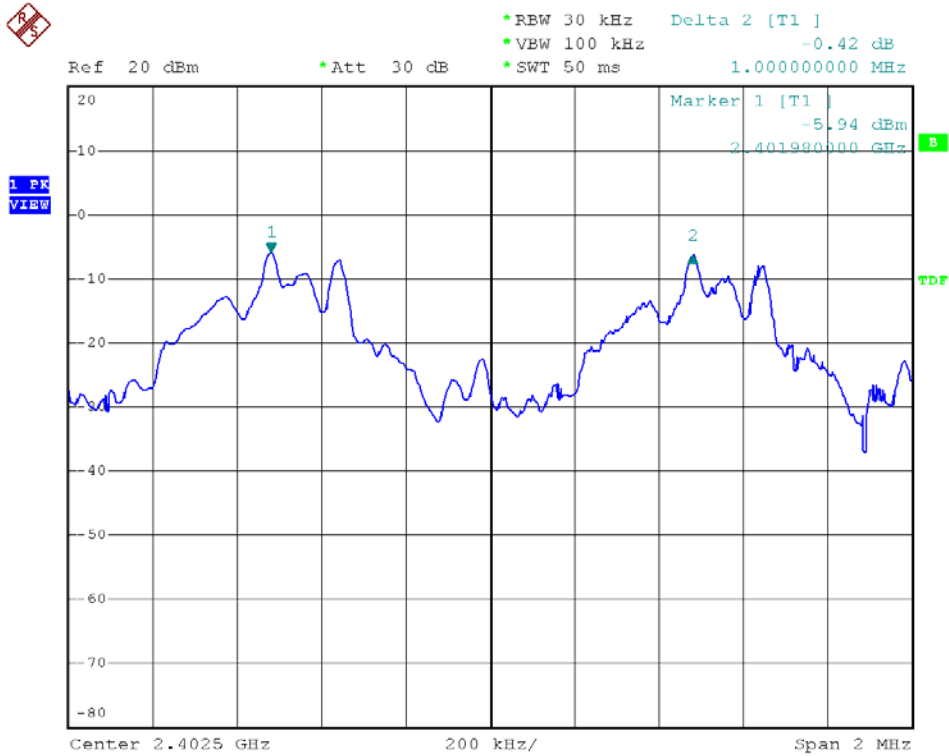


Modulation Standard: 8DQPSK (3Mbps)
Channel: 39

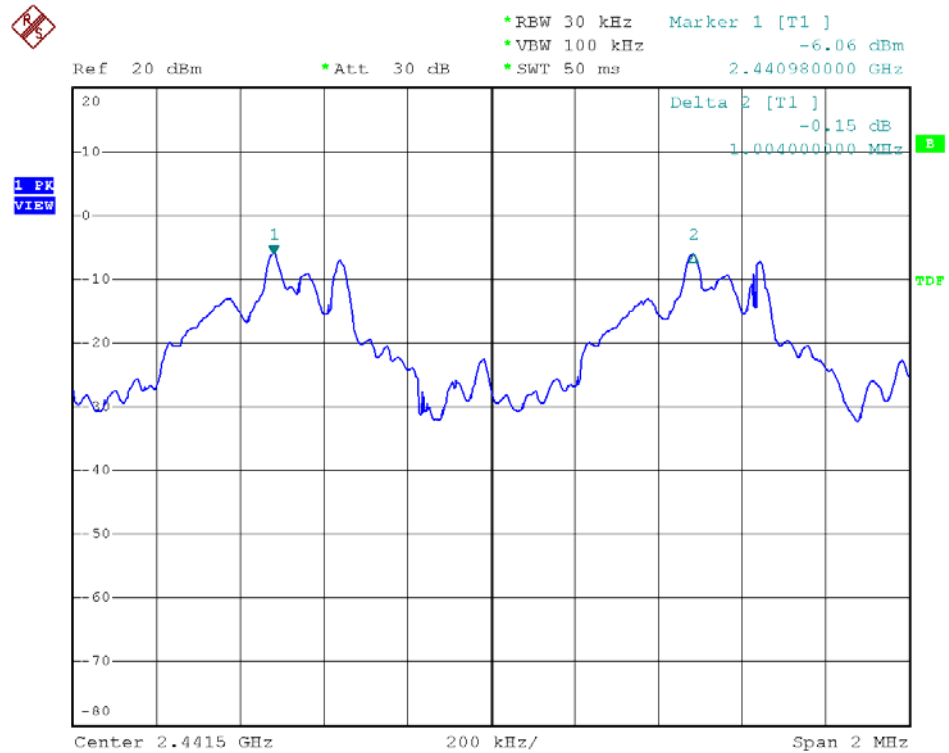



Modulation Standard: 8DQPSK (3Mbps)
Channel: 78

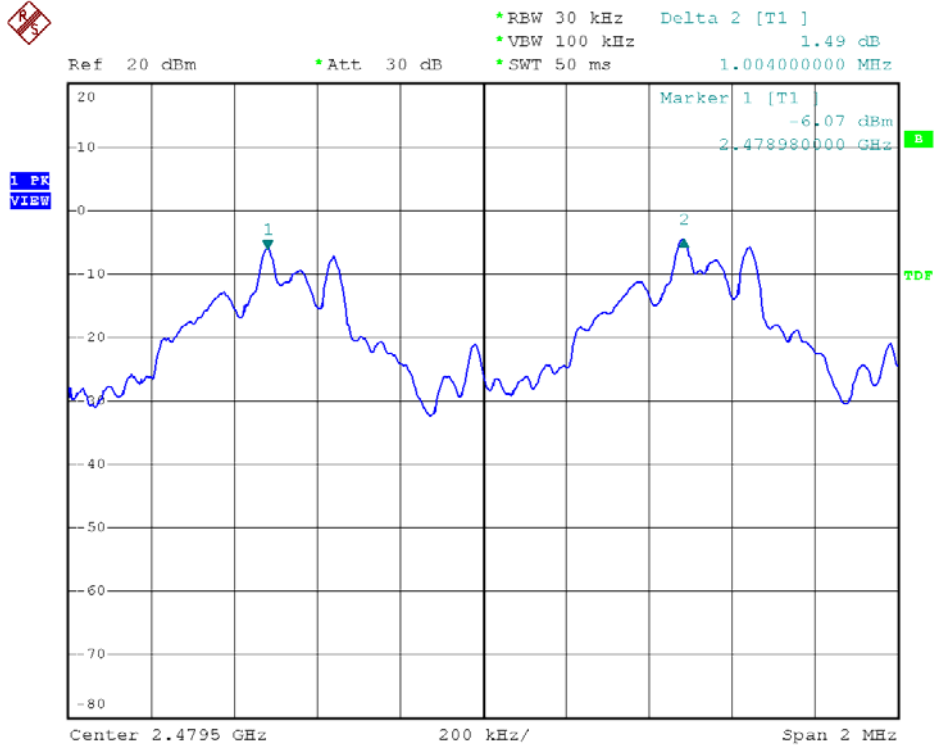



8. Dwell Time on each channel


8.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
4. Measure the time duration of one transmission on the measured frequency.

8.3 Test Setup Layout



8.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2010/05/08	2011/05/07



8.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

a) 2402 MHz Dwell Time is	=	136.96 ms
b) 2441 MHz Dwell Time is	=	135.84 ms
c) 2480 MHz Dwell Time is	=	137.60 ms

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

a) 2402 MHz Dwell Time is	=	237.44 ms
b) 2441 MHz Dwell Time is	=	271.36 ms
c) 2480 MHz Dwell Time is	=	237.72 ms

Modulation Standard: 8DPSK (3Mbps)

Test Date: Nov. 19, 2010

Temperature: 26



Atmospheric pressure: 1007 hPa

Humidity: 60%

a) 2402 MHz Dwell Time is	=	382.20 ms
b) 2441 MHz Dwell Time is	=	354.24 ms
c) 2480 MHz Dwell Time is	=	324.72 ms





Modulation Standard: GFSK (1Mbps)
Channel: 00

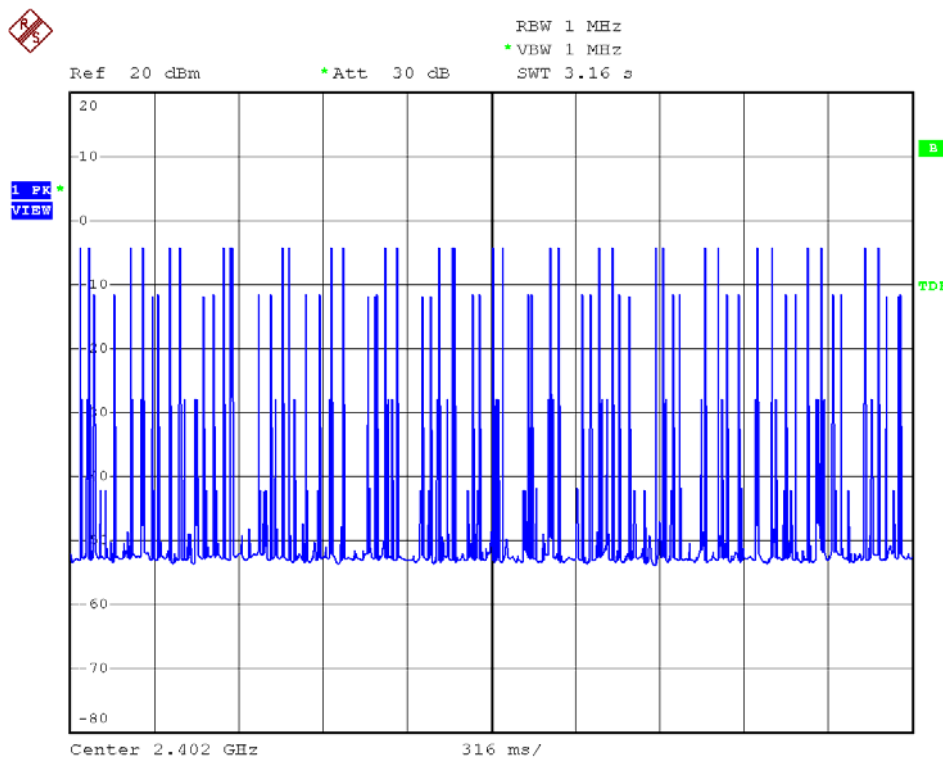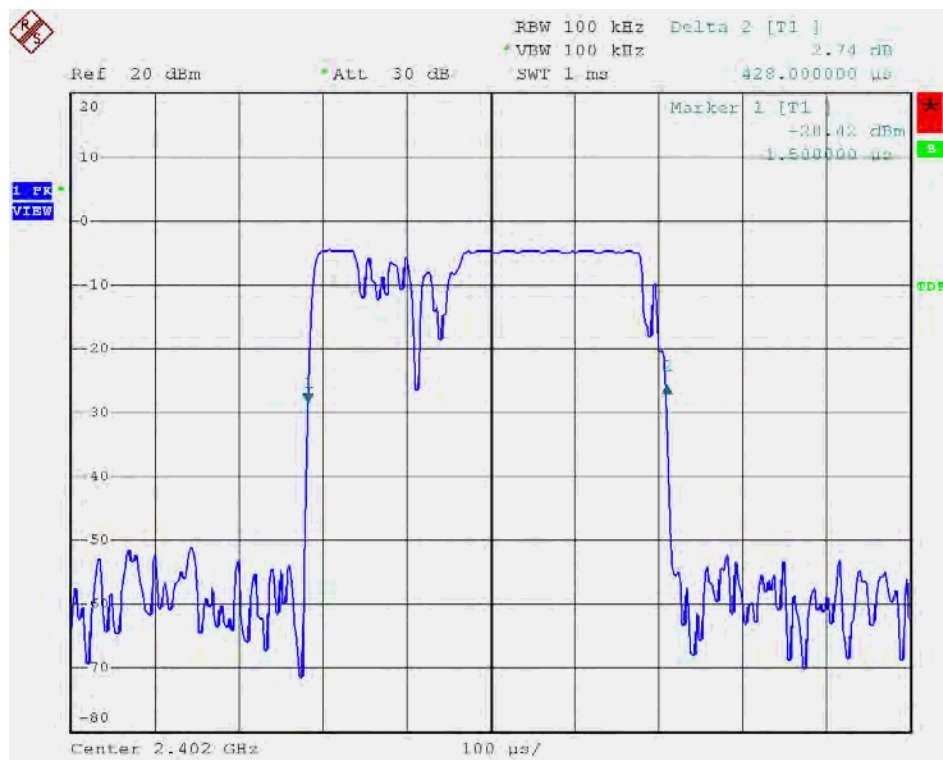





Modulation Standard: GFSK (1Mbps)
Channel: 39

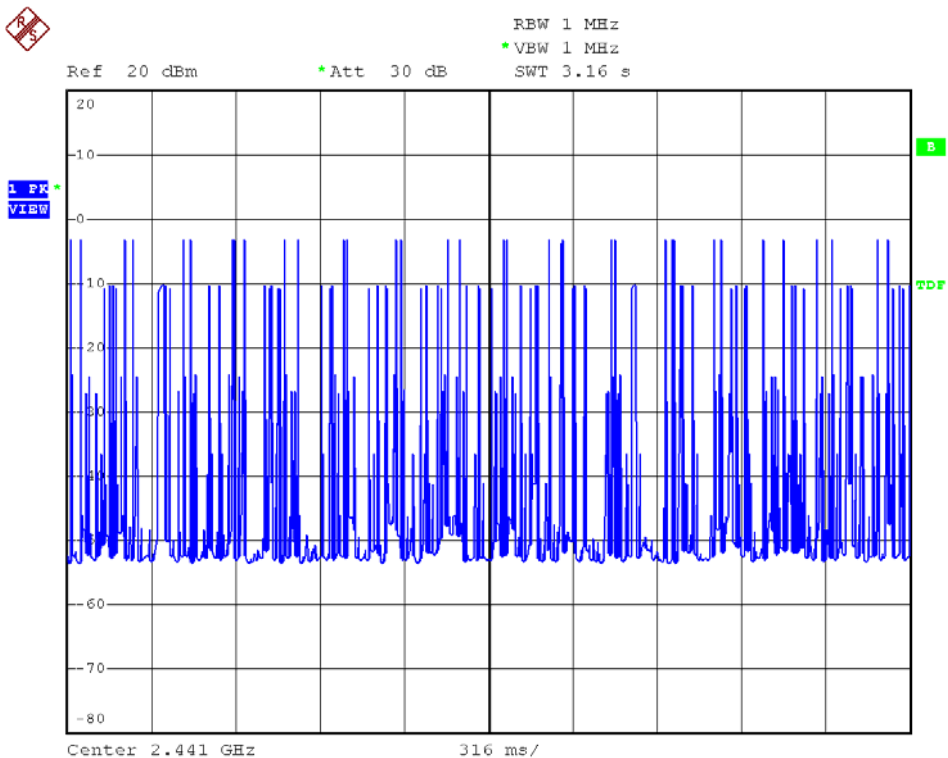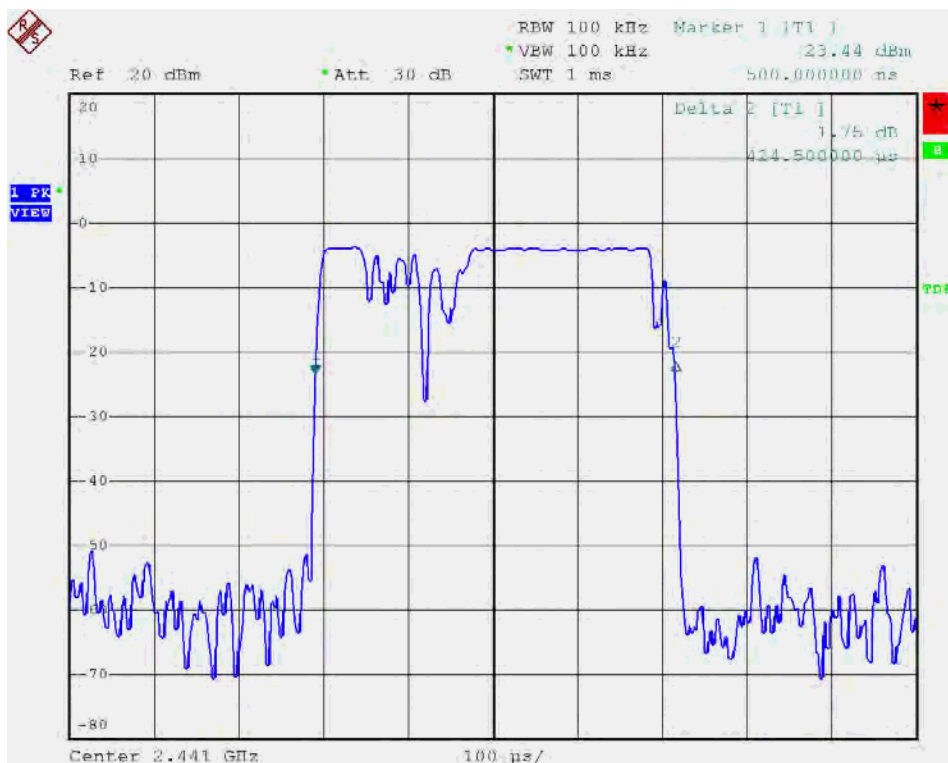





Modulation Standard: GFSK (1Mbps)
Channel: 78

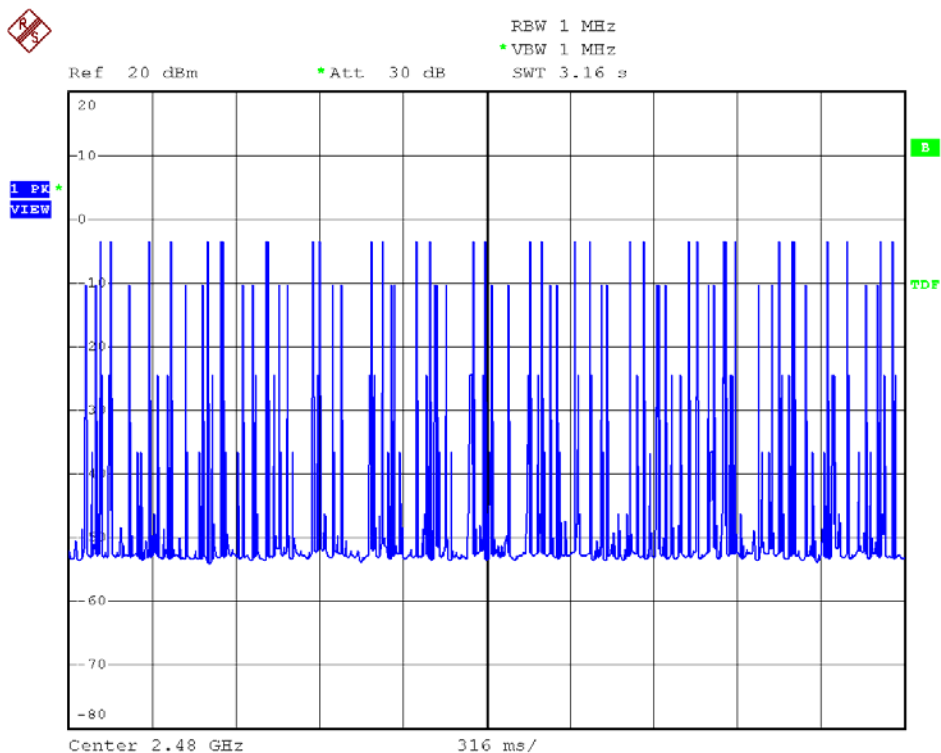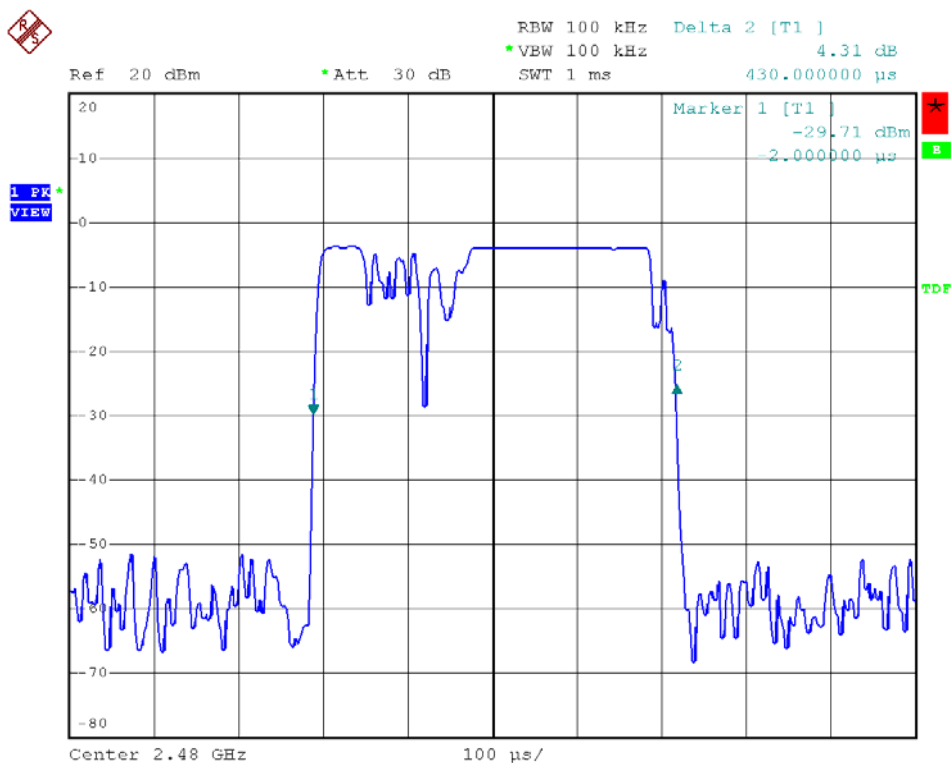





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

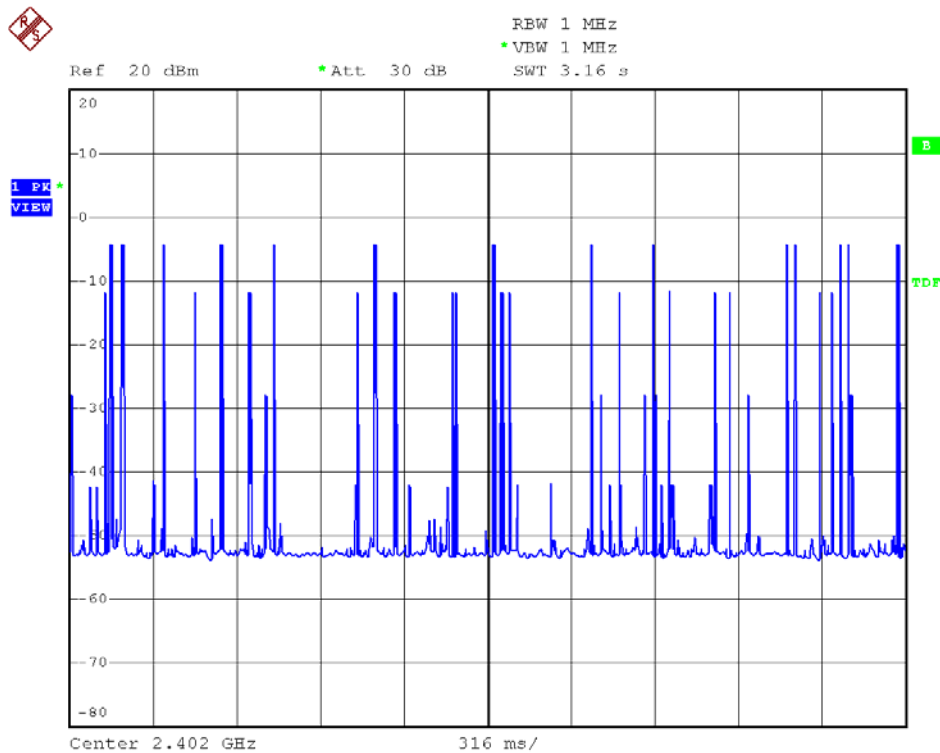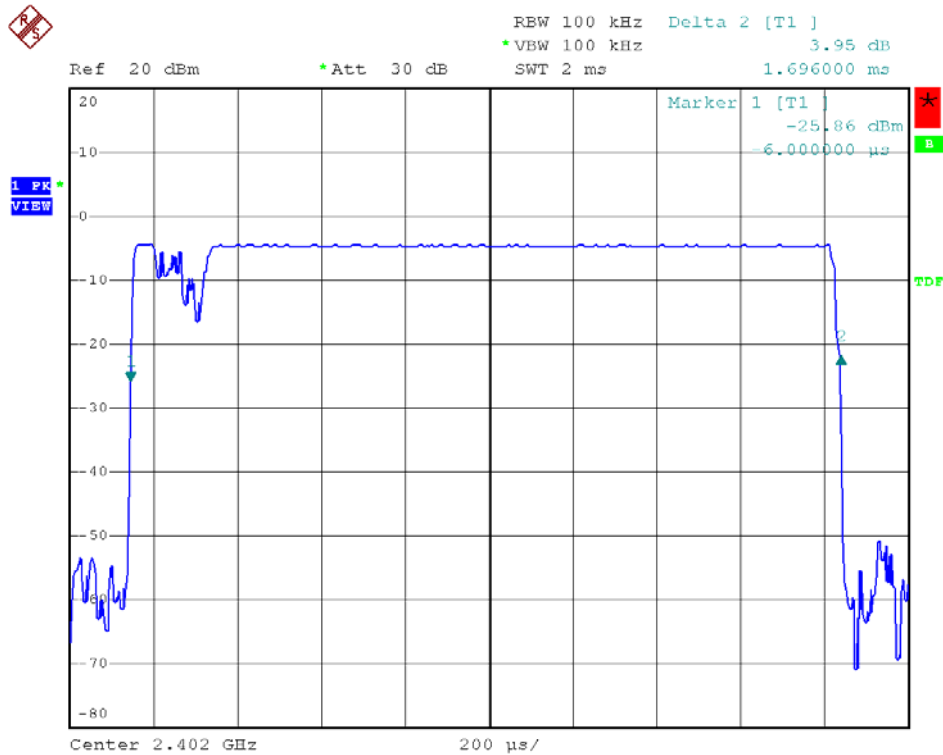





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

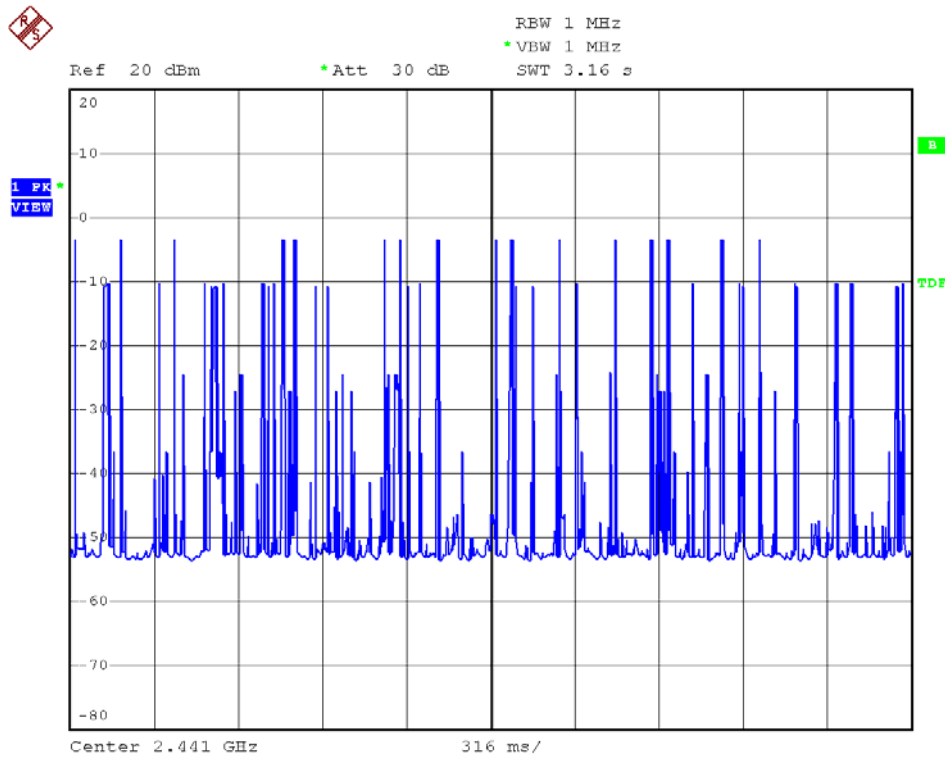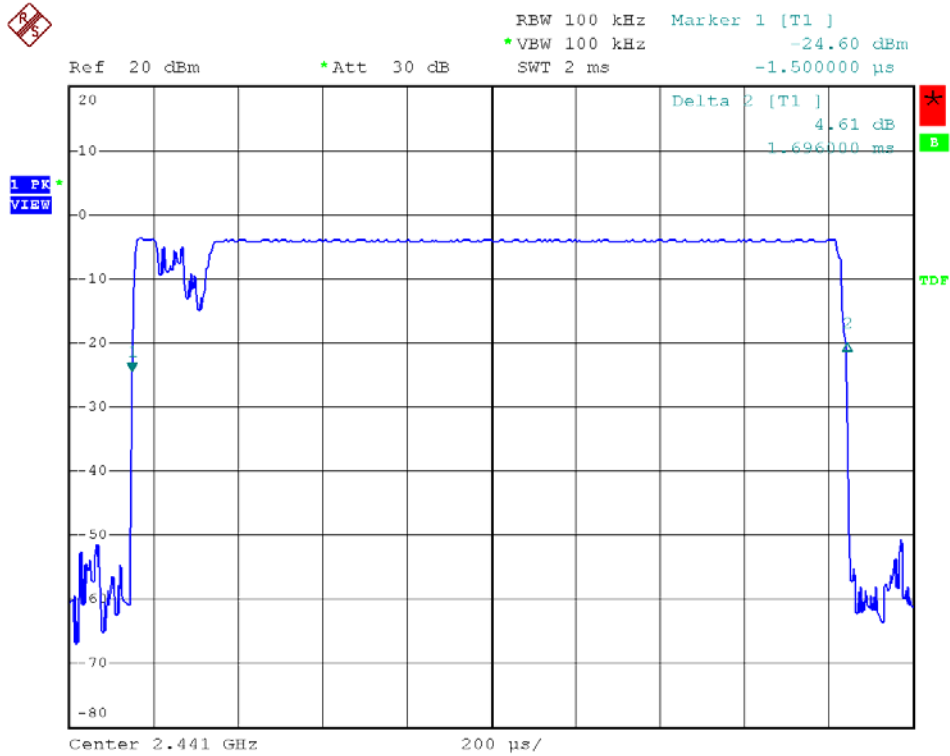





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

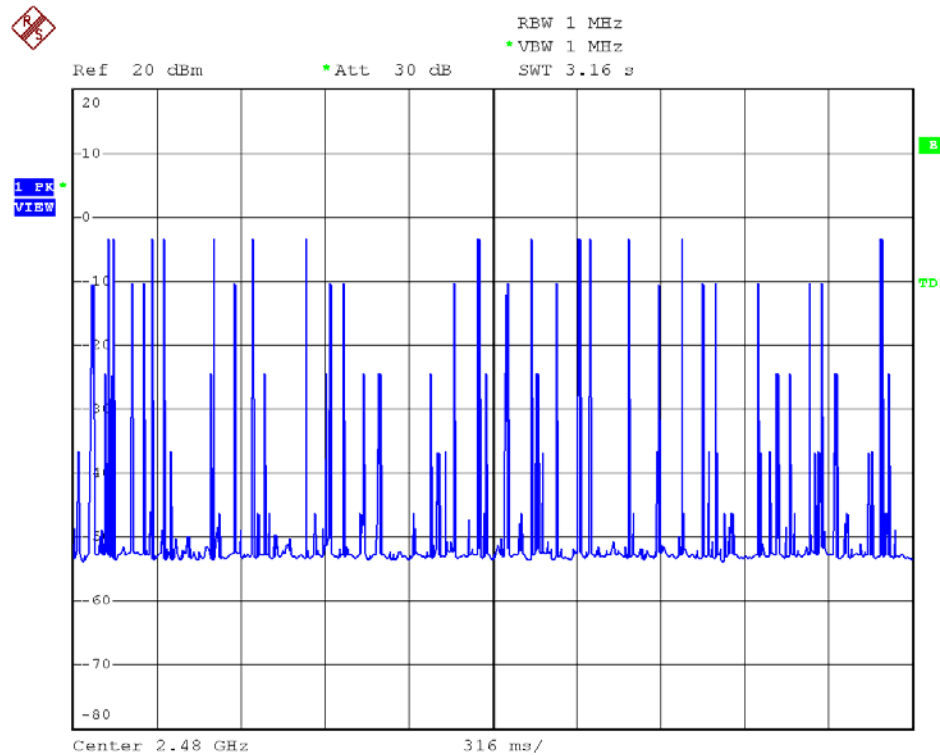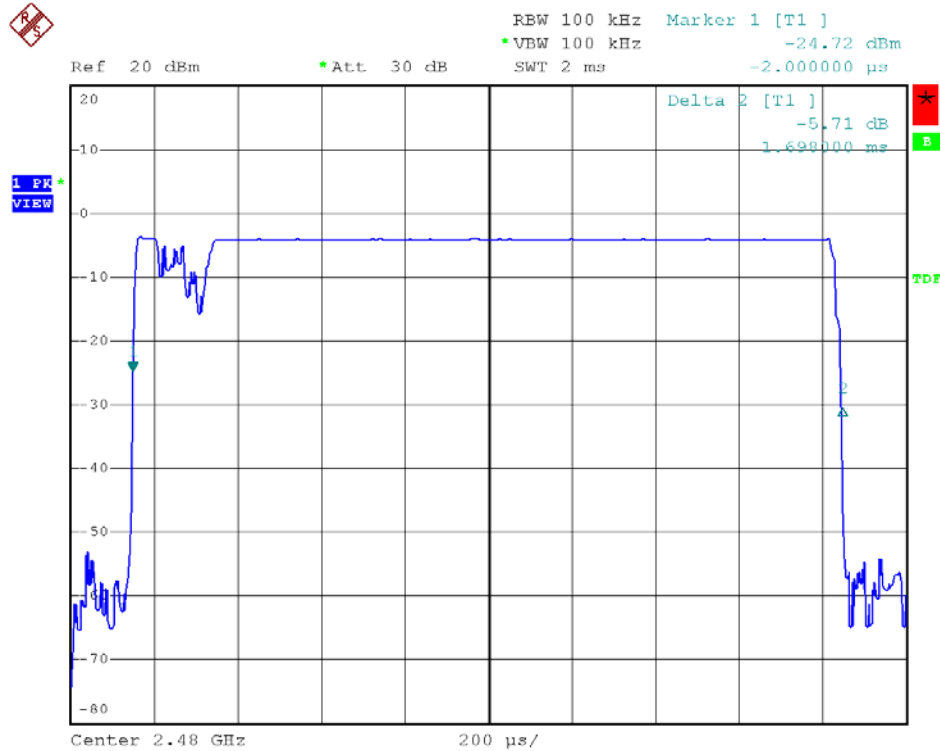





Modulation Standard: 8DPSK (3Mbps)
Channel: 00

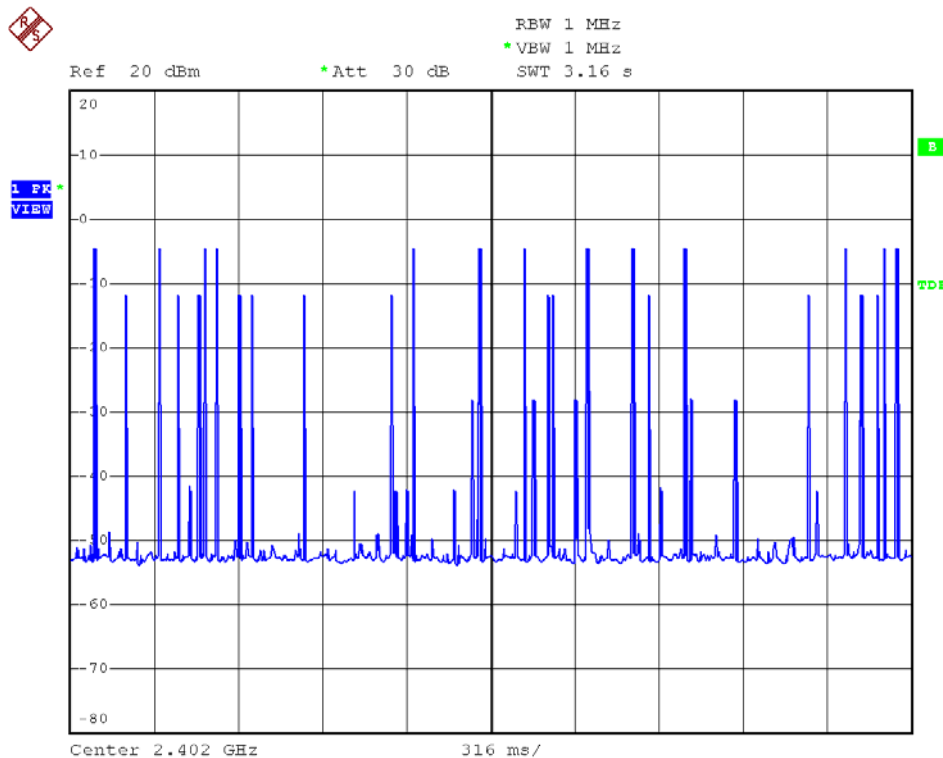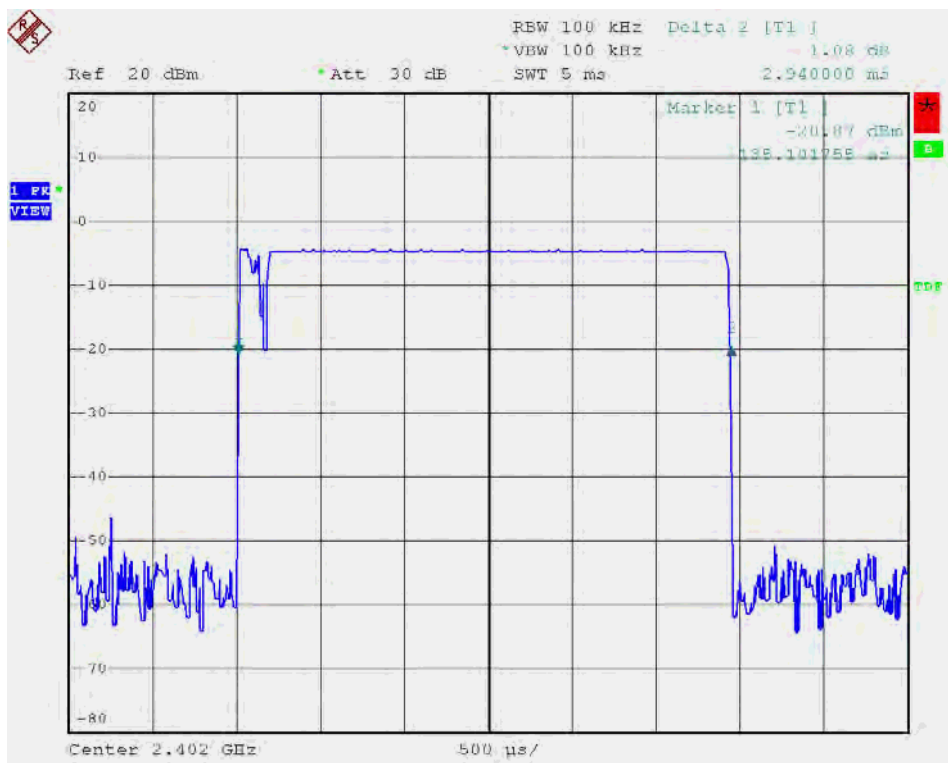





Modulation Standard: 8DPSK (3Mbps)
Channel: 39

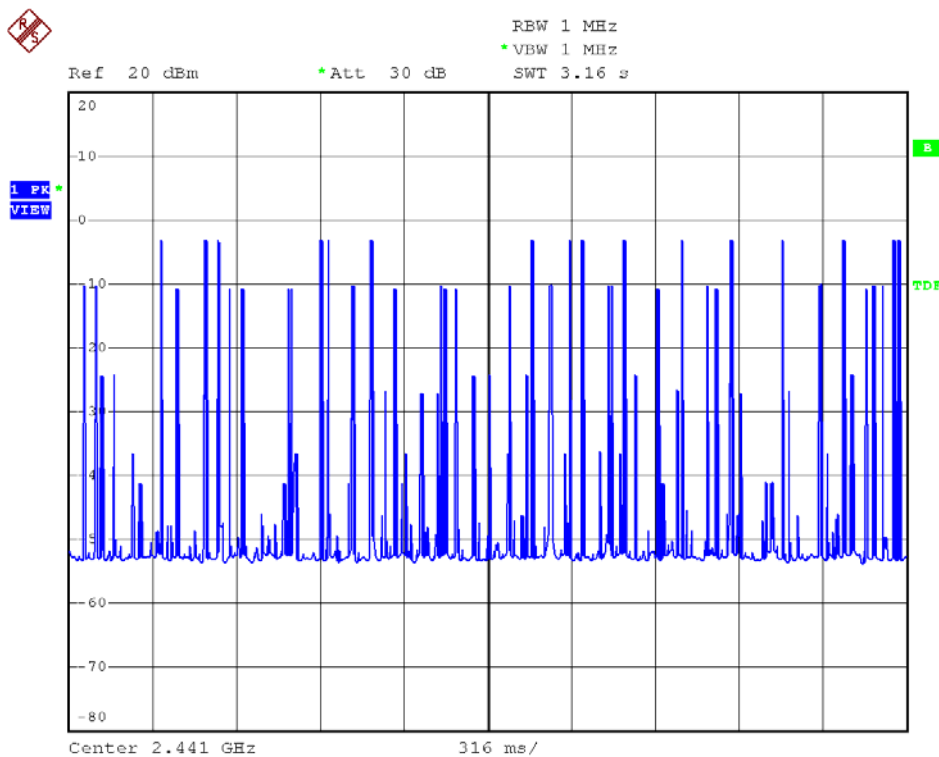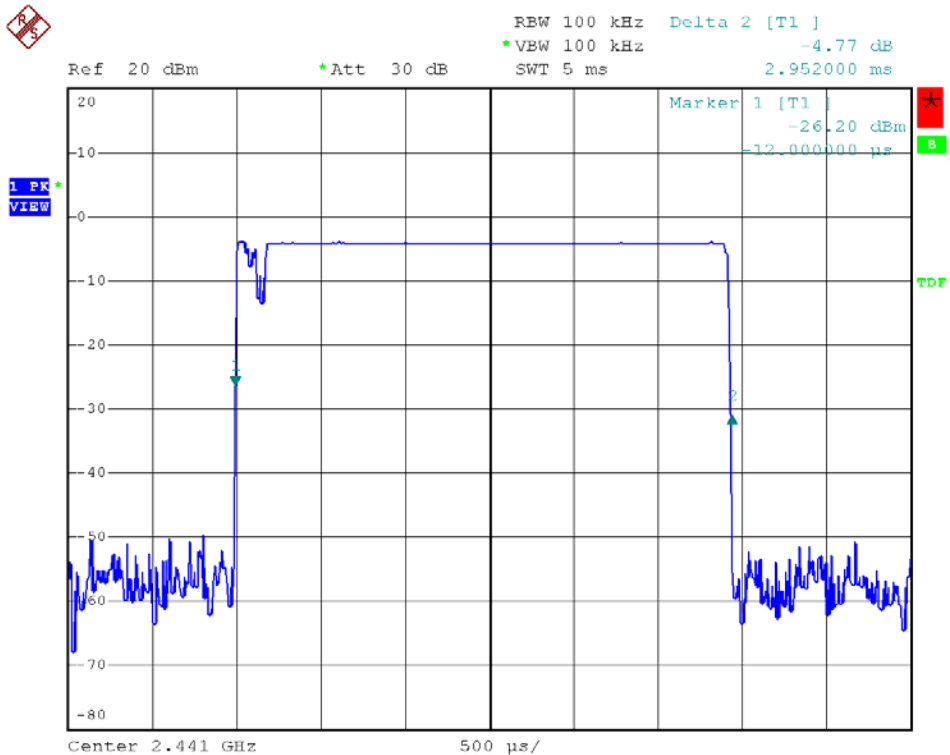



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

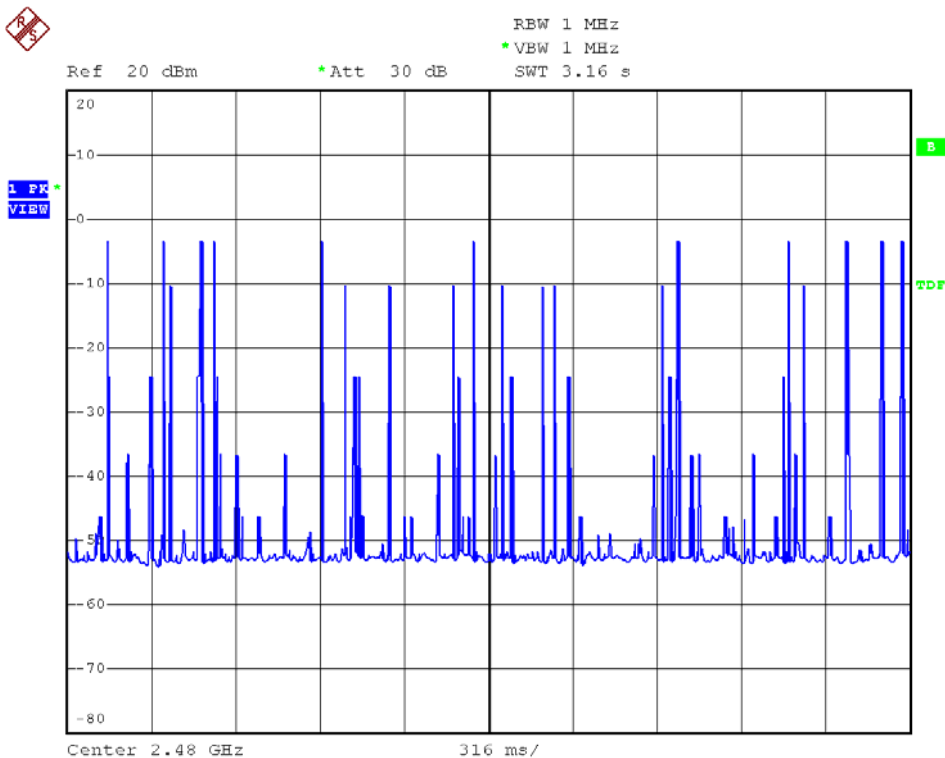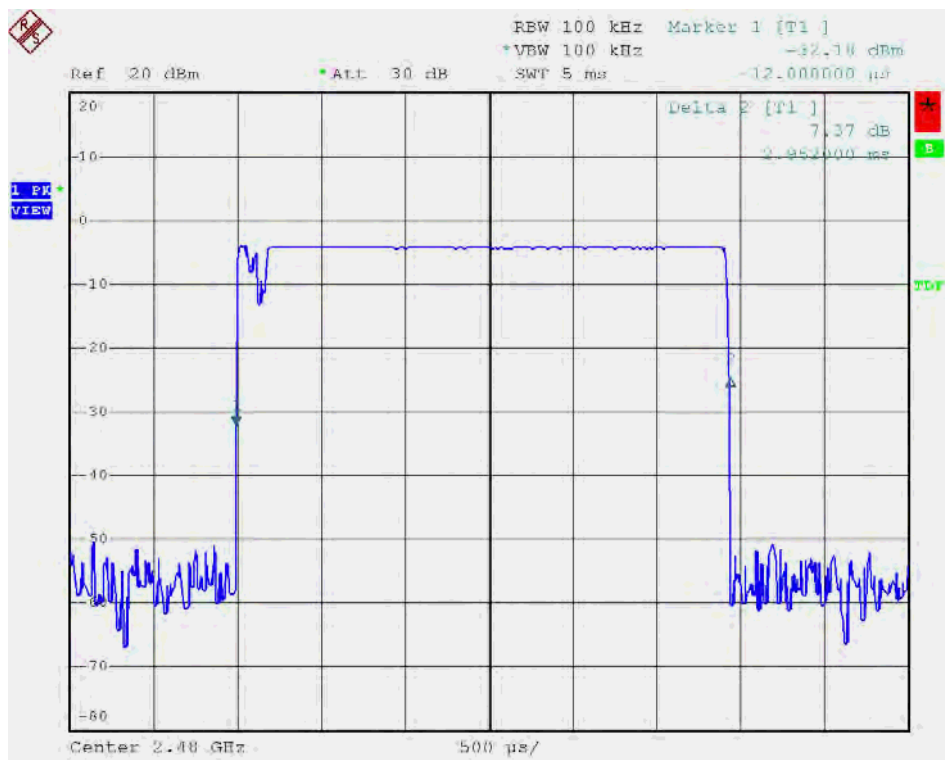



9. Number of Hopping Channels


9.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

9.3 Test Setup Layout



9.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2010/05/08	2011/05/07

9.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Number of hopping channels:	79	Channels
-----------------------------	----	----------

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Number of hopping channels:	79	Channels
-----------------------------	----	----------

Modulation Standard: 8DPSK (3Mbps)

Test Date: Nov. 19, 2010

Temperature: 26


Atmospheric pressure: 1007 hPa

Humidity: 60%


Number of hopping channels:	79	Channels
-----------------------------	----	----------



Modulation Standard: GFSK (1Mbps)

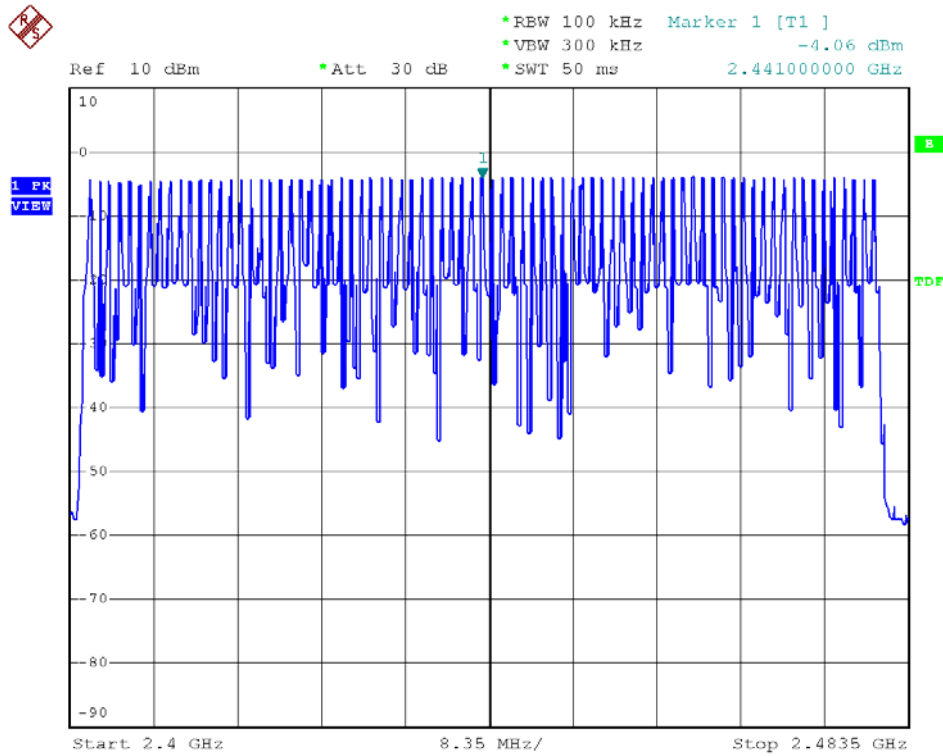


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

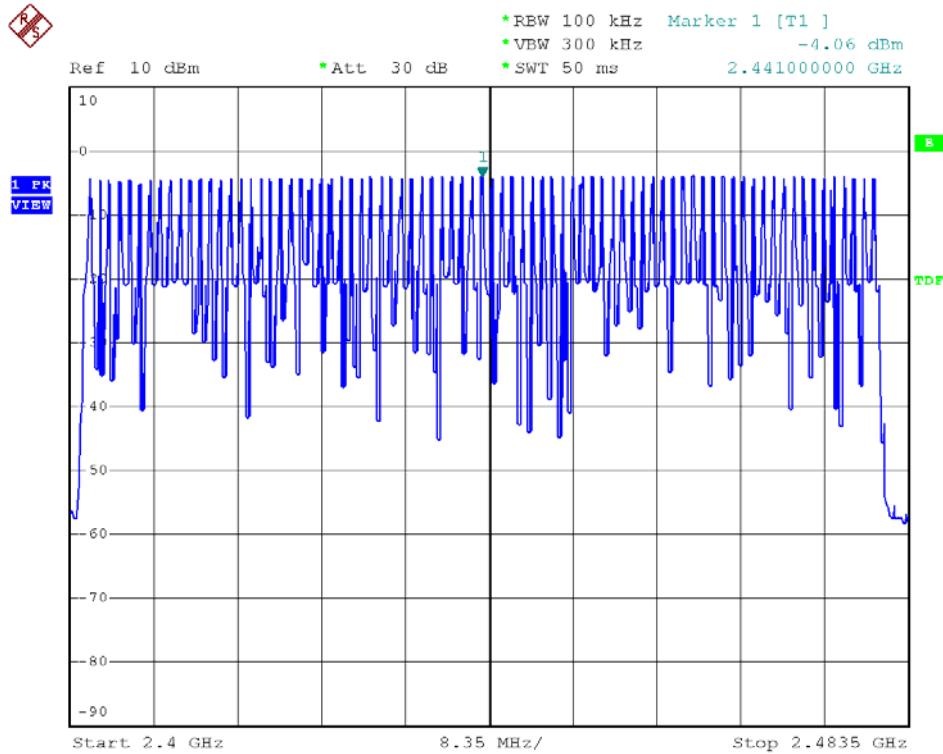



Modulation Standard: 8DPSK (3Mbps)

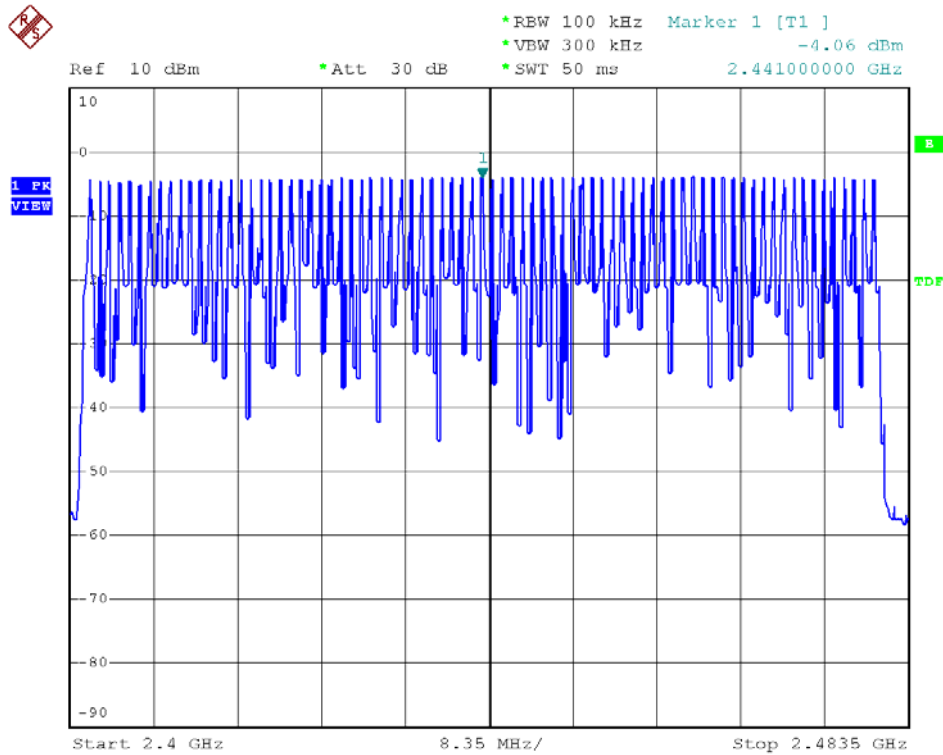



10. Maximum Peak Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2010/05/08	2011/05/07



10.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	-5.36	0.3
39	2441	-4.13	0.4
78	2478	-4.27	0.4

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	-5.87	0.3
39	2441	-4.19	0.4
78	2478	-4.40	0.4

Modulation Standard: 8DPSK (3Mbps)

Test Date: Nov. 19, 2010

Temperature: 26


Atmospheric pressure: 1007 hPa

Humidity: 60%


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	-5.64	0.3
39	2441	-4.03	0.4
78	2478	-4.45	0.4



Modulation Standard: GFSK (1Mbps)
Channel: 00

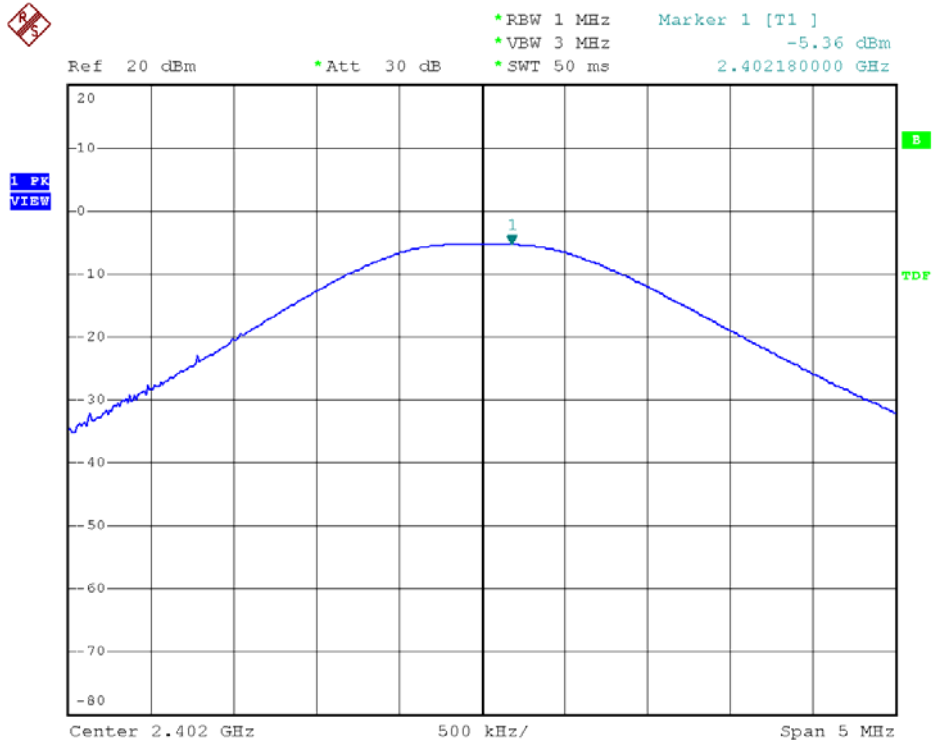


Modulation Standard: GFSK (1Mbps)
Channel: 39

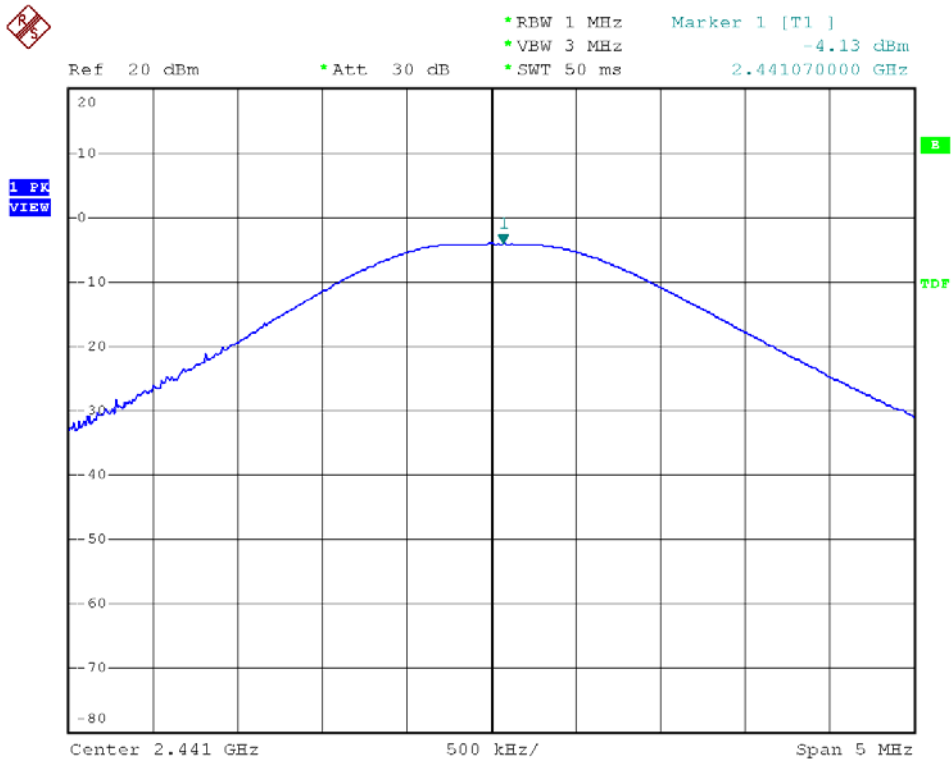




Modulation Standard: GFSK (1Mbps)
Channel: 78

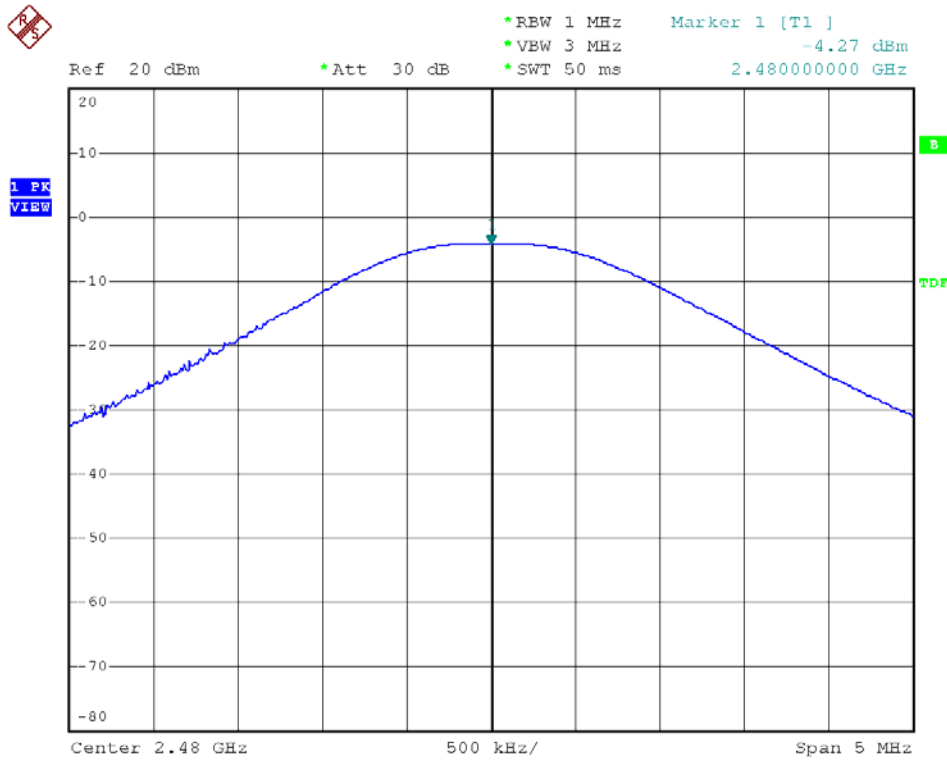

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

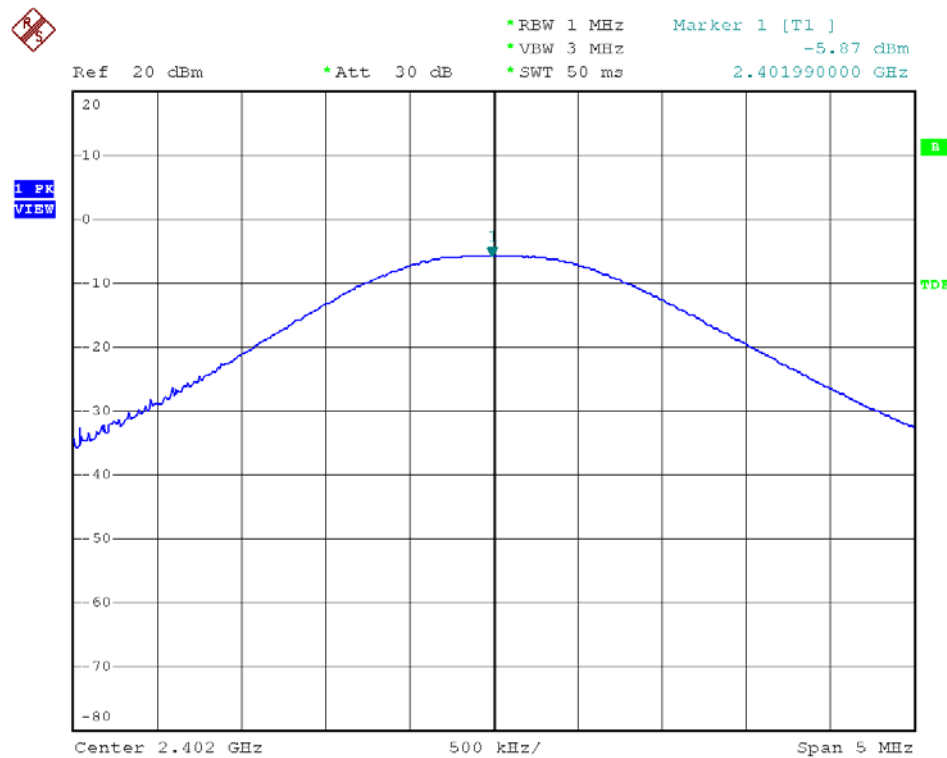




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -4.91 dBm
*SWT 50 ms 2.441000000 GHz

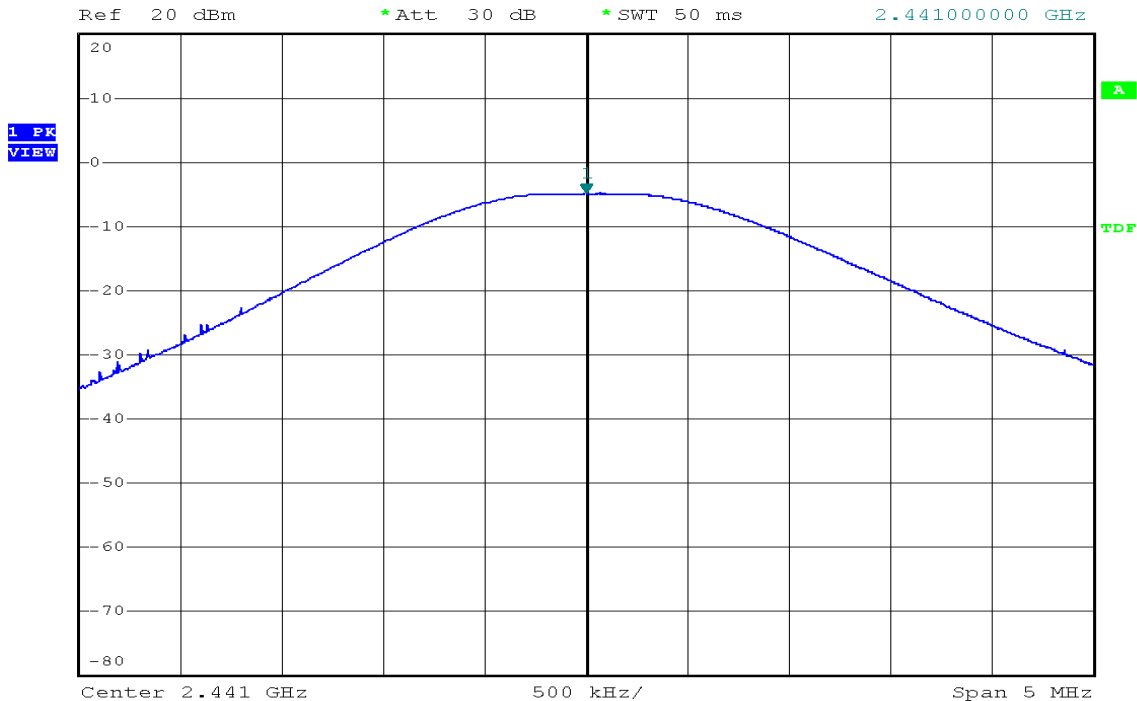

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -4.40 dBm
*SWT 50 ms 2.480000000 GHz

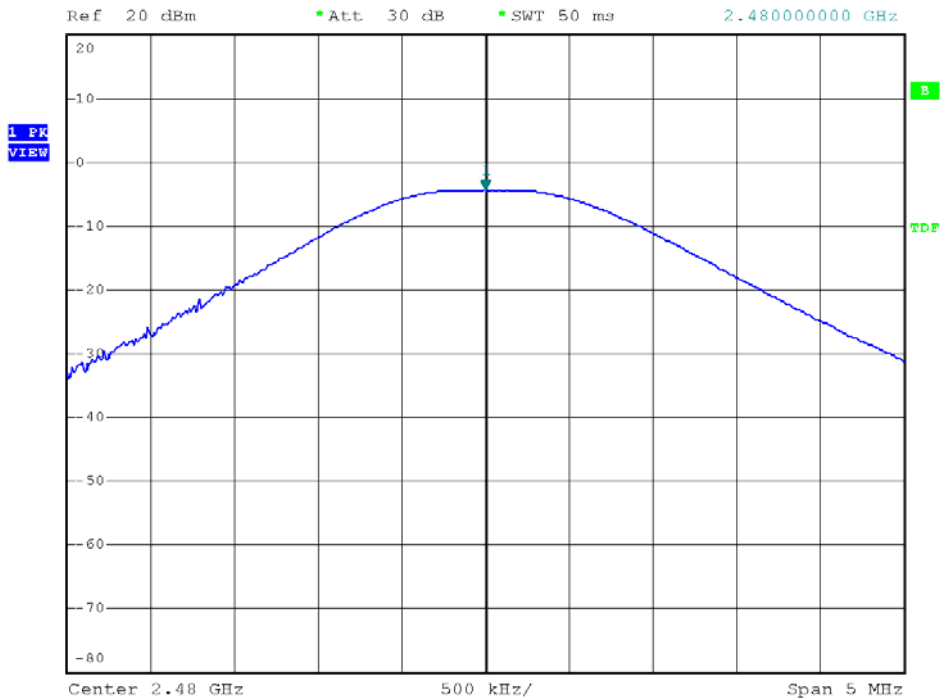




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

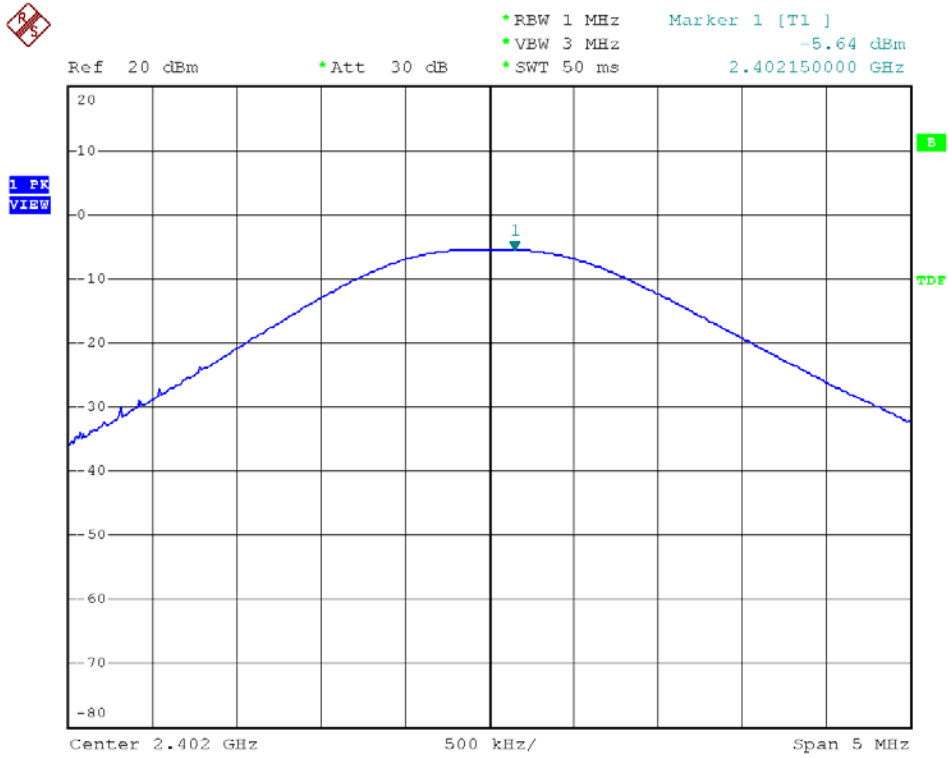

Modulation Standard: 8DPSK (3Mbps)
Channel: 39

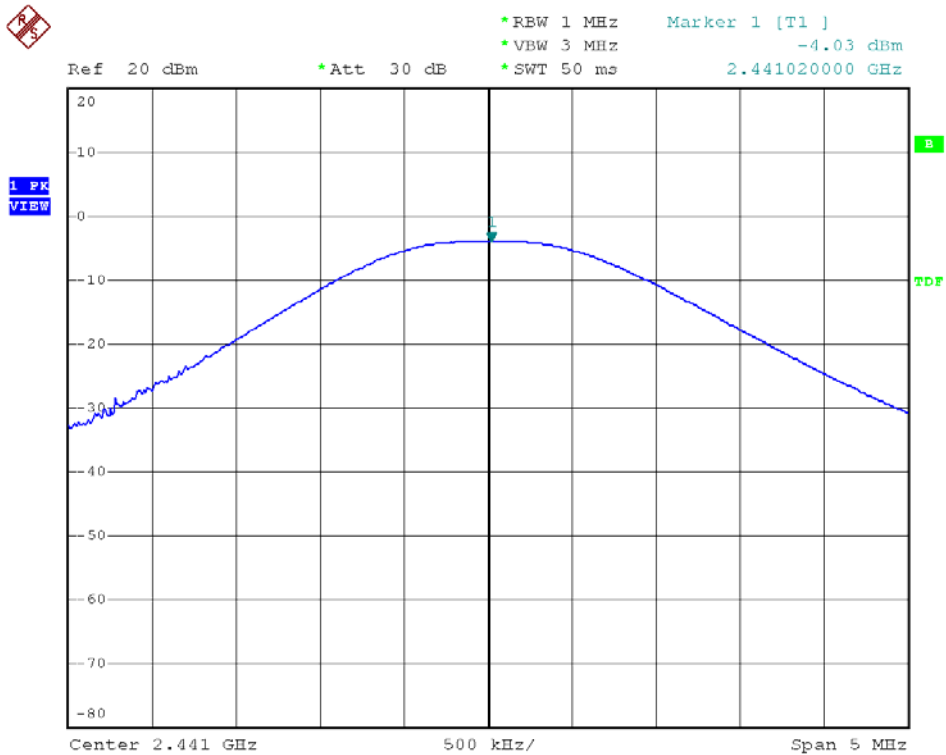




Modulation Standard: 8DPSK (3Mbps)
Channel: 78



Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -5.36 dBm
*VW 3 MHz 2.480065000 GHz
*SWT 50 ms

1 PK
VIEW

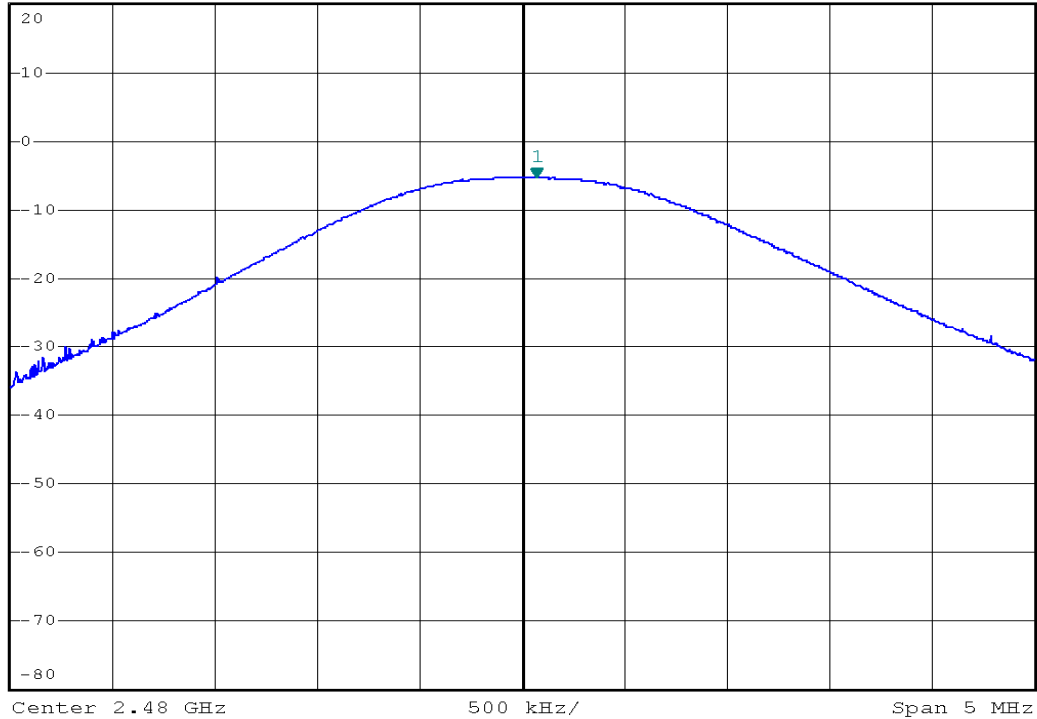



11. Band Edges Measurement


11.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

11.2 Test Procedure :

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

11.3 Test Setup Layout



11.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2010/05/08	2011/05/07



11.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2395.68	-51.47
78	2480	2486.32	-51.88

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Nov. 19, 2010

Temperature: 26

Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2395.60	-51.36
78	2480	2486.48	-50.82

Modulation Standard: 8DPSK (3Mbps)

Test Date: Nov. 19, 2010

Temperature: 26



Atmospheric pressure: 1007 hPa

Humidity: 60%

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2395.76	-53.17
78	2480	2486.40	-52.87





Modulation Standard: GFSK (1Mbps)
Channel: 00

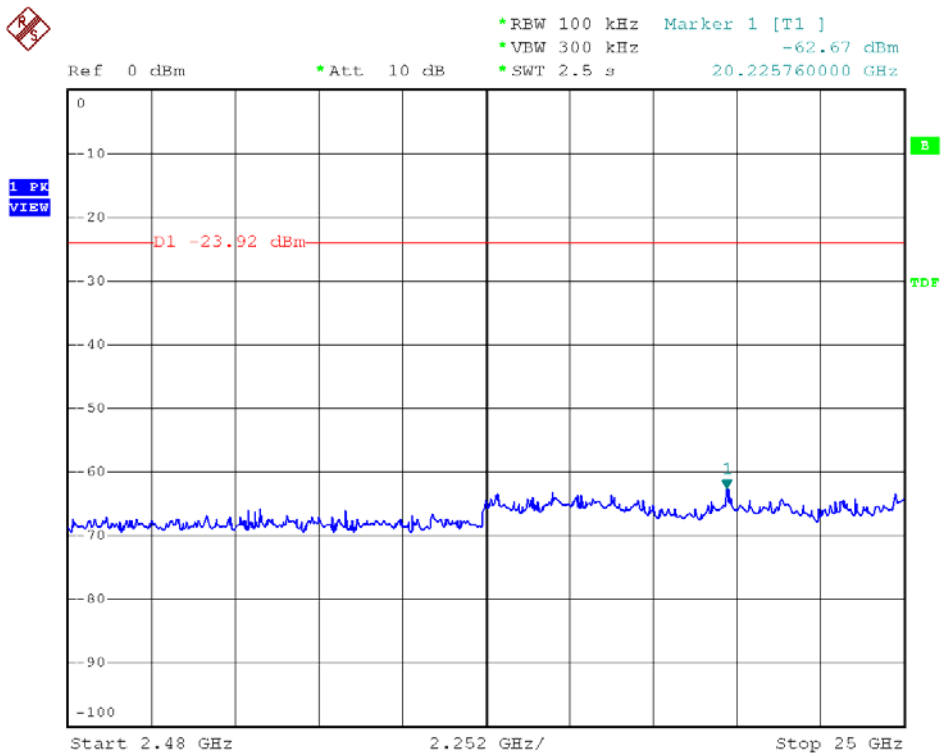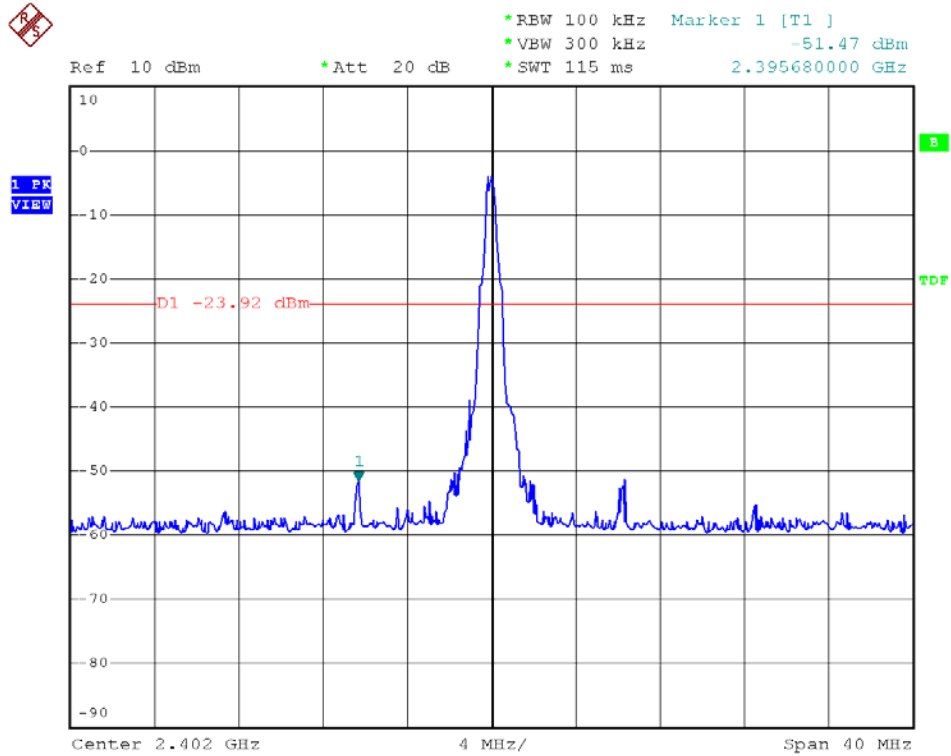





Modulation Standard: GFSK (1Mbps)
Channel: 78

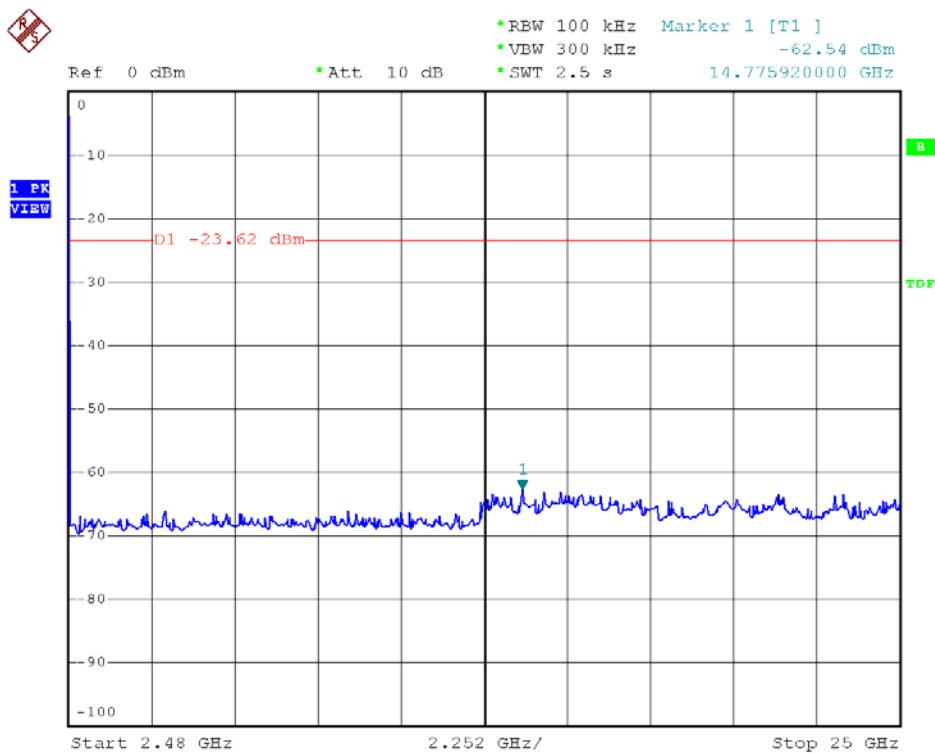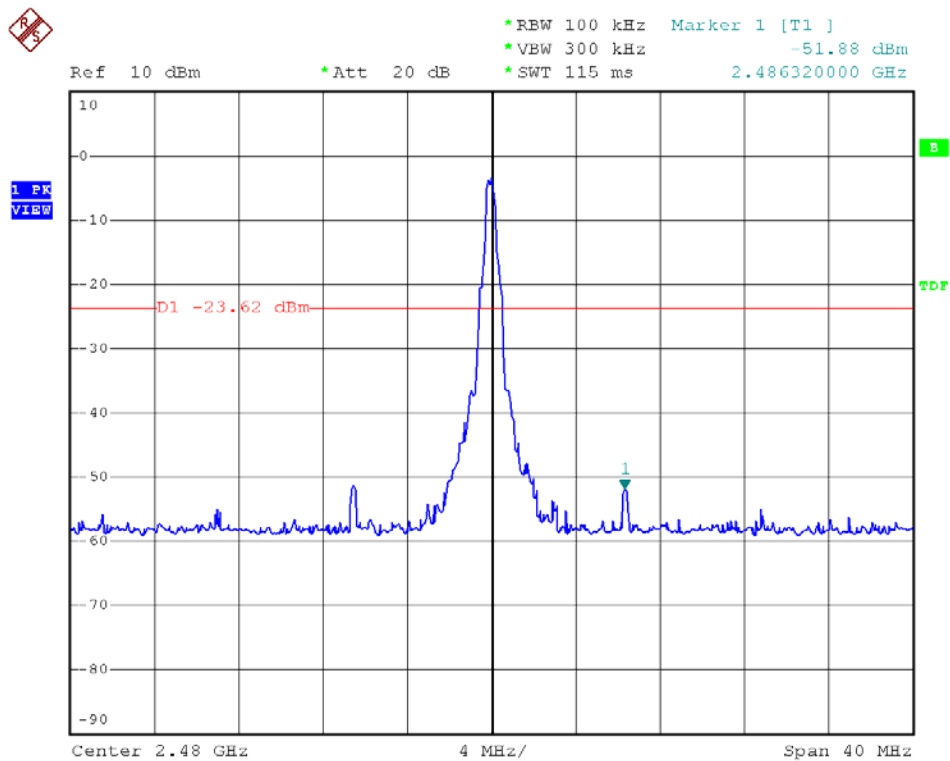





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

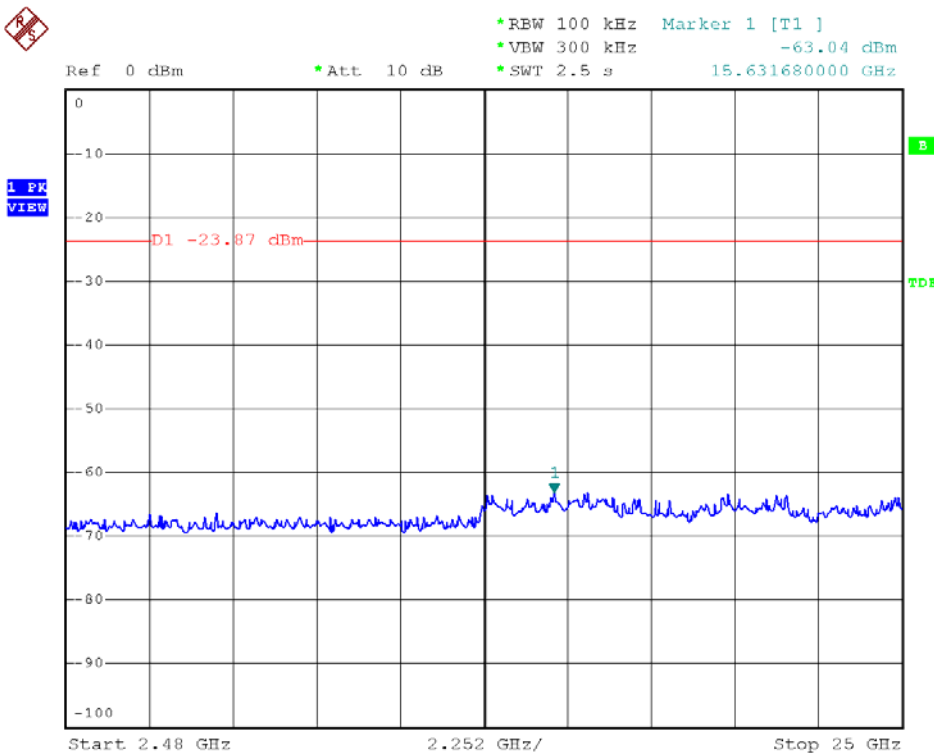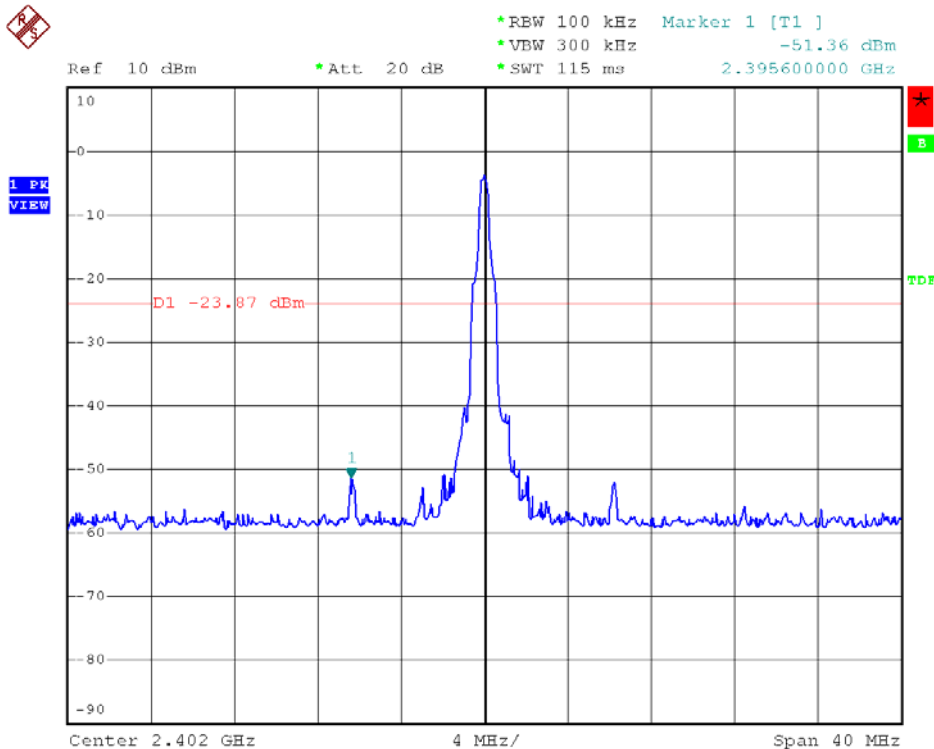





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

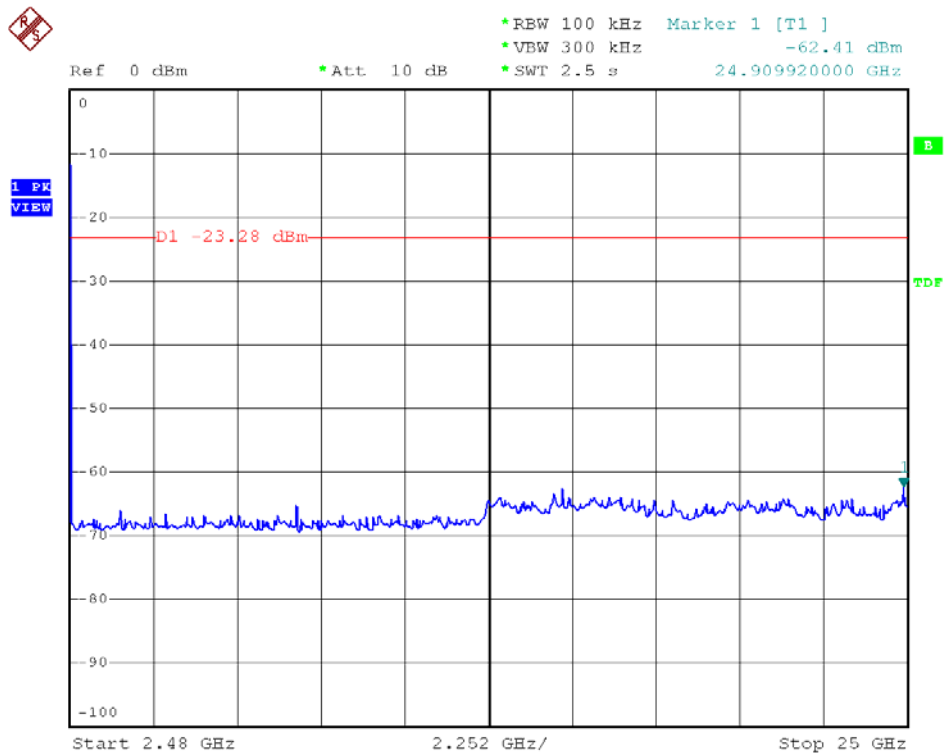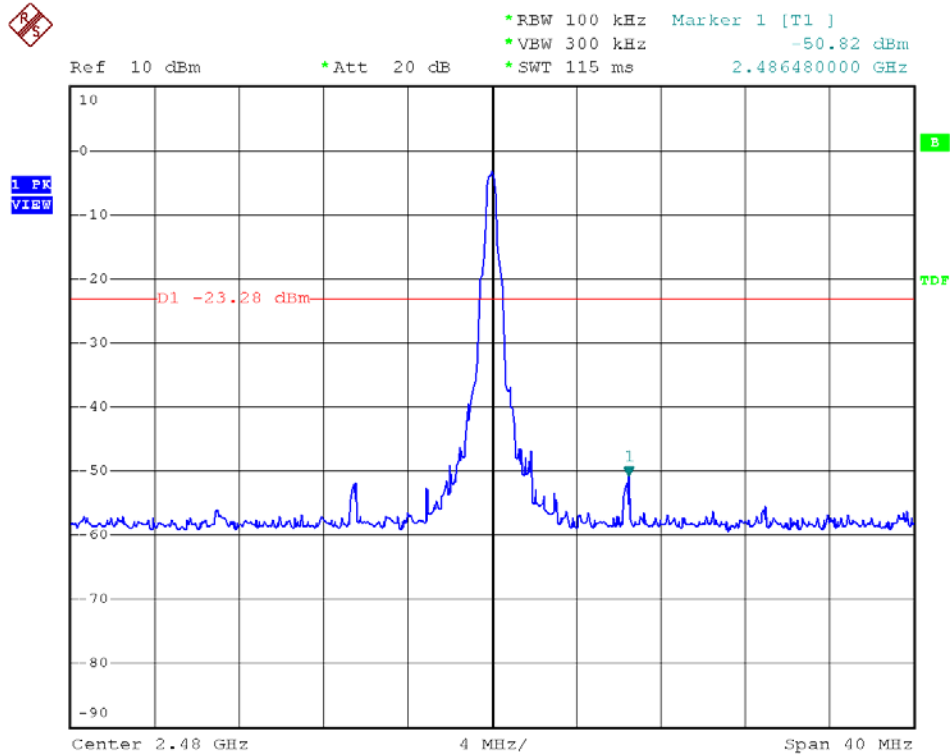





Modulation Standard: 8DPSK (3Mbps)
Channel: 00

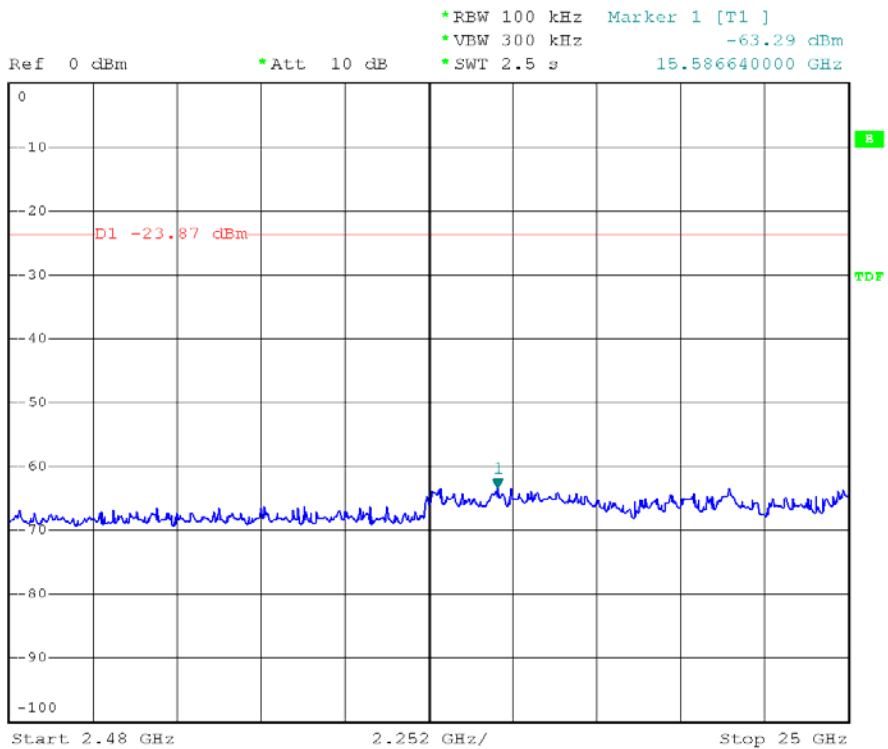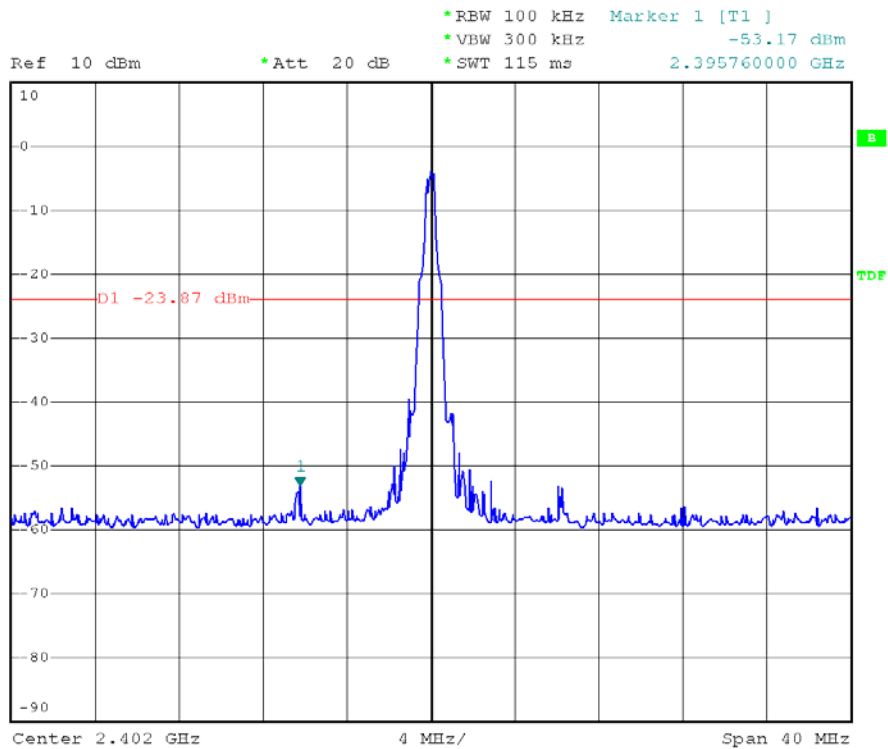



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

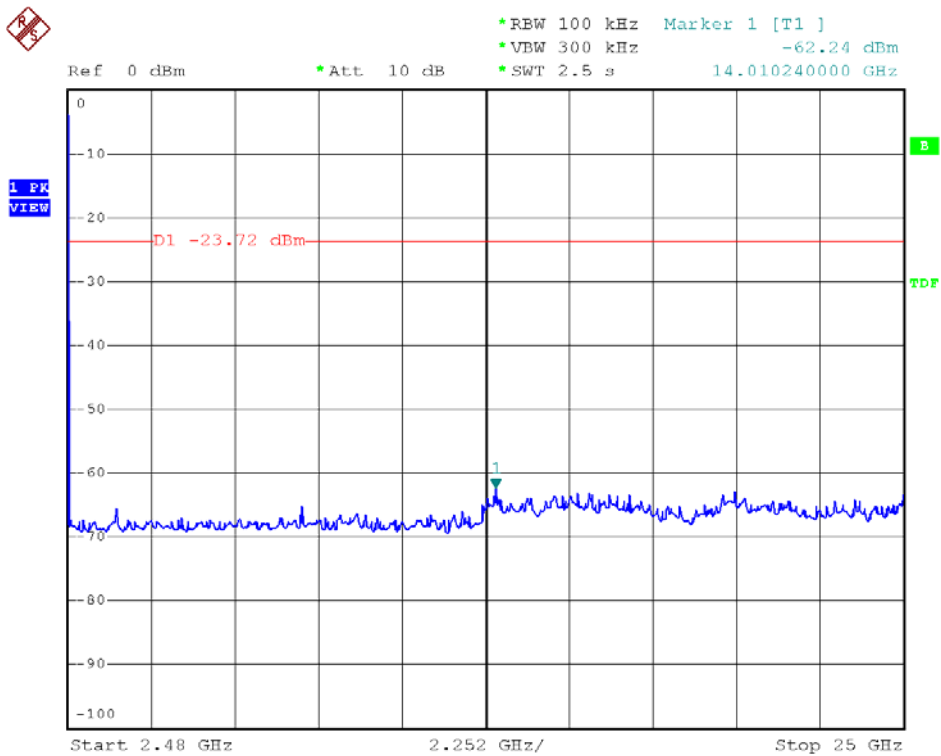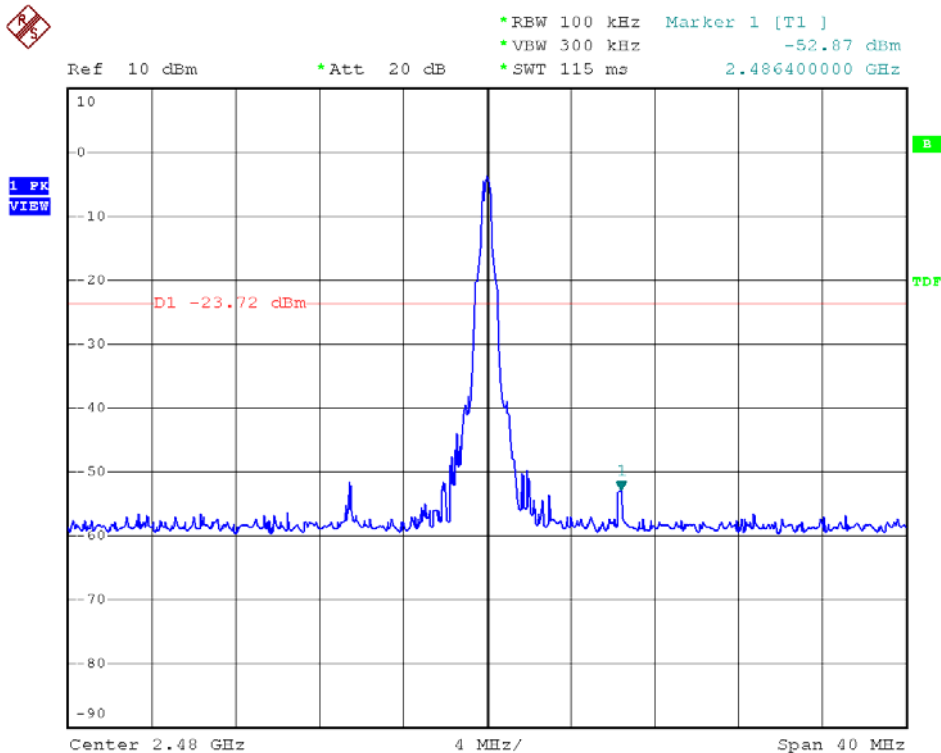

**11.6 Restrict band emission Measurement Data**

Test Date : Nov. 19, 2010
 Temperature : 26
 Humidity : 60%
 Atmospheric Pressure : 1007 hPa
 Modulation Standard : GFSK (1Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2385.89	H	53.30	-4.93	48.37	Peak	74	54	-25.63	176	1.0
2385.89	H	40.57	-4.93	35.64	Ave	74	54	-18.36	176	1.0
2385.89	V	51.61	-4.93	46.68	Peak	74	54	-27.32	206	1.5
2385.89	V	39.87	-4.93	34.94	Ave	74	54	-19.06	206	1.5
Channel 78						Fundamental Frequency: 2480 MHz				
2483.51	H	55.90	-4.59	51.31	Peak	74	54	-22.69	170	1.21
2483.51	H	40.63	-4.59	36.04	Ave	74	54	-17.96	170	1.21
2483.51	V	53.23	-4.59	48.64	Peak	74	54	-25.36	176	1.5
2483.51	V	39.65	-4.59	35.06	Ave	74	54	-18.94	176	1.5

Test Date : Nov. 19, 2010
 Temperature : 26
 Humidity : 60%
 Atmospheric Pressure : 1007 hPa
 Modulation Standard : $\pi/4$ -DQPSK (2Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2385.89	H	52.57	-4.93	47.64	Peak	74	54	-26.36	176	1.0
2385.89	H	45.70	-4.93	40.77	Ave	74	54	-13.23	176	1.0
2385.89	V	51.04	-4.93	46.11	Peak	74	54	-27.89	208	1.5
2385.89	V	43.29	-4.93	38.36	Ave	74	54	-15.64	208	1.5
Channel 78						Fundamental Frequency: 2480 MHz				
2483.51	H	55.05	-4.59	50.46	Peak	74	54	-23.54	170	1.21
2483.93	H	46.08	-4.58	41.50	Ave	74	54	-12.50	170	1.21
2483.93	V	52.64	-4.58	48.06	Peak	74	54	-25.94	176	1.5
2483.93	V	43.30	-4.58	38.72	Ave	74	54	-15.28	176	1.5



Test Date : Nov. 19, 2010
 Temperature : 26
 Humidity : 60%
 Atmospheric Pressure : 1007 hPa
 Modulation Standard : 8DPSK (3Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2385.89	H	52.31	-4.93	47.38	Peak	74	54	-26.62	176	1.0
2385.89	H	45.64	-4.93	40.71	Ave	74	54	-13.29	176	1.0
2385.89	V	51.92	-4.93	46.99	Peak	74	54	-27.01	207	1.5
2485.89	V	43.79	-4.93	38.86	Ave	74	54	-15.14	207	1.5
Channel 78						Fundamental Frequency: 2480 MHz				
2483.81	H	55.89	-4.58	51.31	Peak	74	54	-22.69	170	1.21
2483.93	H	48.30	-4.58	43.72	Ave	74	54	-19.28	170	1.21
2484.00	V	53.84	-4.58	49.26	Peak	74	54	-24.74	176	1.5
2483.93	V	45.73	-4.58	41.15	Ave	74	54	-12.85	176	1.5

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.