

**DATE: 02 December 2010**

**I.T.L. (PRODUCT TESTING) LTD.**

**FCC Radio Test Report**

for


**Risco Ltd.**


**Equipment under test:**

**Wireless Two Way Beam Detector**

**RWX7405**

Written by:   
D. Shidlow, Documentation

Approved by:   
A. Sharabi, Test Engineer

Approved by:   
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

## Measurement/Technical Report for Risco Ltd.

### Wireless Two Way Beam Detector

RWX7405

**FCC ID: JE4RWX74**

This report concerns:                   Original Grant:            x  
  Class I change:  
  Class II change:

Equipment type:                        Part 15 Security/Remote Control Transceiver

47CFR15 Section 15231 (a-d)

Measurement procedure used is ANSI C63.4-2003.

Application for Certification  
prepared by:  
    Ishaishou Raz  
    ITL (Product Testing) Ltd.  
    Kfar Bin Nun  
    D.N. Shimshon 99780  
    Israel  
    e-mail Sraz@itl.co.il

Applicant for this device:  
(different from "prepared by")  
    Nimrod Herman  
    Risco Ltd.  
    14 Hachoma St.,  
    Rishon Le' Tzion 75655  
    Israel  
    Tel:   +972-3-963-7777  
    Fax:  +972-3-961-6584  
    e-mail: NimrodH@riscogroup.com

# TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION-----</b>	<b>4</b>
1.1	Administrative Information.....	4
1.2	List of Accreditations .....	5
1.3	Product Description .....	6
1.4	Test Methodology .....	6
1.5	Test Facility .....	6
1.6	Measurement Uncertainty .....	6
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION-----</b>	<b>7</b>
2.1	Justification.....	7
2.2	EUT Exercise Software .....	7
2.3	Special Accessories .....	7
2.4	Equipment Modifications .....	7
2.5	Configuration of Tested System.....	7
<b>3.</b>	<b>TEST SET-UP PHOTO-----</b>	<b>8</b>
<b>4.</b>	<b>AVERAGE FACTOR CALCULATION-----</b>	<b>9</b>
4.1	Test Instrumentation Used .....	10
<b>5.</b>	<b>PERIODIC OPERATION -----</b>	<b>11</b>
5.1	Specification .....	11
5.2	Requirements .....	11
5.3	Results.....	11
<b>6.</b>	<b>FIELD STRENGTH OF FUNDAMENTAL -----</b>	<b>14</b>
6.1	Test Specification .....	14
6.2	Test Procedure.....	14
6.3	Measured Data.....	14
6.4	Test Instrumentation Used, Field Strength of Fundamental .....	18
<b>7.</b>	<b>RADIATED EMISSION, 9 KHZ – 30 MHZ -----</b>	<b>19</b>
7.1	Test Specification .....	19
7.2	Test Procedure.....	19
7.3	Measured Data.....	19
7.4	Test Instrumentation Used, Radiated Measurements .....	20
7.5	Field Strength Calculation .....	20
<b>8.</b>	<b>SPURIOUS RADIATED EMISSION -----</b>	<b>21</b>
8.1	Test Specification .....	21
8.2	Test Procedure.....	21
8.3	Test Data .....	22
8.4	Test Instrumentation Used, Radiated Measurements .....	24
<b>9.</b>	<b>BANDWIDTH-----</b>	<b>25</b>
9.1	Test procedure .....	25
9.2	Results table.....	26
9.3	Test Equipment Used.....	27
<b>10.</b>	<b>11. APPENDIX A - CORRECTION FACTORS -----</b>	<b>28</b>
10.1	Correction factors for CABLE .....	28
10.2	Correction factors for CABLE .....	29
10.3	Correction factors for CABLE .....	30
10.4	Correction factors for LOG PERIODIC ANTENNA .....	31
10.5	Correction factors for LOG PERIODIC ANTENNA .....	32
10.6	Correction factors for BICONICAL ANTENNA.....	33
10.7	Correction factors for ACTIVE LOOP ANTENNA .....	34

# 1. General Information

## 1.1 Administrative Information

Manufacturer:	Risco Ltd.
Manufacturer's Address:	14 Hachoma St. Rishon Le T'zion 75655 Israel Tel: +972-3-963-7777 Fax: +972-3-961-6584
Manufacturer's Representative:	Nimrod Herman
Equipment Under Test (E.U.T):	Wireless Two Way Beam Detector
Equipment Model No.:	RWX7405
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	19/10/10
Start of Test:	19/10/10
End of Test:	24/10/10
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Subpart C

## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

### **1.3 Product Description**

The RWX7405 is a 2-way 433.92 MHz wireless active IR beam detector.

The detector is made of two parts:

IR transmitter and IR receiver.

Each part is composed of a master PCB and a number of slaves (1 slave was in each part of the tested units) inside a metal tube with a plastic cover.

All masters and slaves are small PCBs each powered by one CR123A lithium battery.

The RF transmitter is located in IR receiver master unit

RWX7405 uses 2-way RF communication.

### **1.4 Test Methodology**

Radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 06, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

### **1.6 Measurement Uncertainty**

Radiated Emission

The Open Site complies with the  $\pm 4$  dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

## 2. System Test Configuration

### 2.1 Justification

The E.U.T. was placed on a table in typical installation position, operating in continuous transmission.

### 2.2 EUT Exercise Software

"Configuration Software" written by RISCO and is used to control and configure the operation of the panel (which used for communicating with the detector).

### 2.3 Special Accessories

No special accessories were needed.

### 2.4 Equipment Modifications

No modifications were needed in order to achieve compliance

### 2.5 Configuration of Tested System

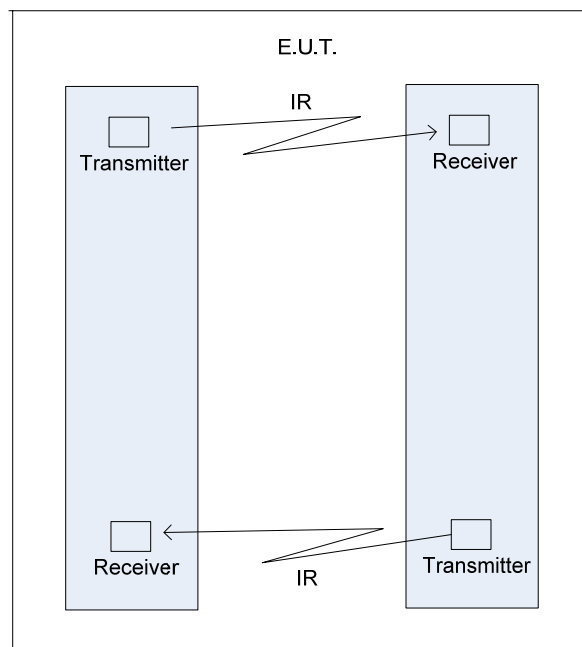


Figure 1. Configuration of Tested System

### 3. Test Set-up Photo



**Figure 2. Radiated Emission Test**



## 4. Average Factor Calculation

1. Burst duration = 60 msec
2. Time between bursts = >100msec
3. Average Factor =  $20 \log \left[ \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log \left[ \frac{1}{2} \times \frac{60}{100} \times 1 \right] = -10.45 \text{ dB}$$

NOTE – [Pulse duration /Pulse period] considered ½ as worst case since unit operates with random ON/OFF keying modulation

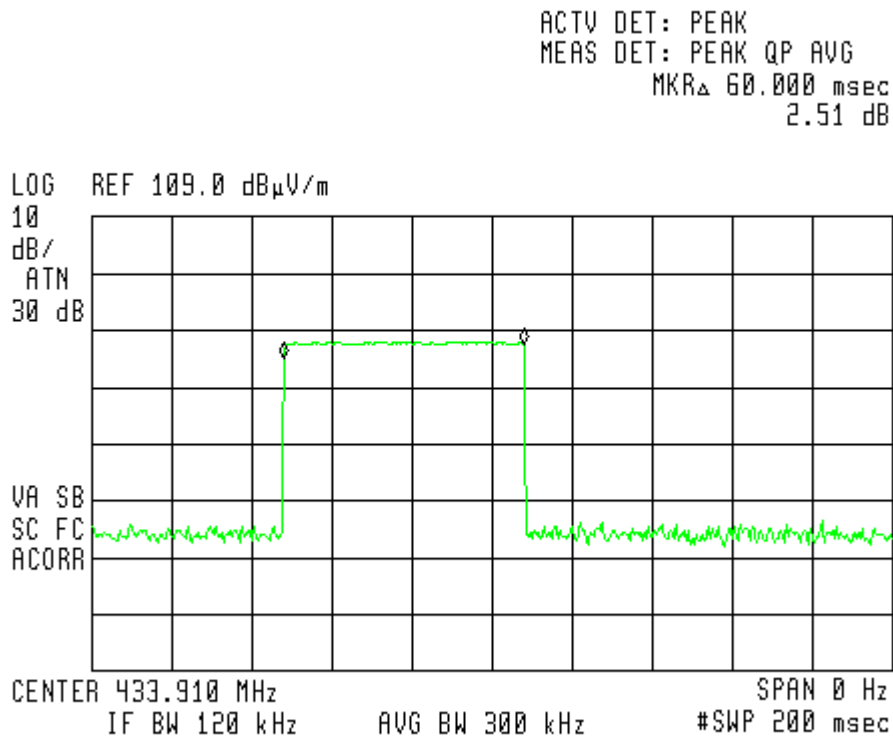


Figure 3. Burst duration within 200msec

#### 4.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3906A00276	November 10, 2009	1 Year
Antenna Bioconical	ARA	BCD 235/B	3705A00248	November 10, 2009	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1041	August 1, 2010	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

## 5. Periodic Operation

### 5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

### 5.2 Requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	N/A	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	See Figure 4.	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See Figure 5.	Complies

### 5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature: 


Date: 02.12.10

Typed/Printed Name: A. Sharabi

# Periodic Operation

E.U.T Description    Wireless Two Way Beam Detector  
 Type                    RWX7405  
 Serial Number:        Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

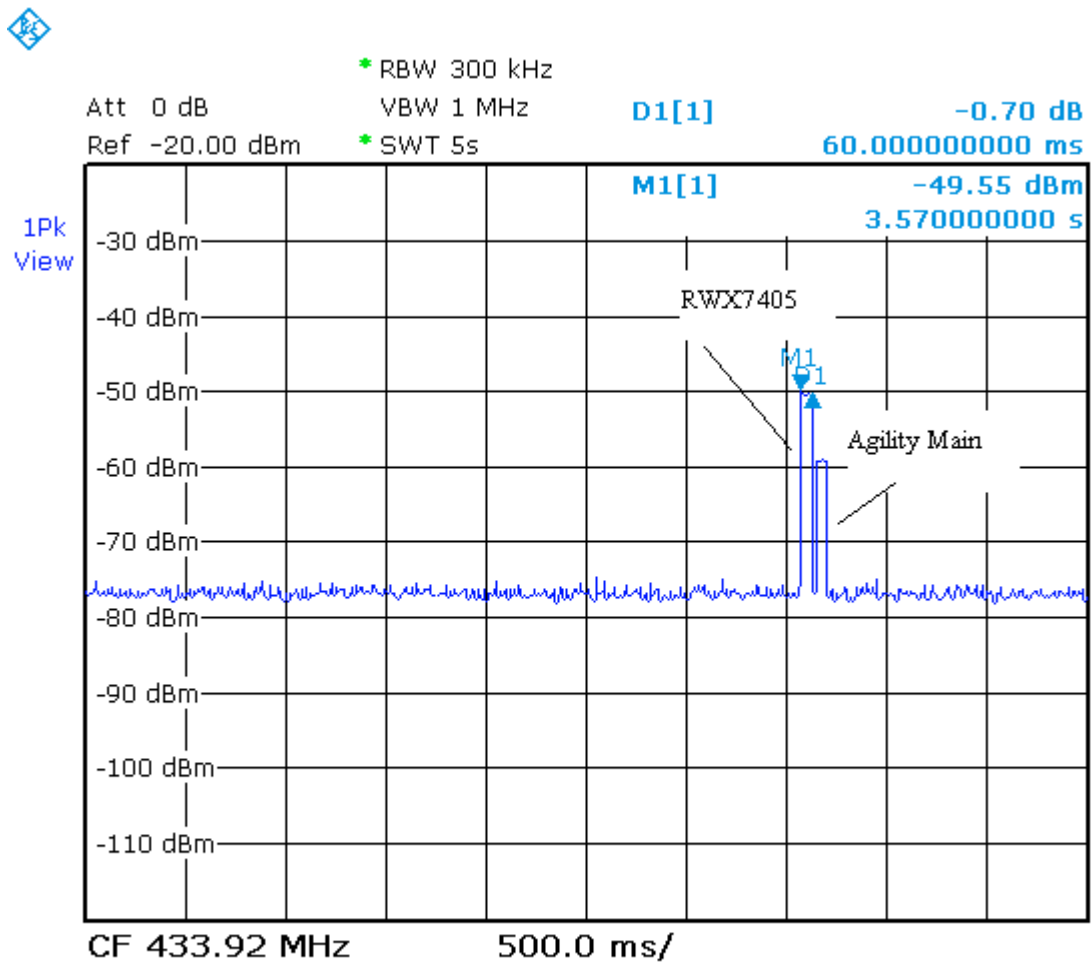


Date: 19.OCT.2010 14:44:36

**Figure 4. Automatic transmission within 5 seconds**

# Periodic Operation

E.U.T Description    Wireless Two Way Beam Detector  
 Type                    RWX7405  
 Serial Number:        Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

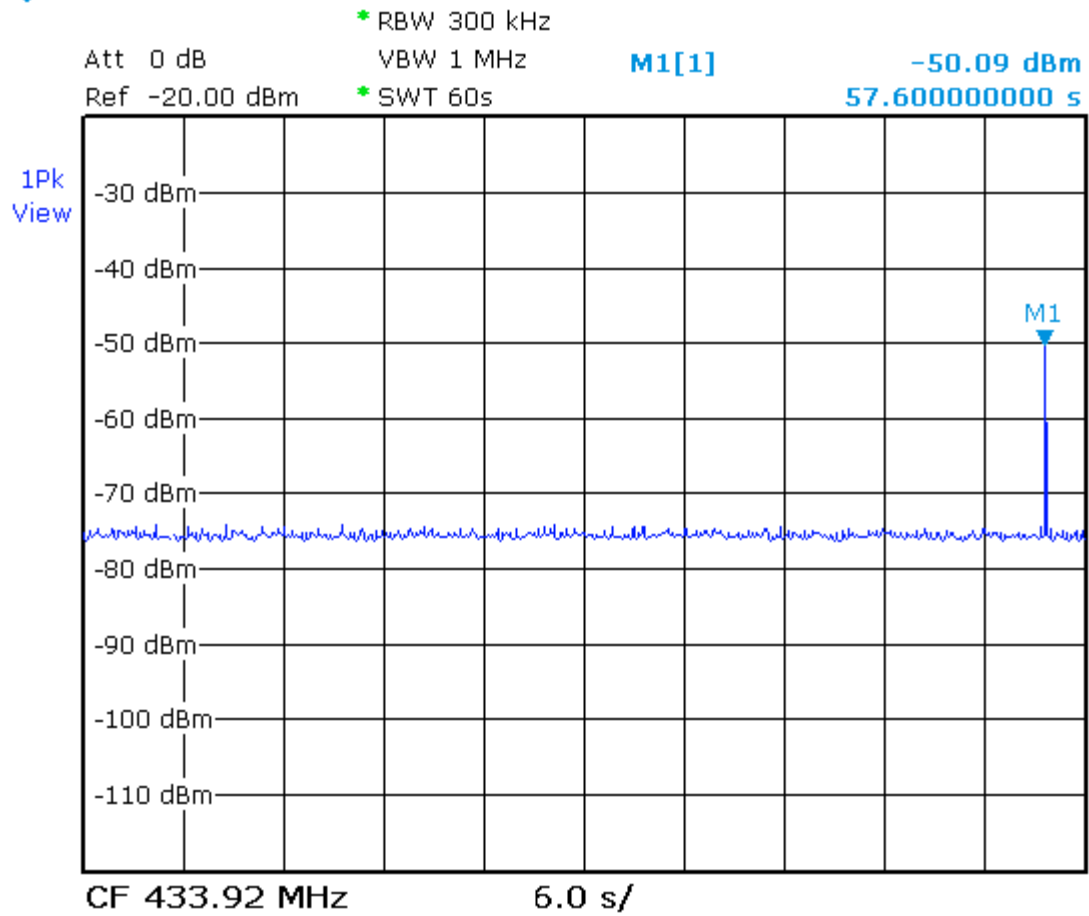

Date: 19.OCT.2010 15:44:51

**Figure 5. System Integrity**  
 (In one hour 60msecX4 (once every 15min) <2000msec)

## 6. Field Strength of Fundamental

### 6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

### 6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (433.92MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB $\mu$ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

### 6.3 Measured Data

JUDGEMENT: Passed by 0.66 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure to Figure .

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_ Date: 02.12.10

Typed/Printed Name: A. Sharabi

## Field Strength of Fundamental

E.U.T Description    Wireless Two Way Beam Detector  
 Type                      RWX7405  
 Serial Number:        Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical  
 Test Distance: 3 meters                      Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dBμV/m)	Average Factor (dB)	AVG Result (dBμV/m)	AVG Specification (dBμV/m)	Margin (dB)
433.92	V	90.62	-10.45	80.17	80.83	-0.66
433.92	H	69.69	-10.45	59.24	80.83	-21.59

**Figure 6. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL.  
 Detector: Peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading.” (dBμV/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Result” (dBμV/m)=Peak Reading (dBμV/m)+ Average Factor (dB)

# Field Strength of Fundamental

E.U.T Description    Wireless Two Way Beam Detector  
 Type                    RWX7405  
 Serial Number:        Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Horizontal

Test Distance: 3 meters

Detector: Peak



ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 433.913 MHz  
 69.69 dB $\mu$ V/m

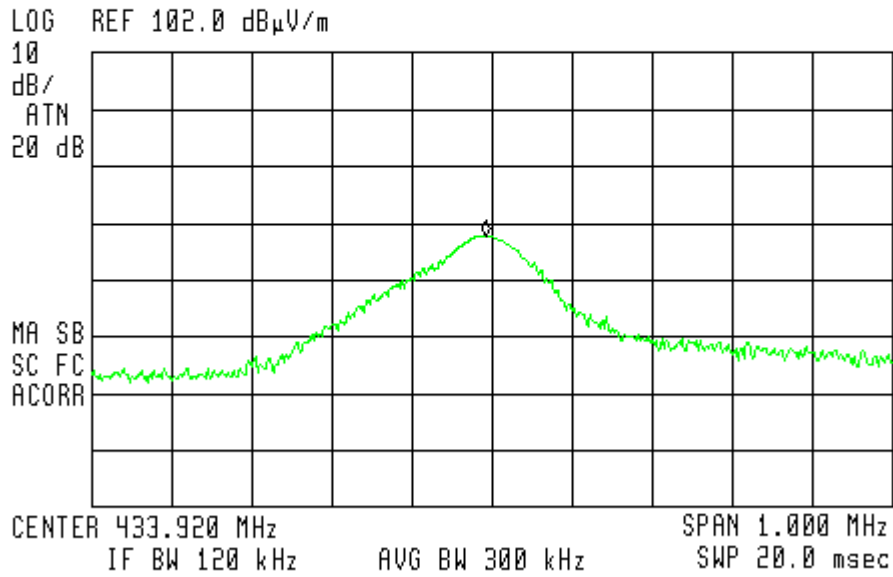

**Figure 7. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.  
 Detectors: Peak**



# Field Strength of Fundamental

E.U.T Description    Wireless Two Way Beam Detector  
 Type                    RWX7405  
 Serial Number:        Not Designated


Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters    Detector: Peak



ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 433.900 MHz  
 90.62 dB $\mu$ V/m

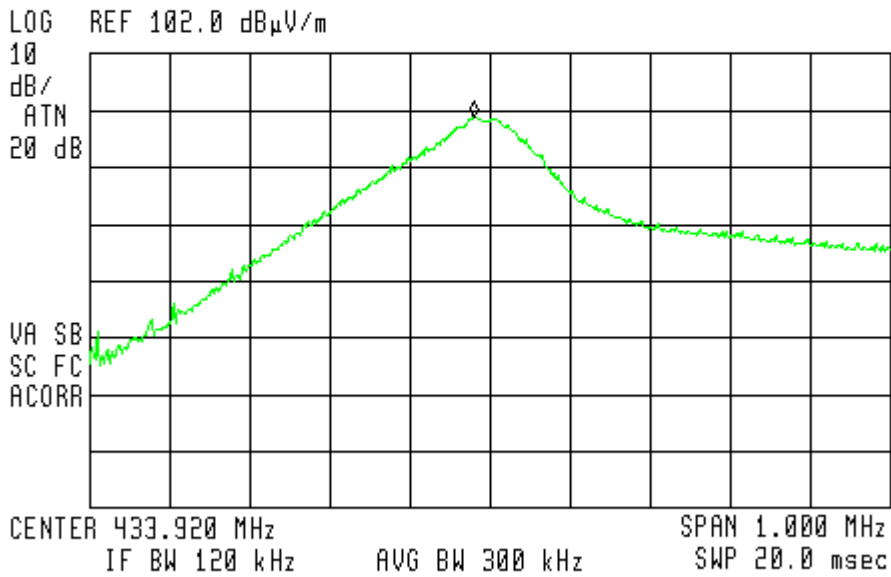

**Figure 8. Field Strength of Fundamental. Antenna Polarization: VERTICAL. Detector: Peak**

#### 6.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

## 7. Radiated Emission, 9 kHz – 30 MHz

### 7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

### 7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.

The E.U.T. was operated at the frequency of 433.92 kHz. This frequency was measured using a peak detector.

### 7.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

**No emission**

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_

Date: 02.12.10

Typed/Printed Name: A. Sharabi

#### 7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

#### 7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

- FS: Field Strength [dB $\mu$ v/m]
- RA: Receiver Amplitude [dB $\mu$ v]
- AF: Receiving Antenna Correction Factor [dB/m]
- CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

## 8. Spurious Radiated Emission

### 8.1 Test Specification

30 - 4340 MHz, F.C.C., Part 15, Subpart C

### 8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 4.34 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


### 8.3 Test Data

JUDGEMENT: Passed by 19.7 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 19.71 dB in the worst case at the frequency of 867.84 MHz, vertical polarization.

TEST PERSONNEL:

Tester Signature:  Date: 02.12.10

Typed/Printed Name: A. Sharabi

## Radiated Emission

E.U.T Description    Wireless Two Way Beam  
 Detector  
 Type                    RWX7405  
 Serial Number:        Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical      Frequency range: 30 MHz to 4340 MHz  
 Antenna: 3 meters distance                      Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Reading (dBμV/m)	Average Factor	Average Result (dBμV/m)	Antenna Polarity (H/V)	Specification (dBμV/m)	Margin (dB)
867.84	51.57	-10.45	41.12	V	60.83	-19.71
1301.77	46.98	-10.45	36.53	V	60.83	-24.30
1735.56	51.35	-10.45	40.9	V	60.83	-19.93
2169.96	53.95	-10.45	23.5	V	60.83	-37.33

**Figure 9. Radiated Emission. Antenna Polarization: VERTICAL.  
 Detectors: Peak, Quasi-peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading.” (dBμV/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Result” (dBμV/m)=Peak Reading (dBμV/m)+ Average Factor (dB)

#### 8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	January 13, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A



## 9. Bandwidth

### 9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 120 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

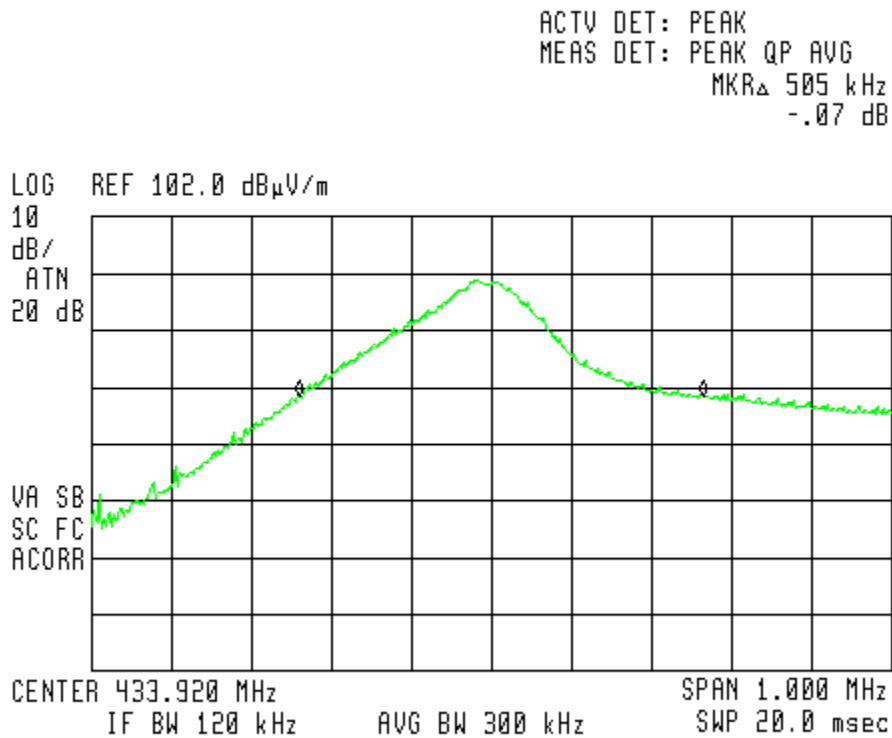


Figure 10 Center Frequency

## 9.2 Results table


E.U.T Description: Wireless Two Way Beam Detector  
Model: RWX7405  
Serial Number: Not Designated  
Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading	Specification (1) (kHz)	Margin (kHz)
505	1084	-579

**Figure 11 Bandwidth**

JUDGEMENT: Passed by 579 kHz

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_  Date: 02.12.10

Typed/Printed Name: A. Sharabi

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

### 9.3 Test Equipment Used.

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

**Figure 12 Test Equipment Used**

# 10. 11. APPENDIX A - CORRECTION FACTORS

**10.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

**NOTES:**

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

**10.2 Correction factors for CABLE**  
**from EMI receiver**  
**to test antenna**  
**at 3 meter range.**

<b>FREQUENCY</b> <b>(GHz)</b>	<b>CORRECTION</b> <b>FACTOR</b> <b>(dB)</b>
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

*NOTES:*

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

**10.3 Correction factors for CABLE**  
**from spectrum analyzer**  
**to test antenna above 2.9 GHz**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

**NOTES:**

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

**12.6 Correction factors for LOG PERIODIC ANTENNA**

**Type LPD 2010/A  
at 3 and 10 meter ranges.**

**Distance of 3 meters**

<b>FREQUENCY (MHz)</b>	<b>AFE (dB/m)</b>
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

**Distance of 10 meters**

<b>FREQUENCY (MHz)</b>	<b>AFE (dB/m)</b>
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

*NOTES:*

- 1. Antenna serial number is 1038.*
- 2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.*
- 3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".*

**10.4 Correction factors for**

**LOG PERIODIC ANTENNA**

**Type SAS-200/511  
at 3 meter range.**

<b>FREQUENCY</b> (GHz)	<b>ANTENNA FACTOR</b> (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

<b>FREQUENCY</b> (GHz)	<b>ANTENNA FACTOR</b> (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

**NOTES:**

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".



**10.5 Correction factors for BICONICAL ANTENNA  
Type BCD-235/B,  
at 3 meter range**

<b>FREQUENCY (MHz)</b>	<b>AFE (dB/m)</b>
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

**NOTES:**

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**10.6 Correction factors for ACTIVE LOOP ANTENNA**

**Model 6502  
S/N 9506-2950**

<b>FREQUENCY</b> (MHz)	<b>Magnetic Antenna Factor</b> (dB)	<b>Electric Antenna Factor</b> (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2