

**FCC Part 15.236 Test Report**

**for**

**Bodypack Transmitter**

**Model No.: UT-61 / UT-51**

**FCC ID: JEBUT-61**

of

Applicant: MASCOT ELECTRIC CO., LTD

Address: No.85, Changxing 1st St., Rende Dist., Tainan City 71741,  
Taiwan (R.O.C.)

Tested and Prepared

by

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: TW1477, TW1111, TW1072, TW1110**


**Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1**

**A2LA Accredited No.: 2732.01**



**Report No.: W6M21810-18537-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



## **TABLE OF CONTENTS**

<b>1</b>	<b>GENERAL INFORMATION.....</b>	<b>2</b>
1.1	NOTES.....	2
1.2	TESTING LABORATORY .....	3
1.2.1	Location .....	3
1.2.2	Details of accreditation status .....	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS .....	4
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS.....	4
<b>2</b>	<b>TECHNICAL TEST.....</b>	<b>5</b>
2.1	SUMMARY OF TEST RESULTS .....	5
2.2	TEST ENVIRONMENT .....	5
2.3	TEST EQUIPMENT LIST.....	6
2.4	GENERAL TEST PROCEDURE .....	9
<b>3</b>	<b>TEST RESULTS (ENCLOSURE) .....</b>	<b>10</b>
<b>4</b>	<b>RF POWER OUTPUT, FCC15.236 (D) .....</b>	<b>11</b>
4.1	TEST PROCEDURE.....	11
4.2	TEST RESULTS .....	12
<b>5</b>	<b>OCCUPIED BANDWIDTH, FCC15.236 (F) //EMISSION MASK, FCC15.236 (G)..</b>	<b>26</b>
5.1	TEST PROCEDURE .....	26
5.2	TEST RESULTS .....	26
<b>6</b>	<b>RADIATED SPURIOUS EMISSION , FCC 15.236(G).....</b>	<b>39</b>
6.1	TEST PROCEDURE.....	39
6.2	TEST RESULTS.....	39
<b>7</b>	<b>FREQUENCY STABILITY, FCC 15.236(F)(3) .....</b>	<b>40</b>
7.1	TEST PROCEDURE.....	40
7.2	TEST RESULTS.....	40
<b>8</b>	<b>LINE CONDUCTED EMISSION , FCC 15.207.....</b>	<b>44</b>
8.1	TEST PROCEDURE.....	44
8.2	TEST RESULTS .....	44



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

## 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services (Taiwan) Co., Ltd.

### **Tester:**

January 10, 2019	Rick Chen	<i>Rick Chen.</i>
------------------	-----------	-------------------

Date	WTS-Lab.	Name	Signature
------	----------	------	-----------

### **Technical responsibility for area of testing:**

January 10, 2019	Kevin Wang	<i>Kevin Wang</i>
------------------	------------	-------------------

Date	WTS	Name	Signature
------	-----	------	-----------



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS

No.5-1, Lishui, Shuang Sing Village,  
Wanli Dist., New Taipei City 207,  
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)  
TEL:886-2-6613-0228  
FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.  
Tel : 886-2-66068877  
Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

### **Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.  
Accredited number: ./.  
Street: ./.  
Town: ./.  
Country: ./.  
Telephone: ./.  
Fax: ./.

## **1.3 Details of approval holder**

Name: MASCOT ELECTRIC CO., LTD  
Street: No.85, Changxing 1st St., Rende Dist.,  
Town: Tainan City 71741,  
Country: Taiwan (R.O.C.)  
Telephone: 886-6-2710171  
Fax: 886-6-2710808



Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

## **1.4 Application details**

Date of receipt of test sample: November 19, 2018  
Date of test: from November 20, 2018 to January 09, 2019

## **1.5 General information of Test item**

Type of test item: Bodypack Transmitter  
Model Number: UT-61  
Brand Name: MASCOT  
Multi-listing model number: UT-51  
Photos: see Annex

### **Technical data**

Frequency band : 520-608 MHz, 614-617 MHz, 652-663 MHz  
Frequency 1: 520.125 MHz  
Frequency 2: 564.025 MHz  
Frequency 3: 607.875 MHz  
Frequency 4: 614.125 MHz  
Frequency 5: 615.875 MHz  
Frequency 6: 657.125 MHz  
Frequency 7: 662.9 MHz  
Antenna Type: Wire Antenna  
Antenna Gain: 2.08 dBi  
Power supply: Battery 1.5Vd.c.\*2  
Operation modes: Simplex

### **Manufacturer: (if applicable)**

Name: ./.  
Street: ./.  
Town: ./.  
Country: ./.

## **1.6 Test standards**

Technical standard: FCC RULES PART 15 SUBPART C § 15.236 (2017-10)



Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

**2 Technical test**

**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

**or**


The deviations as specified in 3 were ascertained in the course of the tests performed.

**2.2 Test environment**

Relative humidity content: 20 ... 75 %

Power supply: Battery 1.5Vd.c.\*2

Air pressure: 86-103 KPa




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

## 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2018/5/30	2019/5/29
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2018/11/1	2019/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2018/8/21	2019/8/20
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2018/7/13	2019/7/12
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2018/9/25	2019/9/24
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2018/7/16	2019/7/15
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2018/5/30	2019/5/29
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2018/5/21	2019/5/20
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2018/7/13	2019/7/12
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2018/7/12	2019/7/11
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2018/3/26	2019/3/25
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2018/1/23	2019/1/22
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2018/4/13	2019/4/12
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2018/4/26	2019/4/25
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2018/3/6	2019/3/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2018/3/1	2019/2/28
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2018/3/30	2019/3/29
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2018/9/17	2019/9/16
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2018/9/18	2019/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2018/4/16	2019/4/15
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2018/2/23	2019/2/22
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2018/1/15	2019/1/14
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61

ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2018/5/29	2019/5/28
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2018/8/8	2019/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2018/8/8	2019/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2018/2/27	2019/2/26
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2018/8/8	2019/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2018/8/8	2019/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2018/3/30	2019/3/29
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2018/3/23	2019/3/22
ETSTW-RE 151	Thermohyrometer	608-h1	45104376	TESTO	2018/8/17	2019/8/16
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2018/5/10	2019/5/9
ETSTW-EMS 008	Exposure Level Tester	ELT-400	G-0009	Narda	2018/7/17	2019/7/16
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2018/2/27	2019/2/26
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2018/3/2	2019/3/1
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2018/10/19	2019/10/18
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2018/1/11	2019/1/10
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2018/1/11	2019/1/10
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2018/1/11	2019/1/10
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2018/1/11	2019/1/10
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2018/9/12	2019/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2018/3/7	2019/3/6
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2018/8/9	2019/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2018/7/2	2019/7/1
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2018/2/27	2019/2/26
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2018/5/14	2019/5/13
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2018/9/18	2019/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2018/9/18	2019/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2018/2/27	2019/2/26
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325519	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2018/6/9	2019/6/8





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2018/8/30	2019/8/29
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM- NM-25000	170239	EMCI	2018/6/9	2019/6/8
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMG	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	



Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100 kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by at the registered open field test site located at The Registration Number: When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

## 3 Test results (enclosure)

Test case	Para. Number	Required	Test passed	Test failed
RF Power Output	§15.236(d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	§15.236(f)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Emission Mask	§15.236(g) ETSI EN 300 422-1 v1.4.2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emission	§15.236(g)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Line Conducted Emissions	15.207	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Frequency Stability vs. Temperature Frequency Stability vs. Voltage	§15.236(f)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.



Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

**4 RF Power Output, FCC15.236 (d)**

**4.1 Test procedure**

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as follows. In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

(1) Single sideband transmitters in the A3A or A3J emission modes - by two tones at frequencies of 400 Hz and 1800 Hz (for 3.0 kHz authorized bandwidth), or 500 Hz and 2100 Hz (3.5 kHz authorized bandwidth), or 500 Hz and 2400 Hz (for 4.0 kHz authorized bandwidth), applied simultaneously, the input levels of the tones so adjusted that the two principal frequency components of the radio frequency signal produced are equal in magnitude.

(2) Single sideband transmitters in the A3H emission mode - by one tone at a frequency of 1500 Hz (for 3.0 kHz authorized bandwidth), or 1700 Hz (for 3.5 kHz authorized bandwidth), or 1900 Hz (for 4.0 kHz authorized bandwidth), the level of which is adjusted to produce a radio frequency signal component equal in magnitude to the magnitude of the carrier in this mode.

(3) As an alternative to paragraphs (b) (1) and (2) of this section other tones besides those specified may be used as modulating frequencies, upon a sufficient showing of need. However, any tones so chosen must not be harmonically related, the third and fifth order intermodulation products which occur must fall within the -25 dB step of the emission bandwidth limitation curve, the seventh and ninth order intermodulation product must fall within the 35 dB step of the referenced curve and the eleventh and all higher order products must fall beyond the -35 dB step of the referenced curve.

(4) Independent sideband transmitters having two channels by 1700 Hz tones applied simultaneously in both channels, the input levels of the tones so adjusted that the two principal frequency components of the radio frequency signal produced are equal in magnitude.

(5) Independent sideband transmitters having more than two channels by an appropriate signal or signals applied to all channels simultaneously. The input signal or signals shall simulate the input signals specified by the manufacturer for normal operation.


(6) Single-channel controlled-carrier transmitters in the A3 emission mode - by a 2500 Hz tone.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.



Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61

## 4.2 Test Results

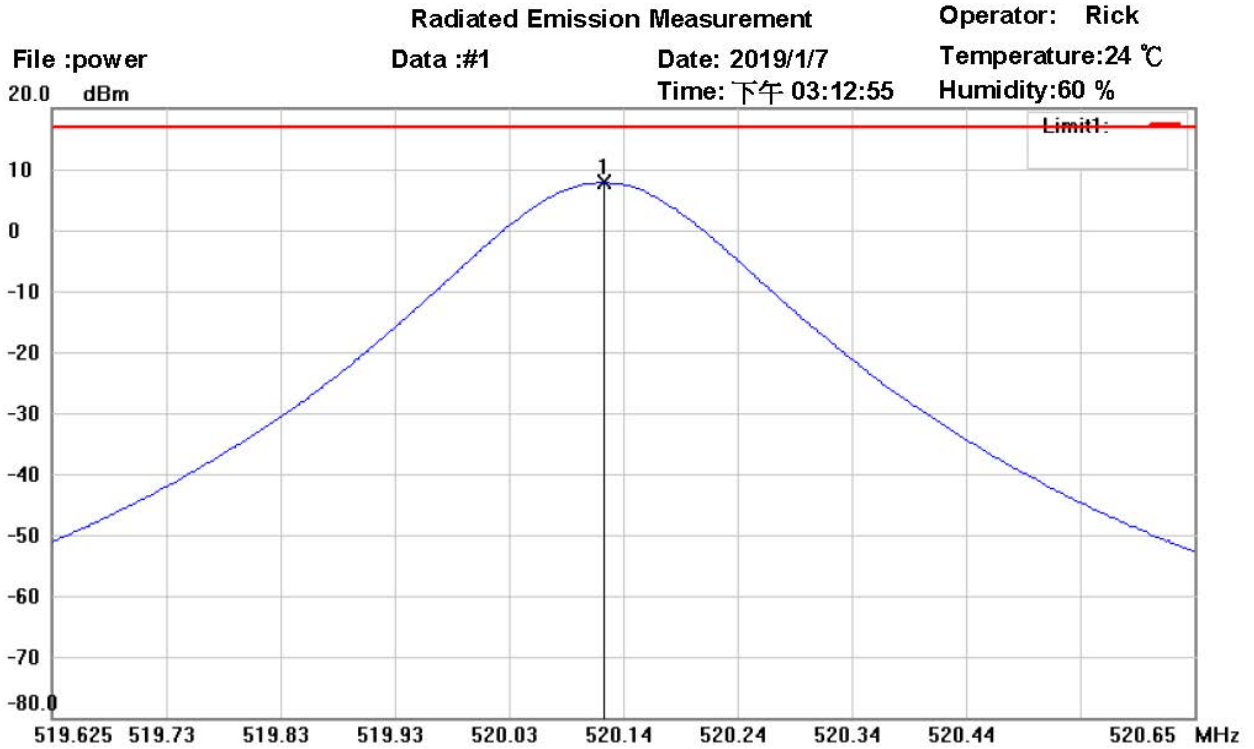

Site : Chamber  
 Condition : FCC 15.236 POWER      Polarization: *Horizontal*  
 EUT : W6M21810-18537      Power : 3Vd.c.  
 M/N:      Distance: 3m  
 Test Mode : TX 520.125MHz  
 Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	520.1200	-23.51	peak	31.28	7.77	17.00	150	210	-9.23	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


## Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File : power  
 20.0 dBm

Data : #2

Date: 2019/1/7  
 Time: 下午 03:08:07

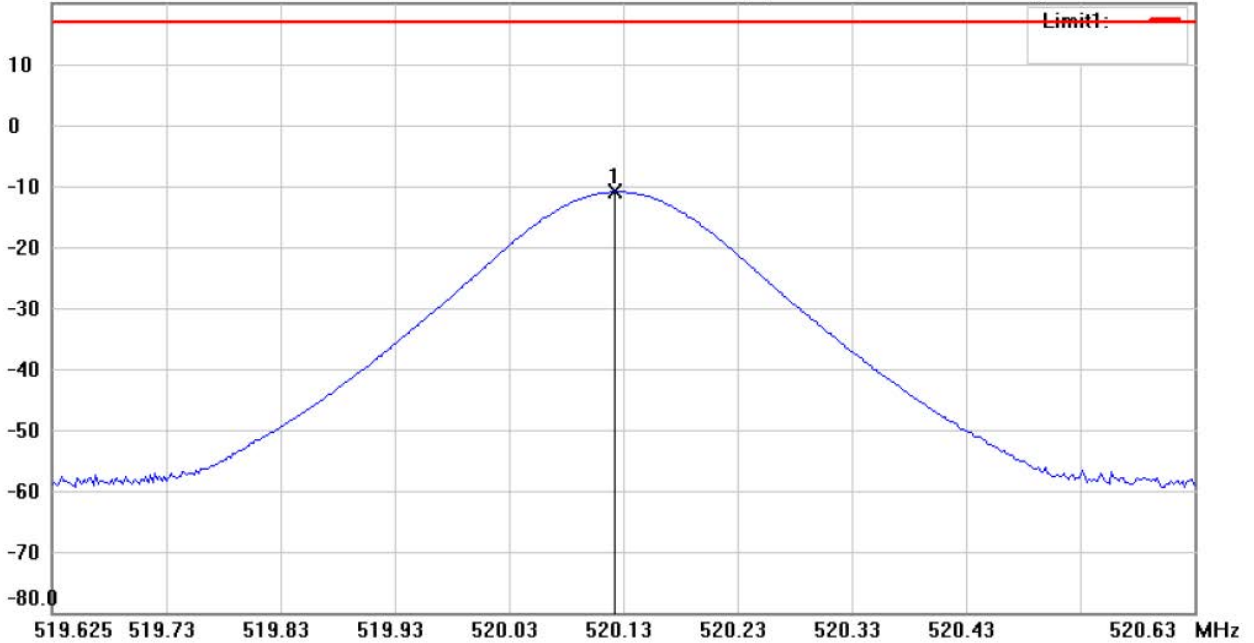

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 520.125MHz


Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	520.1180	-41.51	peak	30.56	-10.95	17.00	150	220	-27.95	



Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


**Radiated Emission Measurement**

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#1

Date: 2019/1/9  
 Time: 下午 03:33:59

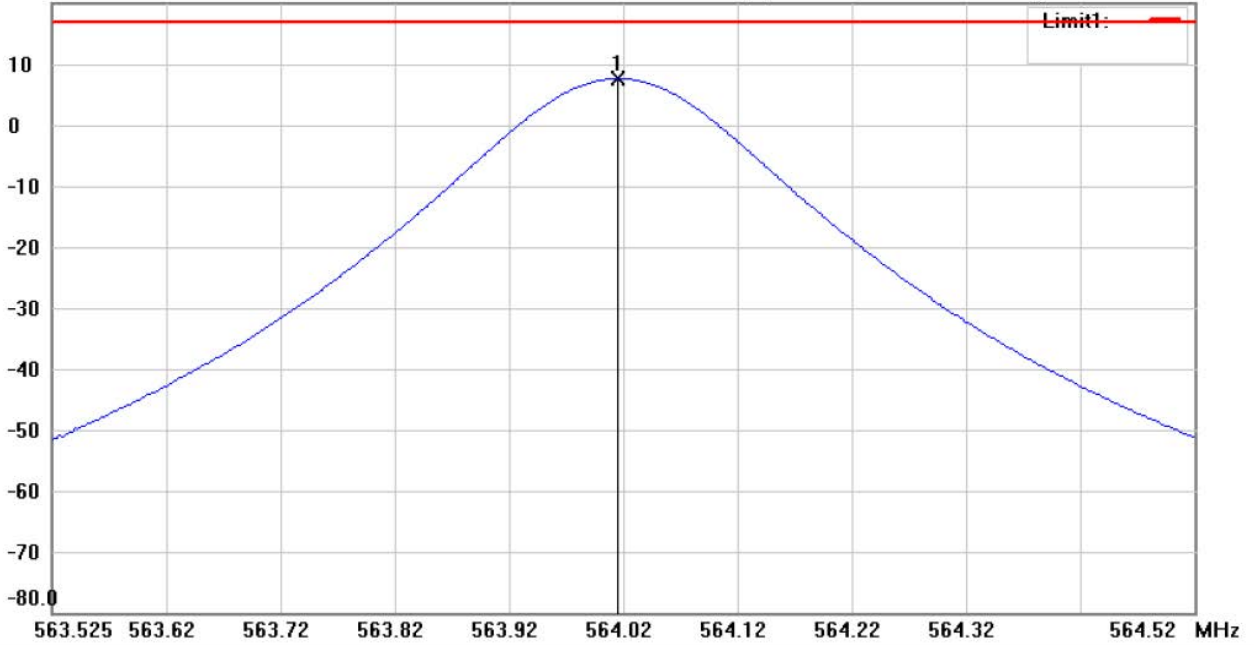

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 564.025MHz


Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	564.0200	-24.67	peak	32.26	7.59	17.00	150	300	-9.41	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


## Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File : POWER  
 20.0 dBm

Data : #2

Date: 2019/1/9  
 Time: 下午 03:35:41

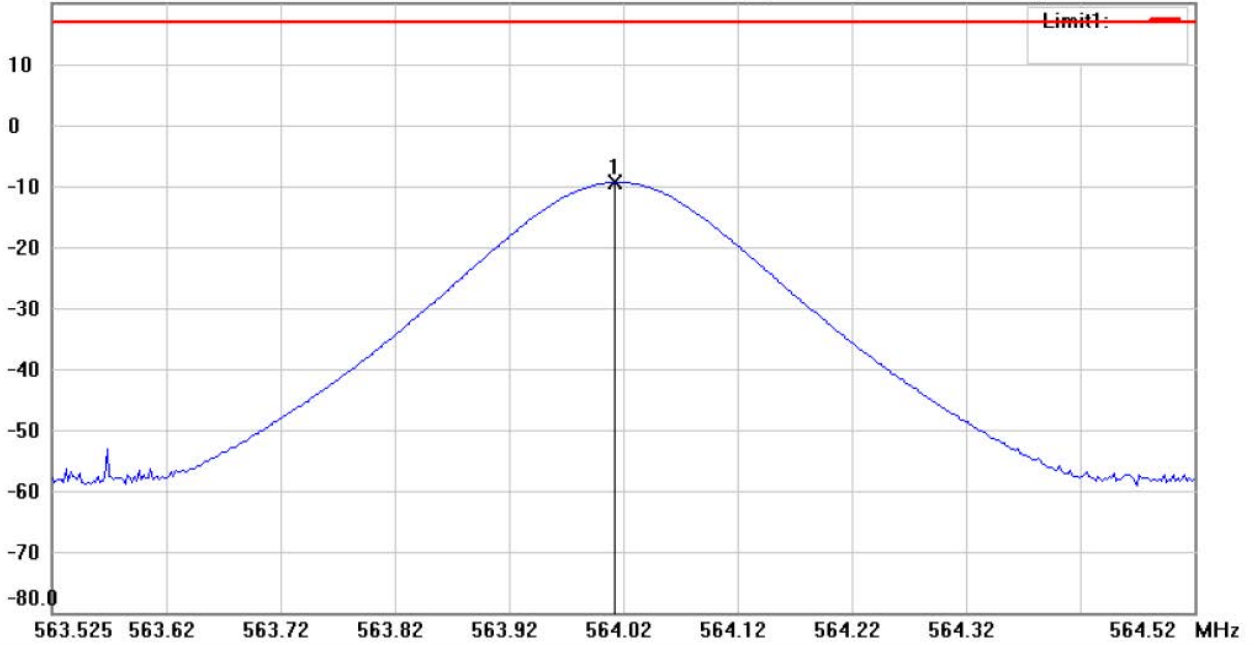

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 564.025MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	564.0180	-39.82	peak	30.42	-9.40	17.00	150	140	-26.40	





Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


**Radiated Emission Measurement**

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#1

Date: 2019/1/9  
 Time: 下午 03:47:42

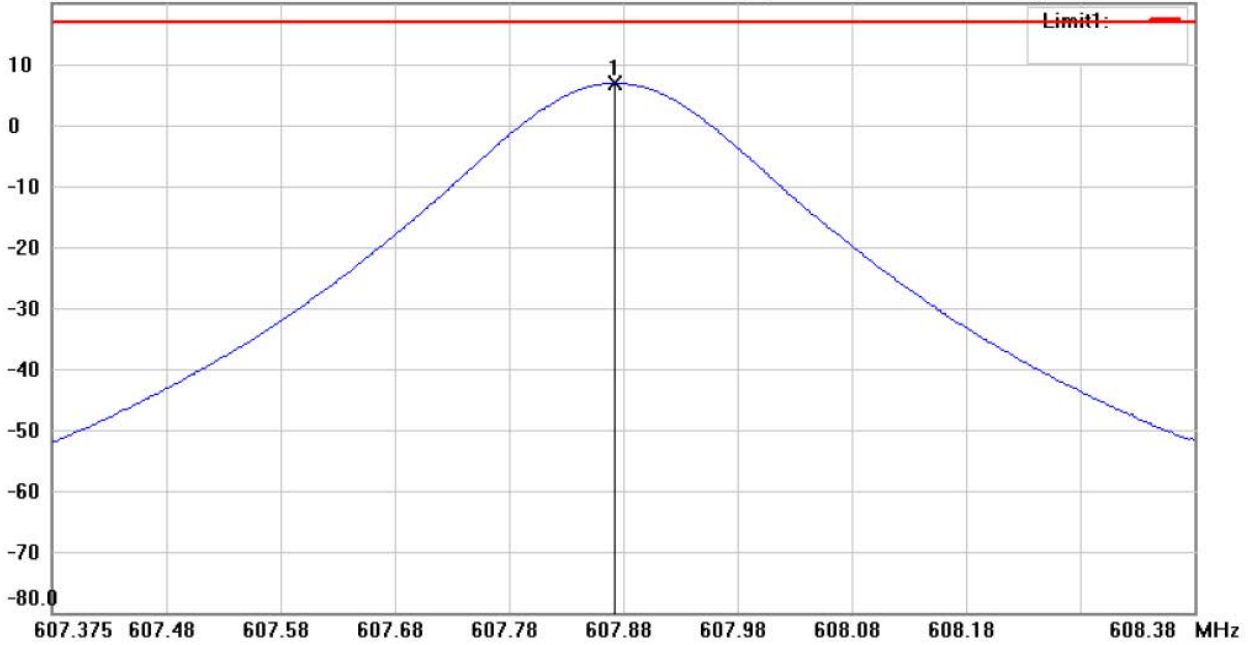

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 607.875MHz

Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	607.8680	-26.48	peak	33.34	6.86	17.00	150	200	-10.14	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


## Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#2

Date: 2019/1/9  
 Time: 下午 03:48:53

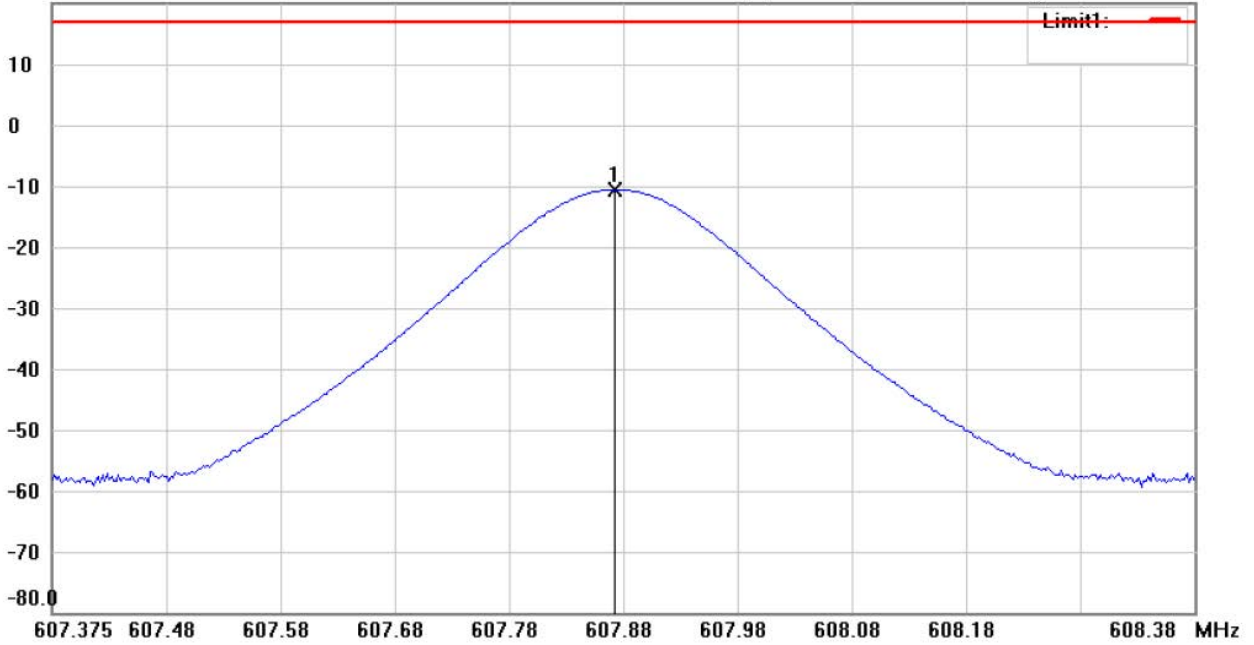

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 607.875MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	607.8680	-40.96	peak	30.39	-10.57	17.00	150	120	-27.57	



Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


**Radiated Emission Measurement**

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#1

Date: 2019/1/9  
 Time: 下午 03:38:23

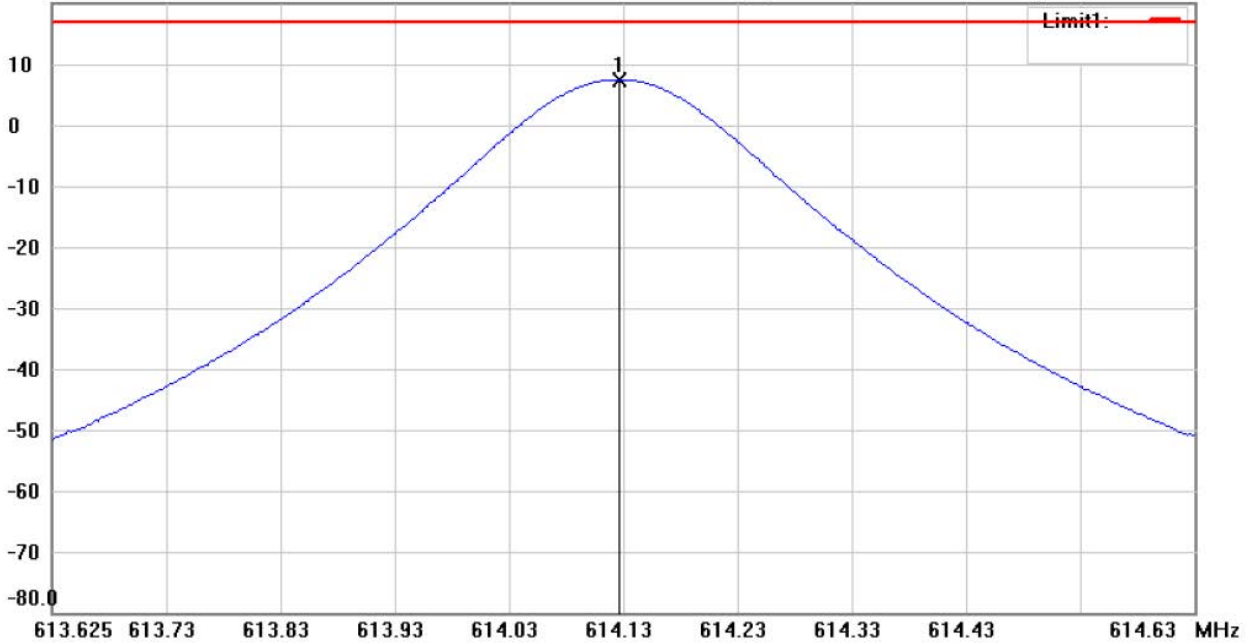

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 614.125MHz

Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	614.1220	-26.09	peak	33.57	7.48	17.00	150	110	-9.52	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


### Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#2

Date: 2019/1/9  
 Time: 下午 03:39:34

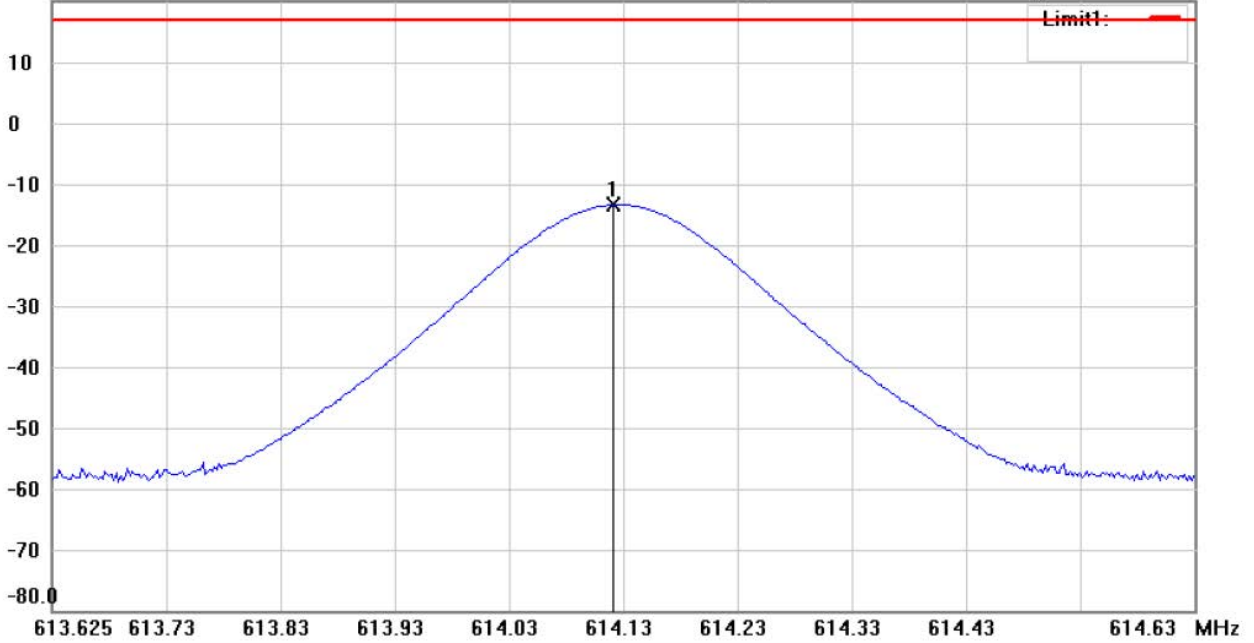

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 614.125MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	614.1160	-43.84	peak	30.46	-13.38	17.00	150	300	-30.38	



Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


**Radiated Emission Measurement**

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#1

Date: 2019/1/9  
 Time: 下午 03:43:17

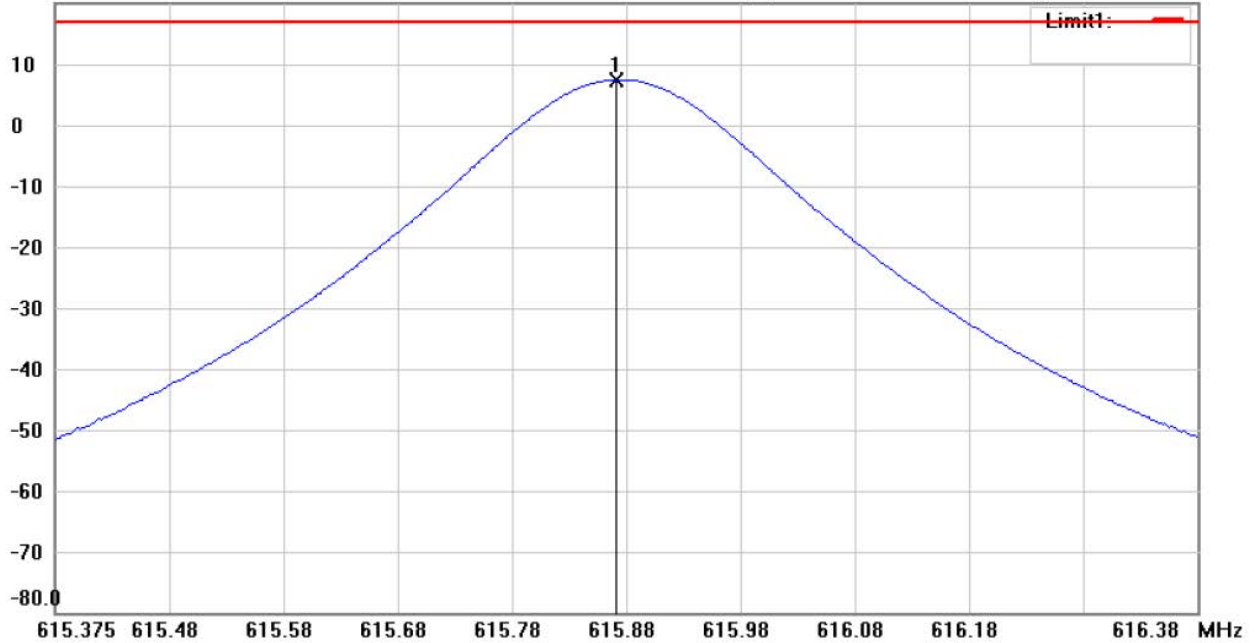

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 615.875MHz

Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	615.8660	-26.20	peak	33.63	7.43	17.00	150	210	-9.57	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


### Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :POWER  
 20.0 dBm

Data :#2

Date: 2019/1/9  
 Time: 下午 03:45:22

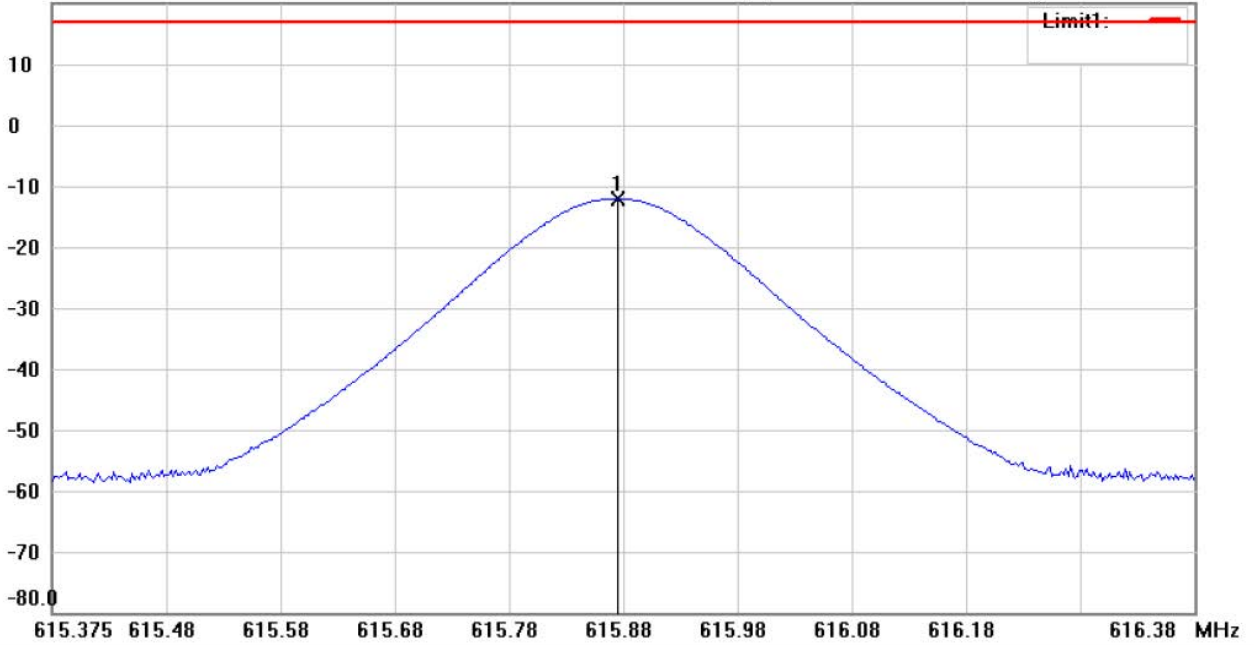

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 615.875MHz


Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	615.8700	-42.51	peak	30.48	-12.03	17.00	150	220	-29.03	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


### Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File : power  
 20.0 dBm

Data : #1

Date: 2019/1/7  
 Time: 下午 03:33:15

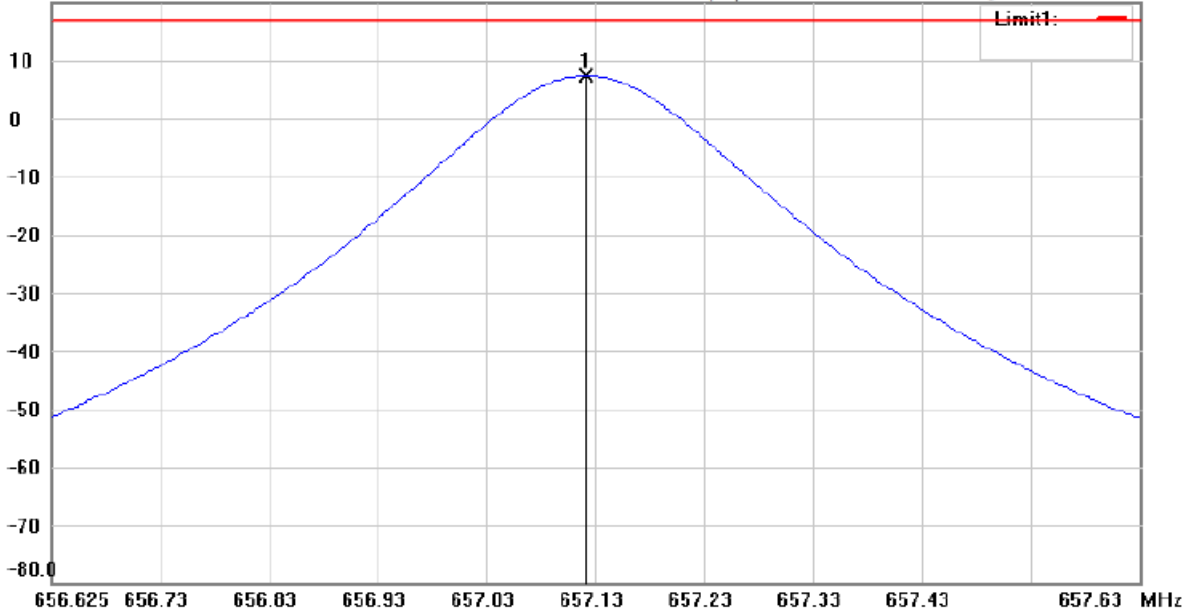

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 657.125MHz


Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	657.1160	-23.74	peak	31.08	7.34	17.00	150	120	-9.66	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


### Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File : power  
 20.0 dBm

Data : #2

Date: 2019/1/7  
 Time: 下午 03:26:58

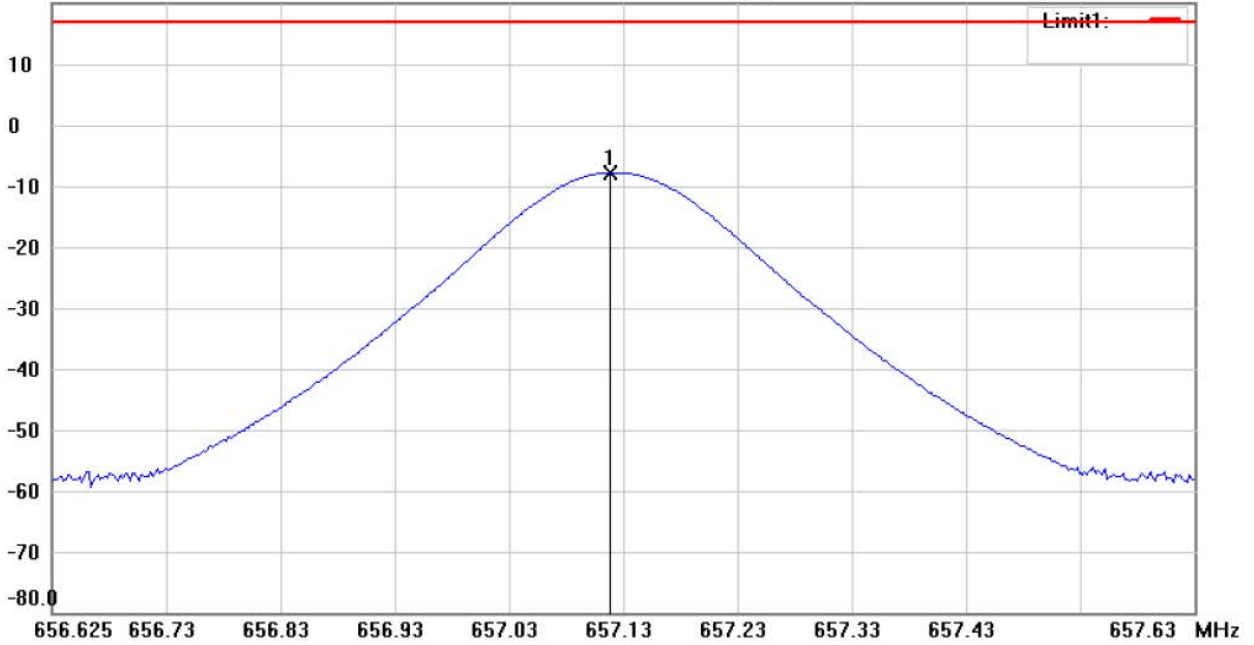

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 657.125MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	657.1140	-38.85	peak	31.08	-7.77	17.00	150	110	-24.77	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


## Radiated Emission Measurement

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File : power  
 20.0 dBm

Data :#1

Date: 2019/1/7  
 Time: 下午 03:36:37

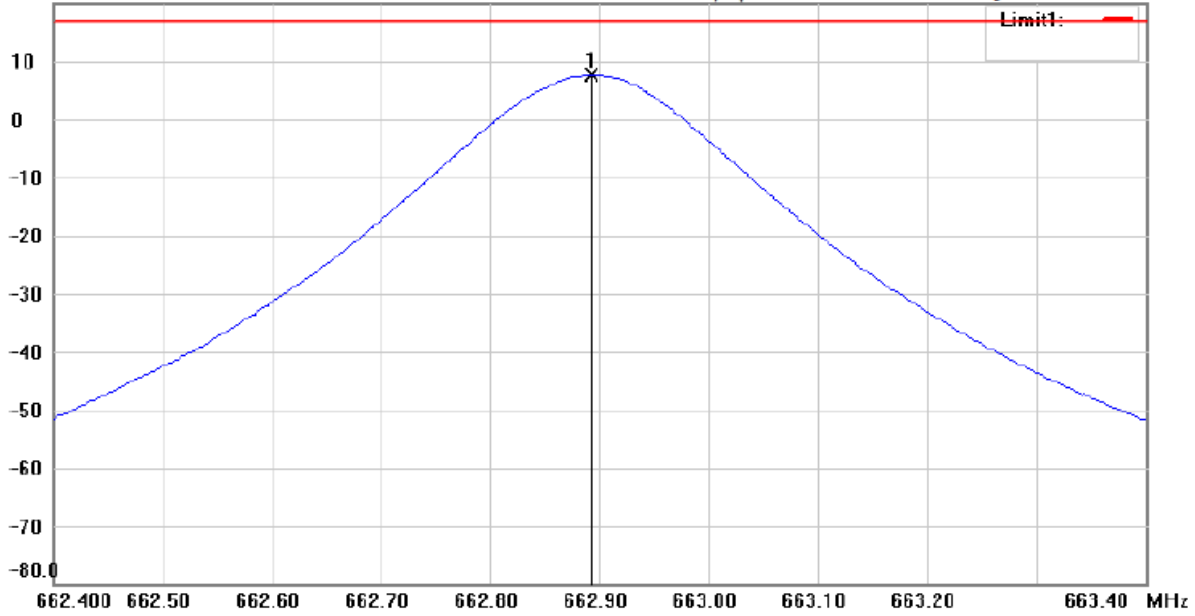

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 662.9MHz

Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	662.8930	-23.70	peak	31.29	7.59	17.00	150	250	-9.41	



Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61


**Radiated Emission Measurement**

Operator: Rick  
 Temperature: 24 °C  
 Humidity: 60 %

File :power  
 20.0 dBm

Data :#2

Date: 2019/1/7  
 Time: 下午 03:20:57

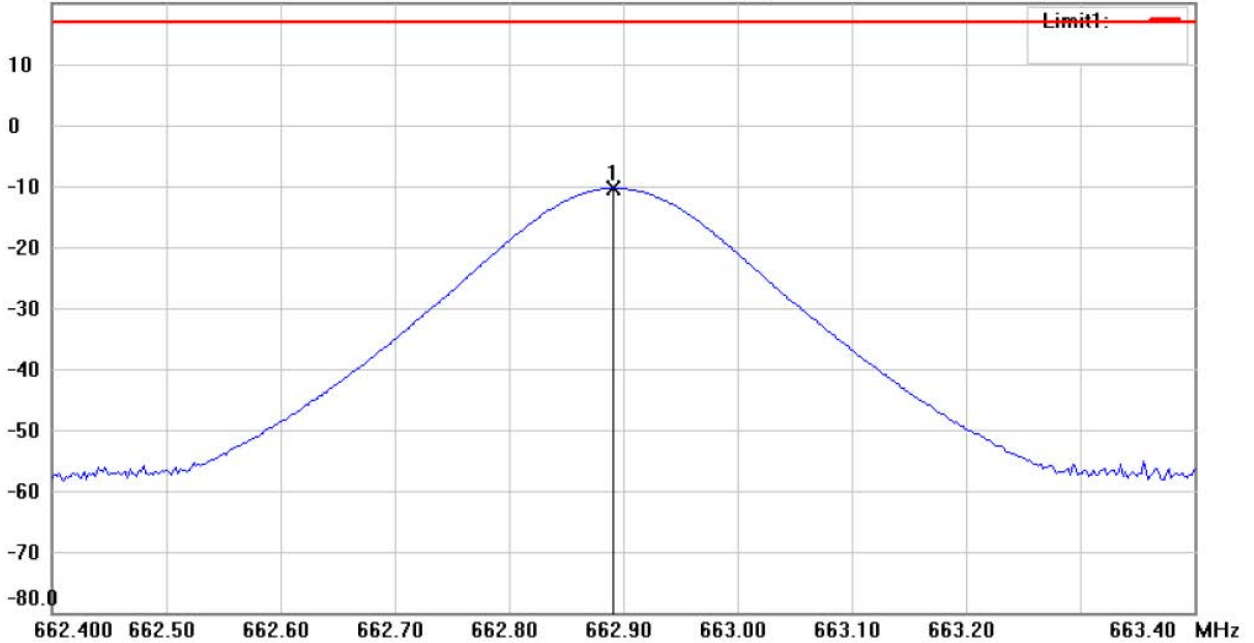

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M21810-18537

M/N:

Test Mode : TX 662.9MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	662.8910	-41.67	peak	31.29	-10.38	17.00	150	210	-27.38	

Note: The decision rule is “false acceptance”.

Test equipment used: ETSTW-RE 004, ETSTW-RE 122, ETSTW-RE 042, ETSTW-RE 043

Limit According to FCC PART 15.236(d): The output power limit: 50 mW (17 dBm)



Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

## 5 Occupied Bandwidth, FCC15.236 (f) / Emission Mask, FCC15.236 (g)

### 5.1 Test Procedure

#### Occupied Bandwidth

- (f) The operating frequency within a permissible band of operation as defined in paragraph (c) must comply with the following requirements.
- (1) The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof.
  - (2) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.
  - (3) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.005\%$  of the operating frequency over a temperature variation of - 20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard bands including the duplex gap: 20 mW EIRP (e) Operation is limited to locations separated from licensed services by the following distances. (1) Four kilometers outside the following protected service contours of co-channel TV stations. operated equipment shall be tested using a new battery.

### 5.2 Test results


#### Occupied Bandwidth



OCCUPIED BANDWIDTH 520.125MHz  
Date: 28.NOV.2018 16:08:05




Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

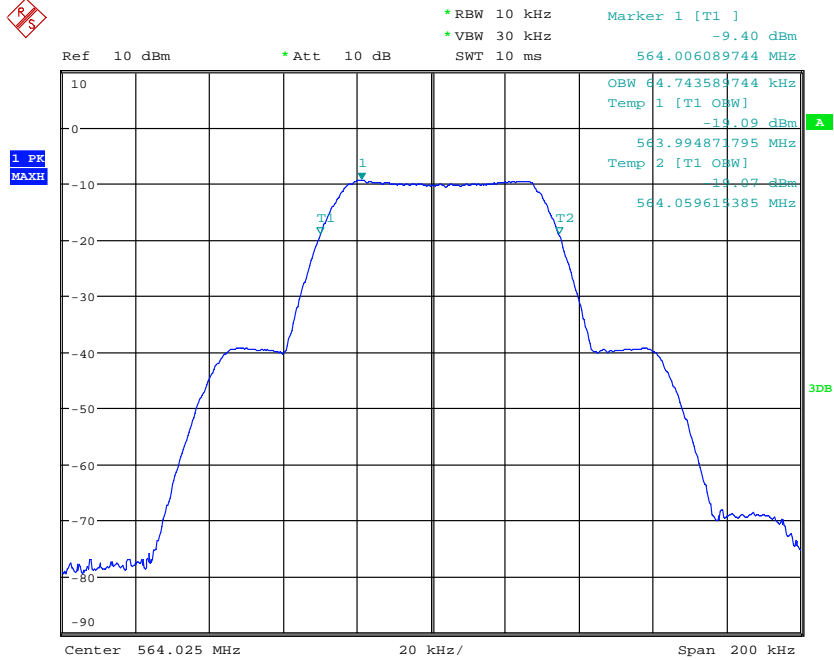

OCCUPIED BANDWIDTH 564.025MHz

Date: 28.NOV.2018 16:09:29

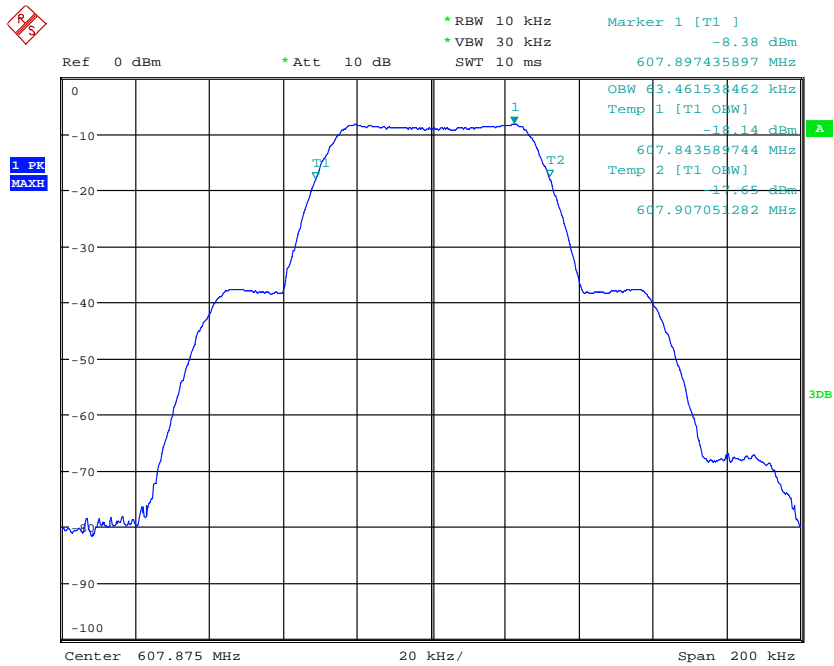


OCCUPIED BANDWIDTH 607.875MHz

Date: 28.NOV.2018 16:16:50




Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

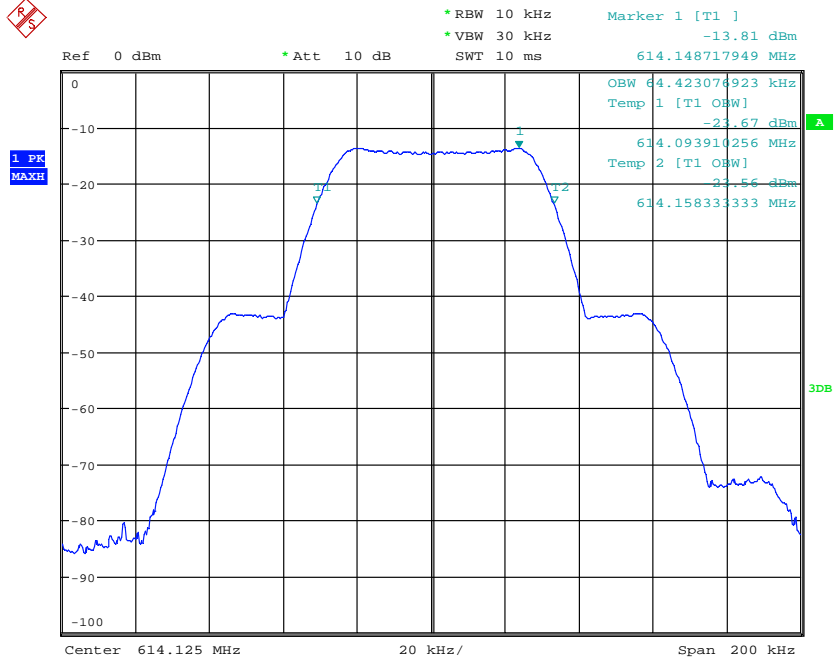

OCCUPIED BANDWIDTH 614.125MHz

Date: 28.NOV.2018 16:14:56

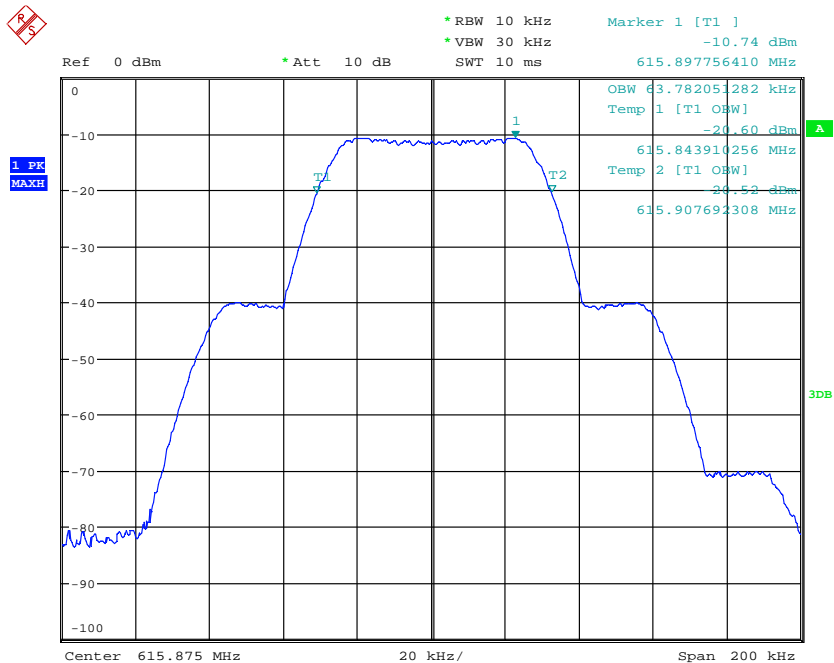


OCCUPIED BANDWIDTH 615.875MHz


Date: 28.NOV.2018 16:15:54



Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

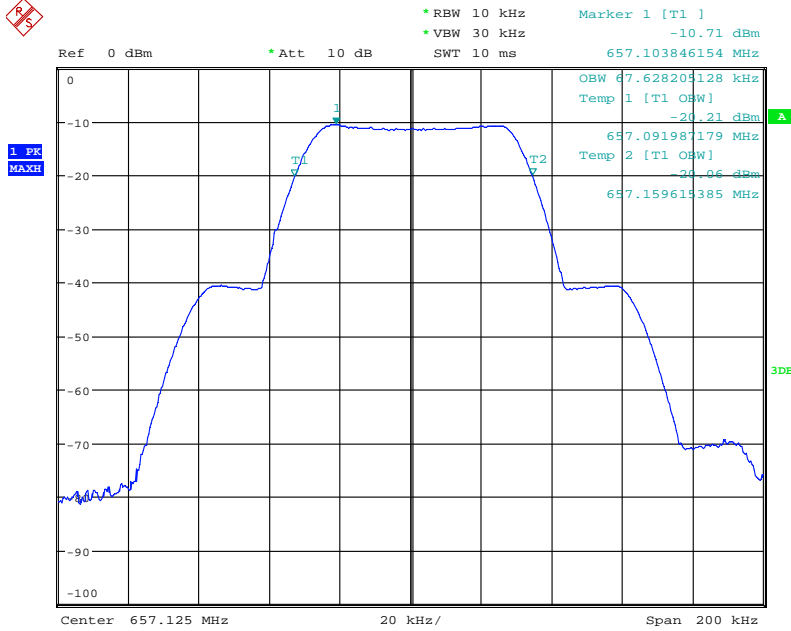

OCCUPIED BANDWIDTH 657.125MHz  
Date: 28.NOV.2018 16:58:26

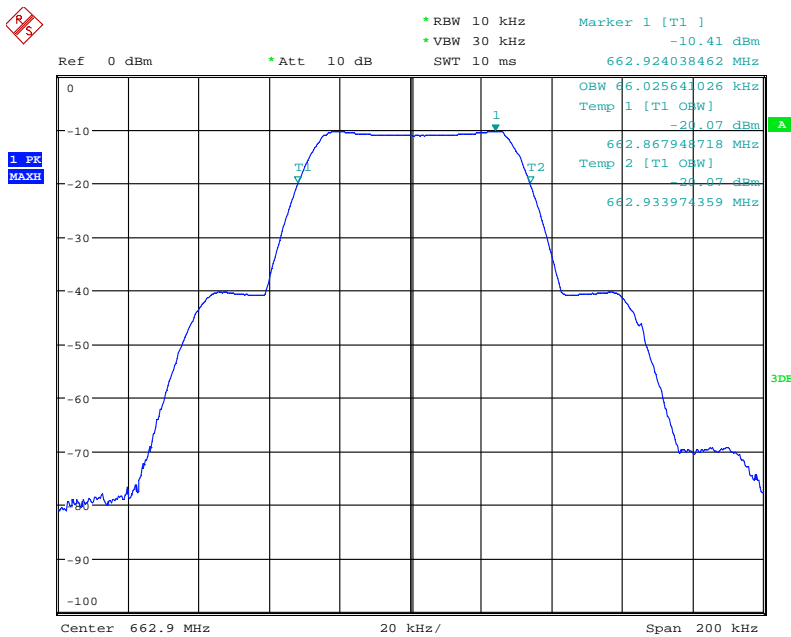


OCCUPIED BANDWIDTH 662.9MHz  
Date: 28.NOV.2018 16:57:28

## Limit

The operating bandwidth shall not exceed 200 kHz.

Test equipment used: ETSTW-RE 055 , ETSTW-RE 072, ETSTW-RE 050

Measurement uncertainty =  $\pm 0.45$  kHz




Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61


## Emission Mask

(g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08) (incorporated by reference, see § 15.38). Emissions outside this band shall comply with the limit specified at the edges of the ETSI mask.

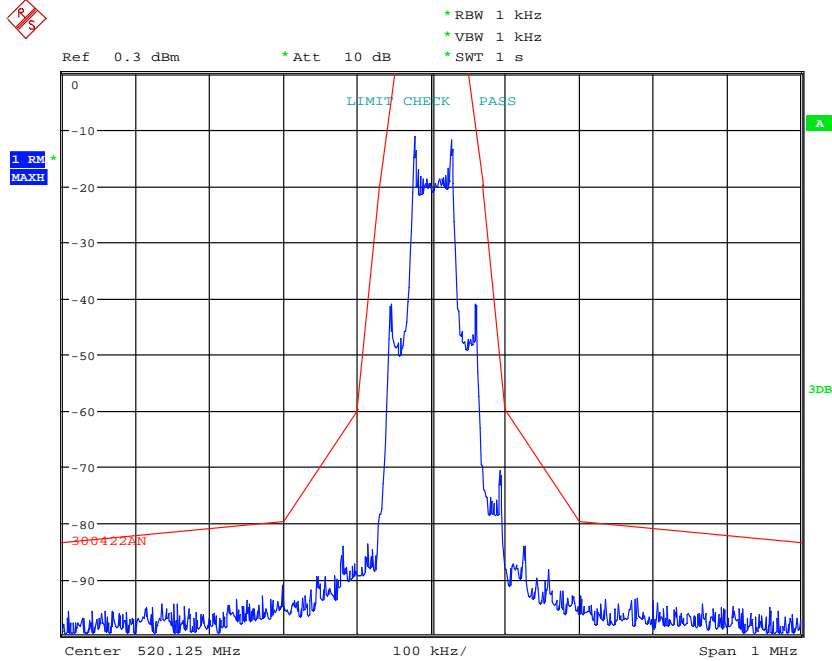


NECESSARY BANDWIDTH 520.125MHz

Date: 28.NOV.2018 13:35:10




Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

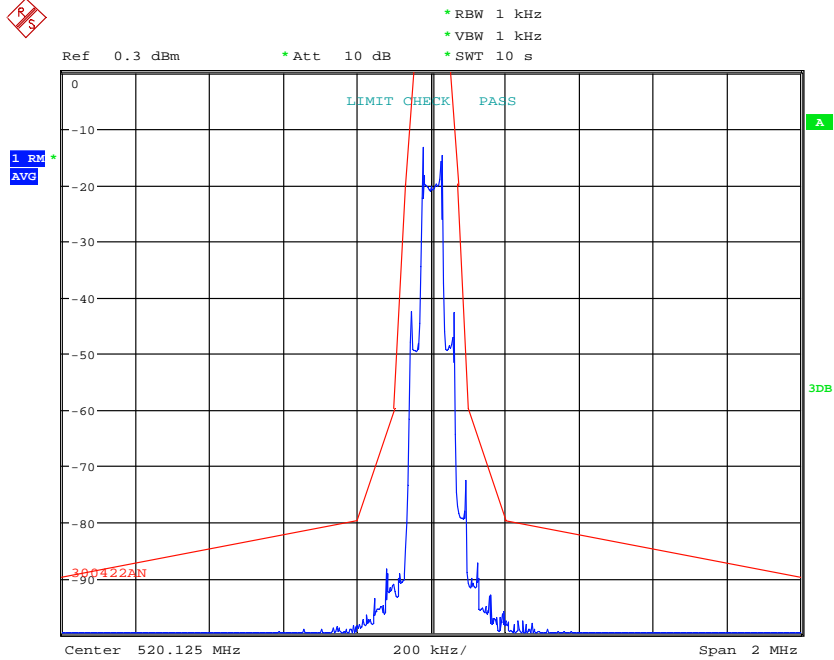

NECESSARY BANDWIDTH 520.125MHz

Date: 28.NOV.2018 13:34:46

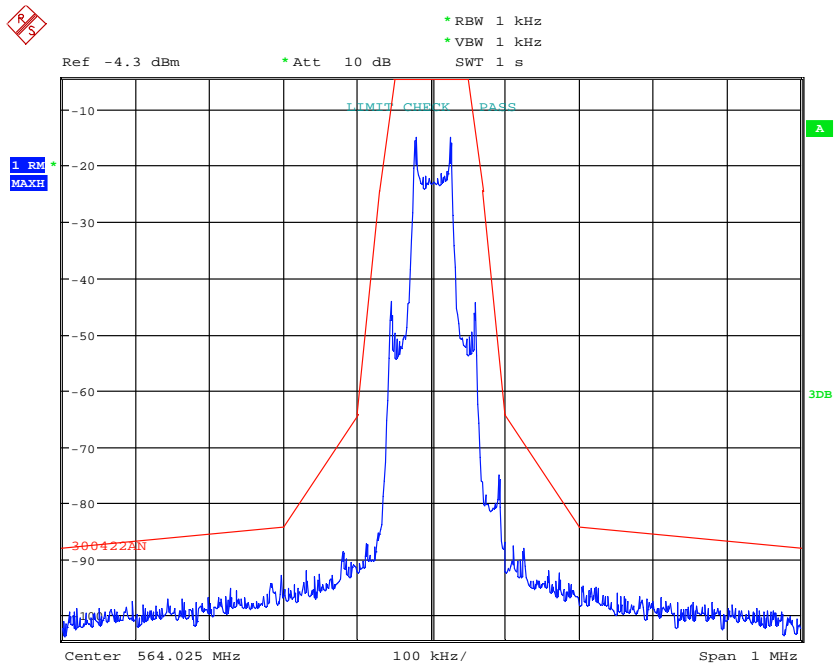


NECESSARY BANDWIDTH 564.025MHz

Date: 28.NOV.2018 14:01:22






Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

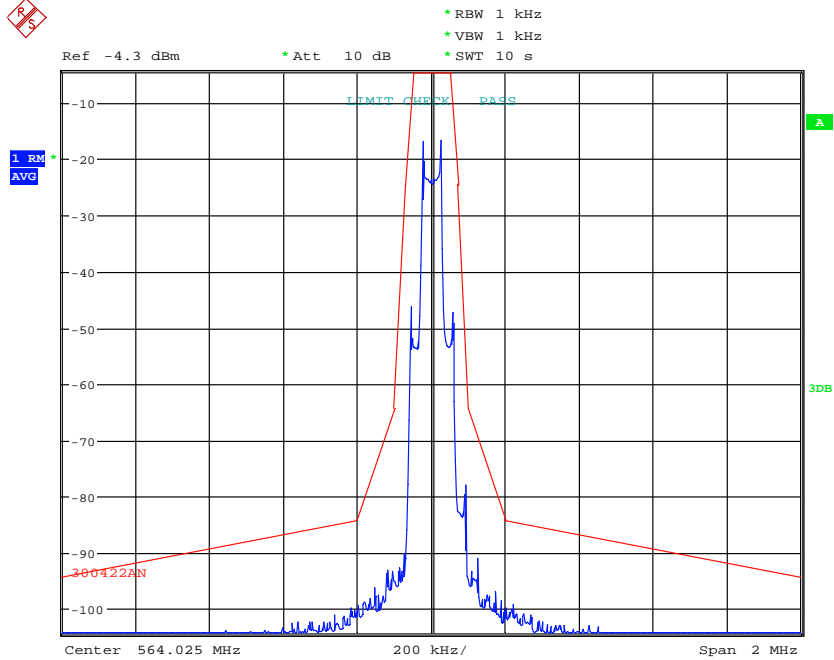

NECESSARY BANDWIDTH 564.025MHz

Date: 28.NOV.2018 14:01:44

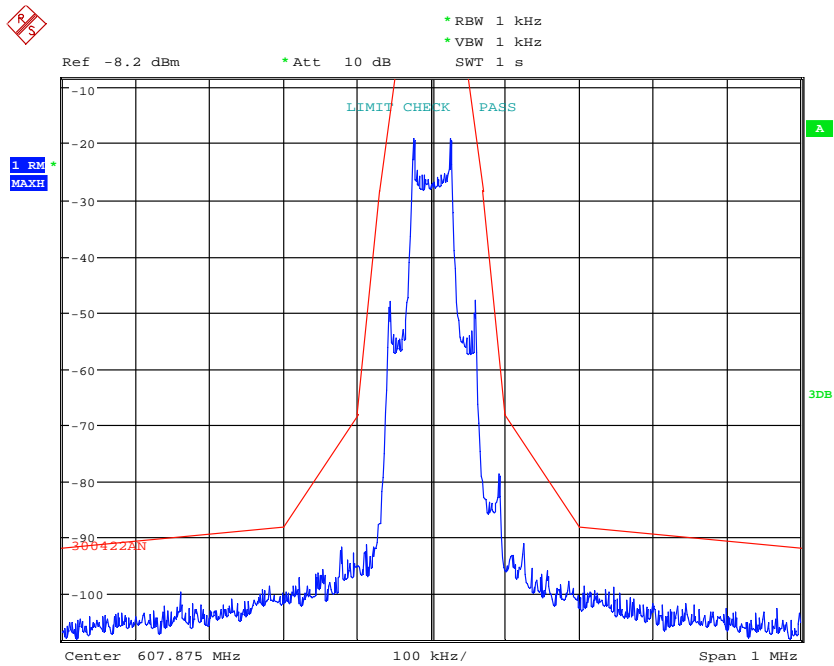


NECESSARY BANDWIDTH 607.875MHz


Date: 28.NOV.2018 13:37:44



Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

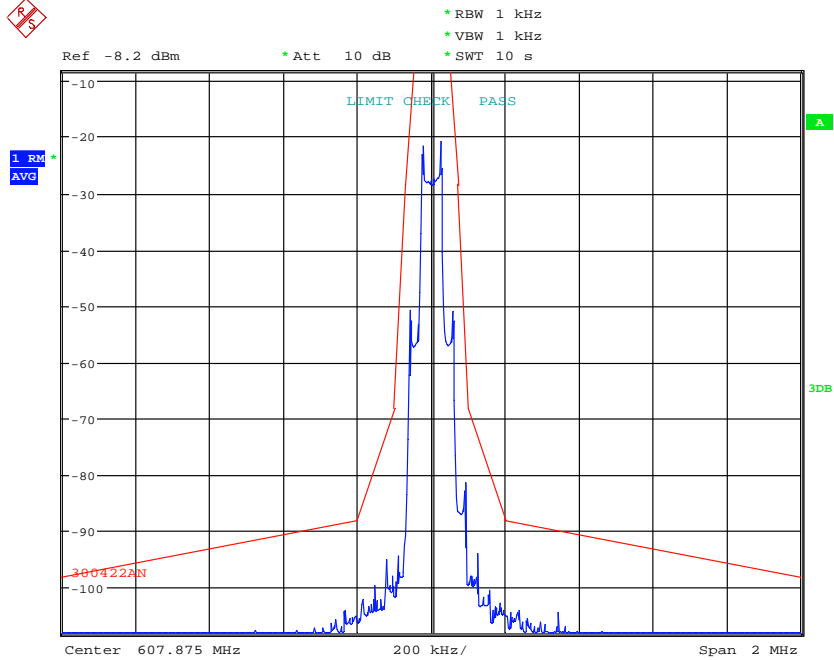


NECESSARY BANDWIDTH 607.875MHz  
Date: 28.NOV.2018 13:38:20

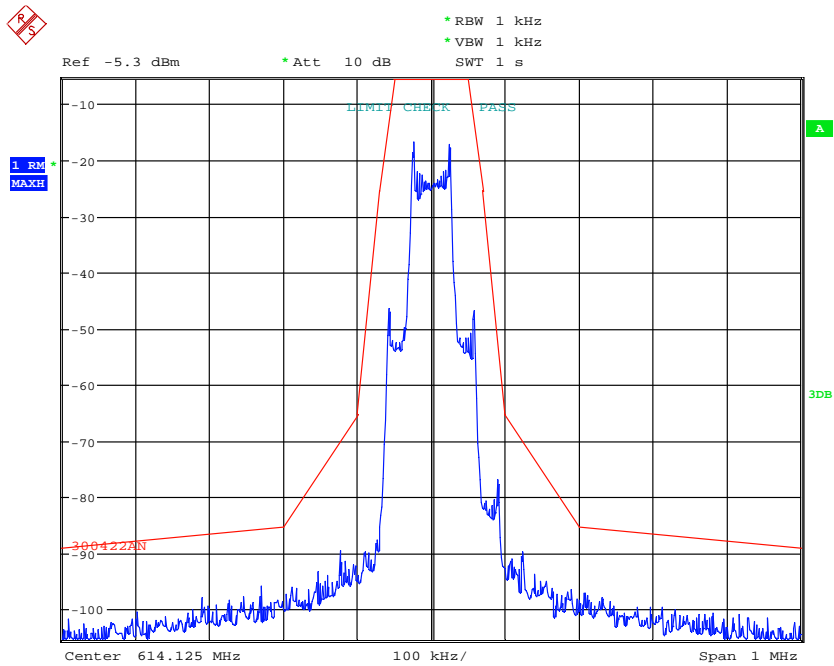

NECESSARY BANDWIDTH 614.125MHz  
Date: 28.NOV.2018 13:41:59




Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

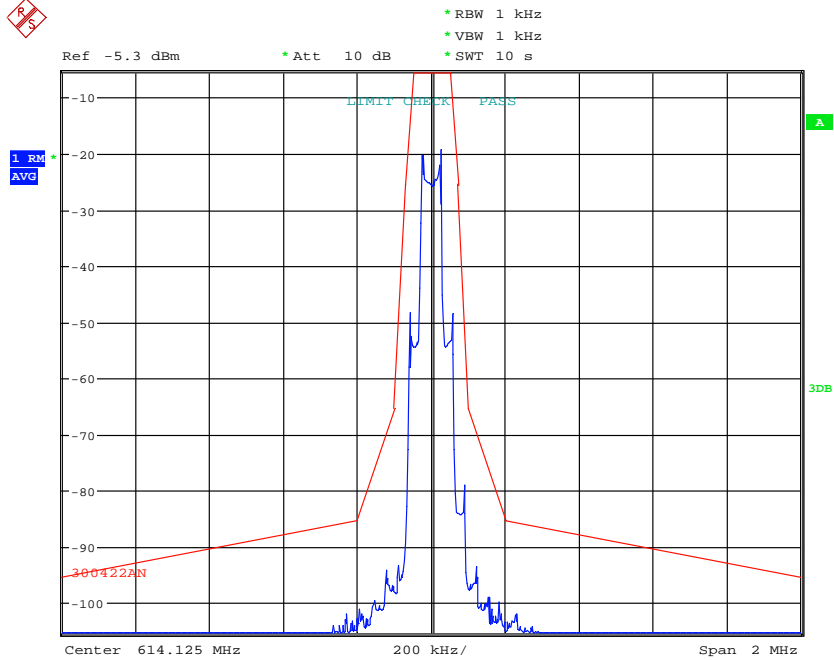

NECESSARY BANDWIDTH 614.125MHz

Date: 28.NOV.2018 13:42:28

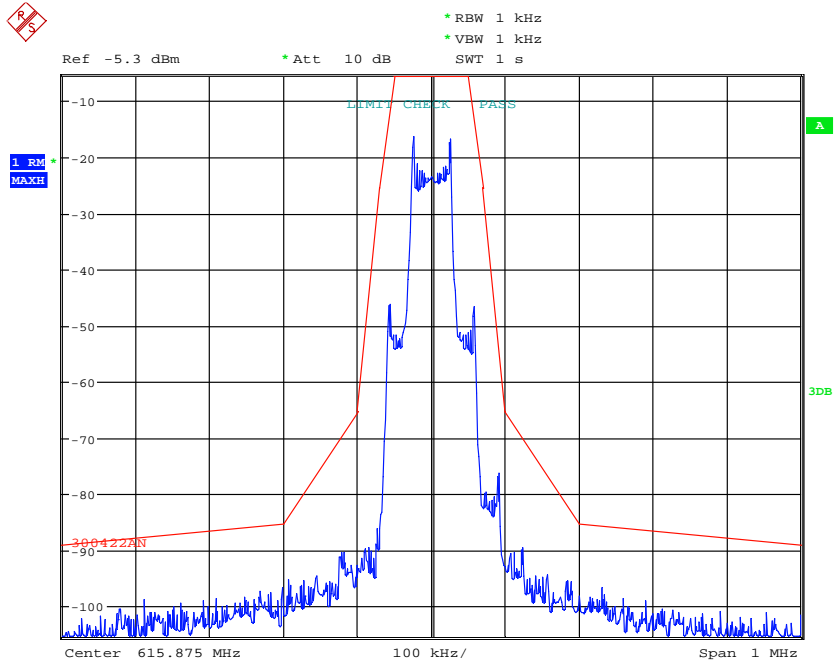


NECESSARY BANDWIDTH 615.875MHz

Date: 28.NOV.2018 13:41:00




Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

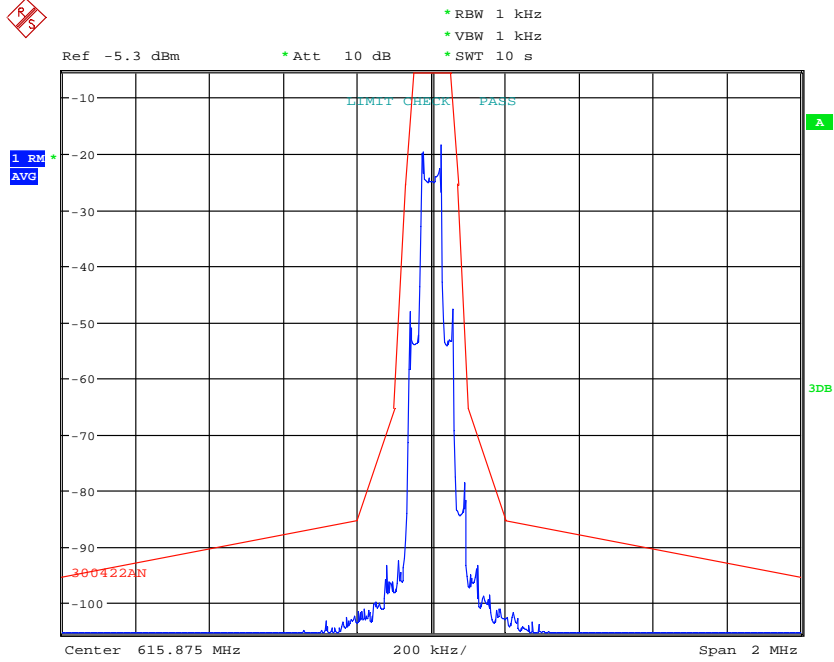

NECESSARY BANDWIDTH 615.875MHz

Date: 28.NOV.2018 13:40:40

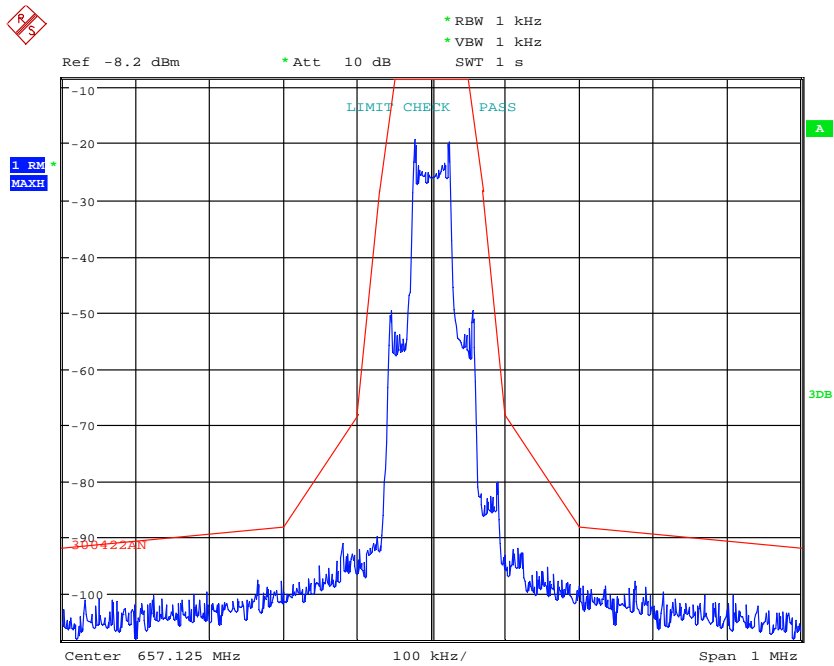


NECESSARY BANDWIDTH 657.125MHz

Date: 28.NOV.2018 13:45:36




Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61

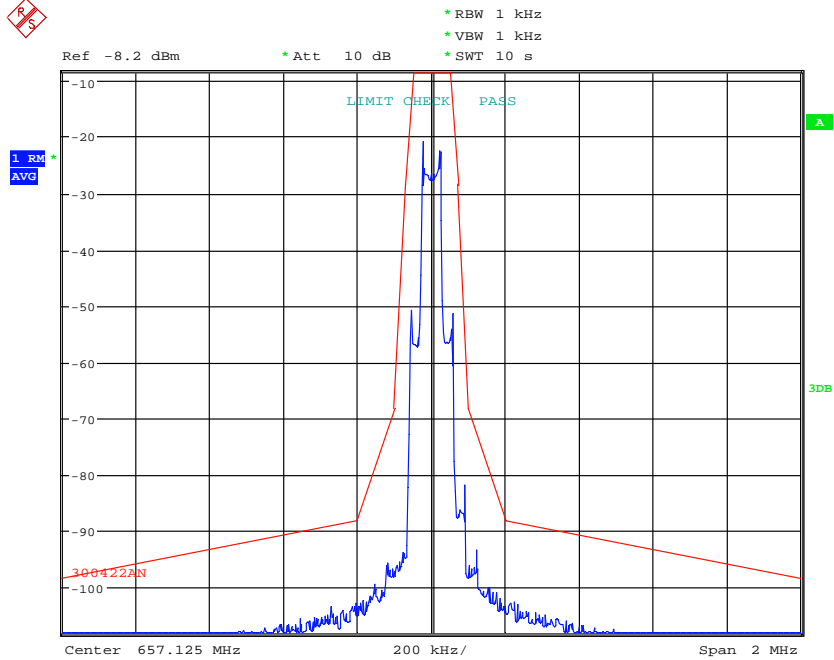

NECESSARY BANDWIDTH 657.125MHz


Date: 28.NOV.2018 13:45:17

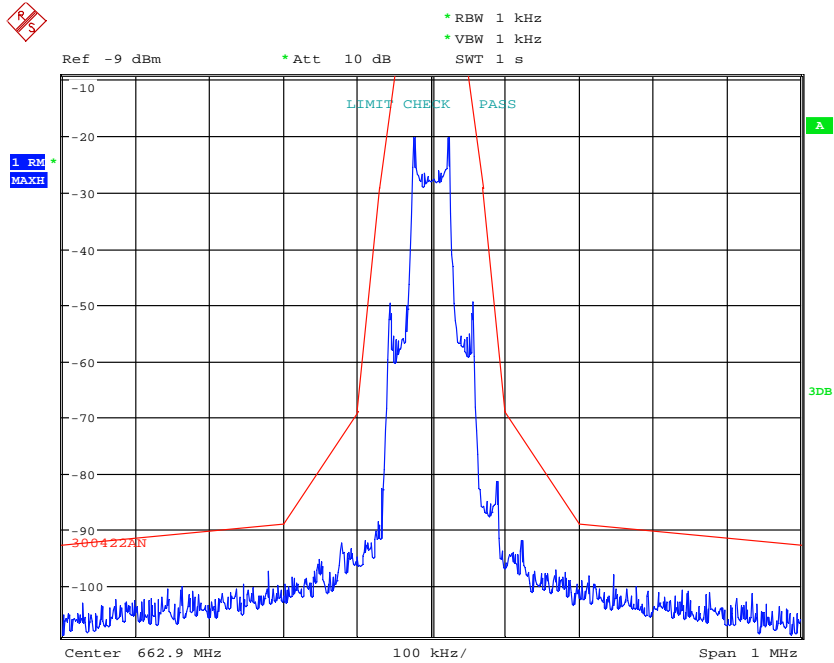

NECESSARY BANDWIDTH 662.9MHz

Date: 28.NOV.2018 13:49:35

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61

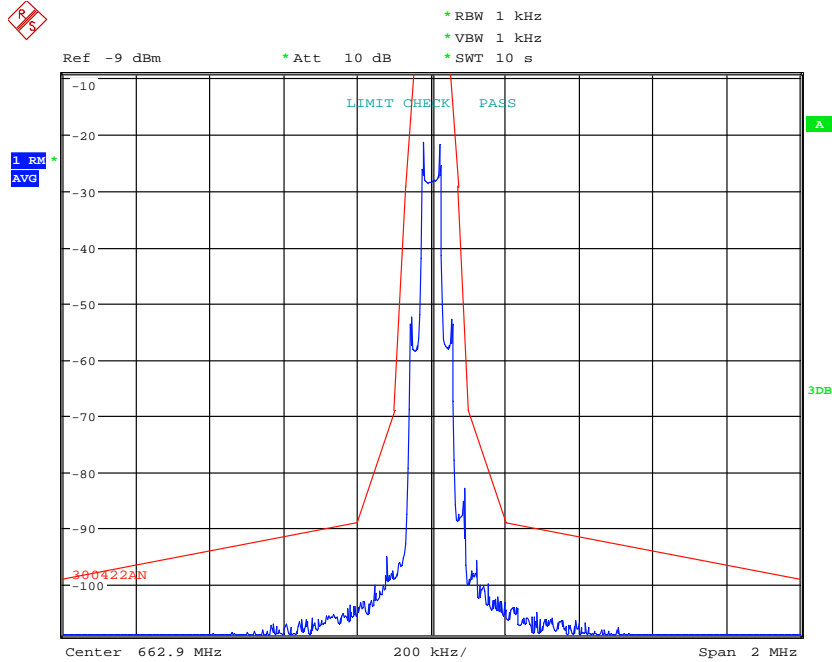


NECESSARY BANDWIDTH 662.9MHz  
 Date: 28.NOV.2018 13:49:17

Test equipment used: ETSTW-RE 055 , ETSTW-RE 072

Measurement uncertainty =  $\pm 0.45$  kHz

LIMIT acc. Subclause 8.3.1.2

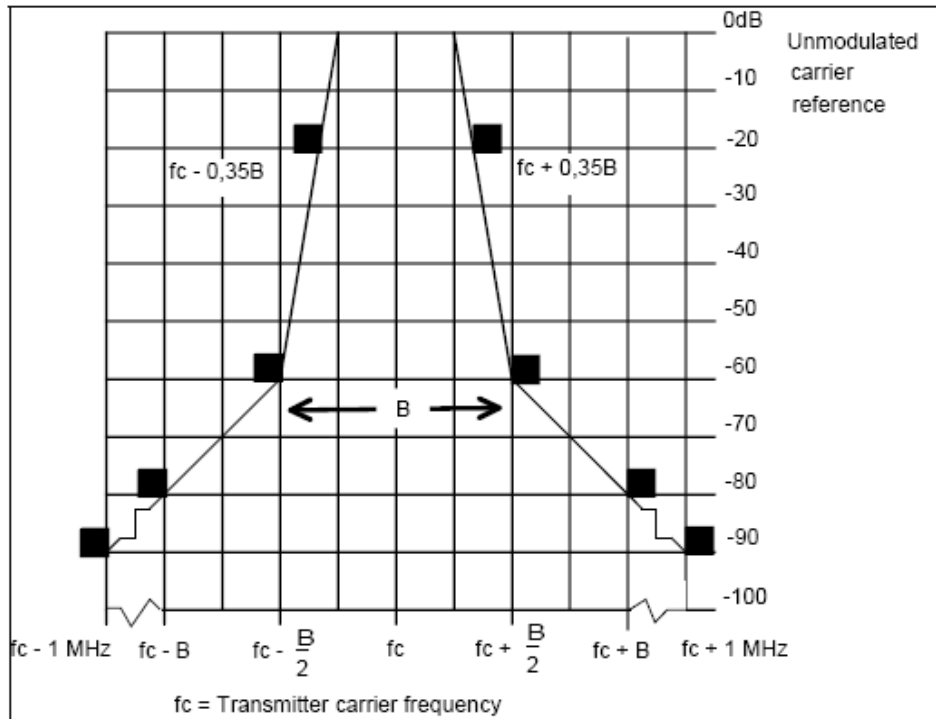


**Figure 1: Spectrum mask for analogue systems in all bands**

Registration number: W6M21810-18537-C-1


FCC ID: JEBUT-61

LIMIT acc. Subclause 8.3.2.2

The transmitter output spectrum shall be within the mask defined in figure 2. This mask may also be used for both analogue and digital Assistive Listening Devices.

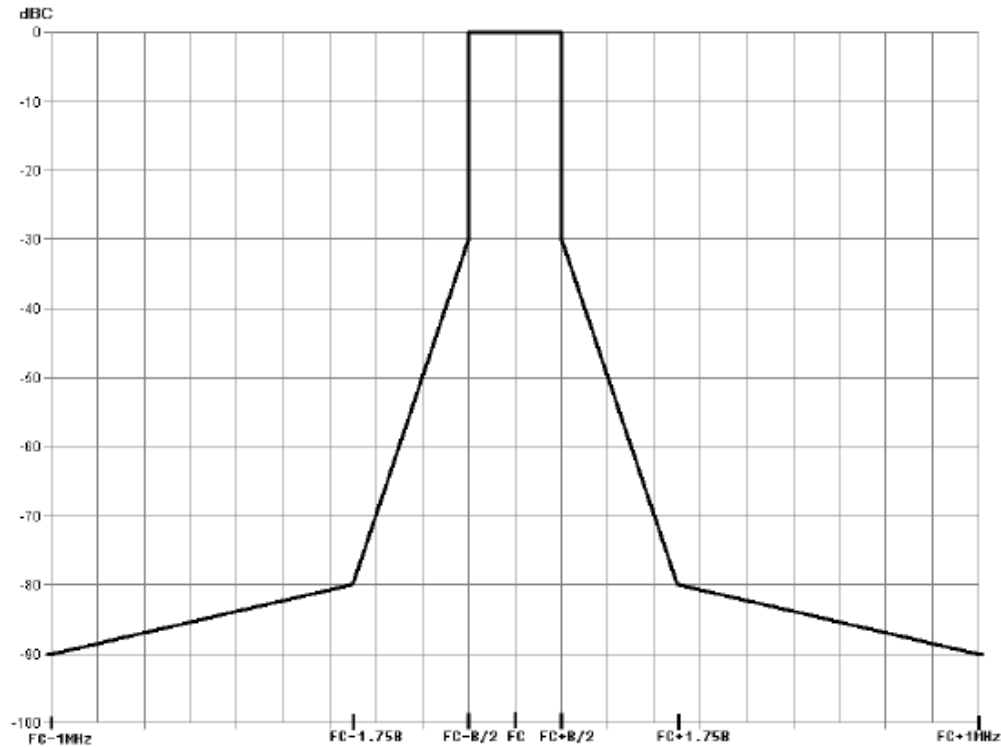

**Figure 2: Spectrum mask for digital systems below 1 GHz**



Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

**6 Radiated Spurious Emission , FCC 15.236(g)**

**6.1 Test procedure**

(g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08) (incorporated by reference, see § 15.38). Emissions outside this band shall comply with the limit specified at the edges of the ETSI mask.

**6.2 Test results**

The measurements of the spurious emission at the upper , center and lower channel.  
The measurement diagrams show that all significant spurs are well below the limit line.

**Summary table with radiated data of the test plots for Carrier Test Frequency**

Model: UT-61 Date: --  
 Mode: -- Temperature: -- °C Engineer: --  
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

**Note:**

- 1. Correction Factor = Antenna Gain + Cable Loss + Amplifier Gain**
- 2. The formula of measured value as: Test Result = Reading + Correction Factor**
- 3. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 4. Measurement uncertainty: 30-200MHz : ±2.50 dB, 200-1000MHz : ±2.50 dB, 1-18GHz : ±3.38 dB**  
Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.The decision rule is “false acceptance”.
- 5. See the attached diagram as appendix.**

Test equipment used: ETSTW-RE 004, ETSTW-RE 122, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044





Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

**7 Frequency Stability, FCC 15.236(f)(3)**

**7.1 Test procedure**

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.005\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

**7.2 Test results**

520.125	Freq	Error(kHz)	Error(ppm)
Norm	520.127132	--	--
Volt	520.127132	0.000	0.000
-30	520.136743	9.611	18.478
-20	520.135851	8.719	16.763
-10	520.134029	6.897	13.260
0	520.132143	5.011	9.634
+10	520.129241	2.109	4.055
+20	520.127132	0.000	0.000
+30	520.126351	-0.781	-1.501
+40	520.125232	-1.900	-3.653
+50	520.124532	-2.600	-4.999
Limit		26.006	50

564.025	Freq	Error(kHz)	Error(ppm)
Norm	564.027426	--	--
Volt	564.027426	0.000	0.000
-30	564.037026	9.600	17.020
-20	564.036099	8.673	15.377
-10	564.034181	6.755	11.976
0	564.032366	4.940	8.758
+10	564.029511	2.085	3.697
+20	564.027426	0.000	0.000
+30	564.026576	-0.850	-1.507
+40	564.025483	-1.943	-3.445
+50	564.024581	-2.845	-5.044
Limit	--	28.201	50



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61

607.875	Freq	Error(kHz)	Error(ppm)
Norm	607.875573	--	--
Volt	607.875573	0.000	0.000
-30	607.885168	9.595	15.784
-20	607.884173	8.600	14.148
-10	607.882207	6.634	10.913
0	607.880531	4.958	8.156
+10	607.877601	2.028	3.336
+20	607.875573	0.000	0.000
+30	607.874693	-0.880	-1.448
+40	607.873429	-2.144	-3.527
+50	607.872435	-3.138	-5.162
Limit	--	30.394	50

614.125	Freq	Error(kHz)	Error(ppm)
Norm	614.124712	--	--
Volt	614.124712	0.000	0.000
-30	614.134382	9.670	15.746
-20	614.133362	8.650	14.085
-10	614.131342	6.630	10.796
0	614.129683	4.971	8.094
+10	614.126775	2.063	3.359
+20	614.124712	0.000	0.000
+30	614.123894	-0.818	-1.332
+40	614.122644	-2.068	-3.367
+50	614.121845	-2.867	-4.668
Limit	--	30.706	50

615.875	Freq	Error(kHz)	Error(ppm)
Norm	615.875216	--	--
Volt	615.875216	0.000	0.000
-30	615.884809	9.593	15.576
-20	615.883829	8.613	13.985
-10	615.881876	6.660	10.814
0	615.880015	4.799	7.792
+10	615.877276	2.060	3.345
+20	615.875216	0.000	0.000
+30	615.874401	-0.815	-1.323
+40	615.873174	-2.042	-3.316
+50	615.872349	-2.867	-4.655
Limit	--	30.794	50



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21810-18537-C-1  
 FCC ID: JEBUT-61

657.125	Freq	Error(kHz)	Error(ppm)
Norm	657.126060	--	--
Volt	657.126060	0.000	0.000
-30	657.135846	9.786	14.892
-20	657.134636	8.576	13.051
-10	657.132691	6.631	10.091
0	657.130523	4.463	6.792
+10	657.128067	2.007	3.054
+20	657.126060	0.000	0.000
+30	657.125226	-0.834	-1.269
+40	657.124071	-1.989	-3.027
+50	657.123245	-2.815	-4.284
Limit	--	32.856	50

622.9	Freq	Error(kHz)	Error(ppm)
Norm	662.900416	--	--
Volt	662.900416	0.000	0.000
-30	662.910328	9.912	14.952
-20	662.909067	8.651	13.050
-10	662.907046	6.630	10.002
0	662.905224	4.808	7.253
+10	662.902443	2.027	3.058
+20	662.900416	0.000	0.000
+30	662.899587	-0.829	-1.251
+40	662.898366	-2.050	-3.092
+50	662.897534	-2.882	-4.347
Limit	--	31.145	50


### Limit According to FCC 15.236(f)(3)

Test equipment used: ETSTW-RE 055, ETSTW-CE 009

### Voltage

Frequency in MHz	Frequency Error (kHz)	Frequency Error (ppm)
520.136743	9.611	18.478
564.037026	9.600	17.020
607.885168	9.595	15.784
614.134382	9.670	15.746
615.884809	9.593	15.576
657.135846	9.786	14.892
662.910328	9.912	14.952

Limit :  $\pm 0.005\%$



# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M21810-18537-C-1


FCC ID: JEBUT-61

**Limit According to FCC 15.236(f)(3)**

**The frequency tolerance of the transmitter shall be 0.005 percent.**

Test equipment used: ETSTW-RE 055

Measurement uncertainty =  $\pm 6.11$  Hz



Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

## 8 Line Conducted Emission , FCC 15.207

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power. Near the carrier an Emission Mask is defined by the standard.

### 8.1 Test procedure

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

### 8.2 Test Results

Model: UT-61 Date: --  
 Mode: -- Temperature: -- °C Engineer: --  
 Polarization: -- Humidity: -- %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: L1

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

- Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor**  
**2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**  
**3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**  
**4. All not in the table noted test results are more than 20 dB below the relevant limits.**  
**5. Measurement uncertainty = ±1.30 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**  
**6. Up Line: QP Limit Line, Down Line: Ave Limit Line.**  
**7. This test is not required because the EUT uses battery.**

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045



Registration number: W6M21810-18537-C-1  
FCC ID: JEBUT-61


## **Appendix**

### **A Photos**

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission

### **B Measurement diagrams**

Radiation Spurious Emission



***Worldwide Testing Services(Taiwan) Co., Ltd.***

---

Registration number: W6M21810-18537-C-1

FCC ID: JEBUT-61

Radiation Spurious Emission-According to FCC Part 15.236



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:06:27

Humidity:60 %

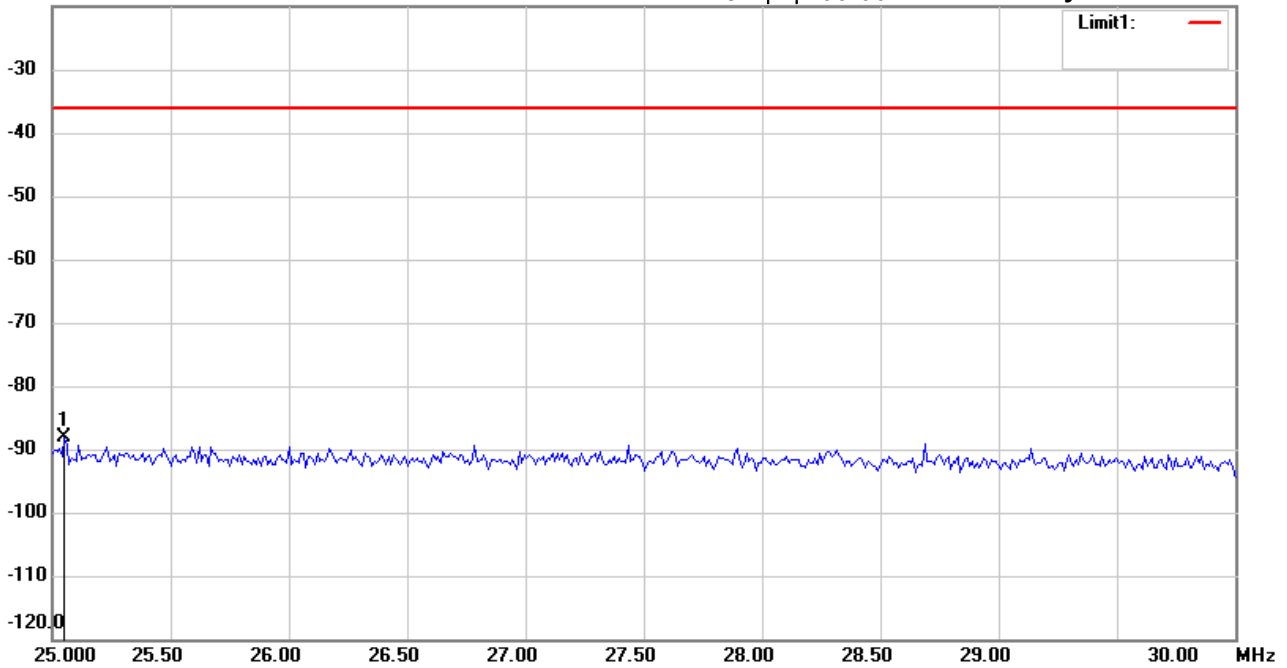

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-113.89	peak	25.69	-88.20	-36.00	150	120	-52.20	

\*:Maximum data    x:Over limit    !:over margin





Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:42:50

Humidity:60 %

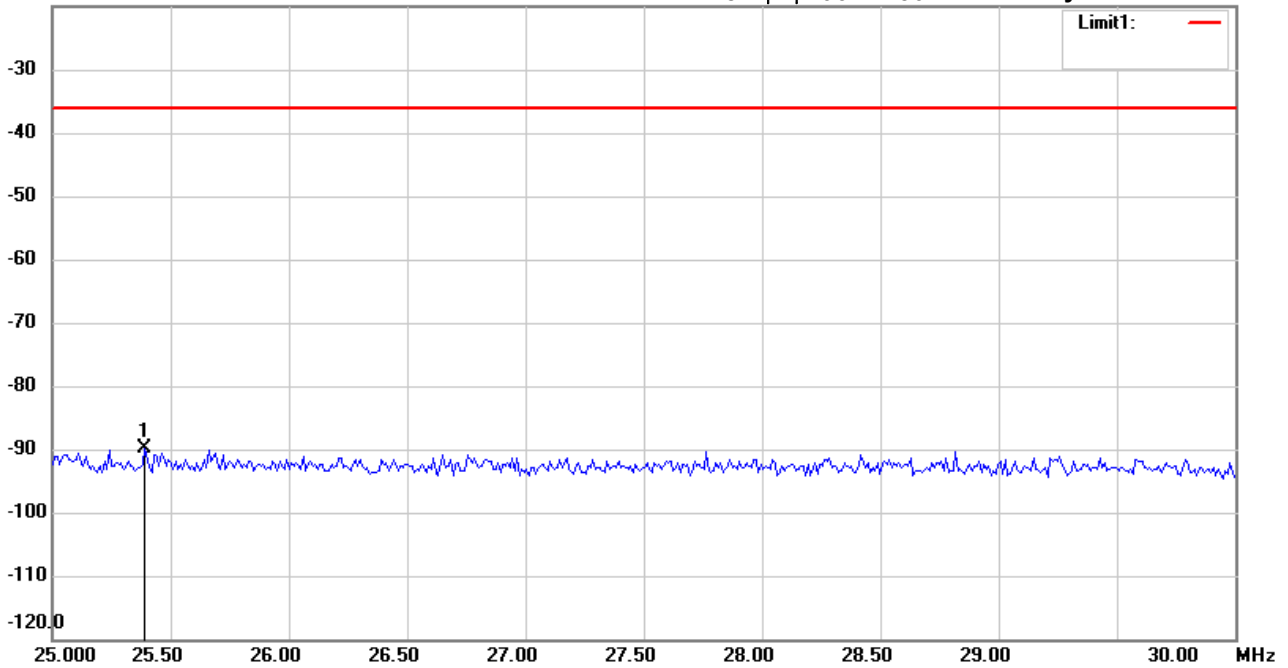

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.3908	-114.35	peak	24.59	-89.76	-36.00	150	80	-53.76	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:07:03

Humidity:60 %

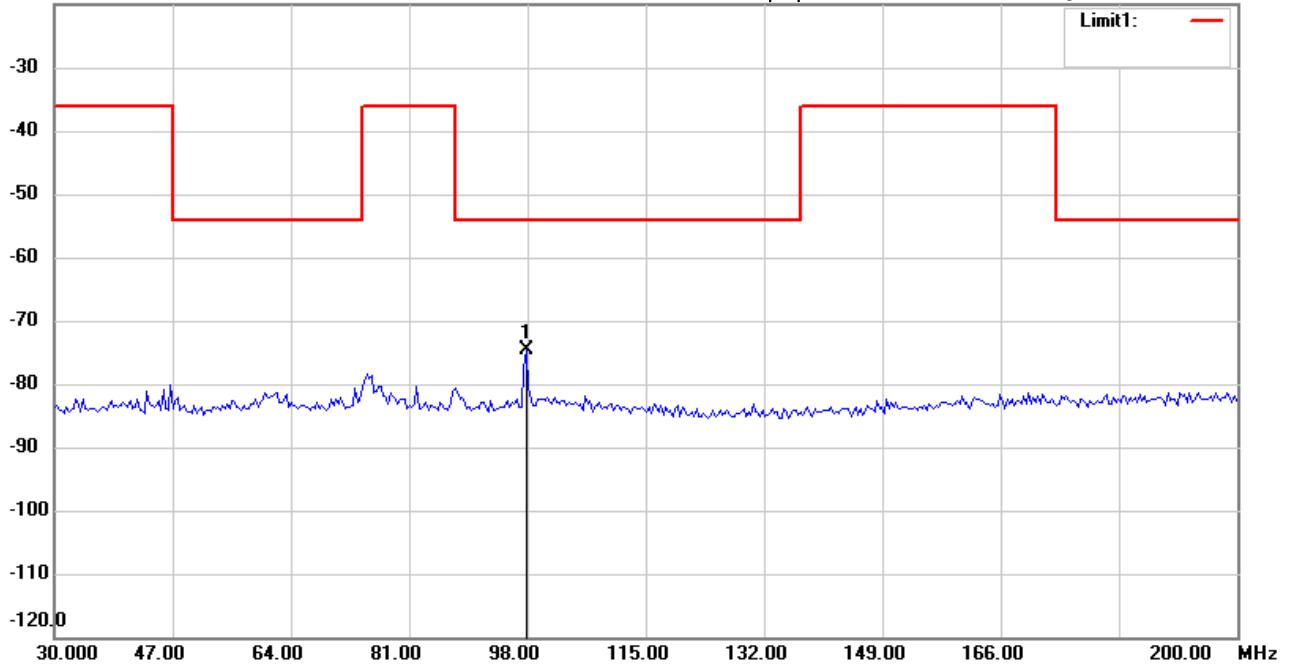

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	97.7956	-96.11	peak	21.44	-74.67	-54.00	150	70	-20.67	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:43:26

Humidity:60 %

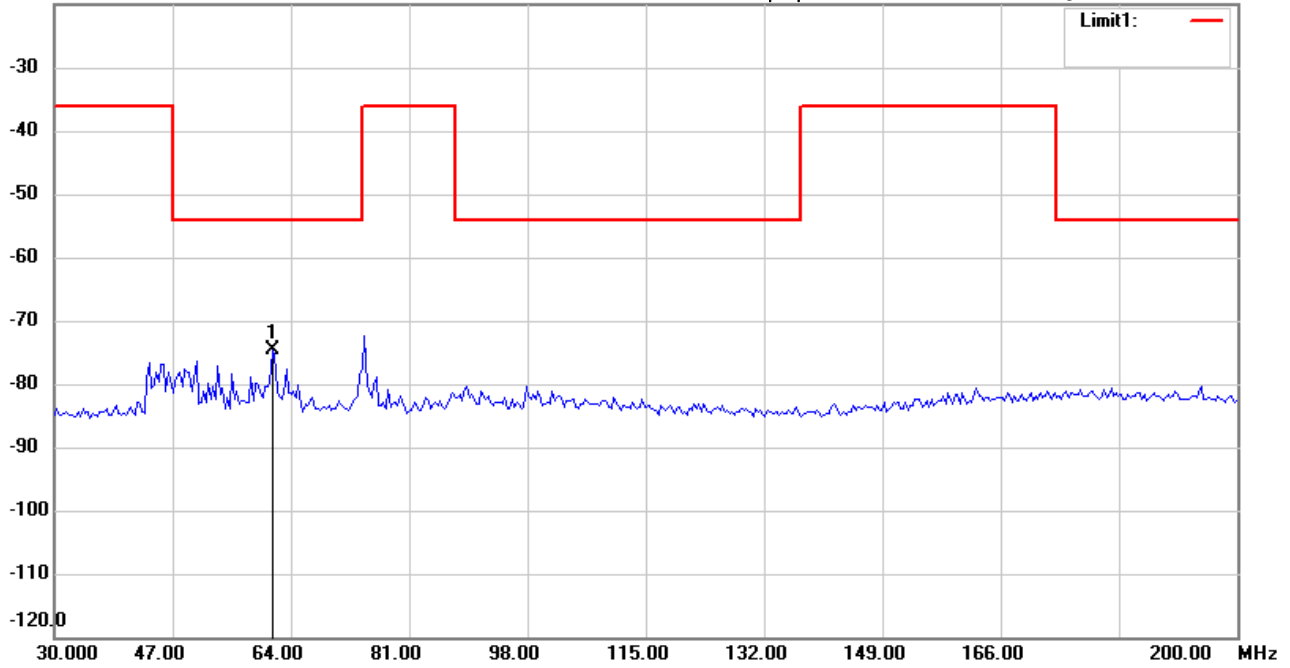

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	61.3427	-96.03	peak	21.52	-74.51	-54.00	150	210	-20.51	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#1


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 上午 11:53:21

Humidity:60 %

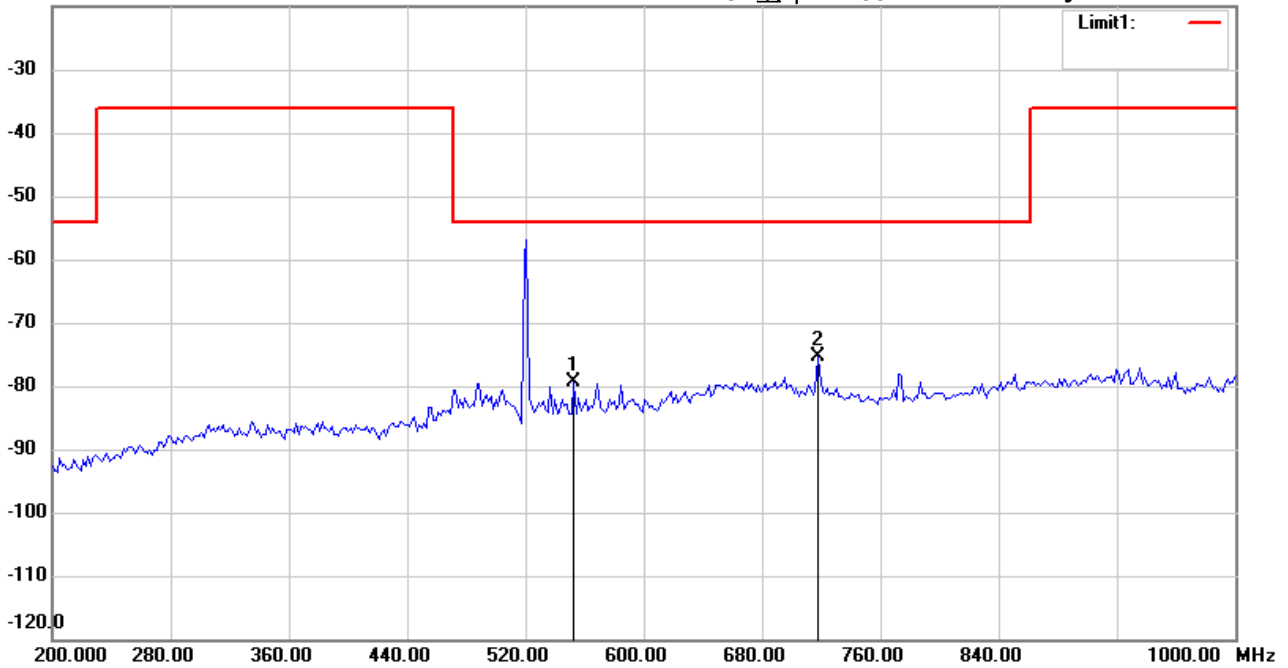

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	552.7054	-71.78	peak	-7.50	-79.28	-54.00	150	250	-25.28	
*	717.8356	-71.99	peak	-3.32	-75.31	-54.00	150	100	-21.31	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 上午 11:55:32

Humidity:60 %

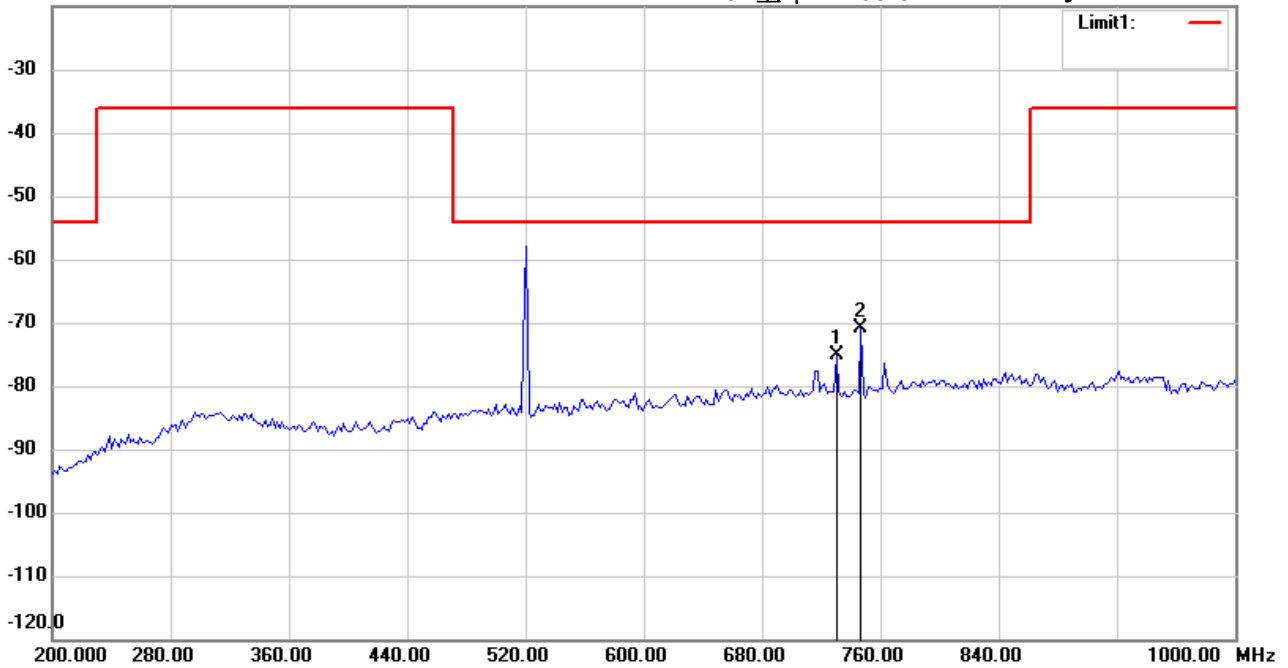

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	730.6612	-71.70	peak	-3.45	-75.15	-54.00	150	120	-21.15	
*	746.6933	-67.35	peak	-3.62	-70.97	-54.00	150	250	-16.97	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 07:18:34

Humidity:60 %

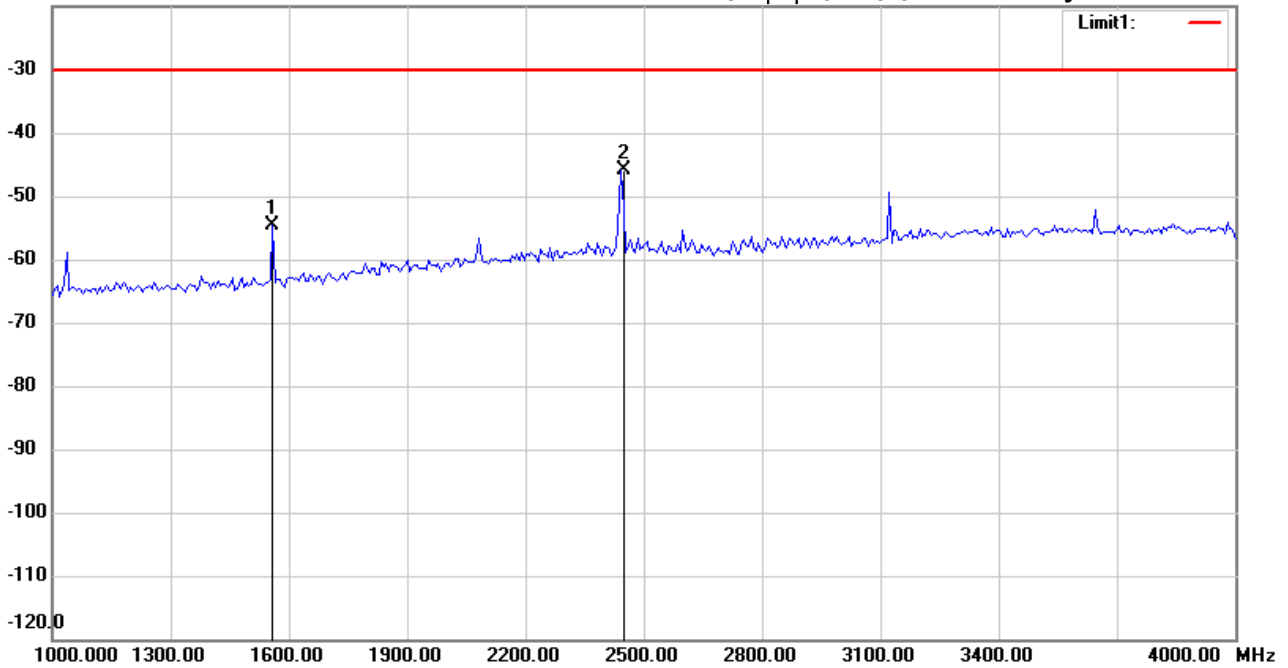

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1559.118	-52.91	peak	-1.81	-54.72	-30.00	150	120	-24.72	
*	2442.886	-49.30	peak	3.49	-45.81	-30.00	150	300	-15.81	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 07:22:17

Humidity:60 %

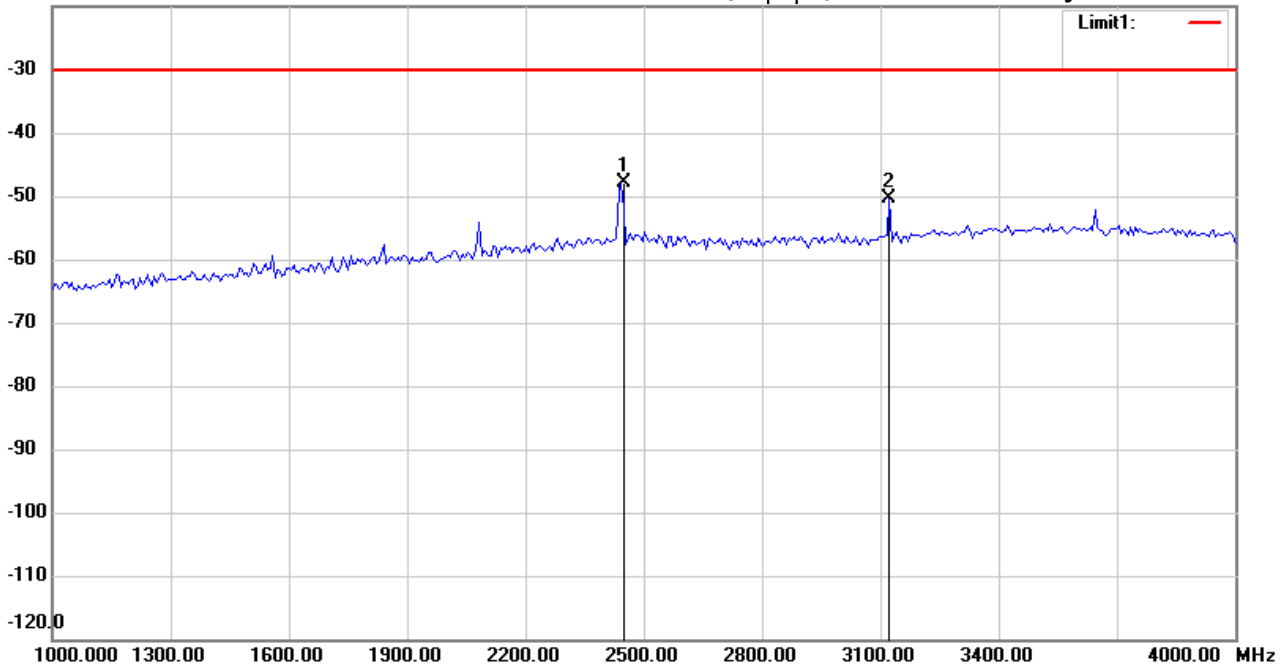

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2442.886	-53.05	peak	5.07	-47.98	-30.00	150	300	-17.98	
	3122.244	-56.24	peak	5.76	-50.48	-30.00	150	210	-20.48	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 07:19:27

Humidity:60 %

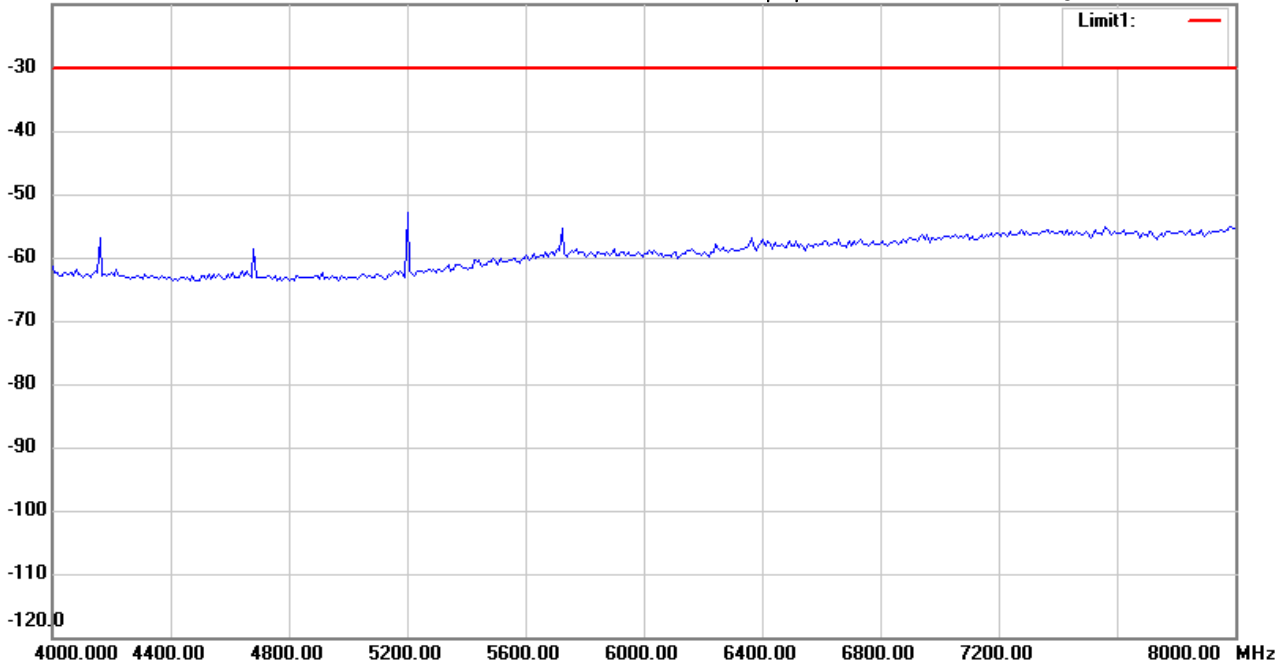

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 07:23:50

Humidity:60 %

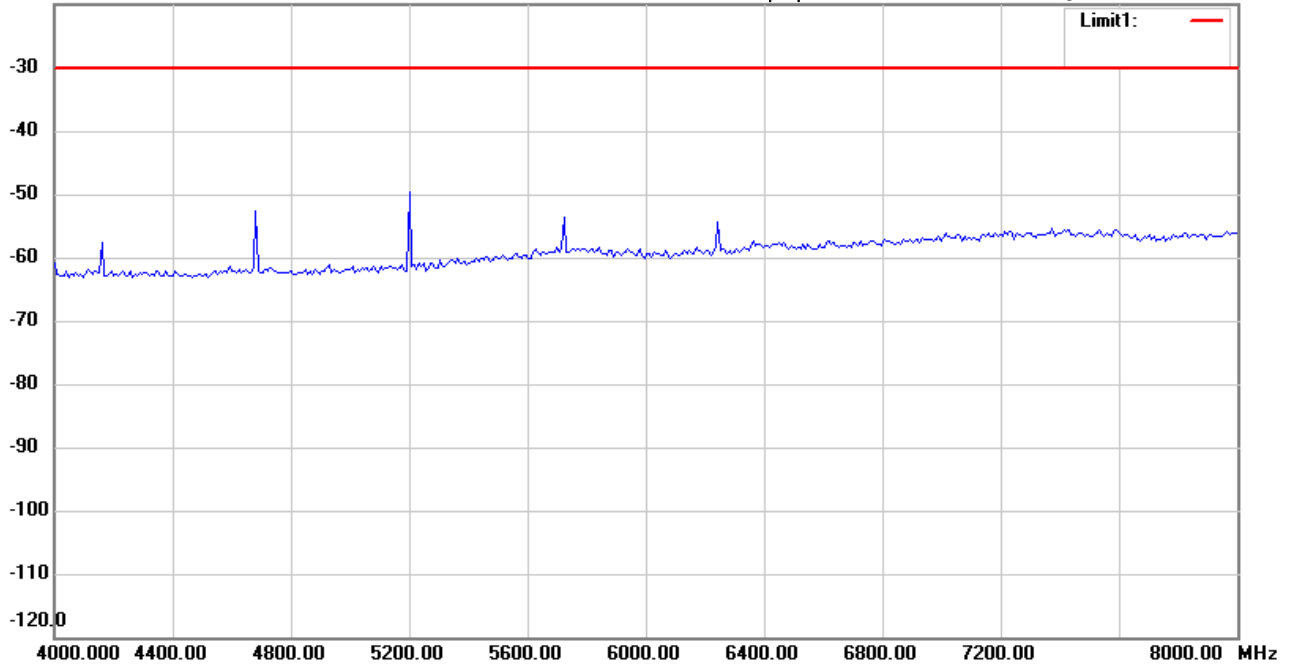

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 07:20:15

Humidity:60 %

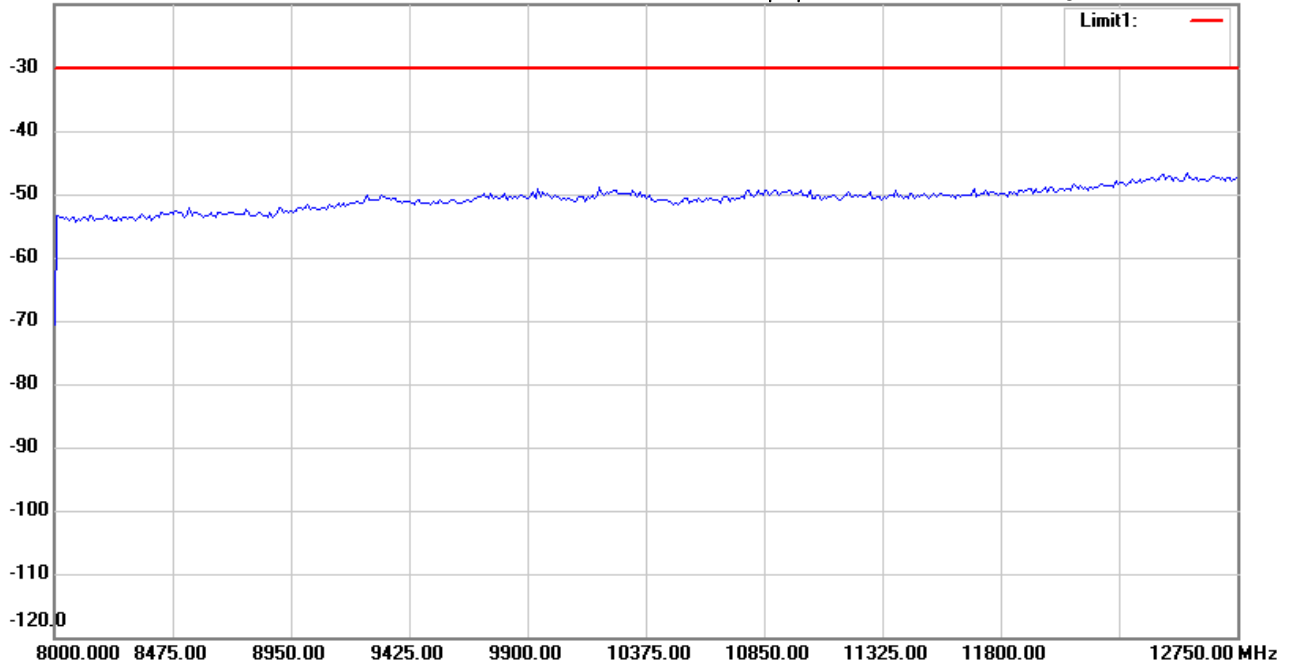

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 07:24:35

Humidity:60 %

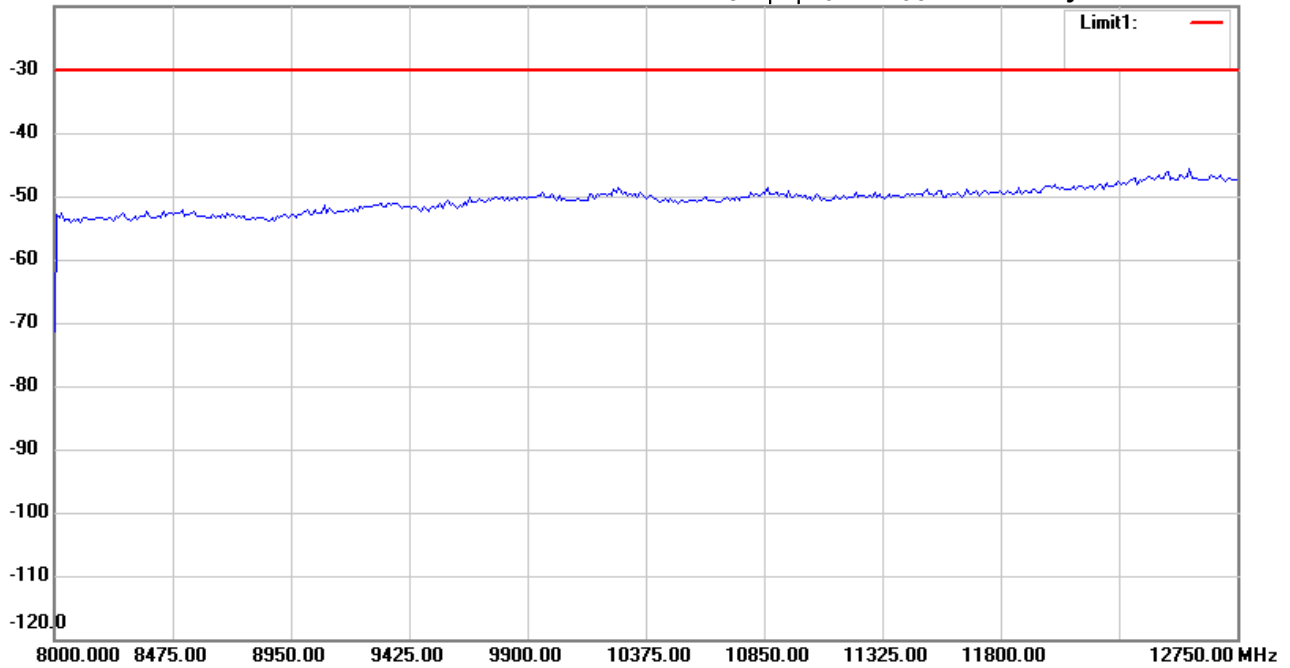

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX520.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:08:14

Humidity:60 %

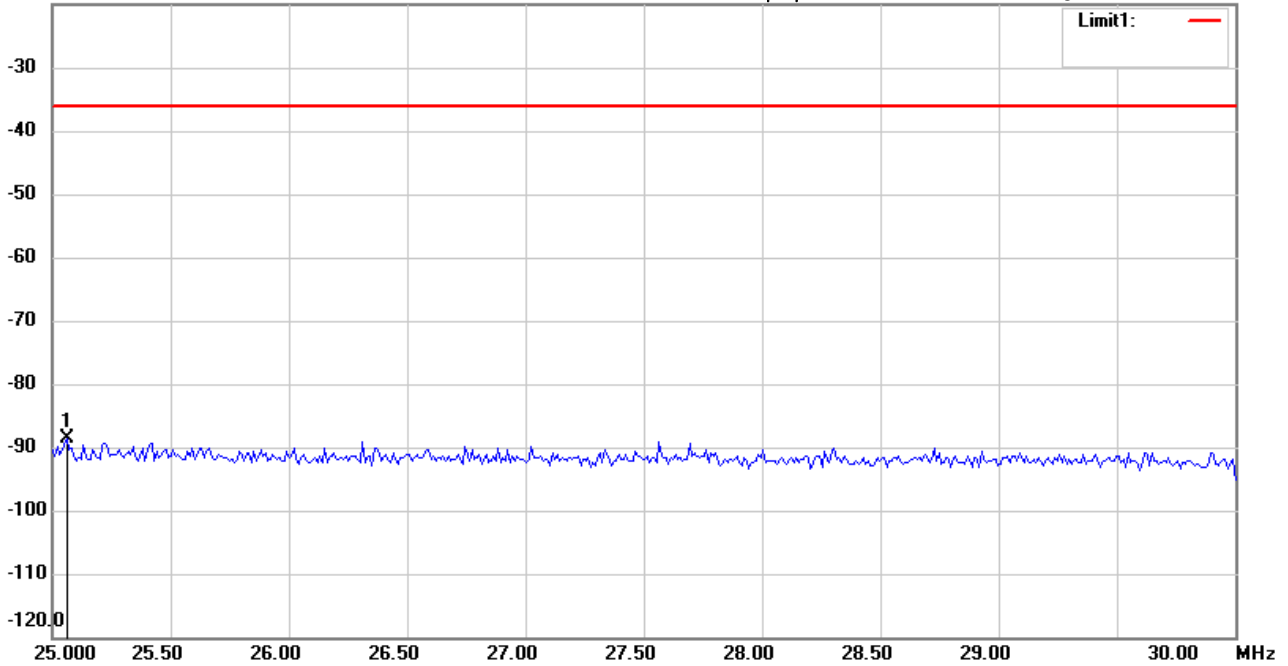

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0601	-114.42	peak	25.69	-88.73	-36.00	150	80	-52.73	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:41:22

Humidity:60 %

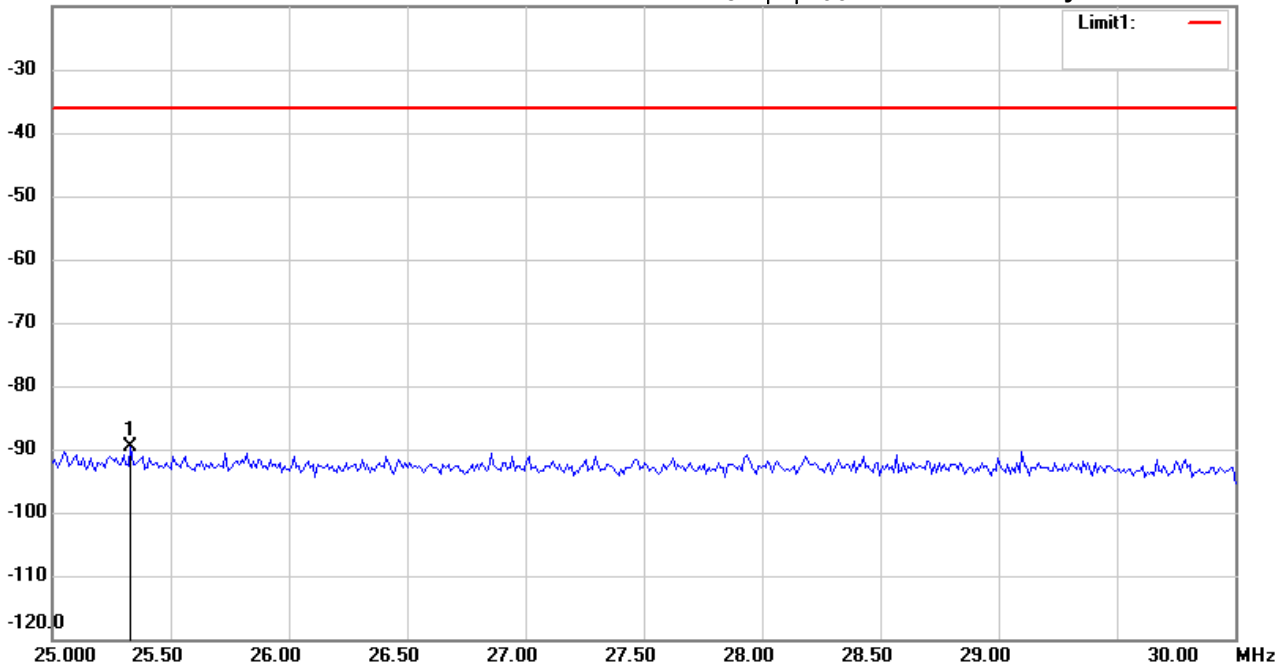

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.3306	-114.29	peak	24.60	-89.69	-36.00	150	200	-53.69	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:08:50

Humidity:60 %

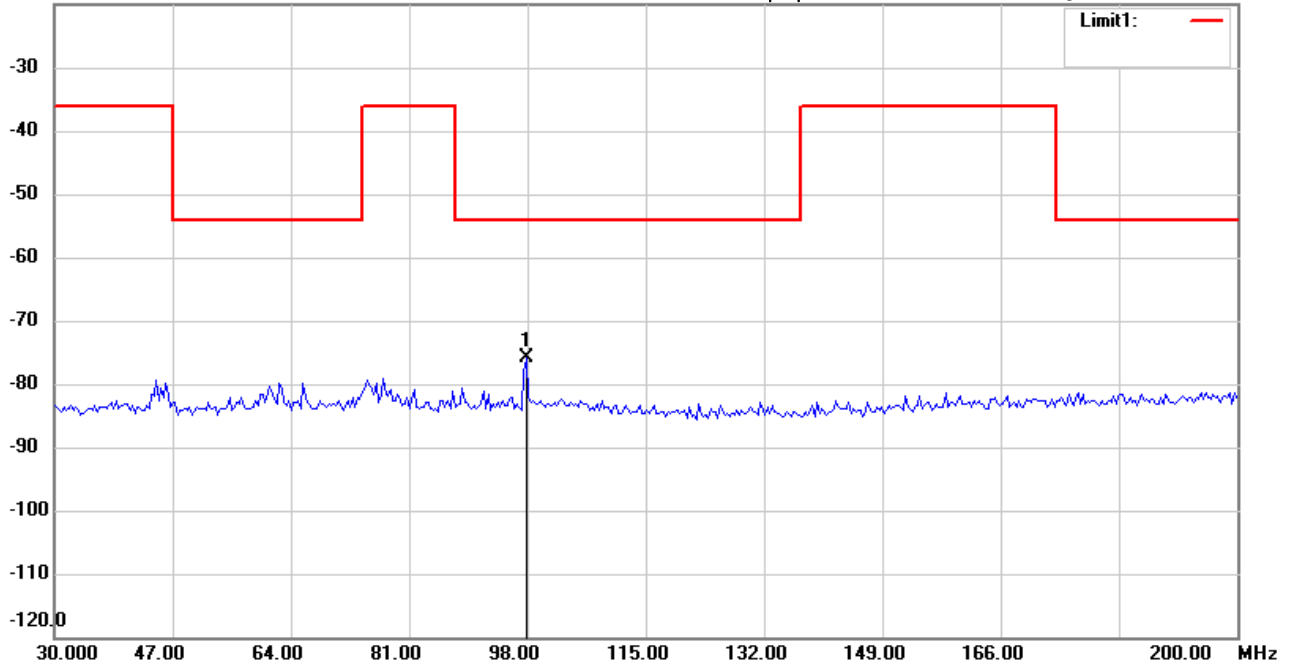

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	97.7956	-97.38	peak	21.44	-75.94	-54.00	150	120	-21.94	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:41:58

Humidity:60 %

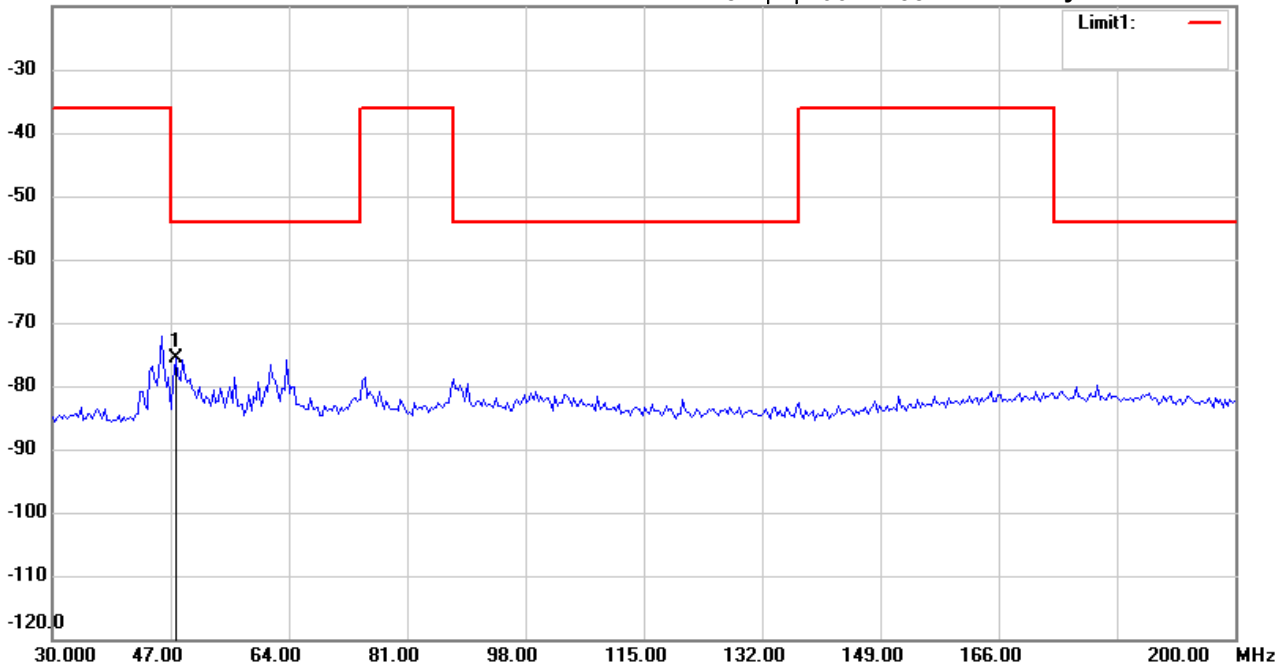

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.7154	-96.77	peak	21.19	-75.58	-54.00	150	300	-21.58	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#1


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 12:00:20

Humidity:60 %

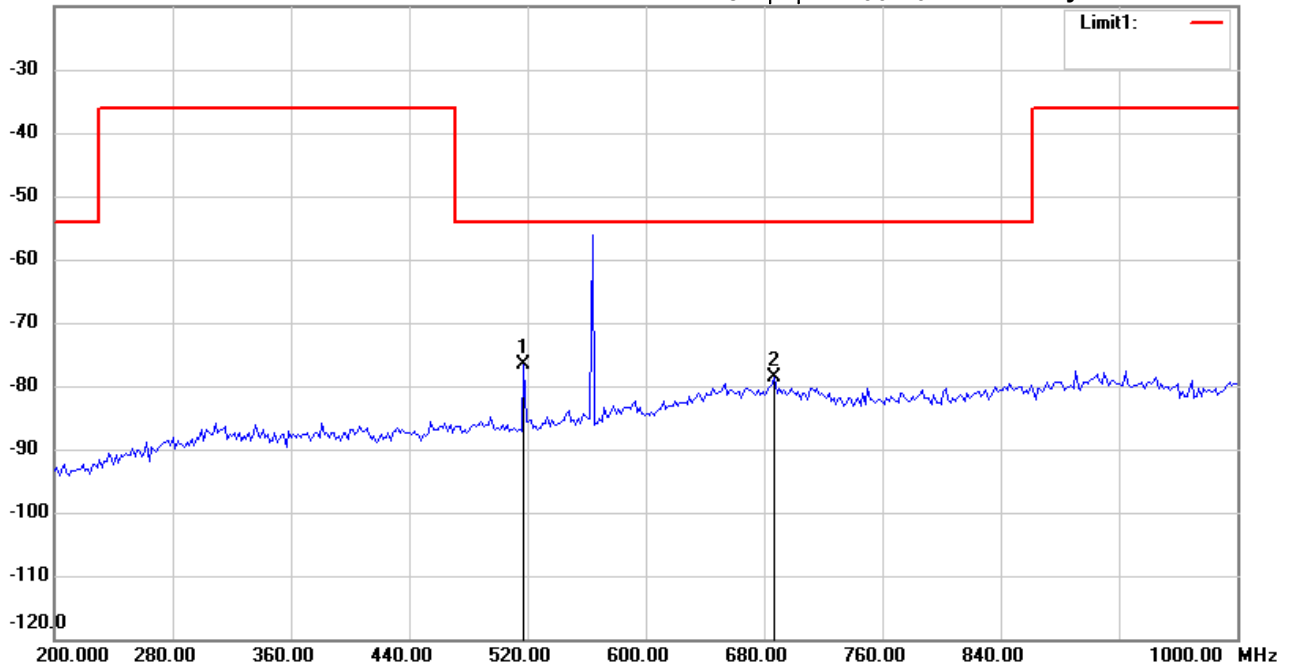

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	517.4348	-67.92	peak	-8.63	-76.55	-54.00	150	120	-22.55	
	687.3746	-75.94	peak	-2.60	-78.54	-54.00	150	130	-24.54	





Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:17:35

Humidity:60 %

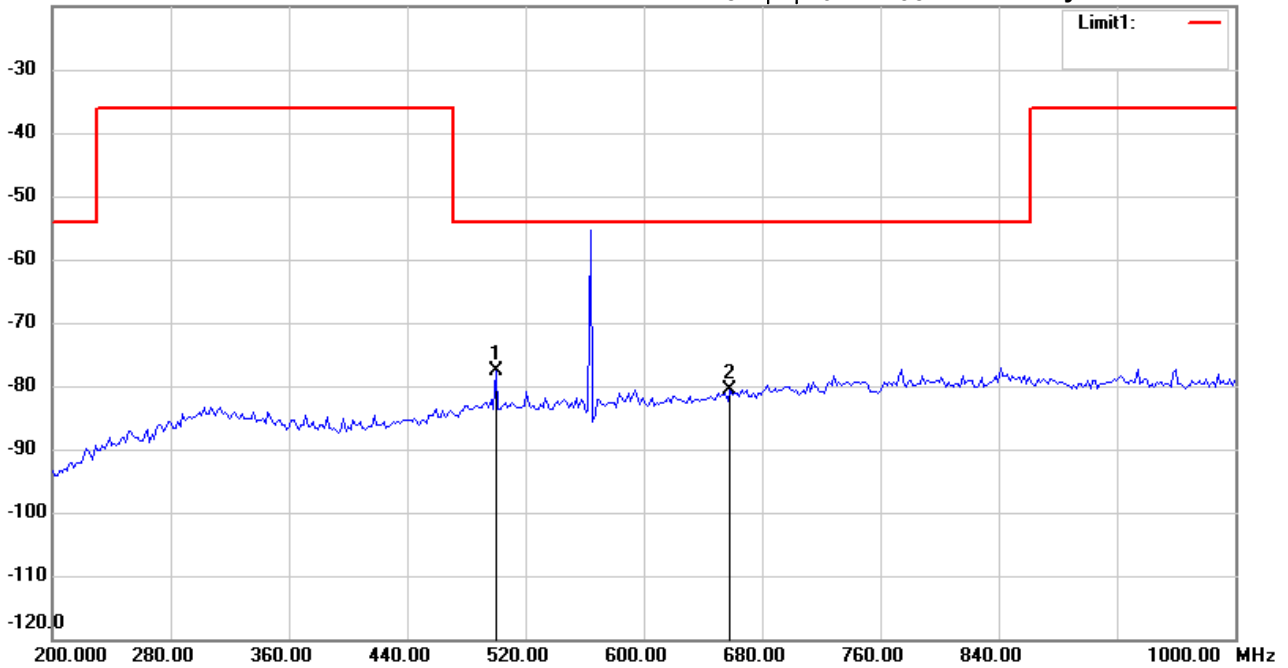

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	499.7995	-70.84	peak	-6.72	-77.56	-54.00	150	100	-23.56	
	658.5170	-76.49	peak	-4.22	-80.71	-54.00	150	220	-26.71	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:23:08

Humidity:60 %

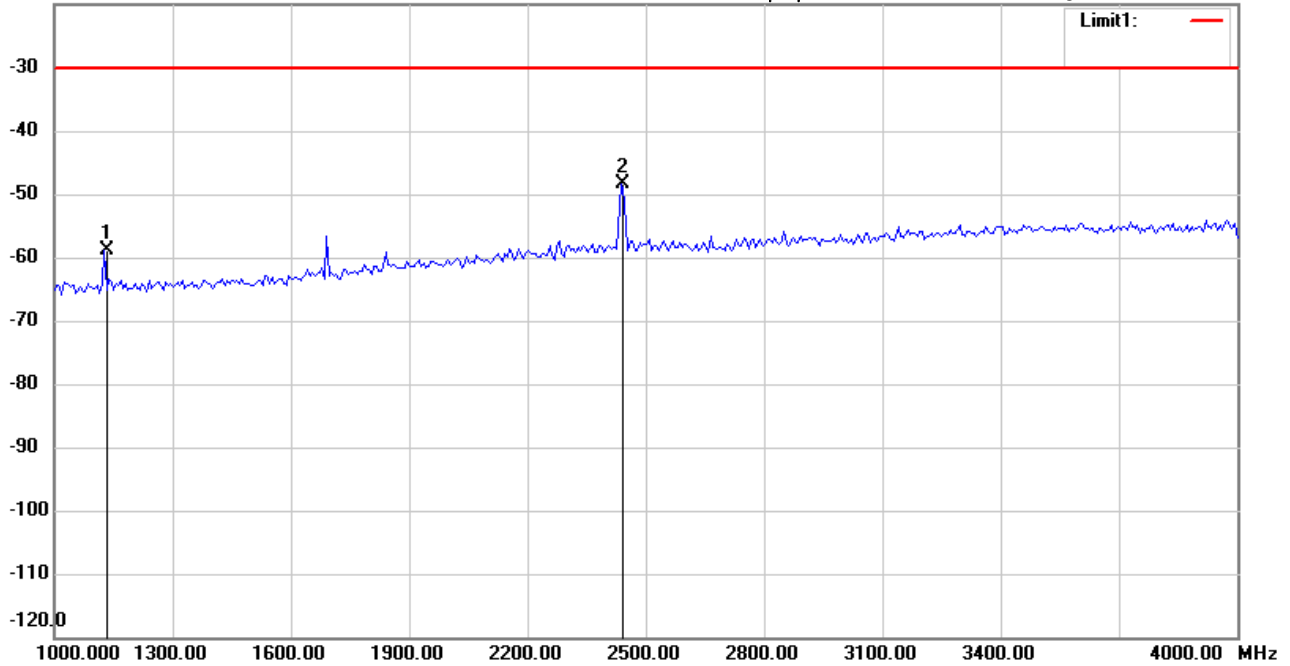

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1126.253	-56.62	peak	-2.16	-58.78	-30.00	150	100	-28.78	
*	2436.874	-51.82	peak	3.46	-48.36	-30.00	150	250	-18.36	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:33:13

Humidity:60 %

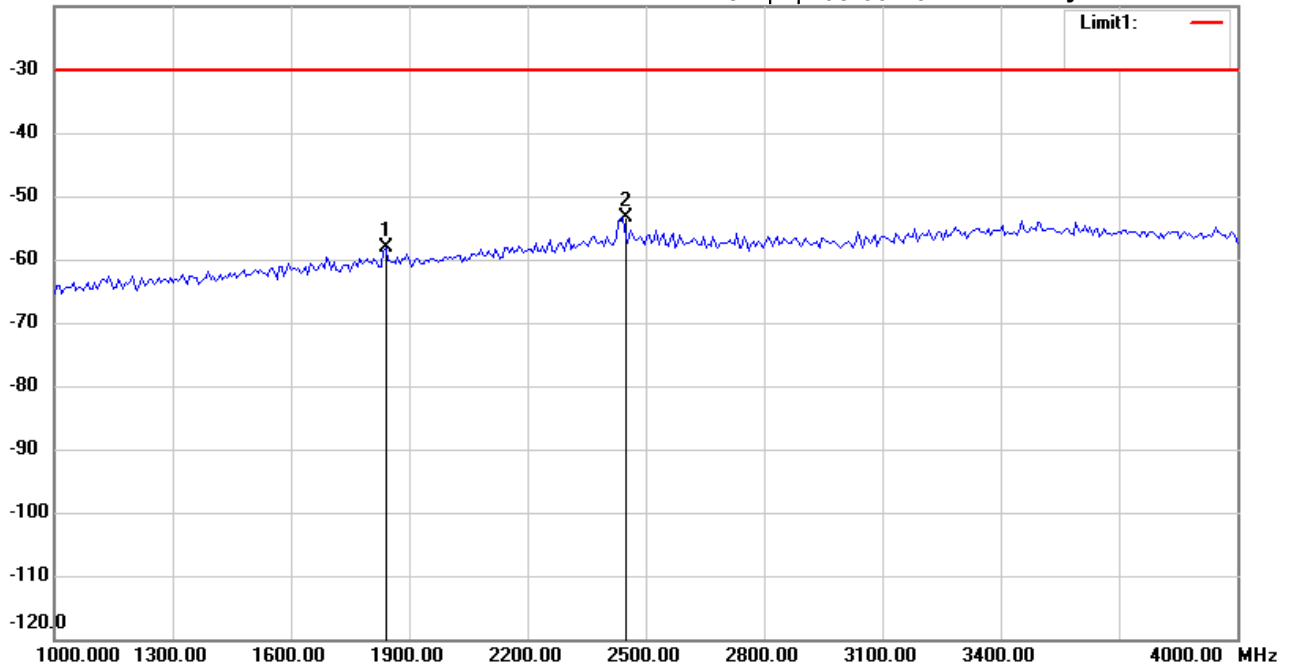

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1841.683	-59.51	peak	1.50	-58.01	-30.00	150	230	-28.01	
*	2442.886	-58.44	peak	5.07	-53.37	-30.00	150	100	-23.37	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:23:48

Humidity:60 %

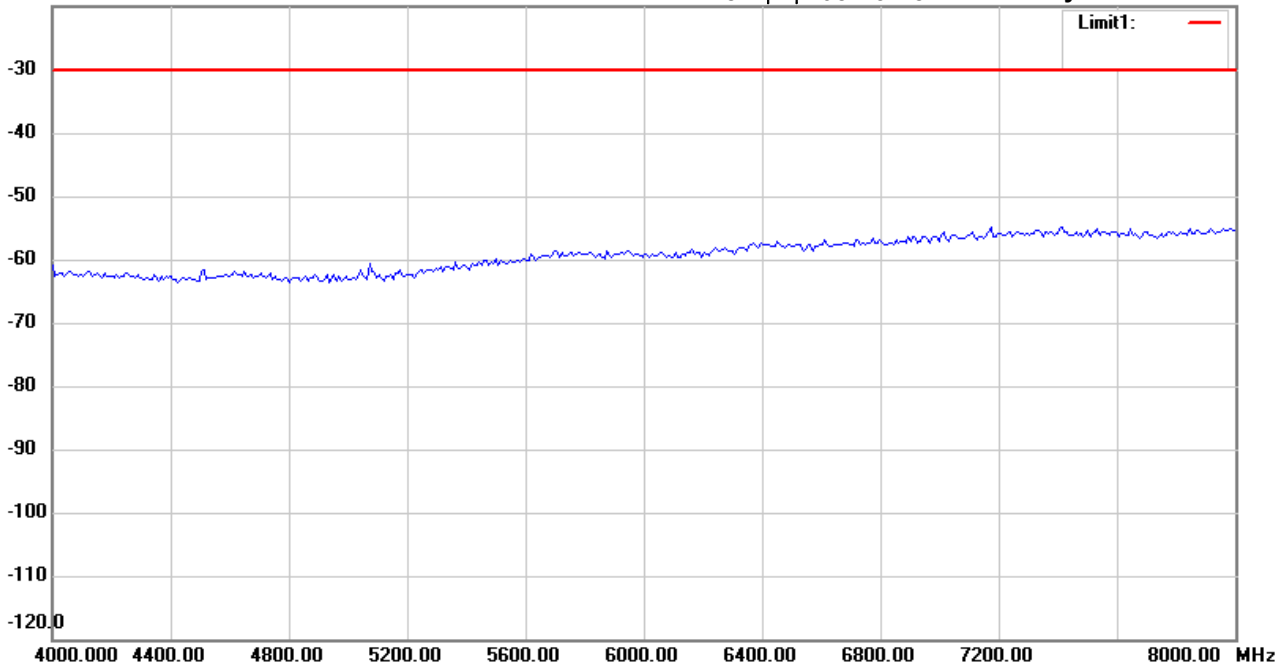

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:33:49

Humidity:60 %

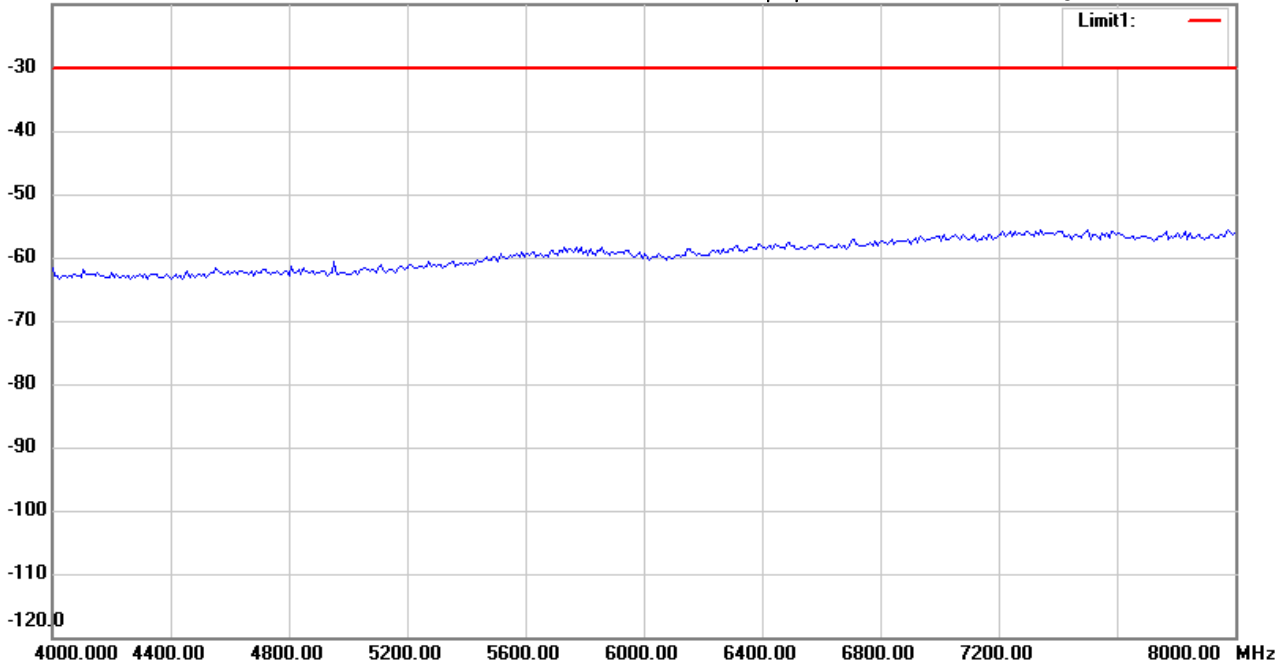

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:24:41

Humidity:60 %

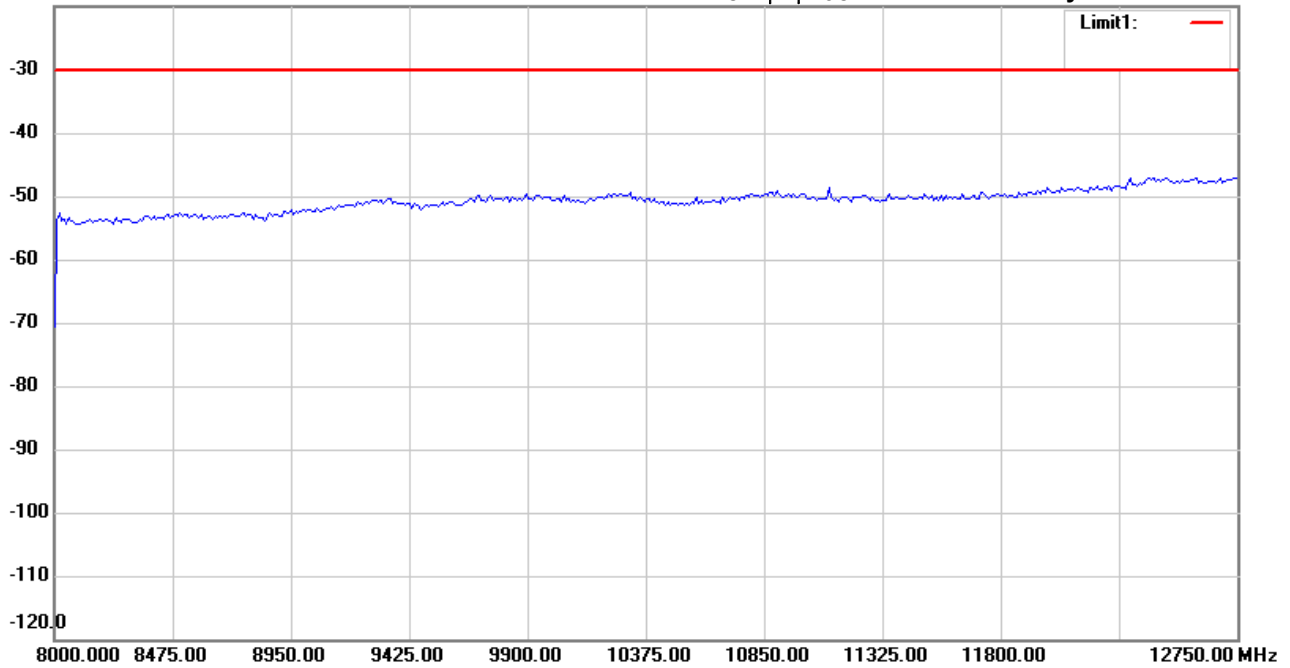

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:34:33

Humidity:60 %

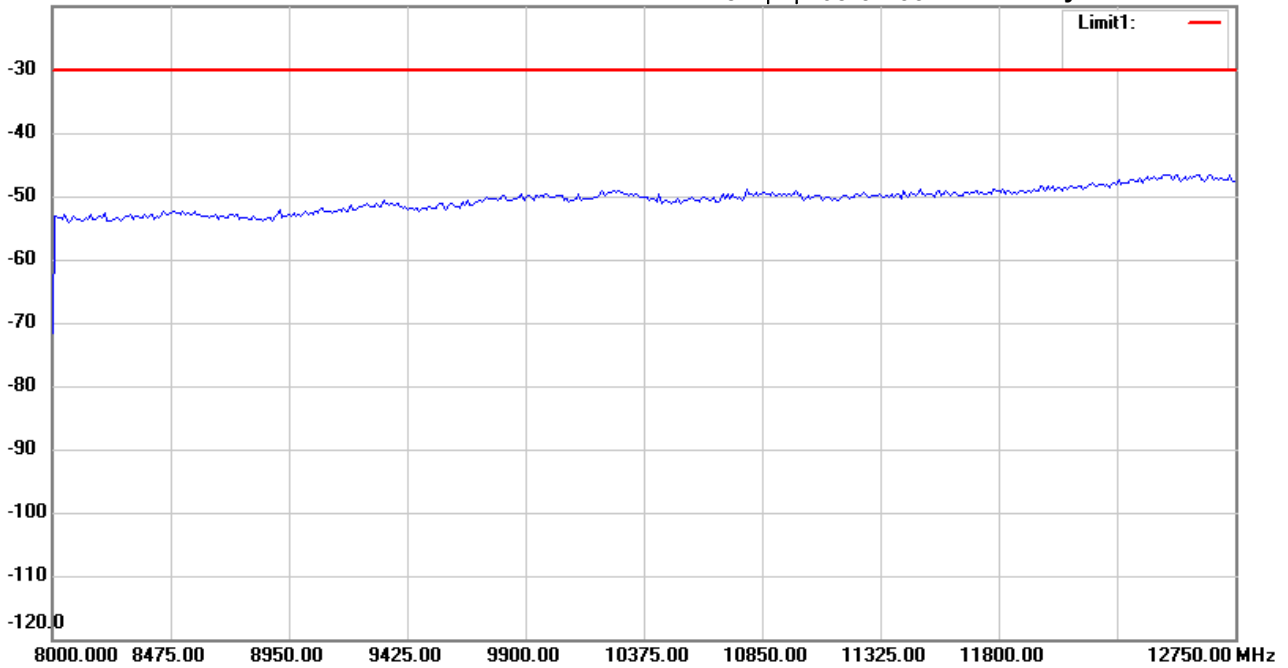

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX564.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:09:55

Humidity:60 %

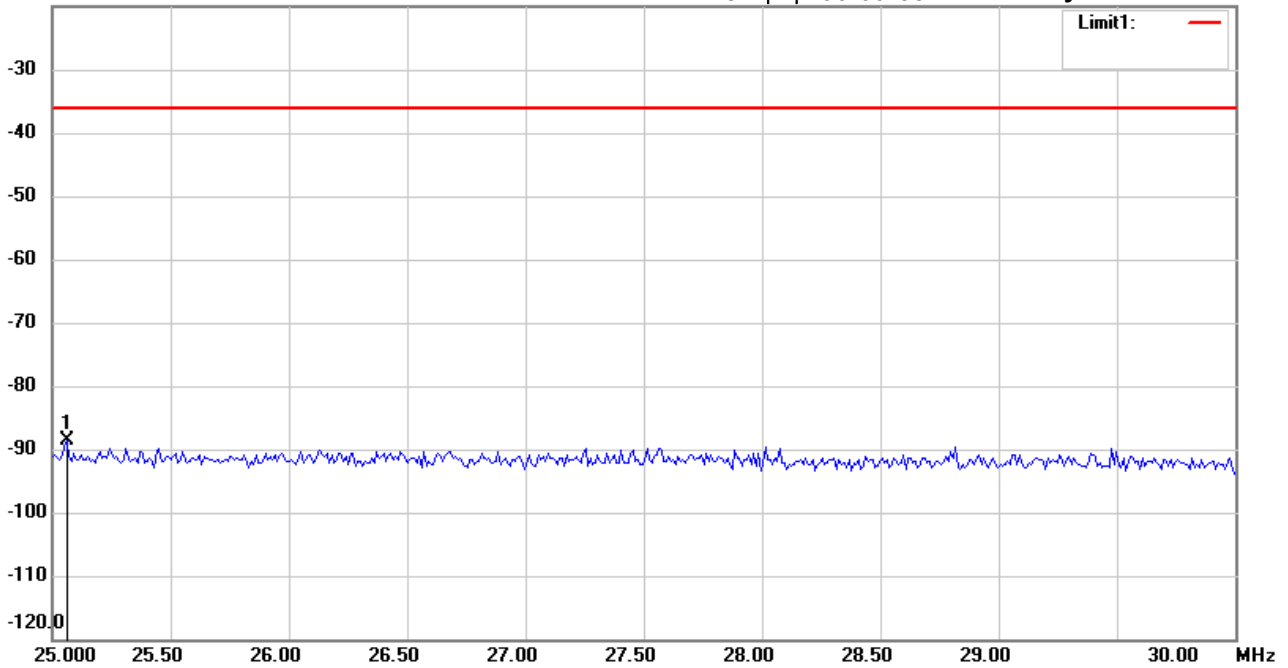

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0601	-114.38	peak	25.69	-88.69	-36.00	150	300	-52.69	

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:35:09

Humidity:60 %

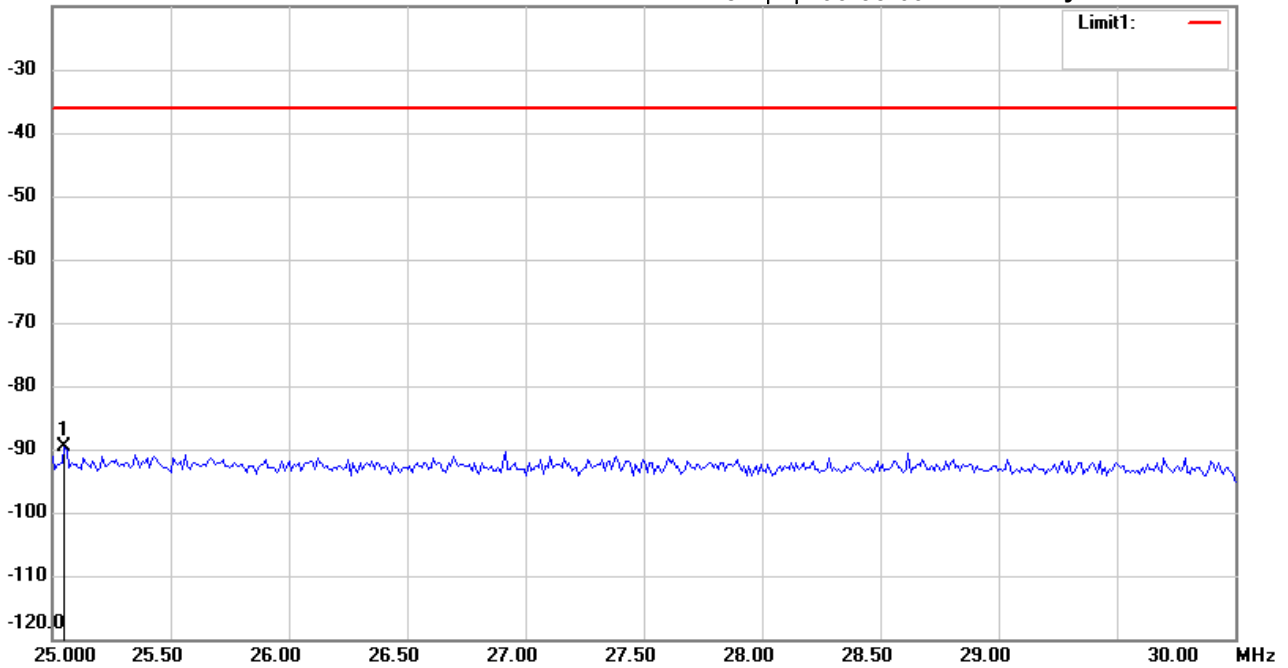

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-114.38	peak	24.65	-89.73	-36.00	150	80	-53.73	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:10:31

Humidity:60 %

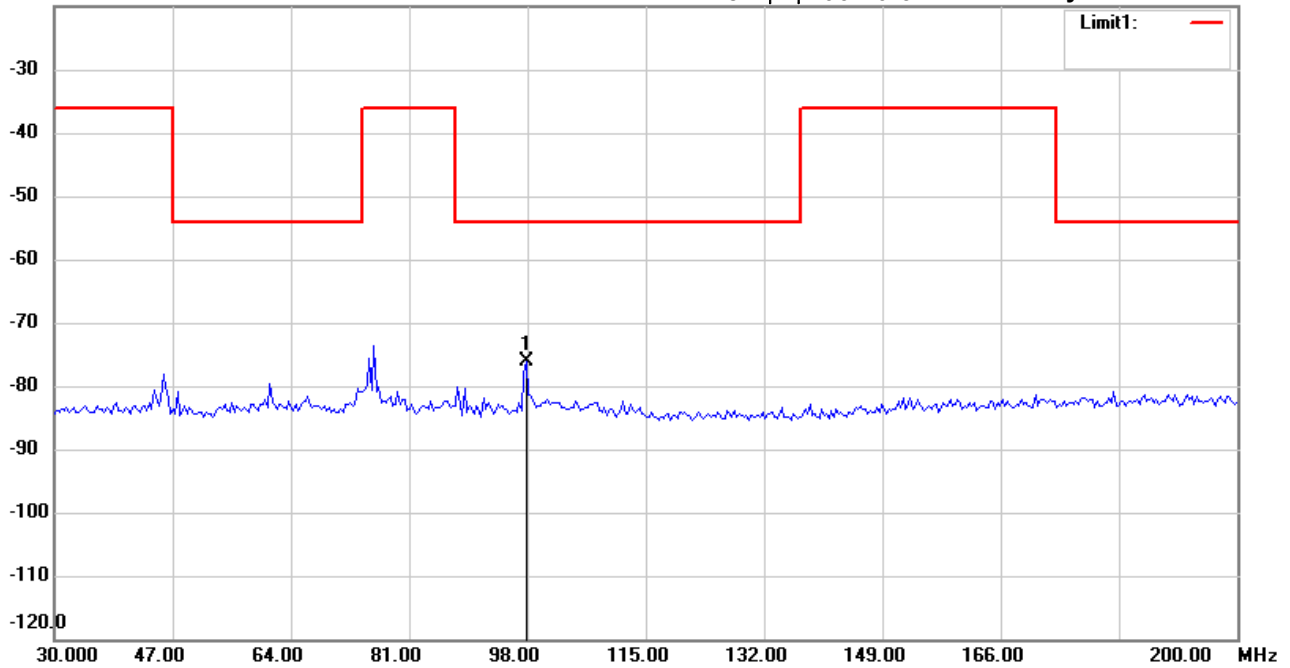

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

EUT : W6M21810-18537

M/N:

Test Mode : TX607.875MHz

Note :

Polarization: *Horizontal*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	97.7956	-97.50	peak	21.44	-76.06	-54.00	150	120	-22.06	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:35:44

Humidity:60 %

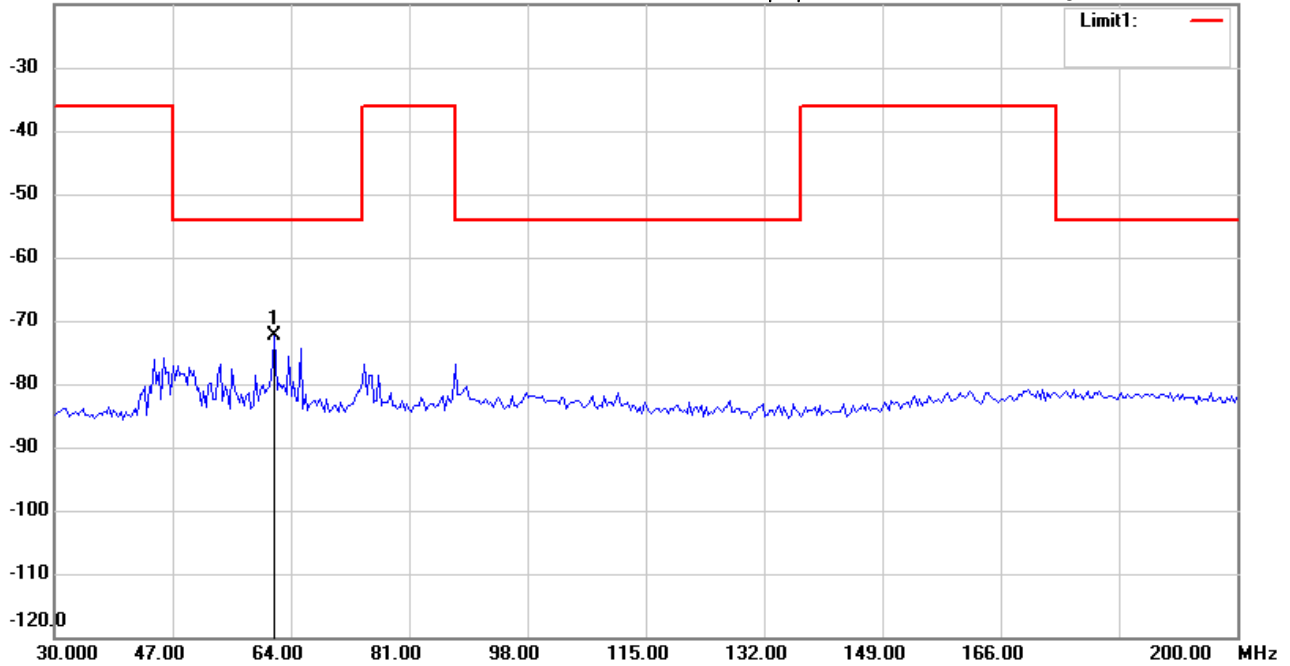

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

EUT : W6M21810-18537

M/N:

Test Mode : TX607.875MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	61.6834	-93.81	peak	21.50	-72.31	-54.00	150	230	-18.31	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#1


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:40:38

Humidity:60 %

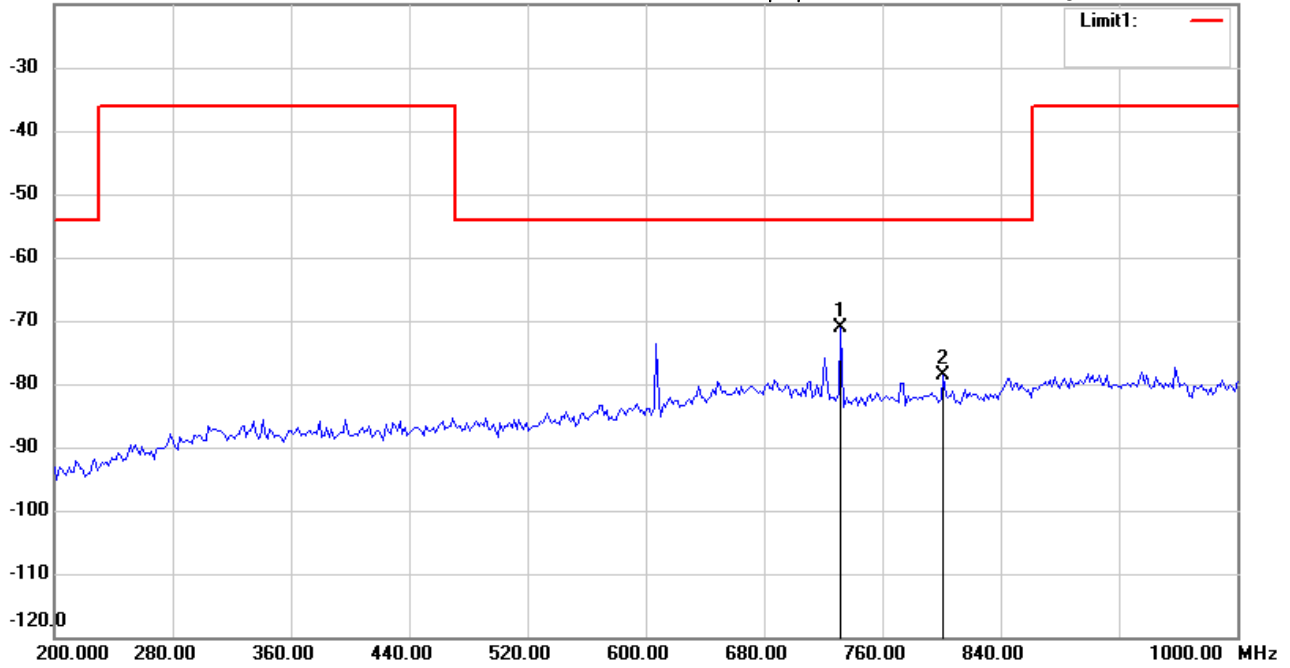

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	732.2644	-67.29	peak	-3.93	-71.22	-54.00	150	300	-17.22	
	801.2024	-74.50	peak	-4.12	-78.62	-54.00	150	120	-24.62	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:44:04

Humidity:60 %

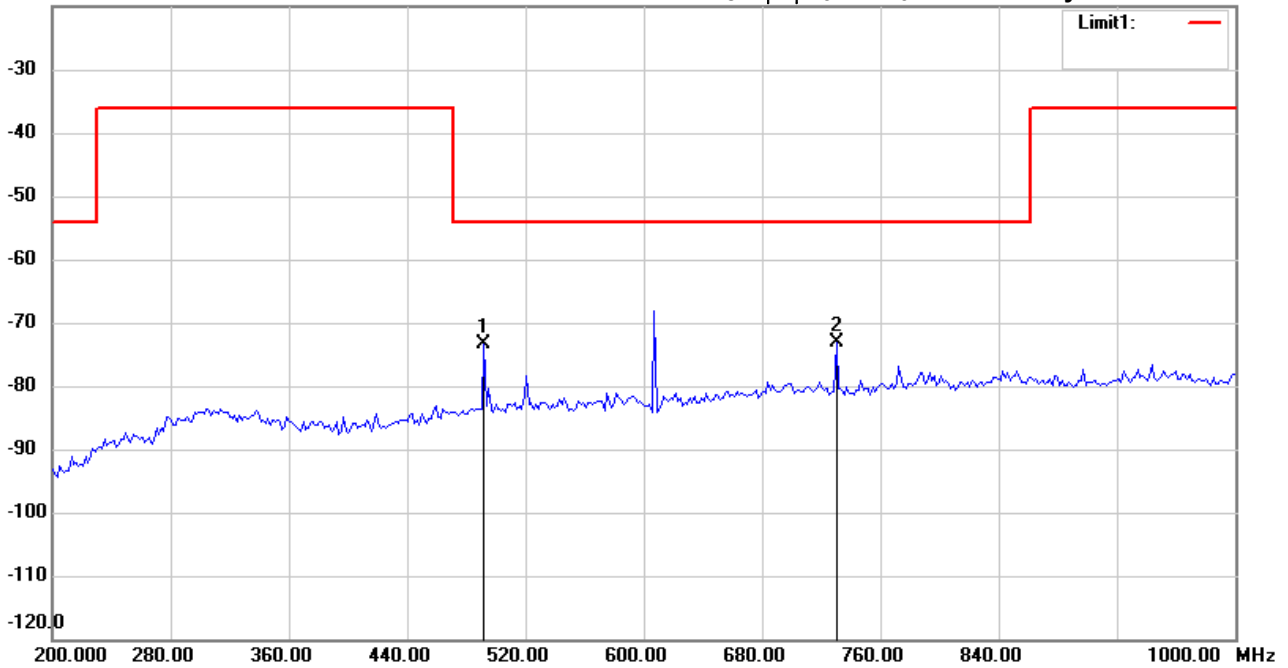

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	491.7835	-66.27	peak	-7.02	-73.29	-54.00	150	300	-19.29	
*	730.6612	-69.75	peak	-3.45	-73.20	-54.00	150	160	-19.20	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:09:43

Humidity:60 %

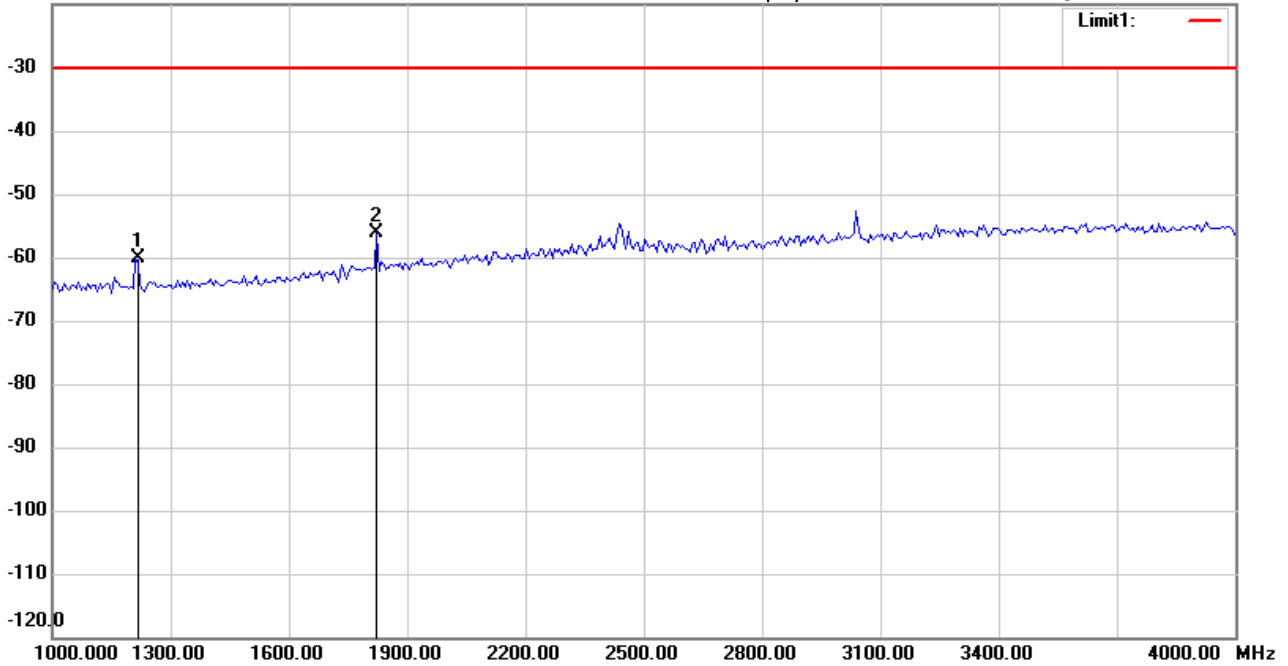

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1210.421	-58.03	peak	-2.17	-60.20	-30.00	150	270	-30.20	
*	1823.647	-55.97	peak	-0.06	-56.03	-30.00	150	300	-26.03	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:25:15

Humidity:60 %

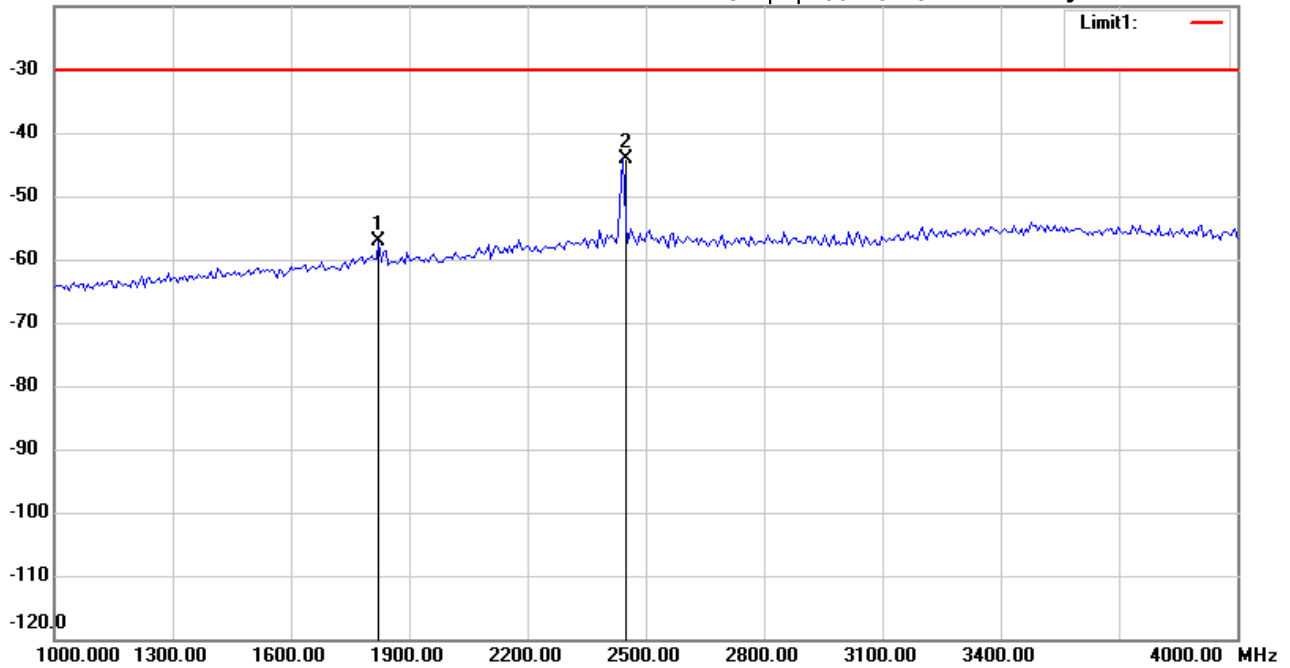

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1823.647	-58.50	peak	1.41	-57.09	-30.00	150	100	-27.09	
*	2442.886	-49.30	peak	5.07	-44.23	-30.00	150	210	-14.23	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:16:47

Humidity:60 %

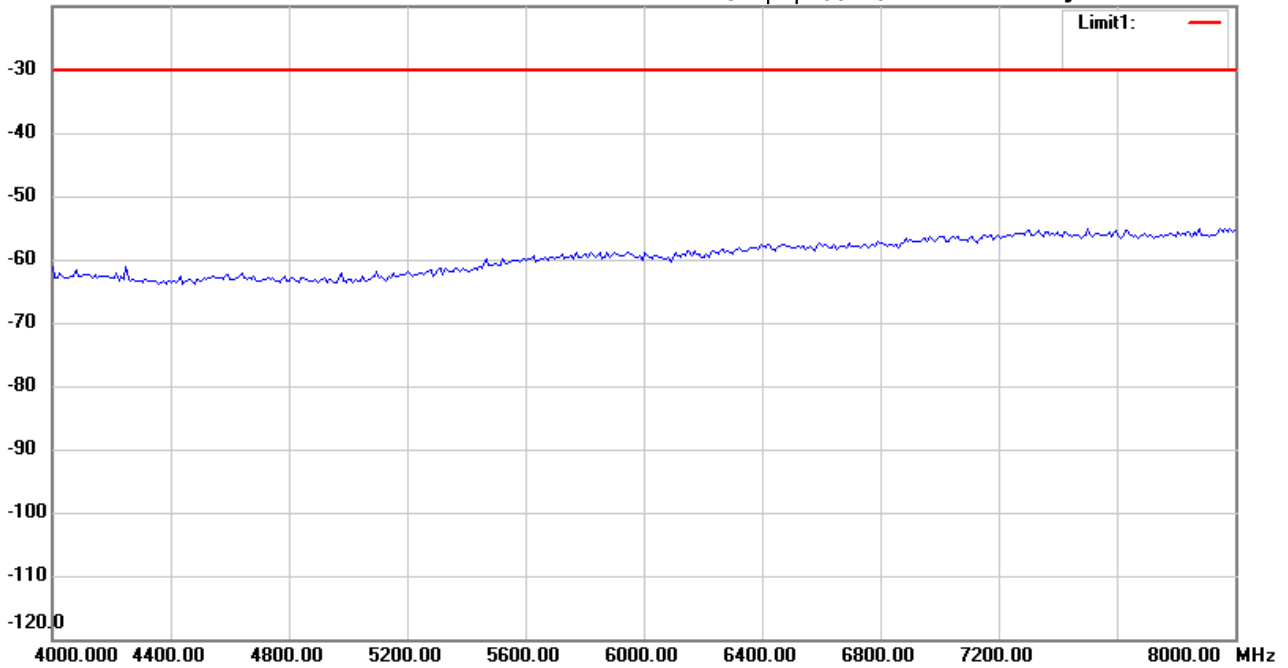

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:26:28

Humidity:60 %

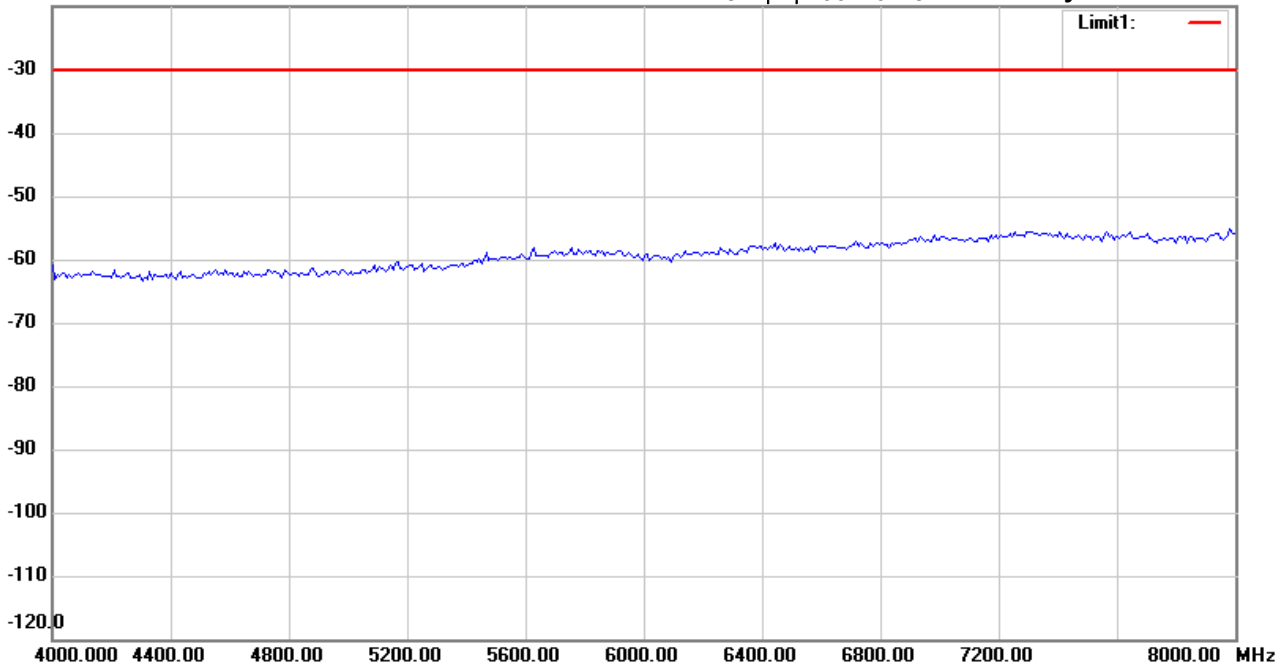

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:17:59

Humidity:60 %

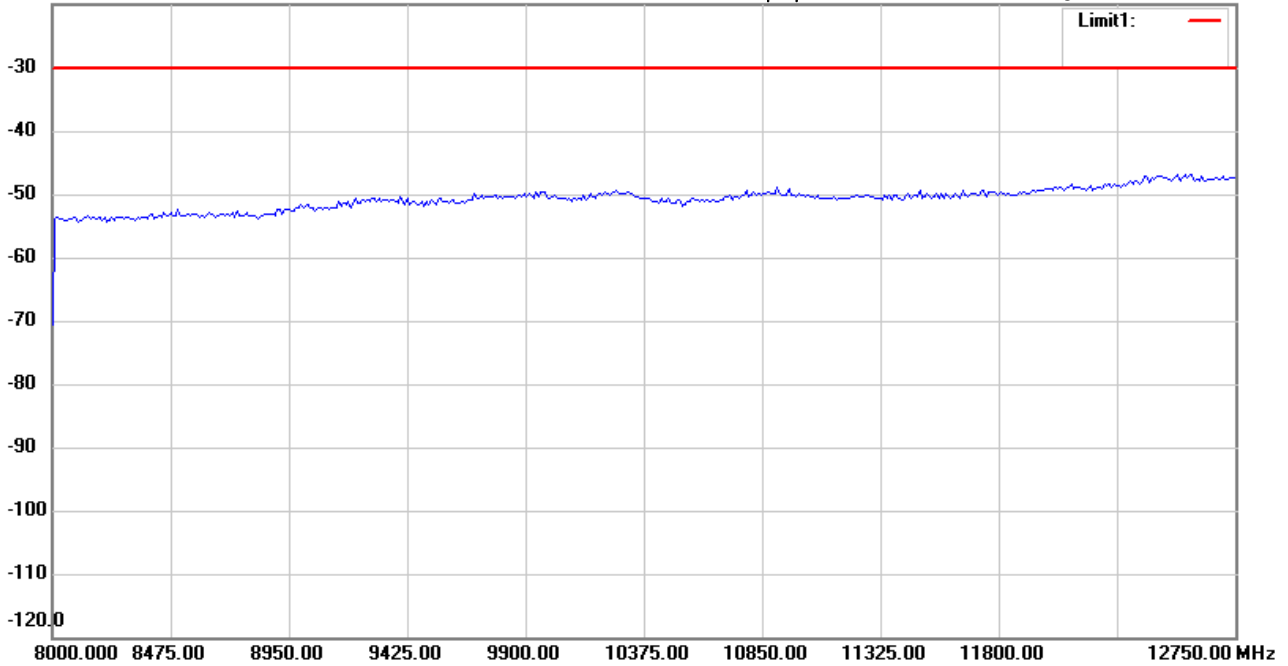

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:27:16

Humidity:60 %

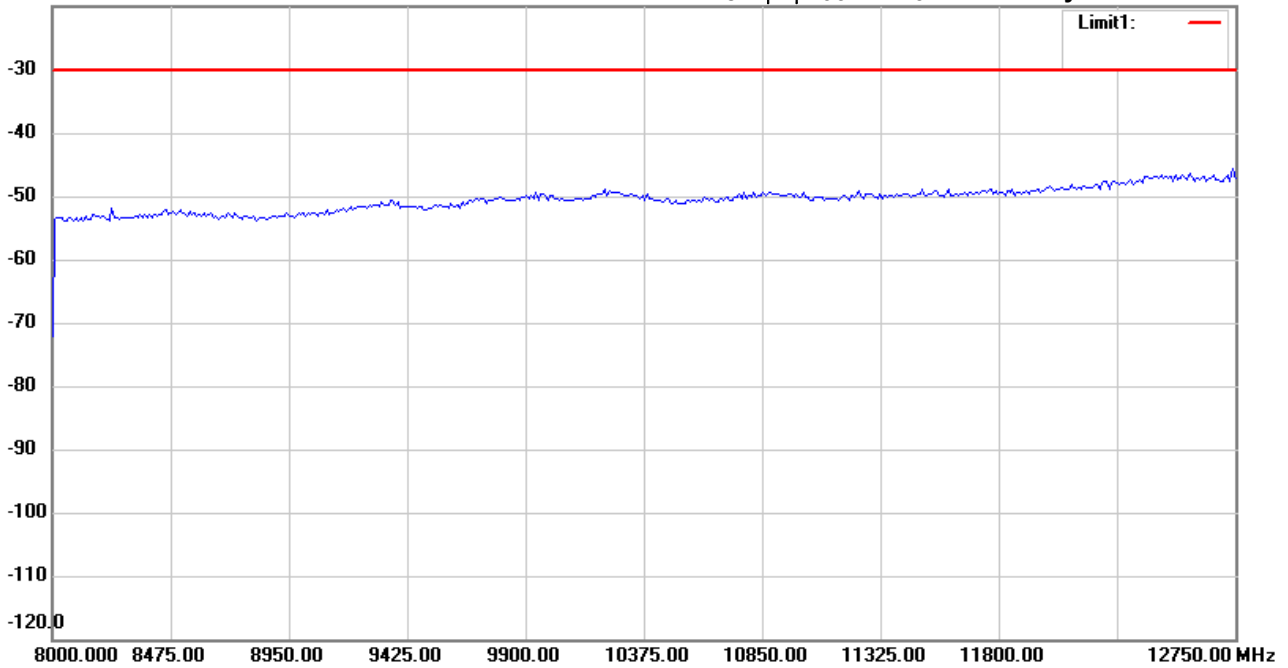

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:12:00

Humidity:60 %

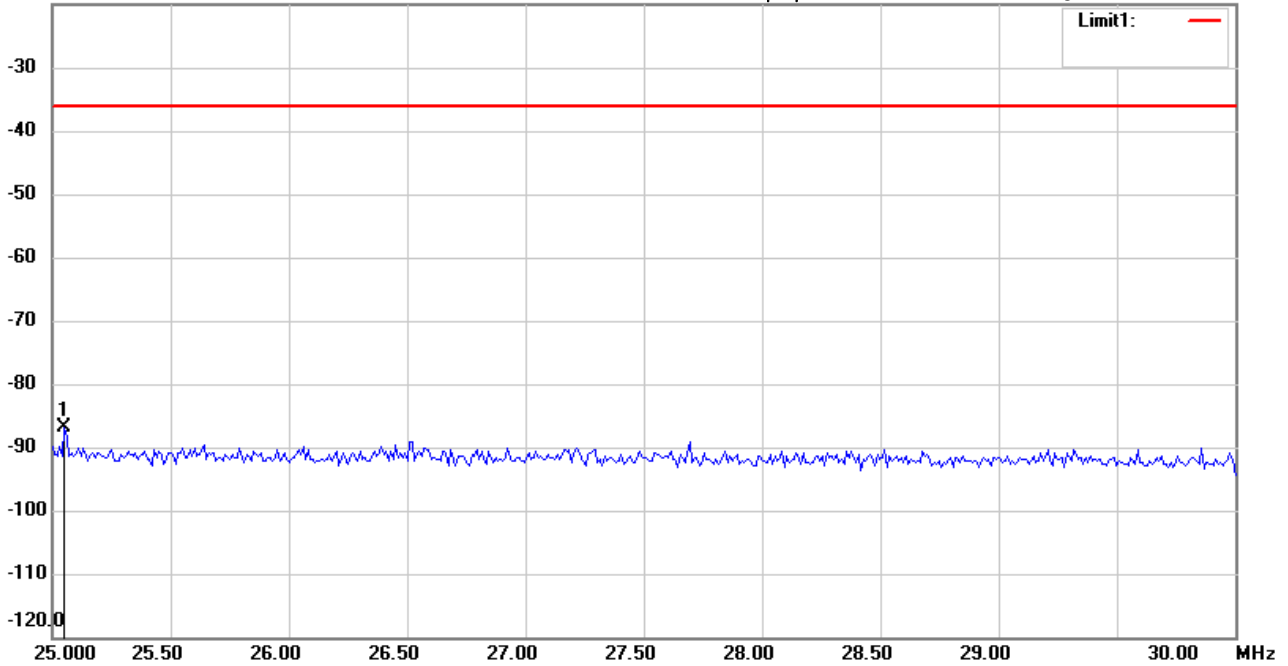

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-112.65	peak	25.69	-86.96	-36.00	150	200	-50.96	

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:33:33

Humidity:60 %

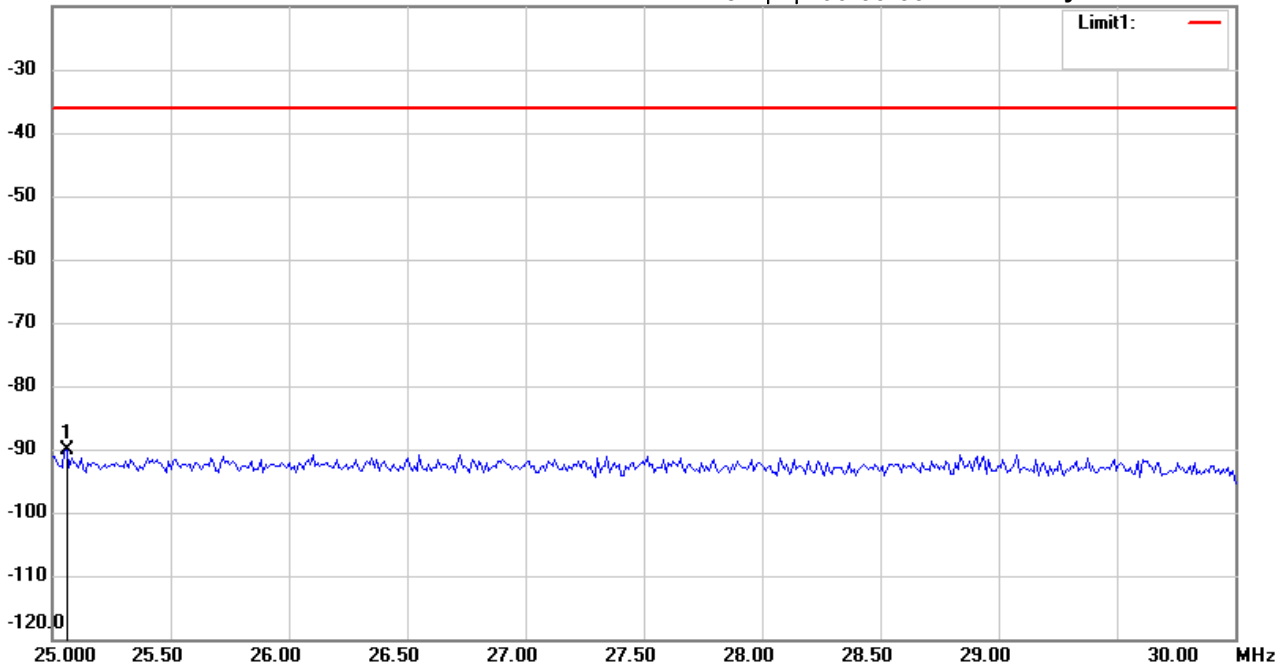

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0601	-114.65	peak	24.64	-90.01	-36.00	150	300	-54.01	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:12:36

Humidity:60 %

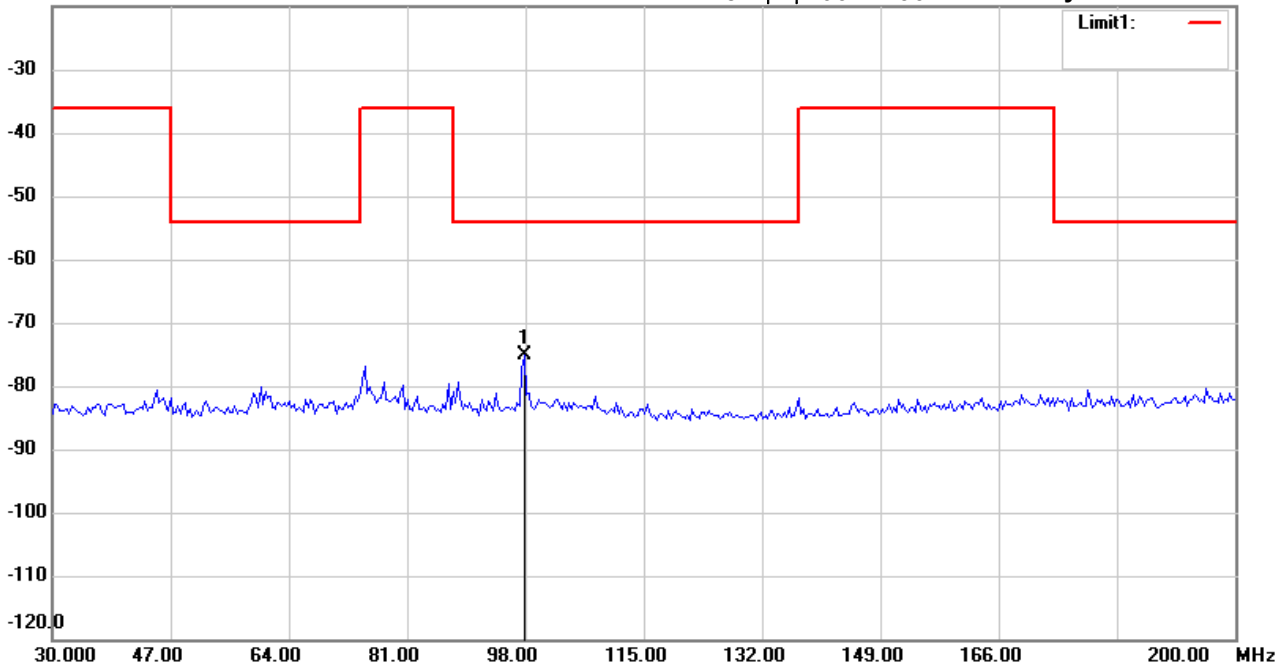

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	97.7956	-96.49	peak	21.44	-75.05	-54.00	150	80	-21.05	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:34:09

Humidity:60 %

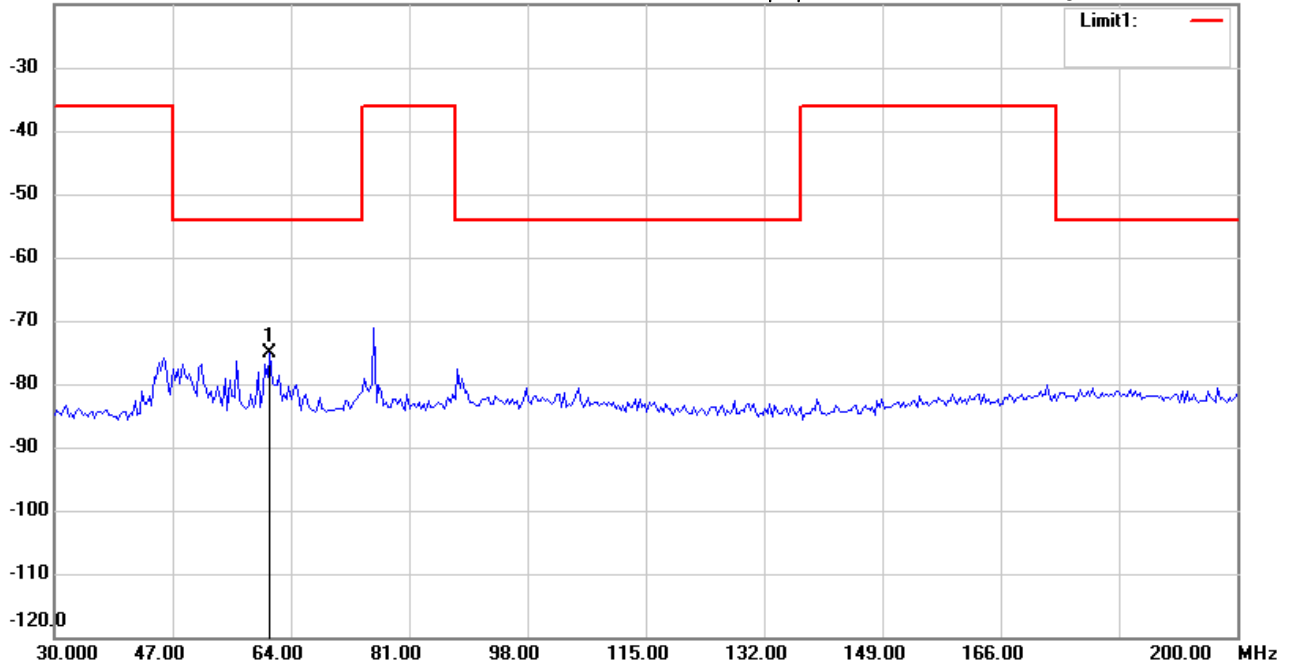

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	61.0020	-96.60	peak	21.54	-75.06	-54.00	150	210	-21.06	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#1


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:32:02

Humidity:60 %

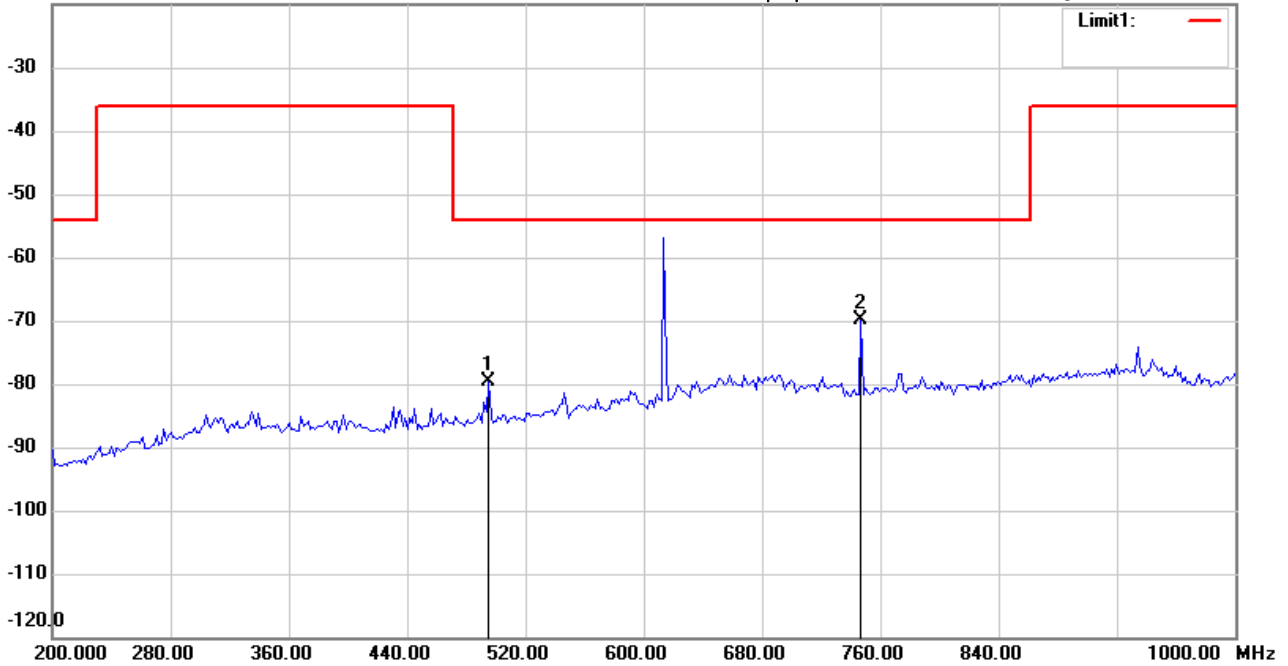

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	494.9900	-70.34	peak	-9.26	-79.60	-54.00	150	100	-25.60	
*	746.6933	-65.29	peak	-4.53	-69.82	-54.00	150	250	-15.82	





Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:34:50

Humidity:60 %

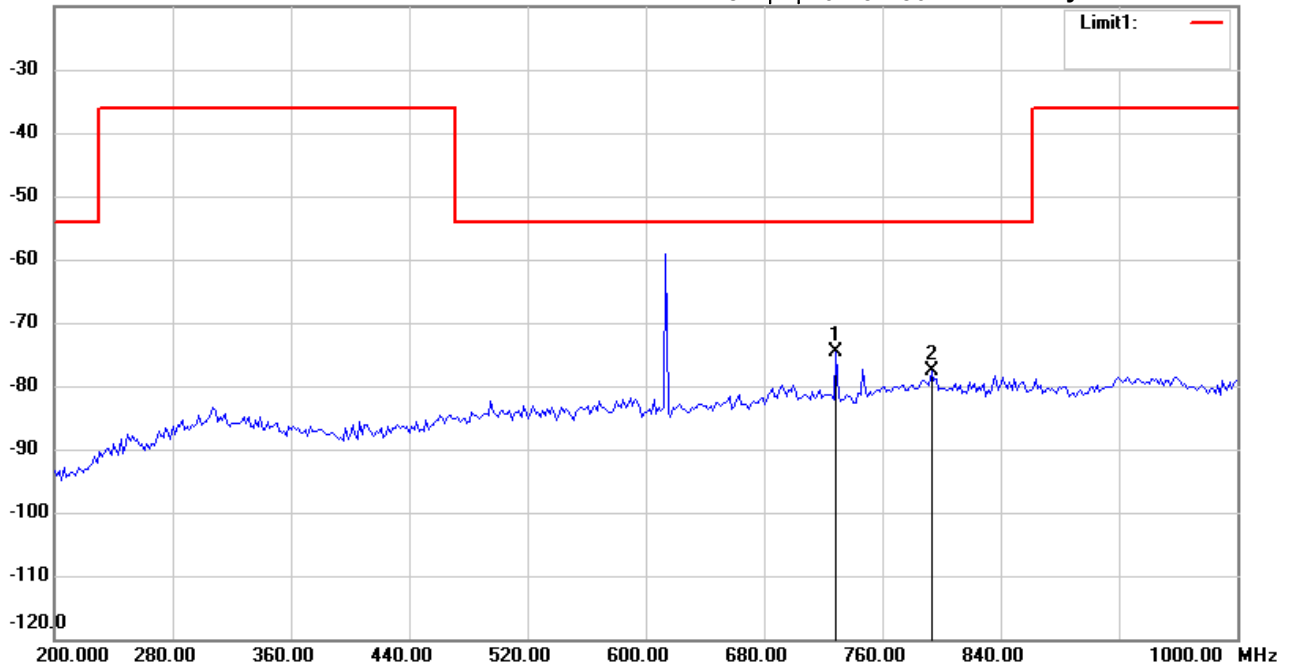

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	729.0580	-71.29	peak	-3.44	-74.73	-54.00	150	210	-20.73	
	793.1864	-74.75	peak	-2.84	-77.59	-54.00	150	80	-23.59	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:58:55

Humidity:60 %

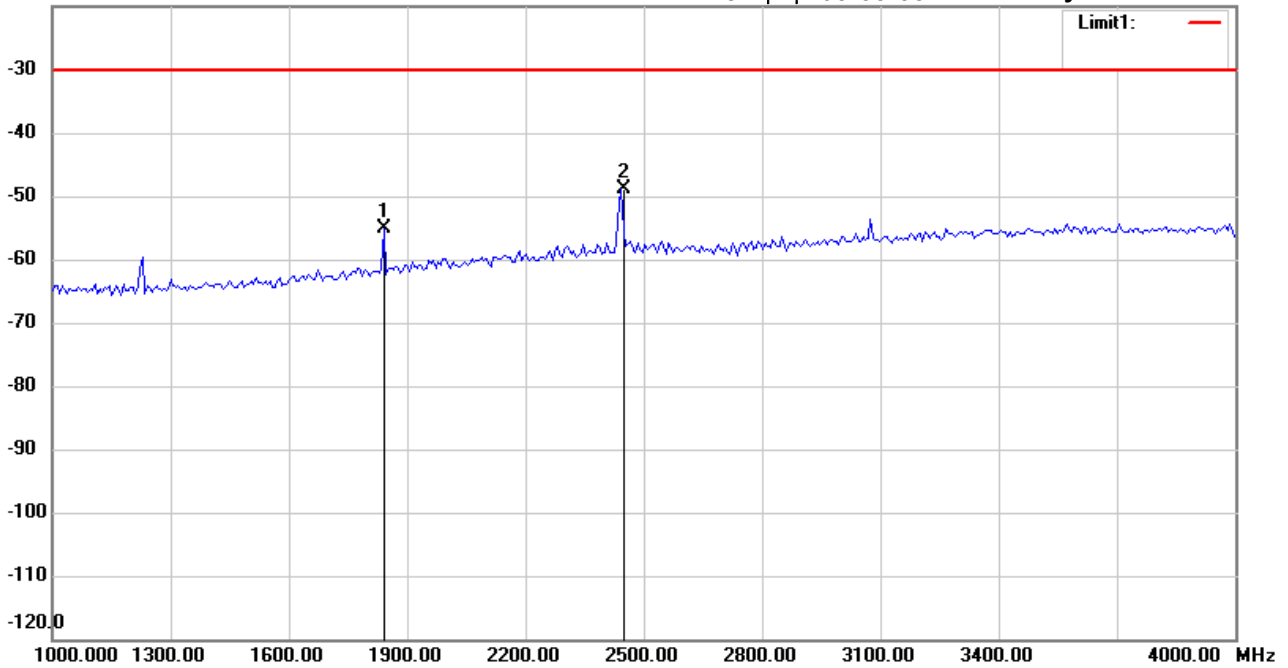

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1841.683	-55.15	peak	0.06	-55.09	-30.00	150	230	-25.09	
*	2442.886	-52.37	peak	3.49	-48.88	-30.00	150	100	-18.88	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:05:19

Humidity:60 %

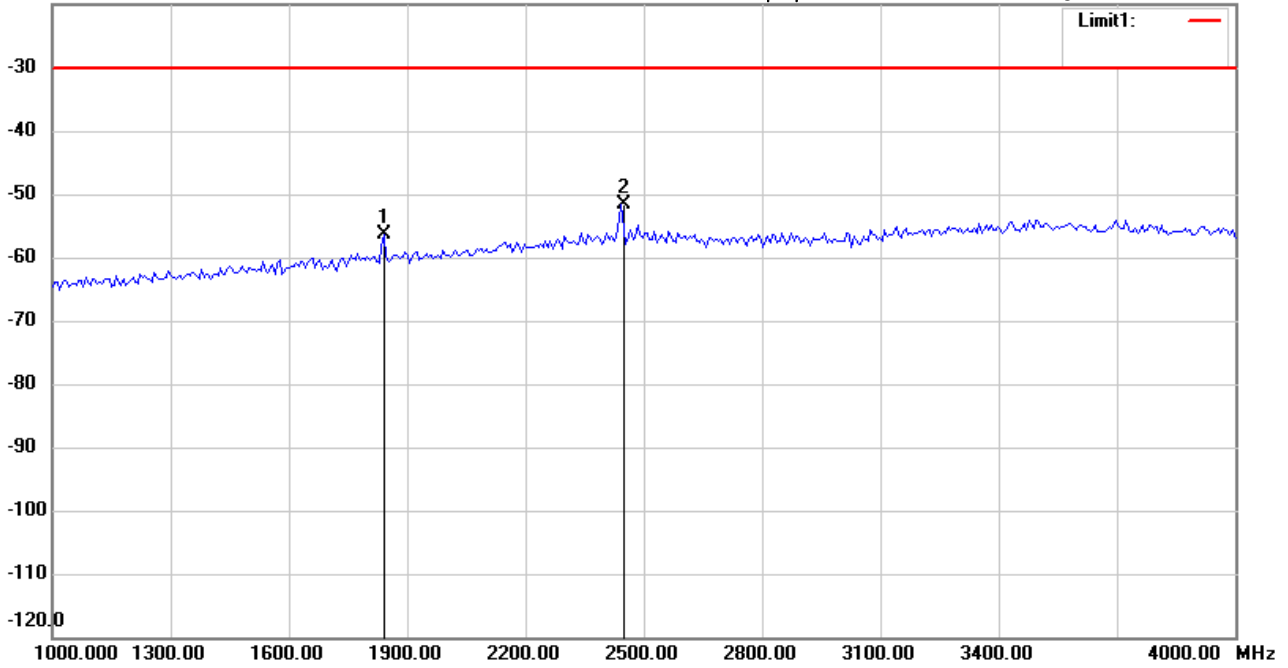

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1841.683	-57.88	peak	1.50	-56.38	-30.00	150	210	-26.38	
*	2442.886	-56.77	peak	5.07	-51.70	-30.00	150	60	-21.70	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:59:34

Humidity:60 %

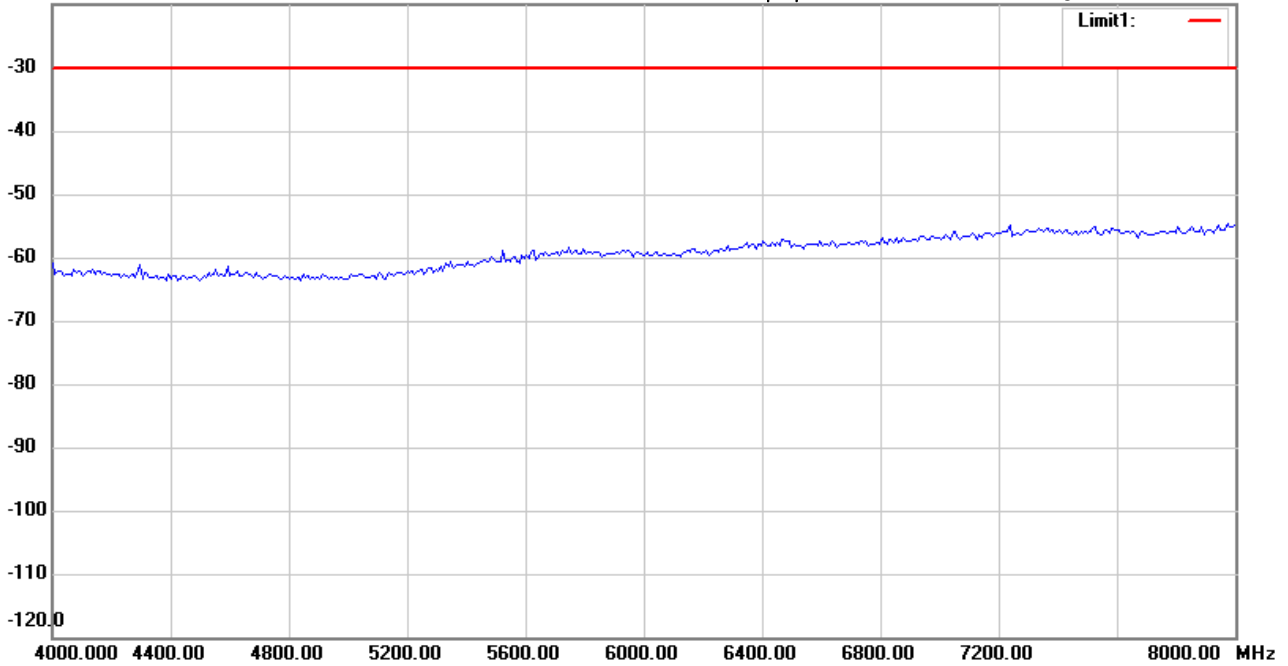

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:05:59

Humidity:60 %

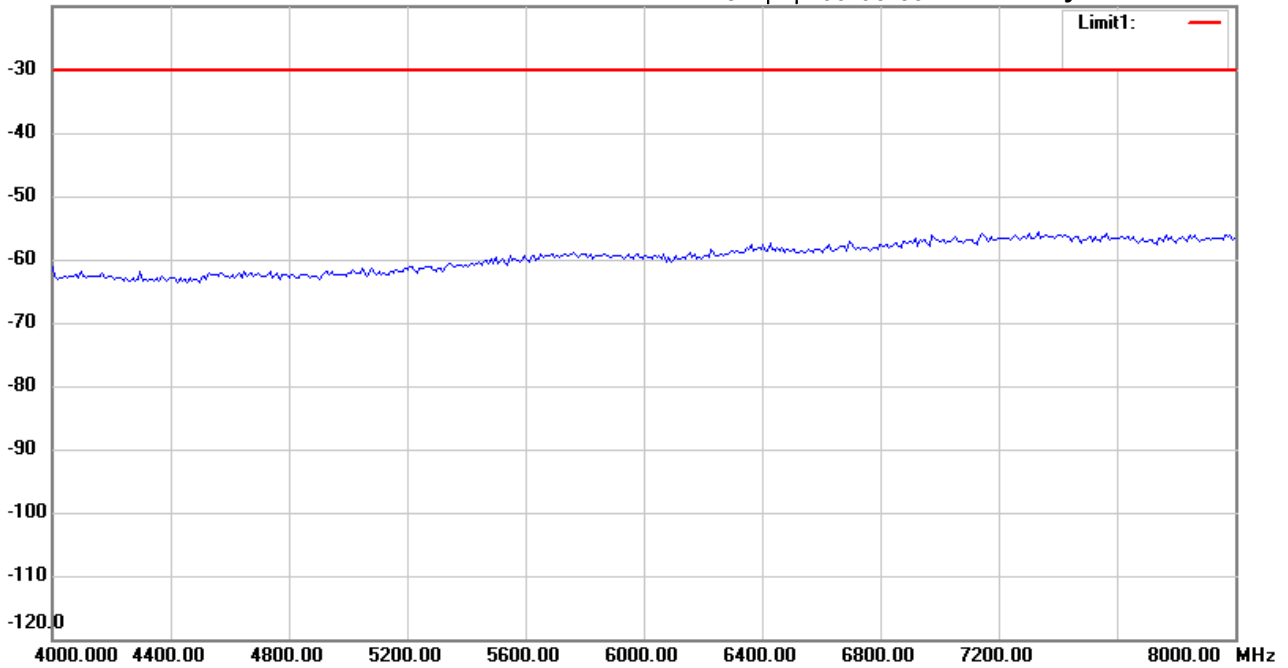

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:03:29

Humidity:60 %

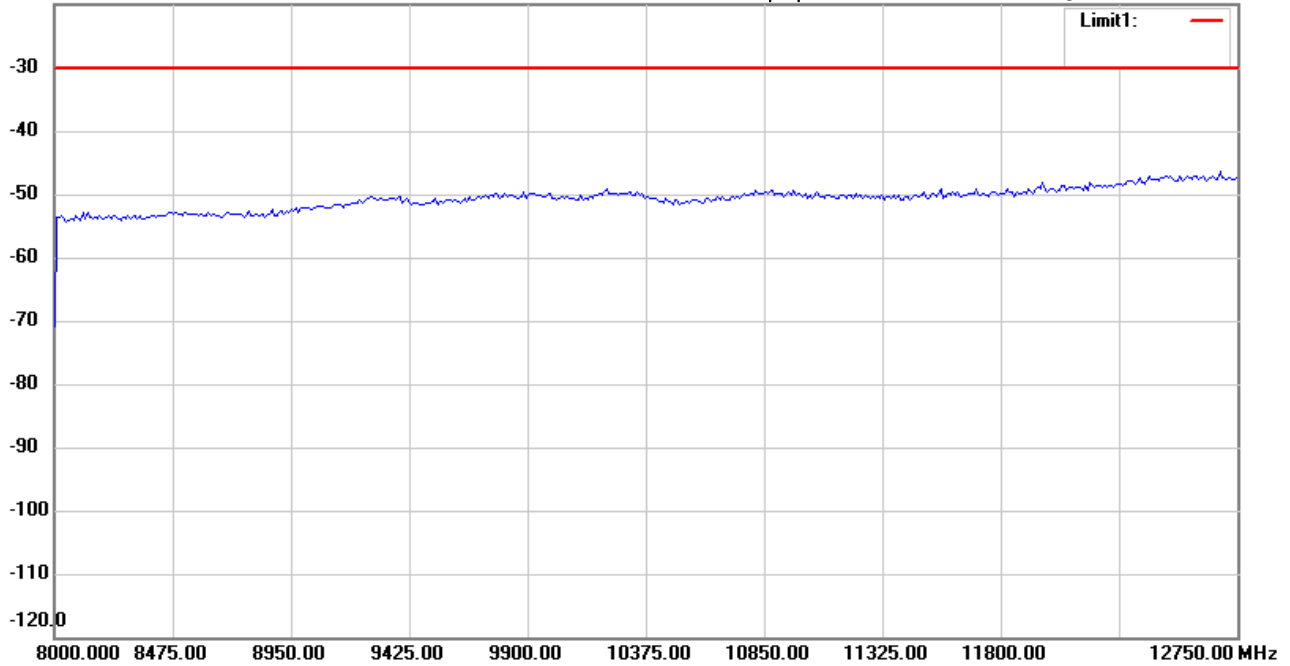

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:06:45

Humidity:60 %

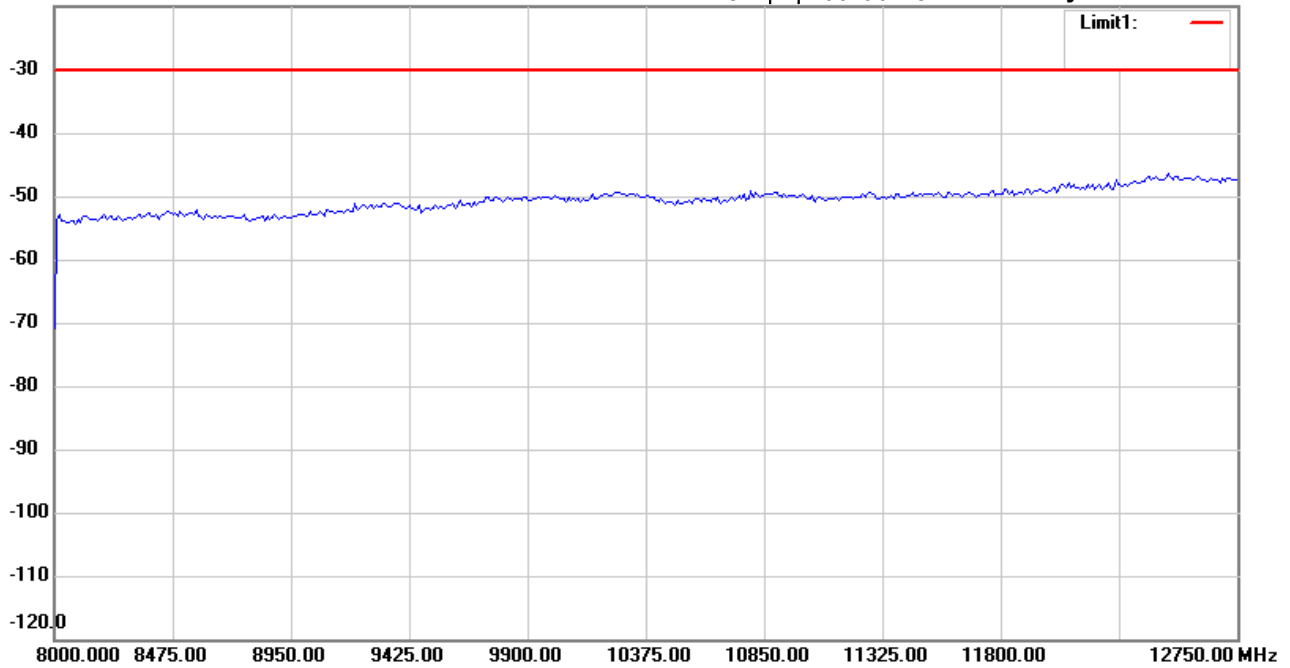

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:22:15

Humidity:60 %

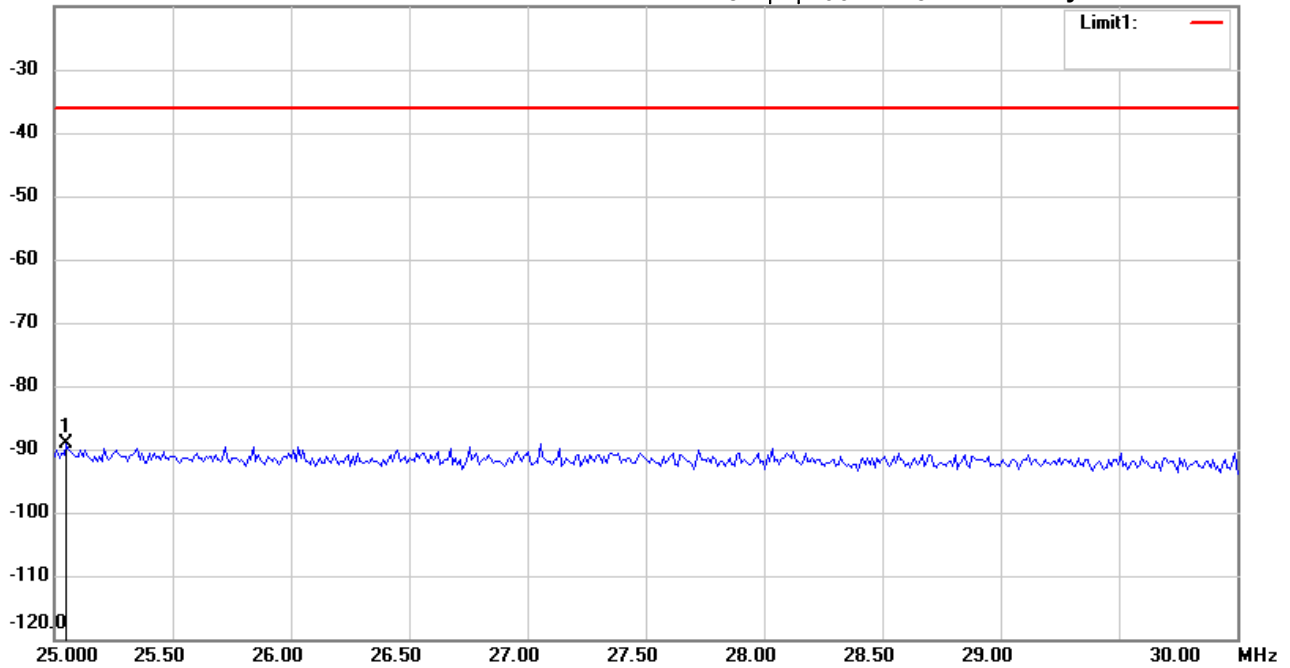

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-114.72	peak	25.69	-89.03	-36.00	150	270	-53.03	

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:31:44

Humidity:60 %

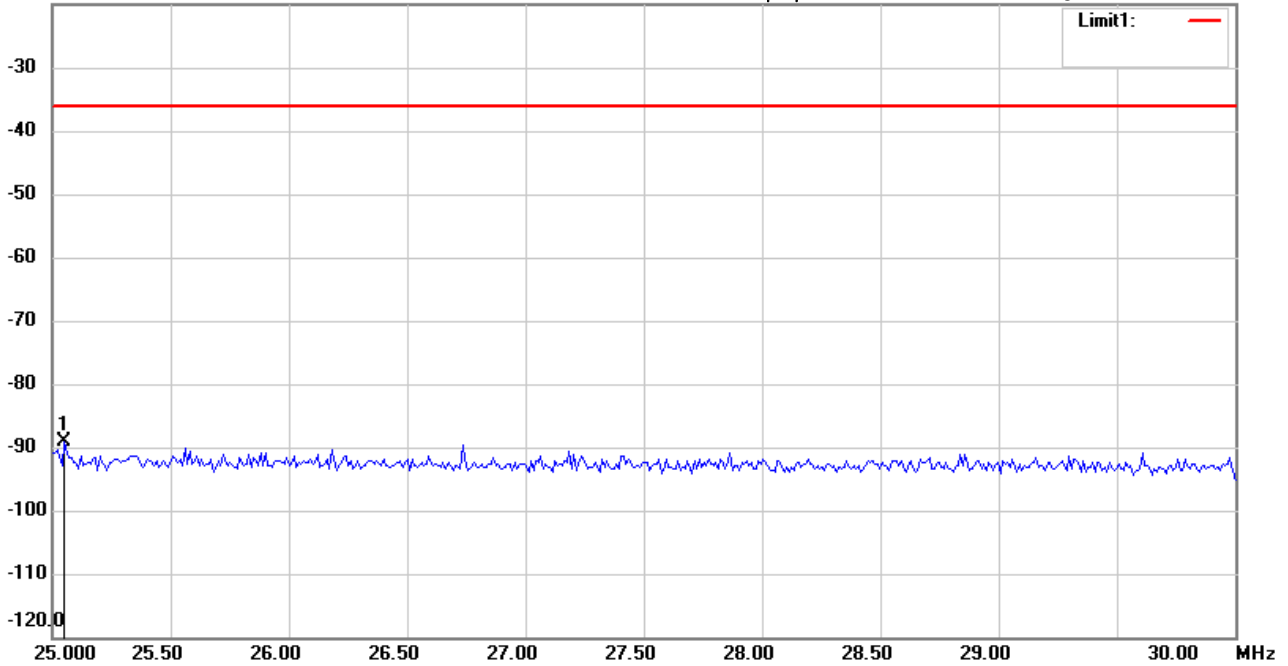

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-113.88	peak	24.65	-89.23	-36.00	150	120	-53.23	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:22:51

Humidity:60 %

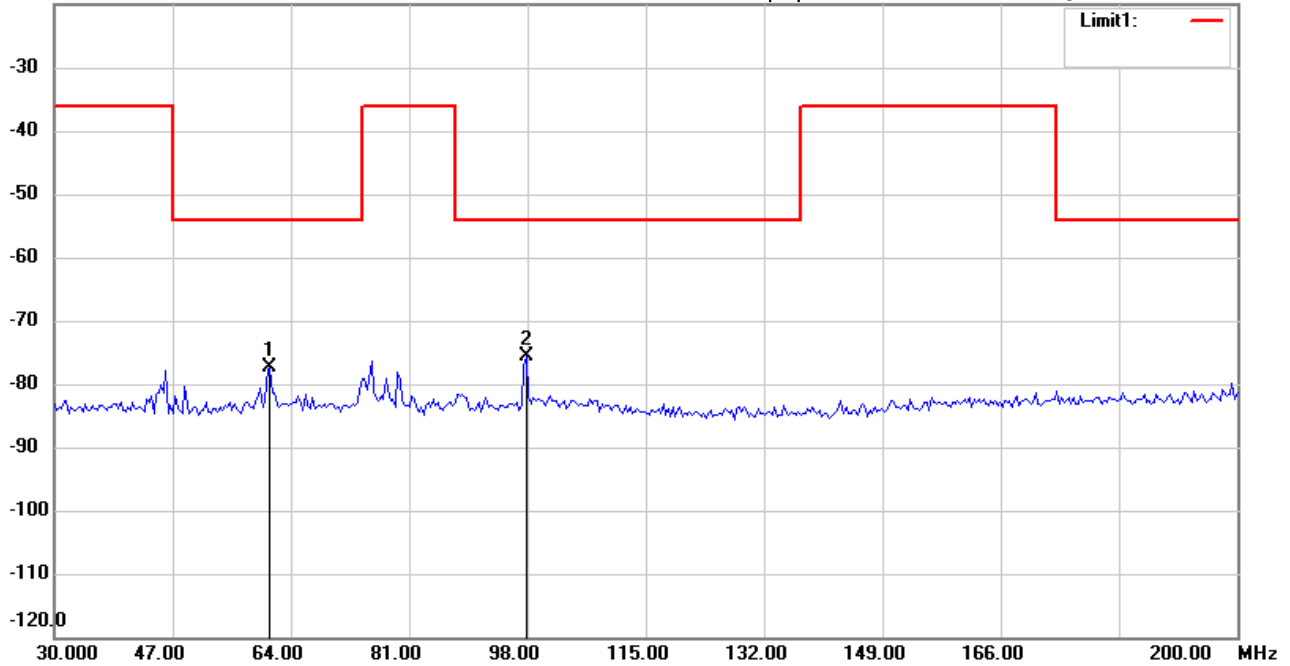

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	61.0020	-99.02	peak	21.76	-77.26	-54.00	150	100	-23.26	
*	97.7956	-96.95	peak	21.44	-75.51	-54.00	150	20	-21.51	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:32:19

Humidity:60 %

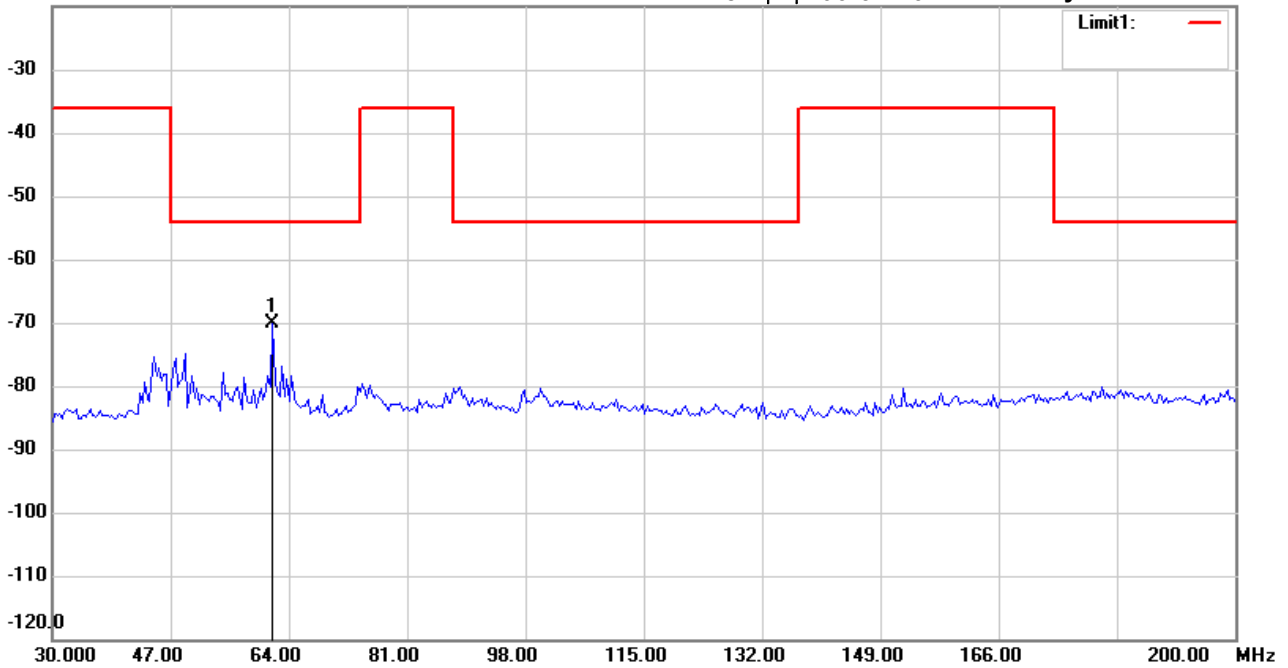

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

EUT : W6M21810-18537

M/N:

Test Mode : TX615.875MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	61.6834	-91.67	peak	21.50	-70.17	-54.00	150	110	-16.17	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#1


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:21:04

Humidity:60 %

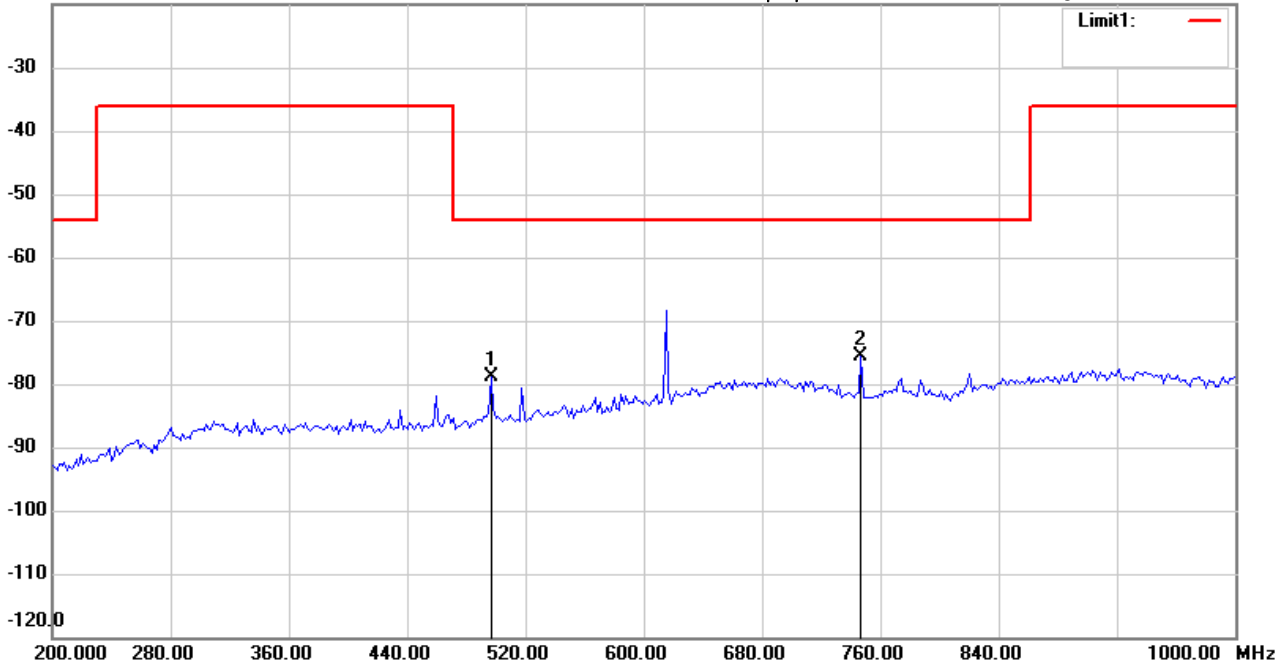

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	496.5932	-69.65	peak	-9.23	-78.88	-54.00	150	120	-24.88	
*	746.6933	-71.08	peak	-4.53	-75.61	-54.00	150	250	-21.61	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:22:41

Humidity:60 %

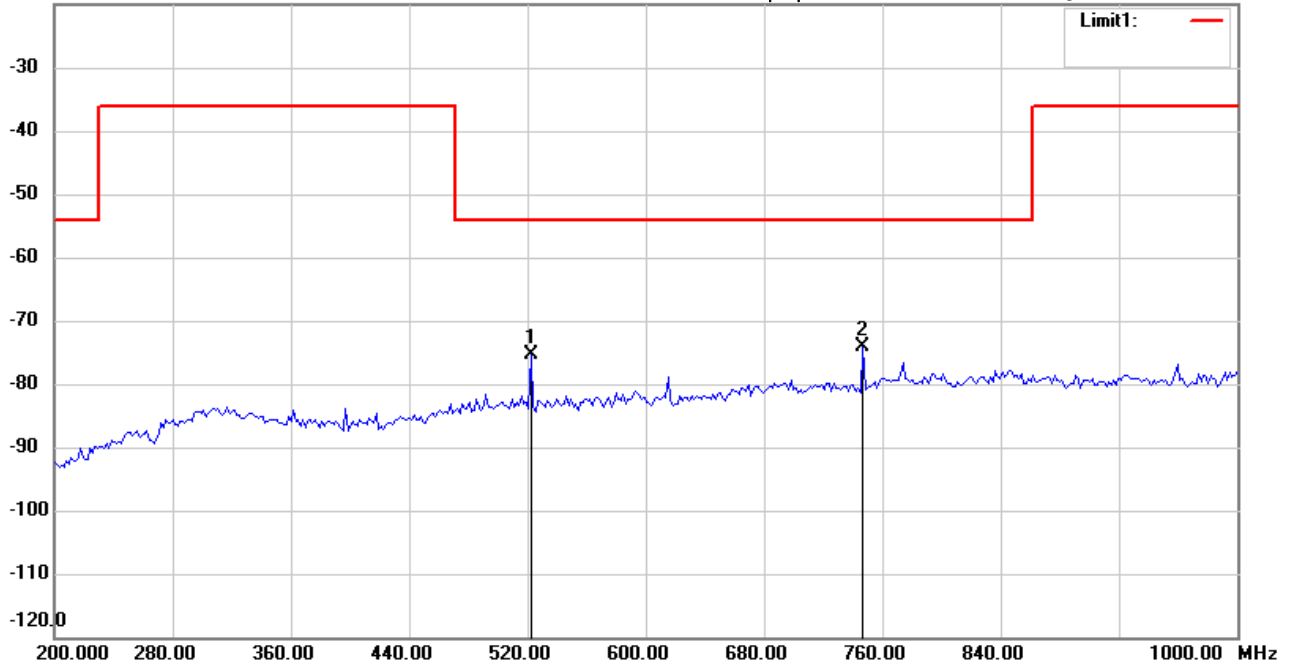

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	522.2445	-68.94	peak	-6.46	-75.40	-54.00	150	170	-21.40	
*	746.6933	-70.48	peak	-3.62	-74.10	-54.00	150	210	-20.10	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:40:16

Humidity:60 %

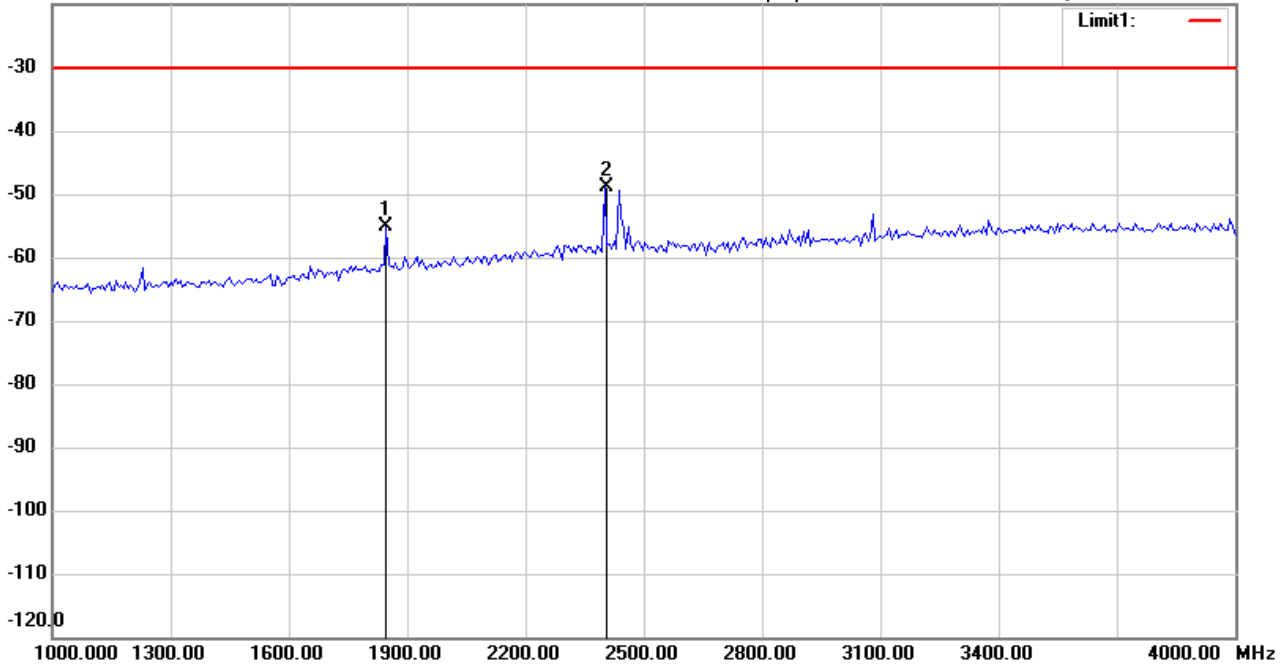

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1847.695	-55.20	peak	0.10	-55.10	-30.00	150	320	-25.10	
*	2400.802	-52.15	peak	3.27	-48.88	-30.00	150	120	-18.88	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:53:39

Humidity:60 %

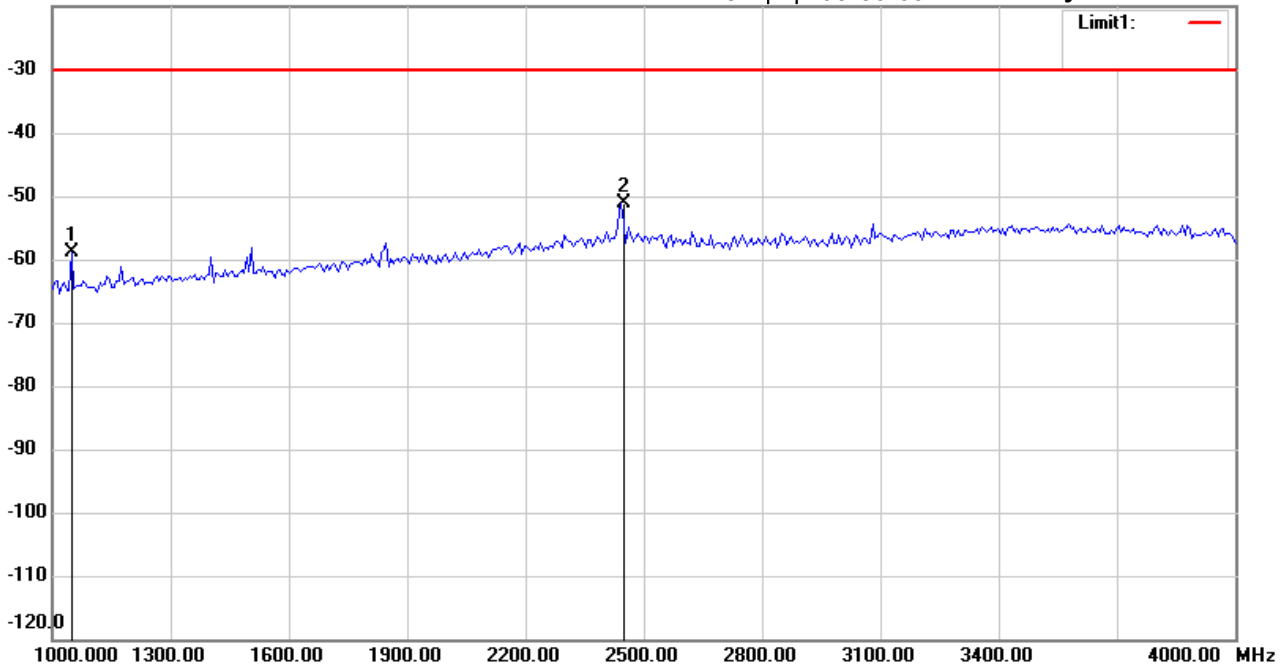

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1048.096	-57.33	peak	-1.62	-58.95	-30.00	150	210	-28.95	
*	2442.886	-56.31	peak	5.07	-51.24	-30.00	150	120	-21.24	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:40:57

Humidity:60 %

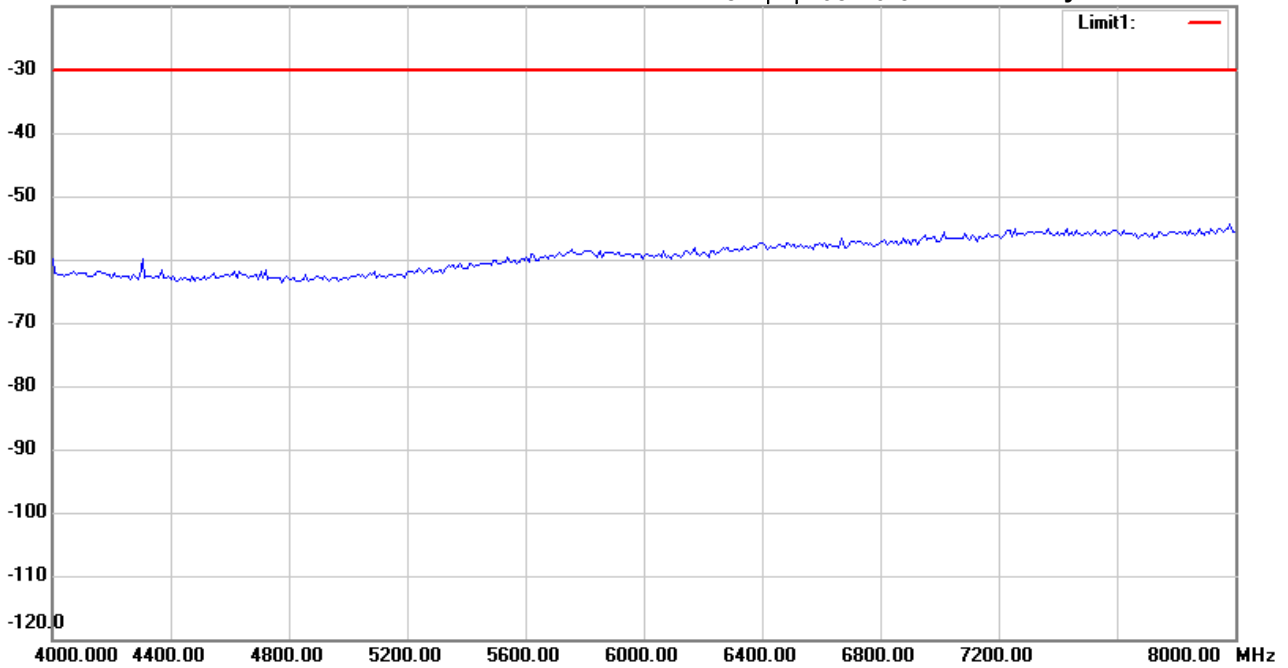

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:54:45

Humidity:60 %

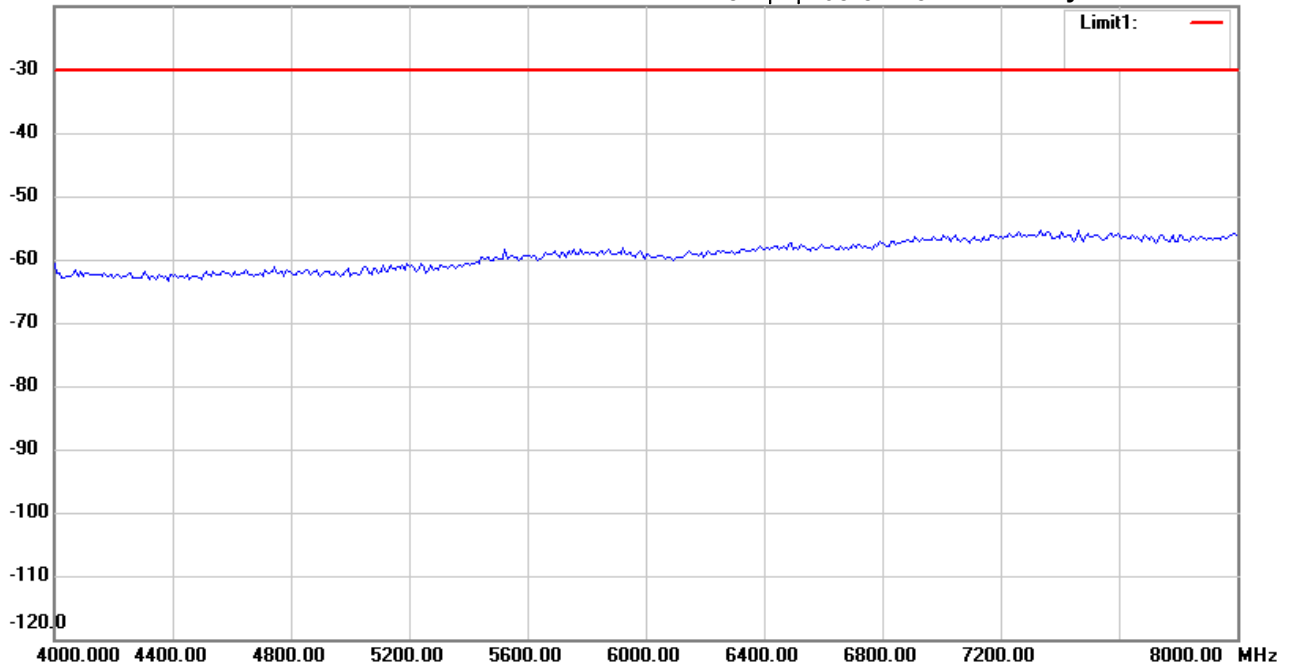

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:41:41

Humidity:60 %

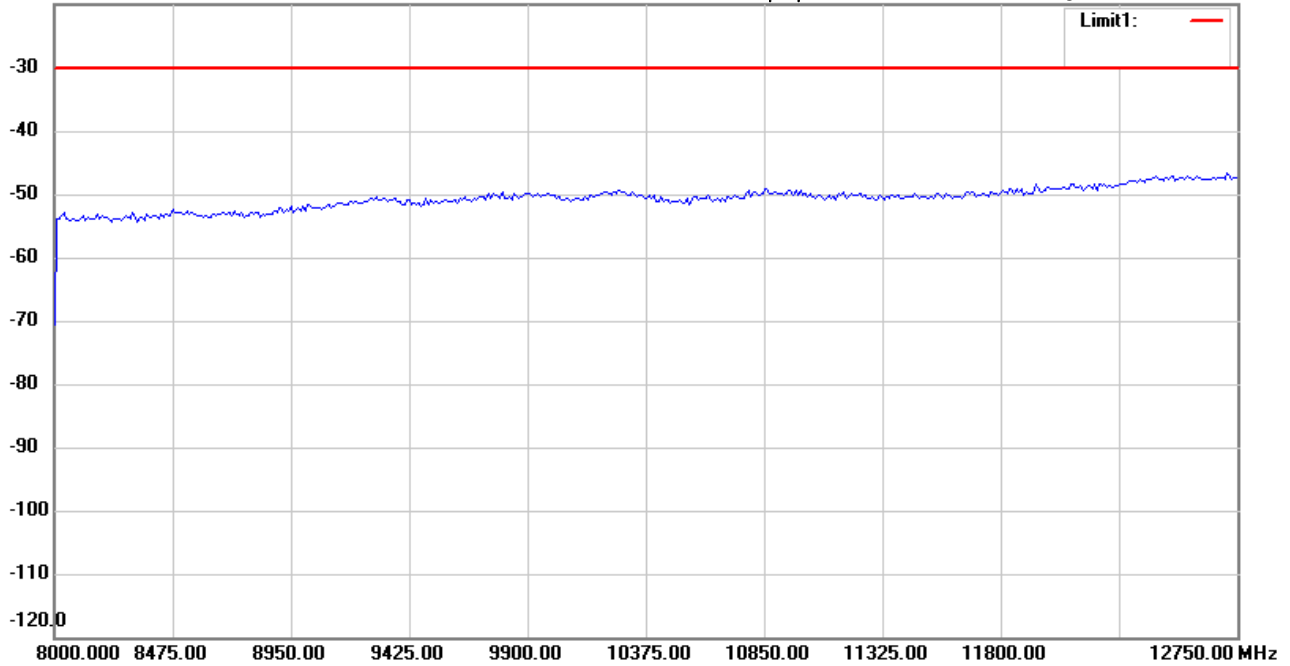

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 08:55:27

Humidity:60 %

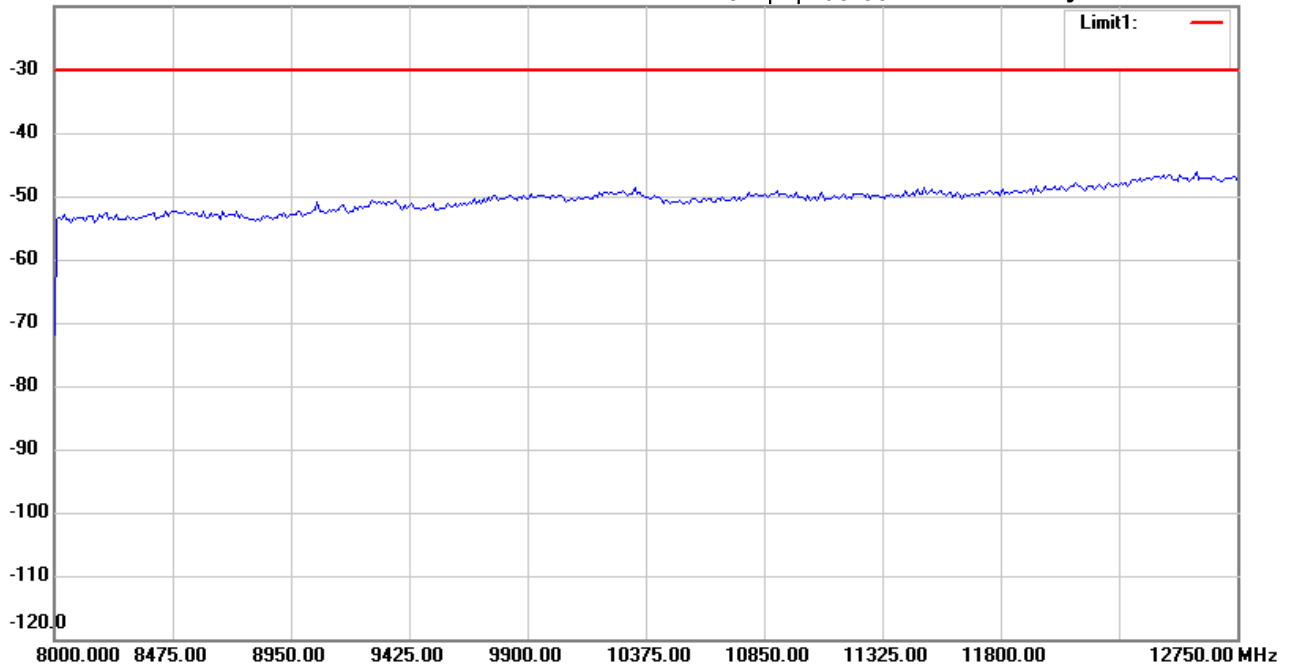

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:24:06

Humidity:60 %

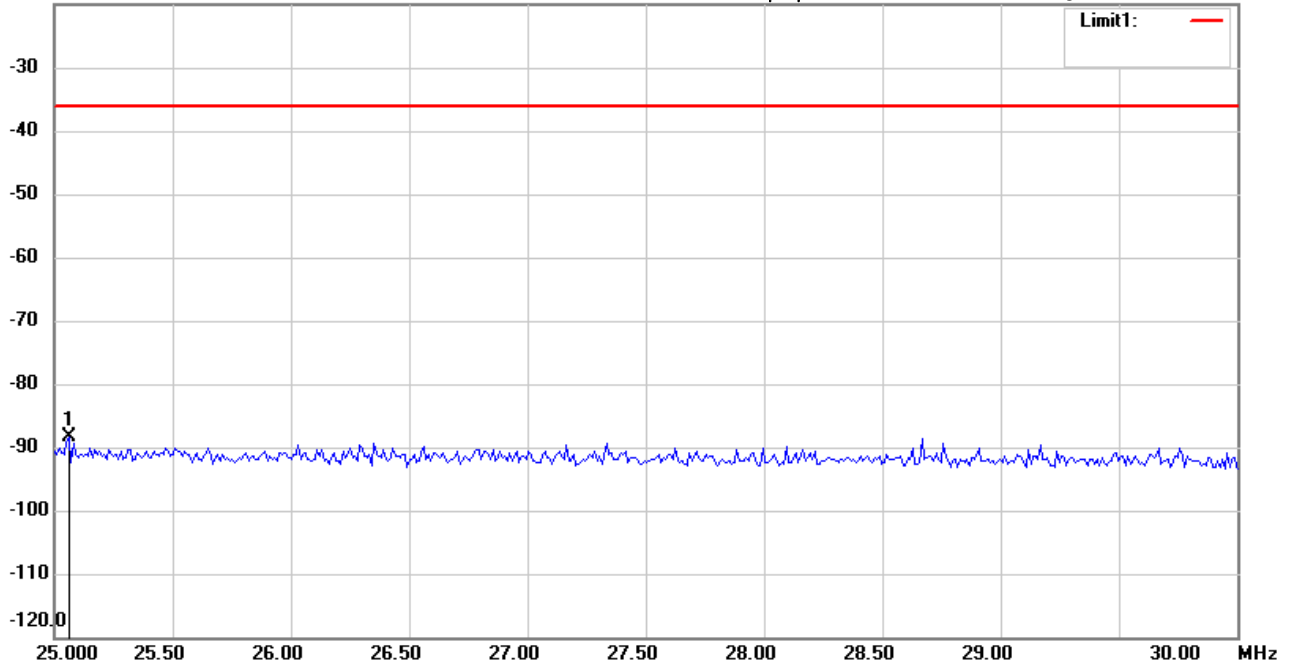

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0601	-113.99	peak	25.69	-88.30	-36.00	150	120	-52.30	

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:30:09

Humidity:60 %

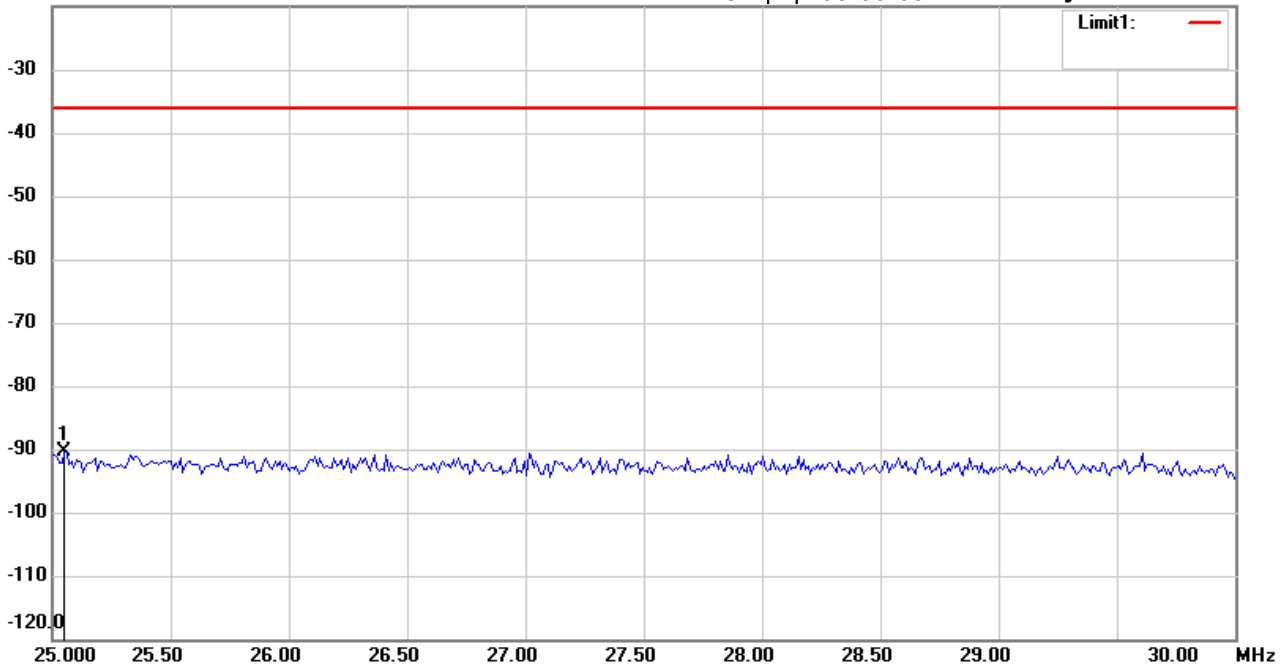

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-115.07	peak	24.65	-90.42	-36.00	150	230	-54.42	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:24:42

Humidity:60 %

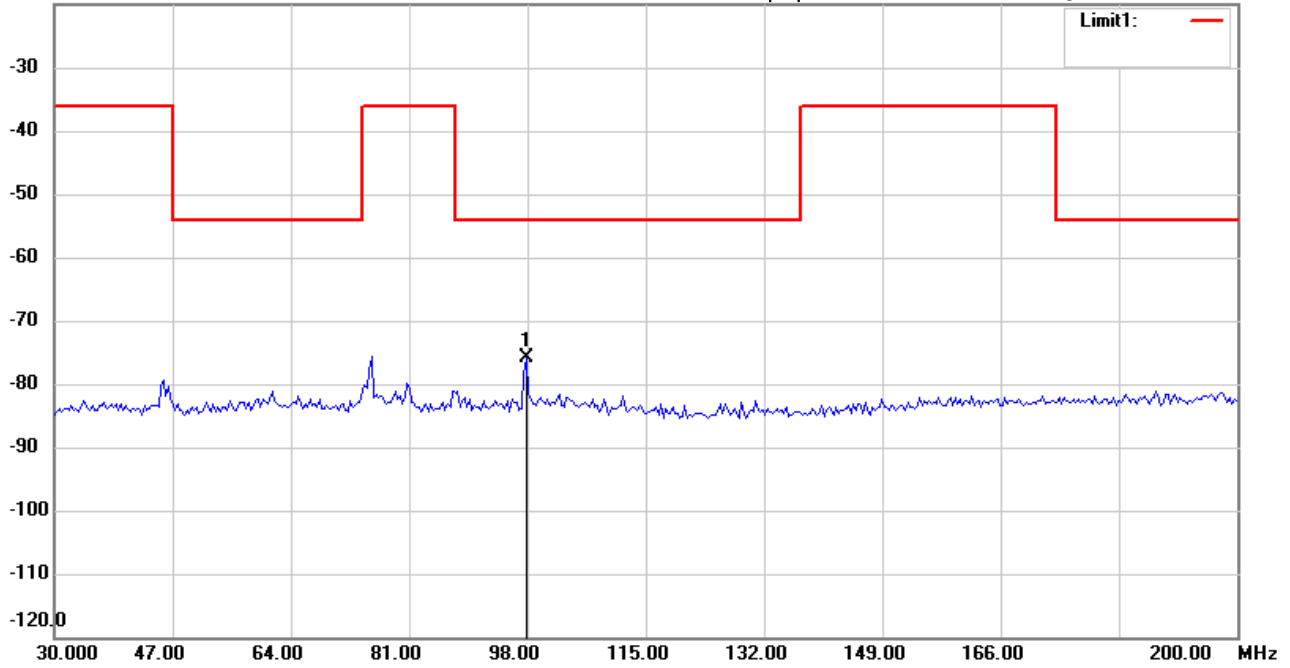

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	97.7956	-97.31	peak	21.44	-75.87	-54.00	150	300	-21.87	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:30:44

Humidity:60 %

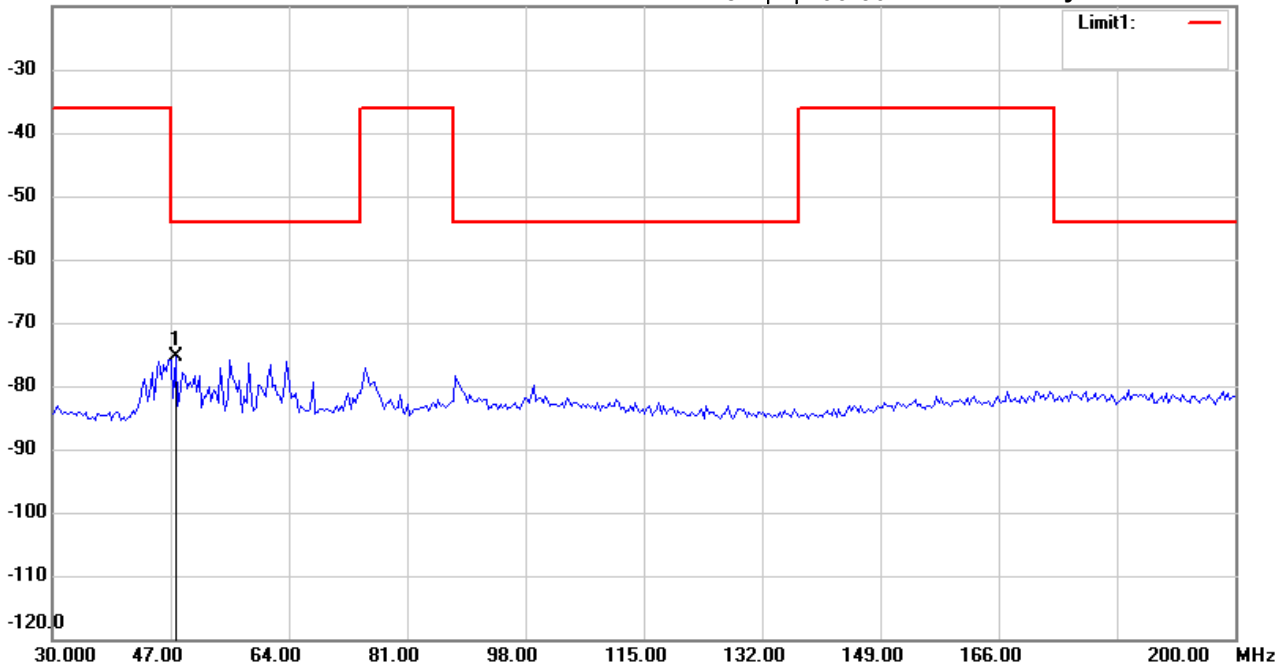

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

EUT : W6M21810-18537

M/N:

Test Mode : TX657.125MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.7154	-96.68	peak	21.19	-75.49	-54.00	150	210	-21.49	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#1


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:51:23

Humidity:60 %

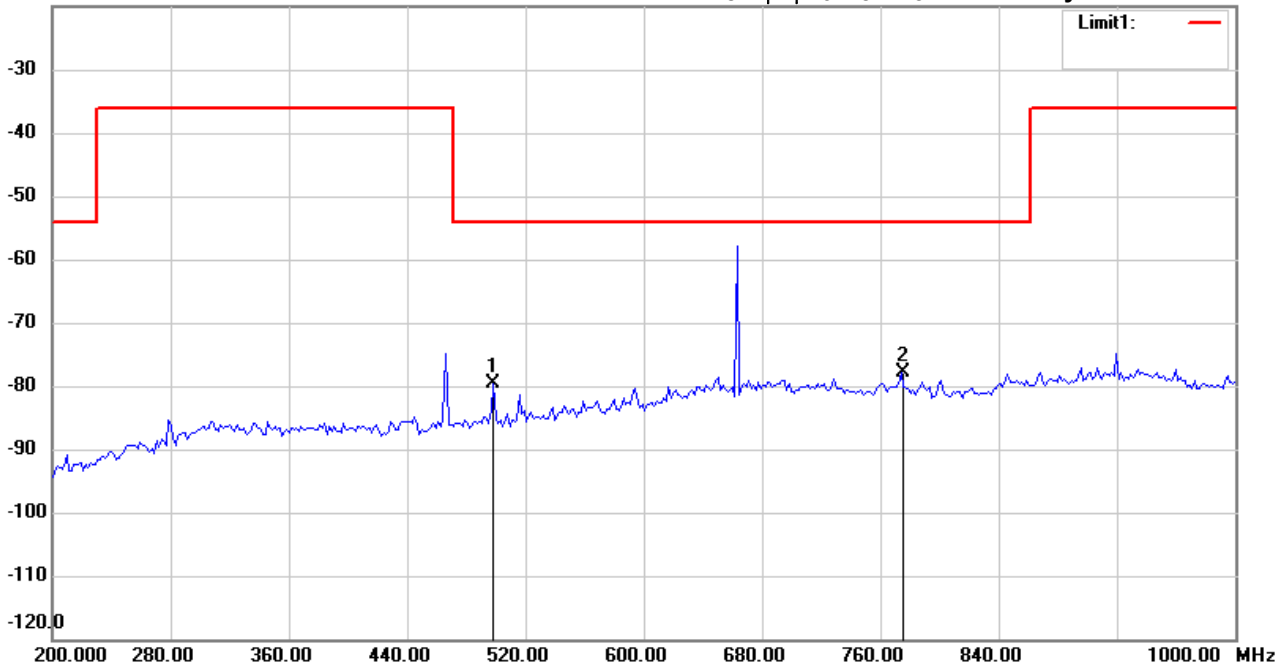

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	498.1963	-70.52	peak	-9.21	-79.73	-54.00	150	110	-25.73	
*	773.9480	-73.53	peak	-4.43	-77.96	-54.00	150	250	-23.96	





Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:52:29

Humidity:60 %

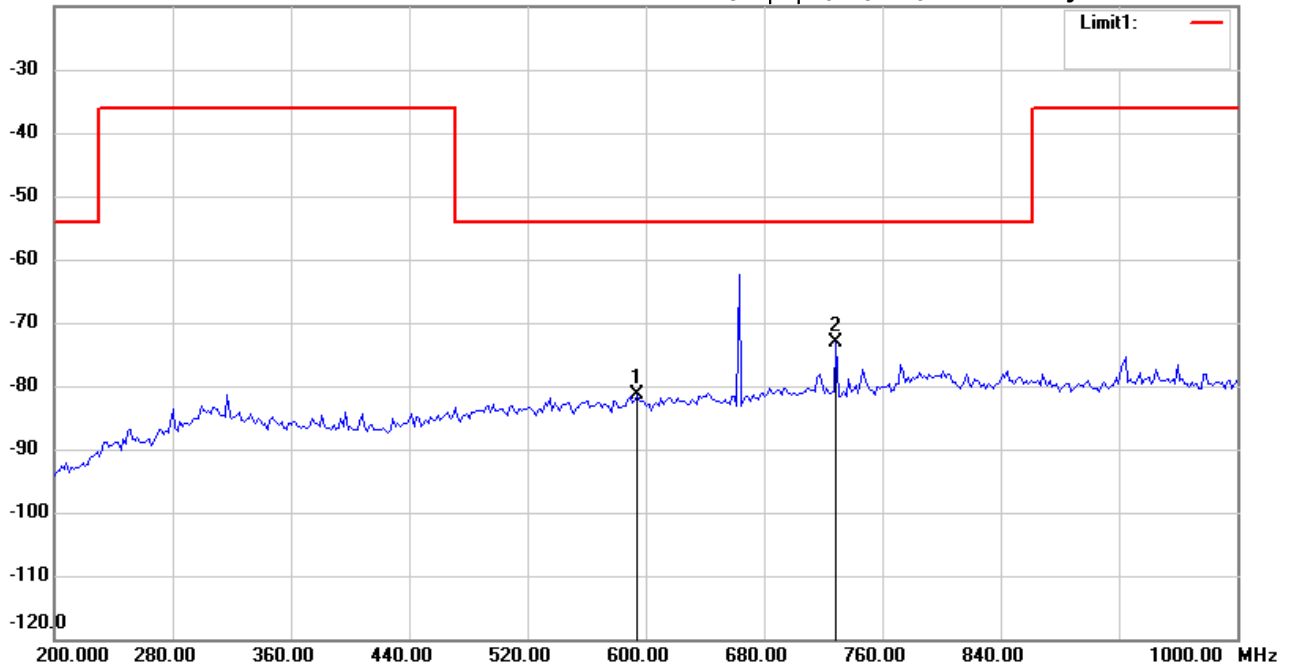

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	594.3887	-75.74	peak	-5.64	-81.38	-54.00	150	120	-27.38	
*	729.0580	-69.67	peak	-3.44	-73.11	-54.00	150	250	-19.11	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:35:52

Humidity:60 %

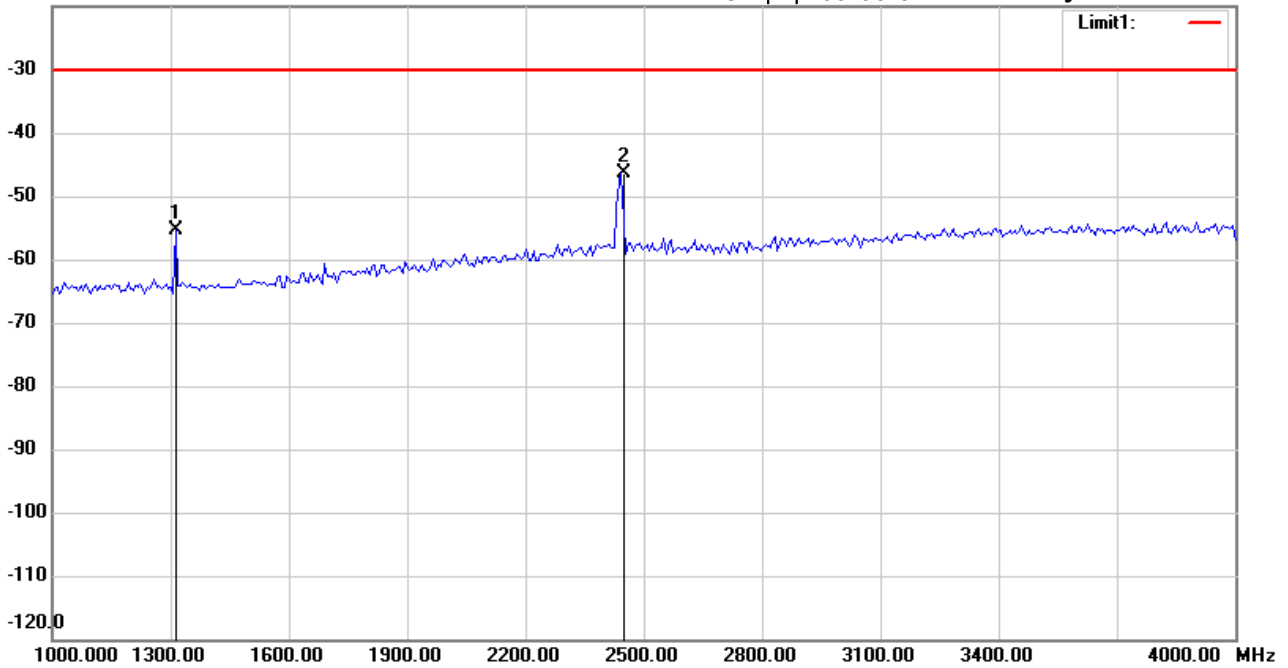

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1312.625	-53.29	peak	-2.18	-55.47	-30.00	150	210	-25.47	
*	2442.886	-49.84	peak	3.49	-46.35	-30.00	150	300	-16.35	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:39:26

Humidity:60 %

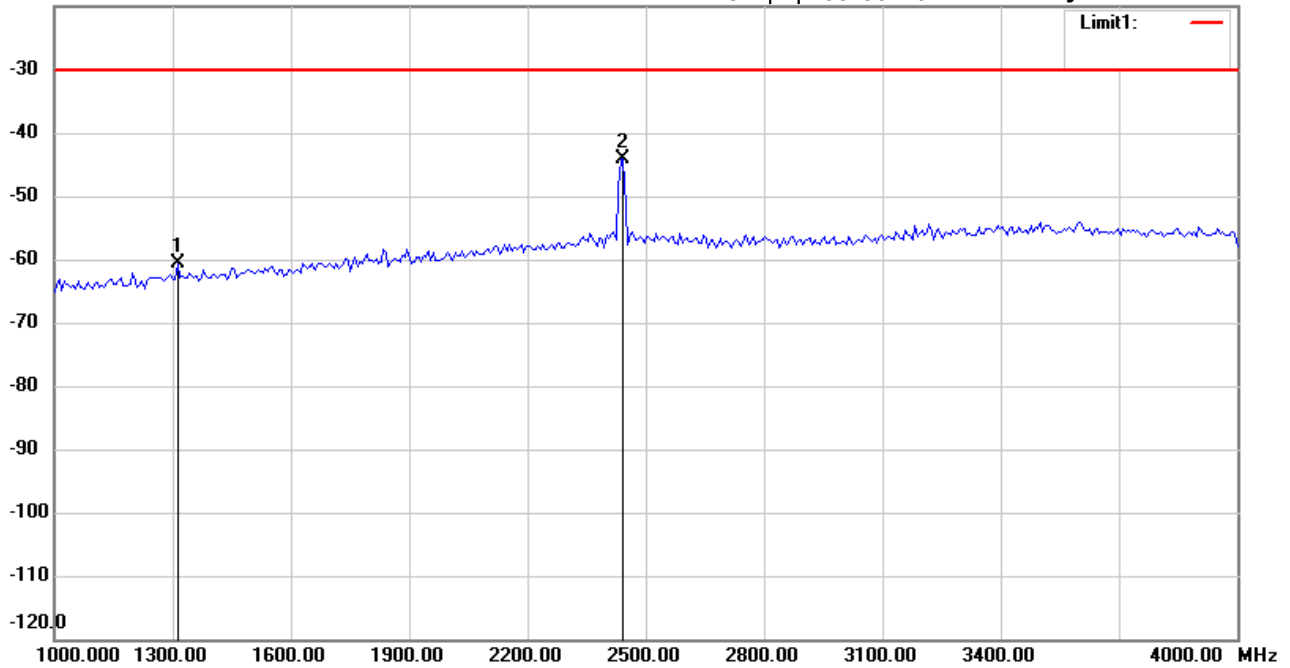

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1312.625	-59.92	peak	-0.81	-60.73	-30.00	150	210	-30.73	
*	2436.874	-49.06	peak	5.04	-44.02	-30.00	150	80	-14.02	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:36:35

Humidity:60 %

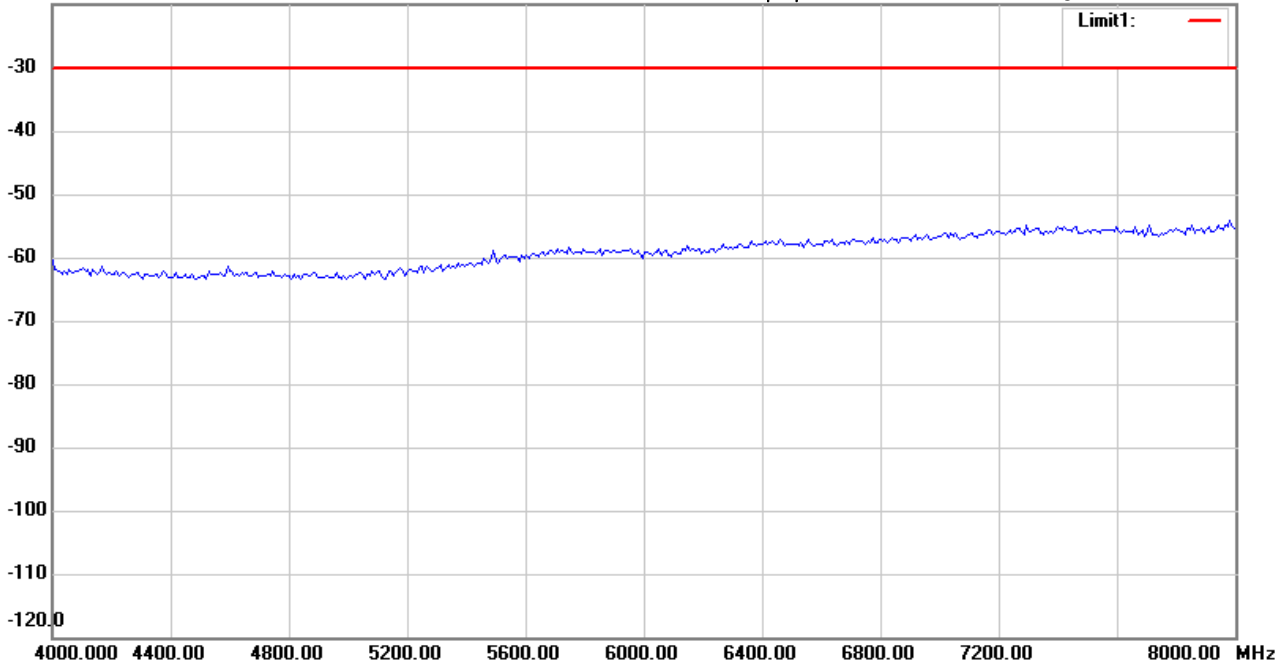

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:43:14

Humidity:60 %

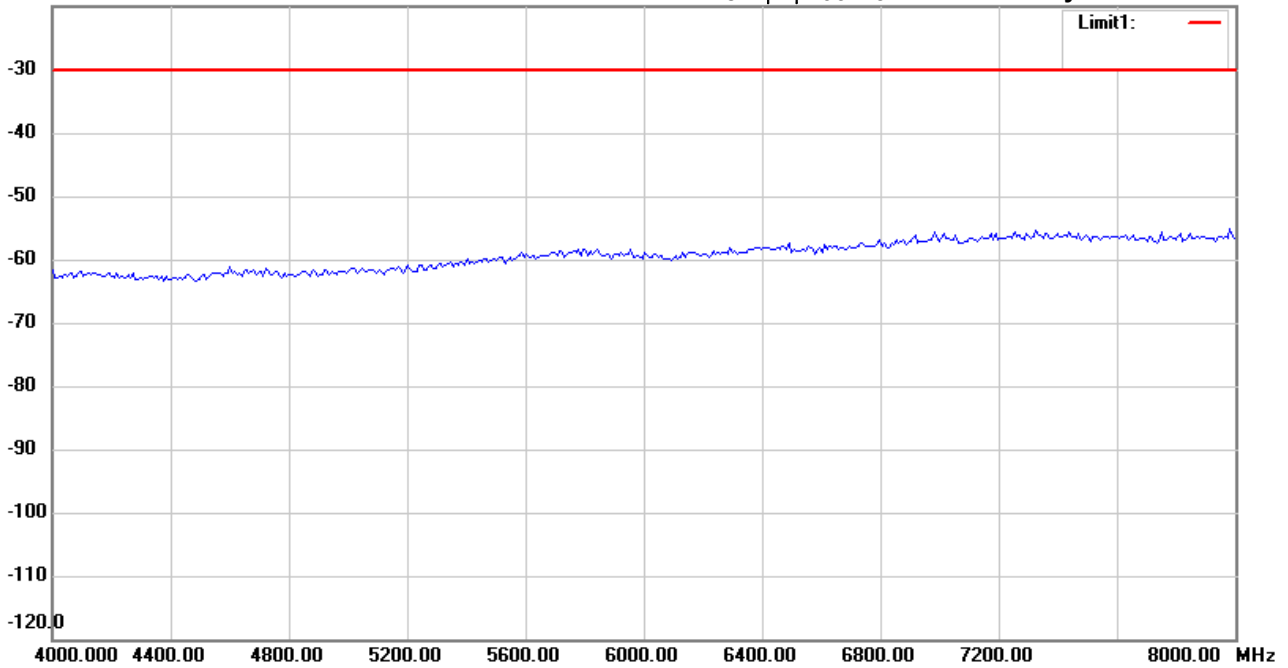

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:37:18

Humidity:60 %

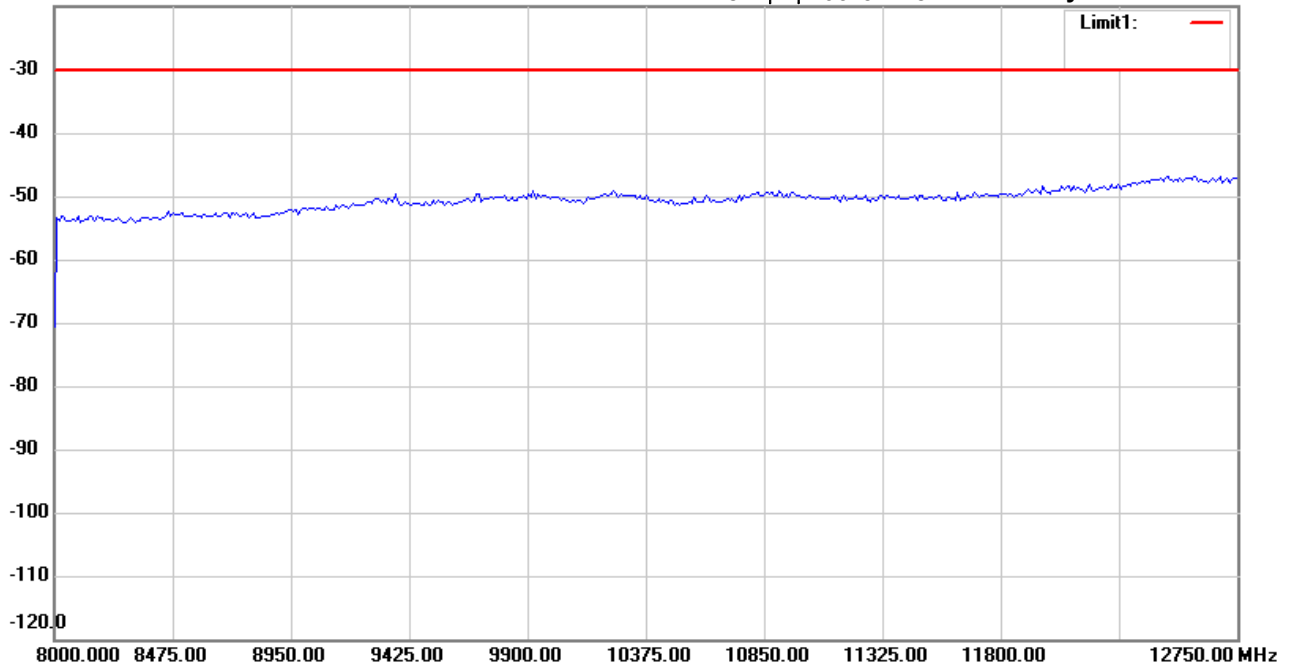

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:43:57

Humidity:60 %

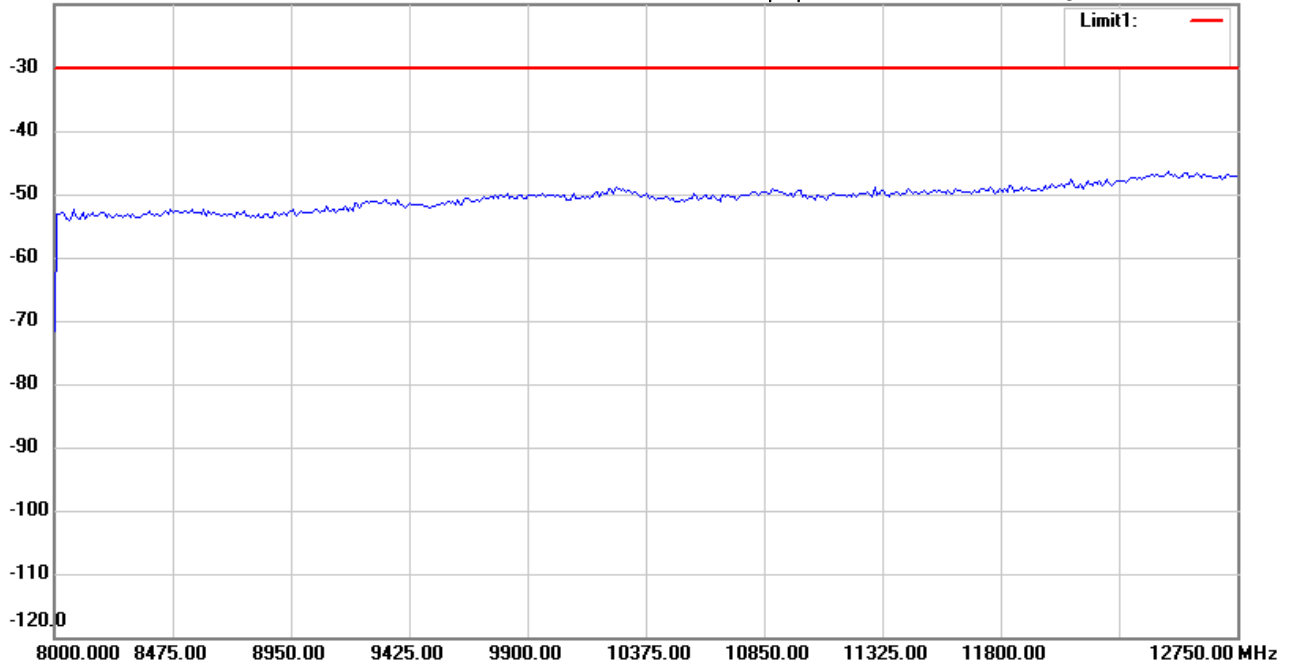

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:25:49

Humidity:60 %

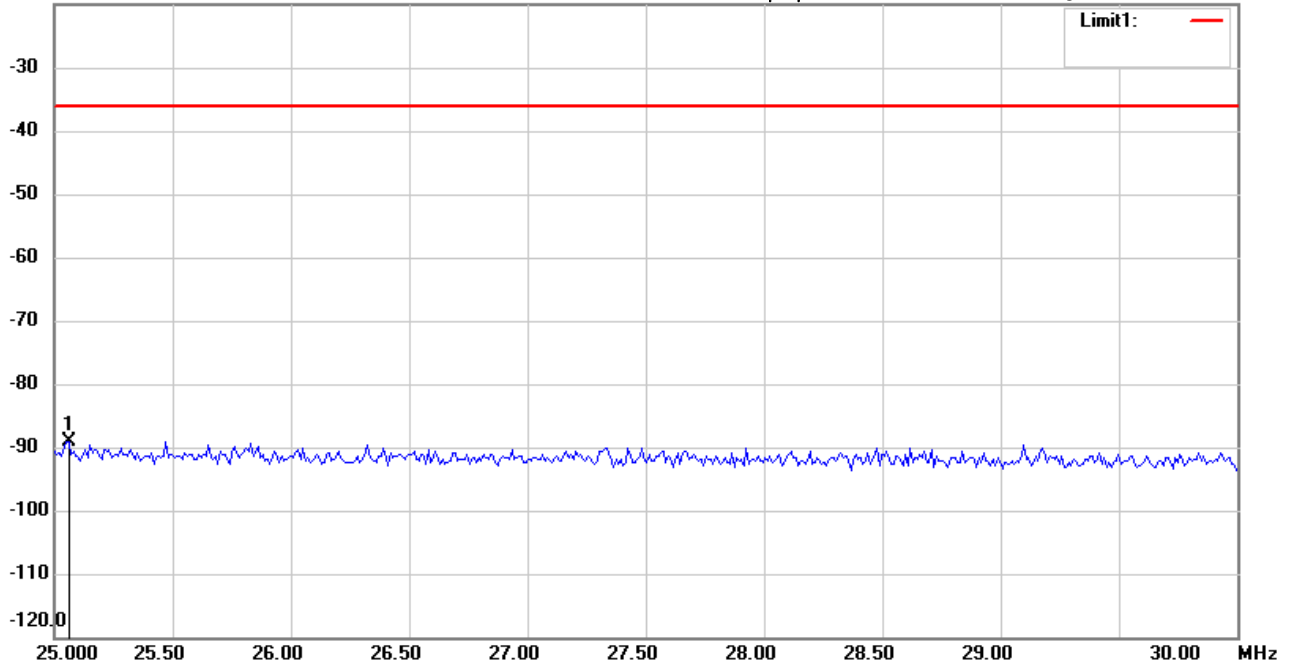

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0601	-114.84	peak	25.69	-89.15	-36.00	150	120	-53.15	

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :1

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:28:10

Humidity:60 %

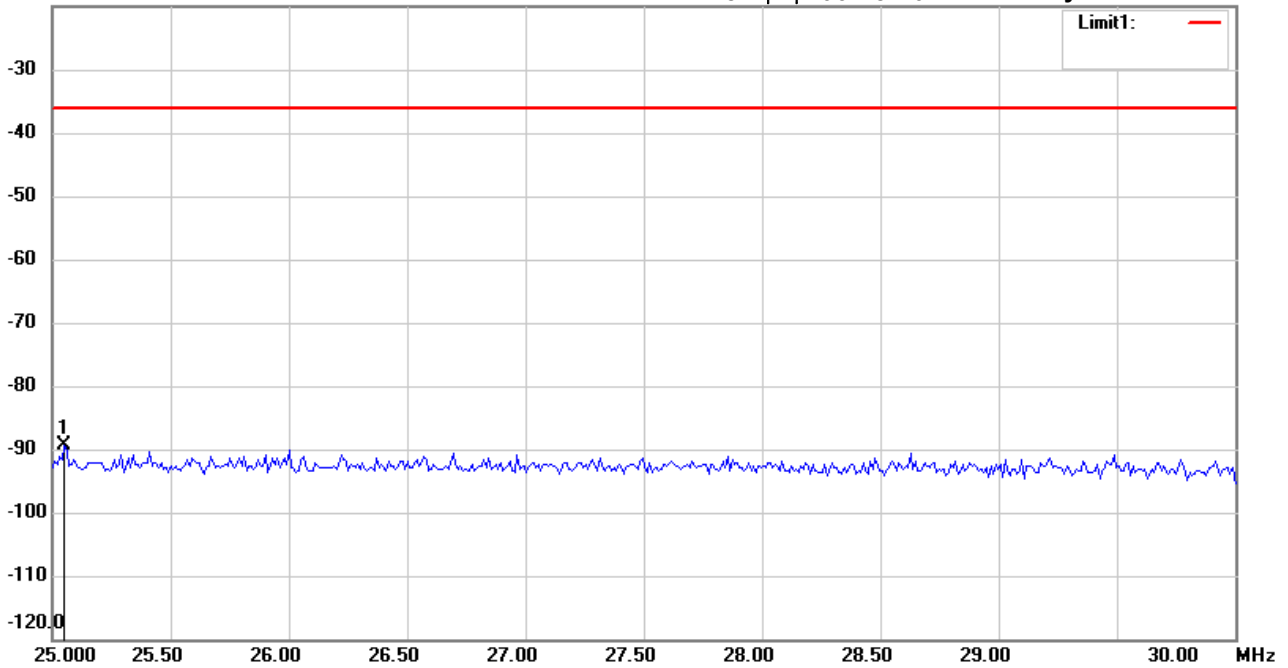

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

EUT : W6M21810-18537

M/N:

Test Mode : TX662.9MHz

Note :

Polarization: *Vertical*

Power : 3Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	25.0501	-114.02	peak	24.65	-89.37	-36.00	150	80	-53.37	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Rick

File :1

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:26:24

Humidity:60 %

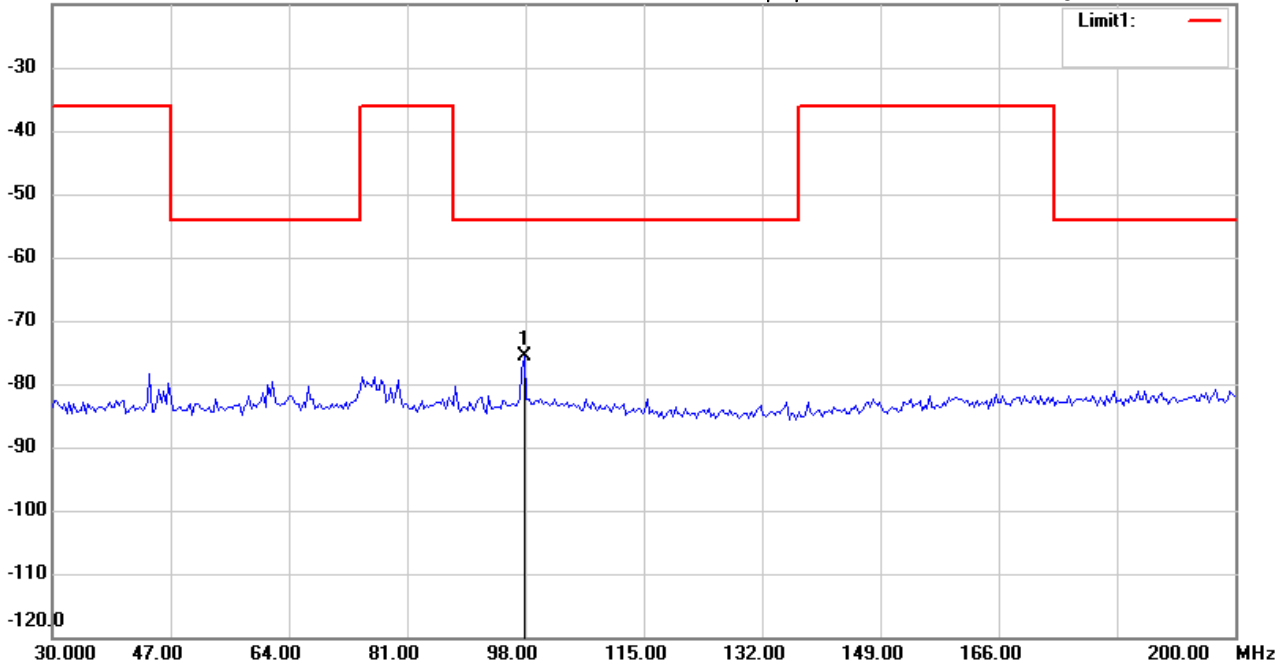

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	97.7956	-97.12	peak	21.44	-75.68	-54.00	150	140	-21.68	



Radiated Emission Measurement

Operator: Rick

File :1

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 06:28:46

Humidity:60 %

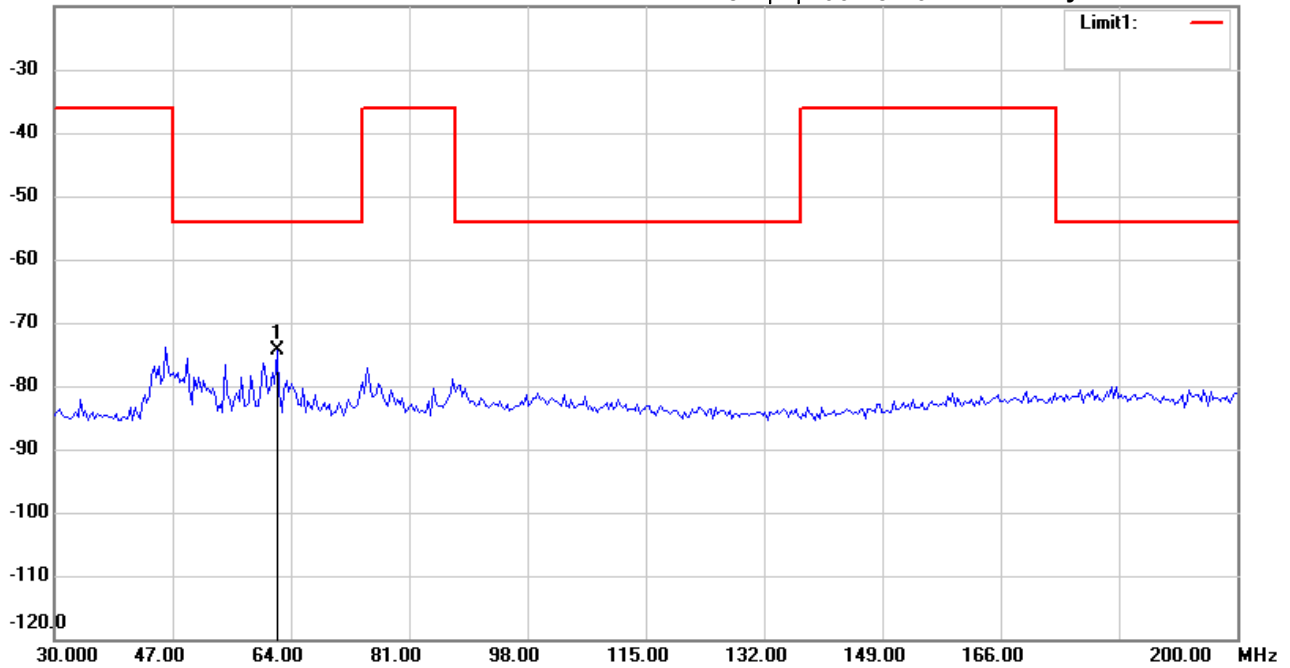

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	62.0240	-95.96	peak	21.47	-74.49	-54.00	150	200	-20.49	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#2


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 01:56:32

Humidity:60 %

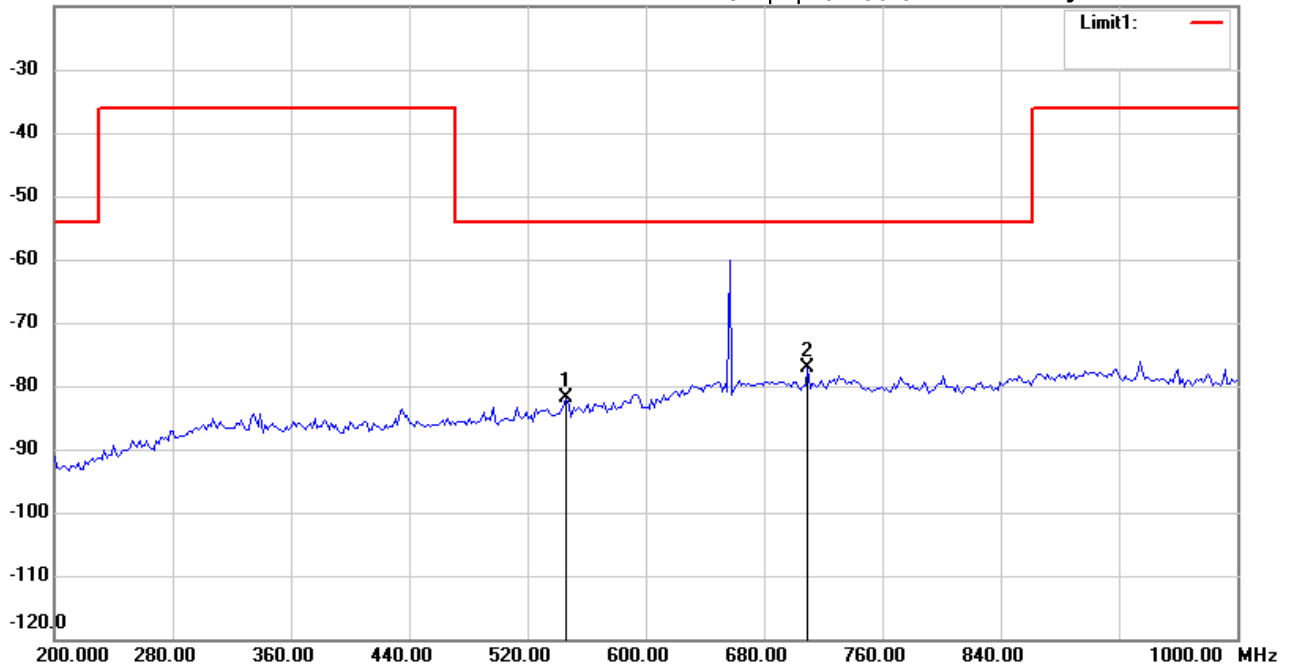

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	546.2925	-74.13	peak	-7.71	-81.84	-54.00	150	200	-27.84	
*	709.8196	-74.14	peak	-2.98	-77.12	-54.00	150	170	-23.12	



Radiated Emission Measurement

Operator: Rick

File :2

Data :#3


Date: 2018/11/26

Temperature:24 °C

-20.0 dBm

Time: 下午 02:00:25

Humidity:60 %

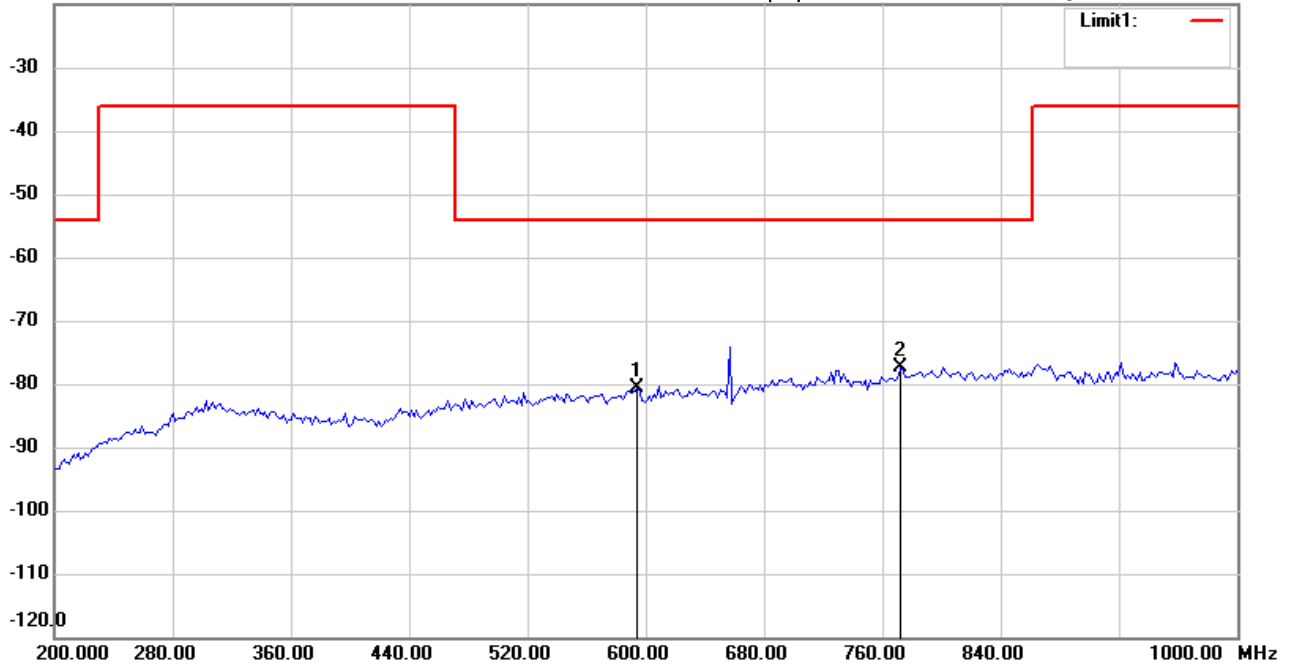

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	594.3887	-74.87	peak	-5.64	-80.51	-54.00	150	230	-26.51	
*	772.3446	-74.17	peak	-3.23	-77.40	-54.00	150	100	-23.40	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#1


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:47:09

Humidity:60 %

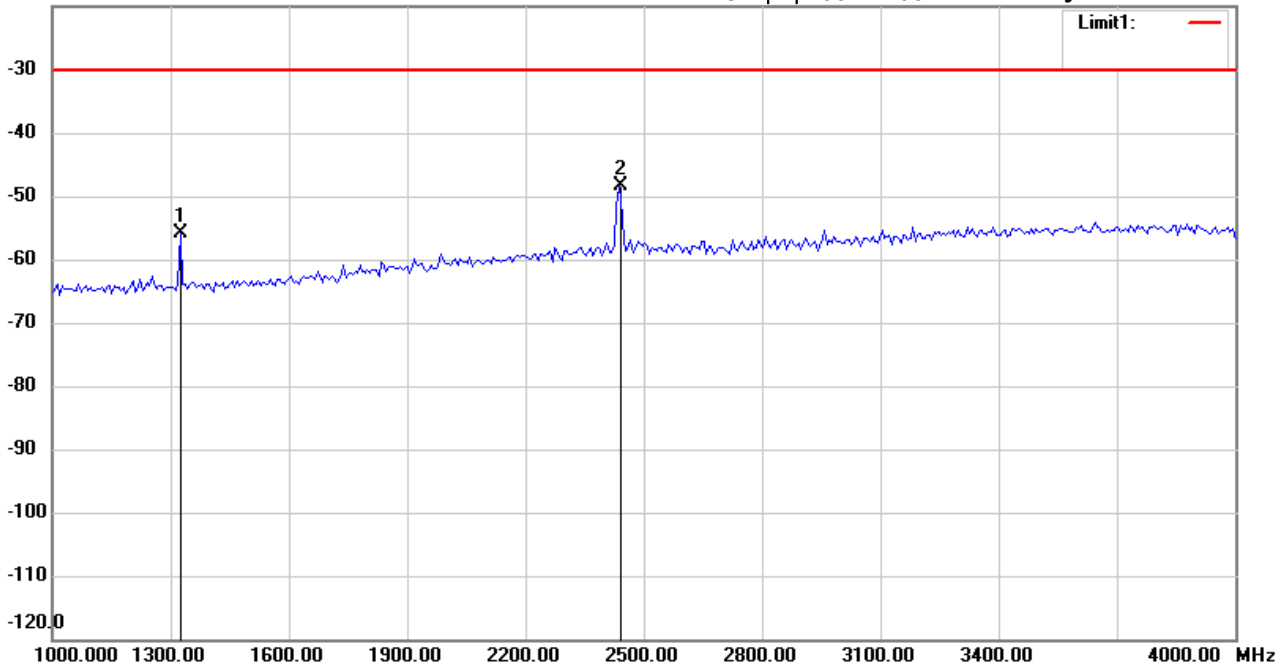

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1324.649	-53.78	peak	-2.18	-55.96	-30.00	150	120	-25.96	
*	2436.874	-51.83	peak	3.46	-48.37	-30.00	150	320	-18.37	



Radiated Emission Measurement

Operator: Rick

File :3

Data :#4


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:52:12

Humidity:60 %

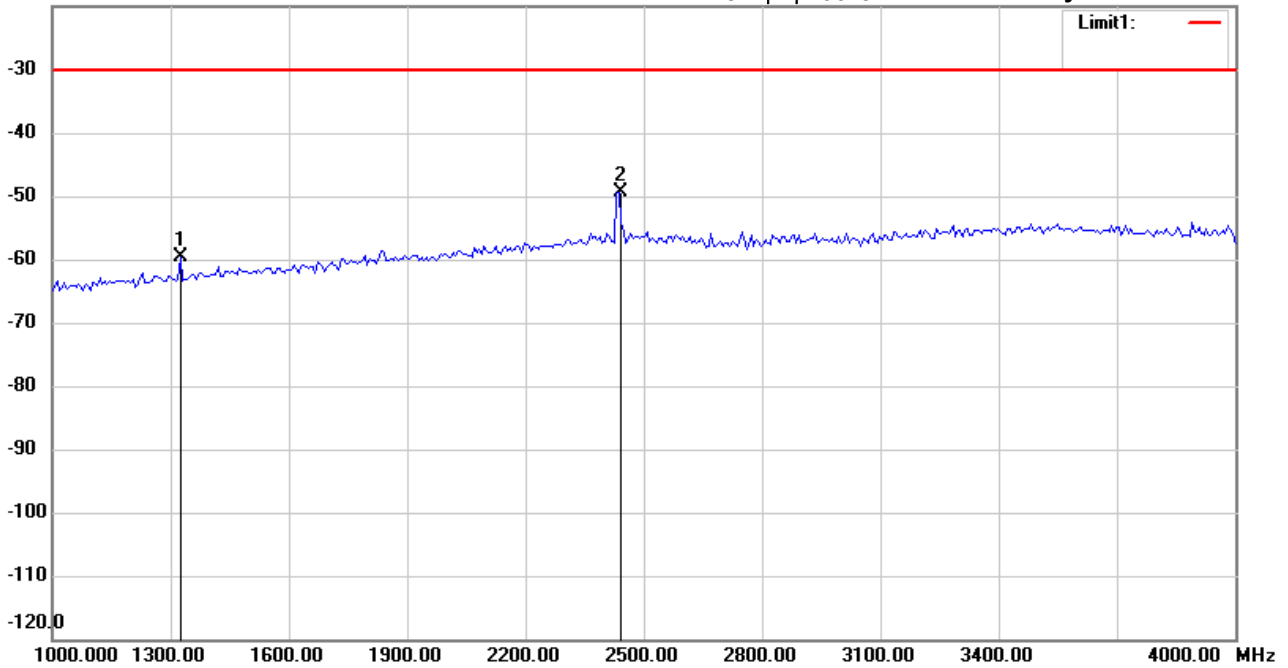

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1324.649	-58.88	peak	-0.78	-59.66	-30.00	150	210	-29.66	
*	2436.874	-54.45	peak	5.04	-49.41	-30.00	150	100	-19.41	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#2


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:49:36

Humidity:60 %

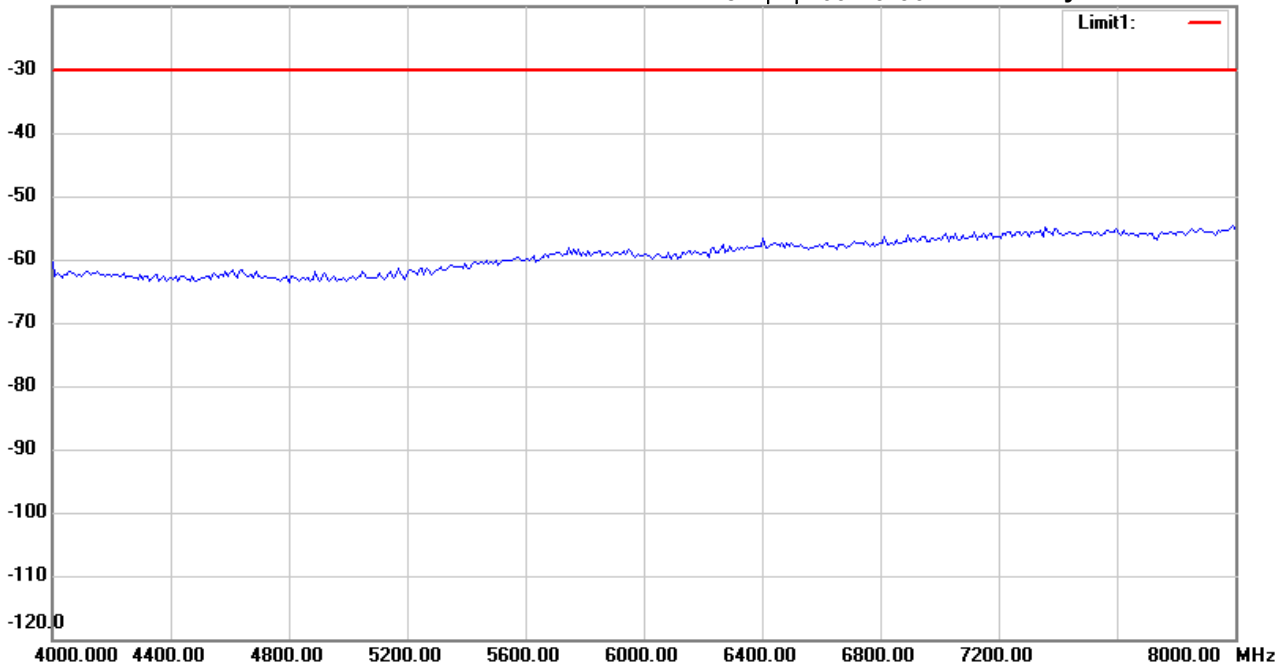

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#5


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:52:58

Humidity:60 %

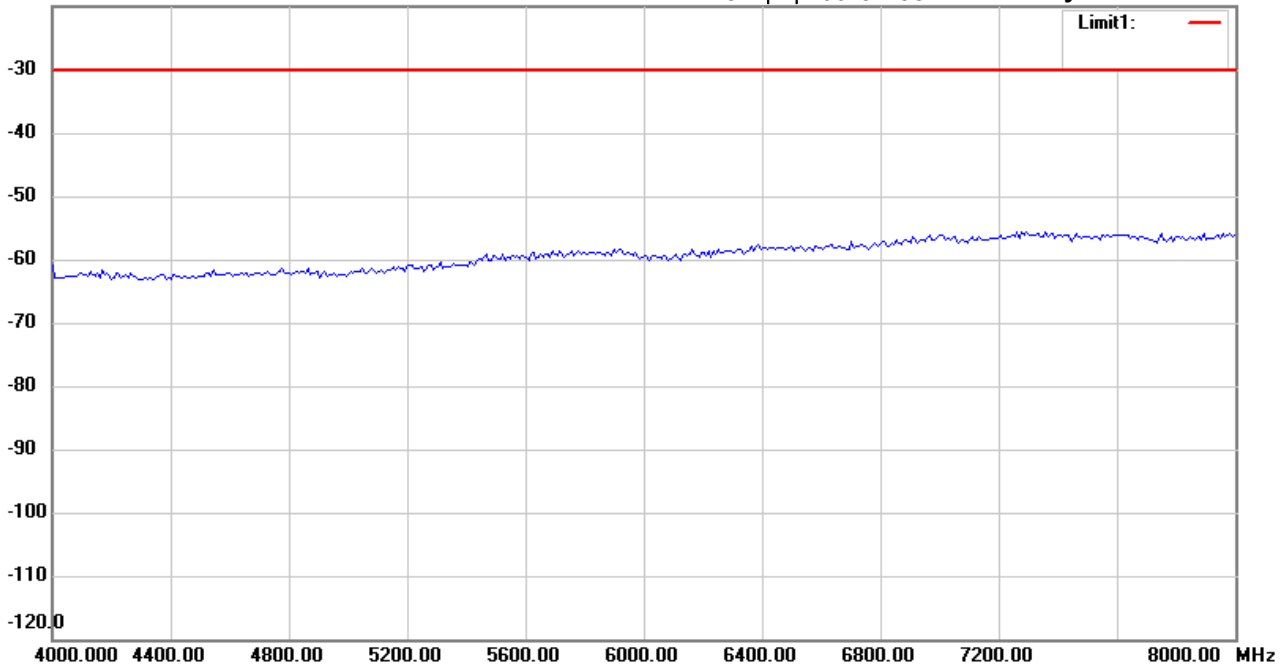

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#3


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:50:20

Humidity:60 %

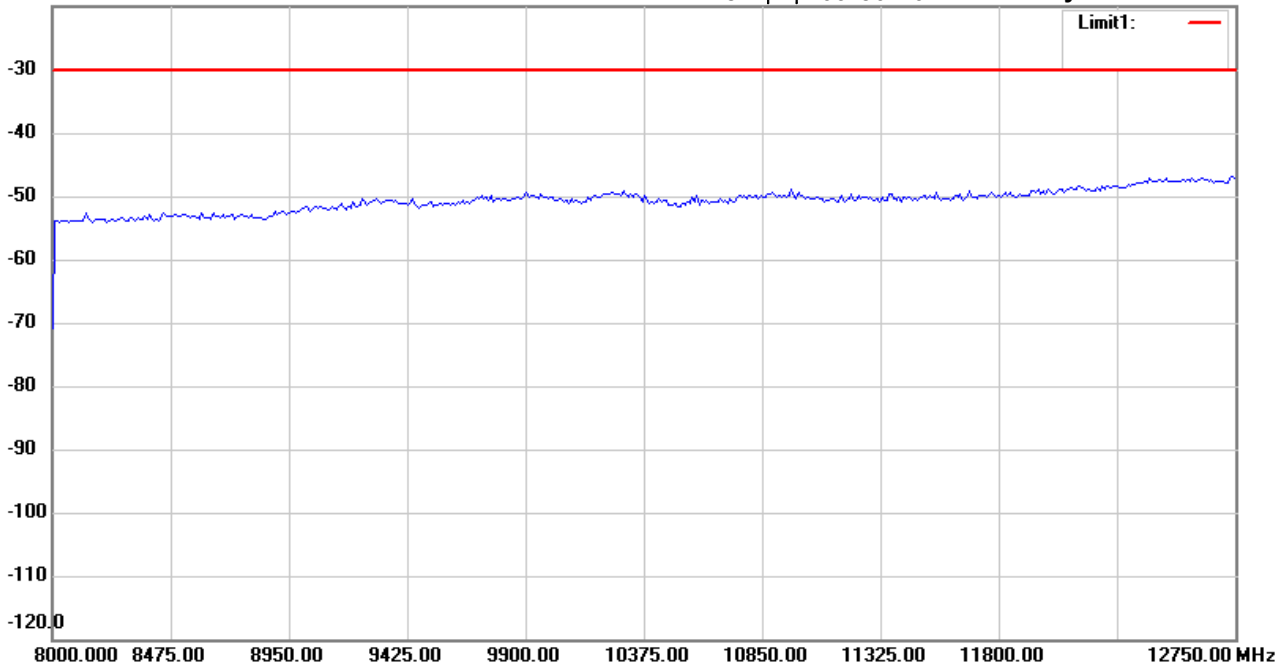

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Horizontal*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Rick

File :3

Data :#6


Date: 2018/11/24

Temperature:24 °C

-20.0 dBm

Time: 下午 09:54:14

Humidity:60 %

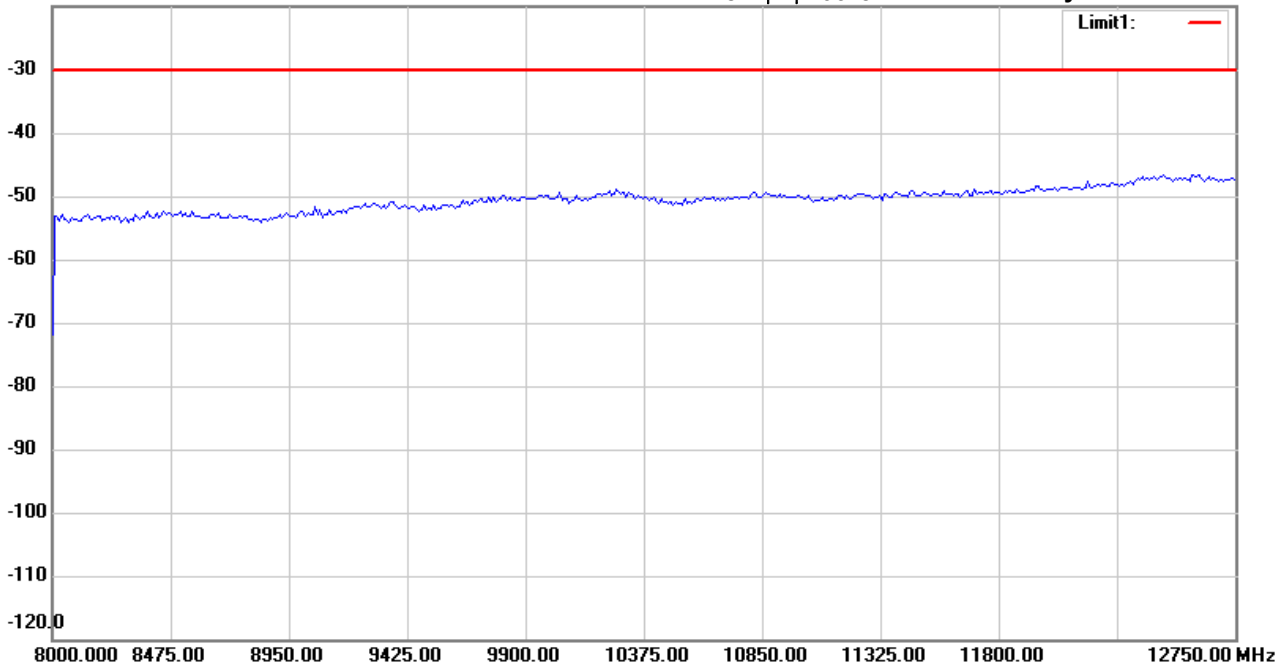

Site : Chamber

Condition : ETSI EN300\_422-TX\_Spurious\_OP

Polarization: *Vertical*

EUT : W6M21810-18537

Power : 3Vd.c.

M/N:

Distance: 3m

Test Mode : TX662.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin