

TEST REPORT

Test report no.: 1-5411_22-02-07

BNetzA-CAB-02/21-102

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida

194-8666 Tokyo / JAPAN

Phone: +81-42-739-9121

Contact: Fumio Kamimura

e-mail: kamimura@audio-technica.co.jp

Manufacturer

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida

194-8666 Tokyo / JAPAN

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Professional UHF band wireless microphone

Model name: ATW-T3202aEE1

FCC ID: JFZT3202AEE1

Frequency: 530.000MHz – 589.975MHz

Technology tested: proprietary

Antenna: Integrated antenna

Power supply: 2.4 V to 3.2 V DC

Temperature range: -5°C to +45°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Christoph Schneider
Lab Manager
Radio Communications

Test performed:



Hans-Joachim Wolsdorfer
Lab Manager
Radio Communications

1 Table of contents

| | | |
|------|---|----|
| 1 | Table of contents | 2 |
| 2 | General information | 3 |
| 2.1 | Notes and disclaimer | 3 |
| 2.2 | Application details | 3 |
| 2.3 | Test laboratories sub-contracted | 3 |
| 3 | Test standard/s, references and accreditations | 4 |
| 4 | Reporting statements of conformity – decision rule | 5 |
| 5 | Test environment | 6 |
| 6 | Test item..... | 6 |
| 6.1 | General description | 6 |
| 6.2 | Additional information | 6 |
| 7 | Description of the test setup..... | 7 |
| 7.1 | Shielded fully anechoic chamber..... | 8 |
| 7.2 | Conducted measurements normal and extreme conditions..... | 9 |
| 8 | Sequence of testing | 10 |
| 8.1 | Sequence of testing radiated spurious 30MHz to 12.75GHz | 10 |
| 9 | Measurement uncertainty | 11 |
| 10 | Summary of measurement results | 12 |
| 11 | Additional comments..... | 13 |
| 12 | Measurement results | 14 |
| 12.1 | Transmitter output power..... | 14 |
| 12.2 | Occupied bandwidth | 15 |
| 12.3 | Transmitter frequency stability | 18 |
| 12.4 | Transmitter unwanted emissions (radiated) | 19 |
| 12.5 | Necessary bandwidth (BN) for analogue systems | 22 |
| 13 | Glossary | 26 |
| 14 | Document history..... | 27 |
| 15 | Accreditation Certificate – D-PL-12076-01-04..... | 27 |
| 16 | Accreditation Certificate – D-PL-12076-01-05..... | 28 |

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

| | |
|------------------------------------|------------|
| Date of receipt of order: | 2022-11-21 |
| Date of receipt of test item: | 2022-11-30 |
| Start of test:* | 2022-12-01 |
| End of test:* | 2022-12-08 |
| Person(s) present during the test: | -/- |

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

| Test standard | Date | Description |
|----------------------------|---------|---|
| FCC - Title 47 CFR Part 15 | | FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices |
| ETSI EN 300 422-1 V1.4.2 | 2011-08 | Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement |

| Guidance | Version | Description |
|------------------|---------|---|
| ANSI C63.4-2014 | -/- | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | -/- | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

| Accreditation | Description |
|------------------|---|
| D-PL-12076-01-05 | Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf |




FCC designation number: DE0002

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

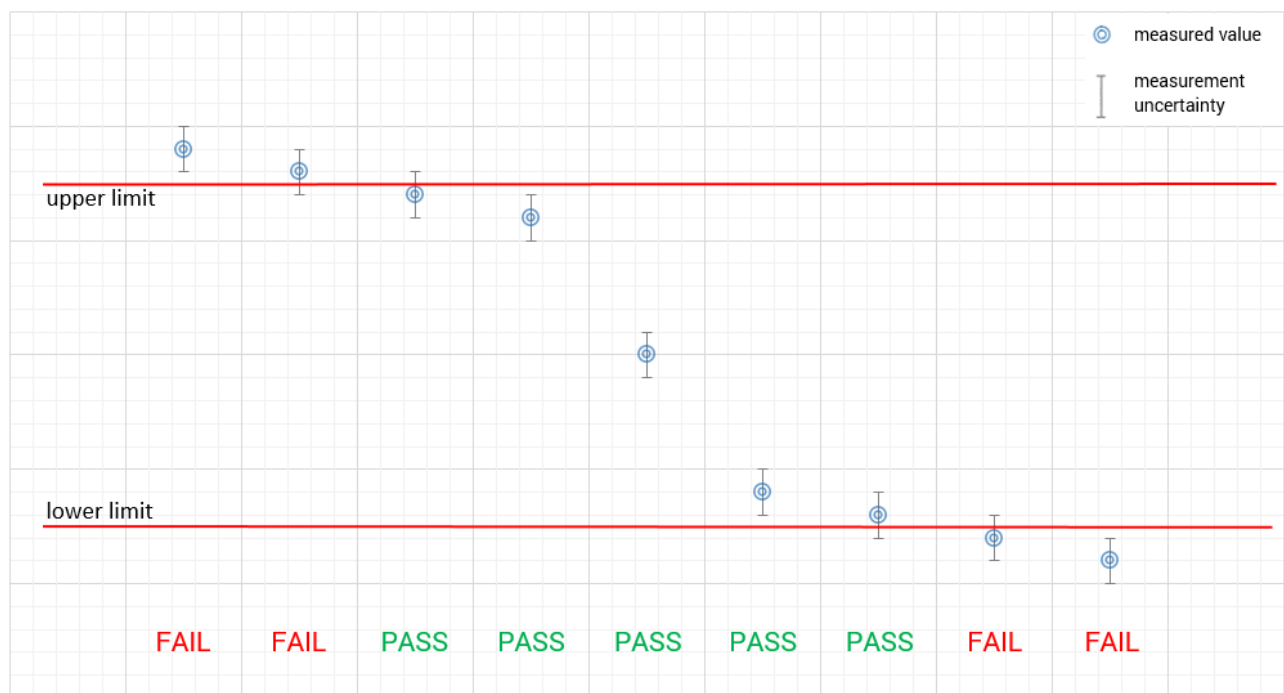

5 Test environment

| | | | |
|---------------------------|---|------------------|--------------------------------------|
| Temperature | : | T _{nom} | +22 °C during room temperature tests |
| | | T _{max} | +45 °C during high temperature tests |
| | | T _{min} | -5 °C during low temperature tests |
| Relative humidity content | : | | 55 % |
| Barometric pressure | : | | 1021 hpa |
| Power supply | : | V _{nom} | 3.0 V DC |
| | | V _{max} | 3.2 V |
| | | V _{min} | 2.4 V |

6 Test item

6.1 General description

| | | | |
|----------------------------|---|---|-----------------|
| Kind of test item | : | Professional UHF band wireless microphone | |
| Model name | : | ATW-T3202aEE1 | |
| S/N serial number | : | Rad. | EE1 sample no.2 |
| | | Cond. | EE1 sample no.3 |
| Hardware status | : | Ver. 1.0 | |
| Software status | : | 999.999.001 | |
| Firmware status | : | 999.999.001 | |
| Frequency band | : | 530.000MHz – 589.975MHz | |
| Type of radio transmission | : | modulated carrier | |
| Use of frequency spectrum | : | | |
| Type of modulation | : | FM | |
| Number of channels | : | 2400 | |
| Antenna | : | Integrated antenna | |
| Power supply | : | 2.4 V to 3.2 V DC | |
| Temperature range | : | -5°C to +45°C | |

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-5411_22-02-06_AnnexA
- 1-5411_22-02-01_AnnexB
- 1-5411_22-02-01_AnnexD

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

| | | | |
|------|--|-----|--|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vlk! | Attention: extended calibration interval | | |
| NK! | Attention: not calibrated | *) | next calibration ordered / currently in progress |

7.1 Shielded fully anechoic chamber

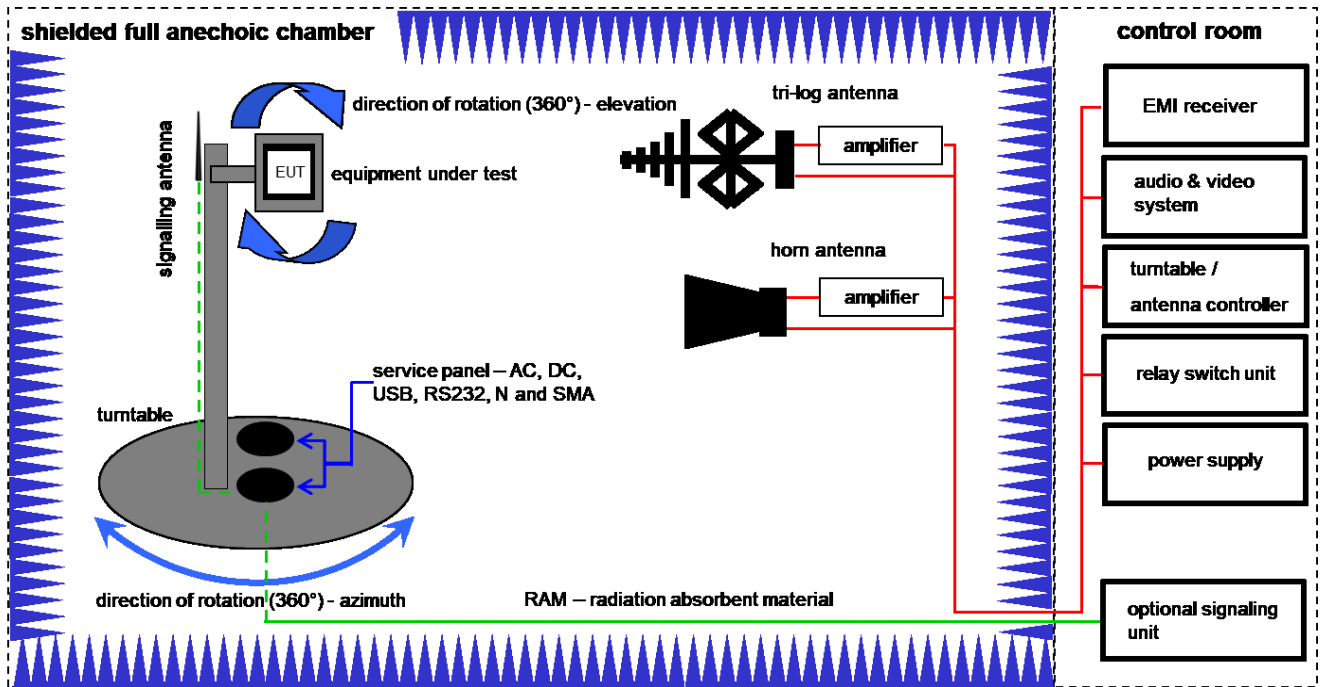

Measurement distance: tri-log antenna and horn antenna 3 meter

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$$OP \text{ [dBm]} = -65.0 \text{ [dBm]} + 50 \text{ [dB]} - 20 \text{ [dBi]} + 5 \text{ [dB]} = -30 \text{ [dBm]} (1 \mu\text{W})$$

Equipment table:

| No. | Setup | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|--|--------------------|-------------------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A,B | Anechoic chamber | FAC 3/5m | MWB / TDK | 87400/02 | 300000996 | ev | -/- | -/- |
| 2 | A,B | Switch / Control Unit | 3488A | HP | * | 300000199 | ne | -/- | -/- |
| 3 | A,B | EMI Test Receiver 20Hz- 26,5GHz | ESU26 | R&S | 100037 | 300003555 | k | 09.12.2021 | 31.12.2022 |
| 4 | B | Highpass Filter | WHK1.1/15G-10SS | Wainwright | 3 | 300003255 | ev | -/- | -/- |
| 5 | A | TRIALOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163 | Schwarzbeck Mess - Elektronik | 371 | 300003854 | vKI! | 04.02.2022 | 29.02.2024 |
| 6 | A,B | Broadband Amplifier 0.5-18 GHz | CBLU5184540 | CERNEX | 22049 | 300004481 | ev | -/- | -/- |
| 7 | A,B | NEXIO EMV-Software | BAT EMC V3.22.0.13 | Nexio | | 300004682 | ne | -/- | -/- |
| 8 | A,B | 4U RF Switch Platform | L4491A | Agilent Technologies | MY50000037 | 300004509 | ne | -/- | -/- |
| 9 | A,B | Arbitrary Function Generator | 33220A | Agilent Technologies | MY44051717 | 300004164 | vKI! | 09.12.2021 | 31.12.2023 |
| 10 | B | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115 | EMCO | 8812-3089 | 300000307 | vKI! | 11.02.2022 | 29.02.2024 |

7.2 Conducted measurements normal and extreme conditions

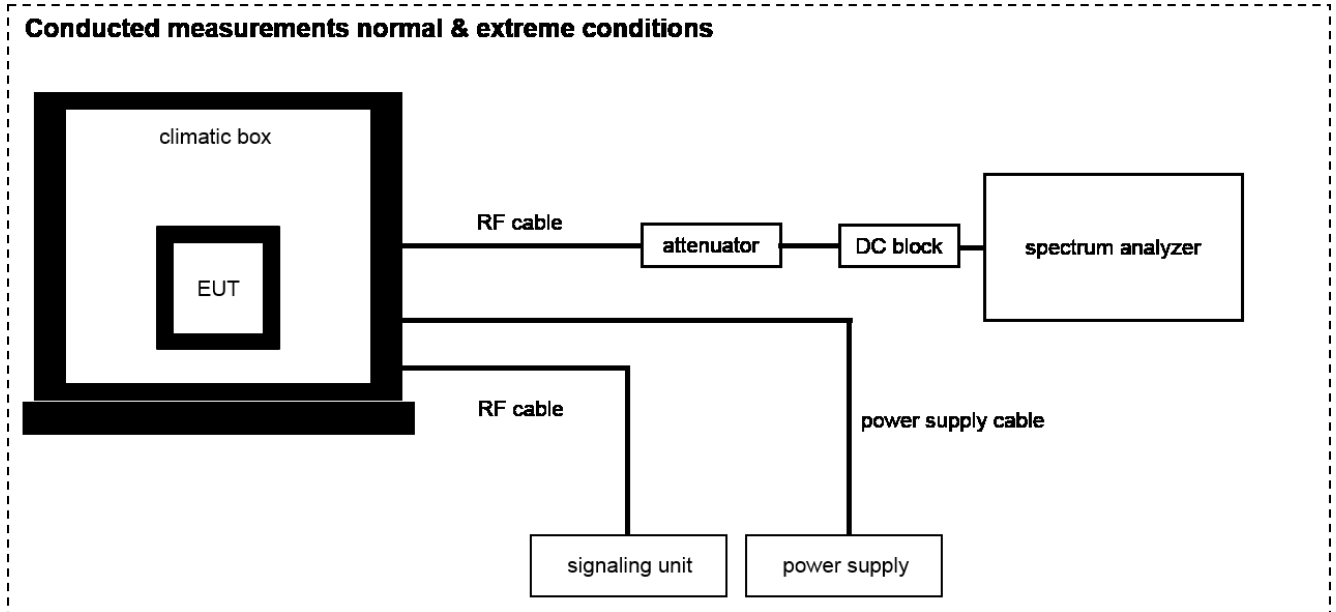

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

| No. | Setup | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|------------------------------|---------|----------------------|--------------------|-----------|---------------------|------------------|------------------|
| 1 | B | Climatic box | VT 4002 | Heraeus Voetsch | 585660468200 10 | 300003019 | ev | 09.05.2022 | 08.05.2024 |
| 2 | A | Arbitrary Function Generator | 33220A | Agilent Technologies | MY44051717 | 300004164 | vKI! | 09.12.2021 | 31.12.2023 |
| 3 | A,B | Signal analyzer | FSW26 | Rohde&Schwarz | 101455 | 300004528 | k | 14.12.2021 | 31.12.2022 |
| 4 | A,B | Power Supply | HMP2020 | Rohde & Schwarz | 102219 | 300006192 | k | 08.04.2021 | 07.04.2023 |

8 Sequence of testing

8.1 Sequence of testing radiated spurious 30MHz to 12.75GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

9 Measurement uncertainty

| Measurement uncertainty | |
|--|--|
| Test case | Uncertainty |
| Transmitter output power | ± 3 dB |
| Occupied bandwidth | ± 3 kHz to 10 kHz (depends on the used RBW) |
| Transmitter frequency stability | ± 1 Hz to 1 kHz (depends on the used RBW) |
| Transmitter unwanted emissions (radiated or conducted) | Radiated: ± 3 dB Conducted: ± 0.5 dB |
| Modulation characteristics | -/- |
| Necessary bandwidth (BN) for analogue systems | ± 1 kHz (depends on the used RBW) |
| Frequency modulation | ± 3 kHz (depends on the used RBW) |
| Spurious emissions conducted below 30 MHz (AC conducted) | ± 2.6 dB |

10 Summary of measurement results

| | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained |
| <input type="checkbox"/> | There were deviations from the technical specifications ascertained |
| <input type="checkbox"/> | This test report is only a partial test report. The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description | Verdict | Date | Remark |
|---------------|-------------|------------|------------|--------|
| RF-Testing | FCC Part 15 | See table! | 2023-01-17 | -/- |

| Test specification clause | Test case | Temperature conditions | Voltage conditions | C | NC | NA | NP | Remark |
|--|--|------------------------|--------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|-------------------------|
| FCC Part 15.236 (d)(1) FCC Part 15.236 (d)(2) | Transmitter output power | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| FCC Part 15.236 (f)(2) | Occupied bandwidth | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| FCC Part 15.236 (f)(3) | Transmitter frequency stability | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| | | Extreme | Extreme | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| FCC Part 15.236 (g) | Transmitter unwanted emissions (radiated or conducted) | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| FCC Part 15.236 (g) | Necessary bandwidth (BN) for digital systems | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| FCC Part 15.236 (g) | Receiver spurious emissions | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | No receiver integrated! |
| FCC Part 15.107(a) FCC Part 15.207 | Conducted emissions < 30 MHz | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | -/- |

Note: C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

11 Additional comments

- Reference documents: Customer-Questionnaire_ATW-T3202aEE1.docx
- Special test descriptions: tests under extreme conditions have been performed from -30°C to $+50^{\circ}\text{C}$ and $3\text{V DC} \pm 15\%$
- Configuration descriptions: EUT tested with a sensitivity setting of -30 dB – pre-setting from manufacturer.
- Test mode:
- No test mode available.
Test signal is applied to the transmitter.
 - Special software is used.
EUT is transmitting pseudo random data by itself
- Antennas and transmit operating modes:
- Operating mode 1 (single antenna)
 - *Equipment with 1 antenna,*
 - *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
 - *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*
 - Operating mode 2 (multiple antennas, no beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*
 - Operating mode 3 (multiple antennas, with beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming. In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

12 Measurement results

12.1 Transmitter output power

Measurement:

| Measurement parameter | |
|--------------------------|---|
| Detector: | Peak (worst case) / Average (RMS) |
| Sweep time: | Auto / 20s |
| Resolution bandwidth: | > emission bandwidth |
| Video bandwidth: | > resolution bandwidth |
| Span: | > 2 times emissions bandwidth |
| Trace mode: | Max. hold |
| EUT configuration: | Peak: Unmodulated carrier RMS: Modulate the transmitter with a 2.5 kHz tone at a level 16 dB higher than that required to produce a frequency deviation of ± 75 kHz, or to produce 50% of the manufacturer's rated deviation, whichever is less. |
| Test setup: | See sub clause 7.2 – A |
| Measurement uncertainty: | See sub clause 9 |

Limits:

| Frequency range | FCC Part 15.236(d)(1) |
|--------------------|--------------------------|
| 470 MHz to 608 MHz | 50 mW EIRP (17 dBm EIRP) |

Result:

| Transmitter output power e.i.r.p. | | | |
|-----------------------------------|-----------|-----------|-----------|
| Frequencies / MHz | 530.000 | 560.000 | 589.975 |
| Peak | 16.82 dBm | 15.87 dBm | 13.00 dBm |
| Average | 16.77 dBm | 15.82 dBm | 12.95 dBm |

12.2 Occupied bandwidth

Measurement:

| Measurement parameter | |
|--------------------------|--|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 1 % to 5 % of the occupied bandwidth |
| Video bandwidth: | 3 x resolution bandwidth |
| Span: | 2 x emission bandwidth |
| Trace mode: | Max. hold |
| Analyzer function: | 99% power occupied bandwidth function |
| EUT: | Modulated signal with max. frequency deviation |
| Test setup: | See sub clause 7.2 - A |
| Measurement uncertainty: | See sub clause 9 |

Limits:


| FCC |
|---|
| 470 MHz to 608 MHz 200 kHz |
| Occupied bandwidth 99%. Other than single sideband or independent sideband transmitters - when modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit. |

Result:


| Normal mode | |
|-----------------------|-----------|
| Centre frequency (fc) | OBW |
| 530.000 MHz | 86.10 kHz |
| 560.000 MHz | 97.23 kHz |
| 589.975 MHz | 92.21 kHz |

Plots:


Plot 1: 530.000 MHz

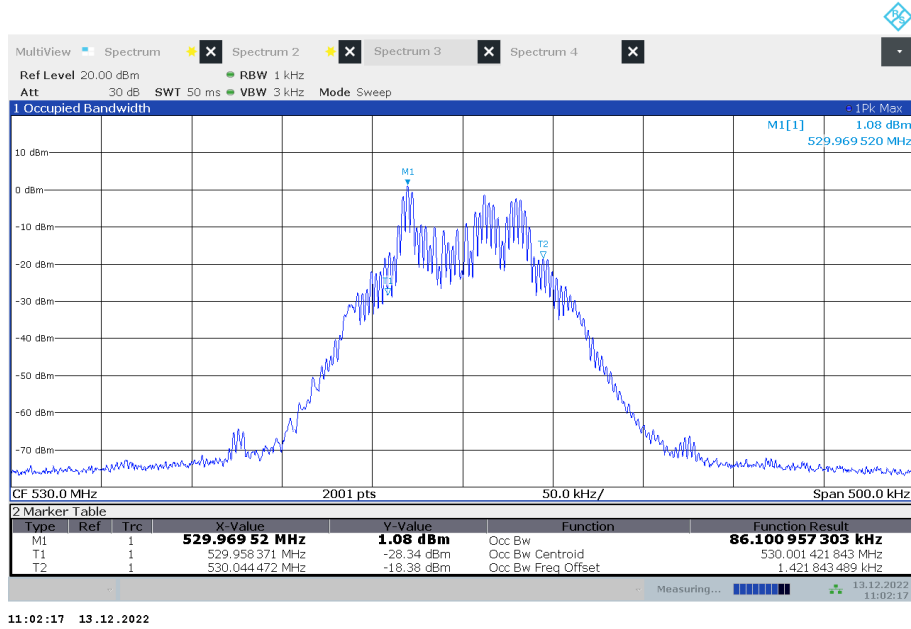

Plot 2: 560.000 MHz

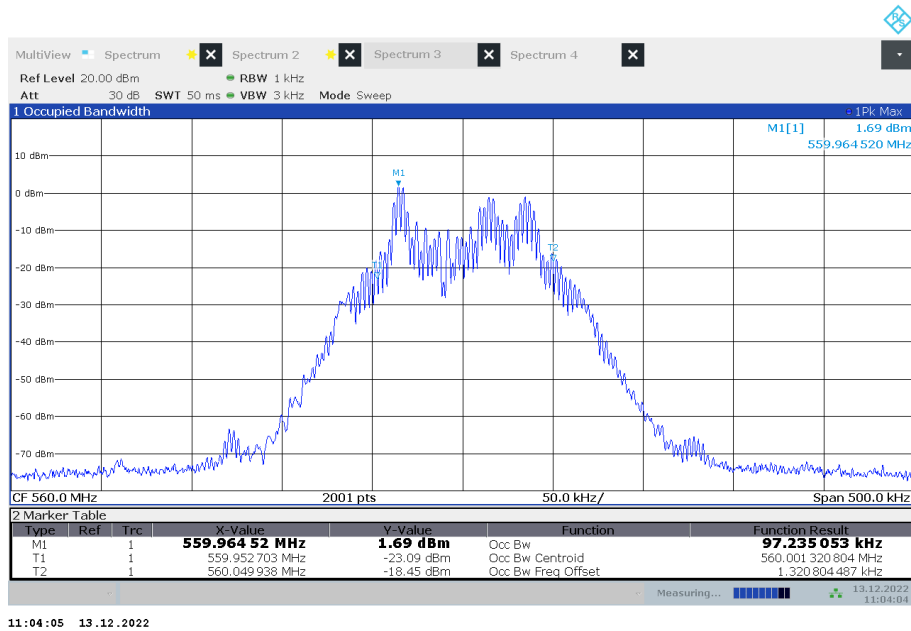

Plot 3: 589.975 MHz

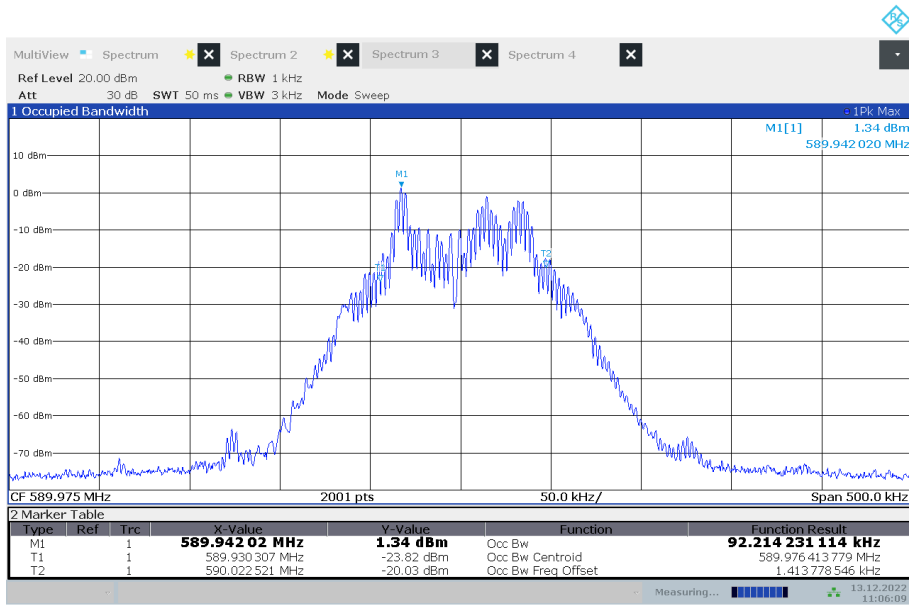

11:06:09 13.12.2022

12.3 Transmitter frequency stability

Measurement:

| Measurement parameter | |
|--------------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 10 Hz |
| Video bandwidth: | 3 x resolution bandwidth |
| Span: | wide enough to follow the frequency drift |
| Trace mode: | clear/write/view |
| EUT: | CW signal or MC with measurement method description |
| Test setup: | See sub clause 7.2 - B |
| Measurement uncertainty: | See sub clause 9 |

Limits:

| FCC & IC |
|-----------------------------|
| 470 MHz to 608 MHz ± 50 ppm |

Results: 560 MHz

| Temperature / Voltage | Frequency (MHz) | Deviation (kHz / ppm) |
|---------------------------------|-----------------|-----------------------|
| -30 °C / V _{nom} | 559.999451 | -0.549/0.98 |
| -20 °C / V _{nom} | 559.999550 | -0.450/0.80 |
| -10 °C / V _{nom} | 559.999650 | -0.350/0.62 |
| 0 °C / V _{nom} | 559.999650 | -0.350/0.62 |
| +10 °C / V _{nom} | 559.999550 | -0.450/0.80 |
| +20 °C / V _{nom} | 559.999583 | -0.417/0.74 |
| +30 °C / V _{nom} | 559.999550 | -0.450/0.80 |
| +40 °C / V _{nom} | 559.999600 | -0.400/0.71 |
| +50 °C / V _{nom} | 559.999500 | -0.500/0.89 |
| | | |
| +20 °C / V _{nom} - 15% | 559.999550 | -0.450/0.80 |
| +20 °C / V _{nom} | 559.999583 | -0.417/0.74 |
| +20 °C / V _{nom} + 15% | 559.999667 | -0.333/0.60 |

12.4 Transmitter unwanted emissions (radiated)

Measurement:

| Measurement parameter | | | | | | | |
|--------------------------|--|------------------|-----------------|---------------------|---------|-------------|-------|
| Detector: | Peak (prescan) / RMS | | | | | | |
| Sweep time: | Auto | | | | | | |
| Resolution bandwidth: | <table border="0"> <tr> <td>25 MHz to 30 MHz</td> <td>9 kHz to 10 kHz</td> </tr> <tr> <td>30 MHz to 1 000 MHz</td> <td>100 kHz</td> </tr> <tr> <td>> 1 000 MHz</td> <td>1 MHz</td> </tr> </table> | 25 MHz to 30 MHz | 9 kHz to 10 kHz | 30 MHz to 1 000 MHz | 100 kHz | > 1 000 MHz | 1 MHz |
| 25 MHz to 30 MHz | 9 kHz to 10 kHz | | | | | | |
| 30 MHz to 1 000 MHz | 100 kHz | | | | | | |
| > 1 000 MHz | 1 MHz | | | | | | |
| Video bandwidth: | 3 * RBW | | | | | | |
| Span: | 100 MHz steps! | | | | | | |
| Trace-Mode: | Max. hold | | | | | | |
| EUT: | MC with max frequency deviation | | | | | | |
| Used equipment: | See chapter 7.1- A / B | | | | | | |
| Measurement uncertainty: | See chapter 9 | | | | | | |

Limits:


| Max. spurious level FCC (according to ETSI EN 300 422-1 v1.4.2 (2011-08)) | | | |
|---|---|--|-------------------------------|
| State | 47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz | Other frequencies ≤ 1000 MHz | All frequencies > 1000 MHz |
| Operating | 4.0 nW | 250 nW | 1.00 µW |
| Standby | 2.0 nW | 2.0 nW | 20.0 nW |
| FCC | | | |
| The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule: | | | |
| On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least | | 25 dB | |
| On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth | | 35 dB | |
| On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least | | 43 + 10log ₁₀ (mean output power in watts) dB | |

Results:


| carrier frequency | unwanted emission frequency | Limit | Level (RMS) |
|-------------------|-----------------------------|-------------------|-------------|
| 530.000 MHz | | no peaks detected | |
| 560.000 MHz | | no peaks detected | |
| 589.975 MHz | | no peaks detected | |

Plots: radiated


Plot 1: 530.000 MHz, spurious emissions, 25 MHz – 12.75 GHz

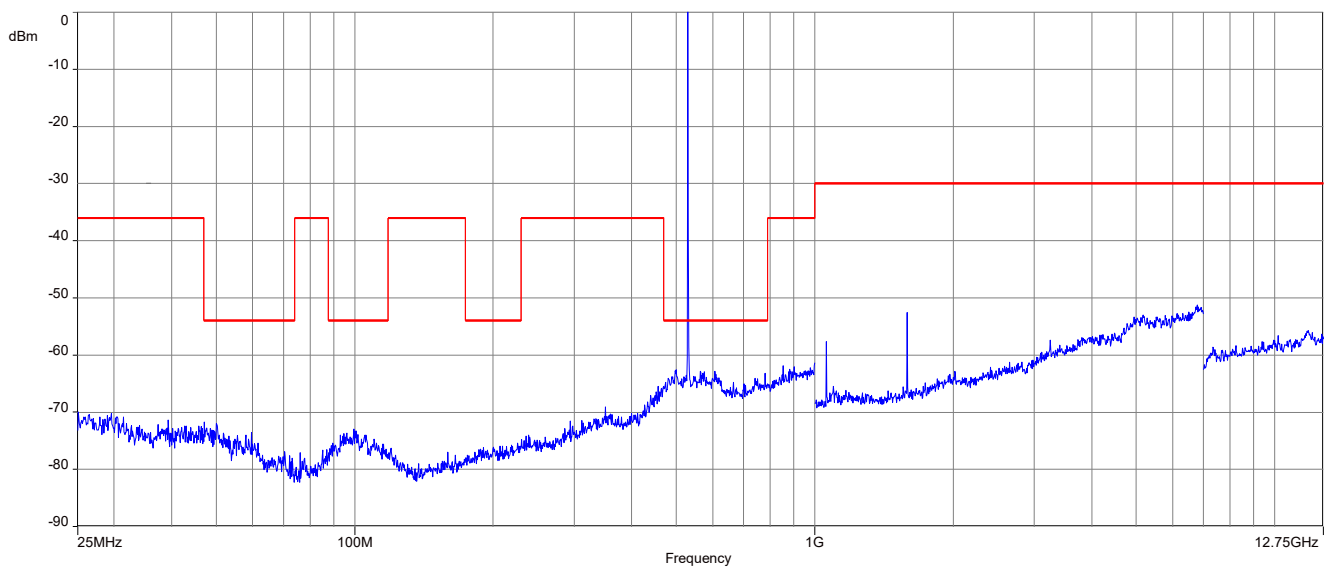

Plot 2: 560.000 MHz, spurious emissions, 25 MHz – 12.75 GHz

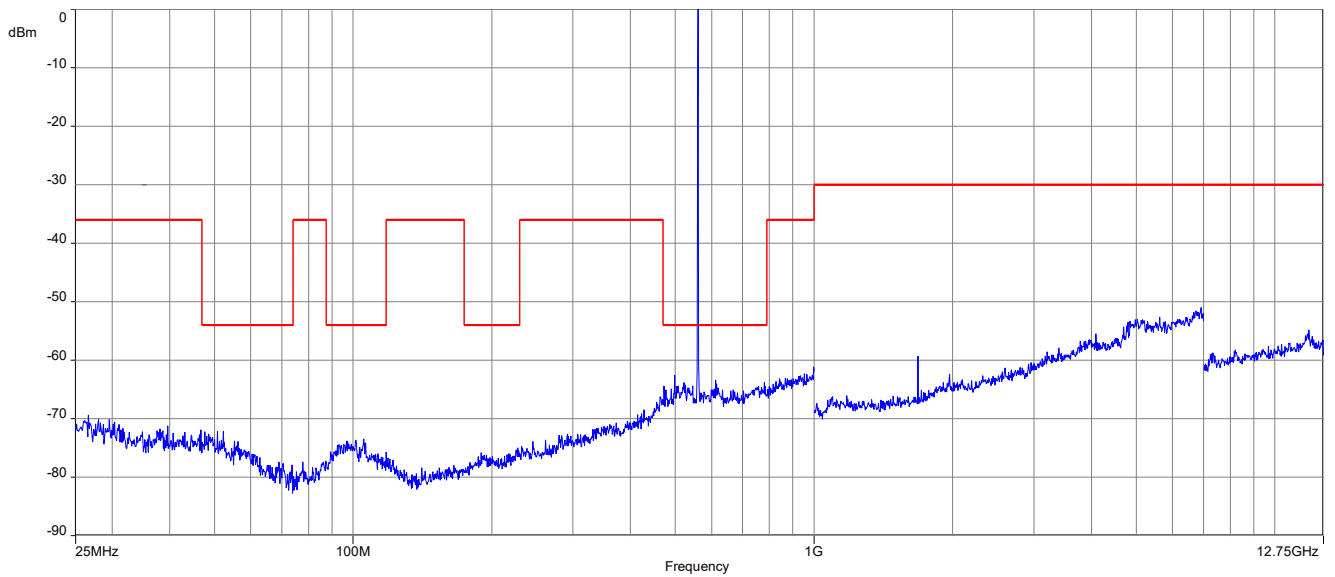

Plot 3: 589.975 MHz, spurious emissions, 25 MHz – 12.75 GHz

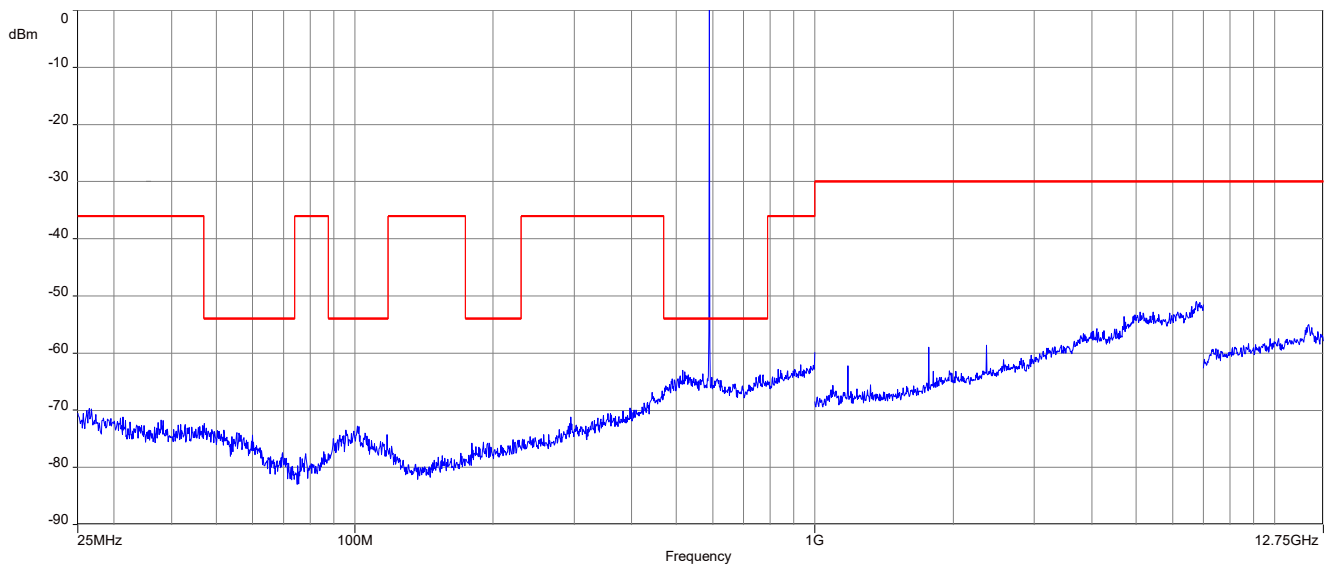


12.5 Necessary bandwidth (BN) for analogue systems

Measurement:


| Measurement parameter | |
|--------------------------|--|
| Detector: | Peak / Average (-90 dBc point only) |
| Sweep time: | Auto |
| Resolution bandwidth: | 1 kHz |
| Video bandwidth: | 1 kHz |
| Span: | $f_c - 1 \text{ MHz}$ to $f_c + 1 \text{ MHz}$ (2 MHz) |
| Trace mode: | Max hold/view |
| EUT: | CW and MC |
| Test setup: | See sub clause 7.2 - A |
| Measurement uncertainty: | See sub clause 9 |

Limits:

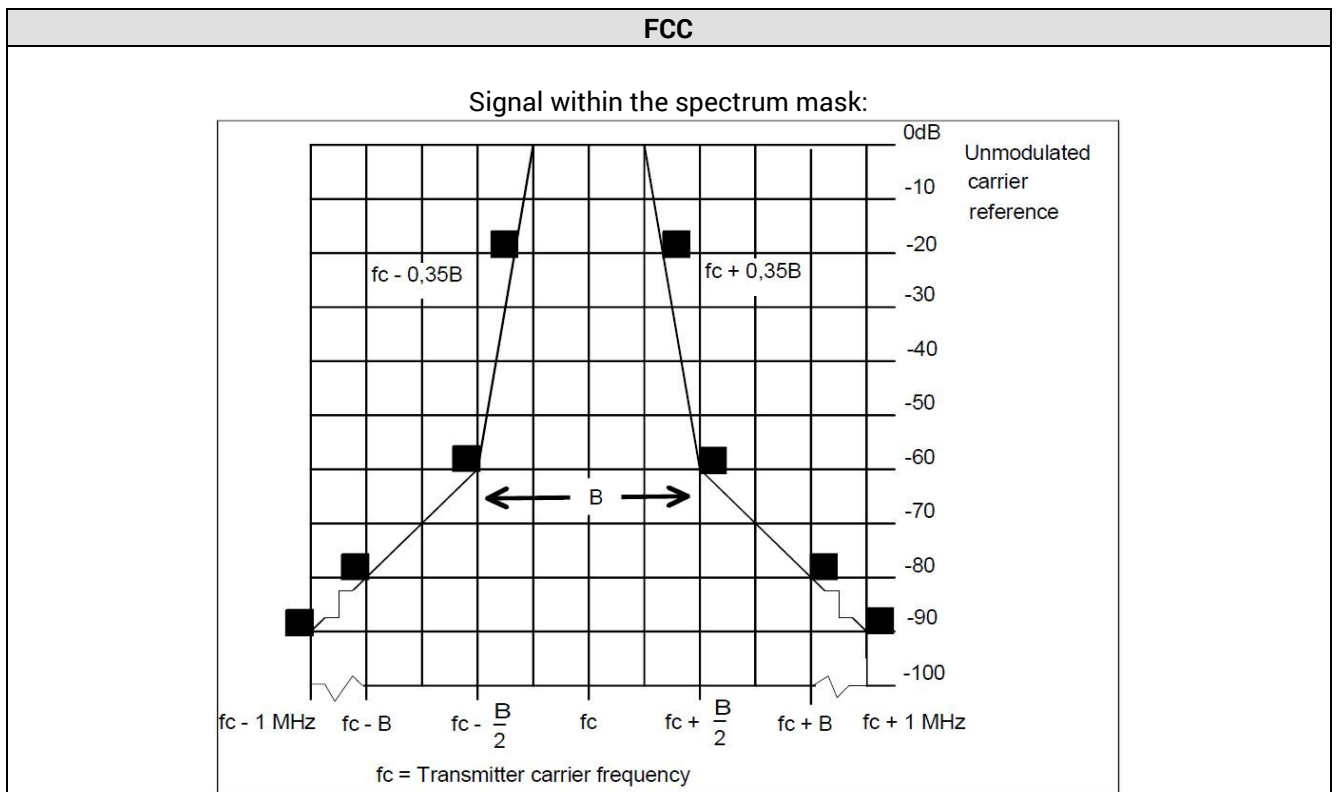


Plots: 530.000 MHz

Plot 1: Unmodulated carrier reference (with pilot-tone)

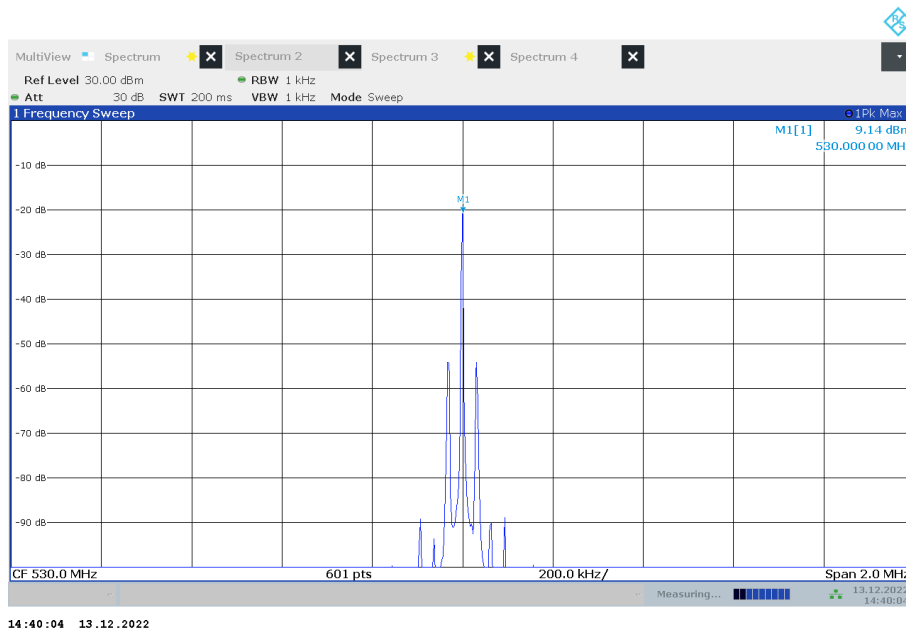


Plot 2: Modulated carrier with the weighted noise source

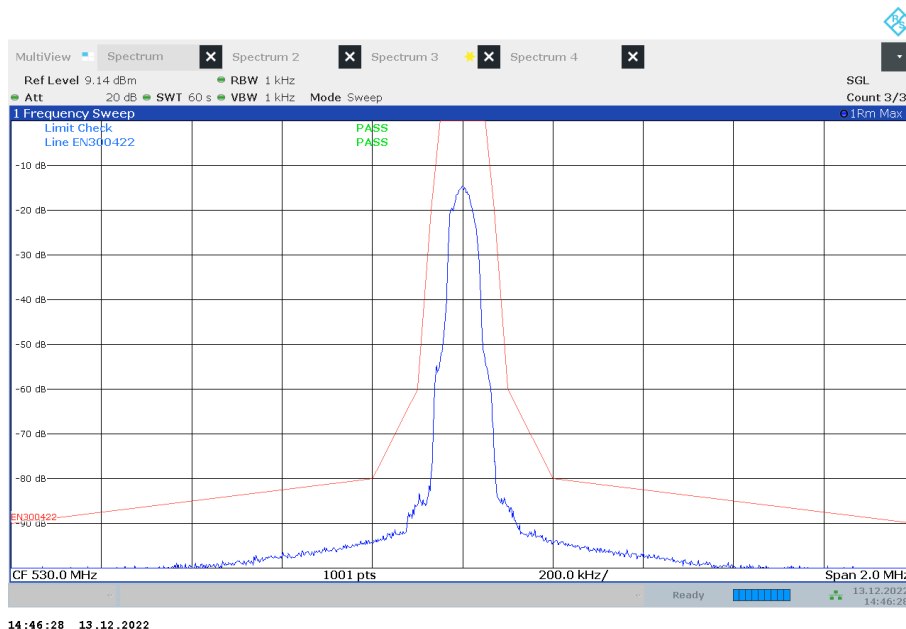


Plots: 560.000 MHz

Plot 1: Unmodulated carrier reference (with pilot-tone)

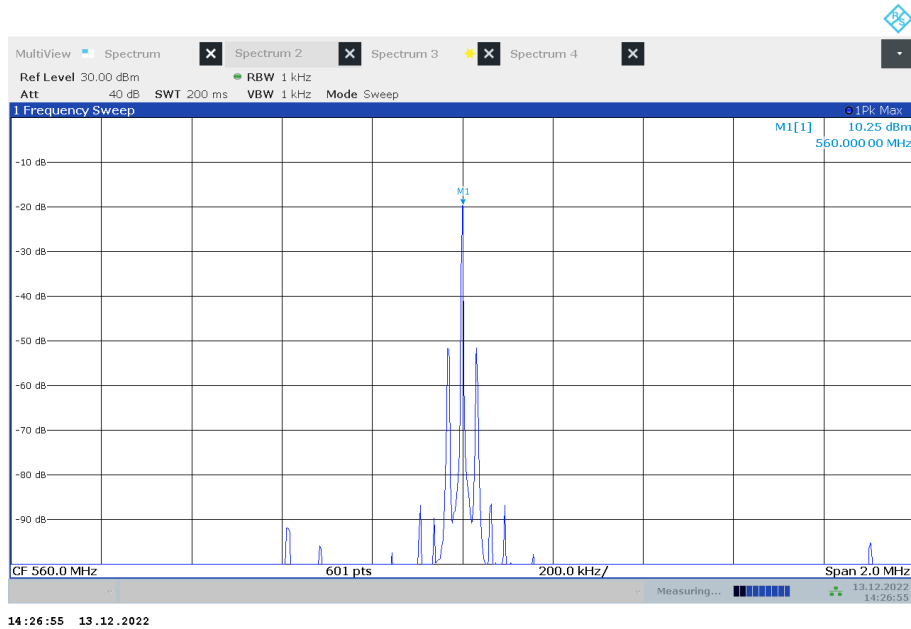


Plot 2: Modulated carrier with the weighted noise source

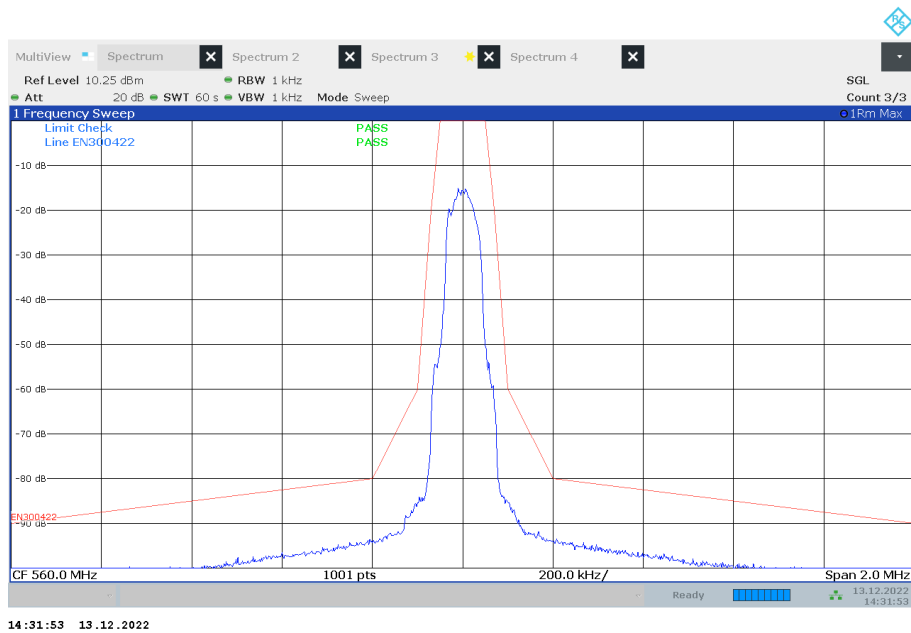


Plots: 589.975 MHz

Plot 1: Unmodulated carrier reference (with pilot-tone)

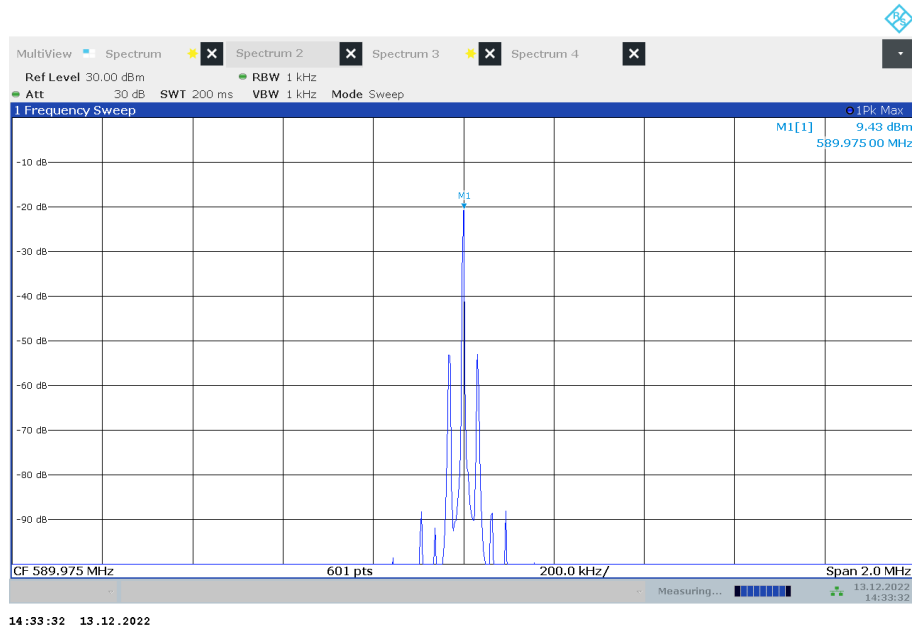

Plot 2: Modulated carrier with the weighted noise source

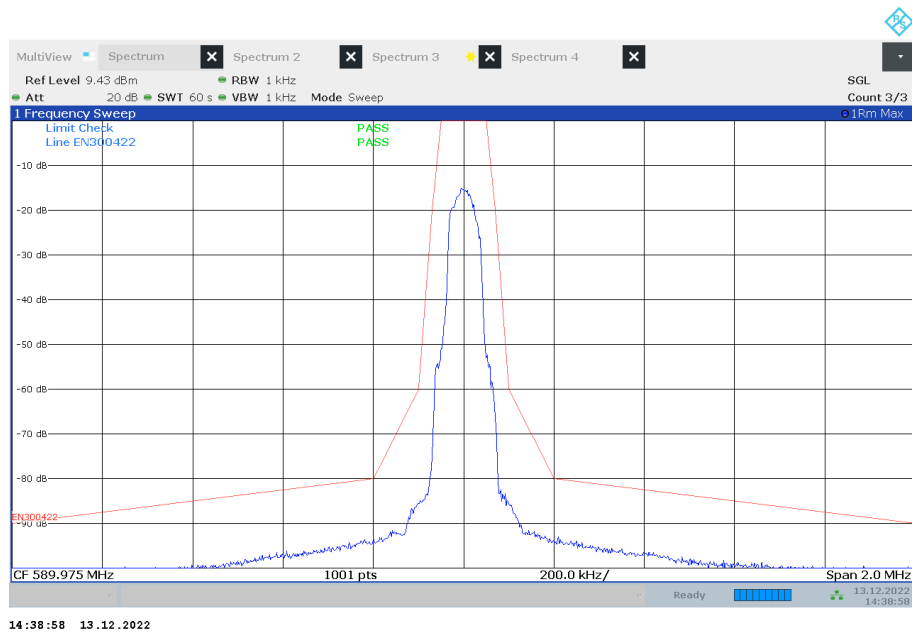

13 Glossary

| | |
|------------------------|--|
| EUT | Equipment under test |
| DUT | Device under test |
| UUT | Unit under test |
| GUE | GNSS User Equipment |
| ETSI | European Telecommunications Standards Institute |
| EN | European Standard |
| FCC | Federal Communications Commission |
| FCC ID | Company Identifier at FCC |
| IC | Industry Canada |
| PMN | Product marketing name |
| HMN | Host marketing name |
| HVIN | Hardware version identification number |
| FVIN | Firmware version identification number |
| EMC | Electromagnetic Compatibility |
| HW | Hardware |
| SW | Software |
| Inv. No. | Inventory number |
| S/N or SN | Serial number |
| C | Compliant |
| NC | Not compliant |
| NA | Not applicable |
| NP | Not performed |
| PP | Positive peak |
| QP | Quasi peak |
| AVG | Average |
| OC | Operating channel |
| OCW | Operating channel bandwidth |
| OBW | Occupied bandwidth |
| OOB | Out of band |
| DFS | Dynamic frequency selection |
| CAC | Channel availability check |
| OP | Occupancy period |
| NOP | Non occupancy period |
| DC | Duty cycle |
| PER | Packet error rate |
| CW | Clean wave |
| MC | Modulated carrier |
| WLAN | Wireless local area network |
| RLAN | Radio local area network |
| DSSS | Dynamic sequence spread spectrum |
| OFDM | Orthogonal frequency division multiplexing |
| FHSS | Frequency hopping spread spectrum |
| GNSS | Global Navigation Satellite System |
| C/N₀ | Carrier to noise-density ratio, expressed in dB-Hz |

14 Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| -/- | Initial release | 2023-01-17 |

15 Accreditation Certificate – D-PL-12076-01-04

| first page | last page |
|---|--|
|  <p>DAKKS Deutsche Akkreditierungsstelle</p> <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation</p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 09.06.2020 by order of: Ing. (FH) Ralf Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes on sheet.</small></p> |  <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p> |

Note: The current certificate annex is published on the websites (link see below).

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-04e.pdf>

or

https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-04_Canada_TCEMC.pdf

16 Accreditation Certificate – D-PL-12076-01-05

| first page | last page | | | |
|--|---|--|--|--|
|  <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:</p> <p>Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-05</p> <p>Frankfurt am Main, 09.06.2020</p> <p>by  Dipl.-Ing. (FH) Ralf Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes inside!</small></p> | <p>Deutsche Akkreditierungsstelle GmbH</p> <table border="0"> <tr> <td>Office Berlin Spittelmarkt 10 10117 Berlin</td> <td>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</td> <td>Office Braunschweig Bundesallee 100 38116 Braunschweig</td> </tr> </table> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p> | Office Berlin Spittelmarkt 10 10117 Berlin | Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main | Office Braunschweig Bundesallee 100 38116 Braunschweig |
| Office Berlin Spittelmarkt 10 10117 Berlin | Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main | Office Braunschweig Bundesallee 100 38116 Braunschweig | | |

Note: The current certificate annex is published on the websites (link see below).

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf>

OR

https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05_TCB_USA.pdf

END OF TEST REPORT