



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

IR/RF REMOTE CONTROL WITH LCD

MODEL NUMBER: AS02723-001

FCC ID: JJ4-MR3

REPORT NUMBER: 07U11059-1

ISSUE DATE: JUNE 27, 2007

Prepared for
GYRATION
12950 SARATOGA AVENUE
SARATOGA, CA 95070, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	06/27/07	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	7
5.6. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	8
7. LIMITS AND RESULTS	9
7.1. <i>CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND</i>	9
7.1.1. 6 dB BANDWIDTH	9
7.1.2. 99% BANDWIDTH.....	13
7.1.3. PEAK OUTPUT POWER	17
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	22
7.1.5. AVERAGE POWER.....	25
7.1.6. PEAK POWER SPECTRAL DENSITY	26
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	30
7.2. <i>RADIATED EMISSIONS.....</i>	37
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	37
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	40
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	49
8. SETUP PHOTOS	53

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: GYRATION
12950 SARATOGA AVENUE
SARATOGA, CA 95070, U.S.A.

EUT DESCRIPTION: IR/RF REMOTE CONTROL WITH LCD

MODEL: AS2723-001

SERIAL NUMBER: 01941

DATE TESTED: JUNE 07- 11, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



TOM CHEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Remote Controller with LCD. It provides wireless RF communications to the transceiver, which is connected to a standard PC running Microsoft Windows XP or Vista. The transceiver has a USB interface. The Remote Controller provides both 2.4 GHz RF communication as well as standard remote IR data. It contains an LCD screen. Various buttons are provided for user interface.

The Remote Controller is powered by 4 standard AAA +1.5V batteries. Internal voltages are 6V and 3.3VDC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2479	DSSS	-9.18	0.12

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an integral PCB antenna with a maximum gain of 0dBi.

5.4. SOFTWARE AND FIRMWARE

Computer Operating System: Standard Windows XP, or Vista.

Firmware Name: SW02764-001 V1.0

Firmware Version: SW02761-001 V1.0

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was initially tested in three orthogonal axes to find the worst orientation, and it was determined that the Z orientation is the worst case (refer to the set up photos for an indication of the different orientations). Thus, the Z orientation was used for all radiated emissions testing.

The EUT has a fixed raw data rate of 1Mbps; therefore, this data rate was used as the worst-case data rate.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

EUT is stand-alone.

SETUP DIAGRAM FOR TESTS

EUT is stand-alone.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	04/15/08
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00931	08/01/07
Spectrum Analyzer 9KHz ~ 26.5 GHz	Agilent / HP	E4407B	MY41444592	10/06/07
2.4-2.5 GHz Reject Filter	Micro-Tronics	BRM50702	1	CNR
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/02/07
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42070220	11/26/07
Antenna, Bilog 30 MHz ~ 2 GHz	Sunol Sciences	JB1	A0022704	08/13/07
Preamplifier, 1300 MHz	Agilent / HP	8447D	1937A02062	05/09/08
SA Display Section 2	Agilent / HP	85662A	2816A16696	04/07/08
Quasi-Peak Adaptor	Agilent / HP	85650A	3145A01654	01/21/08
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	01/07/08
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/02/07

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2402	950	500	450
Middle	2441	975	500	475
High	2479	975	500	475

6 DB BANDWIDTH

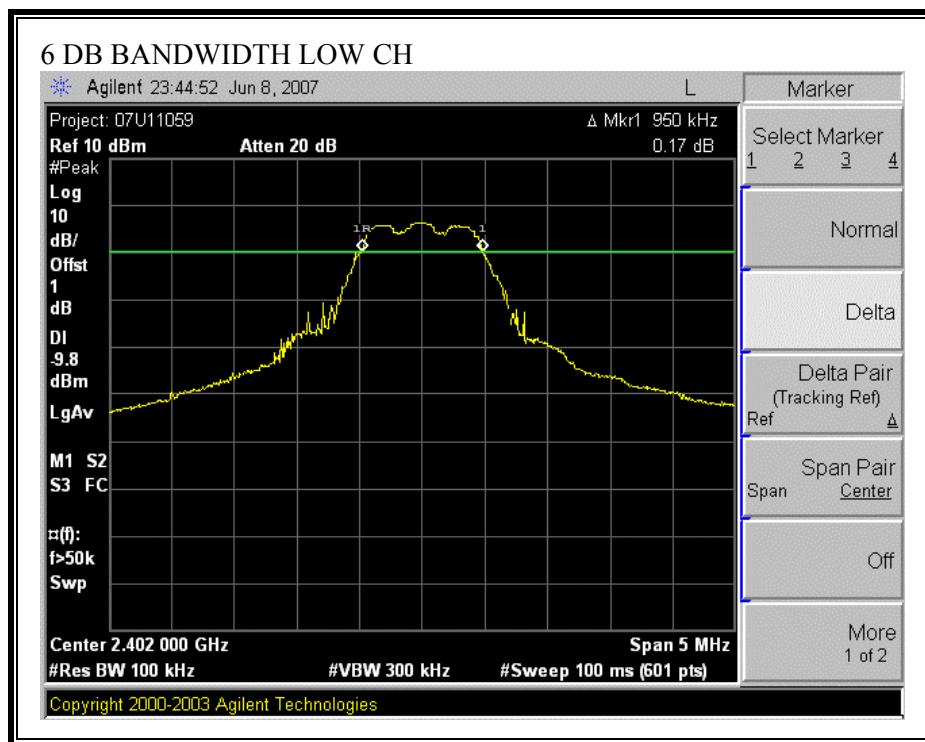

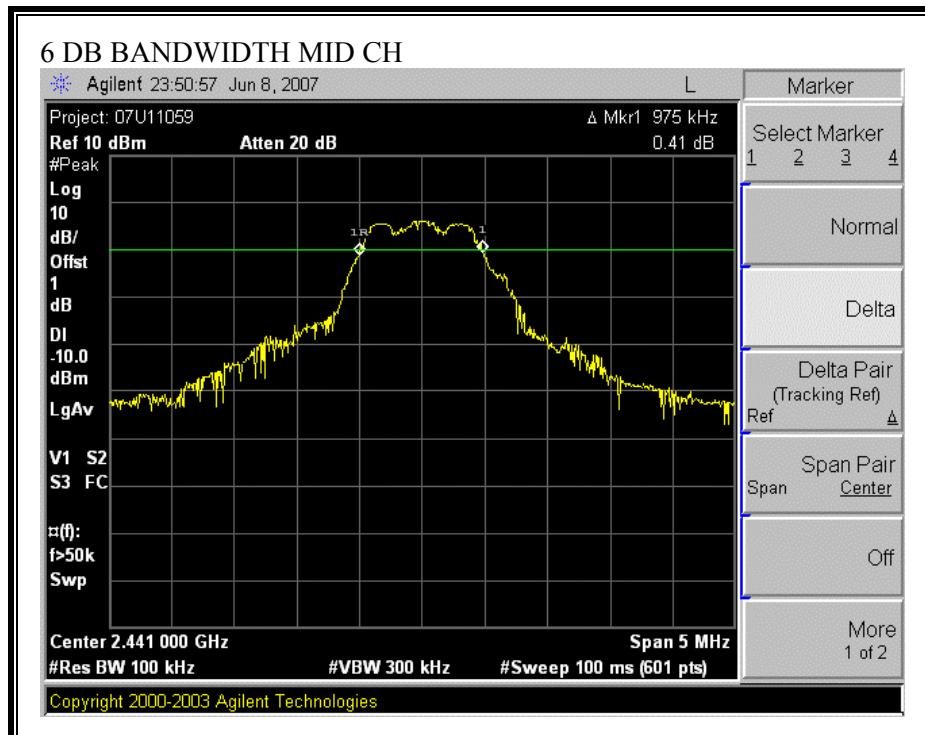

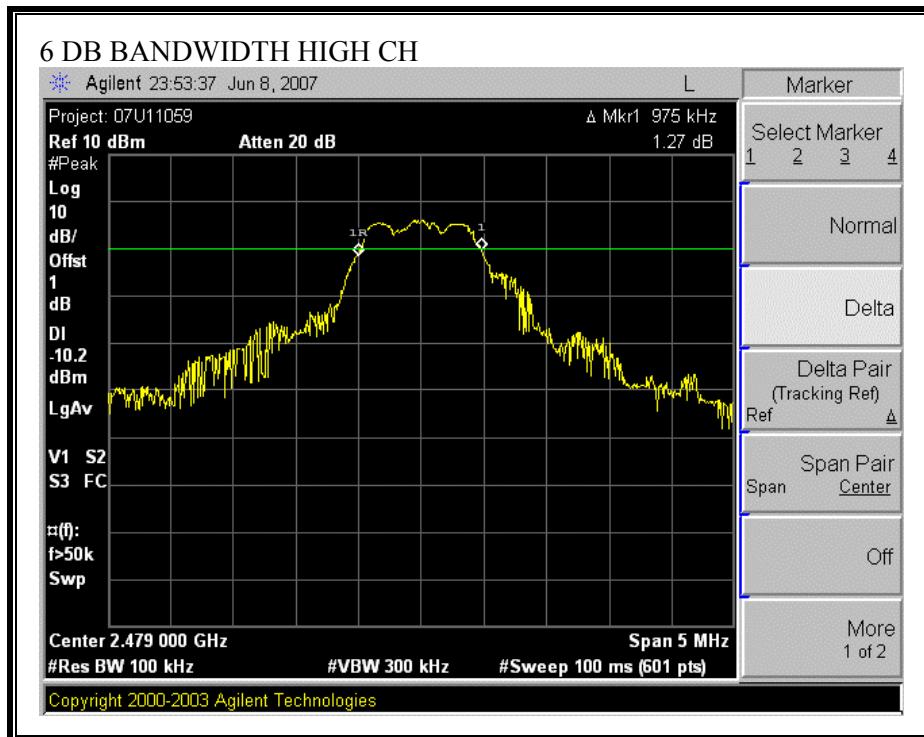

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.15
Middle	2441	1.261
High	2479	1.284

99% BANDWIDTH

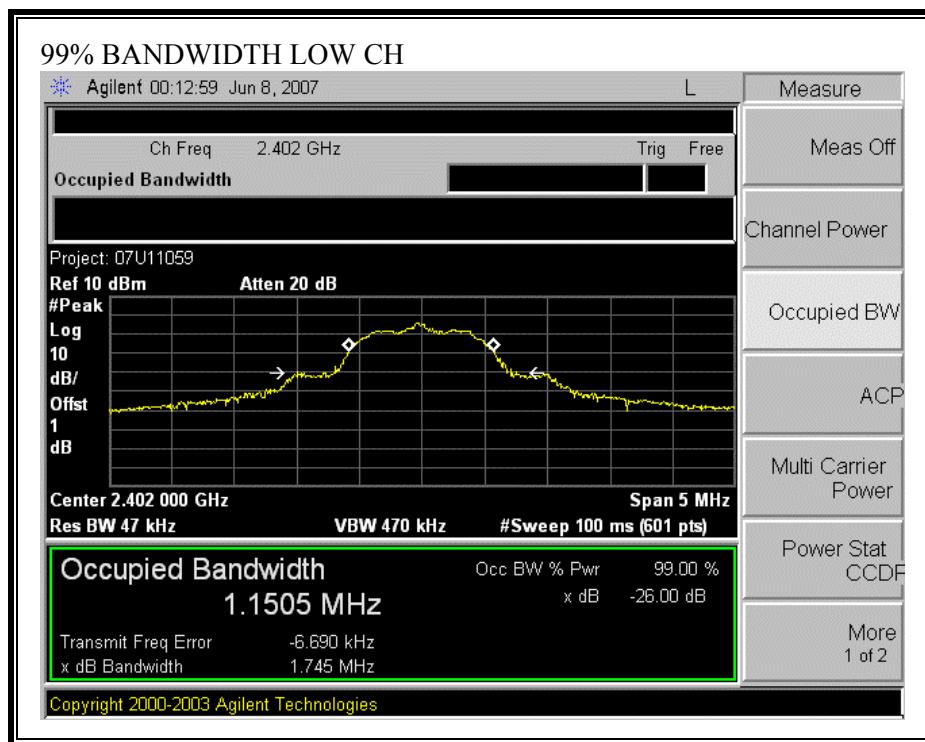

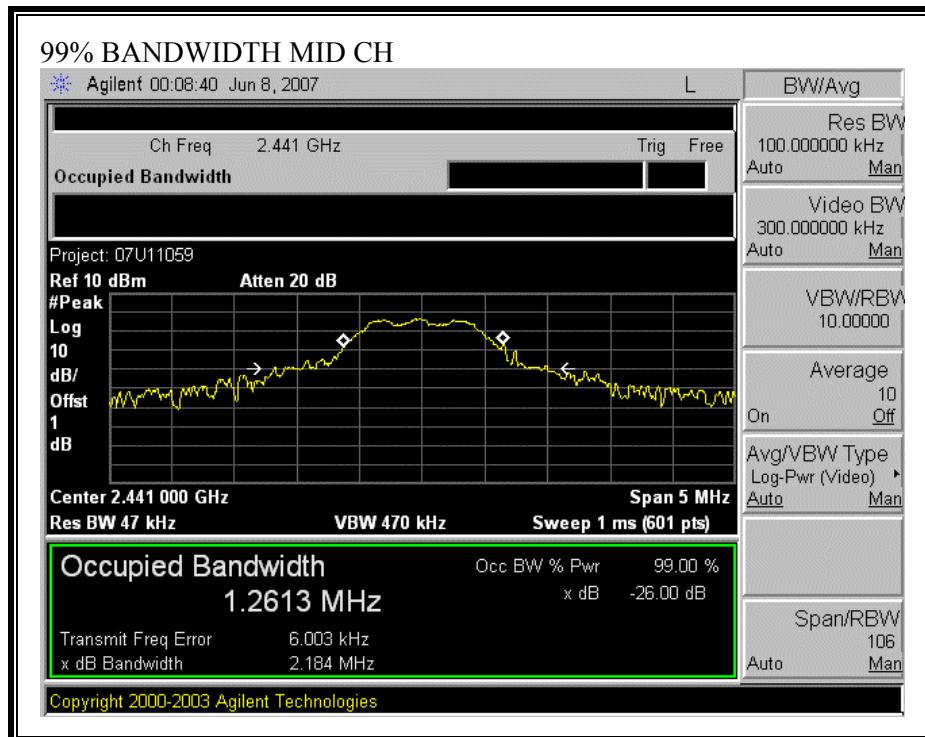

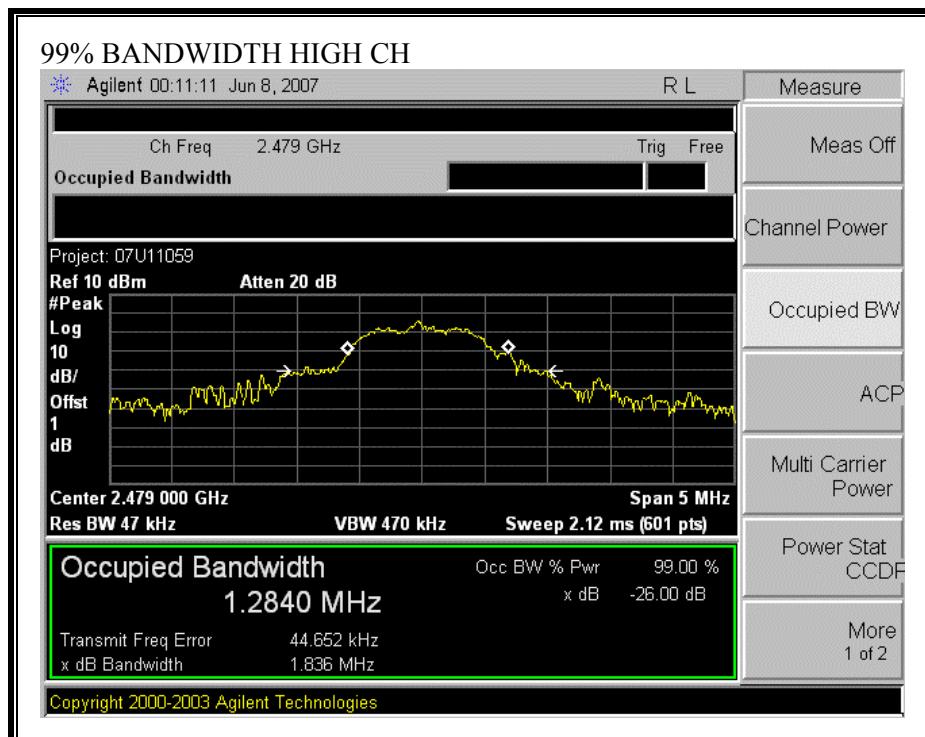

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

The test is performed in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005. The transmitter operates continuously therefore Power Output Option 2, Method # 1 is used.


RESULTS


The maximum antenna gain is 0dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.


No non-compliance noted:

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-9.45	30	-39.45
Middle	2441	-9.18	30	-39.18
High	2479	-9.26	30	-39.26

OUTPUT POWER

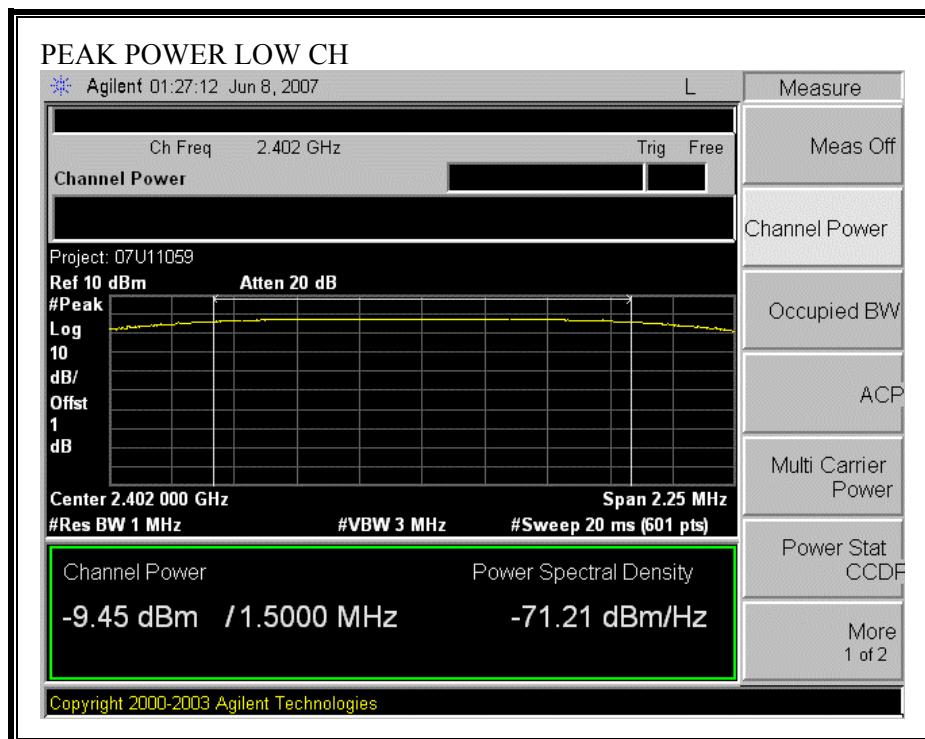

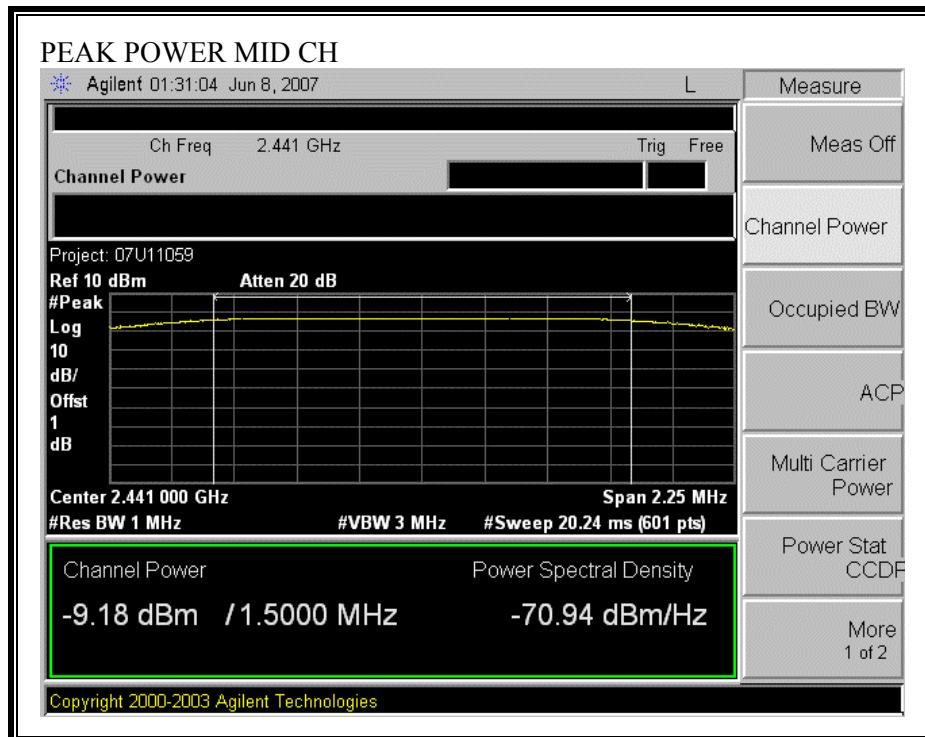

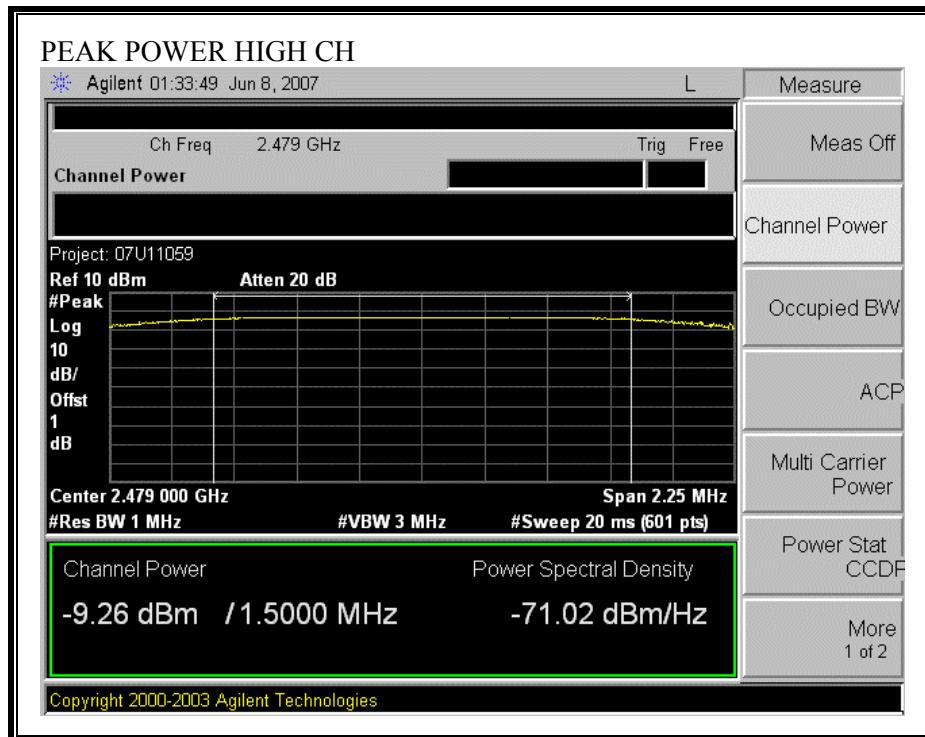

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)
802.11b	20.0	-9.18	0.00	0.00002

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 1dB (including 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-18.45
Middle	2441	-18.64
High	2479	-18.95

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-15.02	8	-23.02
Middle	2441	-15.38	8	-23.38
High	2479	-15.06	8	-23.06

PEAK POWER SPECTRAL DENSITY

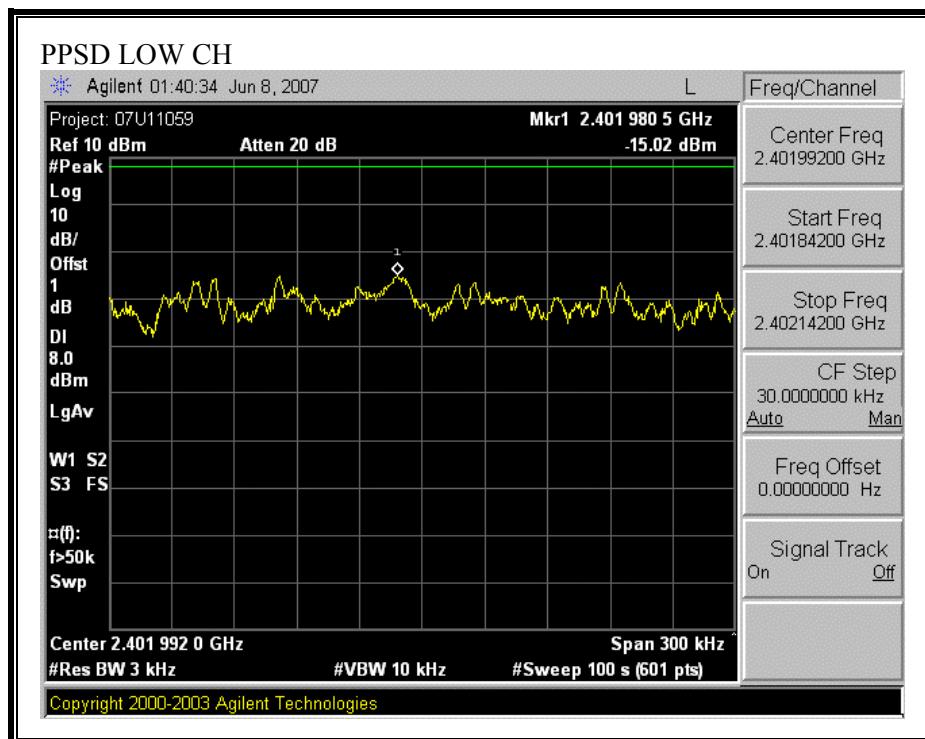

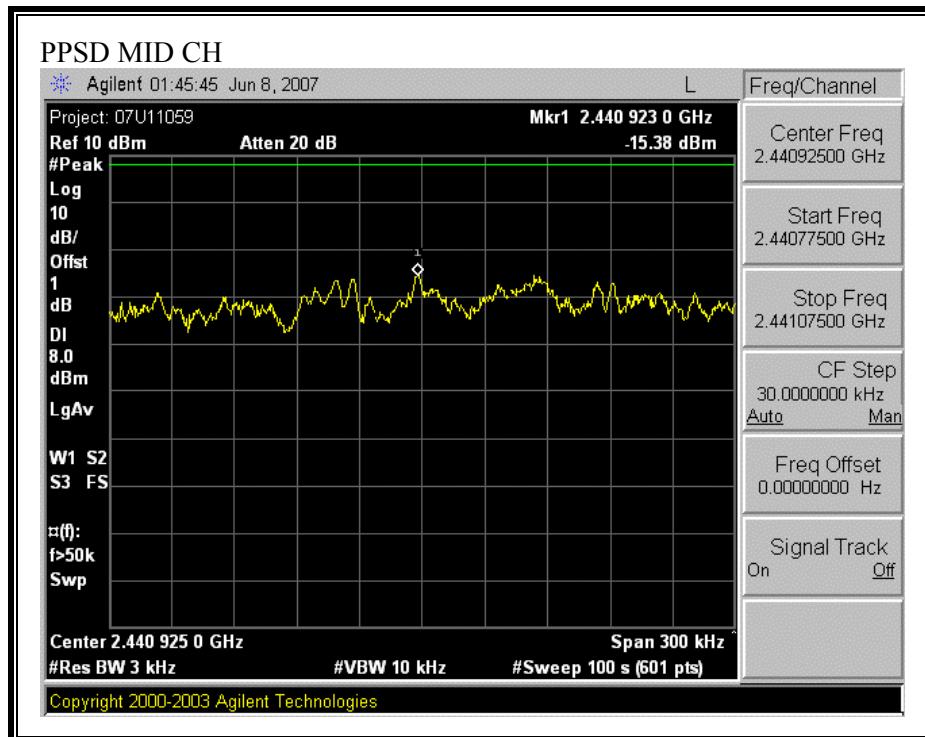

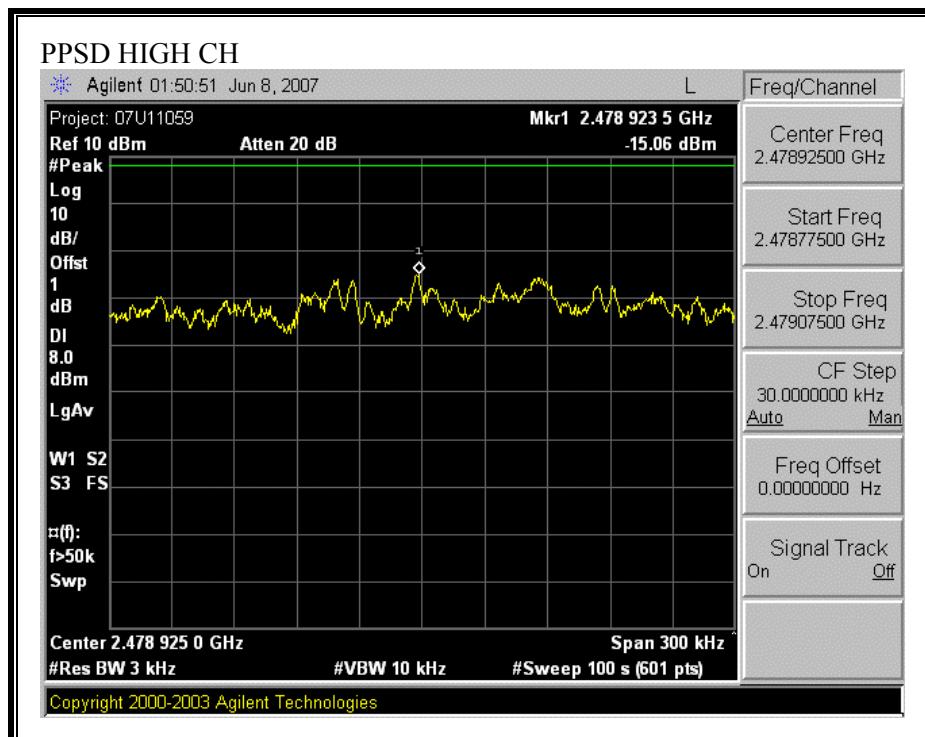

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL

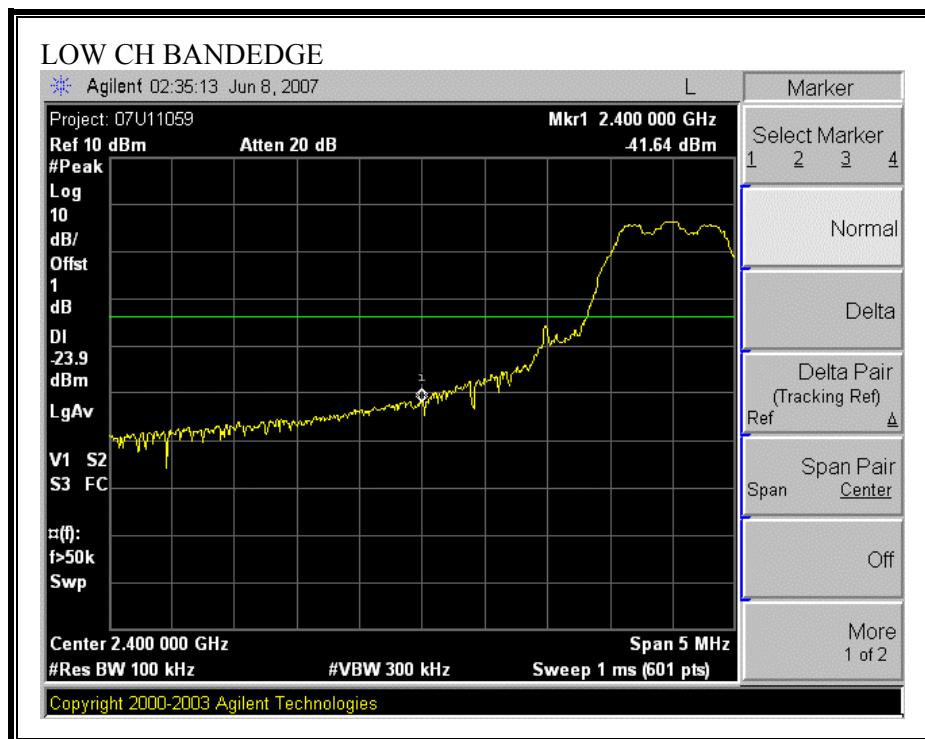

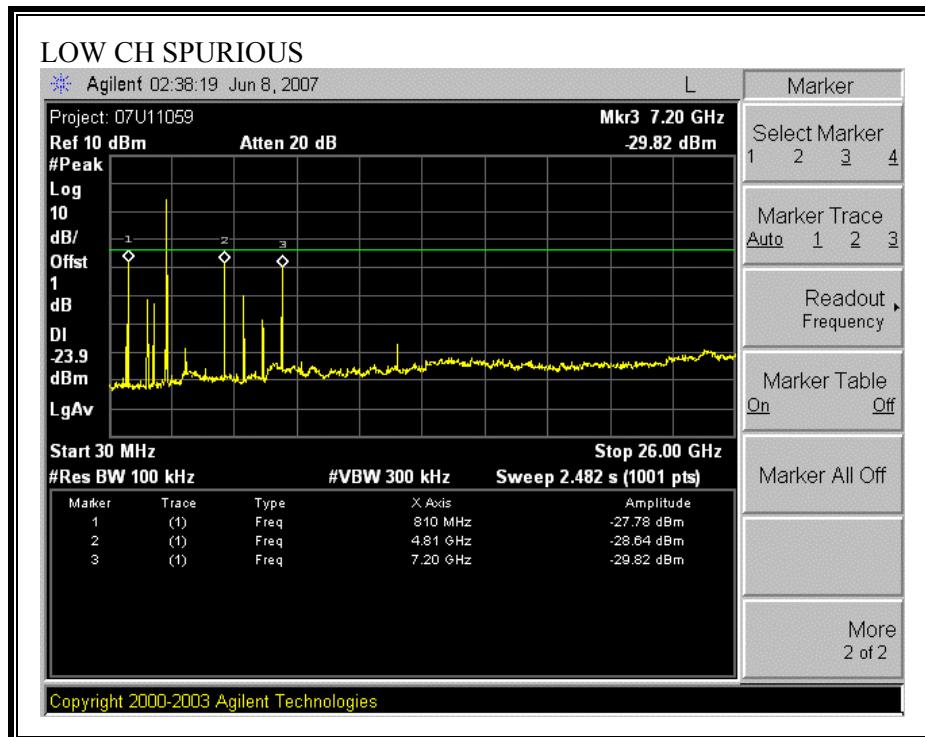



SPURIOUS EMISSIONS, MID CHANNEL

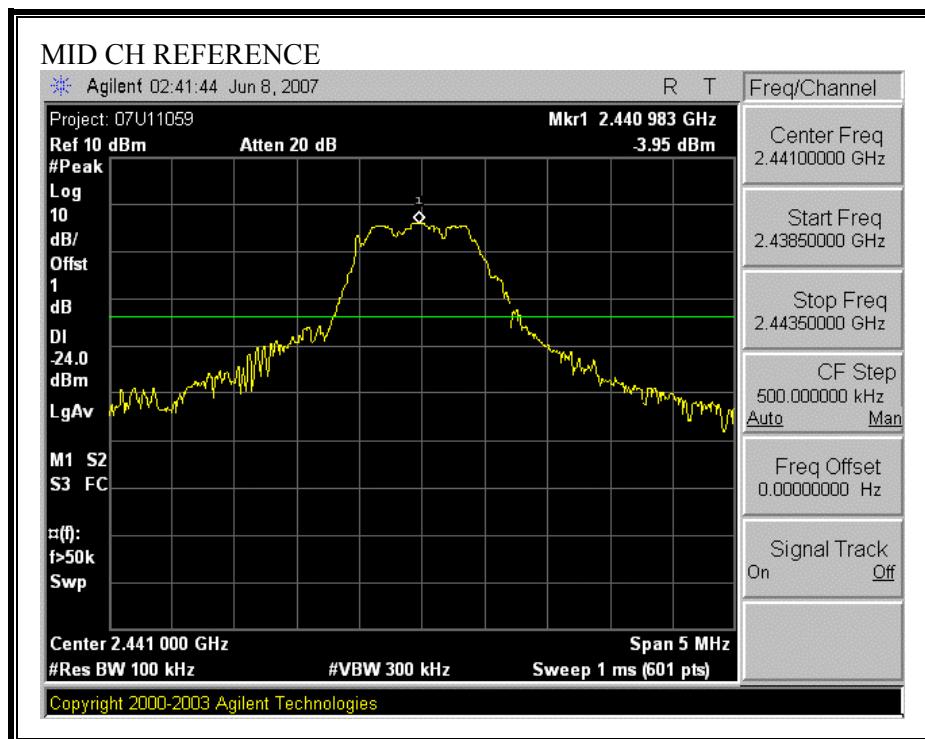

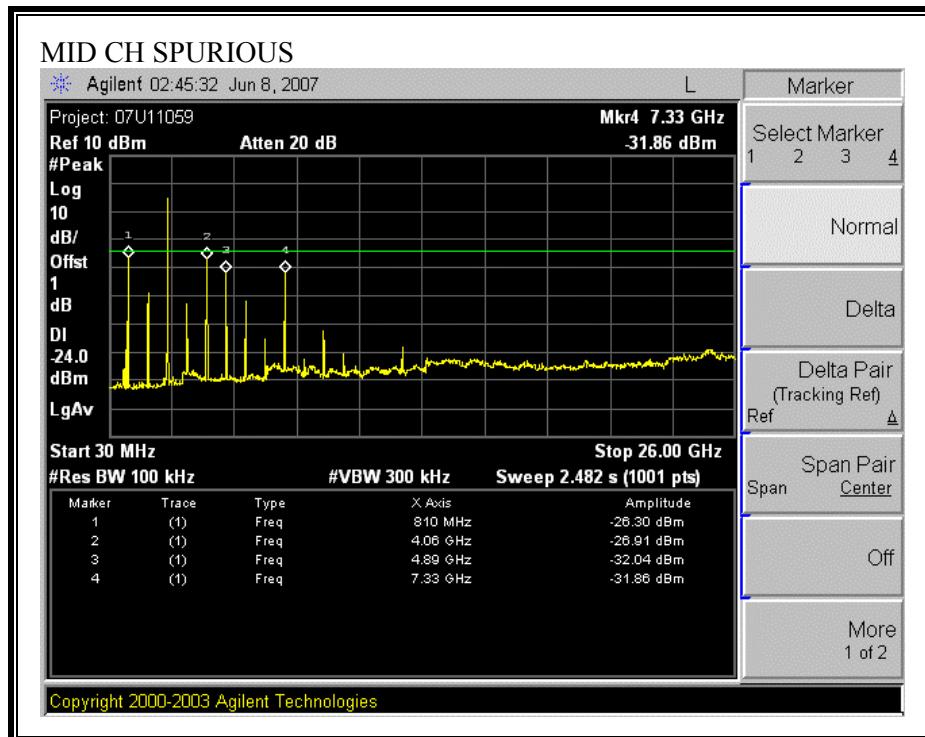

SPURIOUS EMISSIONS, HIGH CHANNEL

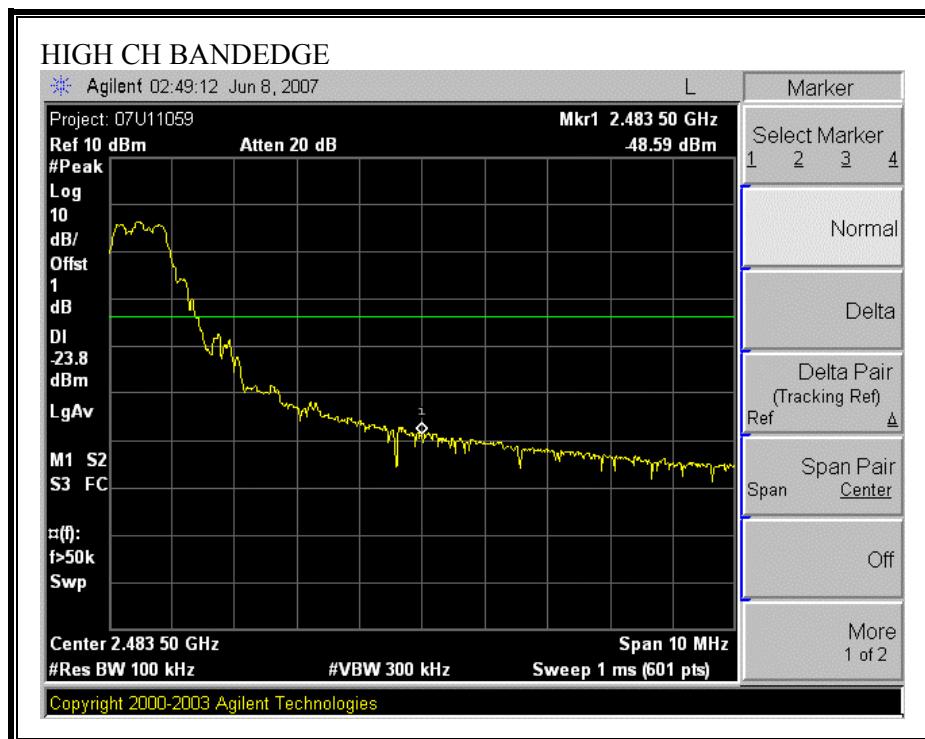

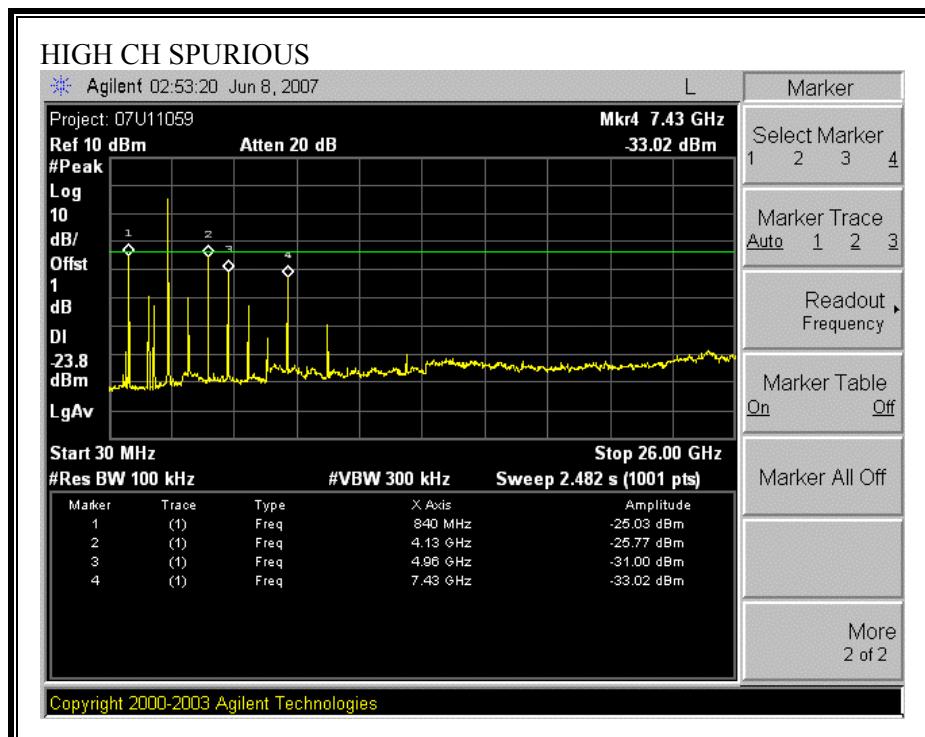

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

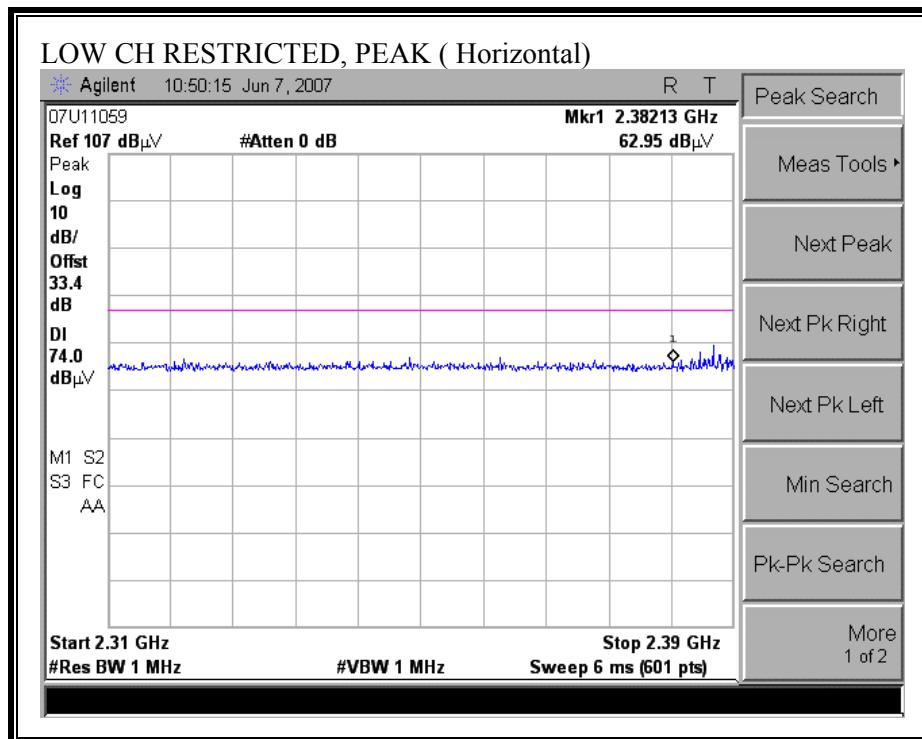

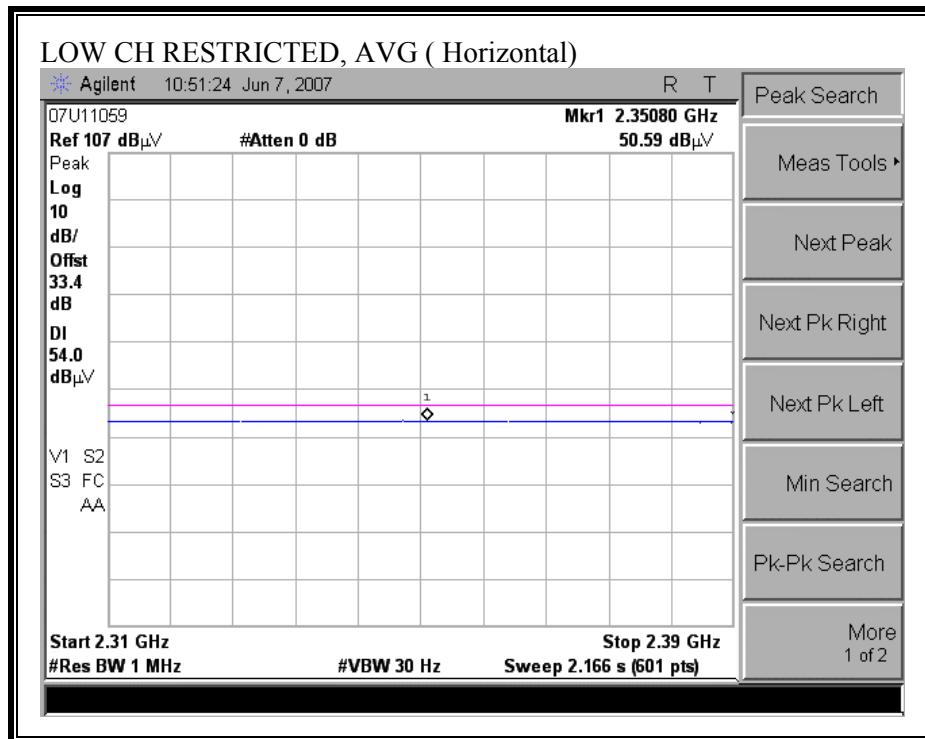



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

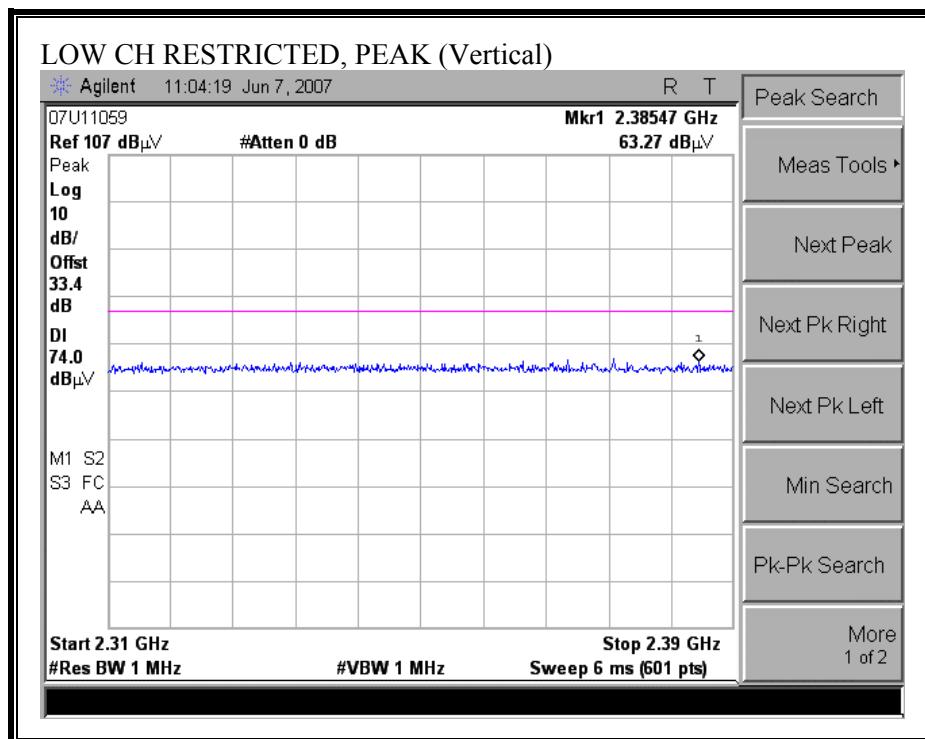

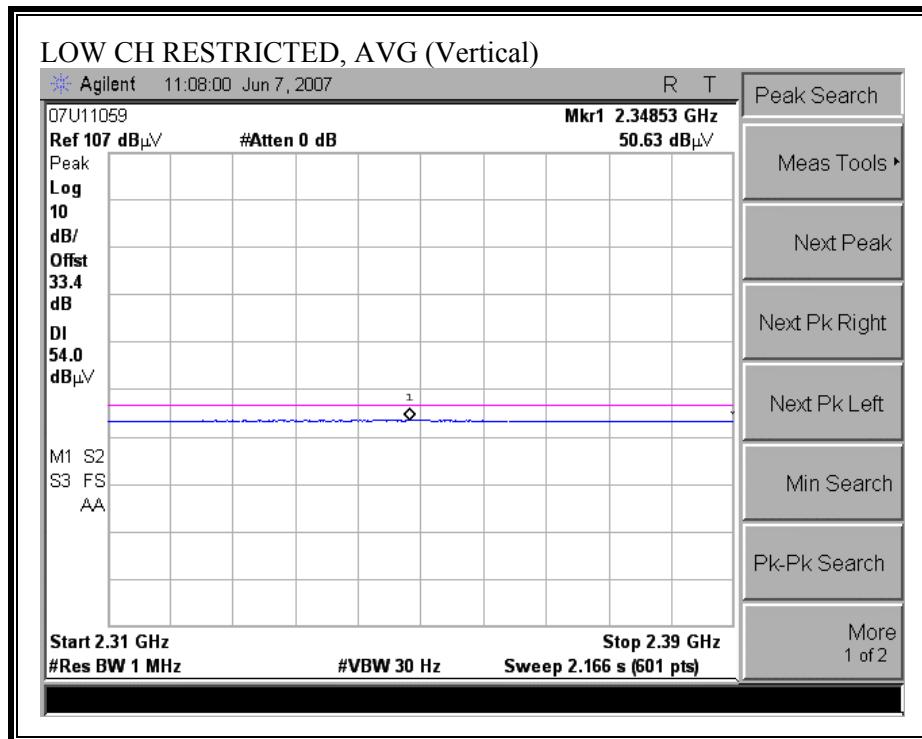



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

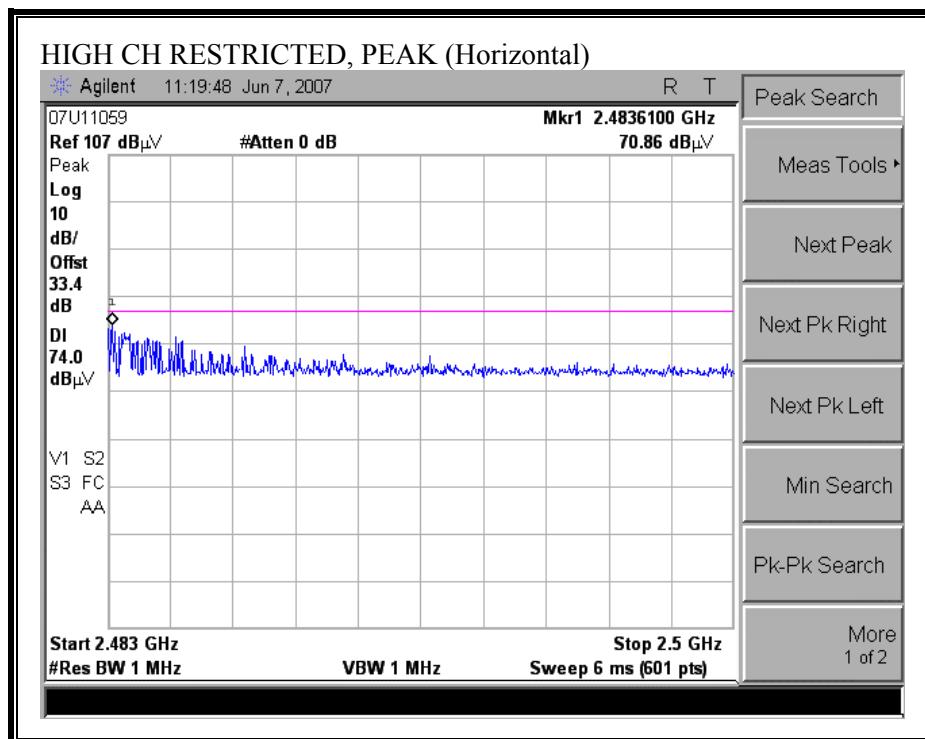

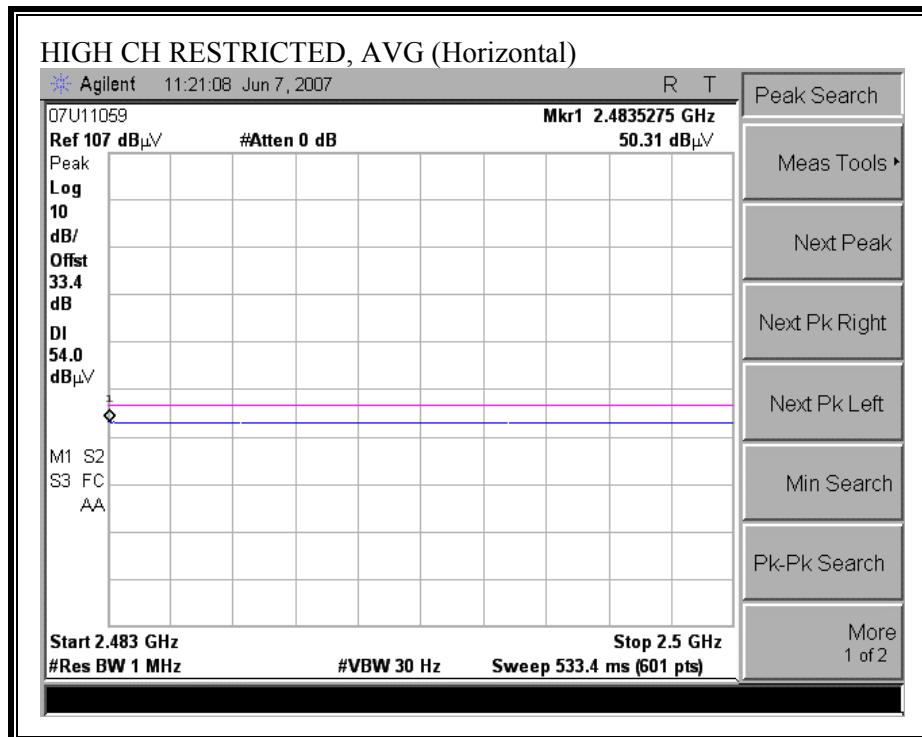

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

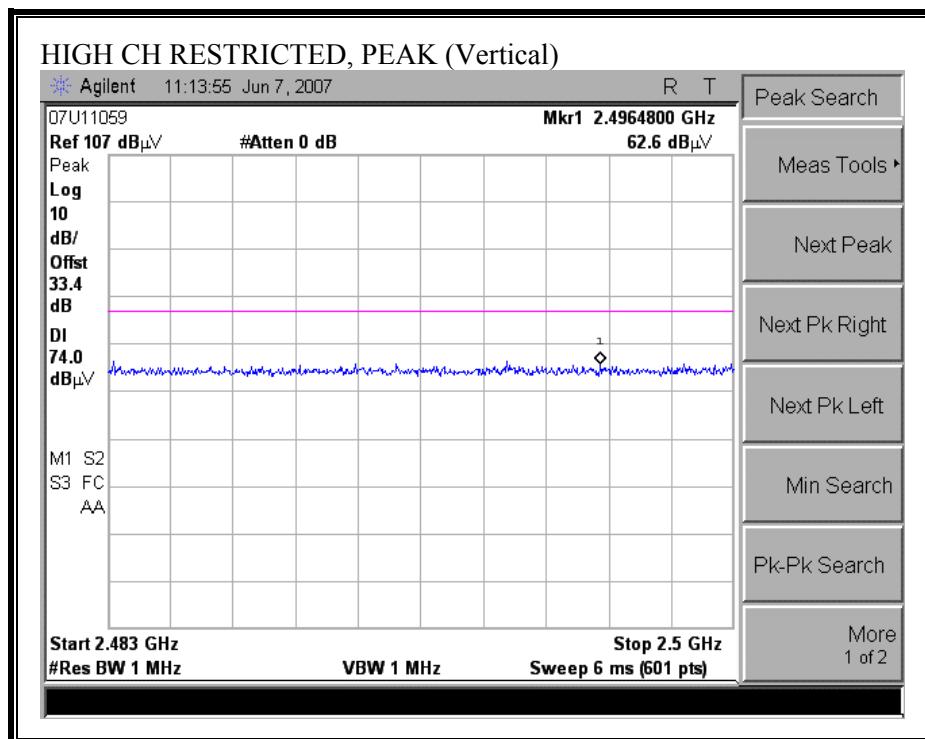

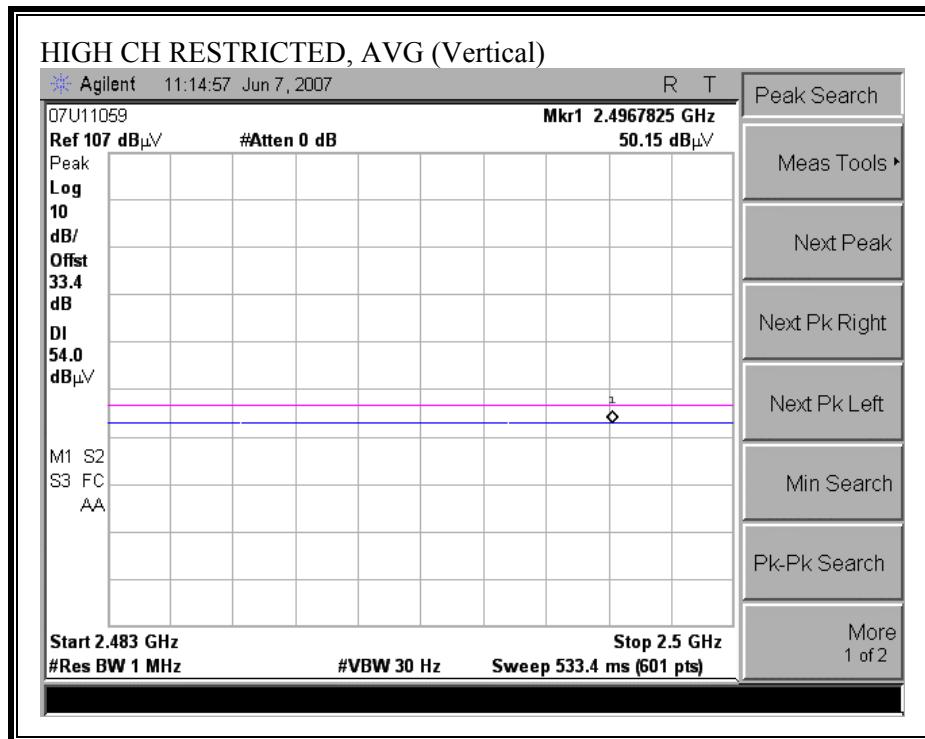


HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5 meter Chamber A																																																																																																																																																																																																																																																																																																																																																																	
<p>Company: Gyration Project #: 07U11059 Date: 06-07-07 Test Engineer: Tom Chen Configuration: EUT only Mode: Transmit</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T144 Miteq 3008A00931</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="8">Hi Frequency Cables</td> </tr> <tr> <td>2 foot cable</td> <td>3 foot cable</td> <td>12 foot cable</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="3">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td></td> <td></td> <td>Gordon 203134001</td> <td></td> <td>R_001</td> <td colspan="3">Average Measurements RBW=1MHz ; VEW=10Hz</td> </tr> </table> <p>Measurement Data:</p> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15">Low CH</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>65.2</td> <td>43.0</td> <td>33.3</td> <td>6.9</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>68.9</td> <td>46.7</td> <td>74</td> <td>54</td> <td>-5.1</td> <td>-7.3</td> <td>H</td> </tr> <tr> <td>7.206</td> <td>3.0</td> <td>55.3</td> <td>36.6</td> <td>34.9</td> <td>8.4</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>62.4</td> <td>43.7</td> <td>74</td> <td>54</td> <td>-11.6</td> <td>-10.3</td> <td>H</td> </tr> <tr> <td>9.606</td> <td>3.0</td> <td>48.1</td> <td>33.3</td> <td>36.7</td> <td>9.6</td> <td>-36.9</td> <td>0.0</td> <td>0.0</td> <td>57.5</td> <td>42.7</td> <td>74</td> <td>54</td> <td>-16.5</td> <td>-11.3</td> <td>H</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>55.3</td> <td>37.2</td> <td>33.3</td> <td>6.9</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>59.0</td> <td>40.9</td> <td>74</td> <td>54</td> <td>-15.0</td> <td>-13.1</td> <td>V</td> </tr> <tr> <td>7.206</td> <td>3.0</td> <td>48.2</td> <td>33.6</td> <td>34.9</td> <td>8.4</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>55.3</td> <td>40.7</td> <td>74</td> <td>54</td> <td>-18.7</td> <td>-13.3</td> <td>V</td> </tr> <tr> <td colspan="15">Mid CH</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>63.2</td> <td>42.0</td> <td>33.4</td> <td>6.9</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>67.0</td> <td>45.8</td> <td>74</td> <td>54</td> <td>-7.0</td> <td>-8.2</td> <td>H</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>54.8</td> <td>36.5</td> <td>35.0</td> <td>8.4</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>62.0</td> <td>43.7</td> <td>74</td> <td>54</td> <td>-12.0</td> <td>-10.3</td> <td>H</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>54.0</td> <td>36.5</td> <td>33.4</td> <td>6.9</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>57.8</td> <td>40.3</td> <td>74</td> <td>54</td> <td>-16.2</td> <td>-13.7</td> <td>V</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>50.6</td> <td>34.6</td> <td>35.0</td> <td>8.4</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>57.8</td> <td>41.8</td> <td>74</td> <td>54</td> <td>-16.2</td> <td>-12.2</td> <td>V</td> </tr> <tr> <td colspan="15">High CH</td> </tr> <tr> <td>4.958</td> <td>3.0</td> <td>67.4</td> <td>44.0</td> <td>33.4</td> <td>7.0</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>71.4</td> <td>48.0</td> <td>74</td> <td>54</td> <td>-2.6</td> <td>-6.0</td> <td>H</td> </tr> <tr> <td>7.437</td> <td>3.0</td> <td>56.3</td> <td>37.7</td> <td>35.1</td> <td>8.5</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>63.6</td> <td>45.0</td> <td>74</td> <td>54</td> <td>-10.4</td> <td>-9.0</td> <td>H</td> </tr> <tr> <td>4.958</td> <td>3.0</td> <td>56.7</td> <td>37.6</td> <td>33.4</td> <td>7.0</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>60.7</td> <td>41.6</td> <td>74</td> <td>54</td> <td>-13.3</td> <td>-12.4</td> <td>V</td> </tr> <tr> <td>7.437</td> <td>3.0</td> <td>50.8</td> <td>34.2</td> <td>35.1</td> <td>8.5</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>58.1</td> <td>41.5</td> <td>74</td> <td>54</td> <td>-15.9</td> <td>-12.5</td> <td>V</td> </tr> </tbody> </table> <p>Definitions:</p> <table> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T73; S/N: 6717 @3m	T144 Miteq 3008A00931						FCC 15.209	Hi Frequency Cables								2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz					Gordon 203134001		R_001	Average Measurements RBW=1MHz ; VEW=10Hz			f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low CH															4.804	3.0	65.2	43.0	33.3	6.9	-36.5	0.0	0.0	68.9	46.7	74	54	-5.1	-7.3	H	7.206	3.0	55.3	36.6	34.9	8.4	-36.2	0.0	0.0	62.4	43.7	74	54	-11.6	-10.3	H	9.606	3.0	48.1	33.3	36.7	9.6	-36.9	0.0	0.0	57.5	42.7	74	54	-16.5	-11.3	H	4.804	3.0	55.3	37.2	33.3	6.9	-36.5	0.0	0.0	59.0	40.9	74	54	-15.0	-13.1	V	7.206	3.0	48.2	33.6	34.9	8.4	-36.2	0.0	0.0	55.3	40.7	74	54	-18.7	-13.3	V	Mid CH															4.882	3.0	63.2	42.0	33.4	6.9	-36.5	0.0	0.0	67.0	45.8	74	54	-7.0	-8.2	H	7.323	3.0	54.8	36.5	35.0	8.4	-36.2	0.0	0.0	62.0	43.7	74	54	-12.0	-10.3	H	4.882	3.0	54.0	36.5	33.4	6.9	-36.5	0.0	0.0	57.8	40.3	74	54	-16.2	-13.7	V	7.323	3.0	50.6	34.6	35.0	8.4	-36.2	0.0	0.0	57.8	41.8	74	54	-16.2	-12.2	V	High CH															4.958	3.0	67.4	44.0	33.4	7.0	-36.5	0.0	0.0	71.4	48.0	74	54	-2.6	-6.0	H	7.437	3.0	56.3	37.7	35.1	8.5	-36.2	0.0	0.0	63.6	45.0	74	54	-10.4	-9.0	H	4.958	3.0	56.7	37.6	33.4	7.0	-36.5	0.0	0.0	60.7	41.6	74	54	-13.3	-12.4	V	7.437	3.0	50.8	34.2	35.1	8.5	-36.2	0.0	0.0	58.1	41.5	74	54	-15.9	-12.5	V	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																																																										
T73; S/N: 6717 @3m	T144 Miteq 3008A00931						FCC 15.209																																																																																																																																																																																																																																																																																																																																																										
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																																																	
2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																																																												
		Gordon 203134001		R_001	Average Measurements RBW=1MHz ; VEW=10Hz																																																																																																																																																																																																																																																																																																																																																												
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																																																		
Low CH																																																																																																																																																																																																																																																																																																																																																																	
4.804	3.0	65.2	43.0	33.3	6.9	-36.5	0.0	0.0	68.9	46.7	74	54	-5.1	-7.3	H																																																																																																																																																																																																																																																																																																																																																		
7.206	3.0	55.3	36.6	34.9	8.4	-36.2	0.0	0.0	62.4	43.7	74	54	-11.6	-10.3	H																																																																																																																																																																																																																																																																																																																																																		
9.606	3.0	48.1	33.3	36.7	9.6	-36.9	0.0	0.0	57.5	42.7	74	54	-16.5	-11.3	H																																																																																																																																																																																																																																																																																																																																																		
4.804	3.0	55.3	37.2	33.3	6.9	-36.5	0.0	0.0	59.0	40.9	74	54	-15.0	-13.1	V																																																																																																																																																																																																																																																																																																																																																		
7.206	3.0	48.2	33.6	34.9	8.4	-36.2	0.0	0.0	55.3	40.7	74	54	-18.7	-13.3	V																																																																																																																																																																																																																																																																																																																																																		
Mid CH																																																																																																																																																																																																																																																																																																																																																																	
4.882	3.0	63.2	42.0	33.4	6.9	-36.5	0.0	0.0	67.0	45.8	74	54	-7.0	-8.2	H																																																																																																																																																																																																																																																																																																																																																		
7.323	3.0	54.8	36.5	35.0	8.4	-36.2	0.0	0.0	62.0	43.7	74	54	-12.0	-10.3	H																																																																																																																																																																																																																																																																																																																																																		
4.882	3.0	54.0	36.5	33.4	6.9	-36.5	0.0	0.0	57.8	40.3	74	54	-16.2	-13.7	V																																																																																																																																																																																																																																																																																																																																																		
7.323	3.0	50.6	34.6	35.0	8.4	-36.2	0.0	0.0	57.8	41.8	74	54	-16.2	-12.2	V																																																																																																																																																																																																																																																																																																																																																		
High CH																																																																																																																																																																																																																																																																																																																																																																	
4.958	3.0	67.4	44.0	33.4	7.0	-36.5	0.0	0.0	71.4	48.0	74	54	-2.6	-6.0	H																																																																																																																																																																																																																																																																																																																																																		
7.437	3.0	56.3	37.7	35.1	8.5	-36.2	0.0	0.0	63.6	45.0	74	54	-10.4	-9.0	H																																																																																																																																																																																																																																																																																																																																																		
4.958	3.0	56.7	37.6	33.4	7.0	-36.5	0.0	0.0	60.7	41.6	74	54	-13.3	-12.4	V																																																																																																																																																																																																																																																																																																																																																		
7.437	3.0	50.8	34.2	35.1	8.5	-36.2	0.0	0.0	58.1	41.5	74	54	-15.9	-12.5	V																																																																																																																																																																																																																																																																																																																																																		
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																																																																												
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																																																												
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																																																												
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																																																												
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																																																																																														

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

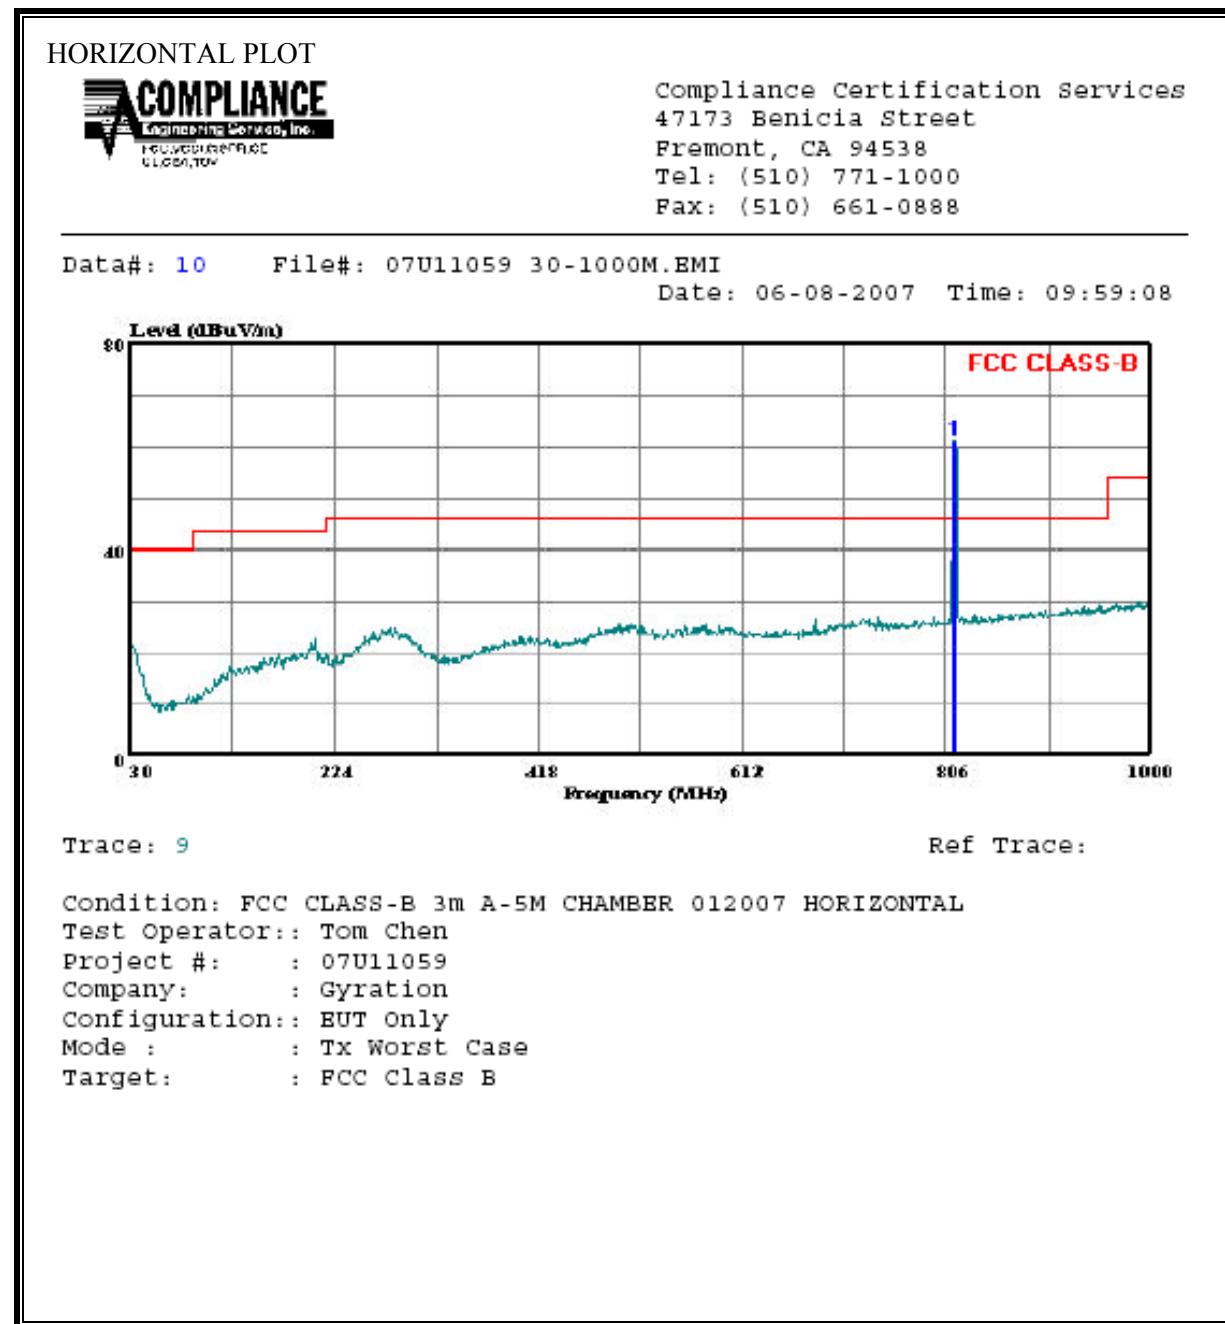

HORIZONTAL DATA

	Read Freq	Level Level	Factor	Limit dB	Line dBuV/m	Over Limit dBuV/m	Over Line dB	Over Remark
	MHz	dBuV		dB	dBuV/m	dBuV/m		
1 *	813.760	67.90	-6.71	61.19	46.00	15.19	Peak	

* 813.76MHz is belonged to non-restricted band, so it already passed under the RF conducted -20dBc from the fundamental test.


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 14 File#: 07U11059 30-1000M.EMI
Date: 06-08-2007 Time: 10:13:49

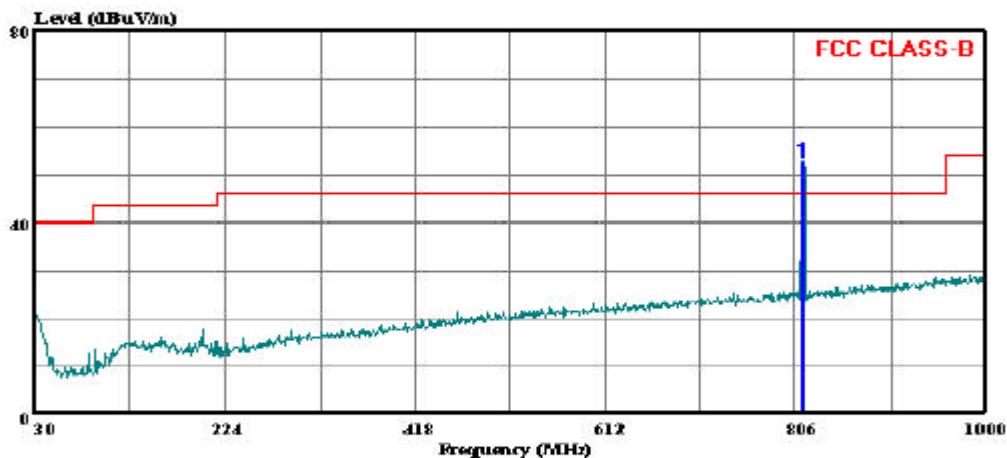

Trace: 11

Ref Trace:

Condition: FCC CLASS-B 3m A-5M CHAMBER 012007 VERTICAL
Test Operator:: Tom Chen
Project #: : 07U11059
Company: : Gyration
Configuration:: EUT Only
Mode : : Tx Worst Case
Target: : FCC Class B


VERTICAL DATA

		Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB	dBuV/m	dBuV/m	dB
1 *	813.760	59.20	-6.71	52.49	46.00	6.49 Peak

* 813.76MHz is belonged to non-restricted band, so it already passed under the RF conducted -20dBc from the fundamental test.

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

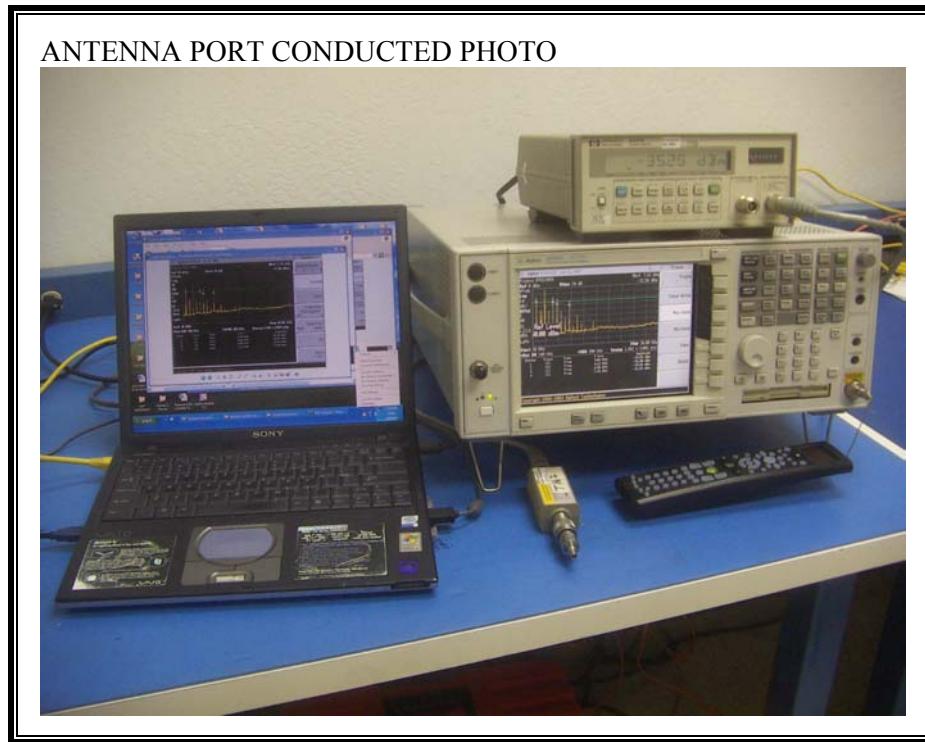

RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION







END OF REPORT