

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart B, Class B

ANSI C63.4-2014

ANSI C63.4a-2017

Report No.: FDBDKG-WTW-P21040783C

Product: Cordless Mouse

FCC ID.: JNZMR0067

Brand: Logitech

Model No.: M-R0067

Received Date: 2023/11/2

Test Date: 2023/11/10 ~ 2023/11/11

Issued Date: 2023/11/24

Applicant: Logitech Far East Ltd.

Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.


Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307,
Taiwan

FCC Registration /

Designation Number: 960022 / TW1058

Approved by:  , **Date:** 2023/11/24
Ken Lu / Manager

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

| | |
|---|-----------|
| Release Control Record | 3 |
| 1 Certificate..... | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Supplementary Information | 5 |
| 3 General Information | 6 |
| 3.1 Description of EUT | 6 |
| 3.2 Primary Clock Frequencies of Internal Source..... | 7 |
| 3.3 Features of EUT | 7 |
| 3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode | 8 |
| 3.5 Test Program Used and Operation Descriptions | 9 |
| 3.6 Connection Diagram of EUT and Peripheral Devices | 9 |
| 3.7 Configuration of Peripheral Devices and Cable Connections | 9 |
| 4 Test Instruments | 10 |
| 4.1 Conducted Emissions from Power Ports | 10 |
| 4.2 Radiated Emissions up to 1 GHz | 11 |
| 4.3 Radiated Emissions above 1 GHz..... | 12 |
| 5 Limits of Test Items..... | 13 |
| 5.1 Conducted Emissions from Power Ports | 13 |
| 5.2 Radiated Emissions up to 1 GHz | 13 |
| 5.3 Radiated Emissions above 1 GHz..... | 13 |
| 6 Test Arrangements..... | 14 |
| 6.1 Conducted Emissions from Power Ports | 14 |
| 6.2 Radiated Emissions up to 1 GHz | 15 |
| 6.3 Radiated Emissions above 1 GHz..... | 16 |
| 7 Test Results of Test Item | 17 |
| 7.1 Conducted Emissions from Power Ports | 17 |
| 7.2 Radiated Emissions up to 1 GHz | 19 |
| 7.3 Radiated Emissions above 1 GHz..... | 21 |
| 8 Pictures of Test Arrangements | 23 |
| 9 Information of the Testing Laboratories | 24 |



Release Control Record

| Issue No. | Description | Date Issued |
|-----------------------|-------------------|-------------|
| FDBDKG-WTW-P21040783C | Original release. | 2023/11/24 |

1 Certificate

Product: Cordless Mouse

Brand: Logitech

Test Model: M-R0067

Sample Status: Engineering sample

Applicant: Logitech Far East Ltd.

Test Date: 2023/11/10 ~ 2023/11/11

Standard: 47 CFR FCC Part 15, Subpart B, Class B
ANSI C63.4–2014
ANSI C63.4a–2017

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions, are as follows:

| Standard / Clause | Test Item | Result | Remark |
|-------------------|--------------------------------------|--------|--|
| FCC Part 15.107 | Conducted Emissions from Power Ports | Pass | Minimum passing Class B margin is -16.11 dB at 4.30600 MHz |
| FCC Part 15.109 | Radiated Emissions up to 1 GHz | Pass | Minimum passing Class B margin is -5.45 dB at 979.02 MHz |
| FCC Part 15.109 | Radiated Emissions above 1 GHz | Pass | Minimum passing Class B margin is -21.87 dB at 5685.77 MHz |

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Specification | Expanded Uncertainty (k=2) (±) | Maximum allowable uncertainty (±) |
|--------------------------------------|------------------|--------------------------------|-----------------------------------|
| Conducted Emissions from Power Ports | 150 kHz ~ 30 MHz | 1.8 dB | 3.4 dB (U_{CISPR}) |
| Radiated Emissions up to 1 GHz | 30 MHz ~ 1 GHz | 4.43 dB | 6.3 dB (U_{CISPR}) |
| Radiated Emissions above 1 GHz | 1 GHz ~ 6 GHz | 4.4 dB | 5.2 dB (U_{CISPR}) |
| | 6 GHz ~ 18 GHz | 5.0 dB | 5.5 dB (U_{CISPR}) |

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 Description of EUT

| | |
|------------------------------|---|
| Product | Cordless Mouse |
| Brand | Logitech |
| Test Model | M-R0067 |
| Sample Status | Engineering sample |
| Operating Software | NA |
| Power Supply Rating | 3.7 Vdc from battery or 5 Vdc from USB interface |
| Accessory Device | NA |
| Data Cable Supplied | USB cable x 1 (shielded, 0.7m) |
| Wireless Operating Frequency | BT_LE: 2402MHz ~ 2480MHz GFSK: 2405MHz ~ 2474MHz |

Note:

- This is a supplementary report of Report No.: FC161220E09. The differences between them are as below information:
 - ◆ Updated the standards.
 - ◆ Remove metallic paints.
- According to above condition, all test items need to be performed. And all data was verified to meet the requirements.
- The EUT may have a lot of colors for marketing requirement.
- The EUT could be supplied with a battery as the following table:

| Brand | Model | Specification |
|--|----------------------------|------------------------------|
| SYNERGY SCIENTECH CORP or Logitech | AHB572535PJT or 533-000120 | Power Rating: 3.7Vdc, 500mAh |
| Brand | Model | Specification |
| SPRINGPOWER TECHNOLOGY SHENZHEN CO LTD or Logitech | 652535 or 533-000121 | Power Rating: 3.7Vdc, 500mAh |

3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 2.48 GHz, provided by Logitech Far East Ltd., for detailed internal source, please refer to the manufacturer's specifications.

3.3 Features of EUT

The tests reported herein were performed according to the method specified by Logitech Far East Ltd., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT has been pre-tested under following test modes.

| Test Condition | |
|---|---|
| Mode | Radiated Emissions up to 1 GHz |
| 1 | USB Charge+2.4GHz transceiver Mode (Model: C-U0007) + Input Power(5 Vdc from host) |
| 2 | Battery+BT Mode + Input Power(3.7 Vdc from battery) |
| Note: The worst case is that mode 1 is shown in bold. | |


Test modes are presented in the report as below.

| Test Condition | |
|----------------|--|
| Mode | Conducted Emissions from Power Ports |
| A | USB Charge+2.4GHz transceiver Mode (Model: C-U0007) + Input Power(5 Vdc from host) |
| Mode | Radiated Emissions up to 1 GHz |
| A | USB Charge+2.4GHz transceiver Mode (Model: C-U0007) + Input Power(5 Vdc from host) |
| Mode | Radiated Emissions above 1 GHz |
| A | USB Charge+2.4GHz transceiver Mode (Model: C-U0007) + Input Power(5 Vdc from host) |

3.5 Test Program Used and Operation Descriptions

1. Turn on the power of all equipment.
2. EUT links with support unit A (Laptop) via wireless.
3. Check EUT normal function by support unit A (Laptop) runs "Paint.exe".
4. Support unit A (Laptop) runs "EMC test.exe" then sends "H" messages to itself.

3.6 Connection Diagram of EUT and Peripheral Devices

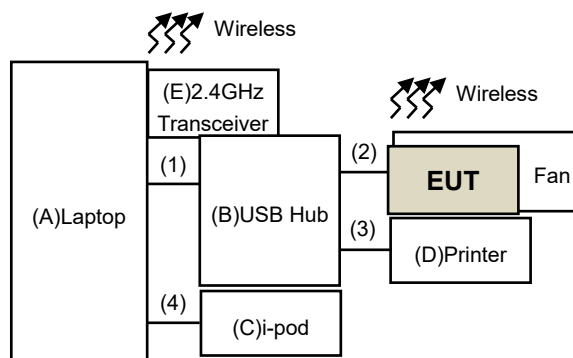

3.7 Configuration of Peripheral Devices and Cable Connections

| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|--------------------|----------|-----------|--------------|--------|-----------------------|
| A | Laptop | DELL | P80F | 5GMFM33 | DoC | Provided by Lab |
| B | USB HUB | e-SENSE | 01-ELS647 | N/A | N/A | Provided by Lab |
| C | i-pod | Apple | MD778TA/A | CC4JMCMXF4T1 | N/A | Provided by Lab |
| D | Printer | EPSON | LQ-300+II | G88Y074085 | DoC | Provided by Lab |
| E | 2.4GHz Transceiver | Logitech | C-U0007 | N/A | N/A | Provided by Applicant |

| ID | Cable Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--|------|------------|--------------------|--------------|-----------------------|
| 1 | USB-A cable | 1 | 0.15 | Yes | 0 | Provided by Lab |
| 2 | USB cable(Brand:Logitech;Model:502-001163) | 1 | 0.7 | Yes | 0 | Provided by Applicant |
| 3 | USB-A to B cable | 1 | 1.8 | Yes | 0 | Provided by Lab |
| 4 | USB-A cable | 1 | 0.1 | Yes | 0 | Provided by Lab |

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Conducted Emissions from Power Ports

| Description Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|-----------------------------|-------------------------|----------------|--------------------|---------------------|
| 50 ohm terminal resistance | N/A | EMC-02 | 2023/9/25 | 2024/9/24 |
| | | EMC-03 | 2023/9/25 | 2024/9/24 |
| EMI Test Receiver R&S | ESR3 | 102982 | 2023/5/25 | 2024/5/24 |
| Fixed attenuator MVE | MVE2530-10 | MVE2530-10_003 | 2023/9/7 | 2024/9/6 |
| LISN R&S | ENV216 | 100072 | 2023/7/7 | 2024/7/6 |
| LISN Schwarzbeck | NNLK 8121 | 0809 | 2023/3/14 | 2024/3/13 |
| | NSLK 8127 | 8127-522 | 2023/9/12 | 2024/9/11 |
| RF Coaxial Cable JYEBAO | 5D-FB | COACAB-002 | 2023/7/1 | 2024/6/30 |
| Software BV | BVADT_Cond_ V7.3.7.4 | N/A | N/A | N/A |

Notes:

1. The test was performed in HC - Conduction 3.
2. The VCCI Shielded room C Registration No. is C-13611.
3. Tested Date: 2023/11/10

4.2 Radiated Emissions up to 1 GHz

| Description Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|-----------------------------------|----------------------|--------------|--------------------|---------------------|
| Antenna Tower & Turn Table CT | N/A | N/A | N/A | N/A |
| Bi_Log Antenna Schwarzbeck | VULB 9168 | 9168-358 | 2023/10/16 | 2024/10/15 |
| | | 9168-359 | 2023/10/17 | 2024/10/16 |
| Fixed Attenuator Mini-Circuits | UNAT-5+ | CHF-001 | 2023/7/1 | 2024/6/30 |
| Fixed attenuator Mini-Circuits | UNAT-5+ | CHF-002 | 2023/7/1 | 2024/6/30 |
| MXE EMI Receiver Agilent | N9038A | MY50010125 | 2023/3/24 | 2024/3/23 |
| | | MY50010132 | 2023/6/21 | 2024/6/20 |
| Preamplifier Sonoma | 310N | 352925 | 2023/7/1 | 2024/6/30 |
| | | 352926 | 2023/7/1 | 2024/6/30 |
| RF Coaxial Cable PEWC | 8D | 8DCAB-001 | 2023/7/1 | 2024/6/30 |
| | 8D-FB | CHFCAB-001-1 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-001-3 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-001-4 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-002-1 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-002-3 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-002-4 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-003-1 | 2023/7/1 | 2024/6/30 |
| | | CHFCAB-003-3 | 2023/7/1 | 2024/6/30 |
| Software BV | ADT_Radiated_V8.7.08 | N/A | N/A | N/A |

Notes:

1. The test was performed in HC - 10m Chamber 1. The test site validated date: 2023/6/29 (NSA)
2. The VCCI Site Registration No. is R-13252.
3. Tested Date: 2023/11/11

4.3 Radiated Emissions above 1 GHz

| Description Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|----------------------------------|----------------------|--------------|--------------------|---------------------|
| Antenna Tower & Turn Table CT | N/A | N/A | N/A | N/A |
| Fix tool for Boresight BV | BAF-01 | 5 | N/A | N/A |
| Horn Antenna RFSPIN | DRH18-E | 210306A18-ES | 2022/11/13 | 2023/11/12 |
| MXA Signal Analyzer Keysight | N9020B | MY60112816 | 2023/5/17 | 2024/5/16 |
| MXE EMI Receiver Agilent | N9038A | MY50010125 | 2023/3/24 | 2024/3/23 |
| Preamplifier Agilent | 8449B | 3008A01975 | 2022/12/28 | 2023/12/27 |
| Preamplifier EMCI | EMC118A45SE | 980817 | 2023/8/12 | 2024/8/11 |
| RF Coaxial Cable EMCI | EMC104-SM-SM-2500 | 170209 | 2023/2/22 | 2024/2/21 |
| | EMC104-SM-SM-6000 | 170208 | 2023/2/22 | 2024/2/21 |
| | EMC104-SM-SM-11000 | 170206 | 2023/2/22 | 2024/2/21 |
| Software BV | ADT_Radiated_V8.7.08 | N/A | N/A | N/A |

Notes:

1. The test was performed in HC - 10m Chamber 1. The test site validated date: 2022/12/10 (VSWR)
2. The VCCI Site Registration No. is G-10136.
3. Tested Date: 2023/11/11

5 Limits of Test Items

5.1 Conducted Emissions from Power Ports

| Frequency (MHz) | Class A (dBuV) | | Class B (dBuV) | |
|-----------------|----------------|---------|----------------|---------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 - 0.5 | 79 | 66 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 73 | 60 | 56 | 46 |
| 5.0 - 30.0 | 73 | 60 | 60 | 50 |

Notes: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Radiated Emissions up to 1 GHz

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

| Radiated Emissions Limits at 10 meters (dB μ V/m) | | | | |
|---|------------------|------------------|-------------------|-------------------|
| Frequencies (MHz) | FCC 15B, Class A | FCC 15B, Class B | CISPR 22, Class A | CISPR 22, Class B |
| 30-88 | 39.1 | 29.5 | 40 | 30 |
| 88-216 | 43.5 | 33.1 | | |
| 216-230 | 46.4 | 35.6 | | |
| 230-960 | | | | |
| 960-1000 | 49.5 | 43.5 | 47 | 37 |

| Radiated Emissions Limits at 3 meters (dB μ V/m) | | | | |
|--|------------------|------------------|-------------------|-------------------|
| Frequencies (MHz) | FCC 15B, Class A | FCC 15B, Class B | CISPR 22, Class A | CISPR 22, Class B |
| 30-88 | 49.5 | 40.0 | 50.5 | 40.5 |
| 88-216 | 54.0 | 43.5 | | |
| 216-230 | 56.9 | 46.0 | | |
| 230-960 | | | | |
| 960-1000 | 60.0 | 54.0 | 57.5 | 47.5 |

Notes: 1. The lower limit shall apply at the transition frequencies.

5.3 Radiated Emissions above 1 GHz

Frequency Range (For unintentional radiators)

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|--|
| Below 1.705 | 30 |
| 1.705-108 | 1000 |
| 108-500 | 2000 |
| 500-1000 | 5000 |
| Above 1000 | 5th harmonic of the highest frequency or 40GHz, whichever is lower |

| Radiated Emissions Limits at 3 meters (dB μ V/m) | | |
|--|---------------------|---------------------|
| Frequency range | Class A | Class B |
| Above 1GHz | Avg: 60 Peak: 80 | Avg: 54 Peak: 74 |


Notes: 1. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.

6 Test Arrangements

6.1 Conducted Emissions from Power Ports

- For the table-top EUT is placed on a 0.8 meter insulation table; for the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The EUT is placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units are connected to the power mains through another LISN. They provide coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

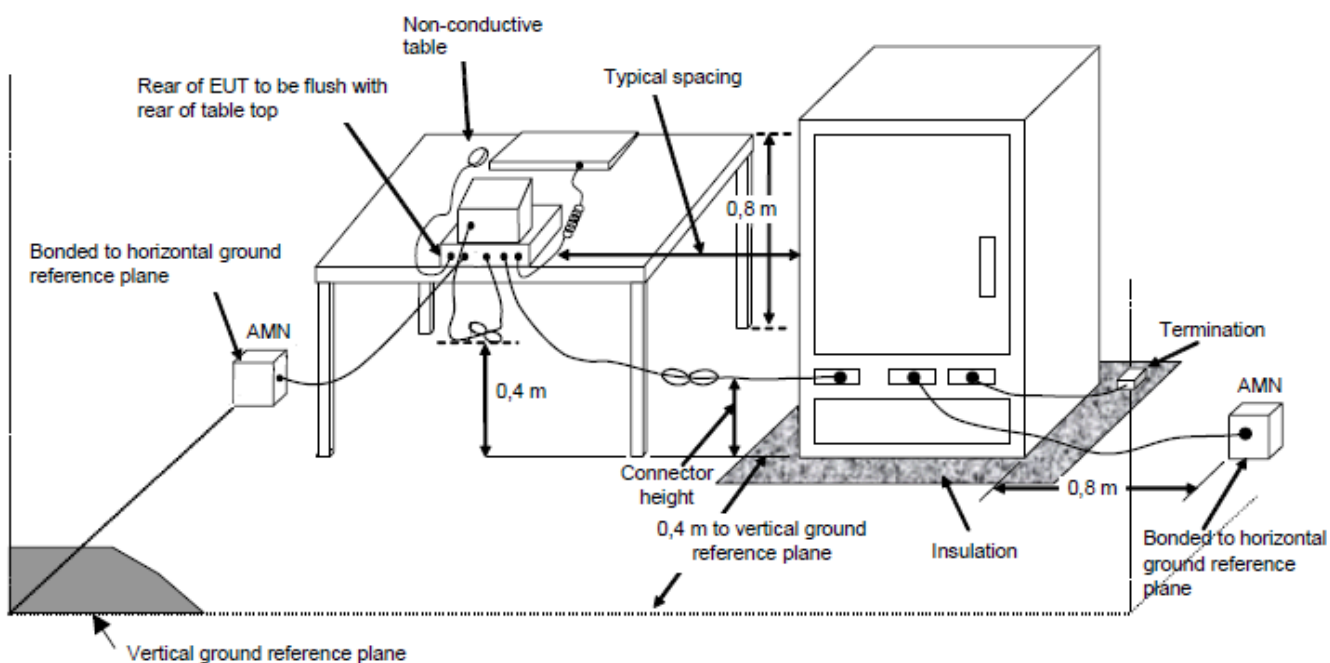


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.2 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

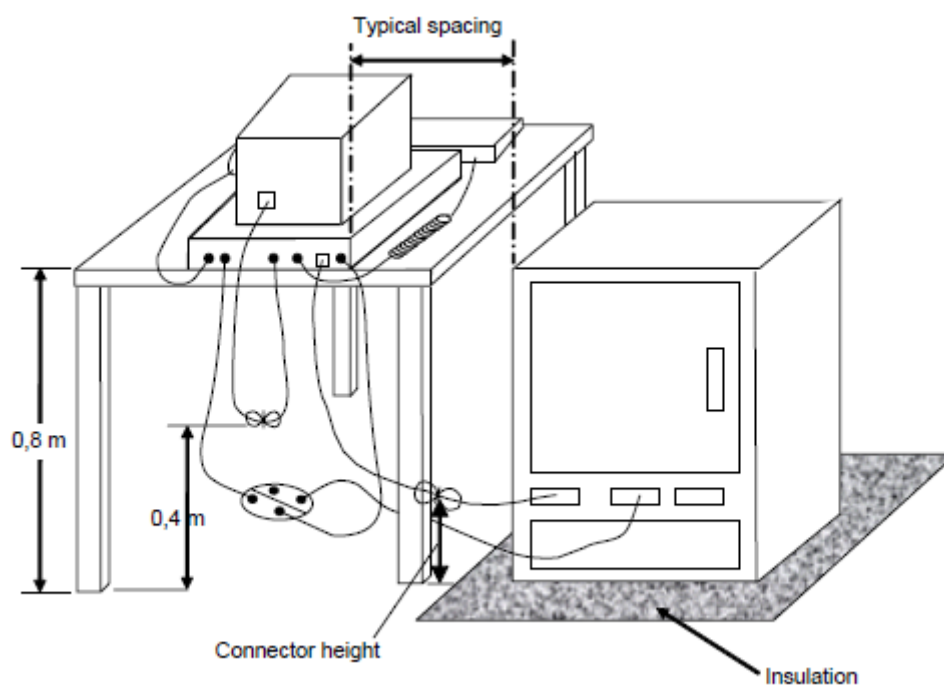


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.3 Radiated Emissions above 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set $d = 3$ meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

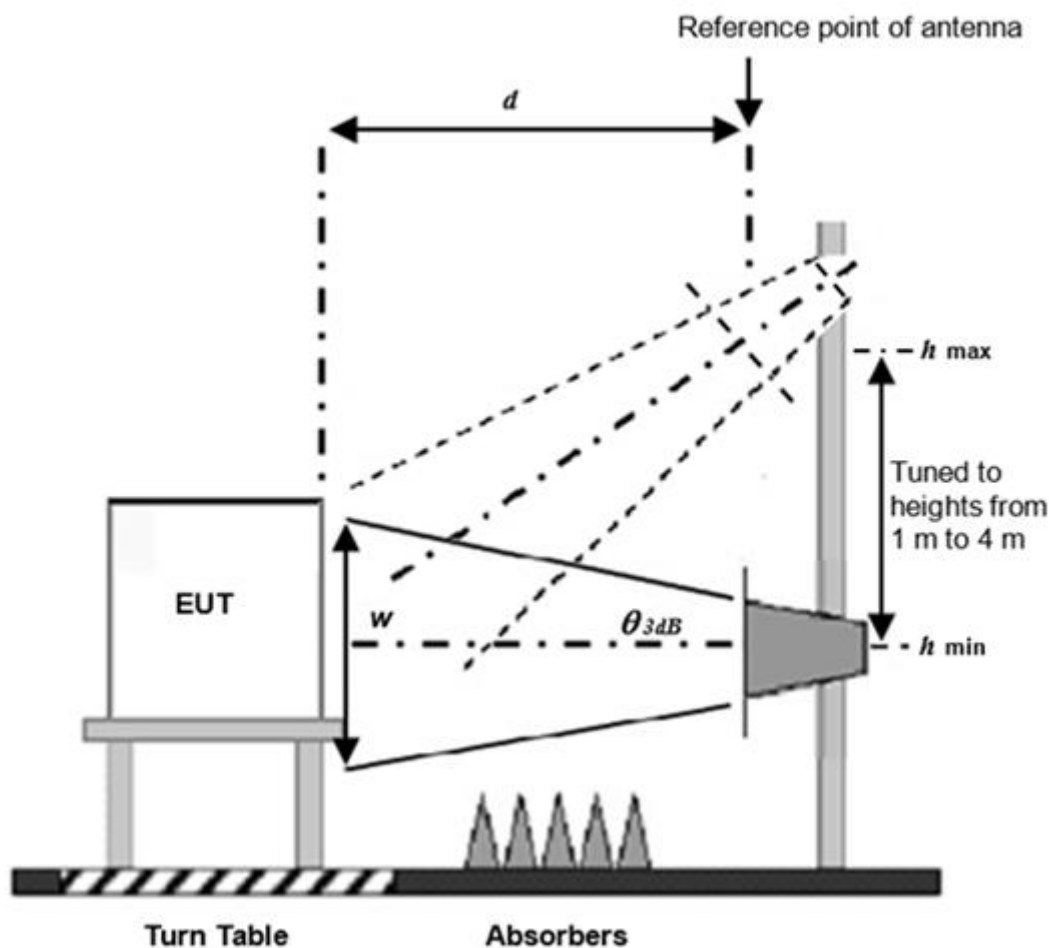

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7 Test Results of Test Item

7.1 Conducted Emissions from Power Ports


Mode A

| | | | |
|-----------------|------------------|--|--------------------------------------|
| Frequency Range | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
| Input Power | 5 Vdc from host | Environmental Conditions | 25°C, 75% RH |
| Tested by | Nick Lo | | |

| Phase Of Power : Line (L) | | | | | | | | | | |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15400 | 10.01 | 37.64 | 23.31 | 47.65 | 33.32 | 65.78 | 55.78 | -18.13 | -22.46 |
| 2 | 0.19400 | 10.01 | 29.95 | 13.18 | 39.96 | 23.19 | 63.86 | 53.86 | -23.90 | -30.67 |
| 3 | 0.20600 | 10.01 | 28.71 | 13.67 | 38.72 | 23.68 | 63.37 | 53.37 | -24.65 | -29.69 |
| 4 | 0.58563 | 10.00 | 25.36 | 17.92 | 35.36 | 27.92 | 56.00 | 46.00 | -20.64 | -18.08 |
| 5 | 3.73000 | 10.19 | 22.54 | 13.08 | 32.73 | 23.27 | 56.00 | 46.00 | -23.27 | -22.73 |
| 6 | 5.00200 | 10.28 | 24.38 | 15.16 | 34.66 | 25.44 | 60.00 | 50.00 | -25.34 | -24.56 |
| 7 | 13.24200 | 10.72 | 18.55 | 12.48 | 29.27 | 23.20 | 60.00 | 50.00 | -30.73 | -26.80 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

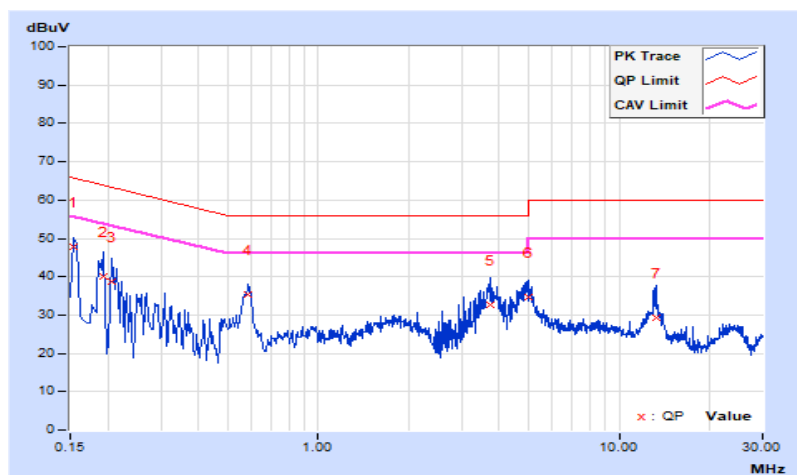


| | | | |
|------------------------|------------------|---|--------------------------------------|
| Frequency Range | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
| Input Power | 5 Vdc from host | Environmental Conditions | 25°C, 75% RH |
| Tested by | Nick Lo | | |

| Phase Of Power : Neutral (N) | | | | | | | | | | |
|------------------------------|-----------------|------------------------|----------------------|--------------|-----------------------|--------------|--------------|--------------|---------------|---------------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15400 | 10.03 | 36.27 | 24.56 | 46.30 | 34.59 | 65.78 | 55.78 | -19.48 | -21.19 |
| 2 | 0.19000 | 10.02 | 30.18 | 15.53 | 40.20 | 25.55 | 64.04 | 54.04 | -23.84 | -28.49 |
| 3 | 0.21400 | 10.02 | 27.00 | 12.84 | 37.02 | 22.86 | 63.05 | 53.05 | -26.03 | -30.19 |
| 4 | 0.58200 | 10.02 | 24.93 | 17.78 | 34.95 | 27.80 | 56.00 | 46.00 | -21.05 | -18.20 |
| 5 | 4.30600 | 10.28 | 26.31 | 19.61 | 36.59 | 29.89 | 56.00 | 46.00 | -19.41 | -16.11 |
| 6 | 22.61000 | 10.94 | 11.63 | 6.66 | 22.57 | 17.60 | 60.00 | 50.00 | -37.43 | -32.40 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

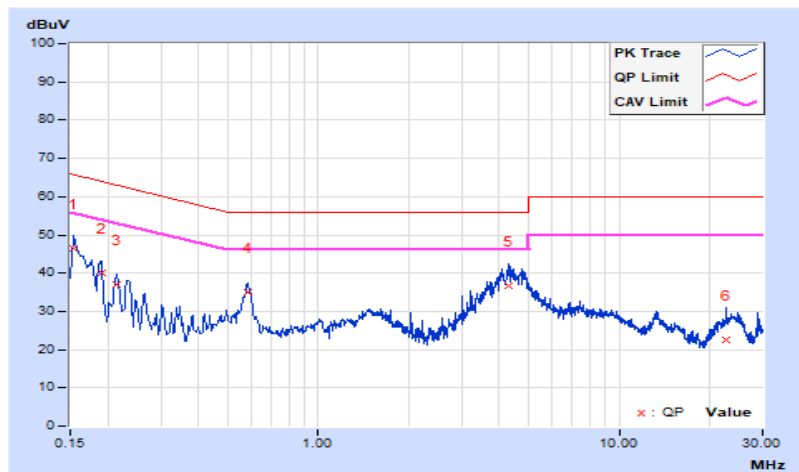

7.2 Radiated Emissions up to 1 GHz


Mode A

| | | | |
|-----------------|-----------------|--|--------------------------|
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP), 120 kHz |
| Input Power | 5 Vdc from host | Environmental Conditions | 21°C, 56% RH |
| Tested By | Nick Lo | | |

| Antenna Polarity & Test Distance : Horizontal at 10 m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 30.10 | 20.39 QP | 30.00 | -9.61 | 4.00 H | 86 | 34.42 | -14.03 |
| 2 | 51.24 | 19.49 QP | 30.00 | -10.51 | 3.00 H | 14 | 32.20 | -12.71 |
| 3 | 183.23 | 19.57 QP | 30.00 | -10.43 | 4.00 H | 345 | 33.01 | -13.44 |
| 4 | 494.99 | 25.84 QP | 37.00 | -11.16 | 3.00 H | 8 | 31.16 | -5.32 |
| 5 | 625.84 | 26.60 QP | 37.00 | -10.40 | 4.00 H | 109 | 28.95 | -2.35 |
| 6 | 788.02 | 28.52 QP | 37.00 | -8.48 | 3.00 H | 24 | 27.92 | 0.60 |

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
- Margin value = Emission level – Limit value
- The other emission levels were very low against the limit.

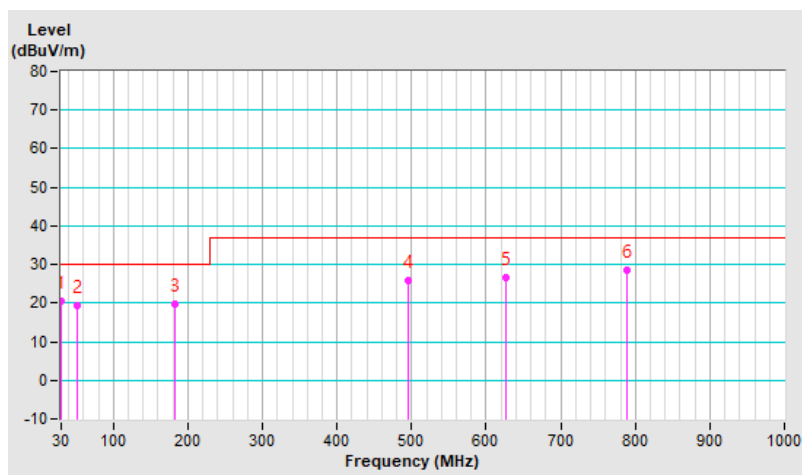


| | | | |
|------------------------|-----------------|---|--------------------------|
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP), 120 kHz |
| Input Power | 5 Vdc from host | Environmental Conditions | 21°C, 56% RH |
| Tested By | Nick Lo | | |

| Antenna Polarity & Test Distance : Vertical at 10 m | | | | | | | | |
|---|-----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 33.01 | 20.25 QP | 30.00 | -9.75 | 1.00 V | 8 | 34.54 | -14.29 |
| 2 | 86.62 | 17.84 QP | 30.00 | -12.16 | 2.00 V | 149 | 36.23 | -18.39 |
| 3 | 115.78 | 17.56 QP | 30.00 | -12.44 | 1.00 V | 113 | 32.33 | -14.77 |
| 4 | 162.11 | 20.32 QP | 30.00 | -9.68 | 2.00 V | 348 | 32.37 | -12.05 |
| 5 | 462.04 | 23.60 QP | 37.00 | -13.40 | 1.00 V | 350 | 29.66 | -6.06 |
| 6 | 957.00 | 31.20 QP | 37.00 | -5.80 | 1.00 V | 80 | 27.44 | 3.76 |
| 7 | 979.02 | 31.55 QP | 37.00 | -5.45 | 1.00 V | 46 | 27.02 | 4.53 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

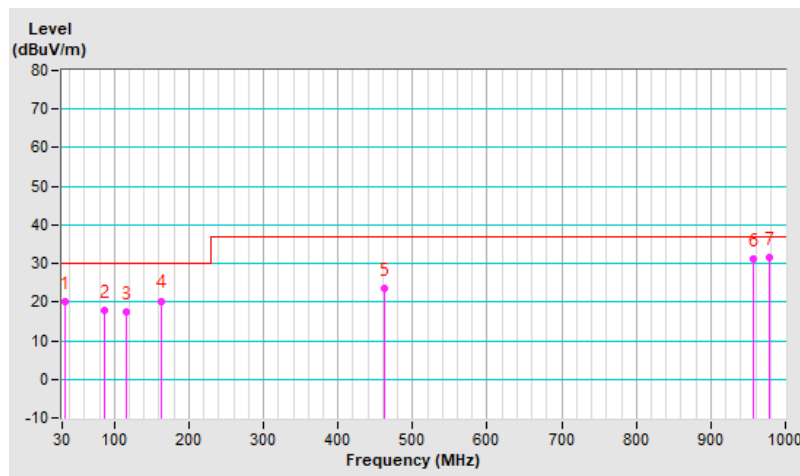

7.3 Radiated Emissions above 1 GHz

Mode A


| | | | |
|-----------------|-----------------|--|--------------------------------|
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Resolution Bandwidth | Peak (PK) / Average (AV), 1MHz |
| Input Power | 5 Vdc from host | Environmental Conditions | 21°C, 56% RH |
| Tested By | Nick Lo | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1947.47 | 37.30 PK | 74.00 | -36.70 | 1.50 H | 125 | 39.15 | -1.85 |
| 2 | 1947.47 | 24.64 AV | 54.00 | -29.36 | 1.50 H | 360 | 26.49 | -1.85 |
| 3 | 2395.70 | 39.20 PK | 74.00 | -34.80 | 1.00 H | 89 | 38.50 | 0.70 |
| 4 | 2395.70 | 27.01 AV | 54.00 | -26.99 | 1.00 H | 360 | 26.31 | 0.70 |
| 5 | 2618.97 | 40.99 PK | 74.00 | -33.01 | 1.00 H | 306 | 39.54 | 1.45 |
| 6 | 2618.97 | 27.68 AV | 54.00 | -26.32 | 1.00 H | 360 | 26.23 | 1.45 |
| 7 | 3935.33 | 41.52 PK | 74.00 | -32.48 | 2.00 H | 193 | 36.09 | 5.43 |
| 8 | 3935.33 | 28.50 AV | 54.00 | -25.50 | 2.00 H | 250 | 23.07 | 5.43 |
| 9 | 5066.40 | 44.34 PK | 74.00 | -29.66 | 1.00 H | 232 | 35.43 | 8.91 |
| 10 | 5066.40 | 31.11 AV | 54.00 | -22.89 | 1.00 H | 353 | 22.20 | 8.91 |
| 11 | 5685.77 | 44.51 PK | 74.00 | -29.49 | 2.00 H | 316 | 33.98 | 10.53 |
| 12 | 5685.77 | 32.13 AV | 54.00 | -21.87 | 2.00 H | 252 | 21.60 | 10.53 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

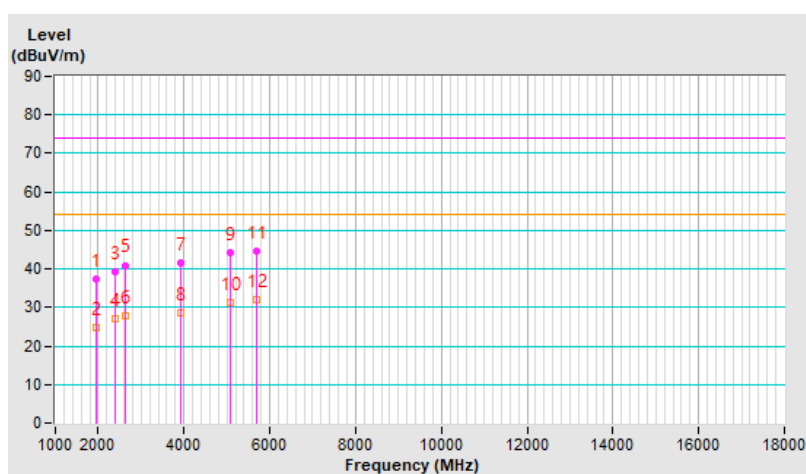


| | | | |
|------------------------|-----------------|---|--------------------------------|
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Resolution Bandwidth | Peak (PK) / Average (AV), 1MHz |
| Input Power | 5 Vdc from host | Environmental Conditions | 21°C, 56% RH |
| Tested By | Nick Lo | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1853.40 | 37.40 PK | 74.00 | -36.60 | 1.50 V | 360 | 40.27 | -2.87 |
| 2 | 1853.40 | 23.54 AV | 54.00 | -30.46 | 1.50 V | 285 | 26.41 | -2.87 |
| 3 | 3094.40 | 40.23 PK | 74.00 | -33.77 | 1.00 V | 268 | 38.56 | 1.67 |
| 4 | 3094.40 | 26.78 AV | 54.00 | -27.22 | 1.00 V | 145 | 25.11 | 1.67 |
| 5 | 3835.60 | 42.37 PK | 74.00 | -31.63 | 1.50 V | 223 | 37.33 | 5.04 |
| 6 | 3835.60 | 28.15 AV | 54.00 | -25.85 | 1.50 V | 0 | 23.11 | 5.04 |
| 7 | 4635.17 | 43.11 PK | 74.00 | -30.89 | 1.00 V | 360 | 35.42 | 7.69 |
| 8 | 4635.17 | 30.21 AV | 54.00 | -23.79 | 1.00 V | 126 | 22.52 | 7.69 |
| 9 | 5315.73 | 43.45 PK | 74.00 | -30.55 | 1.00 V | 273 | 34.37 | 9.08 |
| 10 | 5315.73 | 30.58 AV | 54.00 | -23.42 | 1.00 V | 290 | 21.50 | 9.08 |
| 11 | 5665.37 | 45.53 PK | 74.00 | -28.47 | 2.00 V | 107 | 35.08 | 10.45 |
| 12 | 5665.37 | 31.93 AV | 54.00 | -22.07 | 2.00 V | 204 | 21.48 | 10.45 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

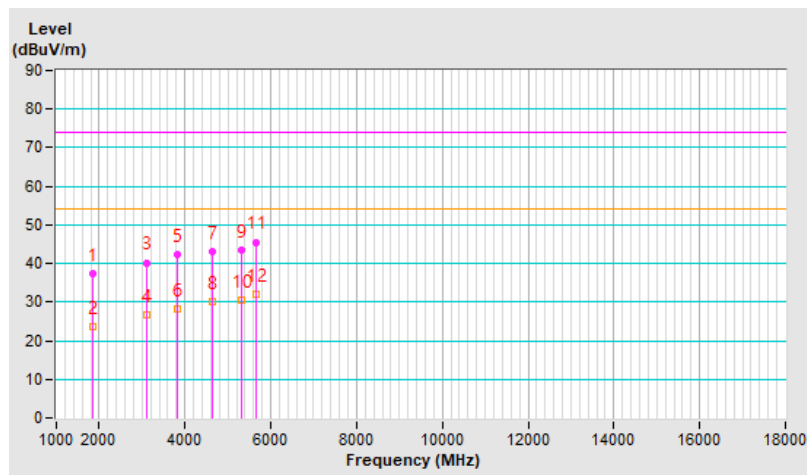

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---